



# TEST REPORT

## No. I20Z61503-WMD03

for

**TCL Communication Ltd.**

**5G NR/ LTE/WCDMA/GSM Mobile Phone**

**Model Name: T781**

**FCC ID: 2ACCJH133**

with

**Hardware Version: PIO**

**Software Version: 1A5A**

**Issued Date: 2020-11-02**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I20Z61503-WMD03	Rev.0	1 <sup>st</sup> edition	2020-10-26
I20Z61503-WMD03	Rev.1	Update ERP in Page 23 to 26.	2020-11-02

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION .....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
<b>4.1. DOCUMENTS SUPPLIED BY APPLICANT .....</b>	<b>8</b>
<b>4.2. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULT .....</b>	<b>10</b>
<b>7. TEST EQUIPMENT UTILIZED .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>13</b>
<b>A.1 OUTPUT POWER .....</b>	<b>13</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>29</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>36</b>
<b>A.4 OCCUPIED BANDWIDTH .....</b>	<b>39</b>
<b>A.5 EMISSION BANDWIDTH .....</b>	<b>57</b>
<b>A.6 BAND EDGE COMPLIANCE .....</b>	<b>75</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>99</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>102</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>103</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District,  
Beijing, P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2020-09-28  
Testing End Date: 2020-10-25

### 1.5. Signature



---

Dong Yuan  
(Prepared this test report)



---

Zhou Yu  
(Reviewed this test report)



---

Zhao Hui Lin  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	5G NR/ LTE/WCDMA/GSM Mobile Phone
Model Name	T781
FCC ID	2ACCJH133
Antenna	Embedded
Output power	20.26dBm maximum EIRP measured for LTE Band 7
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT35a	358008610207616/	PIO	1A5A	2020-09-25
	358008610207624			
UT36a	358008610207590/	PIO	1A5A	2020-09-28
	358008610207608			

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

##### **AE ID\*    Description**

AE1	Battery
AE2	Battery

##### **AE1**

Model	TLp043E7
Manufacturer	ningbo veken
Capacitance	4500mAh

##### **AE2**

Model	TLp043E1
Manufacturer	BYD
Capacitance	4500mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-19 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



## 5. Laboratory Environment

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. Summary Of Test Result

### LTE Band 7

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

### LTE Band 26(814MHz~824MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	90.635	P
2	Emission Limit	90.691	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	2.1049	P
6	Band Edge Compliance	90.691	P
7	Conducted Spurious Emission	90.691	P

### LTE Band 26(824MHz~849MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

**LTE Band 41**

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

## Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

## Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Wideband Radio Communication Tester	CMW500	159082	R&S	2020-12-24	1 year
Spectrum Analyzer	FSU	200030	R&S	2021-06-01	1 year
Radio Communication Analyzer	MT8821C	6201763159	Anritsu	2021-08-12	1 year
Climate Chamber	SH-242	93008556	ESPEC	2020-12-21	3 years
EMI Antenna	9117	177	Schwarzbeck	2021-10-12	3 years
EMI Antenna	3117	00058889	ETS-Lindgren	2020-11-18	1 year
EMI Antenna	3117	00119021	ETS-Lindgren	2021-01-14	1 year
Signal Generator	SMF100A	101295	R&S	2020-11-06	1 year
Test Receiver	E4440A	MY48250642	Agilent	2021-03-12	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2020-11-26	1 year
EMI Antenna	VULB9163	9163-235	Schwarzbeck	2020-11-24	1 year
Power Amplifier	5S1G4	0341863	AR	/	

## Annex A: Measurement Results

### A.1 Output Power

#### A.1.1 Summary

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### A.1.2 Conducted

##### A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### A.1.2.2 Measurement Result

#### LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2567.5	23.67	22.87	22.36
		2535.0	23.32	22.45	22.10
		2502.5	23.17	22.84	22.11
	1 RB low	2567.5	23.61	22.71	22.35
		2535.0	23.27	22.41	22.11
		2502.5	23.09	22.76	22.15
	50% RB mid	2567.5	22.71	21.72	21.44
		2535.0	22.24	21.36	21.03
		2502.5	22.24	21.39	21.10
	100% RB	2567.5	22.67	21.61	21.41
		2535.0	22.27	21.26	21.01
		2502.5	22.28	21.34	21.09
10MHz	1 RB high	2565.0	23.32	22.99	22.44
		2535.0	23.27	22.20	22.00
		2505.0	23.24	22.18	22.15
	1 RB low	2565.0	23.19	22.76	22.22
		2535.0	23.18	22.10	22.18
		2505.0	23.16	22.17	22.05
	50% RB mid	2565.0	22.29	21.73	21.35
		2535.0	22.28	21.37	20.99
		2505.0	22.27	21.29	21.07
	100% RB	2565.0	22.28	21.57	21.31

		2535.0	22.29	21.27	20.87
		2505.0	22.22	21.26	21.06
15MHz	1 RB high	2562.5	23.58	22.90	22.46
		2535.0	23.18	22.59	22.06
		2507.5	23.24	22.16	21.94
	1 RB low	2562.5	23.39	22.69	22.37
		2535.0	23.02	22.57	21.88
		2507.5	23.17	22.13	22.17
	50% RB mid	2562.5	22.44	21.48	21.22
		2535.0	22.18	21.13	20.91
		2507.5	22.16	21.11	20.90
	100% RB	2562.5	22.43	21.41	21.10
		2535.0	22.13	21.13	20.86
		2507.5	22.10	21.09	20.86
20MHz	1 RB high	2560.0	23.55	22.76	22.37
		2535.0	23.25	22.73	21.98
		2510.0	23.11	22.51	22.04
	1 RB low	2560.0	23.22	22.73	22.23
		2535.0	23.13	22.58	21.97
		2510.0	23.12	22.50	22.07
	50% RB mid	2560.0	22.50	21.54	21.24
		2535.0	22.24	21.24	21.01
		2510.0	22.21	21.17	20.95
	100% RB	2560.0	22.48	21.50	21.16
		2535.0	22.24	21.24	20.89
		2510.0	22.22	21.21	20.87

**LTE band 26(814MHz~824MHz)**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	823.3	22.73	21.87	21.08
		819.0	22.74	21.87	21.07
		814.7	22.79	21.90	21.12
	1 RB low	823.3	22.68	21.80	21.07
		819.0	22.73	21.87	21.09
		814.7	22.80	21.92	21.14
	50% RB mid	823.3	22.74	22.05	21.10
		819.0	22.75	22.05	21.13
		814.7	22.87	22.13	21.24
	100% RB	823.3	21.80	21.01	20.06
		819.0	21.81	21.02	20.06
		814.7	21.88	21.08	20.11
3MHz	1 RB high	822.5	22.80	21.93	21.25
		819.0	22.82	21.90	21.20
		815.5	22.88	22.04	21.25
	1 RB low	822.5	22.78	21.87	21.15
		819.0	22.83	21.96	21.21
		815.5	22.94	22.05	20.27
	50% RB mid	822.5	21.88	20.93	20.17
		819.0	21.89	20.92	20.14
		815.5	21.96	21.02	20.16
	100% RB	822.5	21.85	20.83	20.04
		819.0	21.85	20.84	20.08
		815.5	21.93	20.93	20.11
5MHz	1 RB high	821.5	22.82	22.02	21.22
		819.0	22.83	22.01	21.23
		816.5	22.86	22.04	21.26
	1 RB low	821.5	22.80	21.97	21.23
		819.0	22.89	22.08	21.27
		816.5	22.89	22.07	21.29
	50% RB mid	821.5	21.93	20.95	20.13
		819.0	21.95	20.97	20.15
		816.5	21.98	20.99	20.17
	100% RB	821.5	21.88	20.84	20.05
		819.0	21.88	20.87	20.08
		816.5	21.95	20.90	20.09
10MHz	1 RB high	819.0	22.82	21.81	21.15
	1 RB low	819.0	22.93	21.93	21.25
	50% RB mid	819.0	21.96	21.01	20.08
	100% RB	819.0	21.93	20.95	20.09

**LTE band 26(824MHz~849MHz)**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	22.59	21.72	21.01
		836.5	22.72	21.88	21.11
		824.7	22.75	21.87	21.08
	1 RB low	848.3	22.61	21.72	21.03
		836.5	22.65	21.78	21.05
		824.7	22.74	21.87	21.13
	50% RB mid	848.3	22.62	21.89	21.07
		836.5	22.71	22.02	21.16
		824.7	22.81	22.06	21.18
	100% RB	848.3	21.66	20.83	19.92
		836.5	21.80	20.99	19.94
		824.7	21.83	21.01	19.96
3MHz	1 RB high	847.5	22.68	21.76	21.14
		836.5	22.81	21.91	21.19
		825.5	22.86	21.92	21.18
	1 RB low	847.5	22.74	21.82	21.12
		836.5	22.78	21.87	21.15
		825.5	22.80	21.87	21.16
	50% RB mid	847.5	21.80	20.83	20.02
		836.5	21.88	20.91	20.06
		825.5	21.89	20.96	20.11
	100% RB	847.5	21.76	20.72	19.98
		836.5	21.84	20.83	20.03
		825.5	21.83	20.86	20.05
5MHz	1 RB high	846.5	22.69	21.89	21.14
		836.5	22.82	21.98	21.19
		826.5	22.81	22.04	21.21
	1 RB low	846.5	22.78	21.97	21.21
		836.5	22.78	21.97	21.17
		826.5	22.77	21.97	21.15
	50% RB mid	846.5	21.83	20.93	20.09
		836.5	21.86	20.90	20.07
		826.5	21.89	20.94	20.06
	100% RB	846.5	21.83	20.86	20.07
		836.5	21.84	20.83	20.03
		826.5	21.92	20.85	20.04
10MHz	1 RB high	844.0	22.74	21.77	21.06
		836.5	22.73	21.80	21.11
		829.0	22.73	21.89	21.13
	1 RB low	844.0	22.81	21.86	21.13



		836.5	22.82	21.86	21.14
		829.0	22.84	21.87	21.17
		844.0	21.77	20.93	20.13
	50% RB mid	836.5	21.79	20.87	20.09
		829.0	21.84	21.01	20.18
		844.0	21.82	20.83	20.01
	100% RB	836.5	21.88	20.89	20.04
		829.0	21.88	20.87	20.04
		844.0	21.82	20.83	20.01
15MHz	1 RB high	841.5	22.51	21.87	20.92
		836.5	22.55	21.96	20.98
		831.5	22.58	21.95	21.01
	1 RB low	841.5	22.61	22.01	21.05
		836.5	22.59	22.02	21.07
		831.5	22.60	22.04	21.07
	50% RB mid	841.5	21.61	20.60	19.92
		836.5	21.62	20.58	19.85
		831.5	21.62	20.60	19.82
	100% RB	841.5	21.63	20.71	19.91
		836.5	21.59	20.62	19.91
		831.5	21.58	20.64	19.89

**LTE band 41**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2687.5	23.14	22.06	21.76
		2593.0	23.01	21.94	21.71
		2498.5	22.64	22.00	21.47
	1 RB low	2687.5	23.06	21.99	21.72
		2593.0	23.01	21.91	21.75
		2498.5	22.59	21.91	21.42
	50% RB mid	2687.5	22.16	21.04	20.83
		2593.0	22.18	21.15	20.86
		2498.5	21.75	20.88	20.49
	100% RB	2687.5	22.12	21.13	20.84
		2593.0	22.10	21.14	20.85
		2498.5	21.75	20.74	20.43
10MHz	1 RB high	2685.0	23.05	21.95	21.59
		2593.0	23.02	22.09	21.67
		2501.0	22.65	21.87	21.43
	1 RB low	2685.0	23.01	21.90	21.58
		2593.0	22.97	21.96	21.74
		2501.0	22.60	21.79	21.38
	50% RB mid	2685.0	22.14	21.09	20.88
		2593.0	22.16	21.14	20.89
		2501.0	21.80	20.81	20.50
	100% RB	2685.0	22.12	21.10	20.78
		2593.0	22.14	21.13	20.78
		2501.0	21.79	20.80	20.45
15MHz	1 RB high	2682.5	22.95	21.94	21.39
		2593.0	22.86	22.05	21.43
		2503.5	22.57	21.57	21.12
	1 RB low	2682.5	22.83	21.73	21.32
		2593.0	22.67	21.86	21.36
		2503.5	22.56	21.54	20.95
	50% RB mid	2682.5	21.99	20.98	20.60
		2593.0	21.98	21.02	20.62
		2503.5	21.67	20.67	20.28
	100% RB	2682.5	21.98	21.00	20.68
		2593.0	21.99	20.97	20.67
		2503.5	21.64	20.68	20.28
20MHz	1 RB high	2680.0	22.92	21.92	21.55
		2593.0	22.91	21.86	21.61
		2506.0	22.66	21.64	21.27
	1 RB low	2680.0	22.73	21.86	21.55



		2593.0	22.82	21.61	21.54
		2506.0	22.55	21.53	21.14
	50% RB mid	2680.0	21.86	20.88	20.58
		2593.0	21.97	20.96	20.61
		2506.0	21.62	20.58	20.29
	100% RB	2680.0	21.86	20.84	20.68
		2593.0	21.92	20.92	20.69
		2506.0	21.63	20.58	20.38



### A.1.3.3 Measurement result

#### LTE Band 7-EIRP

Limits:  $\leq 33$  dBm (2W)

#### LTE band 7

Bandwidth h	RB size/offset	Frequency (MHz)	Power (dBm)			EIRP(dBm) ( $G_T - L_C = -2.2$ )		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz	1 RB high	2567.5	23.67	22.87	22.36	21.47	20.67	20.16
		2535.0	23.32	22.45	22.10	21.12	20.25	19.90
		2502.5	23.17	22.84	22.11	20.97	20.64	19.91
	1 RB low	2567.5	23.61	22.71	22.35	21.41	20.51	20.15
		2535.0	23.27	22.41	22.11	21.07	20.21	19.91
		2502.5	23.09	22.76	22.15	20.89	20.56	19.95
	50% RB mid	2567.5	22.71	21.72	21.44	20.51	19.52	19.24
		2535.0	22.24	21.36	21.03	20.04	19.16	18.83
		2502.5	22.24	21.39	21.10	20.04	19.19	18.90
	100% RB	2567.5	22.67	21.61	21.41	20.47	19.41	19.21
		2535.0	22.27	21.26	21.01	20.07	19.06	18.81
		2502.5	22.28	21.34	21.09	20.08	19.14	18.89
10MHz	1 RB high	2565.0	23.32	22.99	22.44	21.12	20.79	20.24
		2535.0	23.27	22.20	22.00	21.07	20.00	19.80
		2505.0	23.24	22.18	22.15	21.04	19.98	19.95
	1 RB low	2565.0	23.19	22.76	22.22	20.99	20.56	20.02
		2535.0	23.18	22.10	22.18	20.98	19.90	19.98
		2505.0	23.16	22.17	22.05	20.96	19.97	19.85
	50% RB mid	2565.0	22.29	21.73	21.35	20.09	19.53	19.15
		2535.0	22.28	21.37	20.99	20.08	19.17	18.79
		2505.0	22.27	21.29	21.07	20.07	19.09	18.87
	100% RB	2565.0	22.28	21.57	21.31	20.08	19.37	19.11
		2535.0	22.29	21.27	20.87	20.09	19.07	18.67
		2505.0	22.22	21.26	21.06	20.02	19.06	18.86
15MHz	1 RB high	2562.5	23.58	22.90	22.46	21.38	20.70	20.26
		2535.0	23.18	22.59	22.06	20.98	20.39	19.86
		2507.5	23.24	22.16	21.94	21.04	19.96	19.74
	1 RB low	2562.5	23.39	22.69	22.37	21.19	20.49	20.17
		2535.0	23.02	22.57	21.88	20.82	20.37	19.68
		2507.5	23.17	22.13	22.17	20.97	19.93	19.97
	50% RB mid	2562.5	22.44	21.48	21.22	20.24	19.28	19.02
		2535.0	22.18	21.13	20.91	19.98	18.93	18.71
		2507.5	22.16	21.11	20.90	19.96	18.91	18.70
	100% RB	2562.5	22.43	21.41	21.10	20.23	19.21	18.90
		2535.0	22.13	21.13	20.86	19.93	18.93	18.66

		2507.5	22.10	21.09	20.86	19.90	18.89	18.66
20MHz	1 RB high	2560.0	23.55	22.76	22.37	21.35	20.56	20.17
		2535.0	23.25	22.73	21.98	21.05	20.53	19.78
		2510.0	23.11	22.51	22.04	20.91	20.31	19.84
	1 RB low	2560.0	23.22	22.73	22.23	21.02	20.53	20.03
		2535.0	23.13	22.58	21.97	20.93	20.38	19.77
		2510.0	23.12	22.50	22.07	20.92	20.30	19.87
	50% RB mid	2560.0	22.50	21.54	21.24	20.30	19.34	19.04
		2535.0	22.24	21.24	21.01	20.04	19.04	18.81
		2510.0	22.21	21.17	20.95	20.01	18.97	18.75
	100% RB	2560.0	22.48	21.50	21.16	20.28	19.30	18.96
		2535.0	22.24	21.24	20.89	20.04	19.04	18.69
		2510.0	22.22	21.21	20.87	20.02	19.01	18.67

**LTE band 26(814MHz~824MHz)**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)			ERP(dBm) ( $G_T - L_C = -3.5$ )		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4MHz	1 RB high	823.3	22.73	21.87	21.08	17.08	16.22	15.43
		819.0	22.74	21.87	21.07	17.09	16.22	15.42
		814.7	22.79	21.90	21.12	17.14	16.25	15.47
	1 RB low	823.3	22.68	21.80	21.07	17.03	16.15	15.42
		819.0	22.73	21.87	21.09	17.08	16.22	15.44
		814.7	22.80	21.92	21.14	17.15	16.27	15.49
	50% RB mid	823.3	22.74	22.05	21.10	17.09	16.40	15.45
		819.0	22.75	22.05	21.13	17.10	16.40	15.48
		814.7	22.87	22.13	21.24	17.22	16.48	15.59
	100% RB	823.3	21.80	21.01	20.06	16.15	15.36	14.41
		819.0	21.81	21.02	20.06	16.16	15.37	14.41
		814.7	21.88	21.08	20.11	16.23	15.43	14.46
3MHz	1 RB high	822.5	22.80	21.93	21.25	17.15	16.28	15.60
		819.0	22.82	21.90	21.20	17.17	16.25	15.55
		815.5	22.88	22.04	21.25	17.23	16.39	15.60
	1 RB low	822.5	22.78	21.87	21.15	17.13	16.22	15.50
		819.0	22.83	21.96	21.21	17.18	16.31	15.56
		815.5	22.94	22.05	20.27	17.29	16.40	14.62
	50% RB mid	822.5	21.88	20.93	20.17	16.23	15.28	14.52
		819.0	21.89	20.92	20.14	16.24	15.27	14.49
		815.5	21.96	21.02	20.16	16.31	15.37	14.51
	100% RB	822.5	21.85	20.83	20.04	16.20	15.18	14.39
		819.0	21.85	20.84	20.08	16.20	15.19	14.43
		815.5	21.93	20.93	20.11	16.28	15.28	14.46
5MHz	1 RB high	821.5	22.82	22.02	21.22	17.17	16.37	15.57
		819.0	22.83	22.01	21.23	17.18	16.36	15.58
		816.5	22.86	22.04	21.26	17.21	16.39	15.61
	1 RB low	821.5	22.80	21.97	21.23	17.15	16.32	15.58
		819.0	22.89	22.08	21.27	17.24	16.43	15.62
		816.5	22.89	22.07	21.29	17.24	16.42	15.64
	50% RB mid	821.5	21.93	20.95	20.13	16.28	15.30	14.48
		819.0	21.95	20.97	20.15	16.30	15.32	14.50
		816.5	21.98	20.99	20.17	16.33	15.34	14.52
	100% RB	821.5	21.88	20.84	20.05	16.23	15.19	14.40
		819.0	21.88	20.87	20.08	16.23	15.22	14.43
		816.5	21.95	20.90	20.09	16.30	15.25	14.44
10MHz	1 RB high	819.0	22.82	21.81	21.15	17.17	16.16	15.50
	1 RB low	819.0	22.93	21.93	21.25	17.28	16.28	15.60
	50% RB	819.0	21.96	21.01	20.08	16.31	15.36	14.43



	mid							
	100% RB	819.0	21.93	20.95	20.09	16.28	15.30	14.44



**LTE band 26(824MHz~849MHz)**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)			ERP(dBm) (G <sub>T</sub> - L <sub>C</sub> = -3.5)		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	22.59	21.72	21.01	16.94	16.07	15.36
		836.5	22.72	21.88	21.11	17.07	16.23	15.46
		824.7	22.75	21.87	21.08	17.10	16.22	15.43
	1 RB low	848.3	22.61	21.72	21.03	16.96	16.07	15.38
		836.5	22.65	21.78	21.05	17.00	16.13	15.40
		824.7	22.74	21.87	21.13	17.09	16.22	15.48
	50% RB mid	848.3	22.62	21.89	21.07	16.97	16.24	15.42
		836.5	22.71	22.02	21.16	17.06	16.37	15.51
		824.7	22.81	22.06	21.18	17.16	16.41	15.53
	100% RB	848.3	21.66	20.83	19.92	16.01	15.18	14.27
		836.5	21.80	20.99	19.94	16.15	15.34	14.29
		824.7	21.83	21.01	19.96	16.18	15.36	14.31
3MHz	1 RB high	847.5	22.68	21.76	21.14	17.03	16.11	15.49
		836.5	22.81	21.91	21.19	17.16	16.26	15.54
		825.5	22.86	21.92	21.18	17.21	16.27	15.53
	1 RB low	847.5	22.74	21.82	21.12	17.09	16.17	15.47
		836.5	22.78	21.87	21.15	17.13	16.22	15.50
		825.5	22.80	21.87	21.16	17.15	16.22	15.51
	50% RB mid	847.5	21.80	20.83	20.02	16.15	15.18	14.37
		836.5	21.88	20.91	20.06	16.23	15.26	14.41
		825.5	21.89	20.96	20.11	16.24	15.31	14.46
	100% RB	847.5	21.76	20.72	19.98	16.11	15.07	14.33
		836.5	21.84	20.83	20.03	16.19	15.18	14.38
		825.5	21.83	20.86	20.05	16.18	15.21	14.40
5MHz	1 RB high	846.5	22.69	21.89	21.14	17.04	16.24	15.49
		836.5	22.82	21.98	21.19	17.17	16.33	15.54
		826.5	22.81	22.04	21.21	17.16	16.39	15.56
	1 RB low	846.5	22.78	21.97	21.21	17.13	16.32	15.56
		836.5	22.78	21.97	21.17	17.13	16.32	15.52
		826.5	22.77	21.97	21.15	17.12	16.32	15.50
	50% RB mid	846.5	21.83	20.93	20.09	16.18	15.28	14.44
		836.5	21.86	20.90	20.07	16.21	15.25	14.42
		826.5	21.89	20.94	20.06	16.24	15.29	14.41
	100% RB	846.5	21.83	20.86	20.07	16.18	15.21	14.42
		836.5	21.84	20.83	20.03	16.19	15.18	14.38
		826.5	21.92	20.85	20.04	16.27	15.20	14.39
10MHz	1 RB high	844.0	22.74	21.77	21.06	17.09	16.12	15.41
		836.5	22.73	21.80	21.11	17.08	16.15	15.46
		829.0	22.73	21.89	21.13	17.08	16.24	15.48

	1 RB low	844.0	22.81	21.86	21.13	17.16	16.21	15.48
		836.5	22.82	21.86	21.14	17.17	16.21	15.49
		829.0	22.84	21.87	21.17	17.19	16.22	15.52
	50% RB mid	844.0	21.77	20.93	20.13	16.12	15.28	14.48
		836.5	21.79	20.87	20.09	16.14	15.22	14.44
		829.0	21.84	21.01	20.18	16.19	15.36	14.53
	100% RB	844.0	21.82	20.83	20.01	16.17	15.18	14.36
		836.5	21.88	20.89	20.04	16.23	15.24	14.39
		829.0	21.88	20.87	20.04	16.23	15.22	14.39
15MHz	1 RB high	841.5	22.51	21.87	20.92	16.86	16.22	15.27
		836.5	22.55	21.96	20.98	16.90	16.31	15.33
		831.5	22.58	21.95	21.01	16.93	16.30	15.36
	1 RB low	841.5	22.61	22.01	21.05	16.96	16.36	15.40
		836.5	22.59	22.02	21.07	16.94	16.37	15.42
		831.5	22.60	22.04	21.07	16.95	16.39	15.42
	50% RB mid	841.5	21.61	20.60	19.92	15.96	14.95	14.27
		836.5	21.62	20.58	19.85	15.97	14.93	14.20
		831.5	21.62	20.60	19.82	15.97	14.95	14.17
	100% RB	841.5	21.63	20.71	19.91	15.98	15.06	14.26
		836.5	21.59	20.62	19.91	15.94	14.97	14.26
		831.5	21.58	20.64	19.89	15.93	14.99	14.24

**LTE band 41**

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)			EIRP(dBm) (GT – LC = -3.8)		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5MHz	1 RB high	2687.5	23.14	22.06	21.76	19.34	18.26	17.96
		2593.0	23.01	21.94	21.71	19.21	18.14	17.91
		2498.5	22.64	22.00	21.47	18.84	18.20	17.67
	1 RB low	2687.5	23.06	21.99	21.72	19.26	18.19	17.92
		2593.0	23.01	21.91	21.75	19.21	18.11	17.95
		2498.5	22.59	21.91	21.42	18.79	18.11	17.62
	50% RB mid	2687.5	22.16	21.04	20.83	18.36	17.24	17.03
		2593.0	22.18	21.15	20.86	18.38	17.35	17.06
		2498.5	21.75	20.88	20.49	17.95	17.08	16.69
	100% RB	2687.5	22.12	21.13	20.84	18.32	17.33	17.04
		2593.0	22.10	21.14	20.85	18.30	17.34	17.05
		2498.5	21.75	20.74	20.43	17.95	16.94	16.63
10MHz	1 RB high	2685.0	23.05	21.95	21.59	19.25	18.15	17.79
		2593.0	23.02	22.09	21.67	19.22	18.29	17.87
		2501.0	22.65	21.87	21.43	18.85	18.07	17.63
	1 RB low	2685.0	23.01	21.90	21.58	19.21	18.10	17.78
		2593.0	22.97	21.96	21.74	19.17	18.16	17.94
		2501.0	22.60	21.79	21.38	18.80	17.99	17.58
	50% RB mid	2685.0	22.14	21.09	20.88	18.34	17.29	17.08
		2593.0	22.16	21.14	20.89	18.36	17.34	17.09
		2501.0	21.80	20.81	20.50	18.00	17.01	16.70
	100% RB	2685.0	22.12	21.10	20.78	18.32	17.30	16.98
		2593.0	22.14	21.13	20.78	18.34	17.33	16.98
		2501.0	21.79	20.80	20.45	17.99	17.00	16.65
15MHz	1 RB high	2682.5	22.95	21.94	21.39	19.15	18.14	17.59
		2593.0	22.86	22.05	21.43	19.06	18.25	17.63
		2503.5	22.57	21.57	21.12	18.77	17.77	17.32
	1 RB low	2682.5	22.83	21.73	21.32	19.03	17.93	17.52
		2593.0	22.67	21.86	21.36	18.87	18.06	17.56
		2503.5	22.56	21.54	20.95	18.76	17.74	17.15
	50% RB mid	2682.5	21.99	20.98	20.60	18.19	17.18	16.80
		2593.0	21.98	21.02	20.62	18.18	17.22	16.82
		2503.5	21.67	20.67	20.28	17.87	16.87	16.48
	100% RB	2682.5	21.98	21.00	20.68	18.18	17.20	16.88
		2593.0	21.99	20.97	20.67	18.19	17.17	16.87
		2503.5	21.64	20.68	20.28	17.84	16.88	16.48
20MHz	1 RB high	2680.0	22.92	21.92	21.55	19.12	18.12	17.75
		2593.0	22.91	21.86	21.61	19.11	18.06	17.81
		2506.0	22.66	21.64	21.27	18.86	17.84	17.47



	1 RB low	2680.0	22.73	21.86	21.55	18.93	18.06	17.75
		2593.0	22.82	21.61	21.54	19.02	17.81	17.74
		2506.0	22.55	21.53	21.14	18.75	17.73	17.34
	50% RB mid	2680.0	21.86	20.88	20.58	18.06	17.08	16.78
		2593.0	21.97	20.96	20.61	18.17	17.16	16.81
		2506.0	21.62	20.58	20.29	17.82	16.78	16.49
	100% RB	2680.0	21.86	20.84	20.68	18.06	17.04	16.88
		2593.0	21.92	20.92	20.69	18.12	17.12	16.89
		2506.0	21.63	20.58	20.38	17.83	16.78	16.58

## A.2 Emission Limit


### **A.2.1 Measurement Method**

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of each LTE Band.

#### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

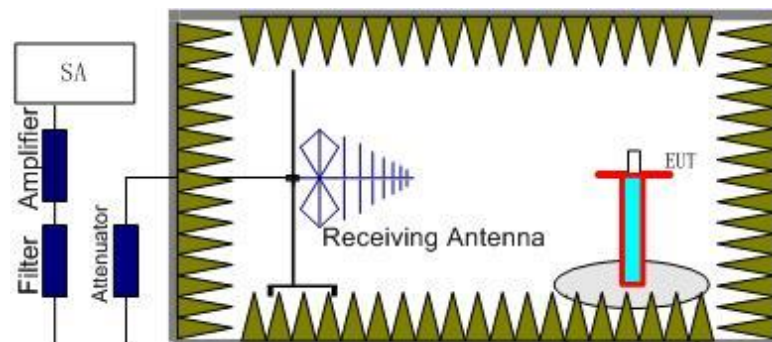

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

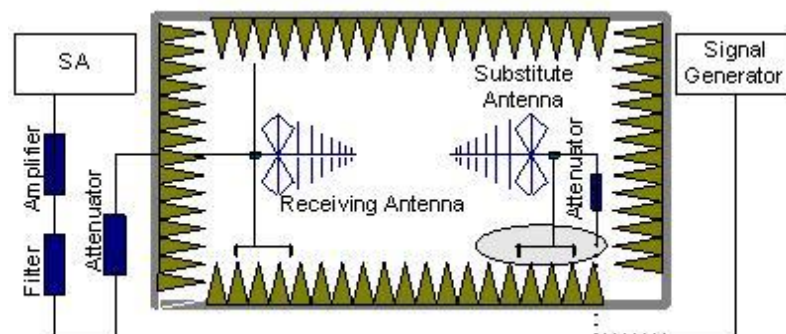

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

### A.2.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB.

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power ( $P$ ) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

Part 27.53(f) states for operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals.

Part 27.53(g) states for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the



transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Part 90.691 states that out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of each LTE Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of each LTE Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 30MHz to 26GHz.

**LTE Band 7, 5 MHz, QPSK, Channel 20775**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.02	-44.91	6.59	9.91	-41.59	-25.00	16.59	V
7511.01	-39.51	8.35	12.21	-35.65	-25.00	10.65	H
10023.01	-48.18	9.25	12.91	-44.52	-25.00	19.52	H
12529.01	-38.37	10.26	13.22	-35.41	-25.00	10.41	H
15024.00	-45.72	11.25	13.99	-42.98	-25.00	17.98	V
17508.00	-44.62	12.75	14.91	-42.46	-25.00	17.46	H

**LTE Band 7, 5 MHz, QPSK, Channel 21100**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5072.02	-44.06	6.69	10.00	-40.75	-25.00	15.75	V
7610.01	-36.75	8.02	12.29	-32.48	-25.00	7.48	H
10153.01	-49.55	9.38	12.96	-45.97	-25.00	20.97	H
12692.01	-41.62	10.31	13.32	-38.61	-25.00	13.61	H
15228.00	-45.81	11.37	13.86	-43.32	-25.00	18.32	H
17735.00	-45.24	12.38	15.23	-42.39	-25.00	17.39	H

**LTE Band 7, 5 MHz, QPSK, Channel 21425**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5136.02	-44.30	6.86	10.09	-41.07	-25.00	16.07	V
7703.01	-36.21	8.42	12.36	-32.27	-25.00	7.27	H
10274.01	-48.92	9.55	13.01	-45.46	-25.00	20.46	H
12843.01	-40.41	10.66	13.41	-37.66	-25.00	12.66	H
15412.00	-45.26	11.41	13.75	-42.92	-25.00	17.92	H
17963.00	-43.67	12.89	15.55	-41.01	-25.00	16.01	V



**LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 26797**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.01	-58.54	3.57	5.21	2.15	-59.05	-13.00	46.05	V
2474.00	-45.24	4.60	6.02	2.15	-45.97	-13.00	32.97	H
3310.02	-54.79	5.29	7.74	2.15	-54.49	-13.00	41.49	V
4119.02	-54.94	6.04	9.02	2.15	-54.11	-13.00	41.11	H
4962.01	-54.75	6.67	9.86	2.15	-53.71	-13.00	40.71	V
5781.01	-53.41	7.22	10.54	2.15	-52.24	-13.00	39.24	V

**LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 26915**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1655.01	-48.90	3.57	5.22	2.15	-49.40	-13.00	36.40	V
2510.00	-45.94	4.63	6.12	2.15	-46.60	-13.00	33.60	V
3341.02	-54.12	5.31	7.82	2.15	-53.76	-13.00	40.76	H
4196.02	-54.91	6.20	9.10	2.15	-54.16	-13.00	41.16	V
5004.01	-54.24	6.60	9.91	2.15	-53.08	-13.00	40.08	V
5839.01	-53.59	7.20	10.53	2.15	-52.41	-13.00	39.41	V

**LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 27033**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1706.01	-59.37	3.60	5.13	2.15	-59.99	-13.00	46.99	V
2545.00	-43.87	4.66	6.18	2.15	-44.50	-13.00	31.50	V
3413.02	-55.14	5.37	7.99	2.15	-54.67	-13.00	41.67	H
4256.02	-55.29	6.23	9.16	2.15	-54.51	-13.00	41.51	H
5073.01	-54.49	6.70	10.00	2.15	-53.34	-13.00	40.34	V
5949.01	-53.07	7.47	10.51	2.15	-52.18	-13.00	39.18	H

**LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 26697**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2444.00	-45.31	4.57	5.93	2.15	-46.10	-13.00	33.10	V
6527.01	-52.81	7.51	11.03	2.15	-51.44	-13.00	38.44	V
7331.01	-52.14	8.10	12.00	2.15	-50.39	-13.00	37.39	V
8127.01	-52.43	8.37	12.70	2.15	-50.25	-13.00	37.25	V
8942.00	-51.27	8.99	13.09	2.15	-49.32	-13.00	36.32	V
9767.00	-51.09	8.96	13.13	2.15	-49.07	-13.00	36.07	V

**LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 26740**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1638.01	-59.52	3.56	5.25	2.15	-59.98	-13.00	46.98	H
2457.00	-48.42	4.58	5.97	2.15	-49.18	-13.00	36.18	V
3256.02	-54.24	5.28	7.61	2.15	-54.06	-13.00	41.06	V
4089.02	-54.99	6.04	8.99	2.15	-54.19	-13.00	41.19	H
4895.01	-54.61	6.73	9.80	2.15	-53.69	-13.00	40.69	V
5750.01	-53.76	7.26	10.55	2.15	-52.62	-13.00	39.62	V

**LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 26783**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2470.00	-46.88	4.59	6.01	2.15	-47.61	-13.00	34.61	V
6784.01	-51.88	7.91	11.34	2.15	-50.60	-13.00	37.60	V
7595.01	-51.92	7.99	12.28	2.15	-49.78	-13.00	36.78	V
8352.00	-50.90	8.65	12.88	2.15	-48.82	-13.00	35.82	H
8987.00	-50.05	9.15	13.10	2.15	-48.25	-13.00	35.25	H
9796.00	-50.11	9.02	13.10	2.15	-48.18	-13.00	35.18	V

**LTE Band 41 HPUE, 5MHz, QPSK, Channel 39675**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4998.02	-44.18	6.61	9.90	-40.89	-25.00	15.89	V
7496.01	-44.03	8.38	12.20	-40.21	-25.00	15.21	V
9997.01	-49.51	9.18	12.90	-45.79	-25.00	20.79	V
12494.01	-48.13	10.19	13.20	-45.12	-25.00	20.12	H
14994.00	-45.84	11.21	14.00	-43.05	-25.00	18.05	V
17486.00	-42.99	12.69	14.87	-40.81	-25.00	15.81	H

**LTE Band 41 HPUE, 5MHz, QPSK, Channel 40620**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.02	-47.77	6.94	10.16	-44.55	-25.00	19.55	V
7784.01	-43.61	8.31	12.43	-39.49	-25.00	14.49	H
10389.01	-46.75	9.78	13.06	-43.47	-25.00	18.47	H
12971.01	-47.14	10.48	13.48	-44.14	-25.00	19.14	V
15551.00	-43.48	11.51	13.70	-41.29	-25.00	16.29	H
16842.00	-42.05	12.07	13.74	-40.38	-25.00	15.38	H

**LTE Band 41 HPUE, 5MHz, QPSK, Channel 41565**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5382.02	-48.09	6.87	10.43	-44.53	-25.00	19.53	H
8069.01	-38.86	8.32	12.66	-34.52	-25.00	9.52	H
10769.01	-46.69	9.47	13.15	-43.01	-25.00	18.01	H
13439.01	-41.58	10.60	14.11	-38.07	-25.00	13.07	V
16135.00	-40.77	11.81	13.67	-38.91	-25.00	13.91	V
17490.00	-43.81	12.70	14.88	-41.63	-25.00	16.63	H

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500, and in a simulated call on middle channel for each LTE band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### LTE Band 7, 20MHz bandwidth QPSK (worst case of all bandwidths)

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	2500.865	2569.167		
50				10.21	0.0040
40				-2.13	0.0008
30				-1.83	0.0007
10				9.24	0.0036
0				12.63	0.0050
-10				-0.79	0.0003
-20				-1.12	0.0004
-30				-2.35	0.0009

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	2500.865	2569.167	-2.82	0.0011
4.4				10.74	0.0042

#### LTE Band 26(814MHz~824MHz), 10MHz bandwidth QPSK (worst case of all bandwidths)

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	814.365	823.635		
50				-0.20	0.0002
40				0.03	0.0000
30				-0.46	0.0006
10				-0.60	0.0007
0				0.19	0.0002
-10				0.29	0.0004
-20				0.44	0.0005
-30				-4.91	0.0060

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	814.365	823.635	-5.58	0.0068
4.4				0.24	0.0003

**LTE Band 26(824MHz~849MHz), 15MHz bandwidth QPSK (worst case of all bandwidths)**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	824.529	848.495		
50				0.90	0.0011
40				-0.34	0.0004
30				0.86	0.0010
10				-0.29	0.0003
0				-0.14	0.0002
-10				-0.47	0.0006
-20				-0.62	0.0007
-30				-0.77	0.0009

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	824.529	848.495	1.06	0.0013
4.4				0.00	0.0000

**LTE Band 41, 20MHz bandwidth QPSK (worst case of all bandwidths)**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	2494.782	2691.090		
50				-0.04	0.0000
40				-2.99	0.0012
30				-1.60	0.0006
10				0.04	0.0000
0				-0.23	0.0001
-10				-0.83	0.0003
-20				-0.23	0.0001
-30				-0.44	0.0002

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	2494.782	2691.090	-0.40	0.0002
4.4				-1.27	0.0005

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	4495.19	4471.15

### LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

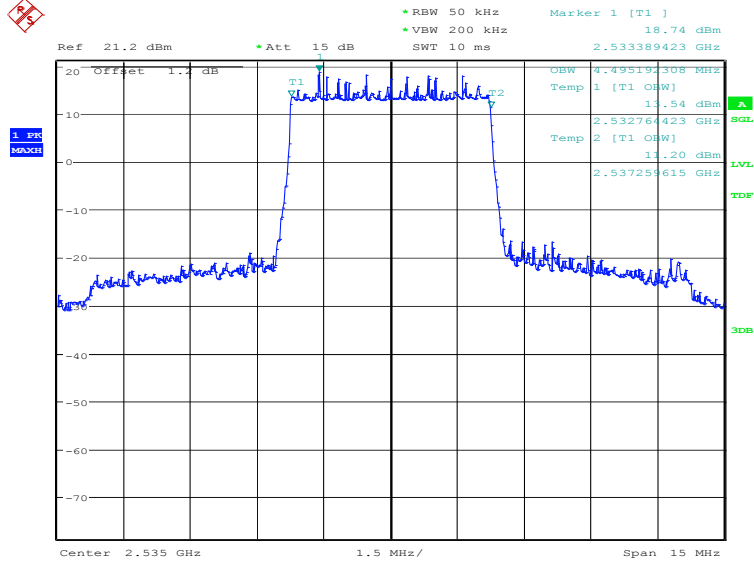

Date: 27.SEP.2020 17:27:19

### LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)

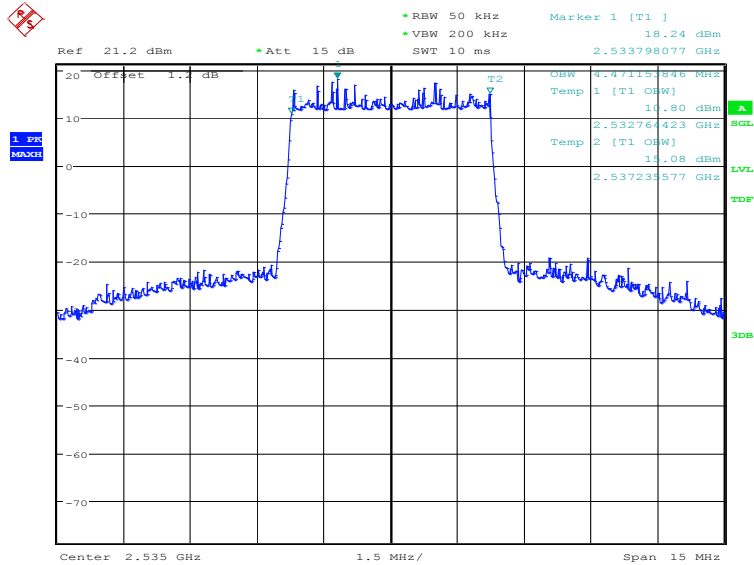


Date: 27.SEP.2020 17:27:58



### LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	8990.38	8990.38

### LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

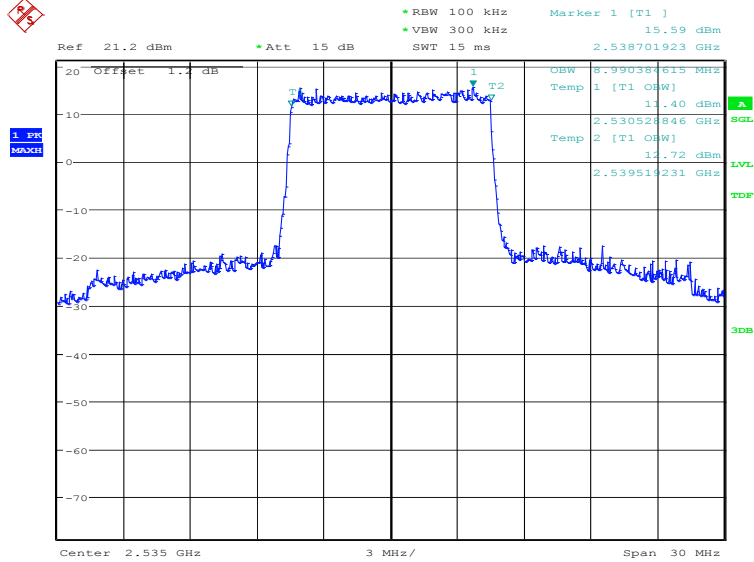

Date: 27.SEP.2020 17:28:39

### LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

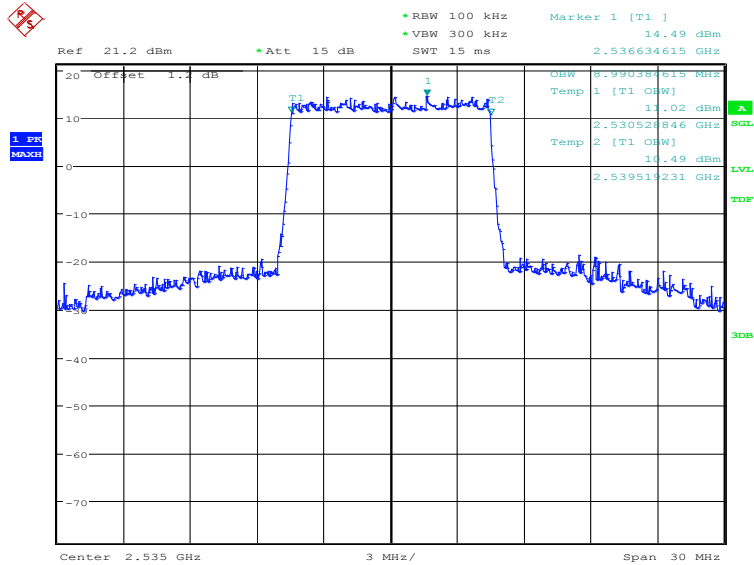


Date: 27.SEP.2020 17:29:17

**LTE band 7, 15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

**LTE band 7, 15MHz Bandwidth, QPSK (99% BW)**

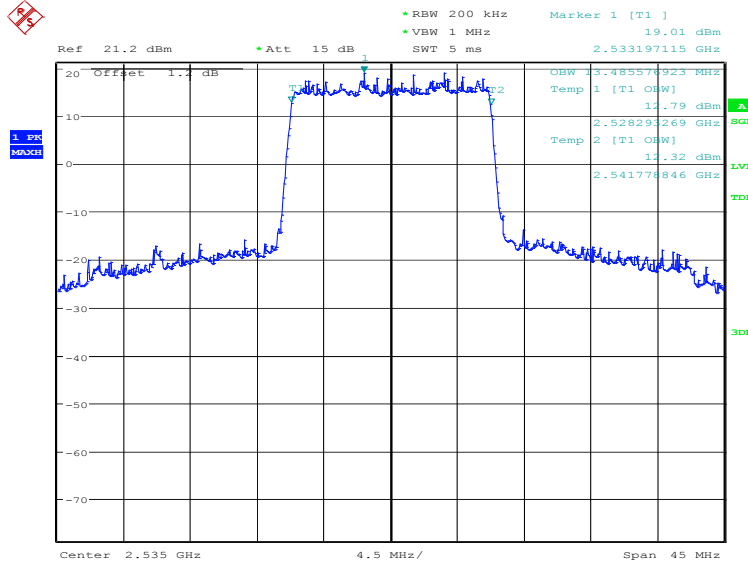

Date: 27.SEP.2020 17:29:58

**LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)**

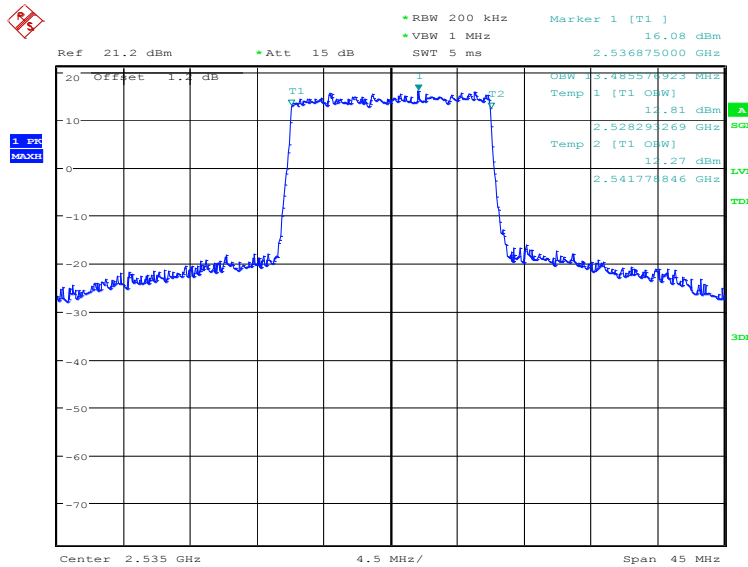


Date: 27.SEP.2020 17:30:36

**LTE band 7, 20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	17980.77	17980.77

**LTE band 7, 20MHz Bandwidth, QPSK (99% BW)**

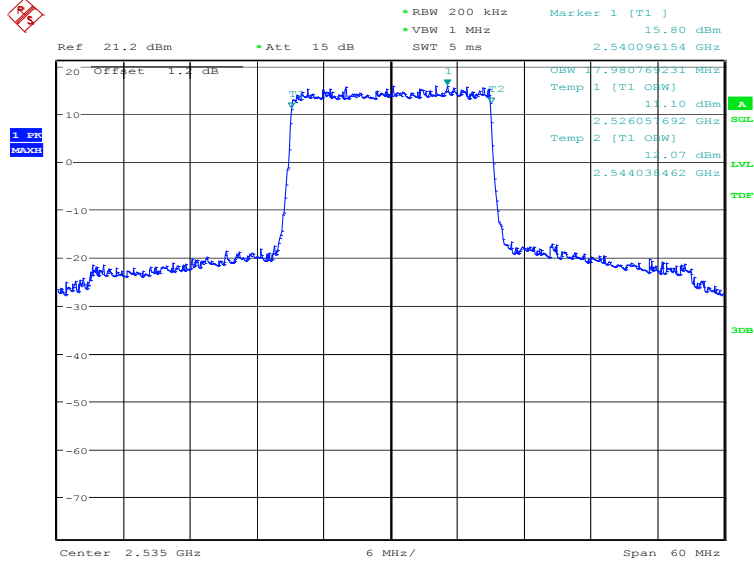

Date: 27.SEP.2020 17:31:17

**LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)**

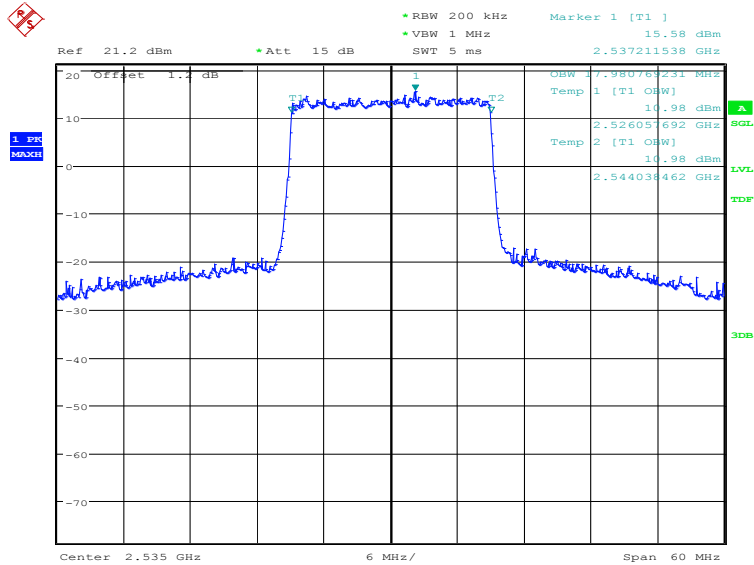


Date: 27.SEP.2020 17:31:56

**LTE band 26(814MHz~824MHz), 1.4MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	1089.74	1097.76

**LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, QPSK (99% BW)**

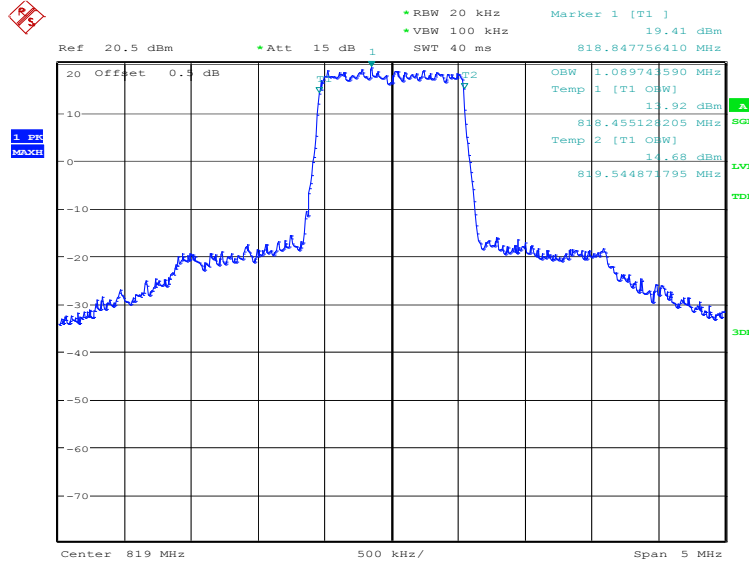

Date: 28.SEP.2020 14:21:11

**LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, 16QAM (99% BW)**

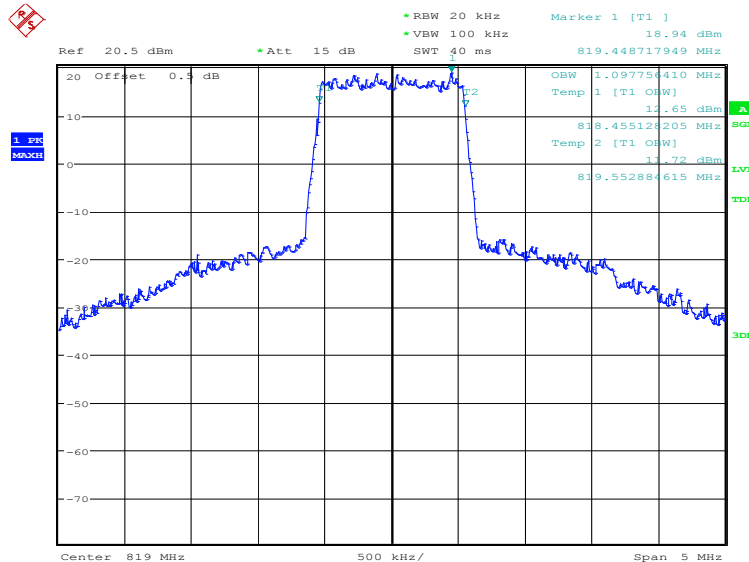


Date: 28.SEP.2020 14:21:50

**LTE band 26(814MHz~824MHz), 3MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	2708.33	2692.31

**LTE band 26(814MHz~824MHz), 3MHz Bandwidth, QPSK (99% BW)**

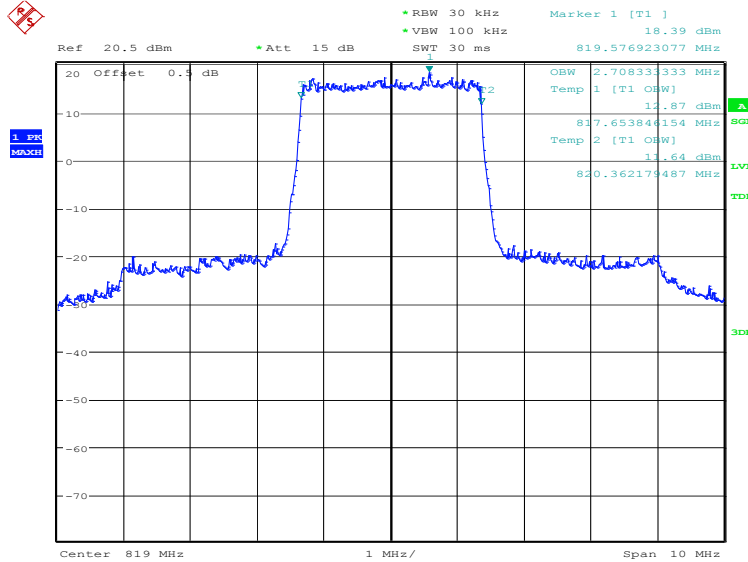

Date: 28.SEP.2020 14:22:30

**LTE band 26(814MHz~824MHz), 3MHz Bandwidth, 16QAM (99% BW)**

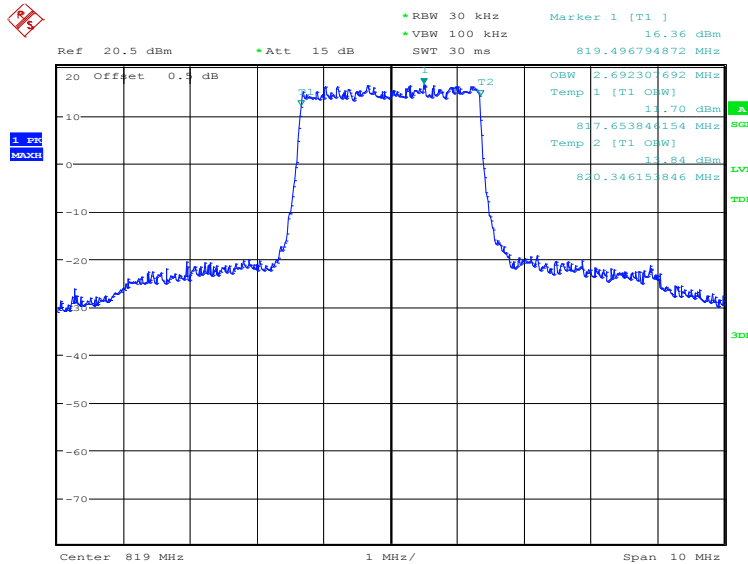


Date: 28.SEP.2020 14:23:09

**LTE band 26(814MHz~824MHz), 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
	819.0	QPSK
	4519.23	4495.19

**LTE band 26(814MHz~824MHz), 5MHz Bandwidth, QPSK (99% BW)**

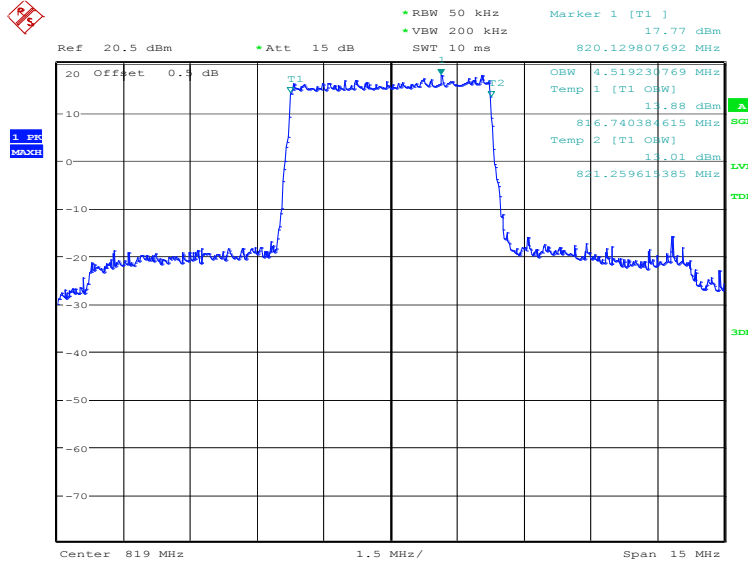

Date: 28.SEP.2020 14:23:50

**LTE band 26(814MHz~824MHz), 5MHz Bandwidth, 16QAM (99% BW)**

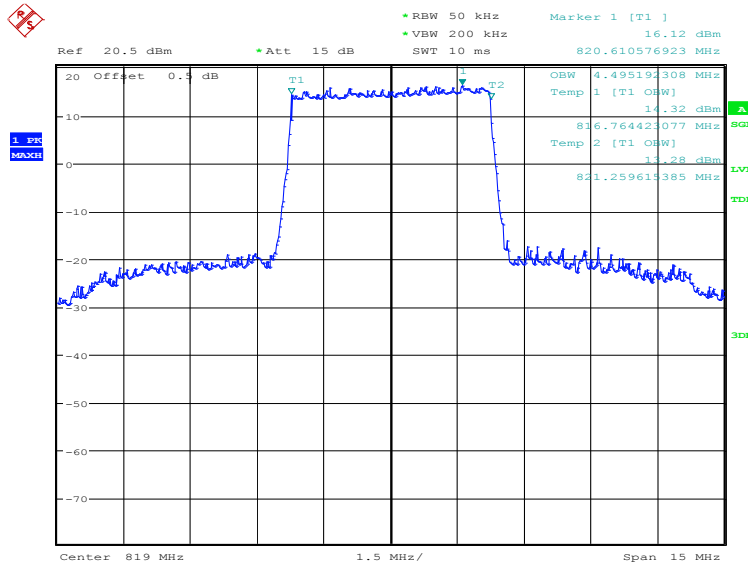


Date: 28.SEP.2020 14:24:28

**LTE band 26(814MHz~824MHz), 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	8990.38	8990.38

**LTE band 26(814MHz~824MHz), 10MHz Bandwidth, QPSK (99% BW)**

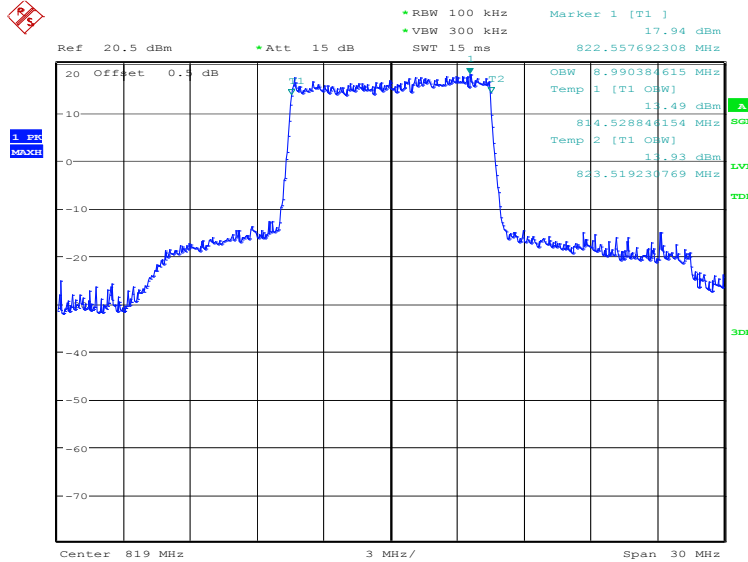

Date: 28.SEP.2020 14:25:09

**LTE band 26(814MHz~824MHz), 10MHz Bandwidth, 16QAM (99% BW)**

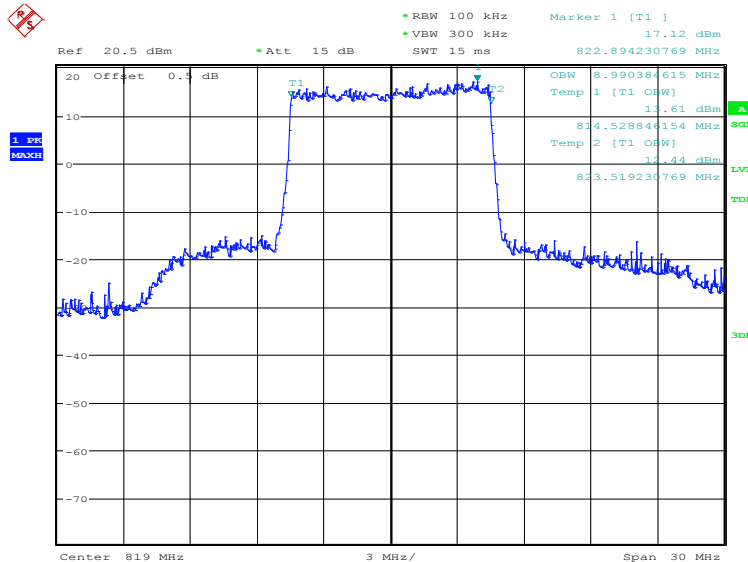


Date: 28.SEP.2020 14:25:48

**LTE band 26(824MHz~849MHz), 1.4MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	1089.74	1097.76

**LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, QPSK (99% BW)**

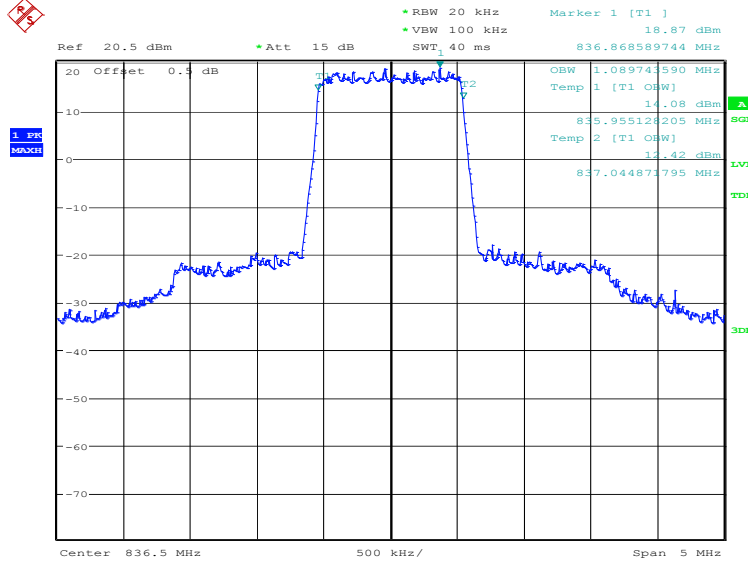

Date: 28.SEP.2020 14:13:58

**LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, 16QAM (99% BW)**

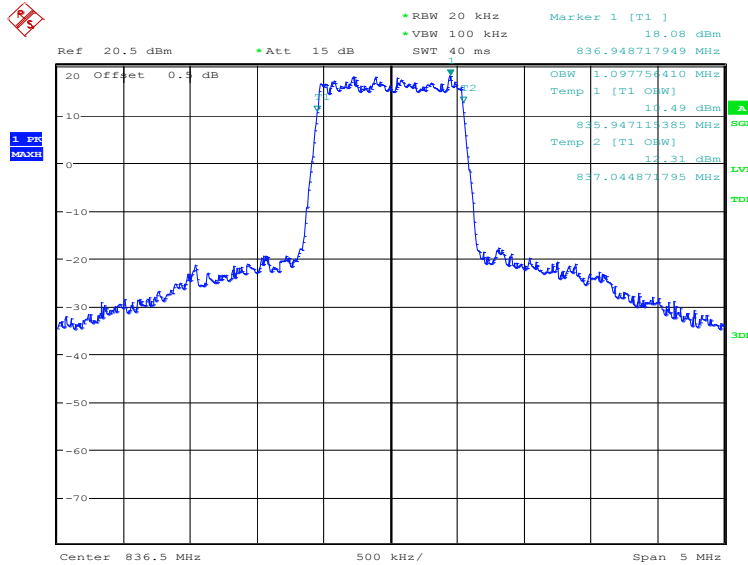


Date: 28.SEP.2020 14:14:36



**LTE band 26(824MHz~849MHz), 3MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

**LTE band 26(824MHz~849MHz), 3MHz Bandwidth, QPSK (99% BW)**

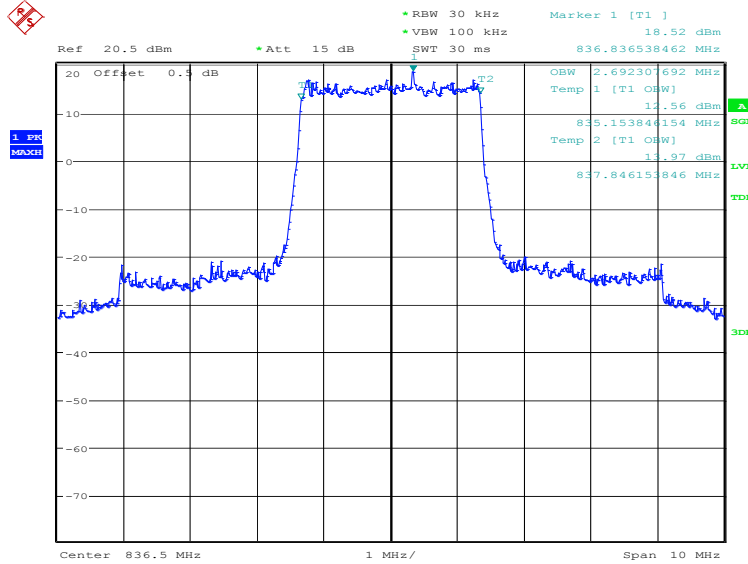

Date: 28.SEP.2020 14:15:17

**LTE band 26(824MHz~849MHz), 3MHz Bandwidth, 16QAM (99% BW)**

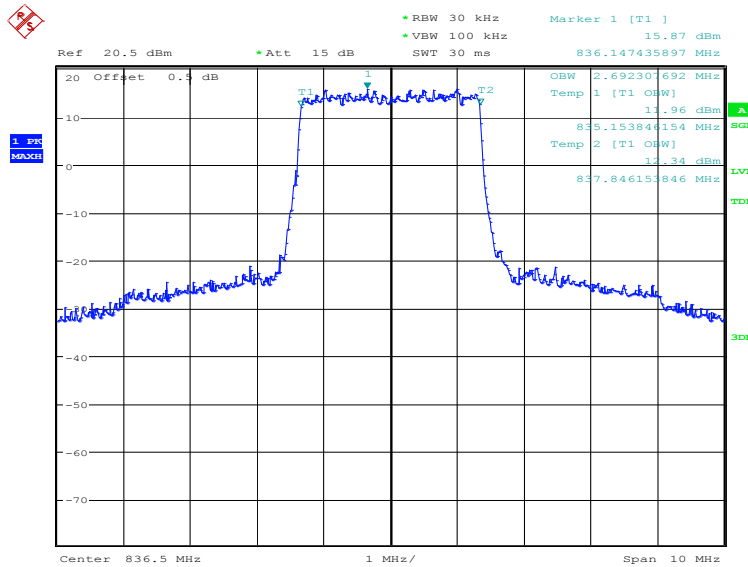


Date: 28.SEP.2020 14:15:55

**LTE band 26(824MHz~849MHz), 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	4495.19	4495.19

**LTE band 26(824MHz~849MHz), 5MHz Bandwidth, QPSK (99% BW)**

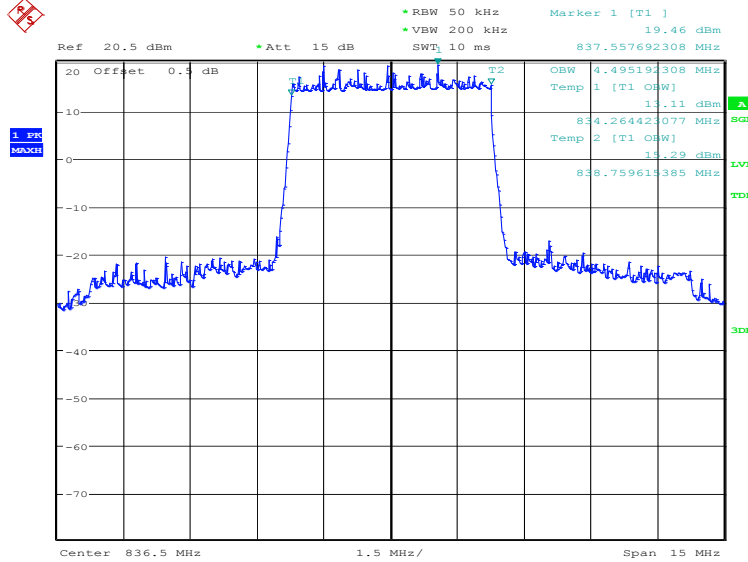

Date: 28.SEP.2020 14:16:36

**LTE band 26(824MHz~849MHz), 5MHz Bandwidth, 16QAM (99% BW)**

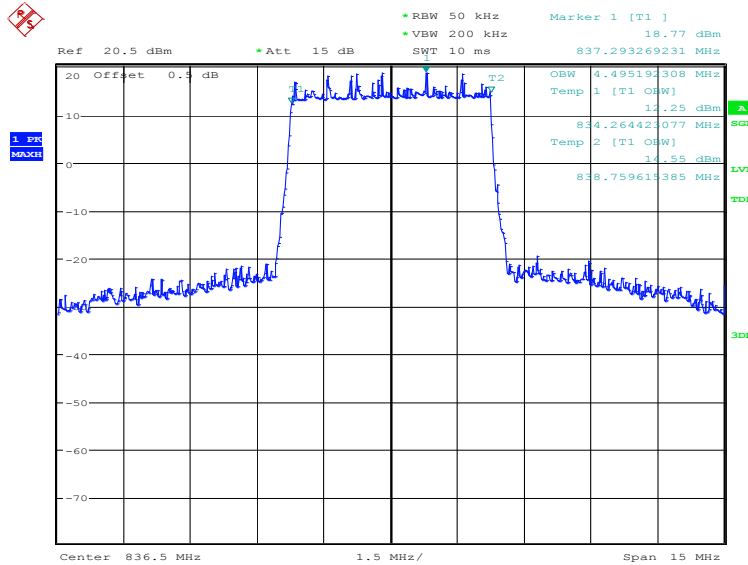


Date: 28.SEP.2020 14:17:14

**LTE band 26(824MHz~849MHz), 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	8942.31	8942.31

**LTE band 26(824MHz~849MHz), 10MHz Bandwidth, QPSK (99% BW)**

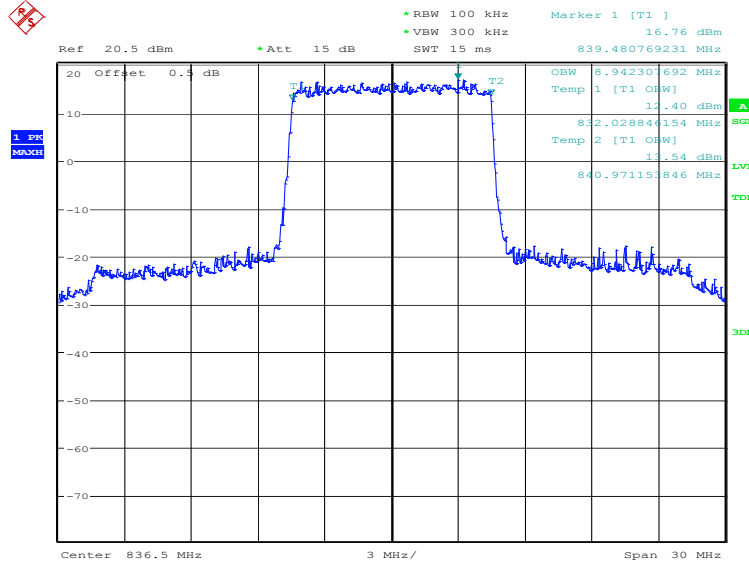

Date: 28.SEP.2020 14:17:55


**LTE band 26(824MHz~849MHz), 10MHz Bandwidth, 16QAM (99% BW)**

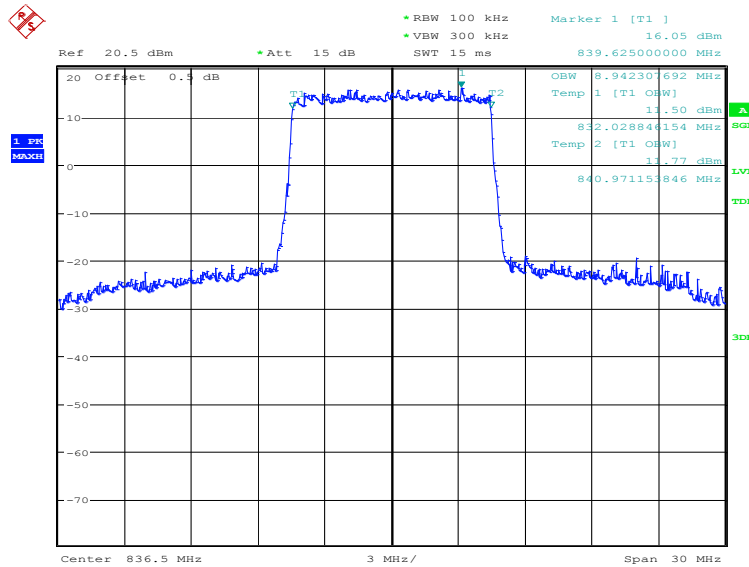


Date: 28.SEP.2020 14:18:33

**LTE band 26(824MHz~849MHz), 15MHz (99%)**

Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	13557.69	13413.46

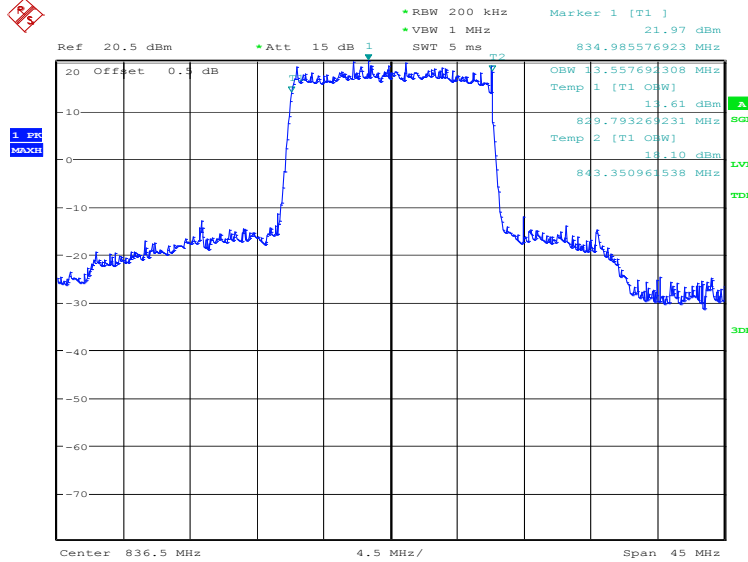**LTE band 26(824MHz~849MHz), 15MHz Bandwidth, QPSK (99% BW)**


Date: 28.SEP.2020 14:19:14

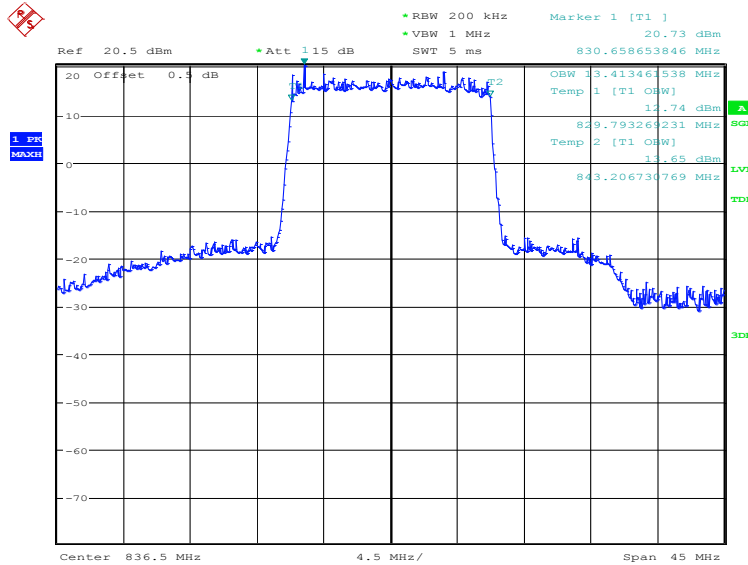
**LTE band 26(824MHz~849MHz), 15MHz Bandwidth, 16QAM (99% BW)**


Date: 28.SEP.2020 14:19:53

**LTE band 41, 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	4495.19	4471.15

**LTE band 41, 5MHz Bandwidth, QPSK (99% BW)**

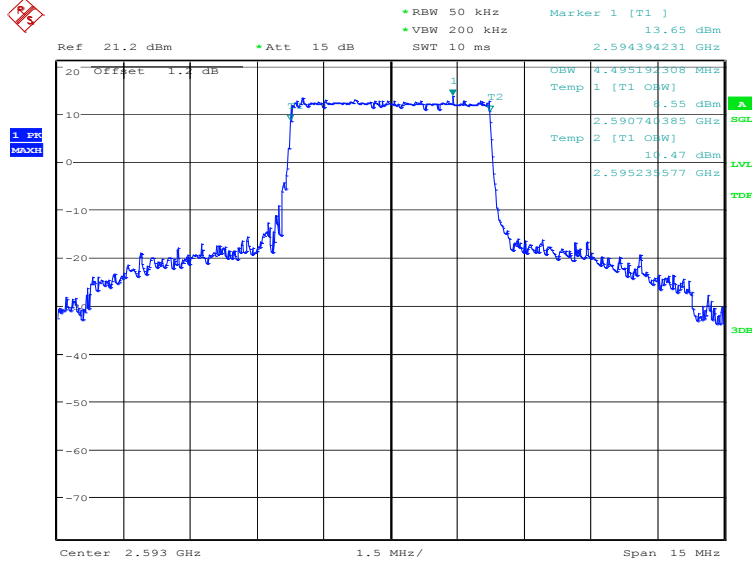

Date: 27.SEP.2020 17:33:16

**LTE band 41, 5MHz Bandwidth, 16QAM (99% BW)**

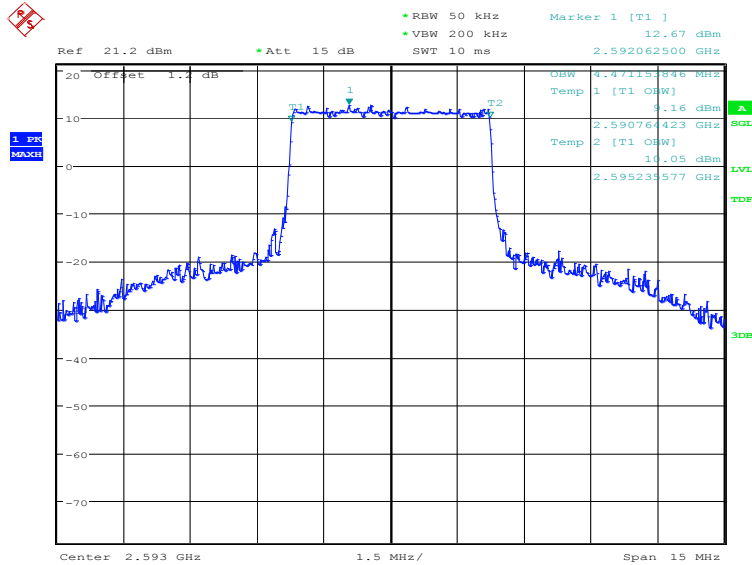


Date: 27.SEP.2020 17:33:55

**LTE band 41, 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	8942.31	8942.31

**LTE band 41, 10MHz Bandwidth, QPSK (99% BW)**

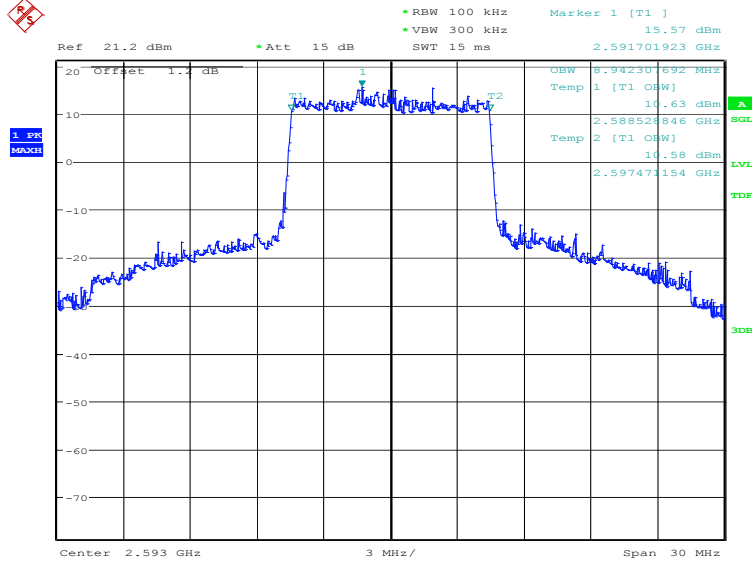

Date: 27.SEP.2020 17:34:36

**LTE band 41, 10MHz Bandwidth, 16QAM (99% BW)**

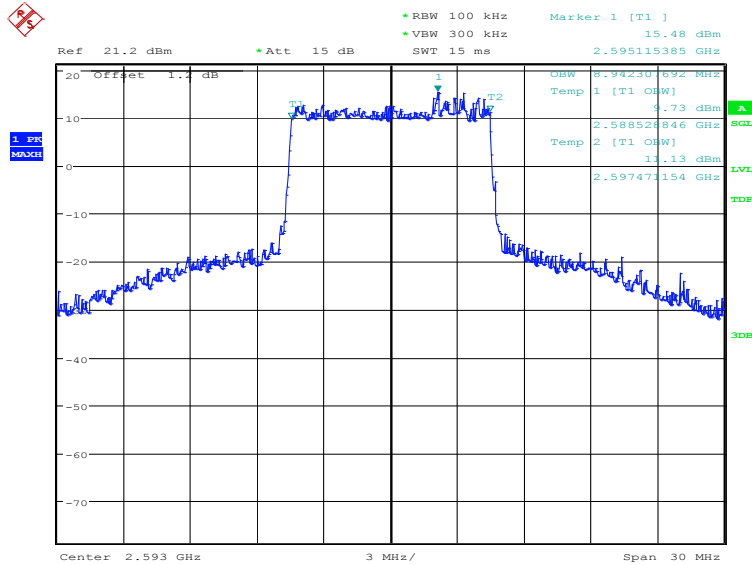


Date: 27.SEP.2020 17:35:14

**LTE band 41, 15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	13485.58	13485.58

**LTE band 41, 15MHz Bandwidth, QPSK (99% BW)**

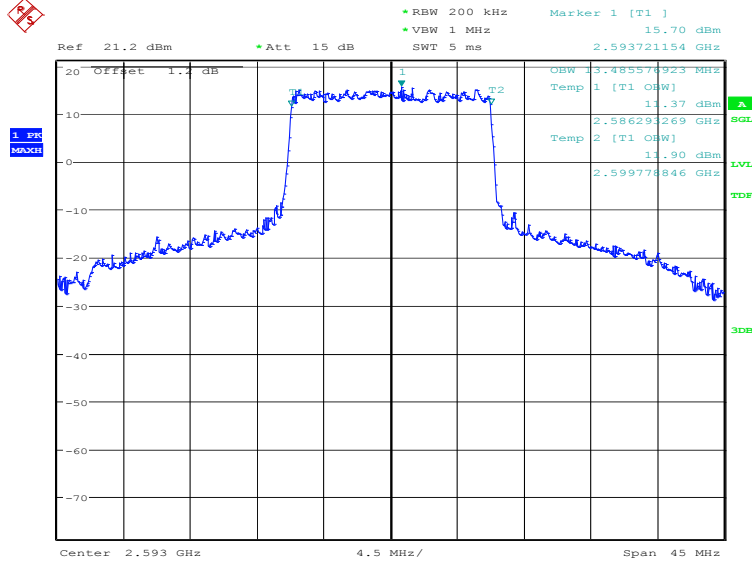

Date: 27.SEP.2020 17:35:55

**LTE band 41, 15MHz Bandwidth,16QAM (99% BW)**

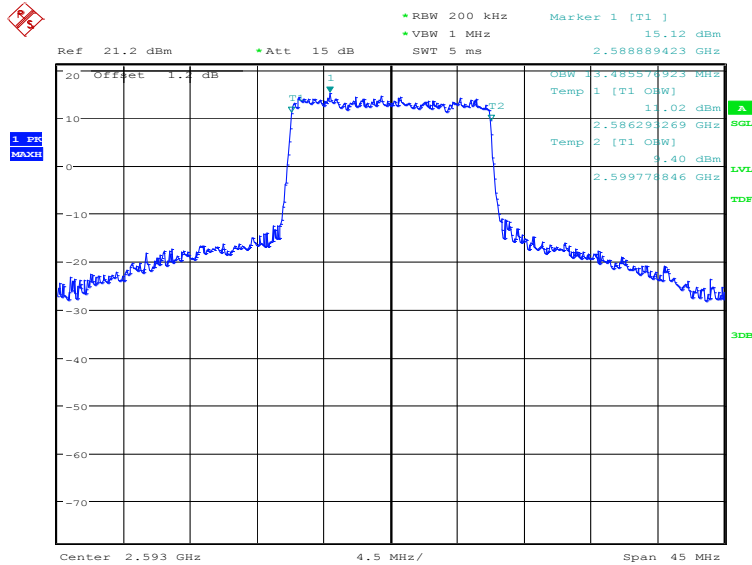


Date: 27.SEP.2020 17:36:33

**LTE band 41, 20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	17980.77	17884.62

**LTE band 41, 20MHz Bandwidth, QPSK (99% BW)**

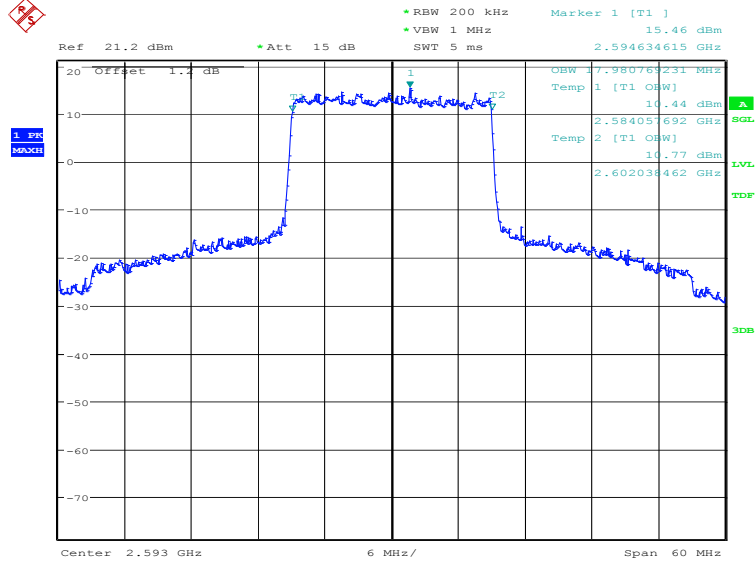

Date: 27.SEP.2020 17:37:14

**LTE band 41, 20MHz Bandwidth, 16QAM (99% BW)**

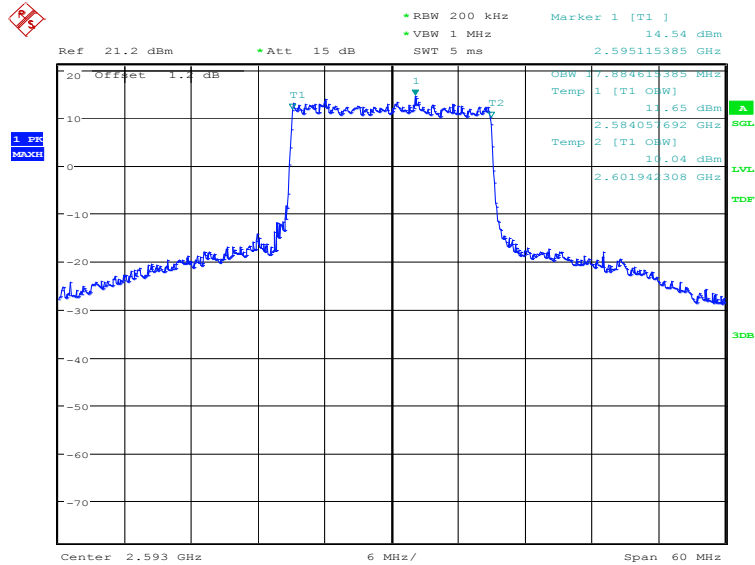

Date: 27.SEP.2020 17:37:52



## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

### LTE band 7, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2535.0	QPSK	16QAM
	4903.85	4951.92

### LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

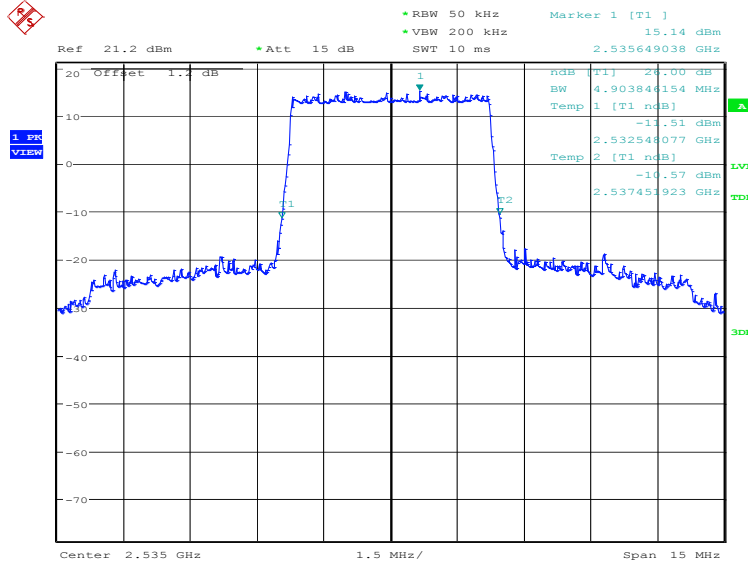

Date: 27.SEP.2020 17:39:06

### LTE band 7, 5MHz Bandwidth, 16QAM (-26dBc BW)

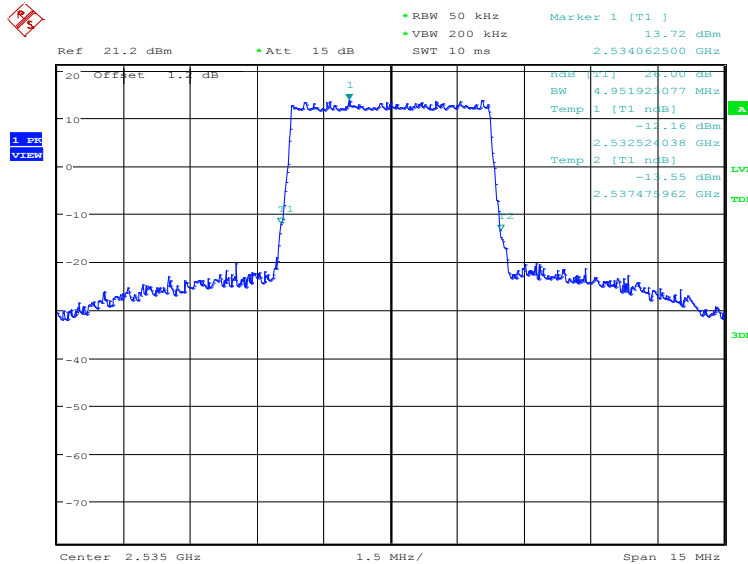


Date: 27.SEP.2020 17:39:45

**LTE band 7, 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2535.0	QPSK	16QAM
	9759.62	9711.54

**LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)**

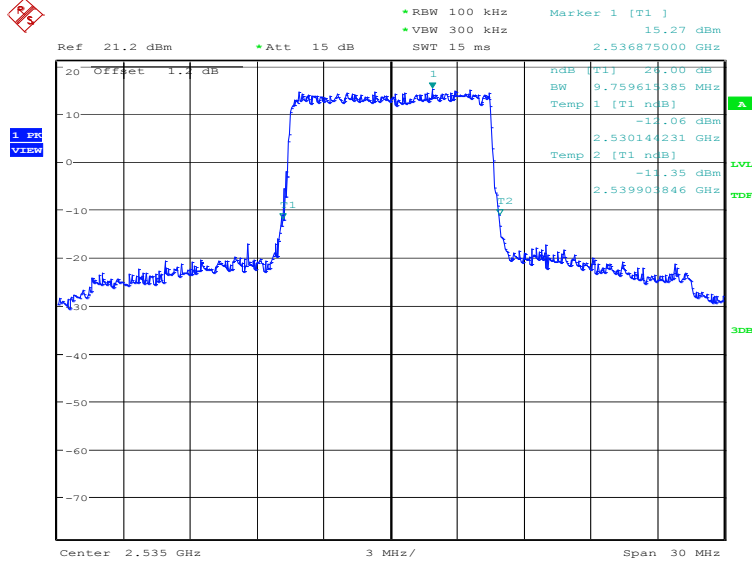

Date: 27.SEP.2020 17:40:26

**LTE band 7, 10MHz Bandwidth,16QAM (-26dBc BW)**

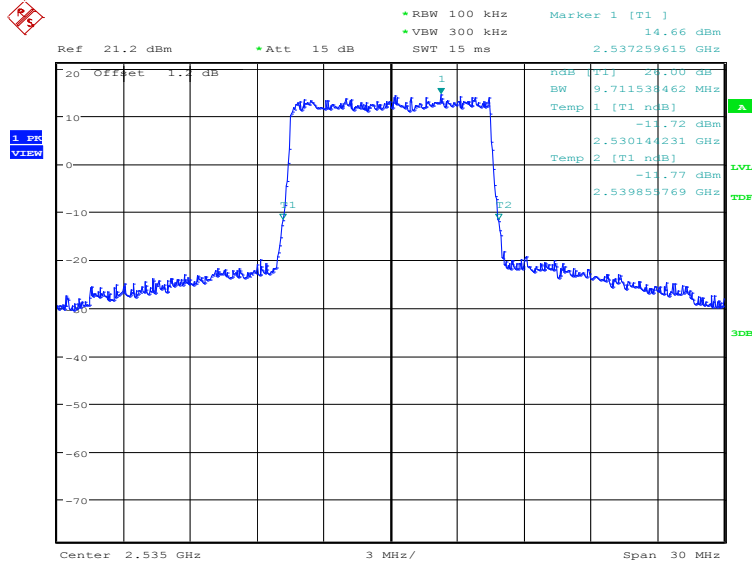


Date: 27.SEP.2020 17:41:05

**LTE band 7, 15MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	2535.0	QPSK
	14639.42	14639.42

**LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)**

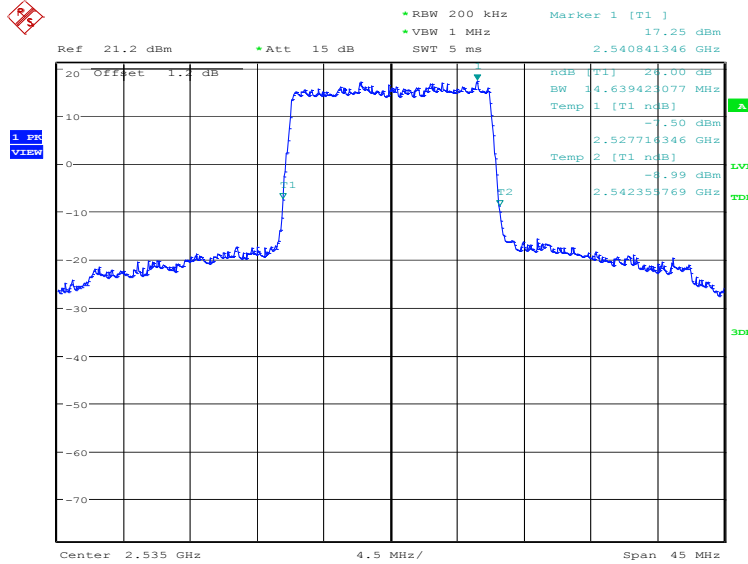

Date: 27.SEP.2020 17:41:46

**LTE band 7, 15MHz Bandwidth,16QAM (-26dBc BW)**

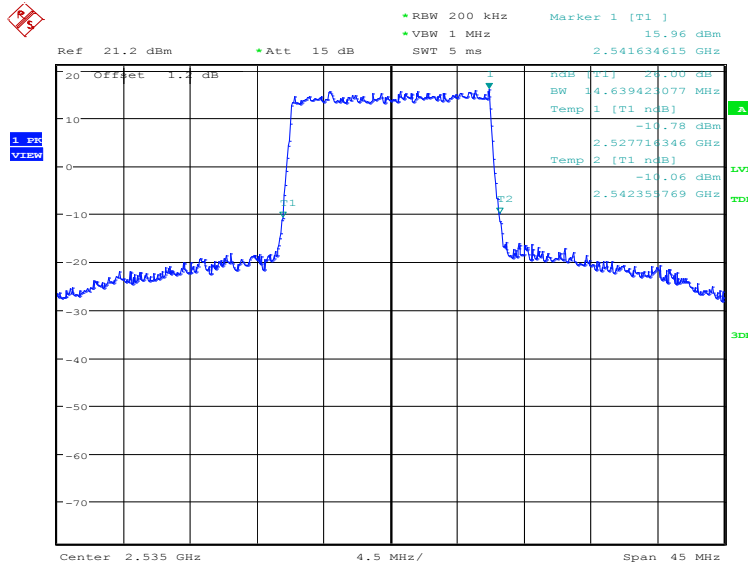


Date: 27.SEP.2020 17:42:25

**LTE band 7, 20MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2535.0	QPSK	16QAM
	19230.77	19326.92

**LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)**

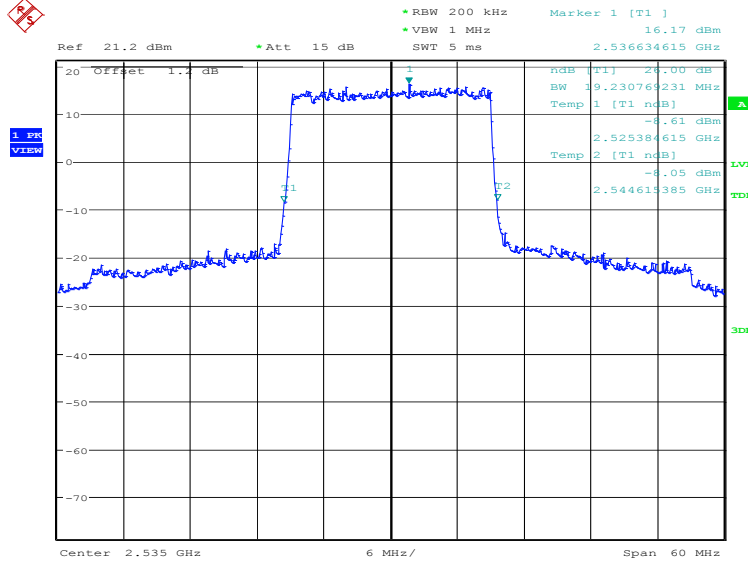

Date: 27.SEP.2020 17:43:07


**LTE band 7, 20MHz Bandwidth,16QAM (-26dBc BW)**

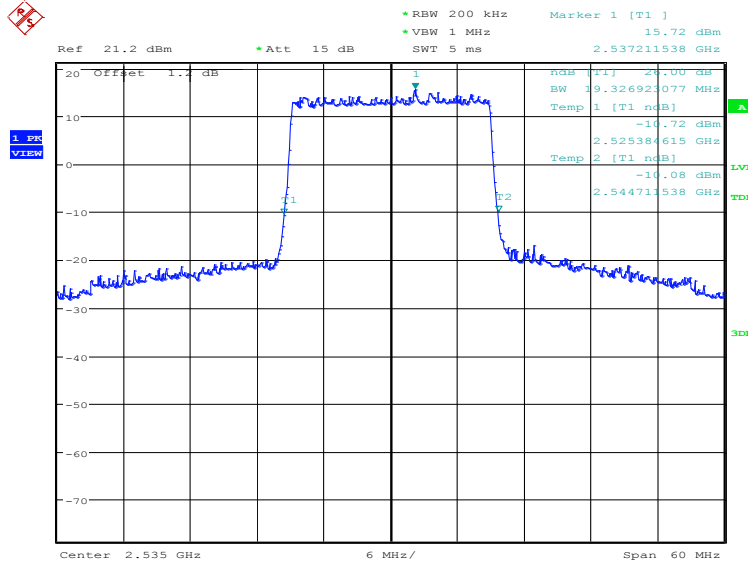


Date: 27.SEP.2020 17:43:46

**LTE band 26(814MHz~824MHz), 1.4MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	819.0	QPSK
1241.99		1250.00

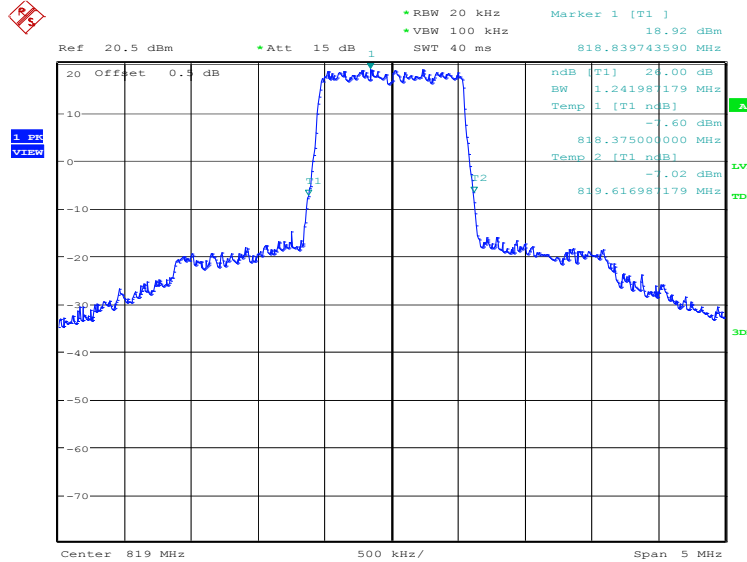**LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, QPSK (-26dBc BW)**


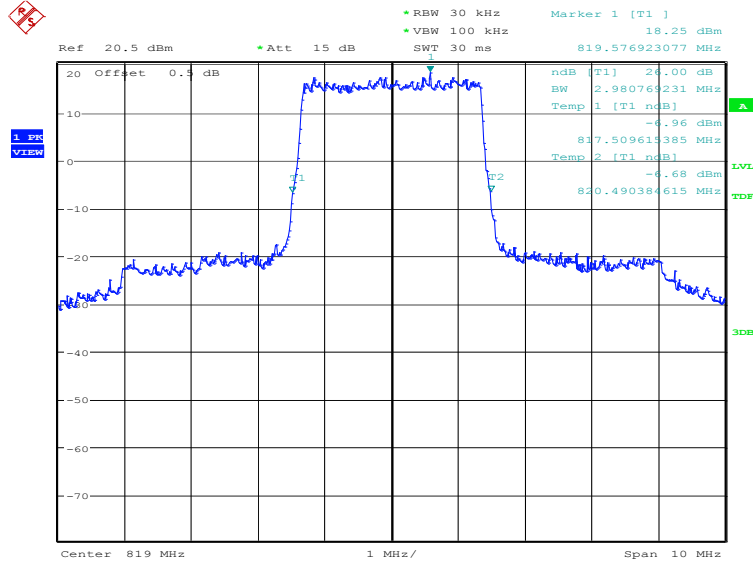
Date: 28.SEP.2020 14:34:20

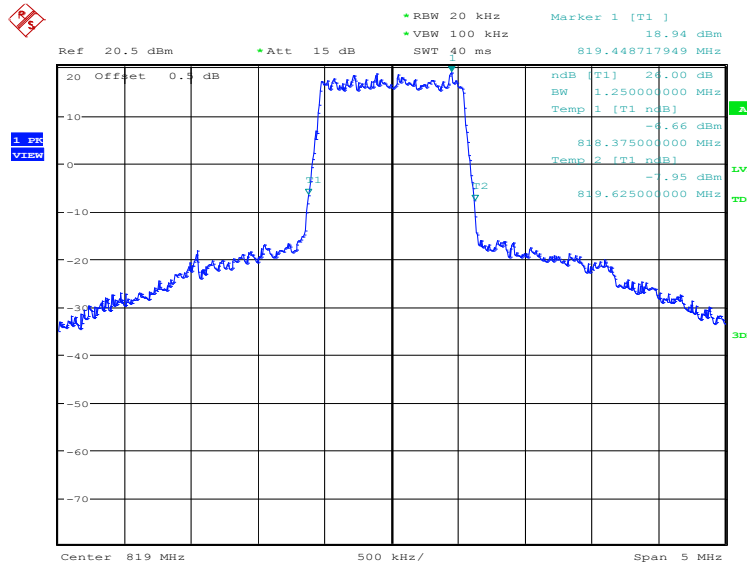**LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, 16QAM (-26dBc BW)**


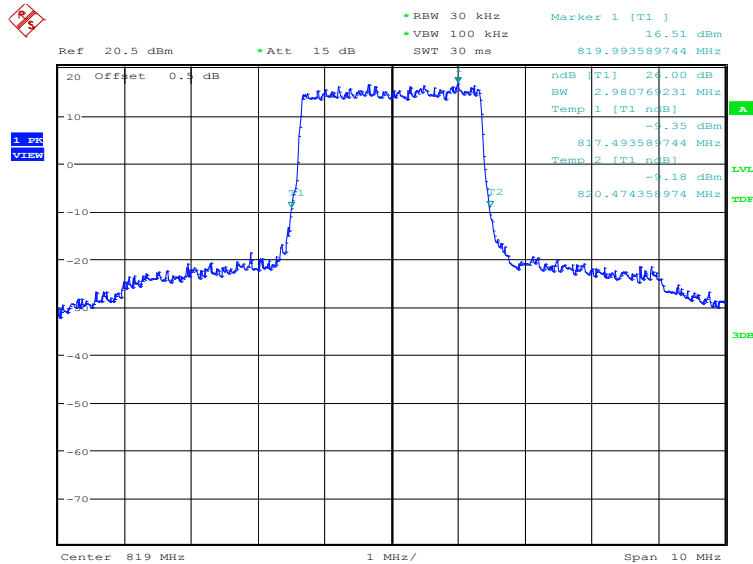
Date: 28.SEP.2020 14:34:59

**LTE band 26(814MHz~824MHz), 3MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	819.0	QPSK
2980.77		2980.77

**LTE band 26(814MHz~824MHz), 3MHz Bandwidth, QPSK (-26dBc BW)**


Date: 28.SEP.2020 14:35:41


**LTE band 26(814MHz~824MHz), 3MHz Bandwidth, 16QAM (-26dBc BW)**


Date: 28.SEP.2020 14:36:20

**LTE band 26(814MHz~824MHz), 5MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
819.0	QPSK	16QAM
	4903.85	4951.92

**LTE band 26(814MHz~824MHz), 5MHz Bandwidth, QPSK (-26dBc BW)**

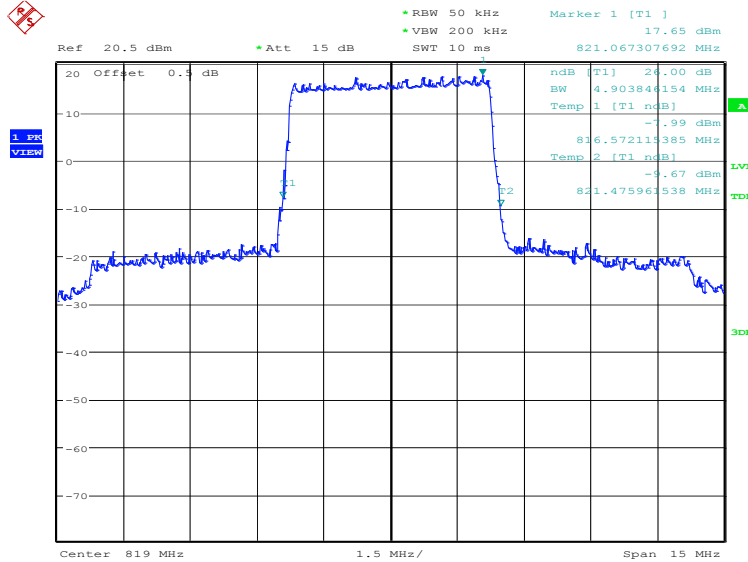

Date: 28.SEP.2020 14:37:01

**LTE band 26(814MHz~824MHz), 5MHz Bandwidth, 16QAM (-26dBc BW)**

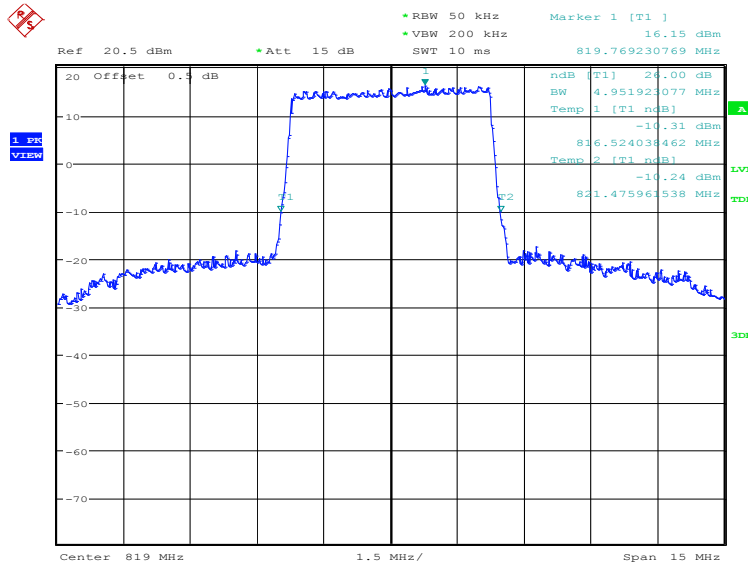


Date: 28.SEP.2020 14:37:40



**LTE band 26(814MHz~824MHz), 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	819.0	QPSK
9759.62		9663.46

**LTE band 26(814MHz~824MHz), 10MHz Bandwidth, QPSK (-26dBc BW)**

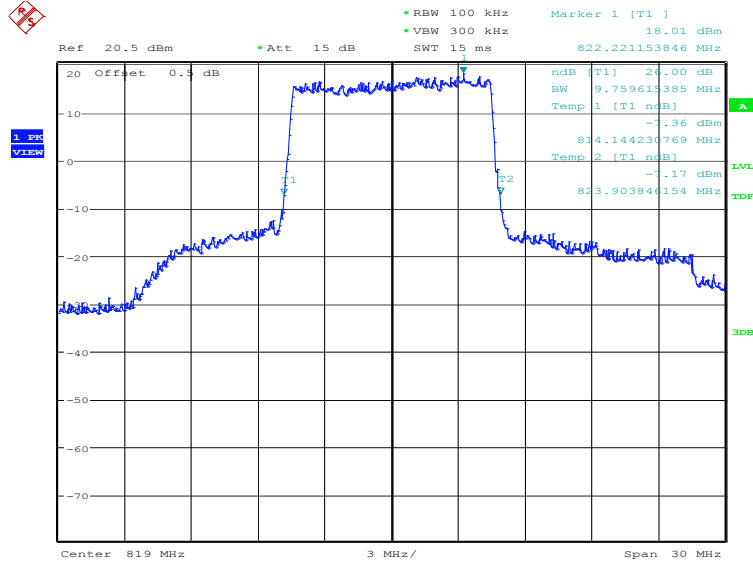

Date: 28.SEP.2020 14:38:22

**LTE band 26(814MHz~824MHz), 10MHz Bandwidth, 16QAM (-26dBc BW)**

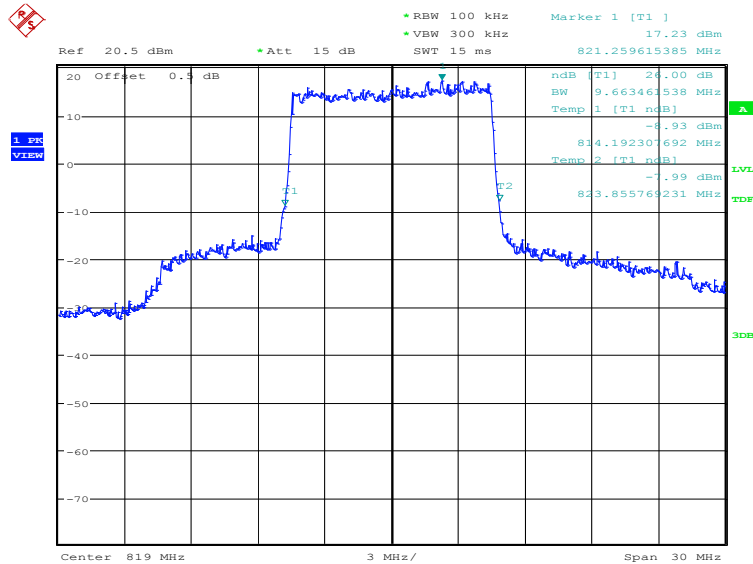


Date: 28.SEP.2020 14:39:01

**LTE band 26(824MHz~849MHz), 1.4MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	836.5	QPSK
1233.97		1241.99

**LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, QPSK (-26dBc BW)**

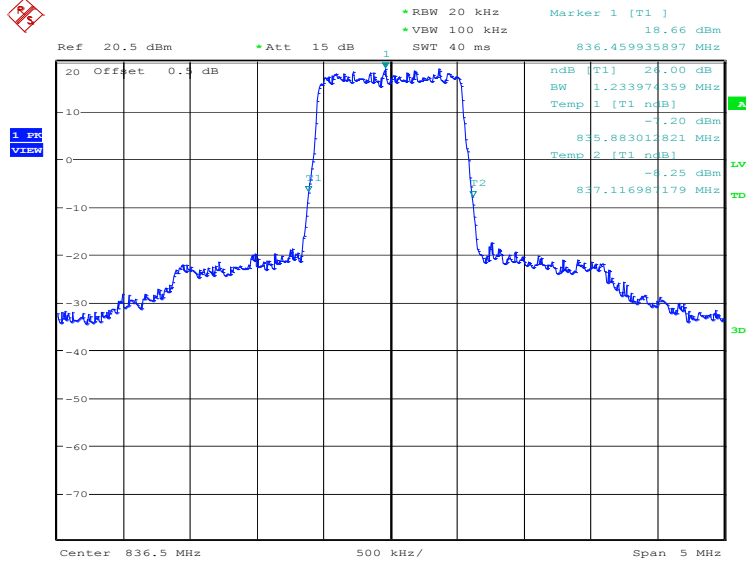

Date: 28.SEP.2020 14:27:01

**LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, 16QAM (-26dBc BW)**

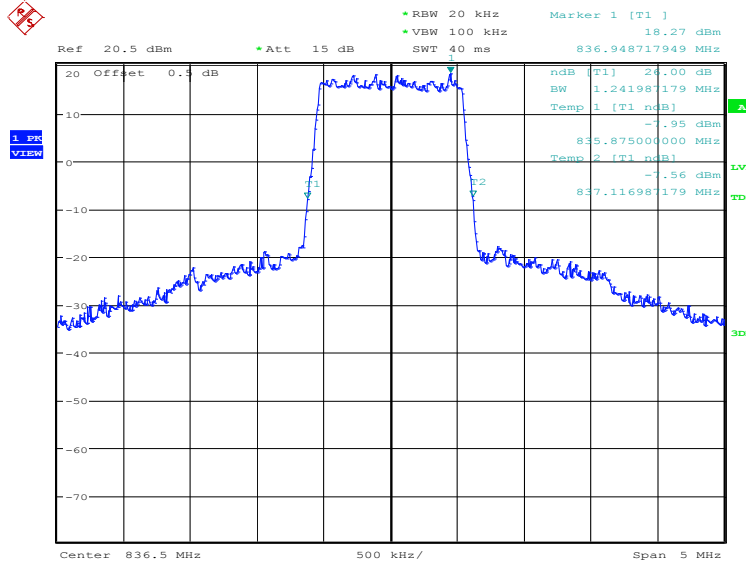


Date: 28.SEP.2020 14:27:40

**LTE band 26(824MHz~849MHz), 3MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
836.5	QPSK	16QAM
	2980.77	2980.77

**LTE band 26(824MHz~849MHz), 3MHz Bandwidth, QPSK (-26dBc BW)**

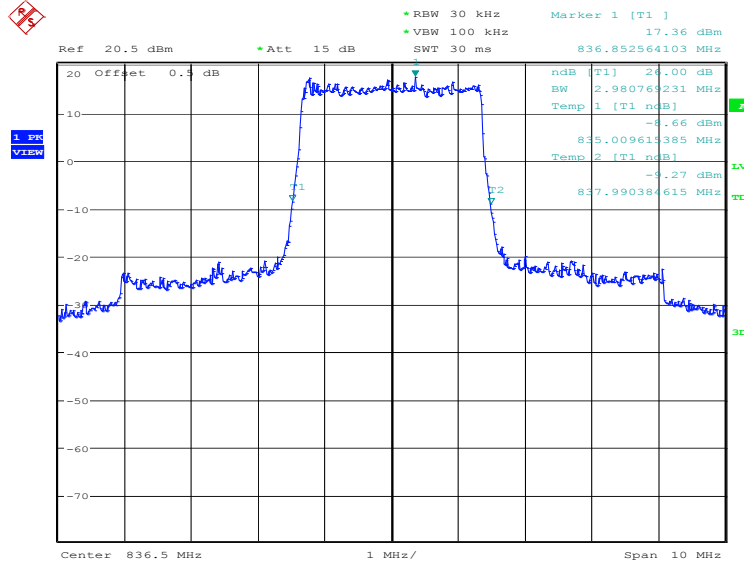

Date: 28.SEP.2020 14:28:21


**LTE band 26(824MHz~849MHz), 3MHz Bandwidth, 16QAM (-26dBc BW)**

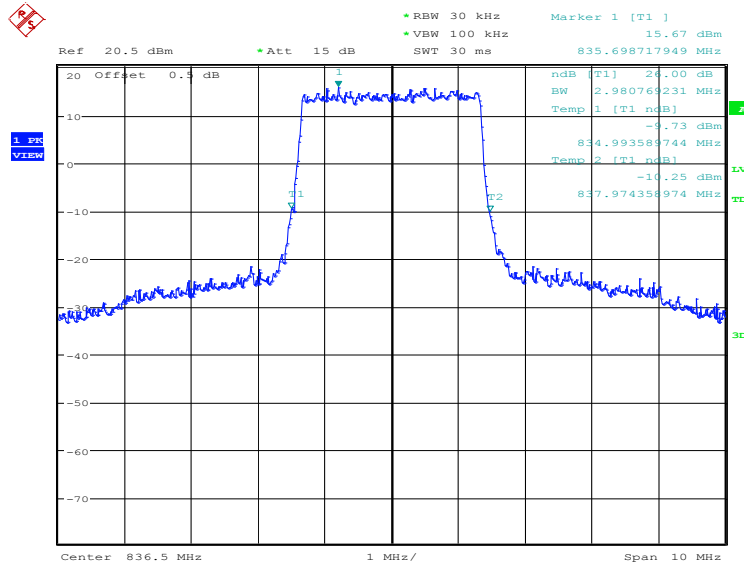


Date: 28.SEP.2020 14:29:00

**LTE band 26(824MHz~849MHz), 5MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
836.5	QPSK	16QAM
	4903.85	4903.85

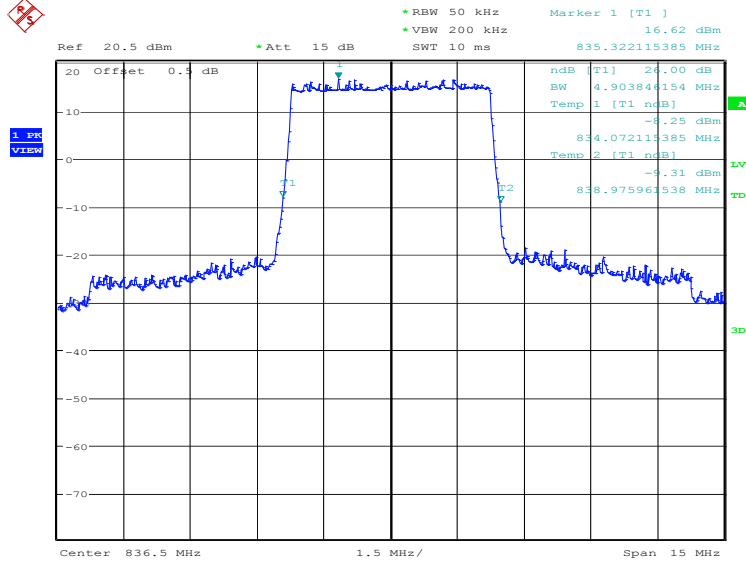**LTE band 26(824MHz~849MHz), 5MHz Bandwidth, QPSK (-26dBc BW)**


Date: 28.SEP.2020 14:29:42

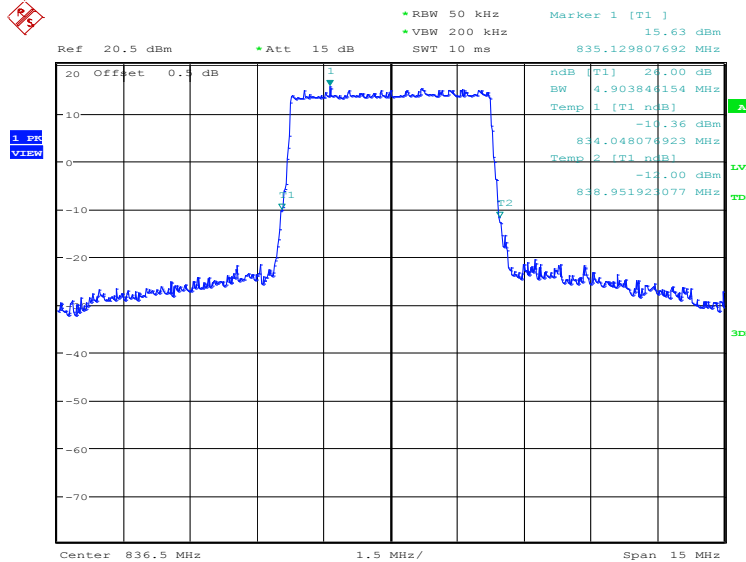
**LTE band 26(824MHz~849MHz), 5MHz Bandwidth, 16QAM (-26dBc BW)**


Date: 28.SEP.2020 14:30:21

**LTE band 26(824MHz~849MHz), 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
836.5	QPSK	16QAM
	9663.46	9615.38

**LTE band 26(824MHz~849MHz), 10MHz Bandwidth, QPSK (-26dBc BW)**

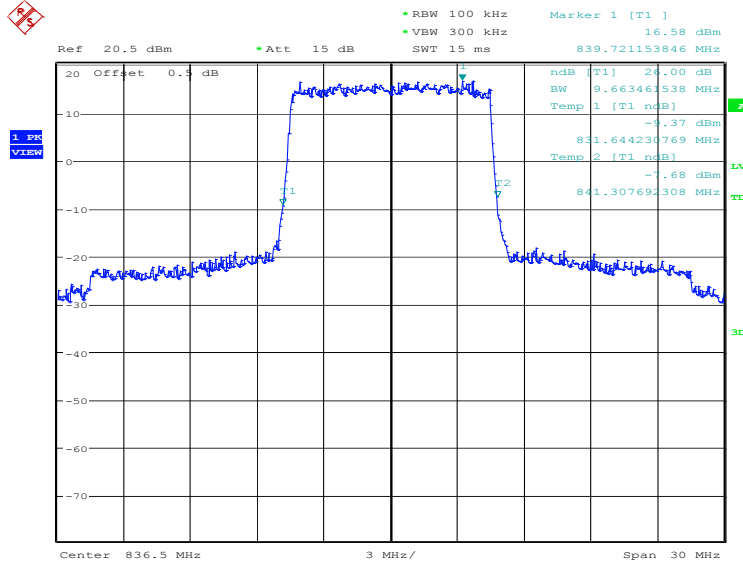

Date: 28.SEP.2020 14:31:02

**LTE band 26(824MHz~849MHz), 10MHz Bandwidth, 16QAM (-26dBc BW)**

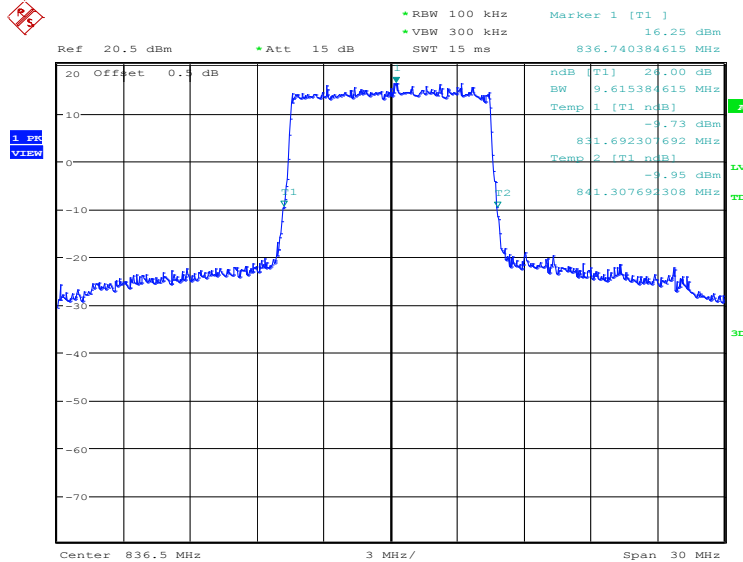


Date: 28.SEP.2020 14:31:41

**LTE band 26(824MHz~849MHz), 15MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
836.5	QPSK	16QAM
	14639.42	14567.31

**LTE band 26(824MHz~849MHz), 15MHz Bandwidth, QPSK (-26dBc BW)**

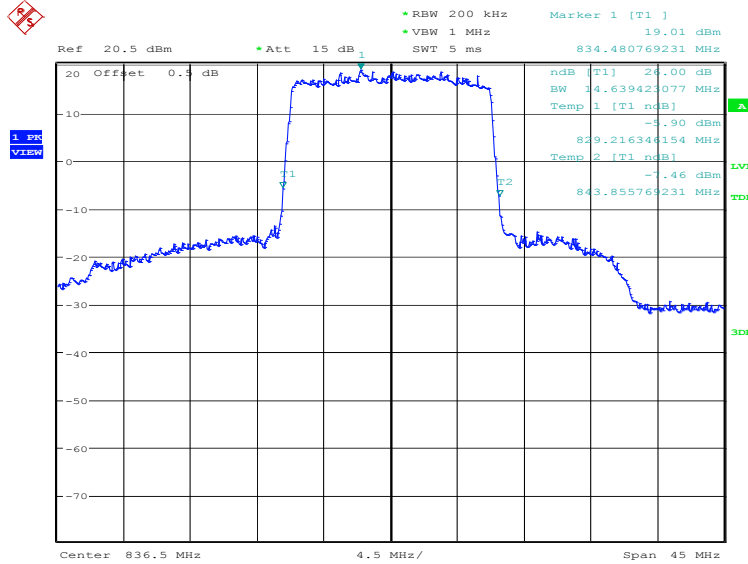

Date: 28.SEP.2020 14:32:22


**LTE band 26(824MHz~849MHz), 15MHz Bandwidth, 16QAM (-26dBc BW)**

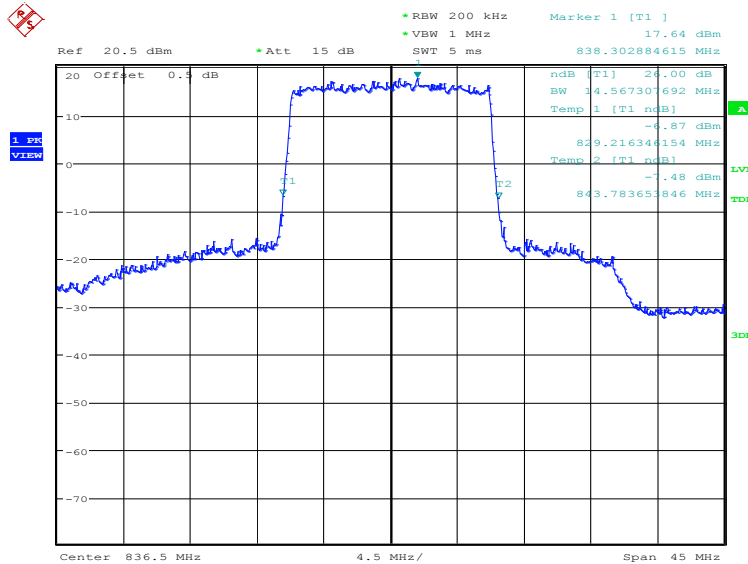


Date: 28.SEP.2020 14:33:01

**LTE band 41, 5MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2593.0	QPSK	16QAM
	4927.88	4927.88

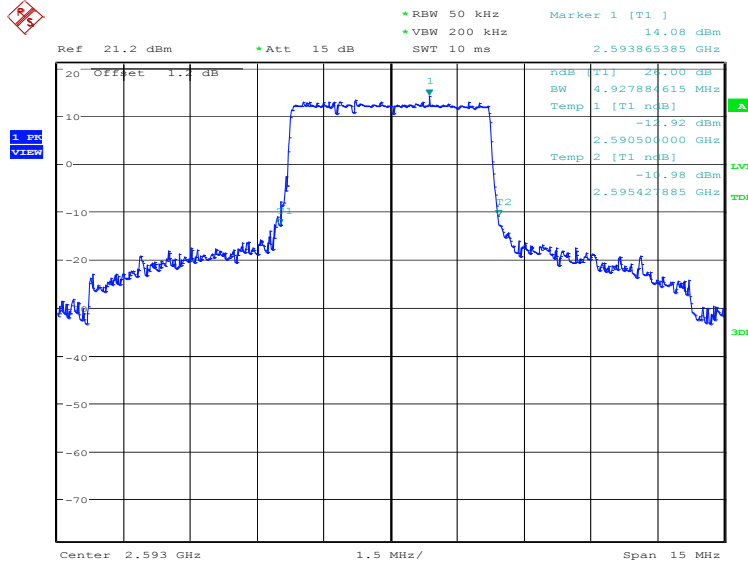**LTE band 41, 5MHz Bandwidth, QPSK (-26dBc BW)**


Date: 27.SEP.2020 17:45:07

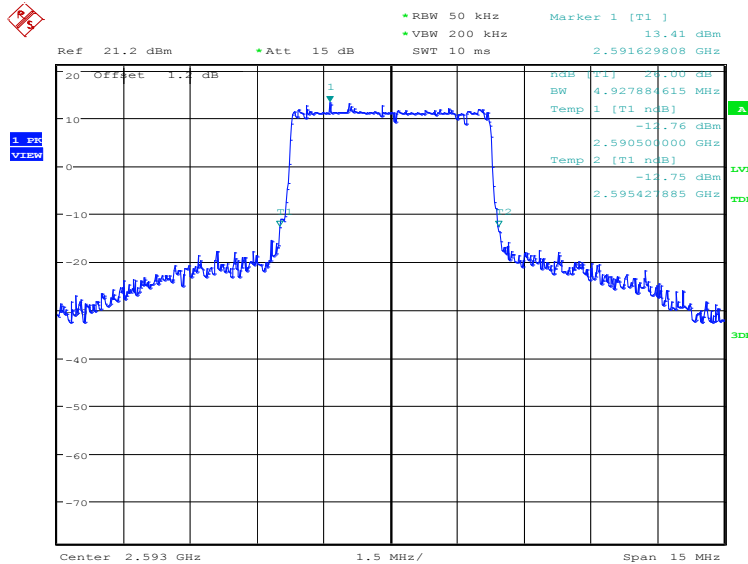
**LTE band 41, 5MHz Bandwidth, 16QAM (-26dBc BW)**


Date: 27.SEP.2020 17:45:46

### LTE band 41, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2593.0	QPSK	16QAM
	9663.46	9663.46

### LTE band 41, 10MHz Bandwidth, QPSK (-26dBc BW)

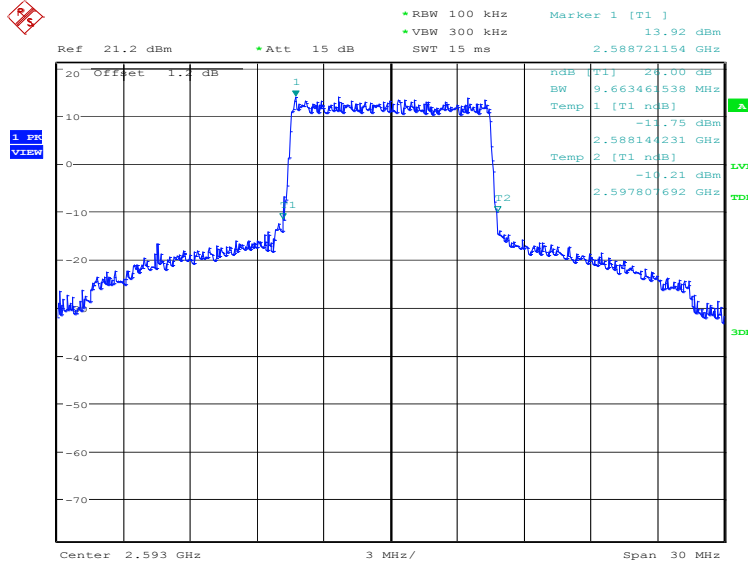

Date: 27.SEP.2020 17:46:27

### LTE band 41, 10MHz Bandwidth,16QAM (-26dBc BW)

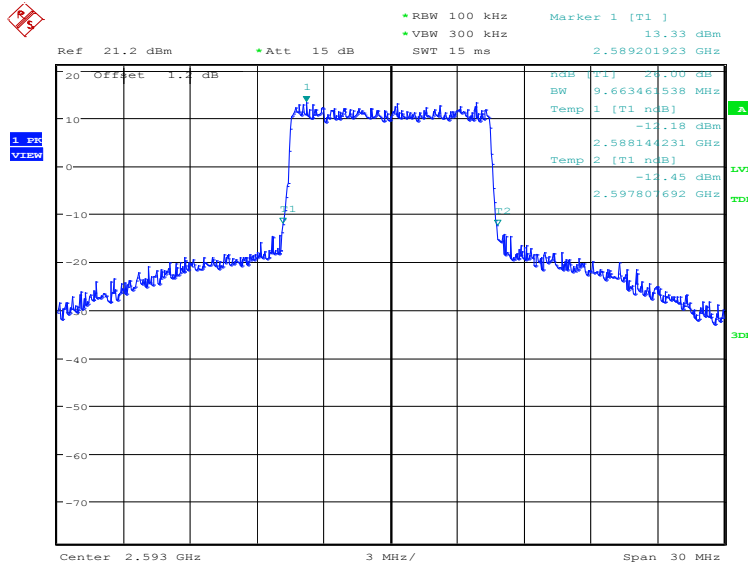


Date: 27.SEP.2020 17:47:06



**LTE band 41, 15MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2593.0	QPSK	16QAM
	14855.77	14711.54

**LTE band 41, 15MHz Bandwidth, QPSK (-26dBc BW)**

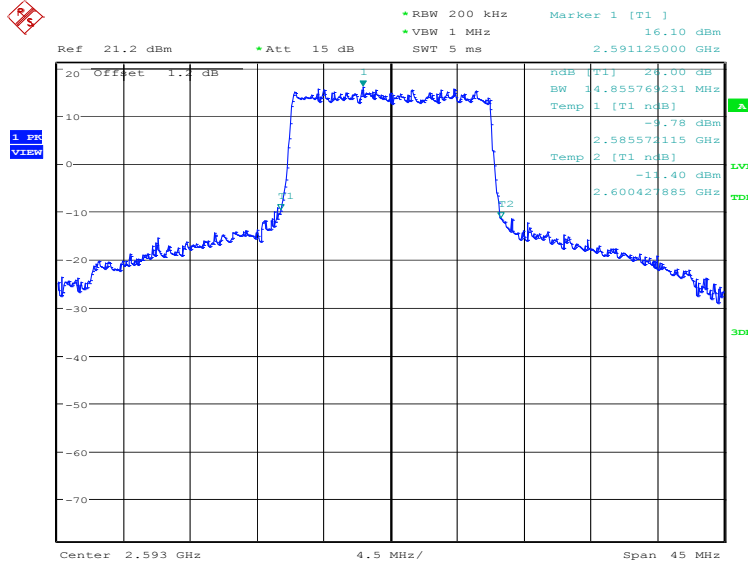

Date: 27.SEP.2020 17:47:48

**LTE band 41, 15MHz Bandwidth,16QAM (-26dBc BW)**

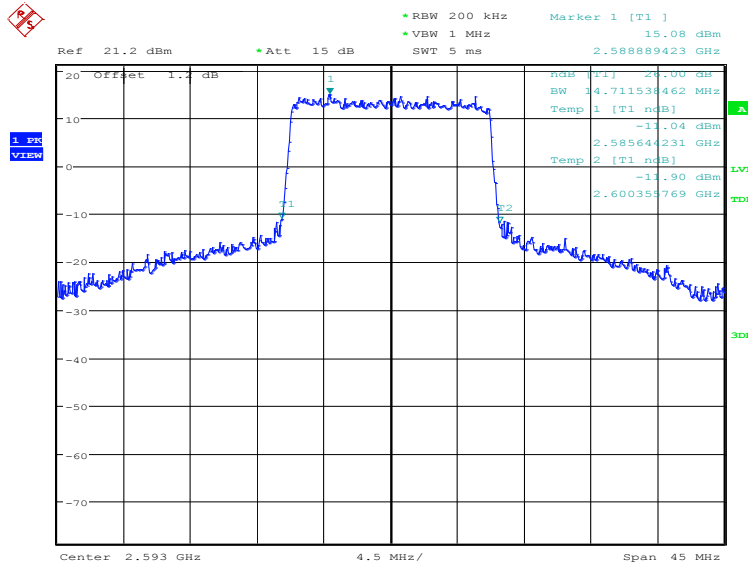


Date: 27.SEP.2020 17:48:26

**LTE band 41, 20MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
	2593.0	QPSK
19230.77		19230.77

**LTE band 41, 20MHz Bandwidth, QPSK (-26dBc BW)**

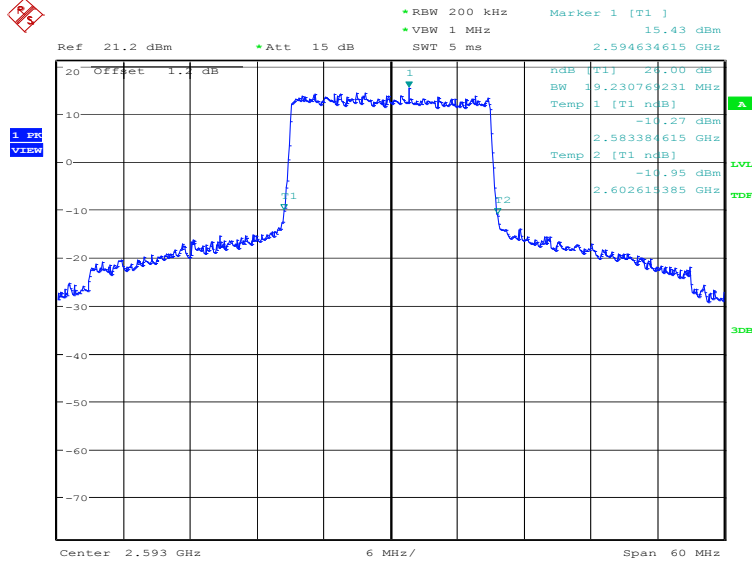

Date: 27.SEP.2020 17:49:08

**LTE band 41, 20MHz Bandwidth,16QAM (-26dBc BW)**

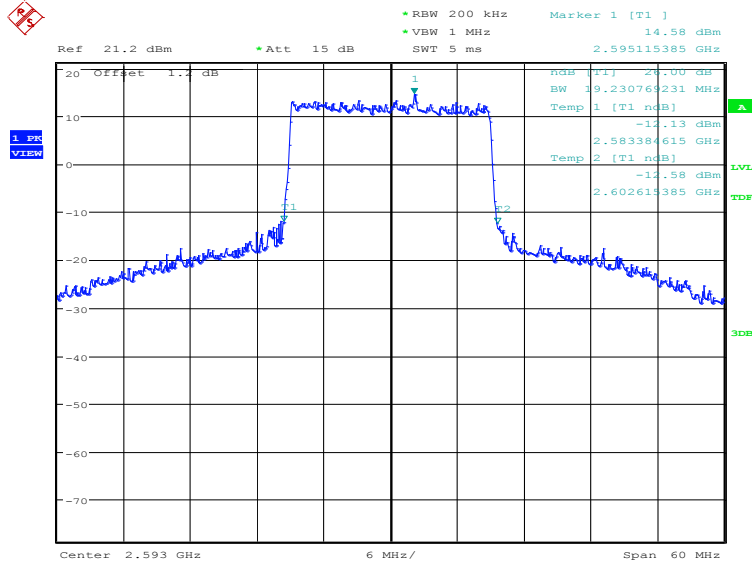

Date: 27.SEP.2020 17:49:47

## **A.6 Band Edge Compliance**


### **A.6.1 Measurement limit**

Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


Part 90.691 states that out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

**A.6.2 Measurement result**  
**Only the worst case result is given below**  
**LTE band 7**  
**OBW: 1RB-low\_offset**

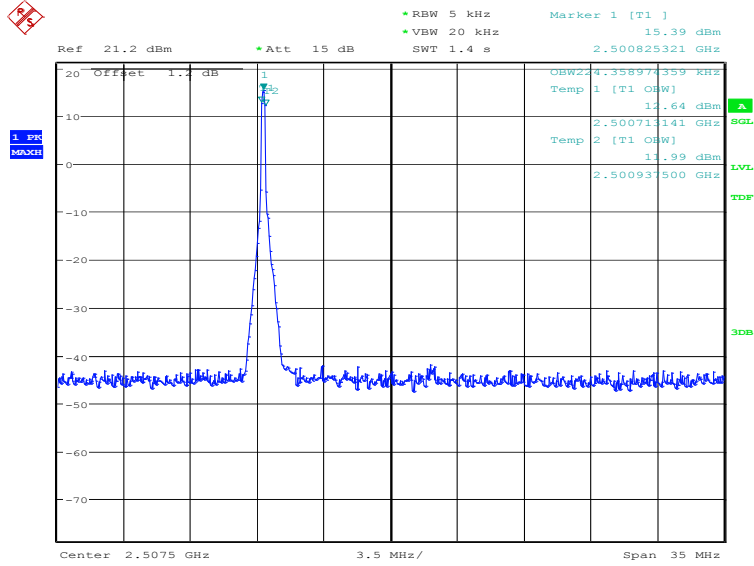


Date: 19.OCT.2020 17:37:21


### LOW BAND EDGE BLOCK-1RB-low\_offset

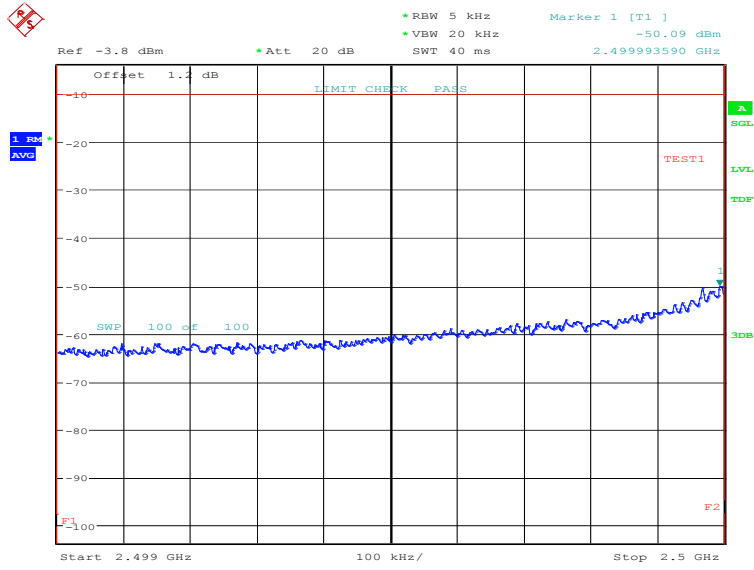

Date: 19.OCT.2020 17:38:41

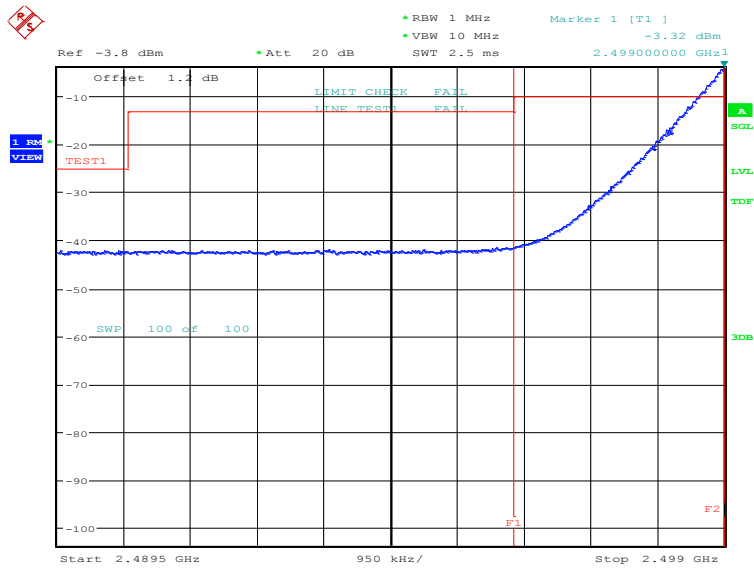


Date: 19.OCT.2020 17:39:03

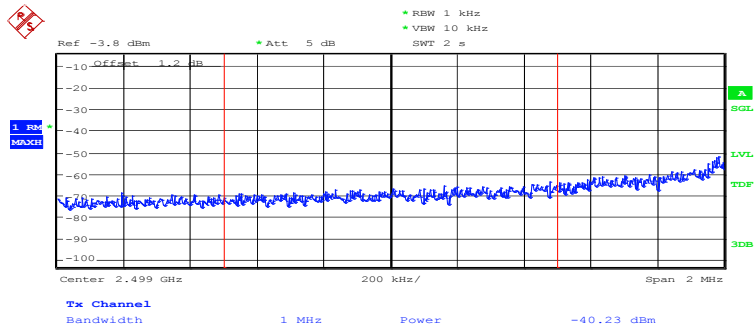


Date: 19.OCT.2020 17:39:14



### HIGH BAND EDGE BLOCK-1RB-high\_offset

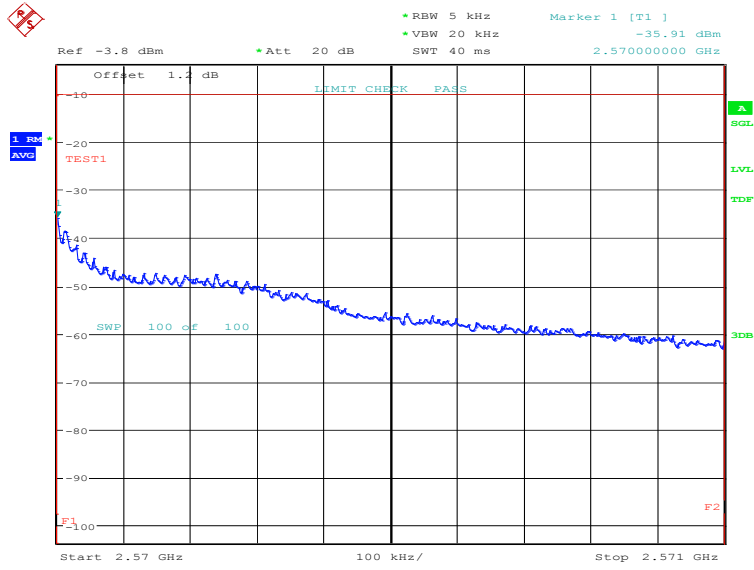


Date: 19.OCT.2020 17:41:47

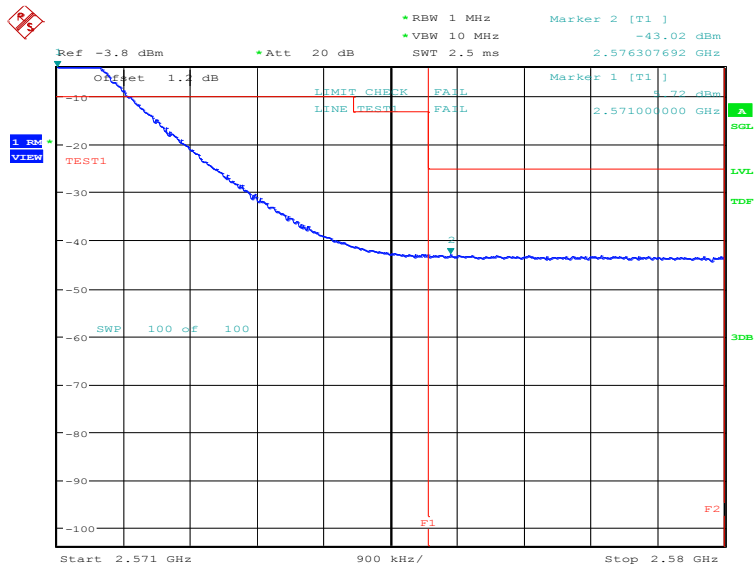


Date: 19.OCT.2020 17:42:09



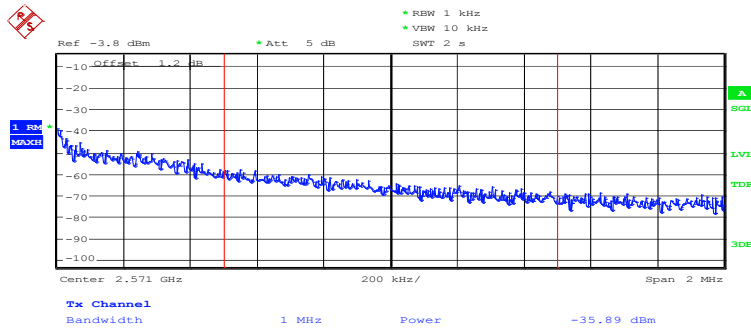


Date: 19.OCT.2020 17:42:20

### LOW BAND EDGE BLOCK-20MHz-100%RB

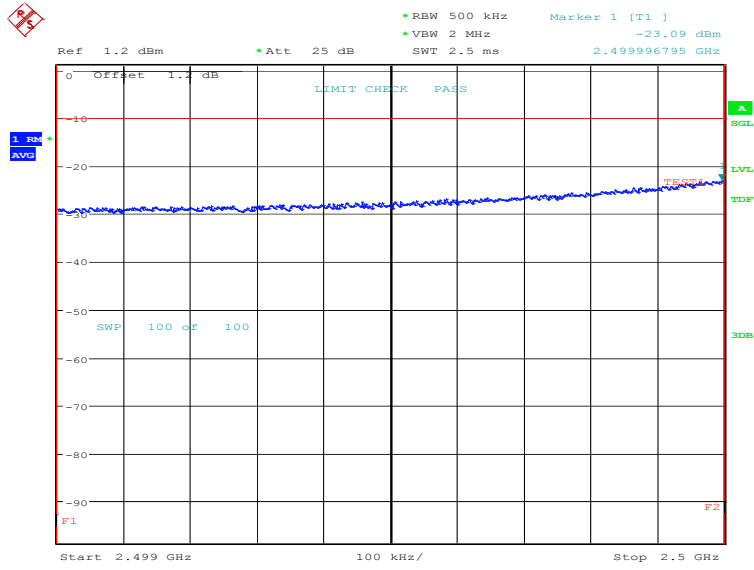


Date: 27.SEP.2020 17:50:52

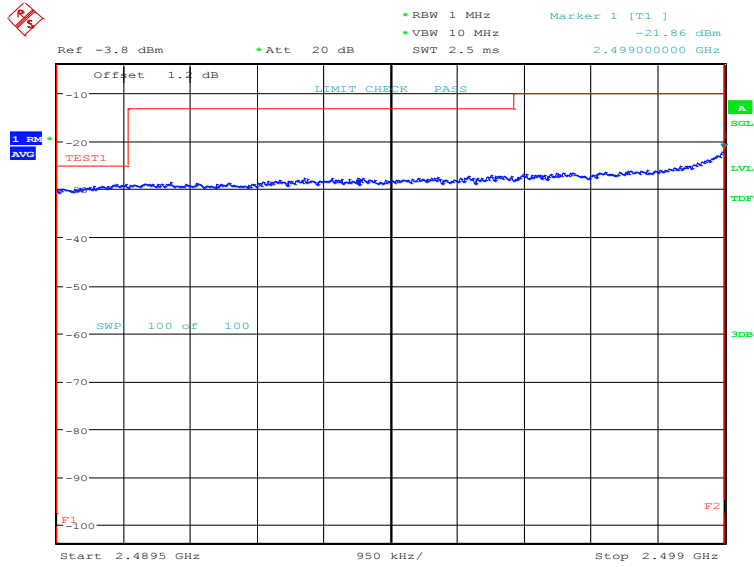


Date: 27.SEP.2020 17:51:06

### HIGH BAND EDGE BLOCK-20MHz-100%RB

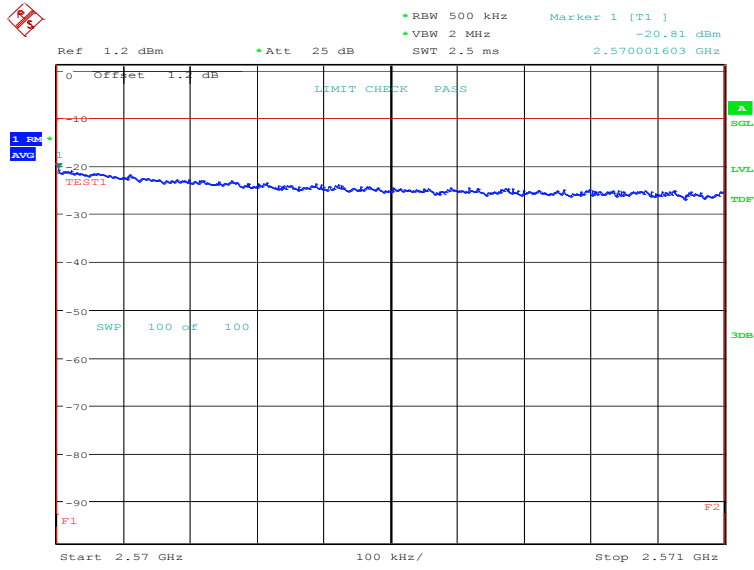


Date: 27.SEP.2020 17:52:30

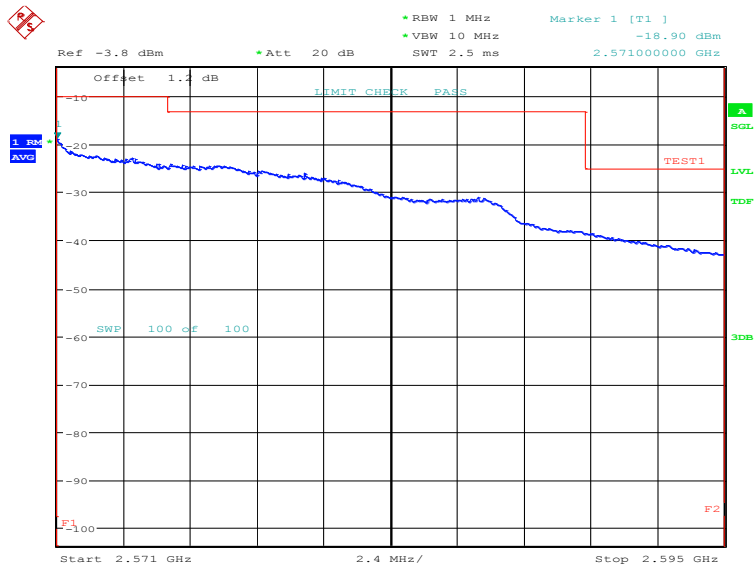


Date: 27.SEP.2020 17:52:44

**LTE band 26(814MHz~824MHz)**  
**OBW: 1RB-low\_offset**

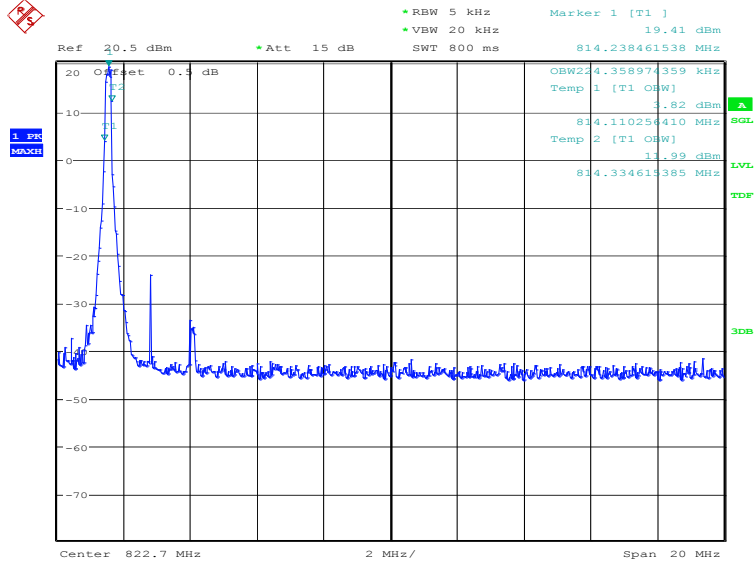


Date: 19.OCT.2020 14:51:15

**LOW BAND EDGE BLOCK-1RB-low\_offset**

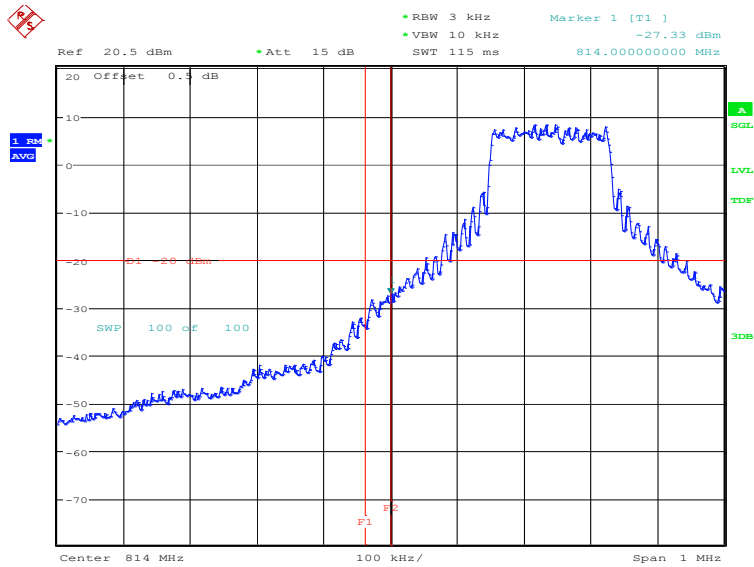


Date: 19.OCT.2020 14:52:45

### LOW Emission Mask -1RB-low\_offset

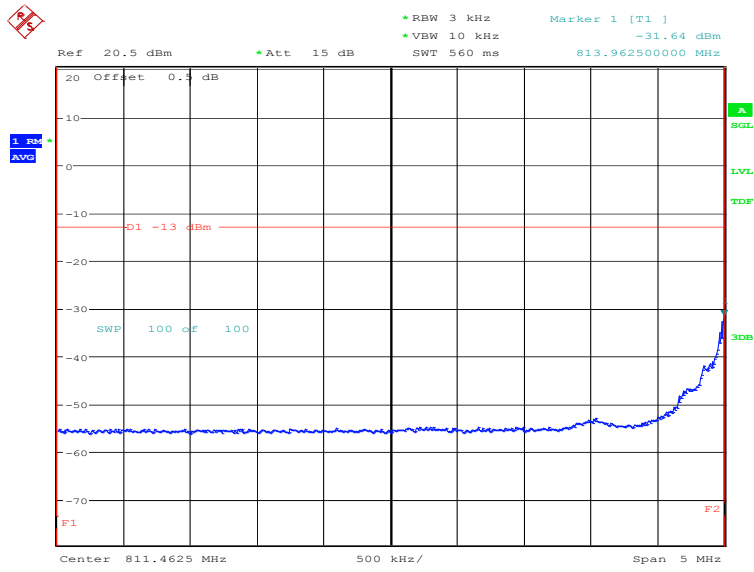


Date: 19.OCT.2020 14:55:02

### OBW: 1RB-high\_offset

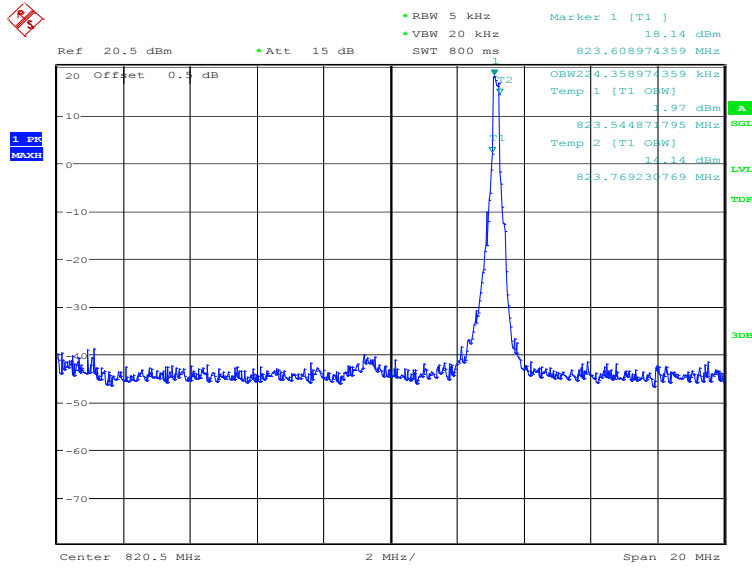

Date: 19.OCT.2020 14:55:39


### HIGH BAND EDGE BLOCK-1RB-high\_offset

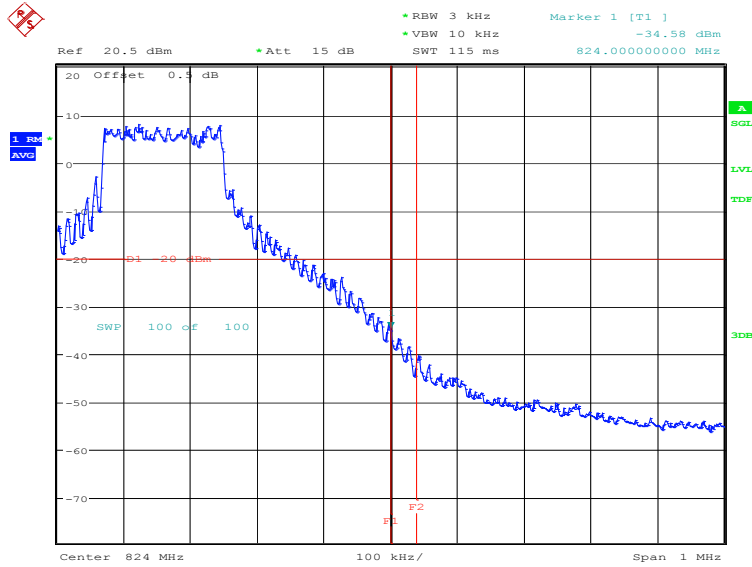

Date: 19.OCT.2020 14:57:09




### HIGH Emission Mask -1RB-high\_offset

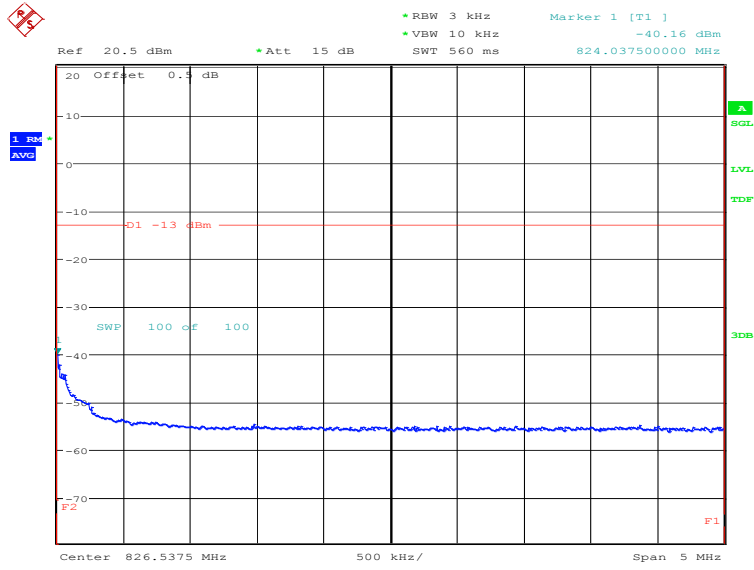


Date: 19.OCT.2020 14:59:25

### LOW Emission Mask -10MHz-100%RB

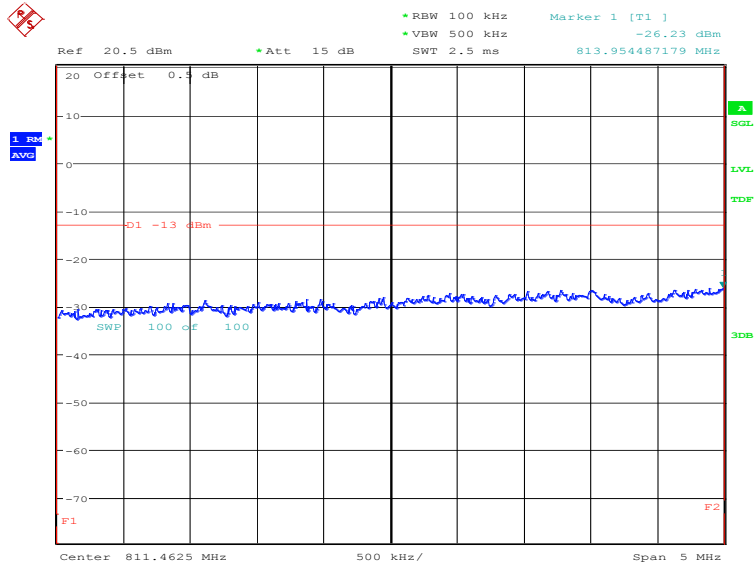

Date: 28.SEP.2020 14:46:33


### LOW BAND EDGE BLOCK-10MHz-100%RB

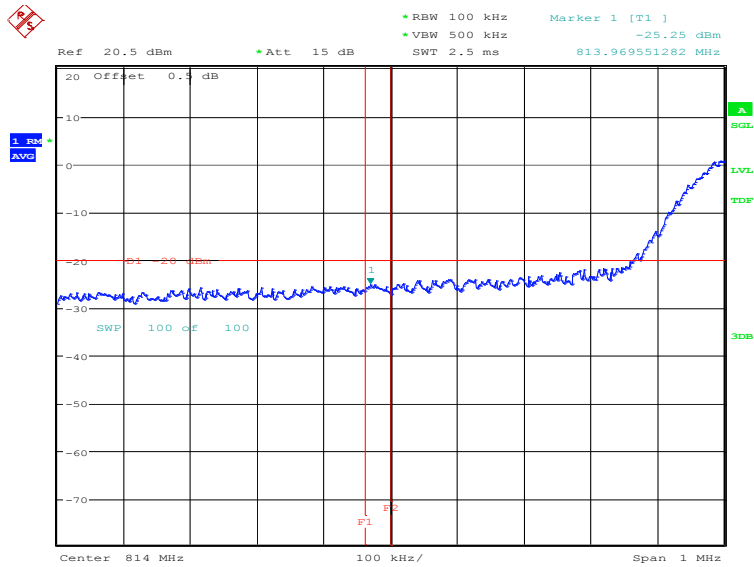

Date: 28.SEP.2020 14:46:12




### HIGH Emission Mask -10MHz-100%RB

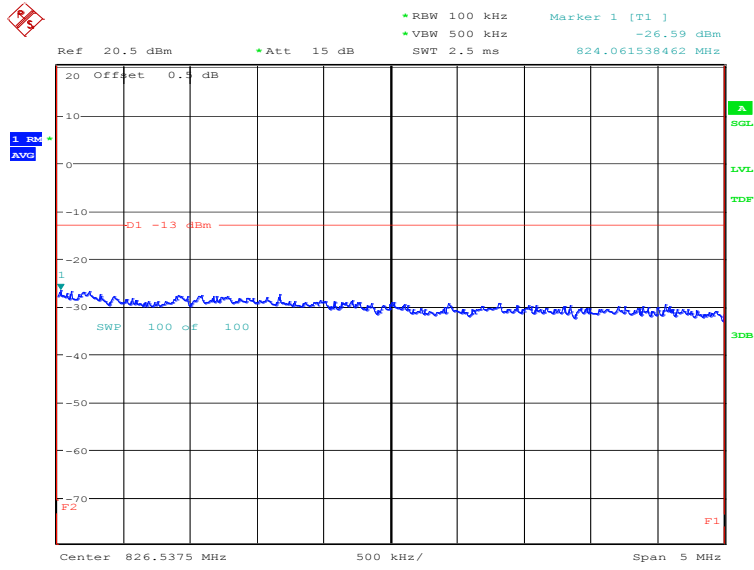


Date: 28.SEP.2020 14:48:21

### HIGH BAND EDGE BLOCK-10MHz-100%RB

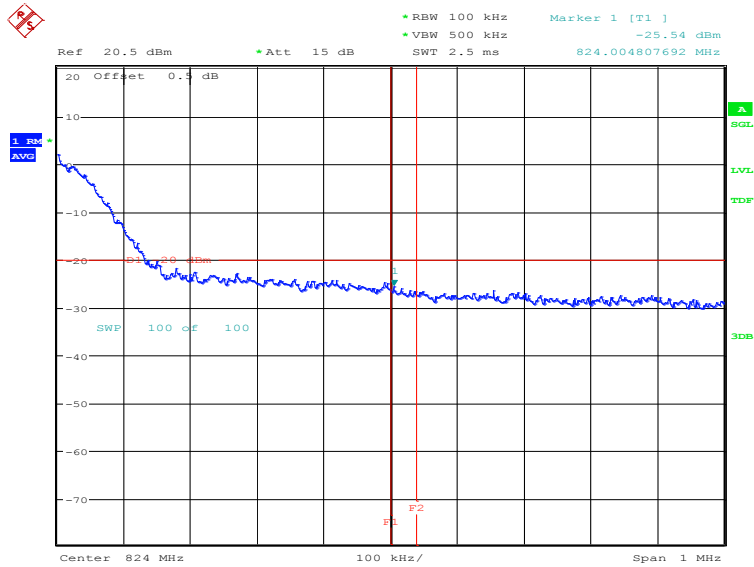


Date: 28.SEP.2020 14:48:00

**LTE band 26(824MHz~849MHz)**  
**OBW: 1RB-low\_offset**

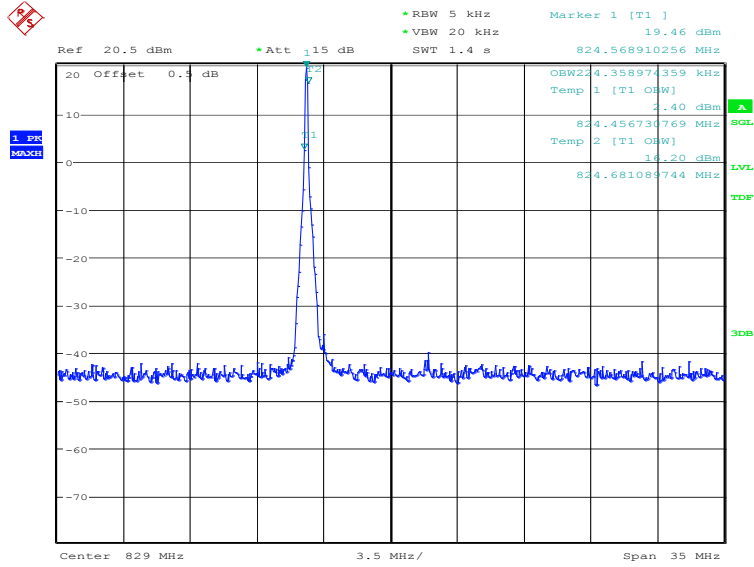


Date: 19.OCT.2020 14:45:14

**LOW BAND EDGE BLOCK-1RB-low\_offset**

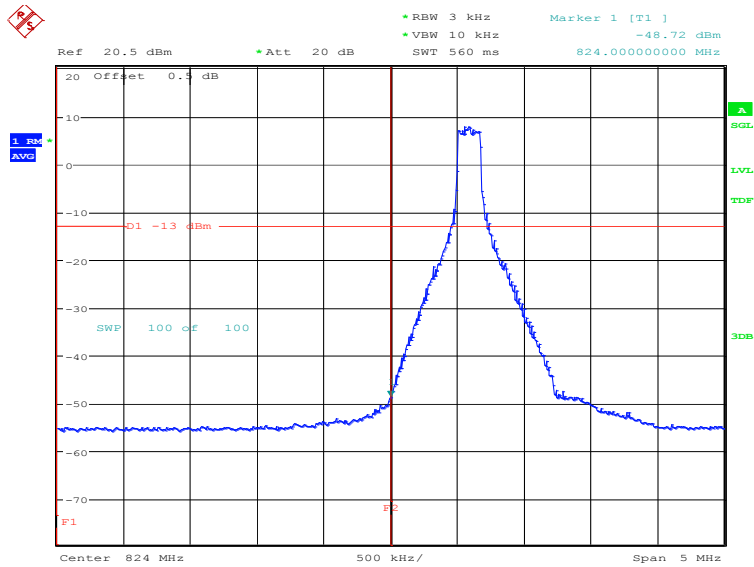


Date: 19.OCT.2020 14:46:27

### OBW: 1RB-high\_offset

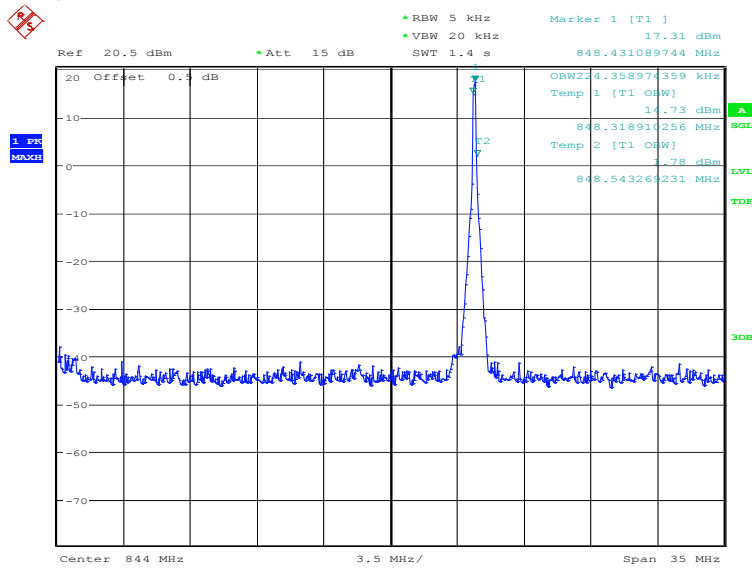


Date: 19.OCT.2020 14:47:02

### HIGH BAND EDGE BLOCK-1RB-high\_offset

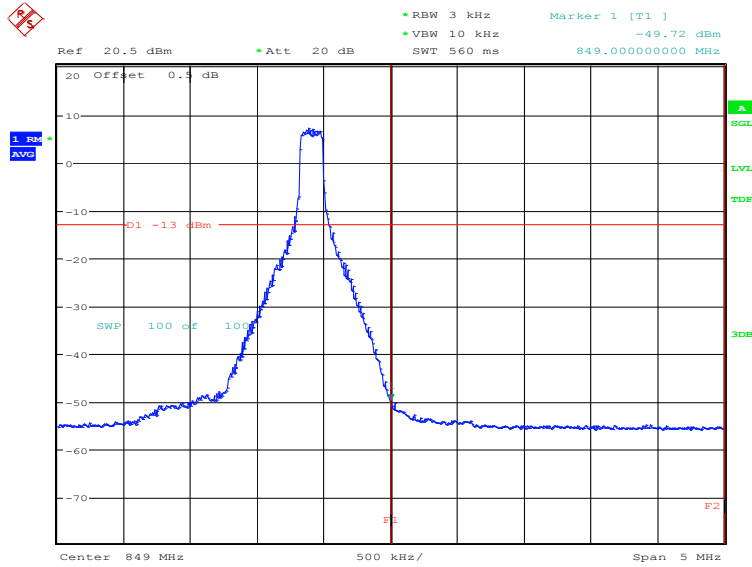


Date: 19.OCT.2020 14:48:15

### LOW BAND EDGE BLOCK-15MHz-100%RB

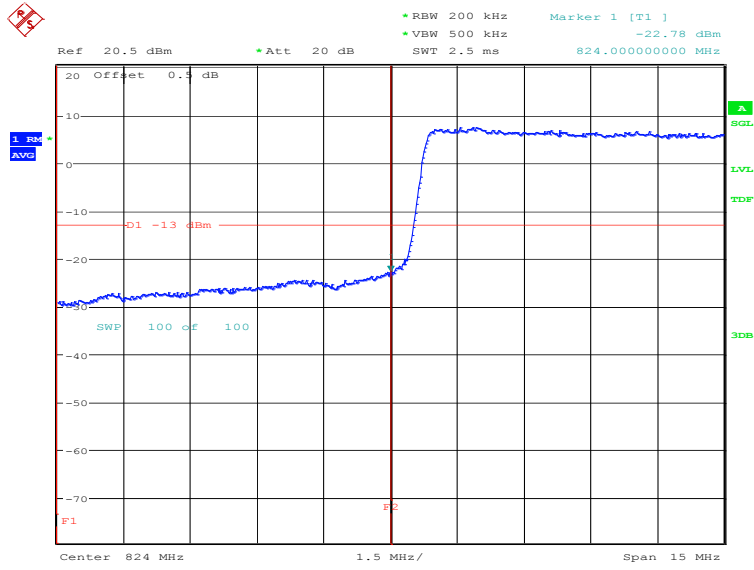


Date: 28.SEP.2020 14:40:03

### HIGH BAND EDGE BLOCK-15MHz-100%RB

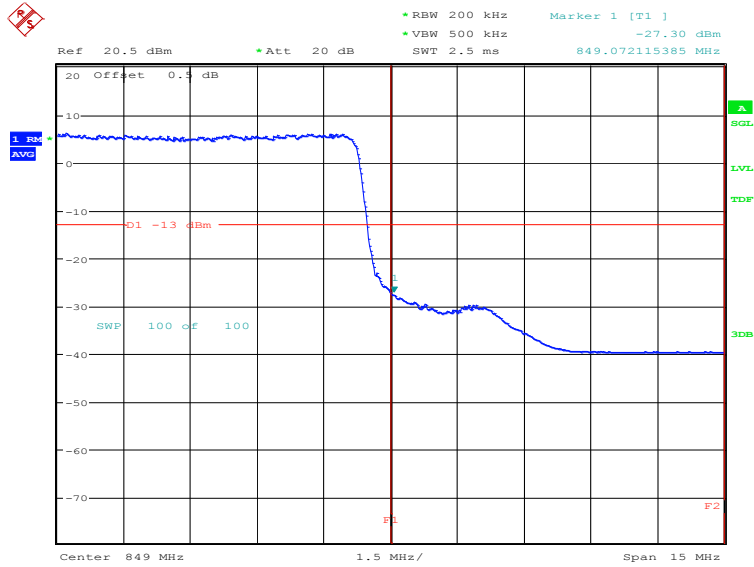


Date: 28.SEP.2020 14:41:23

LTE band 41  
OBW: 1RB-low\_offset

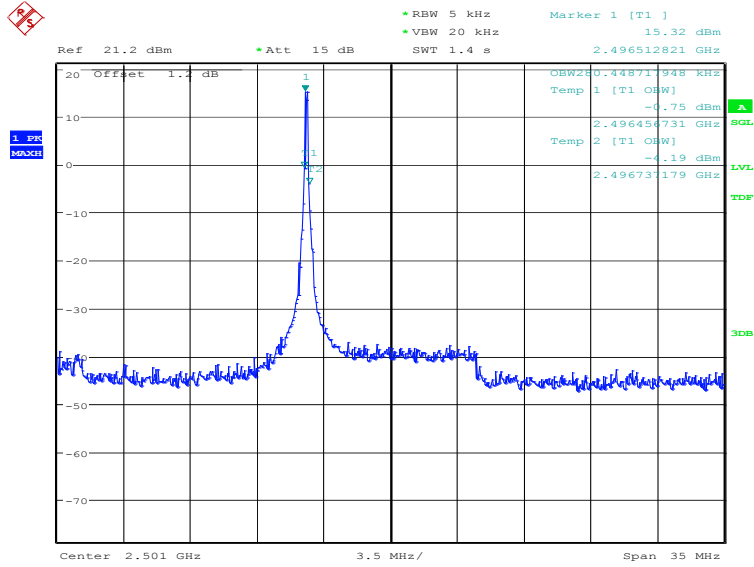


Date: 19.OCT.2020 17:43:36

### LOW BAND EDGE BLOCK-1RB-low\_offset

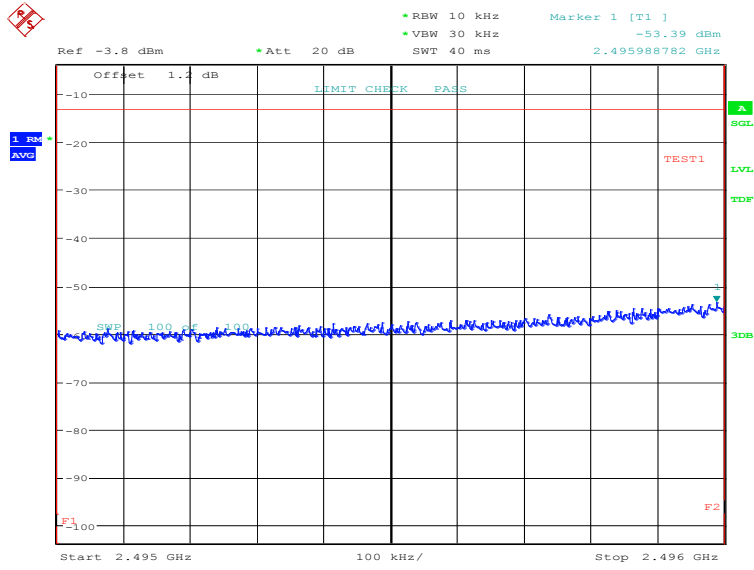


Date: 19.OCT.2020 17:44:57

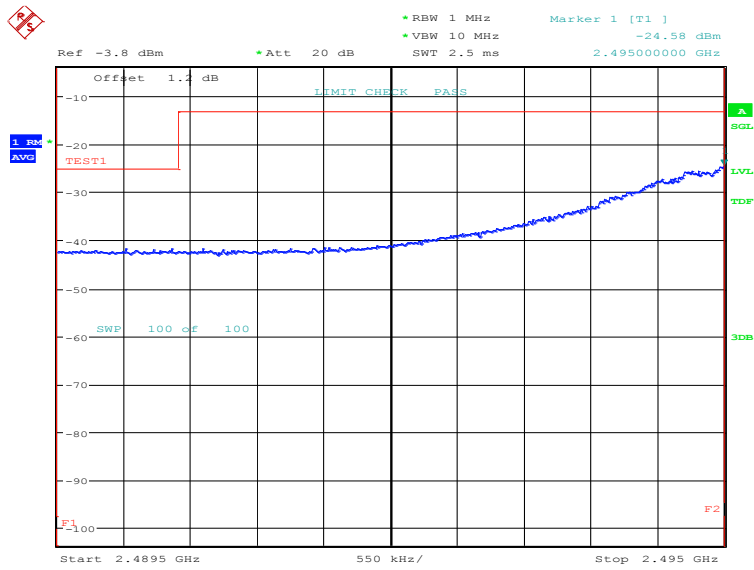


Date: 19.OCT.2020 17:45:11



### HIGH BAND EDGE BLOCK-1RB-high\_offset

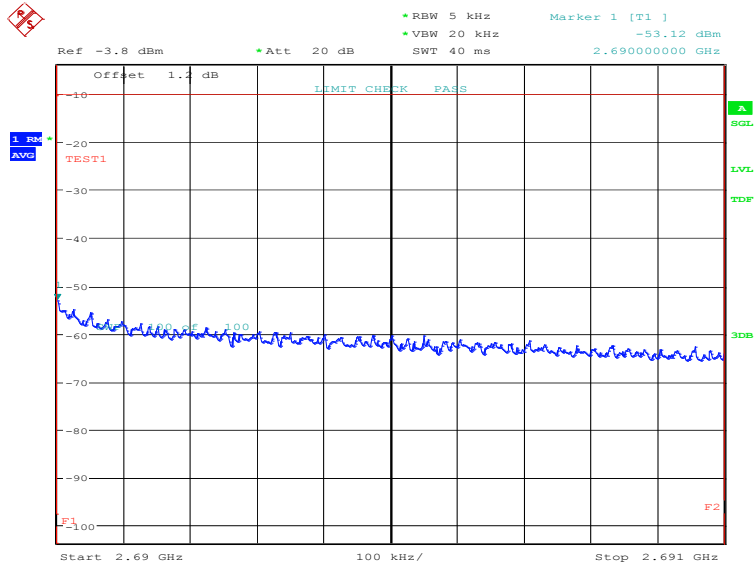


Date: 19.OCT.2020 17:47:47

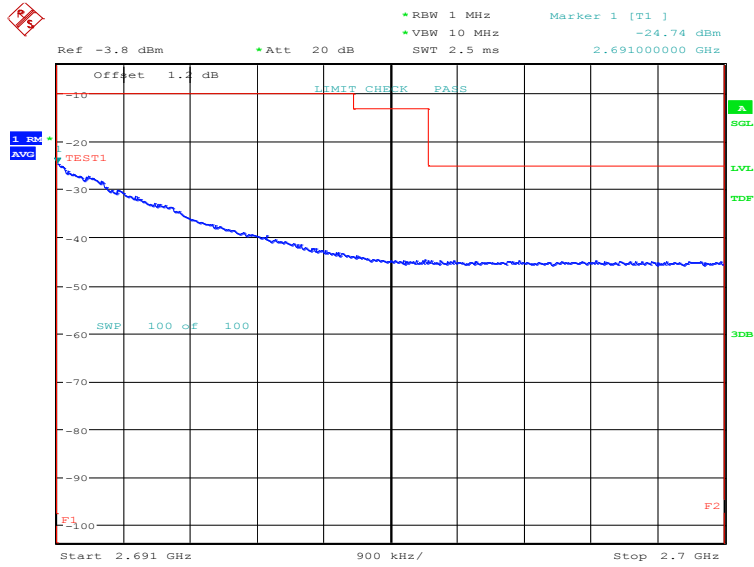


Date: 19.OCT.2020 17:48:01



### LOW BAND EDGE BLOCK-20MHz-100%RB

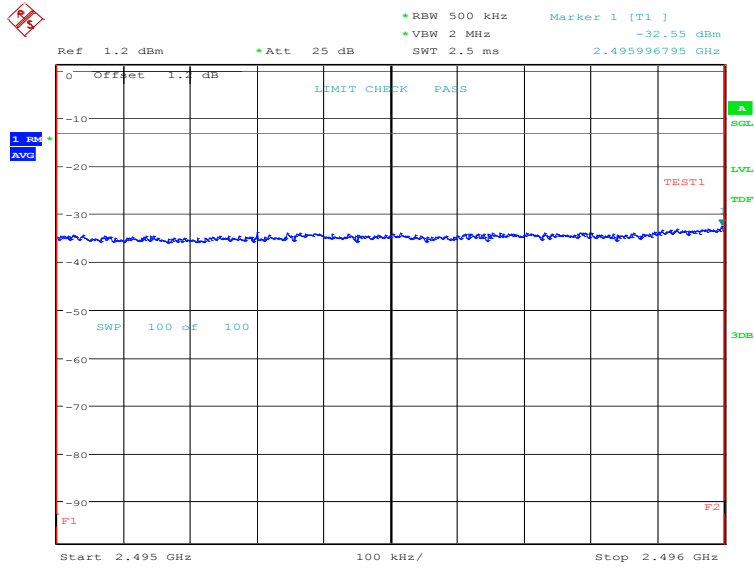


Date: 27.SEP.2020 17:54:50

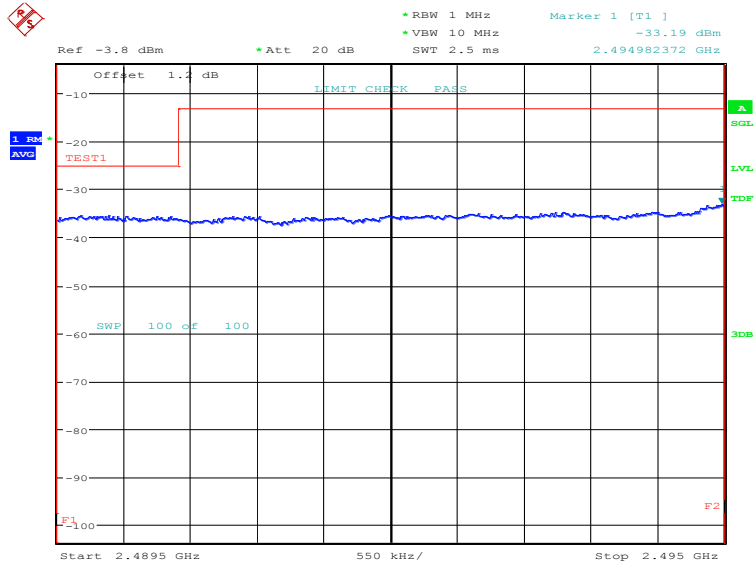


Date: 27.SEP.2020 17:55:04

### HIGH BAND EDGE BLOCK-20MHz-100%RB

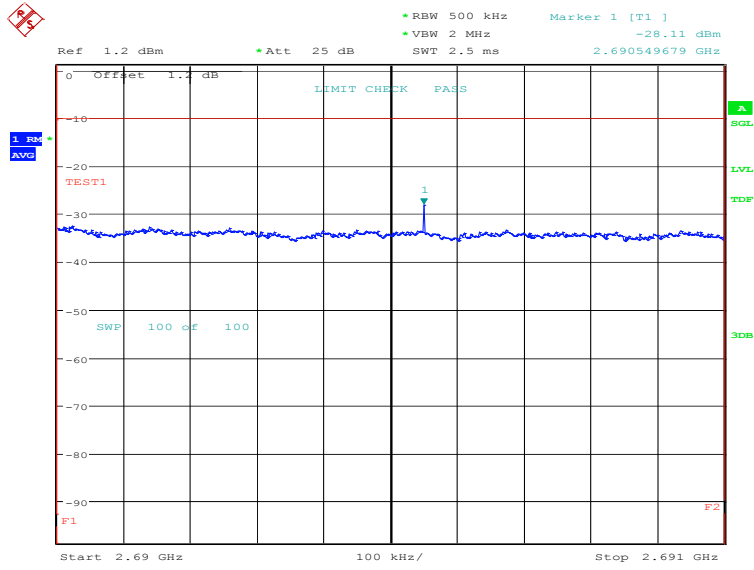

Date: 27.SEP.2020 17:56:29

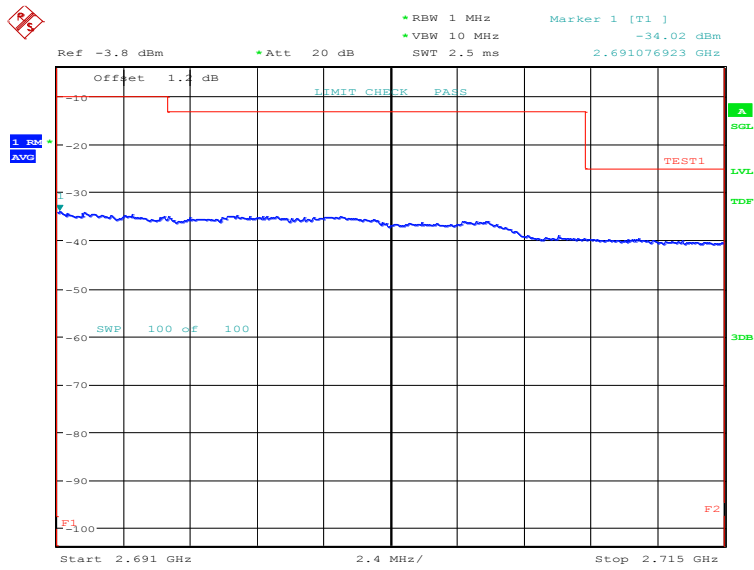

Date: 27.SEP.2020 17:56:43

## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**

Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


Part 90.691 states that out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### A. 7.3 Measurement result

Only the worst case result is given below

#### LTE band 7: 30MHz – 25.7GHz


NOTE: peak above the limit line is the carrier frequency.

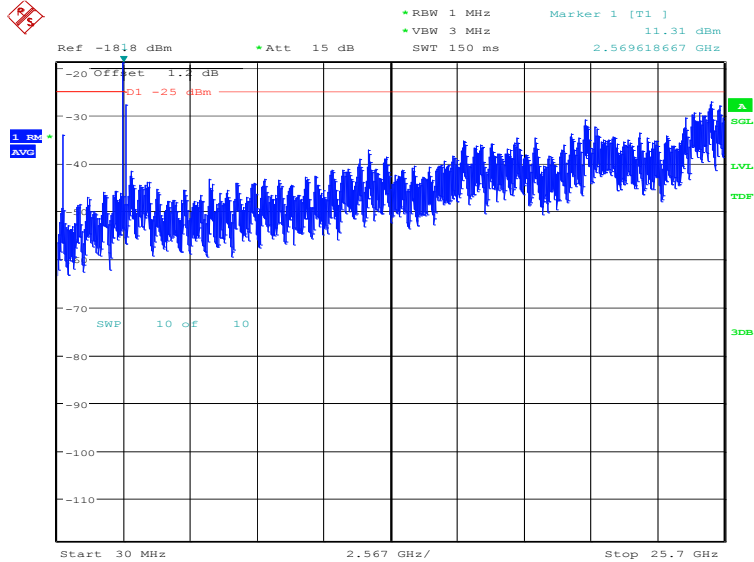

Date: 19.OCT.2020 17:49:01

#### LTE band 26(814MHz~824MHz): 30MHz – 8.24GHz


NOTE: peak above the limit line is the carrier frequency.

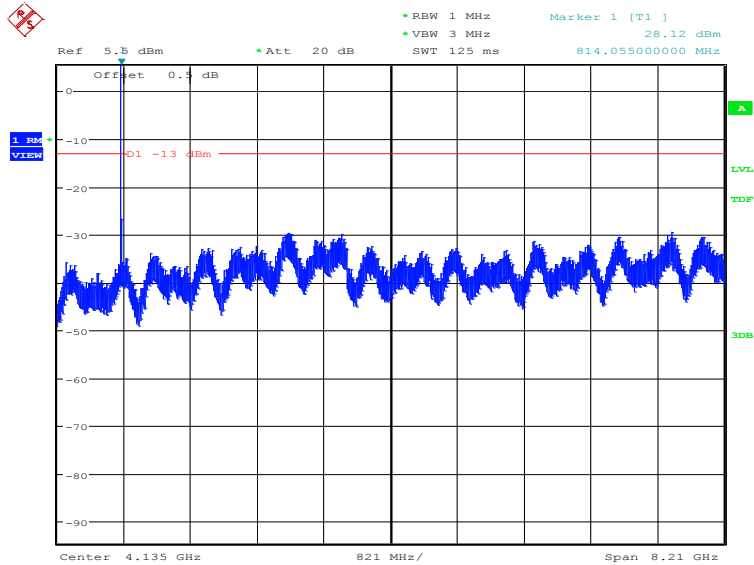

Date: 21.OCT.2020 11:19:57

**LTE band 26(824MHz~849MHz): 30MHz – 8.49GHz**


**NOTE: peak above the limit line is the carrier frequency.**

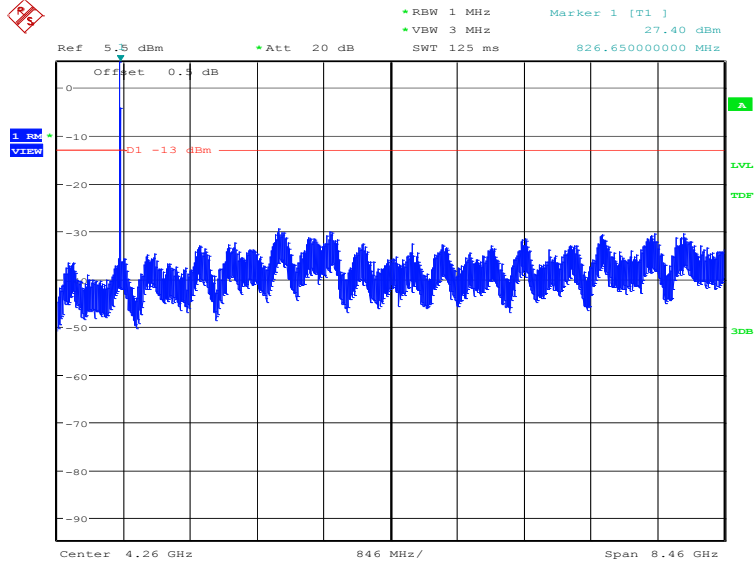

Date: 21.OCT.2020 11:21:25

**LTE band 41: 30MHz – 26.5GHz**

**NOTE: peak above the limit line is the carrier frequency.**

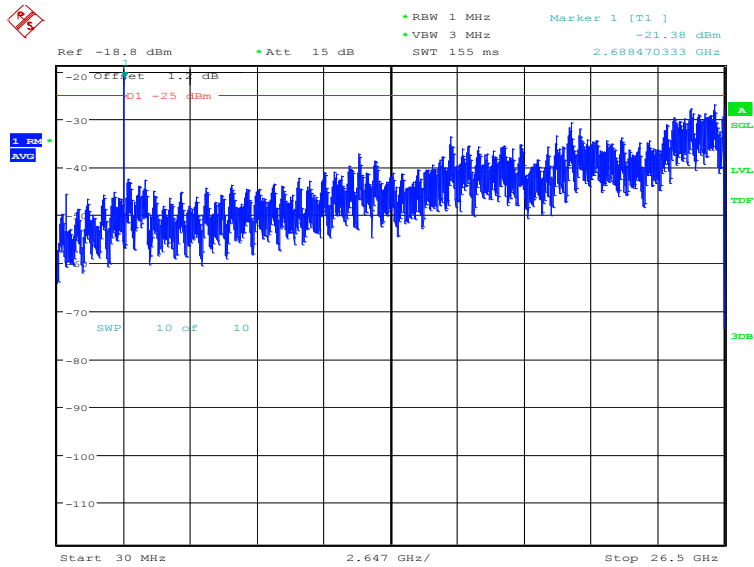

Date: 19.OCT.2020 17:50:03

### **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### **LTE band 7, 20MHz**

Frequency (MHz)	PAPR (dB)		
2535.0	QPSK	16QAM	64QAM
	6.73	7.44	7.63

#### **LTE band 41, 20MHz**

Frequency (MHz)	PAPR (dB)		
2593.0	QPSK	16QAM	64QAM
	8.21	8.81	9.01

## Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2020-09-29 through 2021-09-30 Effective Dates	 For the National Voluntary Laboratory Accreditation Program

\*\*\*END OF REPORT\*\*\*