

FCC PART 15C TEST REPORT No.**I18Z60880-IOT11**

for

TCL Communication Ltd.

GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile phone

Model Name: BBE100-5

FCC ID:2ACCJN029

with

Hardware Version:04

Software Version:V6R13-6

Issued Date: 2018-7-24



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

©Copyright. All rights reserved by CTTL.



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z60880-IOT11	Rev.0	1st edition	2018-6-21
I18Z60880-IOT11	Rev.1	Update chapter 5.3	2018-7-24



CONTENTS

1.	TEST LABORATORY	. 5
1.	1. TestingLocation	. 5
1.	2. TestingEnvironment	. 5
1.	3. Project data	. 5
1.4	4. SIGNATURE	. 5
2.	CLIENTINFORMATION	. 6
2.	1. Applicant Information	6
2. 2.		
3.	EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE)	. 7
3.	1. About EUT	. 7
3.	2. INTERNAL IDENTIFICATION OF EUT	. 7
3.	3. INTERNAL IDENTIFICATION OF AE	. 7
3.	4. EUT SET-UPS	. 8
3.	5. NORMAL ACCESSORY SETTING	. 8
3.	6. GENERAL DESCRIPTION	. 8
4.	REFERENCE DOCUMENTS	. 9
4.	1. DOCUMENTS SUPPLIED BY APPLICANT	. 9
4.	2. Reference Documents for testing	. 9
5.	TEST RESULTS 1	10
5.	1. Summary of Test Results	10
5.		
5.		
6.	TEST FACILITIES UTILIZED	
7.	MEASUREMENT UNCERTAINTY 1	12
7.	1. PEAK OUTPUT POWER - CONDUCTED	12
7.	2. FREQUENCY BAND EDGES	12
7.	3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	12
7.		
7.		
7.		
7.		
7.	8. AC POWERLINE CONDUCTED EMISSION	13
ANN	NEX A: DETAILED TEST RESULTS 1	14
A	1. Measurement Method	14
A	2. PEAK OUTPUT POWER – CONDUCTED	15
A	.3. Frequency Band Edges – Conducted 1	16
A	.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	
	©Copyright. All rights reserved by CTT	Ľ.



No.I18Z60880-IOT11 Page4of86

	A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED	48
	A.6. TIME OF OCCUPANCY (DWELL TIME)	59
	A.7. 20dB Bandwidth	69
	A.8. CARRIER FREQUENCY SEPARATION	75
	A.9. NUMBER OF HOPPING CHANNELS	
	A.10. AC POWERLINE CONDUCTED EMISSION	82
A	NNEX E: ACCREDITATION CERTIFICATE	86



1. Test Laboratory

1.1. TestingLocation

Conducted testing Location	n: CTTL(huayuan North Road)		
Address:	No. 52, Huayuan North Road, Haidian District, Beijing,		
	P. R. China100191		
Radiated testing Location:	CTTL(huayuan North Road)		
Address:	No. 52, Huayuan North Road, Haidian District, Beijing,		
	P. R. China100191		
Radiated testing Location:	CTTL(BDA)		
Address:	No.18A, Kangding Street, Beijing Economic-Technology		
	Development Area, Beijing, P. R. China 100176		

1.2. TestingEnvironment

Normal Temperature:	15-35 ℃
Relative Humidity:	20-75%

1.3. Project data

Testing Start Date:	2018-5-4
Testing End Date:	2018-6-19

1.4. Signature

Æ

Wu Le (Prepared this test report)



Sun Zhenyu (Reviewed this test report)

Stratz

Lv Songdong (Approved this test report)



2. <u>ClientInformation</u>

2.1. Applicant Information

Company Name:	TCL Communication Ltd.
Address /Dest	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Address/Post:	Pudong Area Shanghai, P.R. China. 201203
City:	/
Postal Code:	/
Country:	/
Telephone:	0086-21-31363544
Fax:	0086-21-61460602

2.2. Manufacturer Information

Company Name:	TCL Communication Ltd.
Address/Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
	Pudong Area Shanghai, P.R. China. 201203
City:	/
Postal Code:	/
Country:	/
Telephone:	0086-21-31363544
Fax:	0086-21-61460602



3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile
	phone
Model Name	BBE100-5
FCC ID	2ACCJN029
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.85V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT4	/	04	V6R13-6
EUT5	/	04	V6R13-6
*EUT ID: is used to identify the test sample in the lab internally.			

3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	USB Cable	/	/
AE5	Charger	/	NO TEST
AE1			
Model		TLp029C1	
Manufac	turer	BYD	
Capacita	ince	2900mAh	
Nominal	voltage	3.85V	
AE2			
Model		CBA0064AGBC1	
Manufac	turer	BYD	
Length c	f cable	/	
AE3			
Model		CDA0000119CF	
Manufac	turer	LUXSHARE	
Length c	f cable	/	
AE4			
Model		CDA0000119C1	
Manufac	turer	Juwei	



Length of cable/AE5CBA0064AHBC1ModelCBA0064AHBC1ManufacturerBYDLength of cable/*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.10	EUT4+ AE1+ AE2+ AE3	BT

3.5. Normal Accessory setting

Fully charged battery should be used during the test.

3.6. General Description

The Equipment Under Test (EUT) is a model of GSM Quad-band/HSPA-UMTS Six-band/LTE 18-bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test.Samples undergoing test were selected by the Client.



4. <u>Reference Documents</u>

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2016
	15.247 Operation within the bands 902–928MHz,	
	2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard of Procedures for	June,2013
ANSI 663.10	Compliance Testing of Unlicensed Wireless Devices	June,2013



5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

- P Pass, The EUT complies with the essential requirements in the standard.
- **F** Fail, The EUT does not comply with the essential requirements in the standard
- NA Not Applicable, The test was not applicable
- NP Not Performed, The test was not performed by CTTL
- R Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	R
Frequency Band Edges	15.247 (d)	R
Transmitter Spurious Emission - Conducted	15.247 (d)	R
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	R
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	R
20dB Bandwidth	15.247 (a)(1)	R
Carrier Frequency Separation	15.247 (a)(1)	R
Number of hopping channels	15.247 (a)(b)(iii)	R
AC Powerline Conducted Emission	15.107, 15.207	R

Please refer to ANNEX A for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

5.3. Explanation of re-use of test data

This model is a variant product which model name is BBE100-2, according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, all test results are derived from test report No. I18Z60272-IOT13. For detail differences between two models please refer the Declaration of Changes document.



6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibratio n Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2018-09-30
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2018-09-29
3	LISN	ENV216	101200	Rohde & Schwarz	1 year	2018-08-03
4	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2019-02-28
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2018-12-30
2	BiLog Antenna	VULB9163	514	Schwarzbeck	3 years	2021-01-03
3	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2020-05-31
4	EMI Antenna	3117	00139065	ETS-Lindgren	3 Years	2020-11-15
5	Spectrum Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2019-07-22
6	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2019-03-08



7. <u>Measurement Uncertainty</u>

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

7.2. Frequency Band Edges

Measurement Uncertainty:

7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
<1 GHz	5.40 dB
> 1 GHz	5.26 dB

7.5. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.88ms
------------------------------	--------

7.6. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

7.7. Carrier Frequency Separation

Measurement Uncertainty:



61.936Hz

7.8. AC Powerline Conducted Emission

Measurement Uncertainty:




ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer




A.1.2. Radiated Emission Measurements

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz; Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

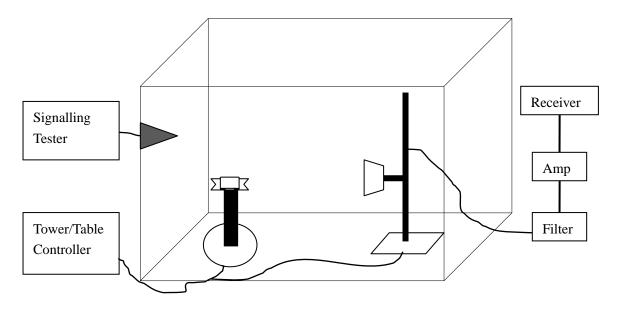



A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.86	7.89	7.68	Р


Form/4 DQPSK

Deals Canducted			
Peak Conducted Output Power (dBm) 7.13	7.14	7.26	Р

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.29	7.40	7.44	Р

Conclusion: PASS





A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output.Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- -Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time:Auto
- Detector: Peak
- -Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude deltabetween the peak of the fundamental and the peak of the band-edge emission. This is not anabsolute field strength measurement; it is only a relative measurement to determine the amount bywhich the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-56.90	Р
0	Hopping ON	Fig.2	-64.34	Р
70	Hopping OFF	Fig.3	-64.45	Р
78	Hopping ON	Fig.4	-65.82	Р

Form/4 DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-57.14	Р
0	Hopping ON	Fig.6	-61.56	Р
70	Hopping OFF	Fig.7	-61.84	Р
78	Hopping ON	Fig.8	-62.53	Р

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-58.94	Р
0	Hopping ON	Fig.10	-60.59	Р
78	Hopping OFF	Fig.11	-61.94	Р



Hopping ON	Fig.12	-61.39	Р
------------	--------	--------	---

Conclusion: PASS

Test graphs as below

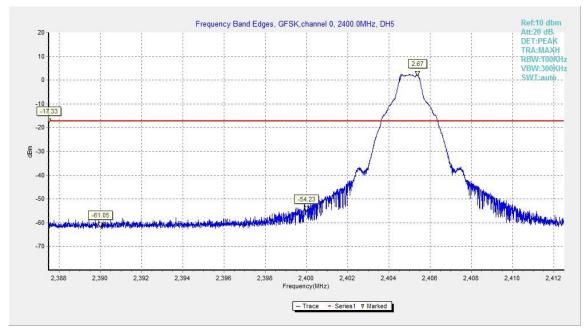


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

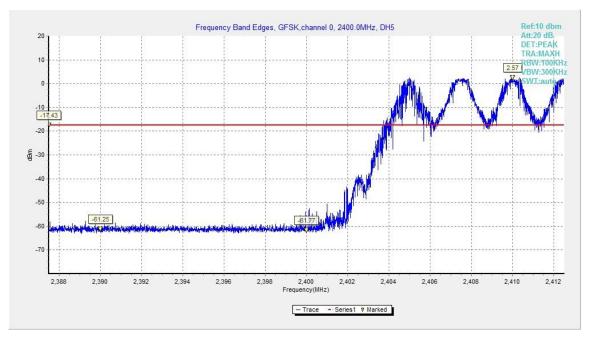


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

No.I18Z60880-IOT11 Page18of86



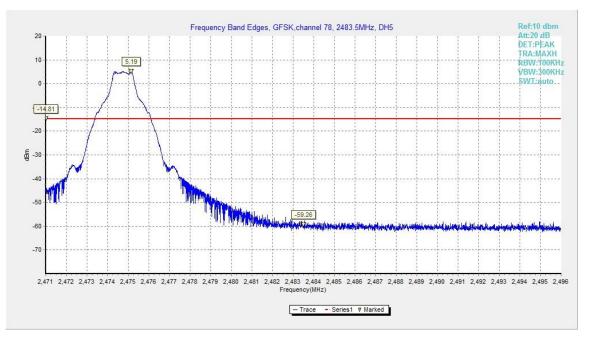


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

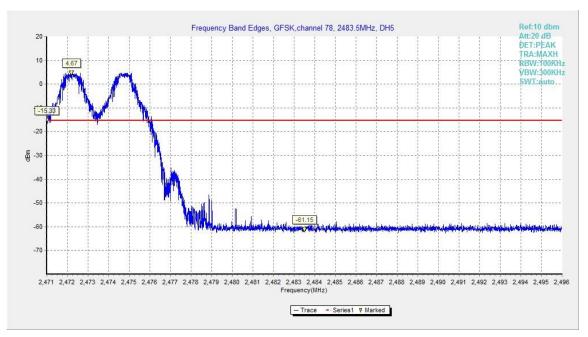


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

No.I18Z60880-IOT11 Page19of86



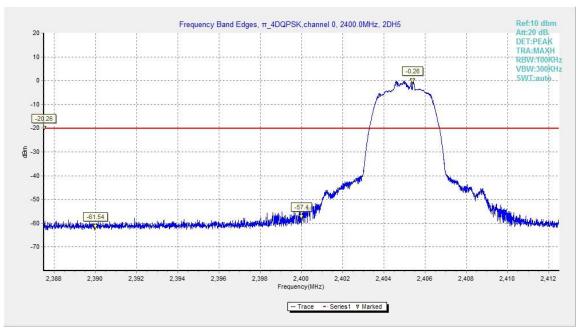


Fig.5. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping Off

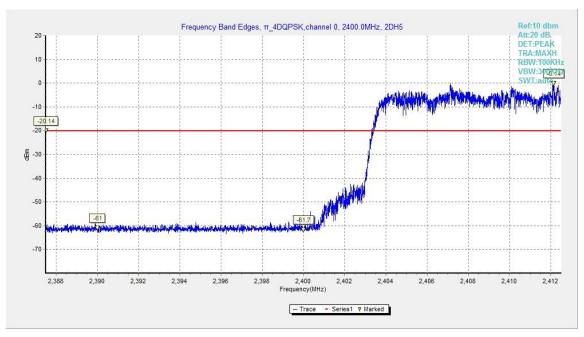


Fig.6. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping On

No.I18Z60880-IOT11 Page20of86



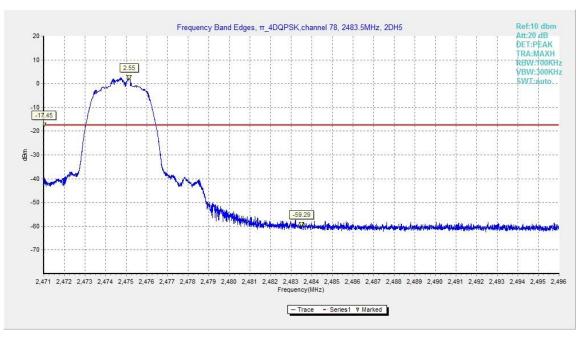


Fig.7. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping Off

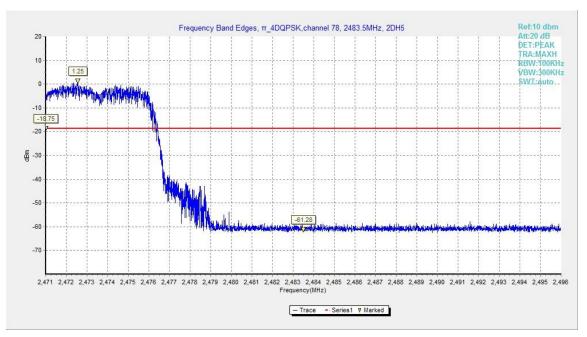


Fig.8. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping On

No.I18Z60880-IOT11 Page21of86



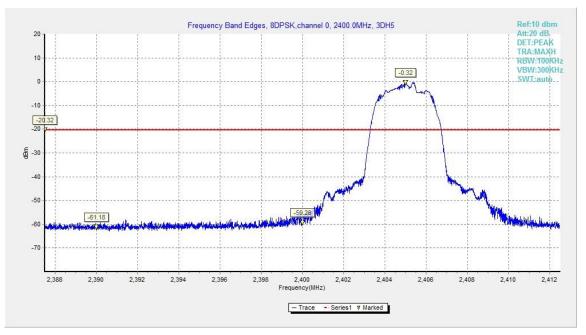


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

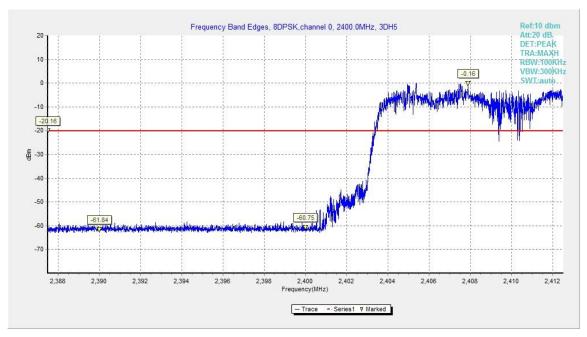


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

No.I18Z60880-IOT11 Page22of86



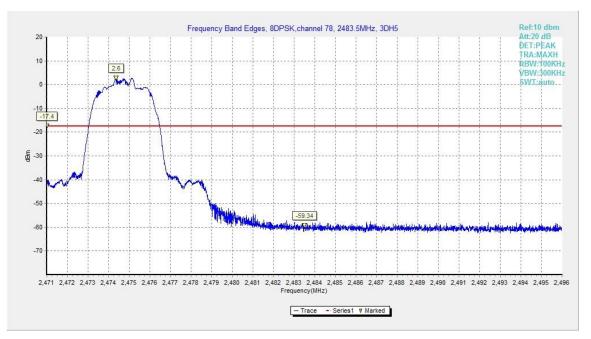


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

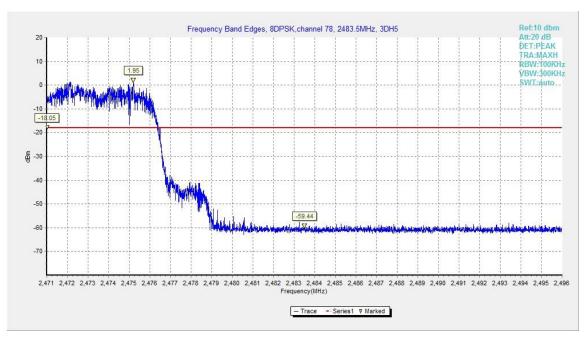


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On



A.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW = 300 kHz.
- 3. Set the span to 5-30 % greater than the EBW.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.

8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

- 1. Set RBW = 100 kHz.
- 2. Set VBW = 300 kHz.
- 3. Set span to encompass the spectrum to be examined.
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard Limit	
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz
	bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	Р
2402 MHz	30 MHz ~ 1 GHz	Fig.14	Р

©Copyright. All rights reserved by CTTL.



	1 GHz ~ 3 GHz	Fig.15	Р
	3 GHz ~ 10 GHz	Fig.16	Р
	10 GHz ~ 26 GHz	Fig.17	Р
	Center Frequency	Fig.18	Р
01.00	30 MHz ~ 1 GHz	Fig.19	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.20	Р
2441 101112	3 GHz ~ 10 GHz	Fig.21	Р
	10 GHz ~ 26 GHz	Fig.22	Р
	Center Frequency	Fig.23	Р
<u> </u>	30 MHz ~ 1 GHz	Fig.24	Р
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.25	Р
2480 MHZ	3 GHz ~ 10 GHz	Fig.26	Р
	10 GHz ~ 26 GHz	Fig.27	Р
For π/4 DQPSK			
Channel	Frequency Range	Test Results	Conclusion
	Center Frequency	Fig.28	Р
0	30 MHz ~ 1 GHz	Fig.29	Р
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.30	Р
2402 10112	3 GHz ~ 10 GHz	Fig.31	Р
	10 GHz ~ 26 GHz	Fig.32	Р
	Center Frequency	Fig.33	Р
0	30 MHz ~ 1 GHz	Fig.34	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.35	Р
2441 MHZ	3 GHz ~ 10 GHz	Fig.36	Р
	10 GHz ~ 26 GHz	 Fig.37	P

	10 0112 ~ 20 0112	1 lg.57	
Ch 78 2480 MHz	Center Frequency	Fig.38	Р
	30 MHz ~ 1 GHz	Fig.39	Р
	1 GHz ~ 3 GHz	Fig.40	Р
	3 GHz ~ 10 GHz	Fig.41	Р

Fig.42

10 GHz ~ 26 GHz

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	Р
	30 MHz ~ 1 GHz	Fig.44	Р
	1 GHz ~ 3 GHz	Fig.45	Р
	3 GHz ~ 10 GHz	Fig.46	Р
	10 GHz ~ 26 GHz	Fig.47	Р
Ch 39	Center Frequency	Fig.48	Р

Ρ



2441 MHz	30 MHz ~ 1 GHz	Fig.49	Р
	1 GHz ~ 3 GHz	Fig.50	Р
	3 GHz ~ 10 GHz	Fig.51	Р
	10 GHz ~ 26 GHz	Fig.52	Р
Ch 78 2480 MHz	Center Frequency	Fig.53	Р
	30 MHz ~ 1 GHz	Fig.54	Р
	1 GHz ~ 3 GHz	Fig.55	Р
	3 GHz ~ 10 GHz	Fig.56	Р
	10 GHz ~ 26 GHz	Fig.57	Р

Conclusion: PASS

Test graphs as below

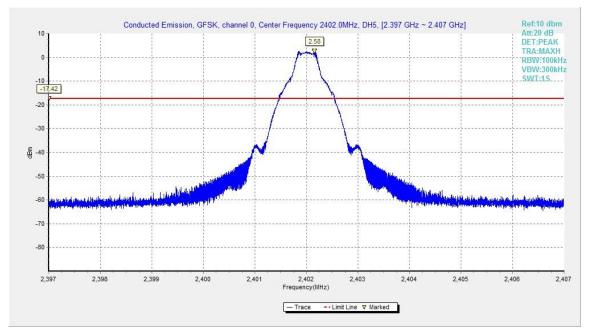


Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

No.I18Z60880-IOT11 Page26of86



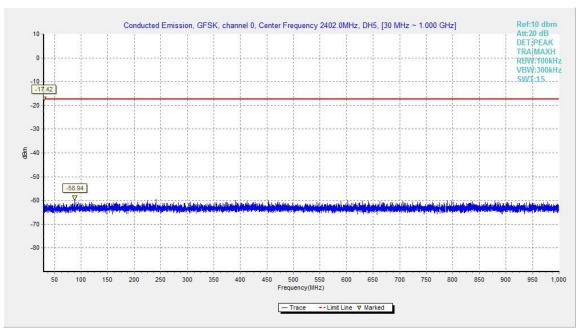


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

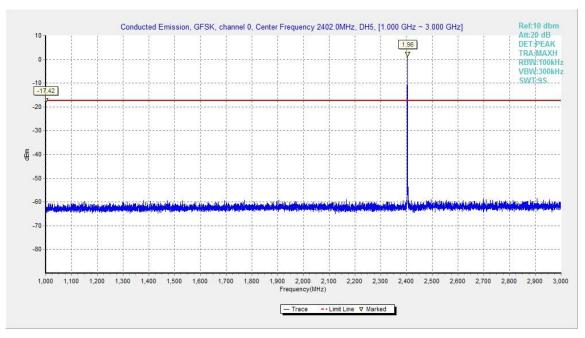
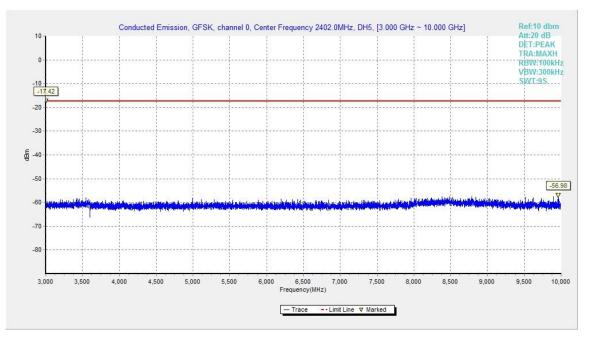



Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

No.I18Z60880-IOT11 Page27of86







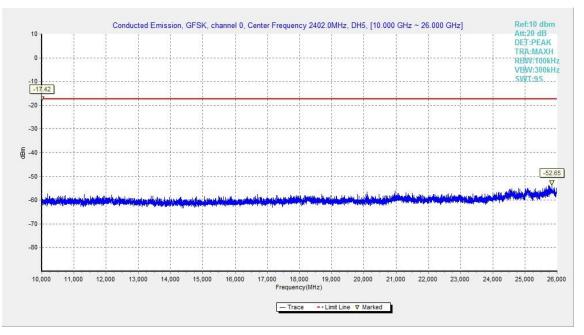


Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz

No.I18Z60880-IOT11 Page28of86



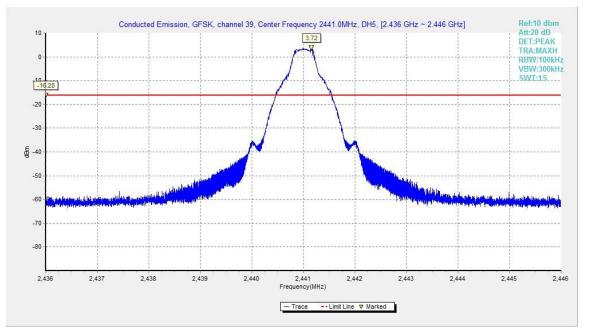


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

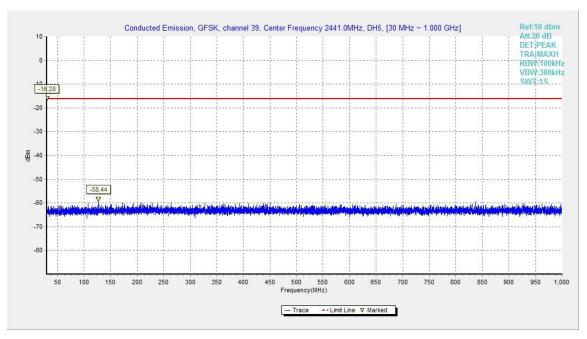


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

No.I18Z60880-IOT11 Page29of86



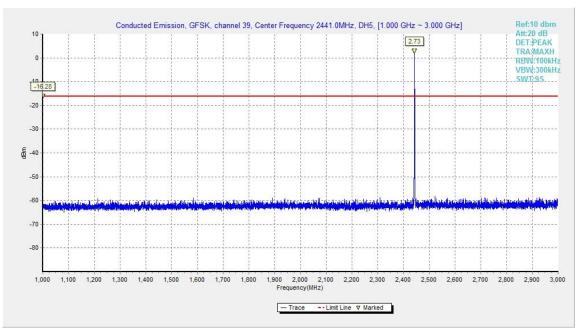


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz - 3GHz

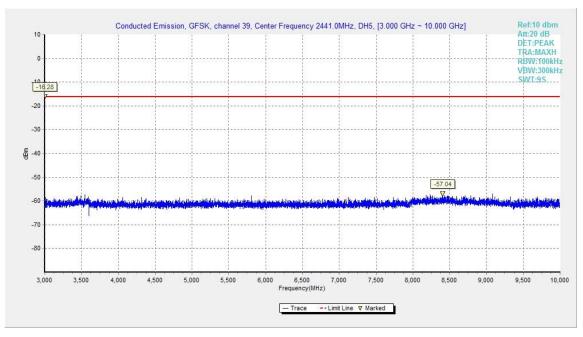


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz - 10GHz

No.I18Z60880-IOT11 Page30of86



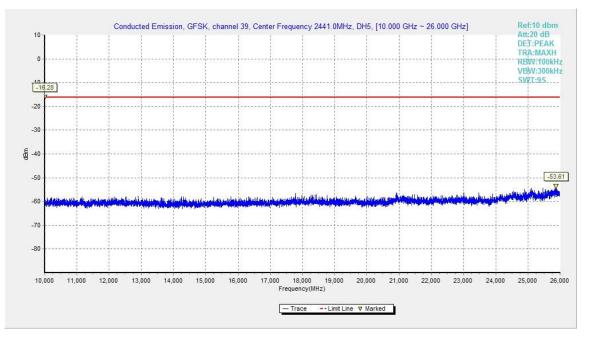


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz - 26GHz

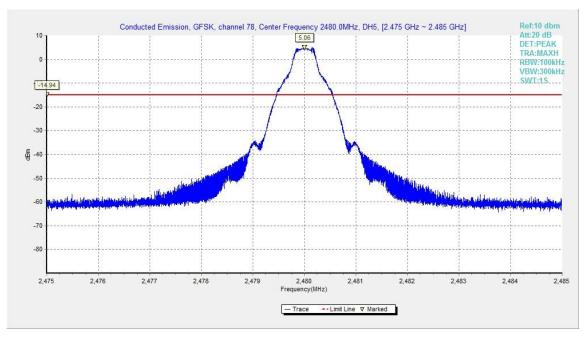


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

No.I18Z60880-IOT11 Page31of86



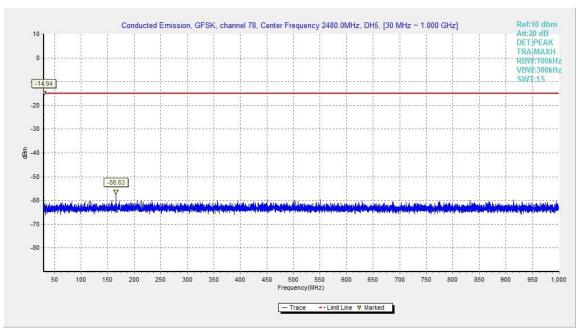


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

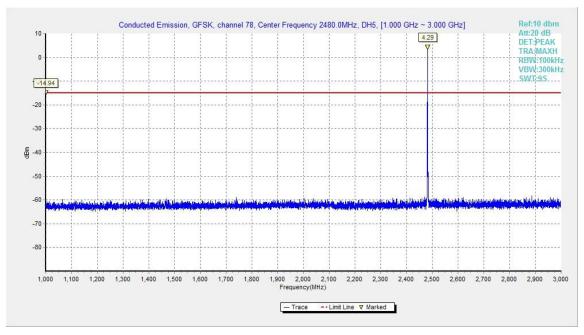


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

No.I18Z60880-IOT11 Page32of86



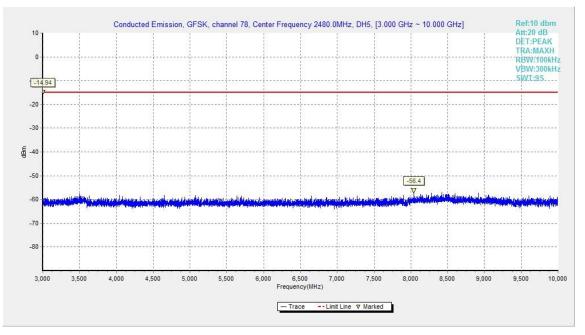


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

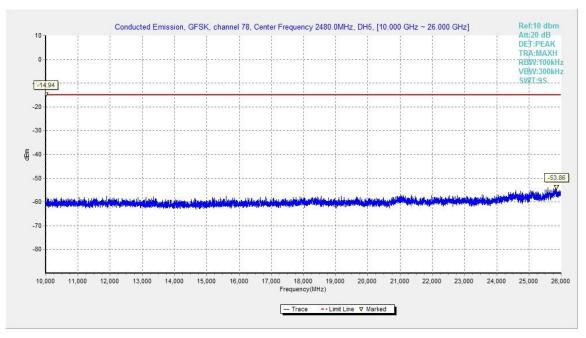


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

No.I18Z60880-IOT11 Page33of86



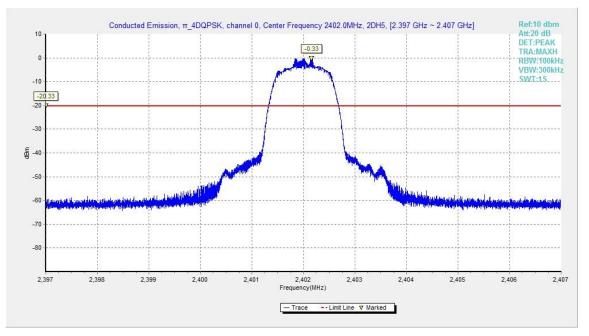


Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

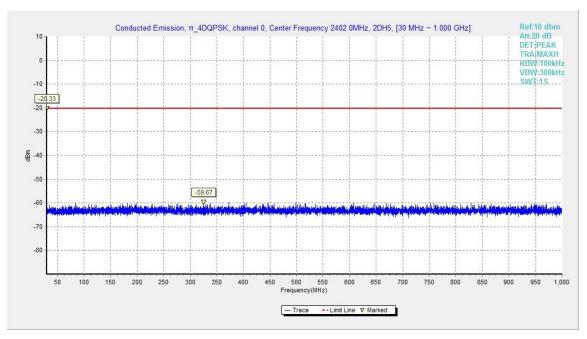


Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

No.I18Z60880-IOT11 Page34of86



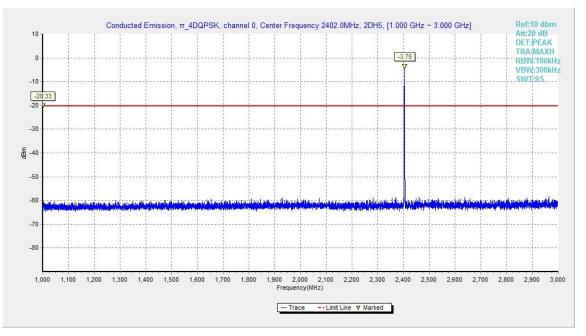


Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

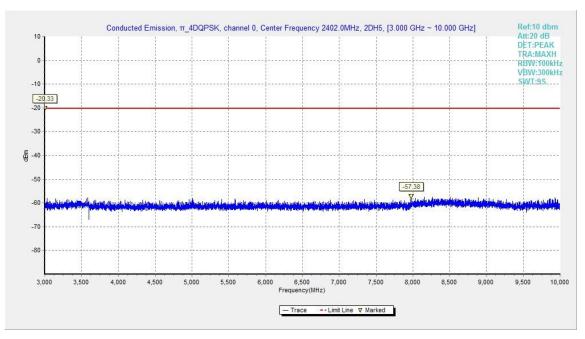


Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

No.I18Z60880-IOT11 Page35of86



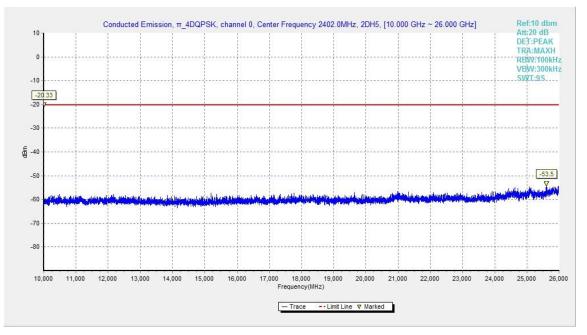


Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,10GHz - 26GHz

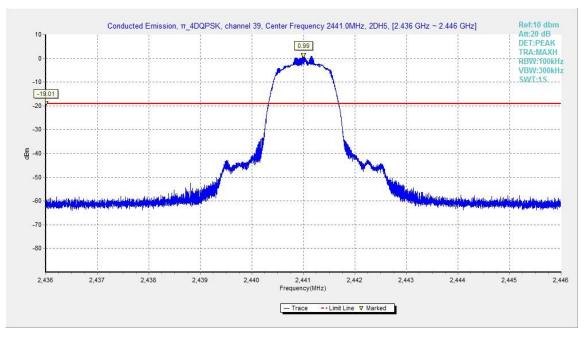


Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

No.I18Z60880-IOT11 Page36of86



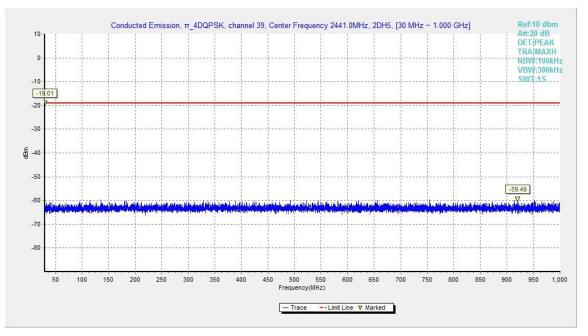


Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

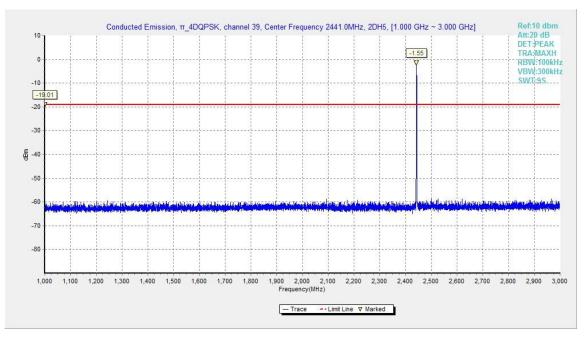


Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

No.I18Z60880-IOT11 Page37of86



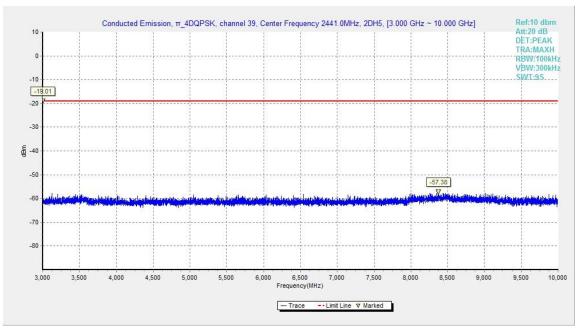


Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

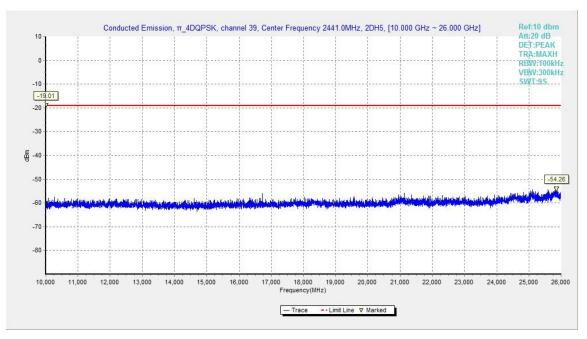


Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

No.I18Z60880-IOT11 Page38of86



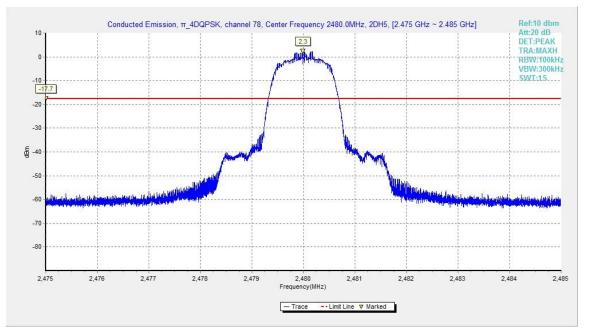


Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

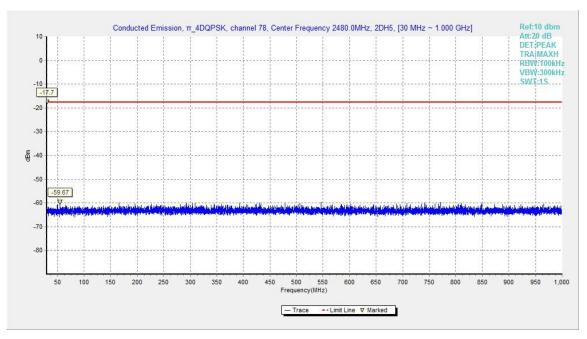


Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

No.I18Z60880-IOT11 Page39of86



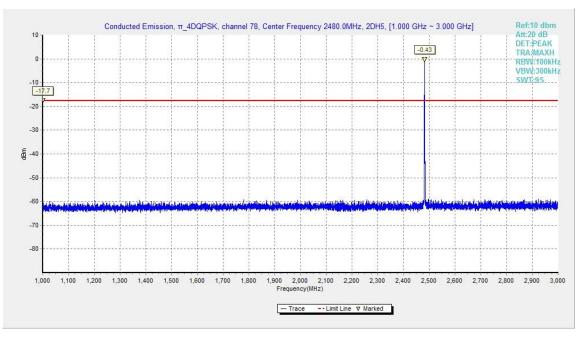


Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

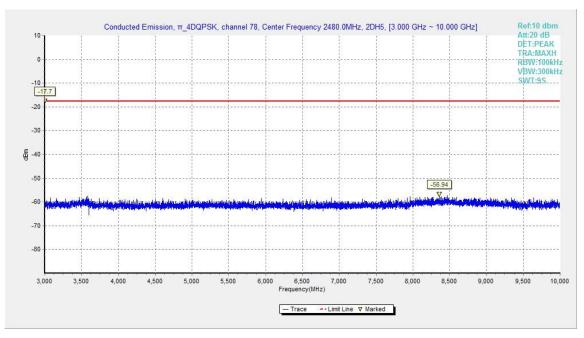


Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

No.I18Z60880-IOT11 Page40of86



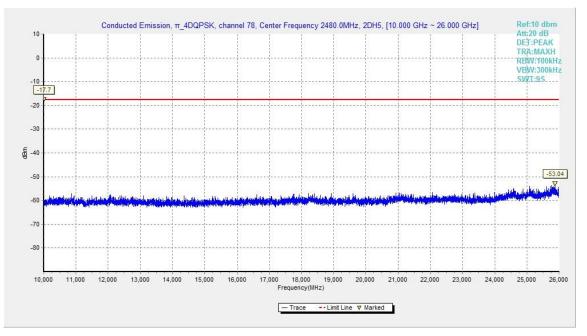


Fig.42. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

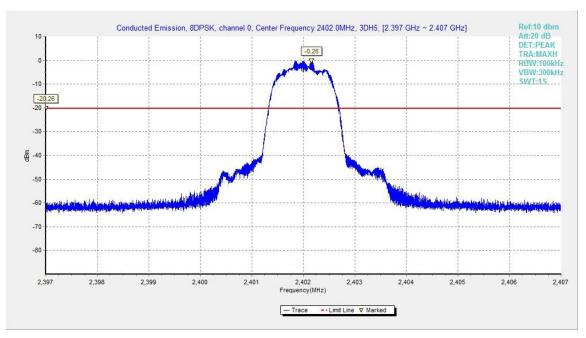


Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

No.I18Z60880-IOT11 Page41of86



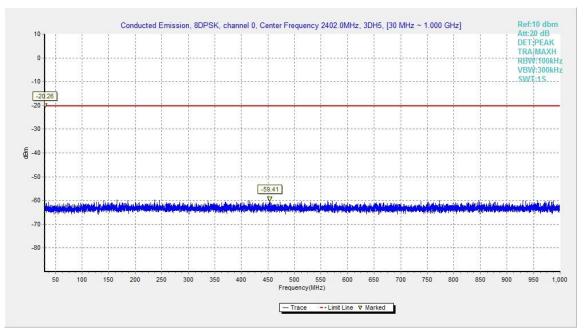


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

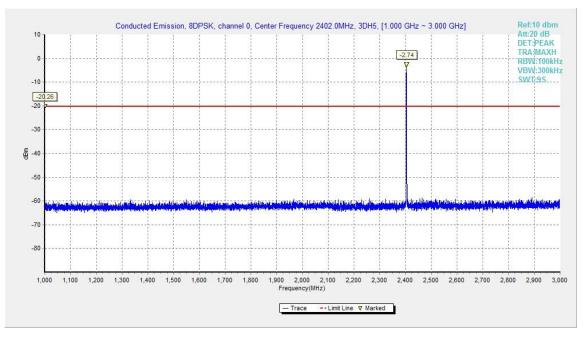


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

No.I18Z60880-IOT11 Page42of86



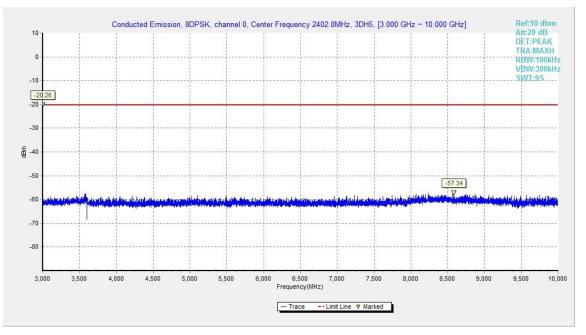


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

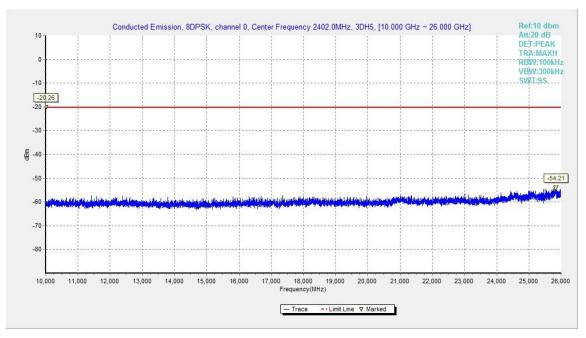


Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz

No.I18Z60880-IOT11 Page43of86



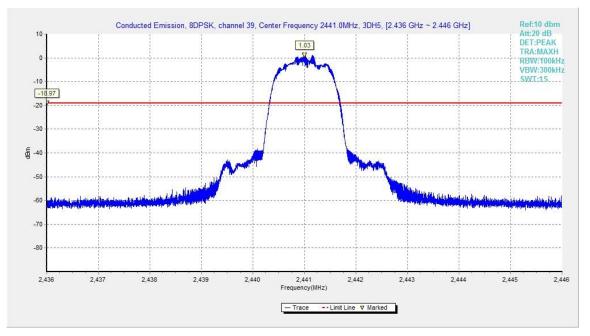


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

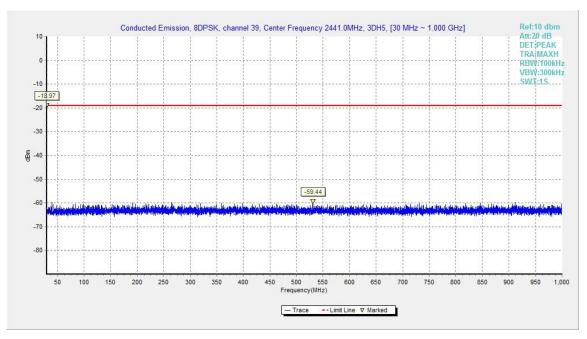


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

No.I18Z60880-IOT11 Page44of86



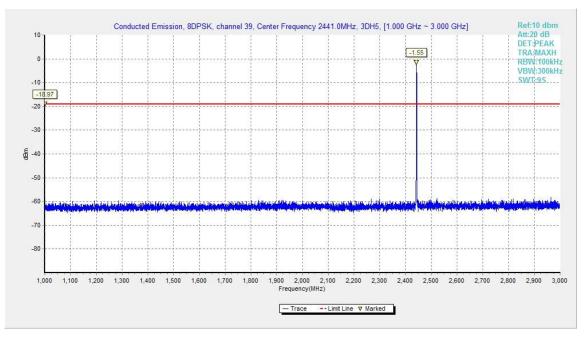


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

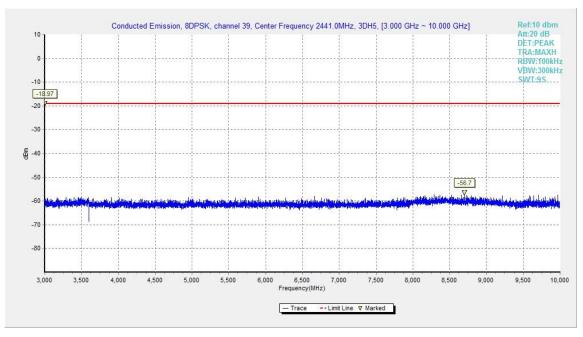


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

No.I18Z60880-IOT11 Page45of86



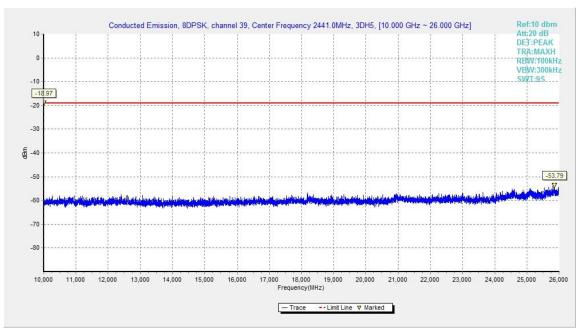


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz - 26GHz

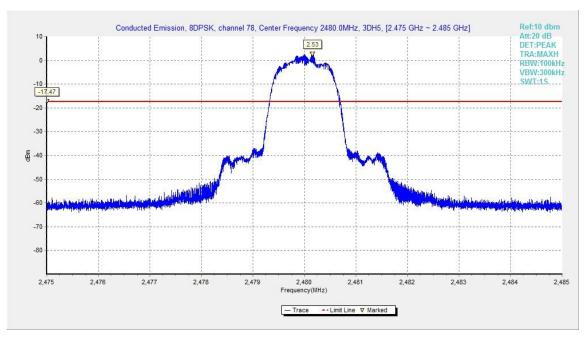


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

No.I18Z60880-IOT11 Page46of86



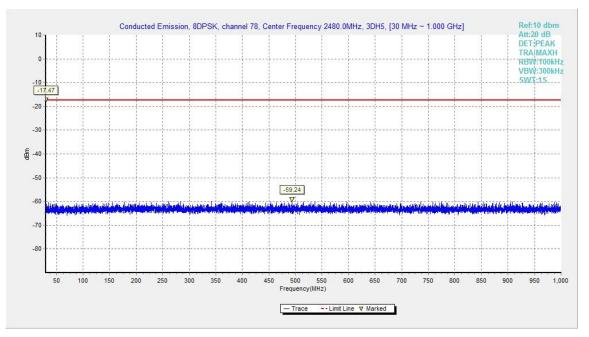


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

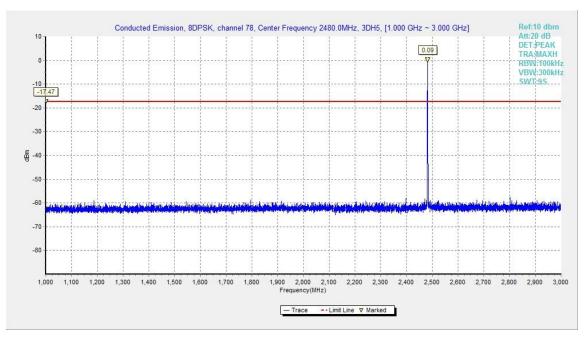


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

No.I18Z60880-IOT11 Page47of86



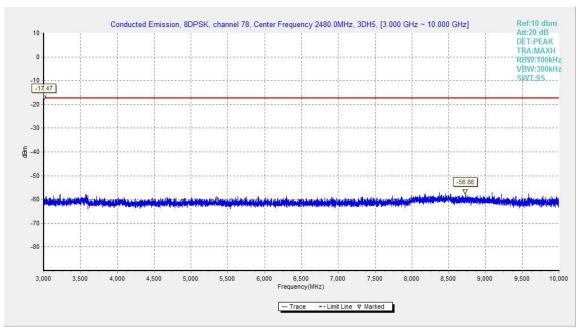


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

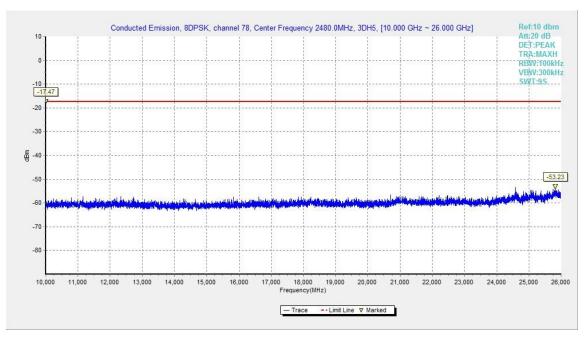


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz



A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit	
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power	

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission	Field strength(uV/m)	Field strength(dBuV/m)	
(MHz)			
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time(s)
(MHz)		
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20



Measurement Results:

Result=P_{Mea}+ARPL

For GFSK

Channel	Frequency Range	Test Results	Conclusion		
Ch 0	1 GHz ~ 3 GHz				
2402 MHz	3 GHz ~ 18 GHz				
	9 kHz ~ 30 MHz				
Ch 39	30 MHz ~ 1 GHz				
2441 MHz	1 GHz ~ 3 GHz				
	3 GHz ~ 18 GHz				
Ch 78	1 GHz ~ 3 GHz				
2480 MHz	3 GHz ~ 18 GHz				
Power	2.38GHz~2.4GHzL	Fig.58	Р		
Power	2.45GHz~2.5GHzH	Fig.59	Р		
For all channels	18 GHz ~ 26 GHz				
Forπ/4 DQPSK					
Channel	Frequency Range	Test Results	Conclusion		
Ch 0	1 GHz ~ 3 GHz				
2402 MHz	3 GHz ~ 18 GHz				
	30 MHz ~ 1 GHz				
Ch 39 2441 MHz	1 GHz ~ 3 GHz				
	3 GHz ~ 18 GHz				
Ch 78	1 GHz ~ 3 GHz				
2480 MHz	3 GHz ~ 18 GHz				
Power	2.38GHz~2.4GHzL	Fig.60	Р		
Power	2.45GHz~2.5GHzH	Fig.61	Р		
For all channels	18 GHz ~ 26 GHz				
For 8DPSK					
Channel	Frequency Range	Test Results	Conclusion		
Ch 0	1 GHz ~ 3 GHz				
2402 MHz	3 GHz ~ 18 GHz				
Ch 39	30 MHz ~ 1 GHz				
2441 MHz	1 GHz ~ 3 GHz				
	3 GHz ~ 18 GHz				
Ch 78	1 GHz ~ 3 GHz				
2480 MHz	3 GHz ~ 18 GHz				
Power	2.38GHz~2.4GHzL	Fig.62	Р		
Power	2.45GHz~2.5GHzH	Fig.63	Р		
For all channels	18 GHz ~ 26 GHz				