



**FCC PART 15C
TEST REPORT
No.I19Z61261-IOT04**

for

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Bi-Bands/GSM Quad-Bands/LTE 7

Bands/CDMA Tri-bands mobile phone

4053S

With

FCC ID: 2ACCJN033

Hardware Version: 05

Software Version: 1A38

Issued Date: 2019-10-12



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61261-IOT04	Rev.0	1st edition	2019-10-12

CONTENTS

CONTENTS	3
1. TEST LATORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATA	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1 APPLICANT INFORMATION	6
2.2 MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. STATEMENTS	10
6.3. TEST CONDITIONS	10
7. TEST EQUIPMENTS UTILIZED	11
8. MEASUREMENT UNCERTAINTY	12
8.1. TRANSMITTER OUTPUT POWER	12
8.2. PEAK POWER SPECTRAL DENSITY	12
8.3. OCCUPIED 6DB BANDWIDTH	12
8.4. BAND EDGES COMPLIANCE	12
8.5. SPURIOUS EMISSIONS	12
8.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: MEASUREMENT RESULTS	13
A.1. MEASUREMENT METHOD	13
A.2. MAXIMUM PEAK OUTPUT POWER	14
A.2.1. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	14
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	15

A.3. PEAK POWER SPECTRAL DENSITY	16
A.4. OCCUPIED 6dB BANDWIDTH	17
A.5. TRANSMITTER SPURIOUS EMISSION	22
A.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	22
A.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	40
A.6. BAND EDGES COMPLIANCE	45
A6.1 BAND EDGES - CONDUCTED.....	45
A 6.2 BAND EDGES - RADIATED	49
FIG. 47 BAND EDGES (802.11A, 5745MHZ)	49
FIG. 48 BAND EDGES (802.11A, 5825MHZ)	50
FIG. 49 BAND EDGES (802.11N-HT20, 5745MHZ).....	50
FIG. 50 BAND EDGES (802.11N-HT20, 5825MHZ).....	51
FIG. 51 BAND EDGES (802.11N-HT40, 5755MHZ).....	51
FIG. 52 BAND EDGES (802.11N-HT40, 5795MHZ).....	52
A.7. AC POWERLINE CONDUCTED EMISSION.....	53
FIG. 53 FIG.55.....	53
FIG. 54.....	53
FIG. 53 AC POWERLINE CONDUCTED EMISSION-802.11A	54
FIG. 54 AC POWERLINE CONDUCTED EMISSION-IDLE.....	55
FIG. 55 AC POWERLINE CONDUCTED EMISSION-802.11A	56
ANNEX B: ACCREDITATION CERTIFICATE.....	57

1. TEST LABORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. TestingEnvironment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-07-24


Testing End Date: 2019-09-16

1.5. Signature




Xie Fangfang

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)

2. CLIENT INFORMATION

2.1 Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722

2.2 Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 75/F, Building 22E, 22 Science Park East Avenue, Hong Kong
Science Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: 0086-755-36611722
Fax: 0086-755-36612000-81722

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS Bi-Bands/GSM Quad-Bands/LTE 7 Bands/CDMA Tri-bands mobile phone
Model name	4053S
FCC ID	2ACCJN033
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.8V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT34	015501000008516	05	1A38
EUT02	015501000009423	05	1A38

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	CAC4060002C2	/
AE2	Travel charger	/	/
AE3	Travel charger	/	/
AE4	USB Cable	/	/
AE5	USB Cable	/	/

AE1

Model	TLi017C1
Manufacturer	/
Capacitance	1780 mAh
Nominal voltage	3.8V

AE2

Model	UC11US
Manufacturer	PUAN
Length of cable	/

AE3

Model	UC11US
Manufacturer	Chenyang
Length of cable	/

AE4

Model	CDA0000123C1
-------	--------------

Manufacturer	Juwei
Length of cable	/
AE5	
Model	CDA0000123C2
Manufacturer	Shenghua
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS Bi-Bands/GSM Quad-Bands/LTE 7 Bands/CDMA Tri-bands mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples under going test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
Transmitter Spurious Emission - Radiated < 30MHz	15.407, 15.209	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2020-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2020-03-14
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2020-02-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2020-02-27
2	BiLog Antenna	VULB9163	1222	Schwarzbeck	1 year	2020-03-14
3	Dual-Ridge Waveguide Horn Antenna	3115	00167250	ETS-Lindgren	1 year	2020-05-14
4	EMI Antenna	3116	2661	ETS-Lindgren	1 year	2020-10-15
5	Spectrum Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2020-05-16

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.40
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.32
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

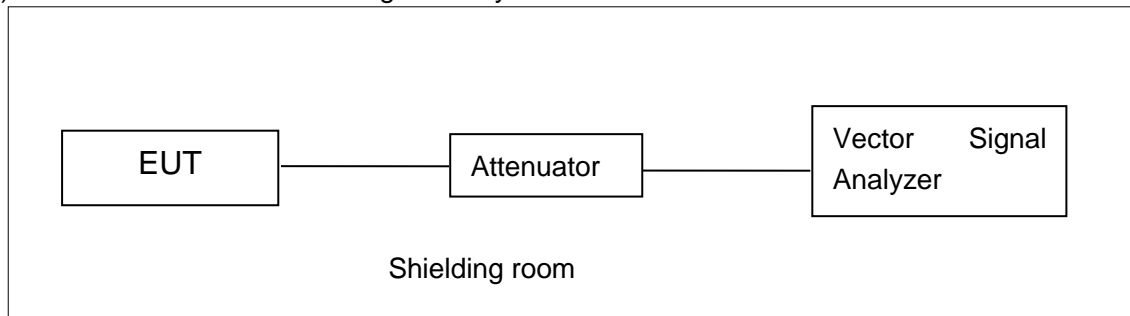


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

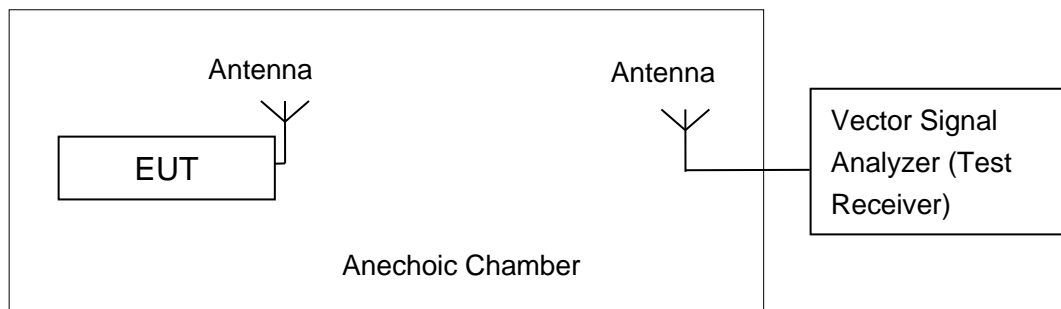

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1. Maximum Peak Output Power-conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	24.75	25.41	25.37
	9	23.94	/	/
	12	23.50	/	/
	18	23.42	/	/
	24	23.74	/	/
	36	23.80	/	/
	48	23.81	/	/
	54	23.40	/	/

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	24.12	24.67	24.63
	MCS1	23.72	/	/
	MCS2	23.60	/	/
	MCS3	23.88	/	/
	MCS4	23.76	/	/
	MCS5	23.92	/	/
	MCS6	22.20	/	/
	MCS7	21.21	/	/

The data MCS0 rate is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	23.04	24.45
	MCS1	22.68	/
	MCS2	22.60	/
	MCS3	22.83	/
	MCS4	22.85	/
	MCS5	22.97	/
	MCS6	22.04	/
	MCS7	20.96	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.2.2. Maximum Average Output Power-Conducted

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	16.26	16.27	16.94

802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	15.08	15.24	16.04

802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11n(40MHz)	13.90	14.18

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	5.41	P
	157	5.59	P
	165	6.23	P
802.11n HT20	149	4.46	P
	157	4.38	P
	165	5.01	P
802.11n HT40	151	0.97	P
	159	0.94	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
		Fig.	Value	
802.11a	149	Fig.1	16.35	P
	157	Fig.2	16.30	P
	165	Fig.3	16.25	P
802.11n HT20	149	Fig.4	17.05	P
	157	Fig.5	17.00	P
	165	Fig.6	16.90	P
802.11n HT40	151	Fig.7	36.08	P
	159	Fig.8	35.68	P

Conclusion: PASS

Test graphs as below:

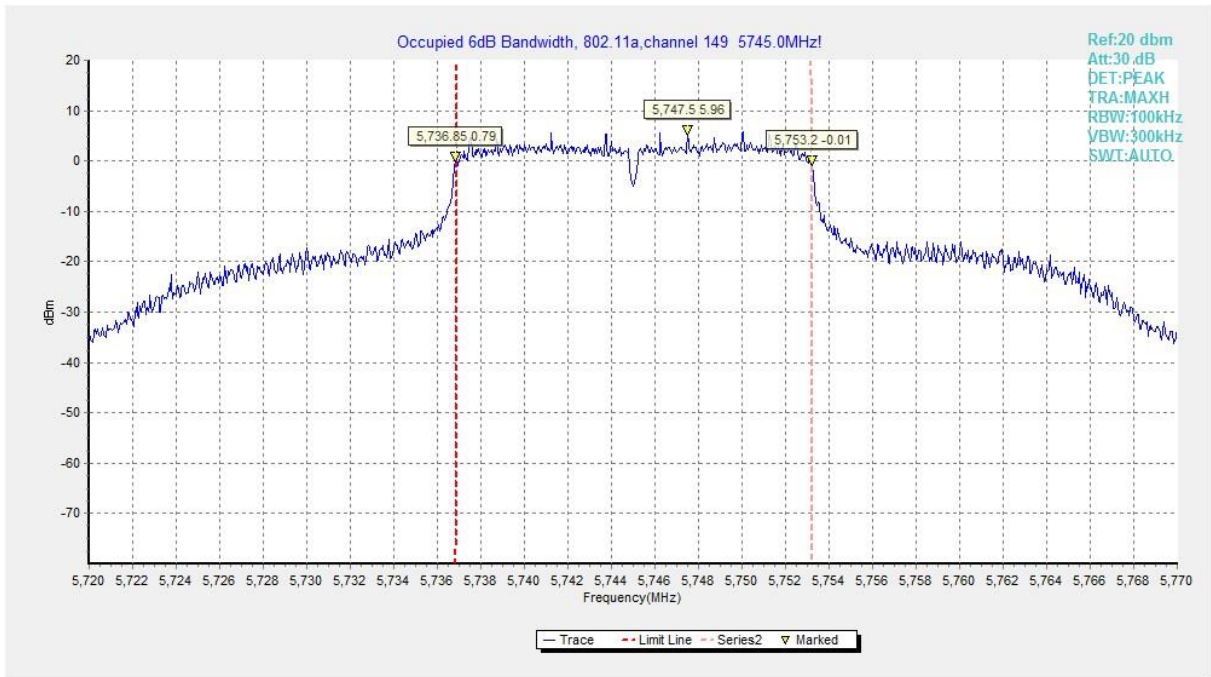


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

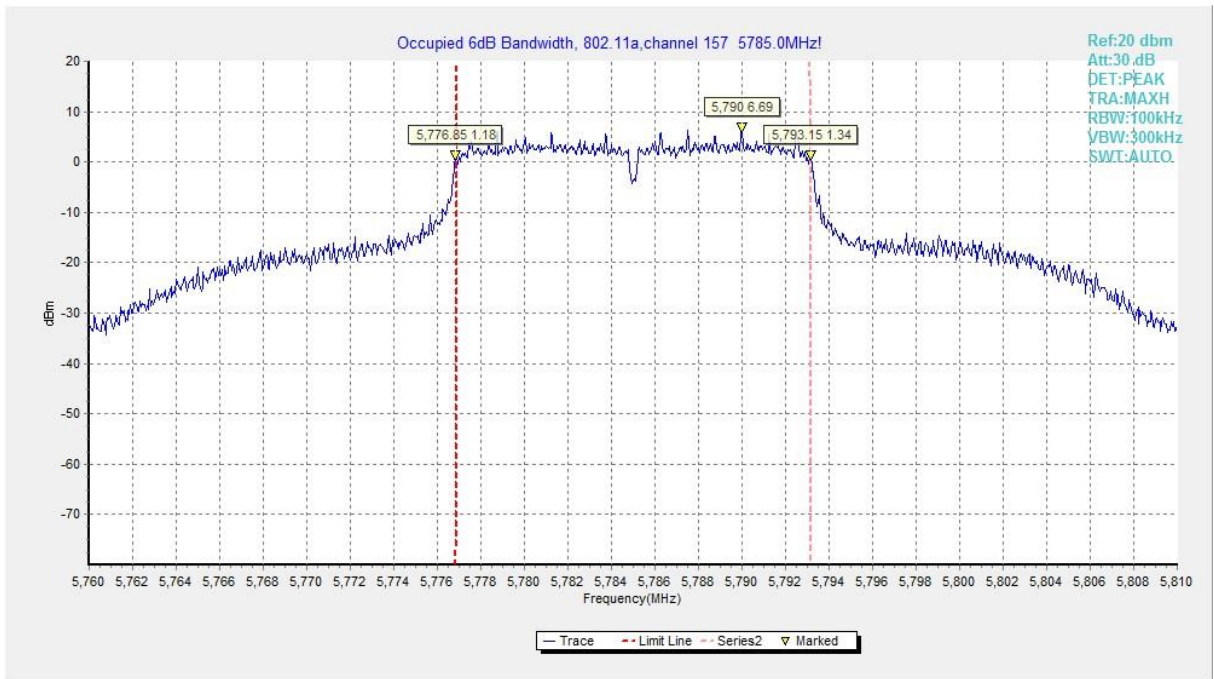


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

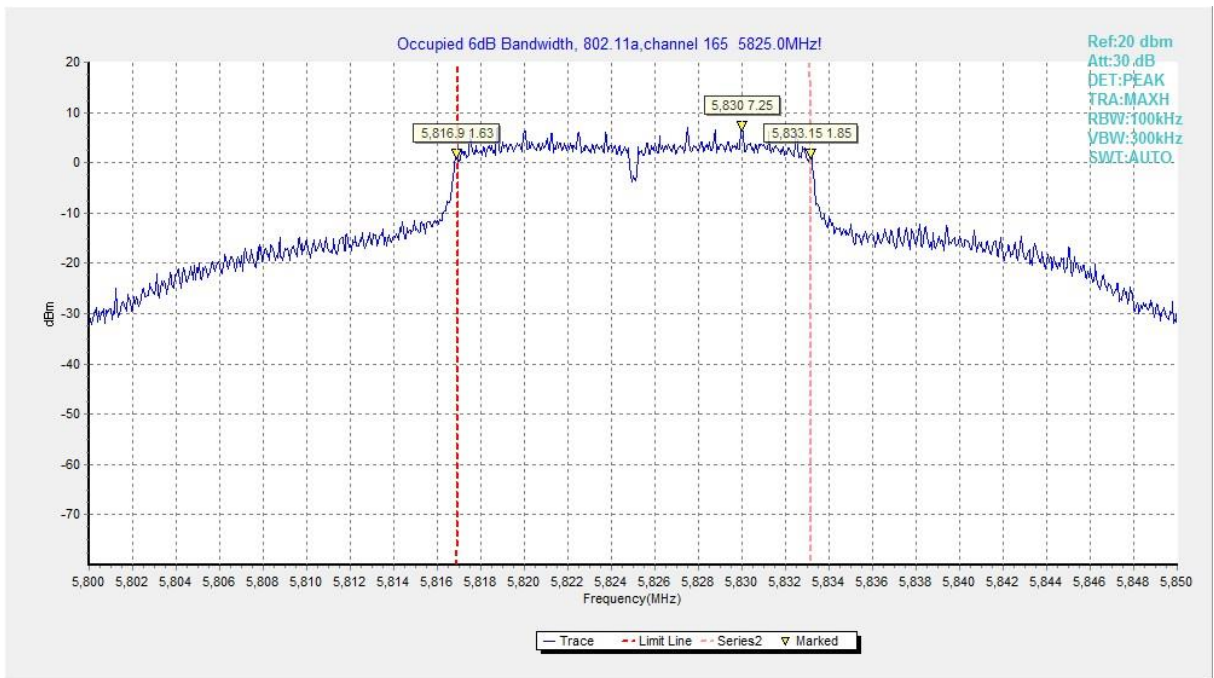


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

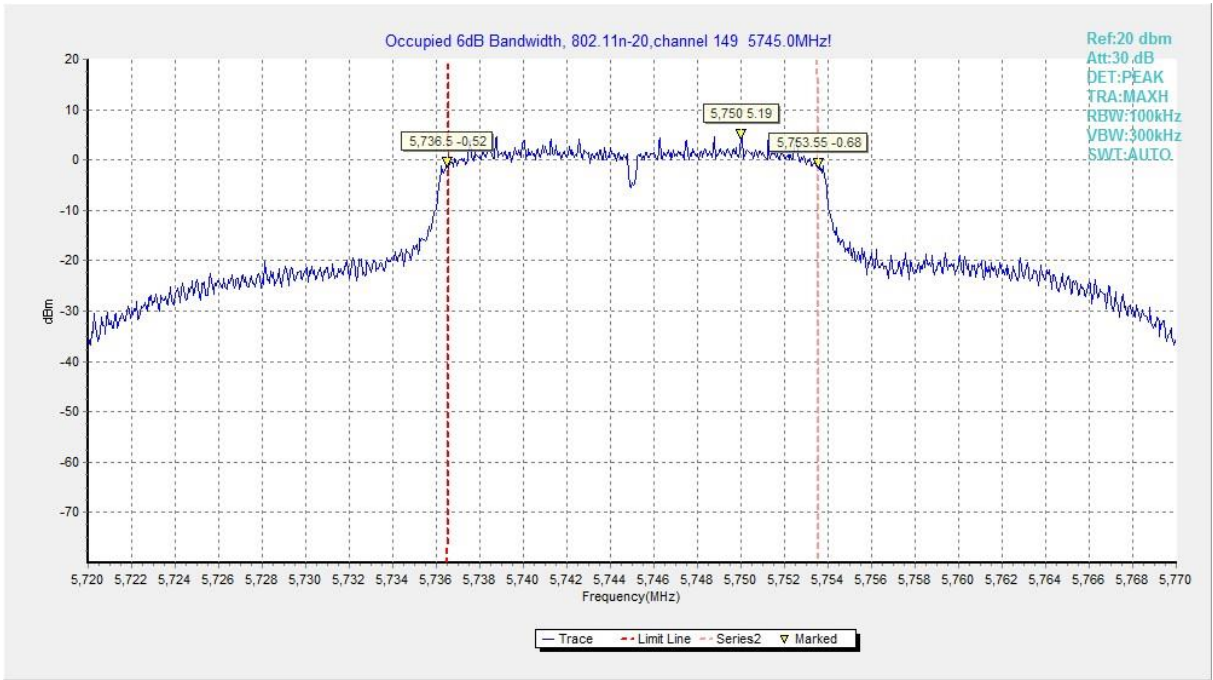


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

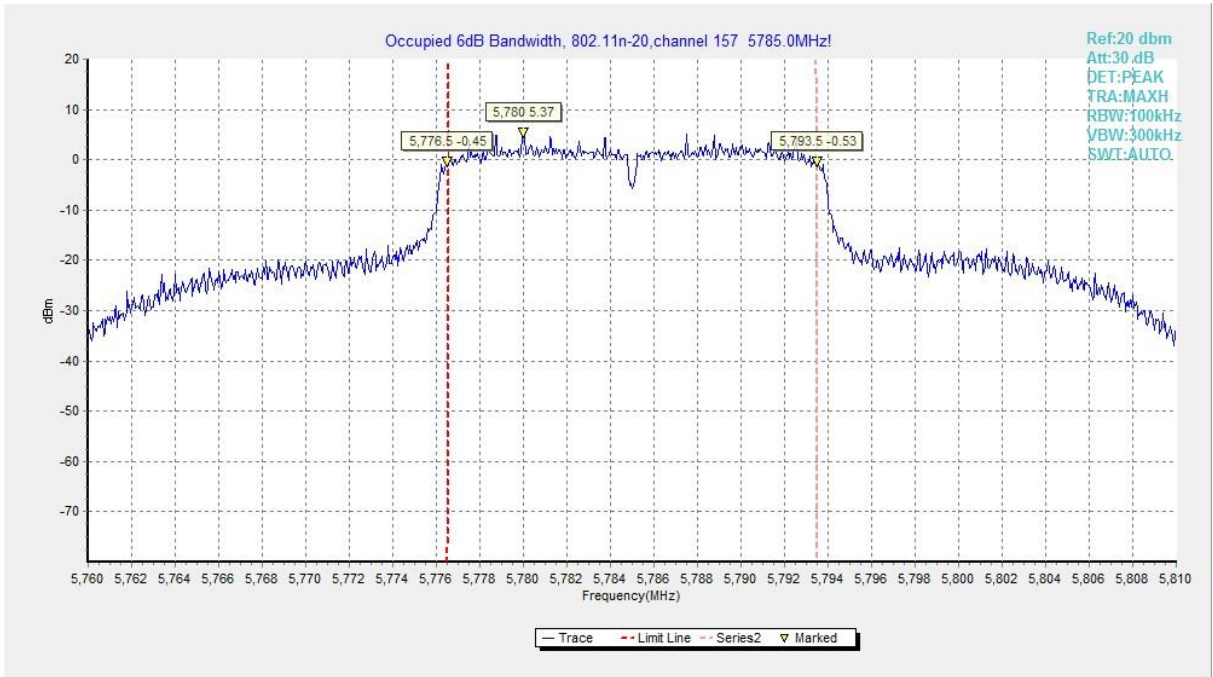


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

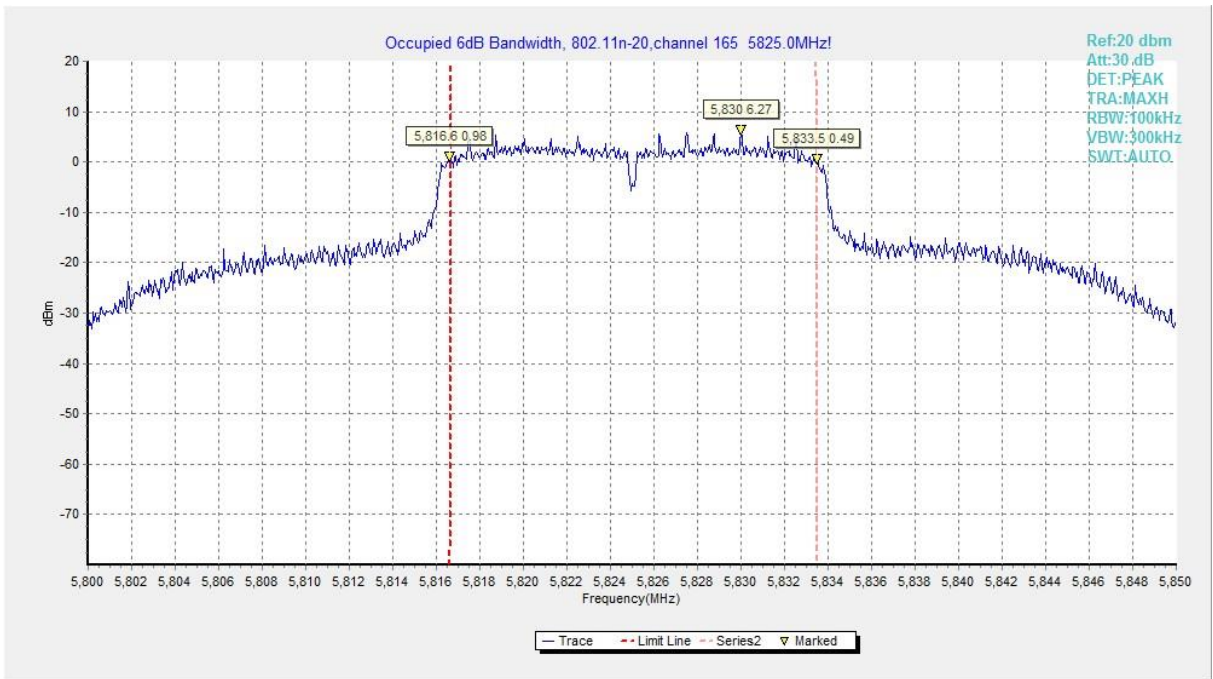


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

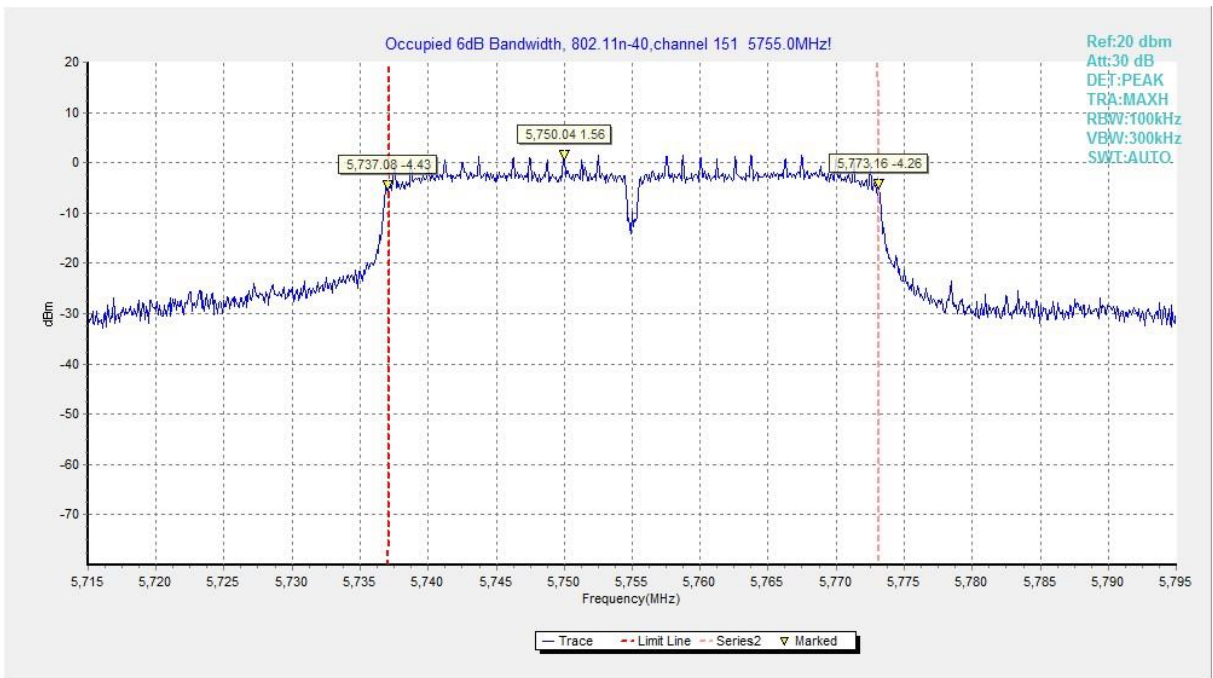


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

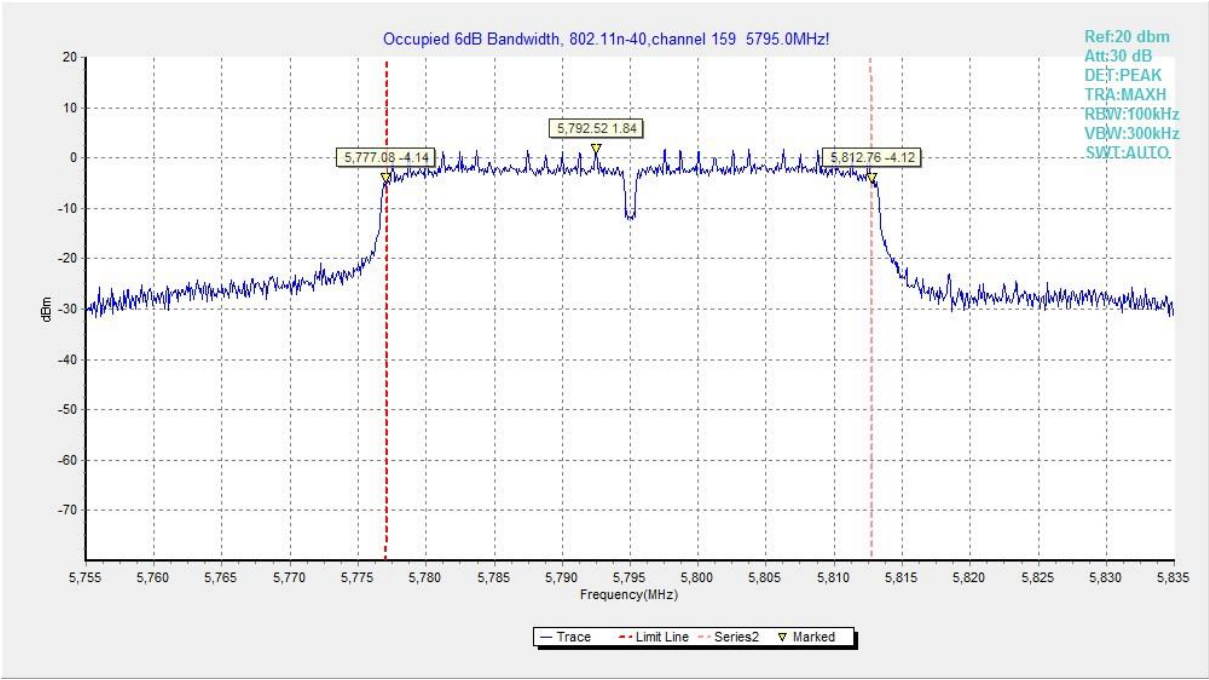


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

A.5. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤3.6GHz	0.82
3.6GHz ≤ f ≤8GHz	1.55
8GHz ≤ f ≤20GHz	1.86
20GHz ≤ f ≤22GHz	1.90
22GHz ≤ f ≤26GHz	2.20

A.5.1 Transmitter Spurious Emission - Conducted

Measurement Results:

802.11a mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 12 GHz	Fig.10	P
		12 GHz ~ 25 GHz	Fig.11	P
		25 GHz ~ 40 GHz	Fig.12	P
	157	30 MHz ~ 1 GHz	Fig.13	P
		1 GHz ~ 12 GHz	Fig.14	P
		12 GHz ~ 25 GHz	Fig.15	P
		25 GHz ~ 40 GHz	Fig.16	P
	165	30 MHz ~ 1 GHz	Fig.17	P
		1 GHz ~ 12 GHz	Fig.18	P
		12 GHz ~ 25 GHz	Fig.19	P
		25 GHz ~ 40 GHz	Fig.20	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.21	P
		1 GHz ~ 12 GHz	Fig.22	P
		12 GHz ~ 25 GHz	Fig.23	P
		25 GHz ~ 40 GHz	Fig.24	P
	157	30 MHz ~ 1 GHz	Fig.25	P
		1 GHz ~ 12 GHz	Fig.26	P
		12 GHz ~ 25 GHz	Fig.27	P
		25 GHz ~ 40 GHz	Fig.28	P
	165	30 MHz ~ 1 GHz	Fig.29	P
		1 GHz ~ 12 GHz	Fig.30	P
		12 GHz ~ 25 GHz	Fig.31	P
		25 GHz ~ 40 GHz	Fig.32	P

802.11n-HT40 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.33	P
		1 GHz ~ 12 GHz	Fig.34	P
		12 GHz ~ 25 GHz	Fig.35	P
		25 GHz ~ 40 GHz	Fig.36	P
	159	30 MHz ~ 1 GHz	Fig.37	P
		1 GHz ~ 12 GHz	Fig.38	P
		12 GHz ~ 25 GHz	Fig.39	P
		25 GHz ~ 40 GHz	Fig.40	P

Conclusion: PASS

Test graphs as below:

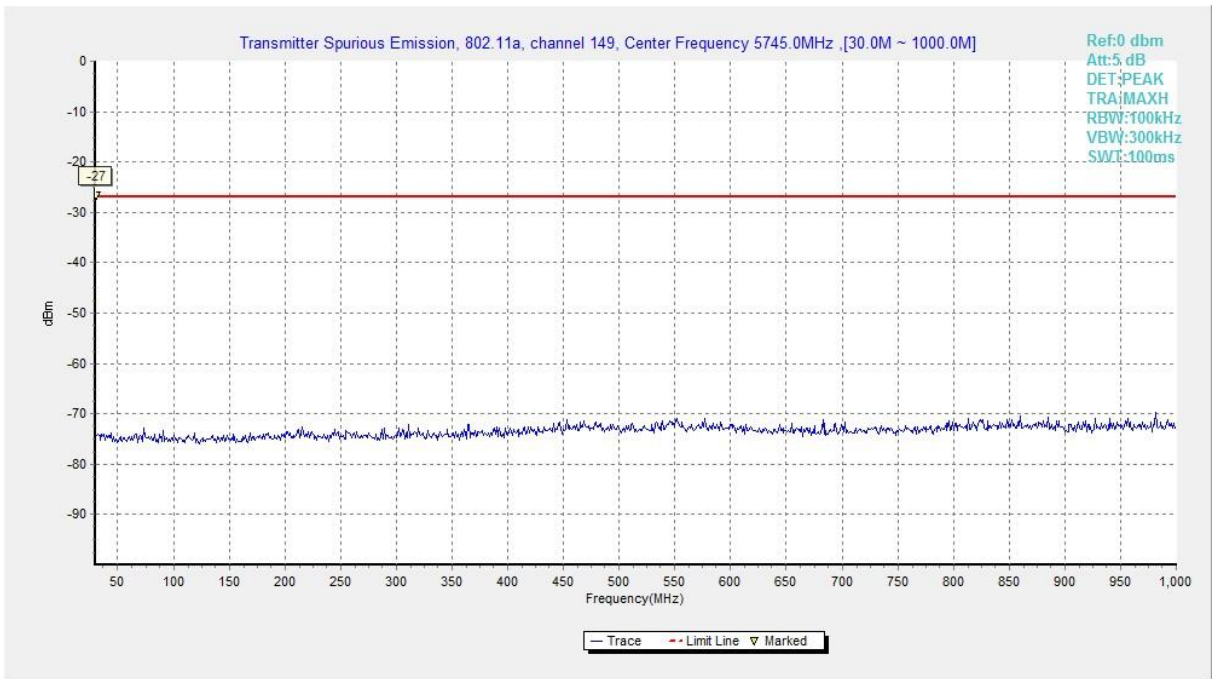


Fig. 9 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

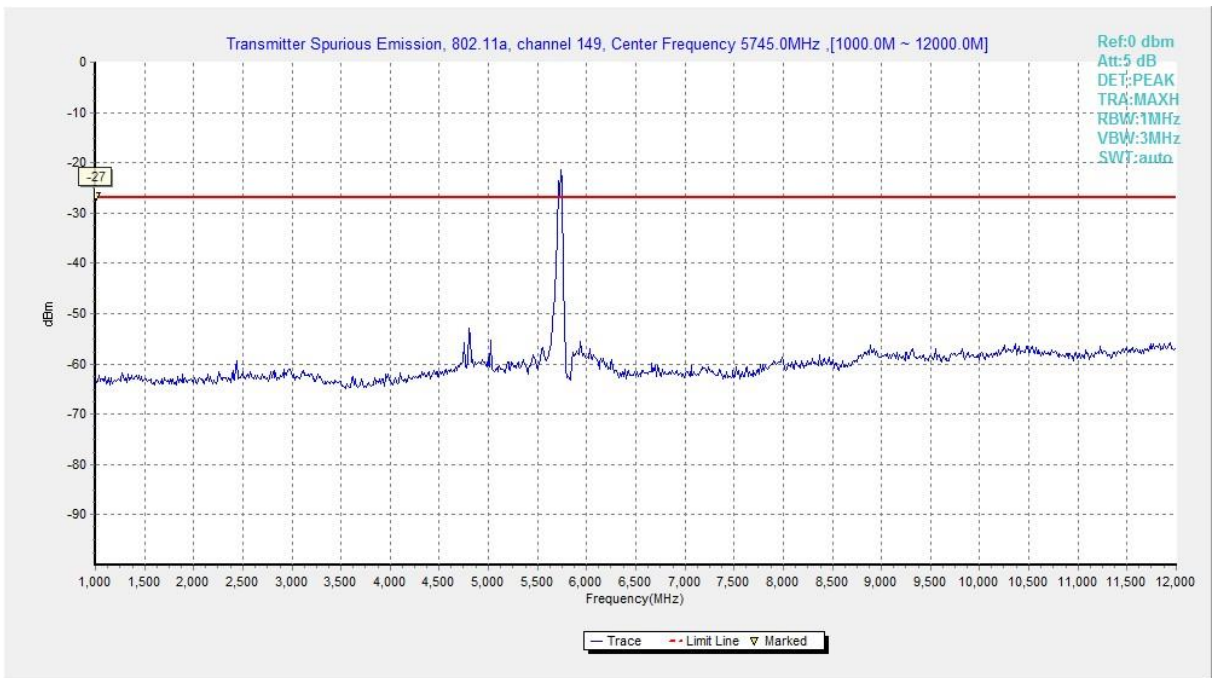


Fig. 10 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -12 GHz)

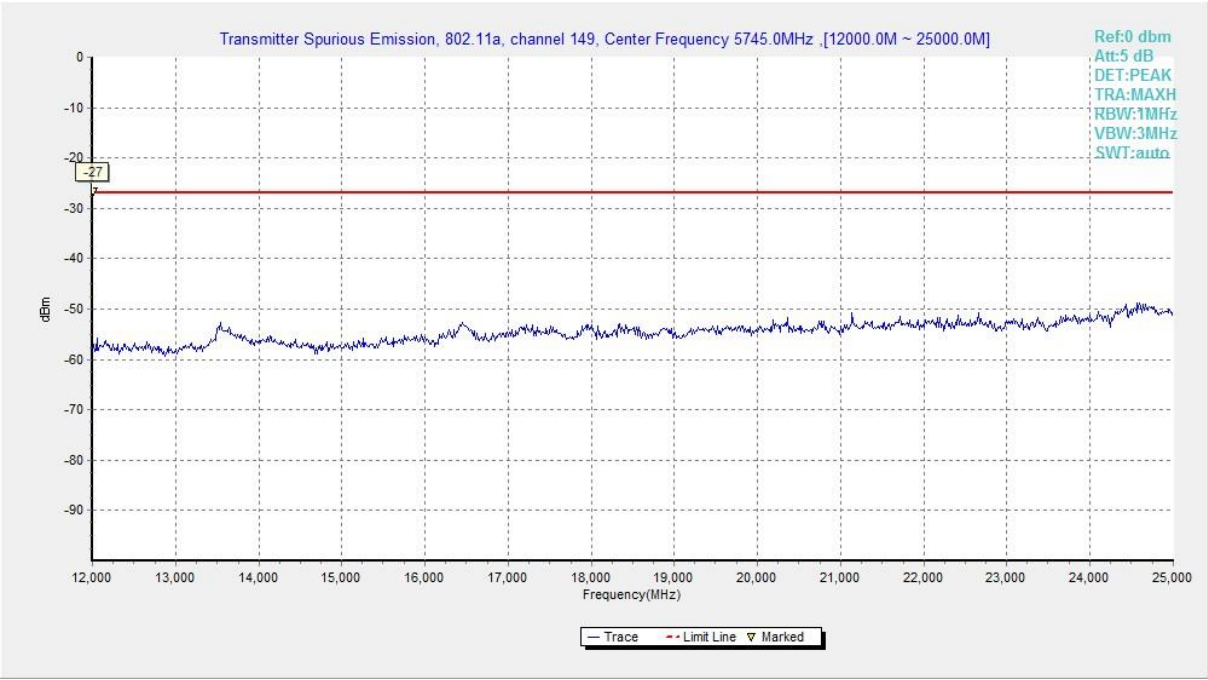


Fig. 11 Conducted Spurious Emission (802.11a, Ch149, 12 GHz-25 GHz)

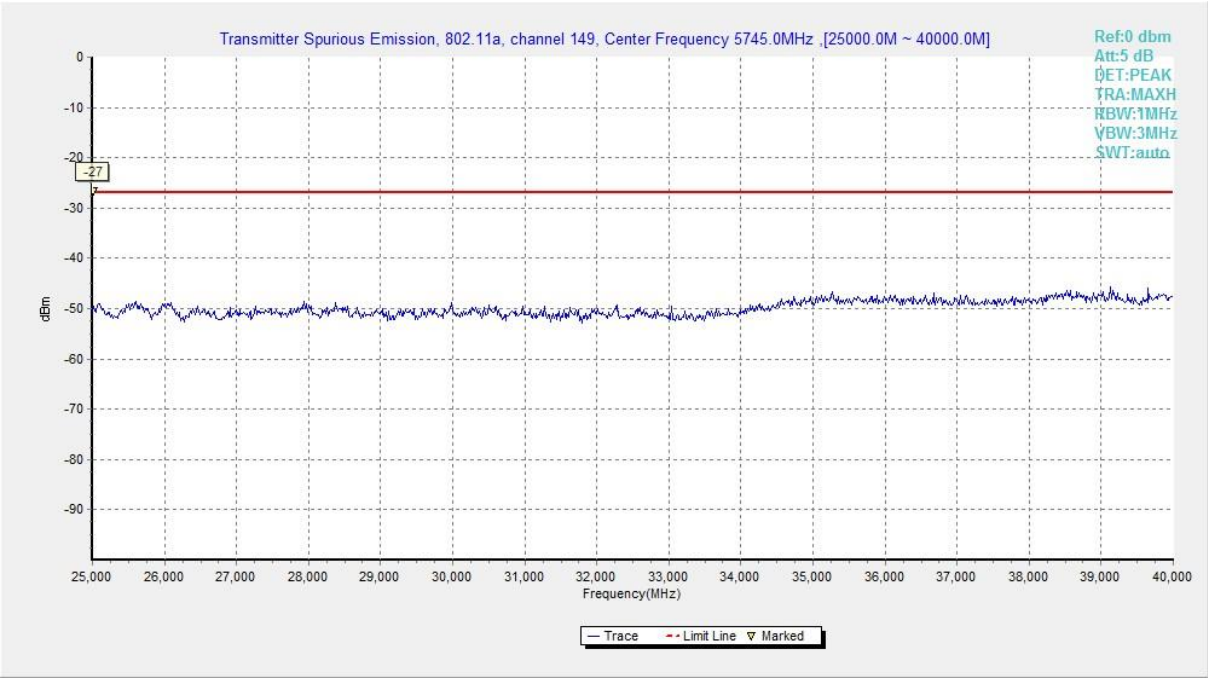


Fig. 12 Conducted Spurious Emission (802.11a, Ch149, 25 GHz-40 GHz)

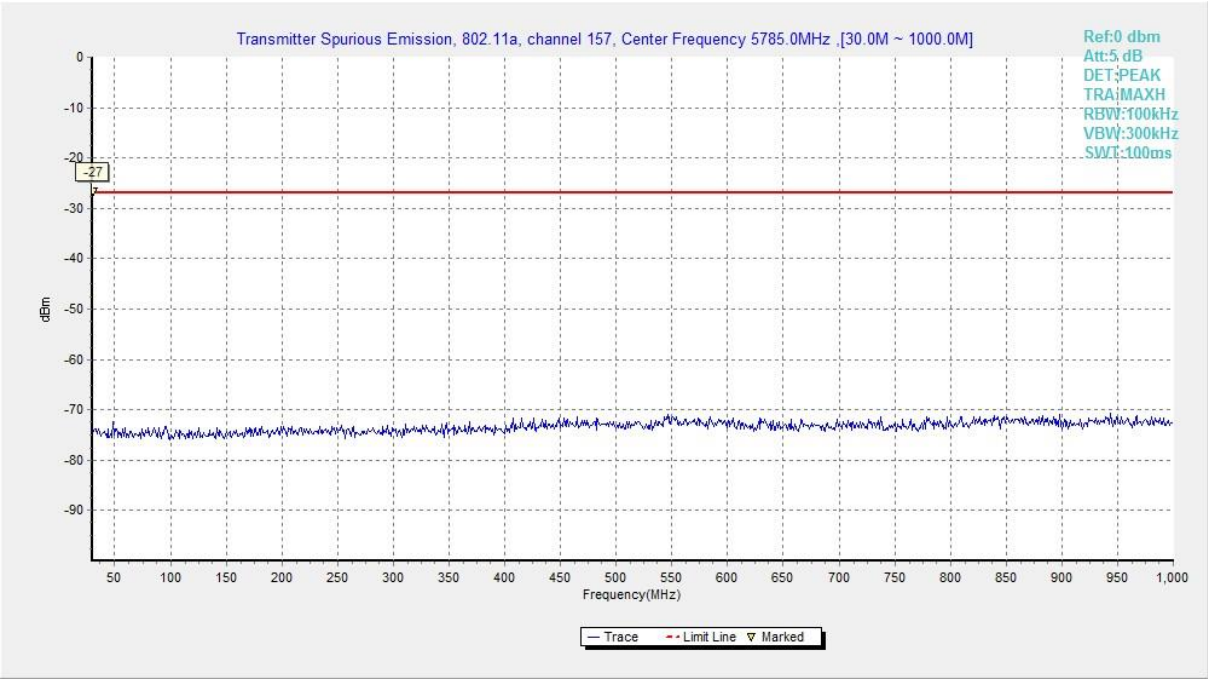


Fig. 13 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

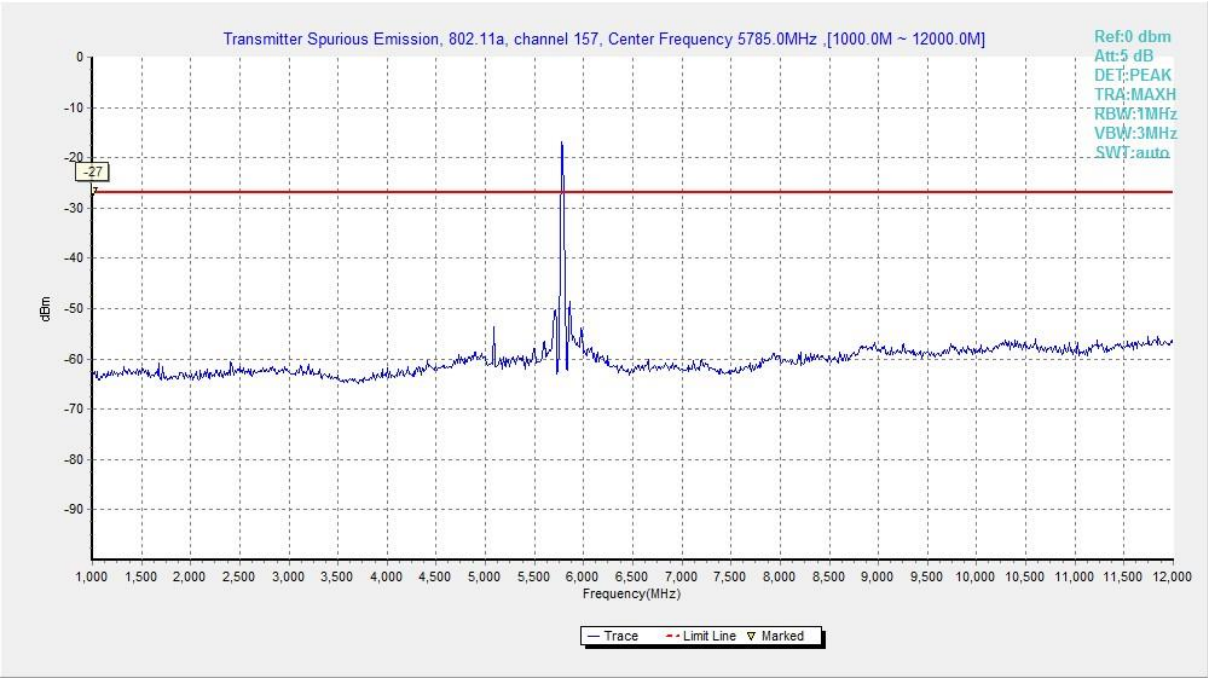


Fig. 14 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -12 GHz)

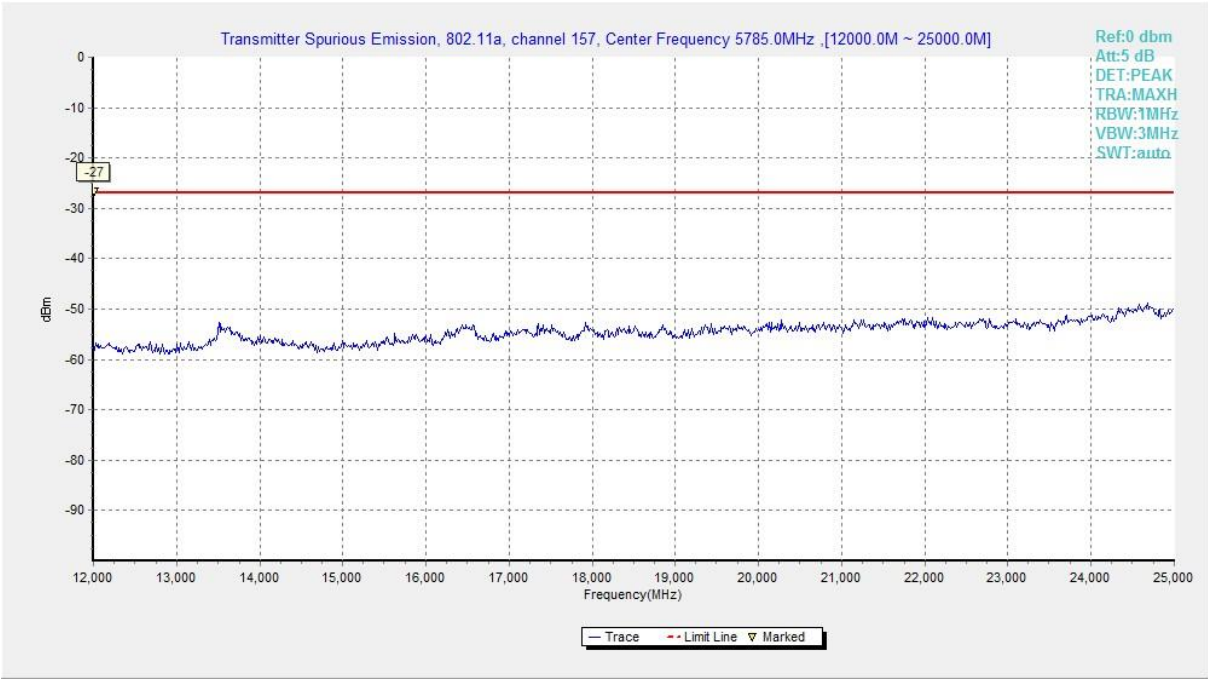


Fig. 15 Conducted Spurious Emission (802.11a, Ch157, 12 GHz-25 GHz)

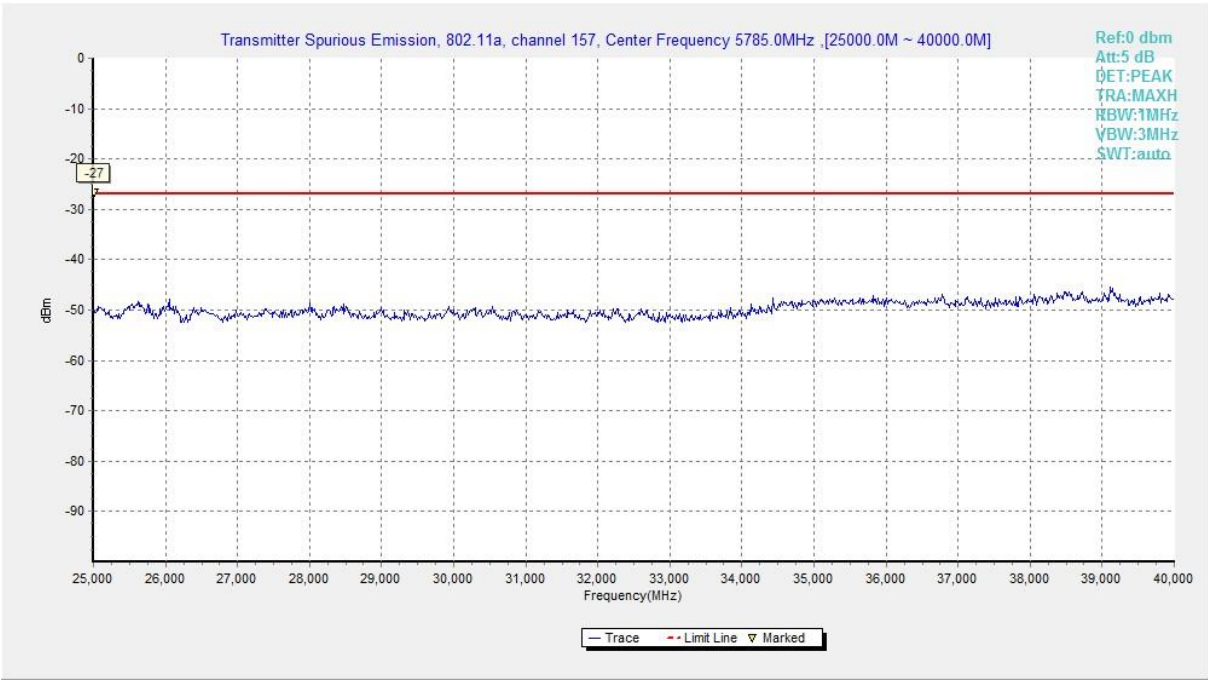


Fig. 16 Conducted Spurious Emission (802.11a, Ch157, 25 GHz-40 GHz)

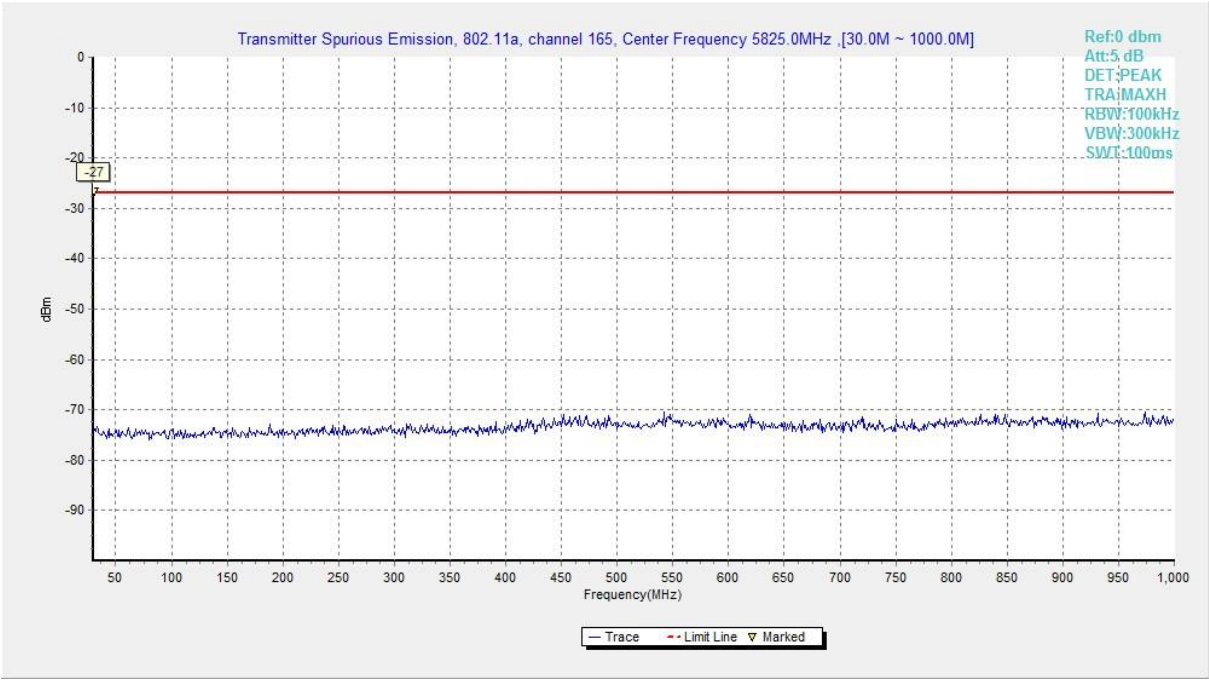


Fig. 17 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)

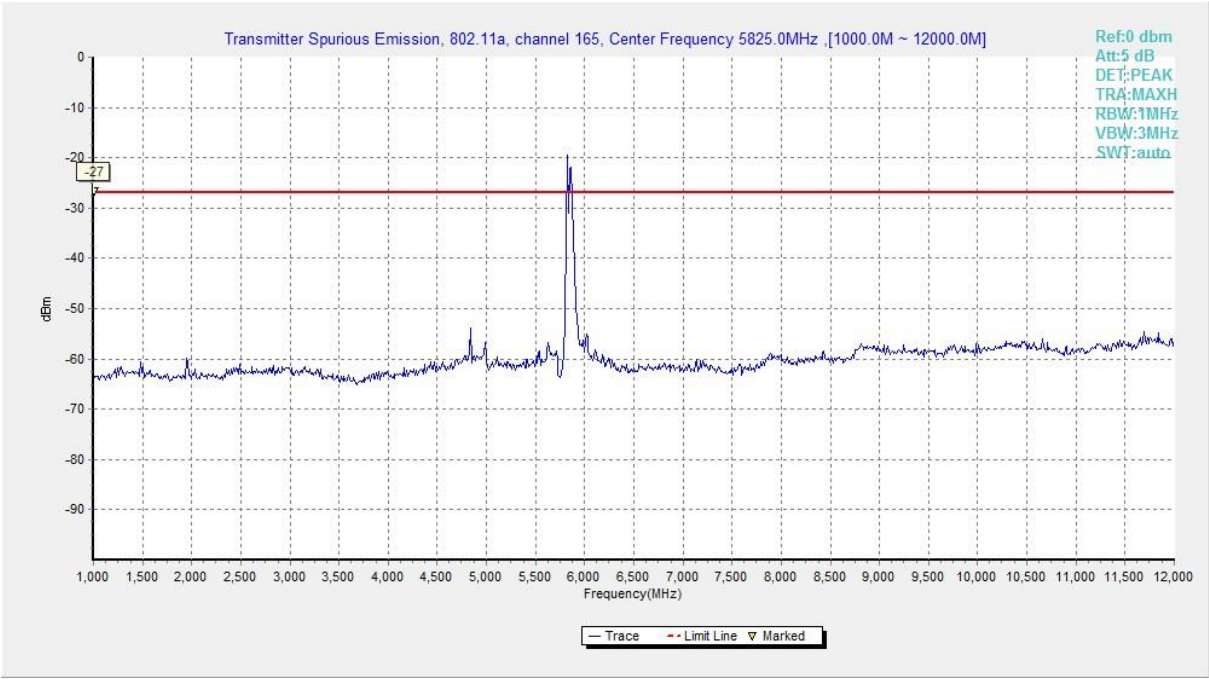


Fig. 18 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -12 GHz)

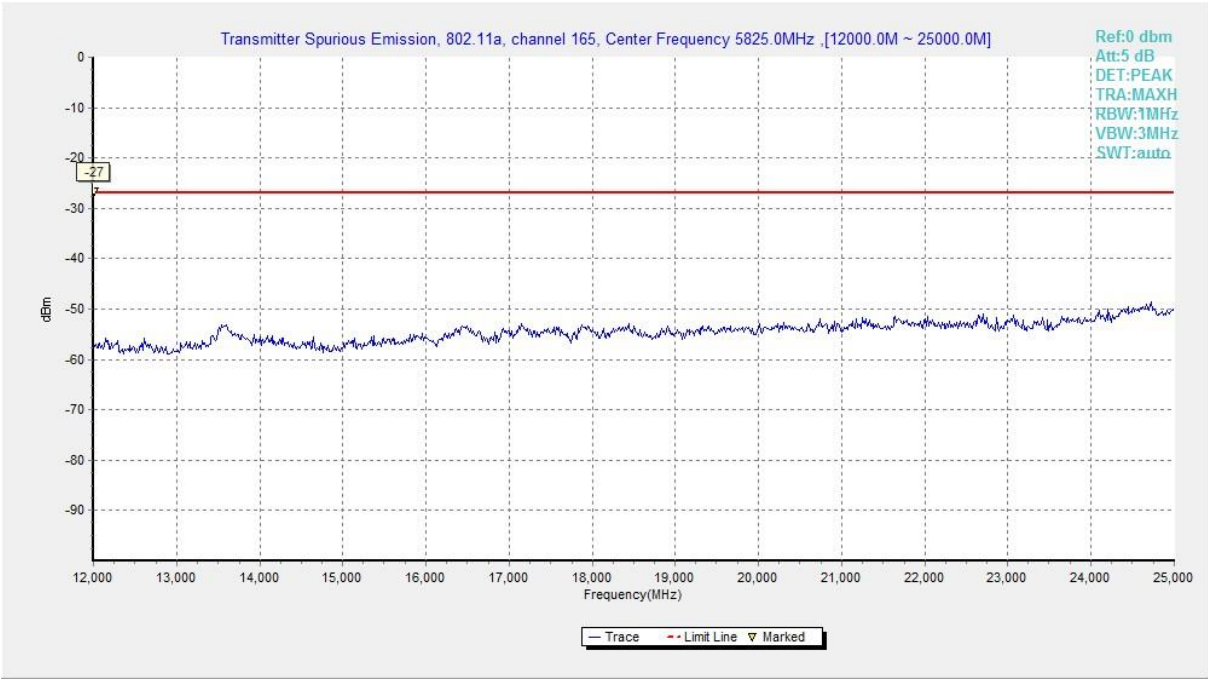


Fig. 19 Conducted Spurious Emission (802.11a, Ch165, 12 GHz-25 GHz)

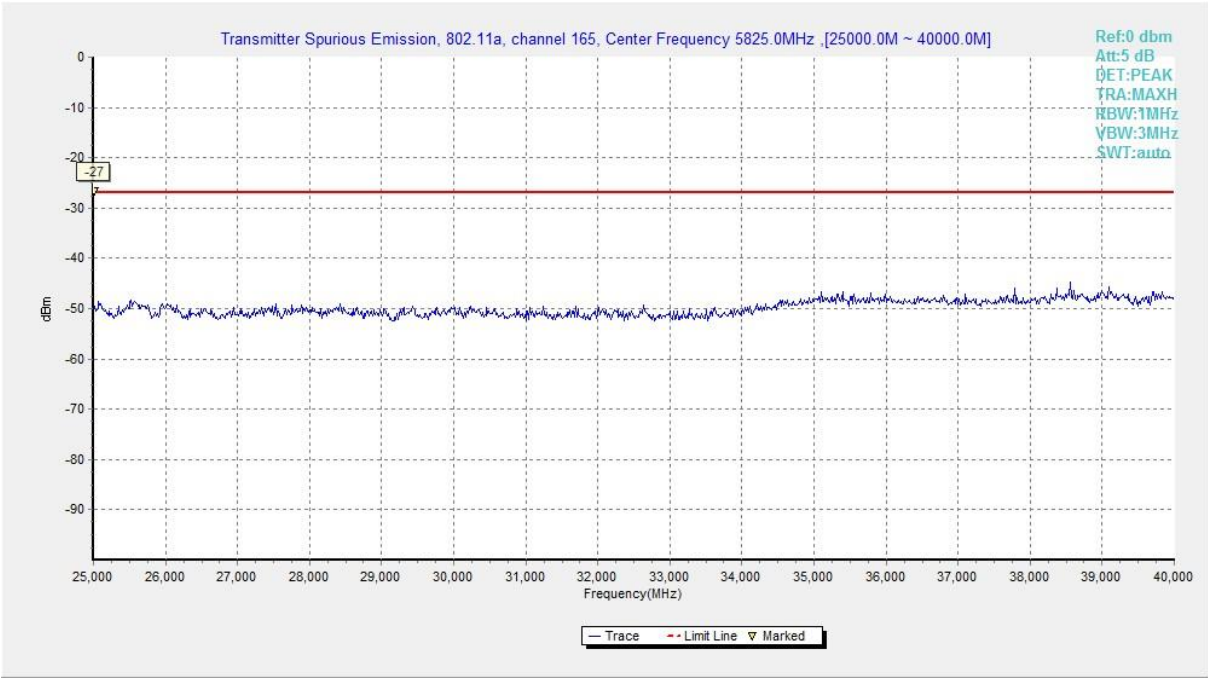


Fig. 20 Conducted Spurious Emission (802.11a, Ch165, 25 GHz-40 GHz)

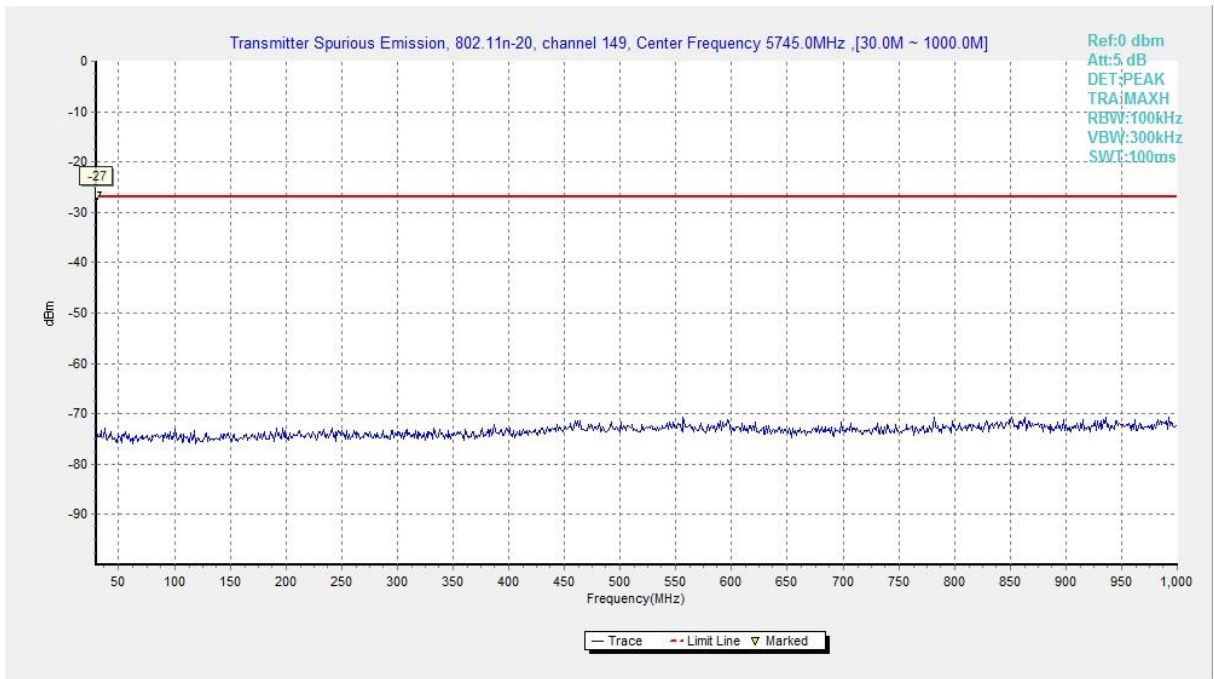


Fig. 21 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

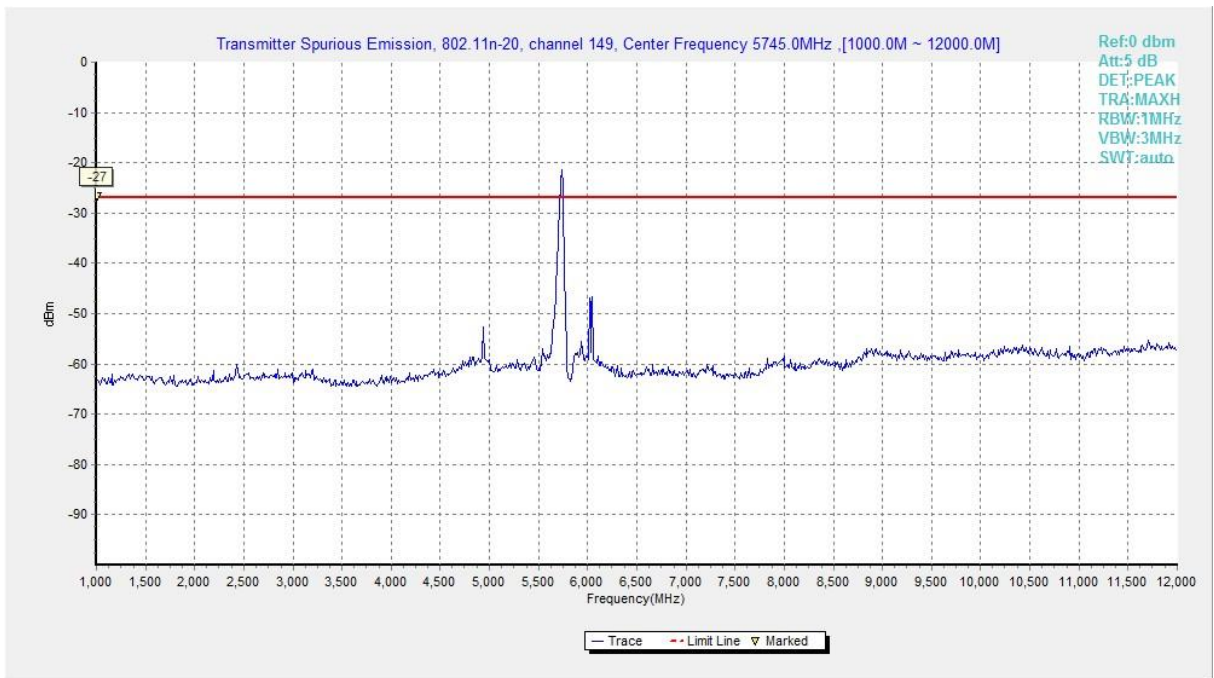


Fig. 22 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -12 GHz)

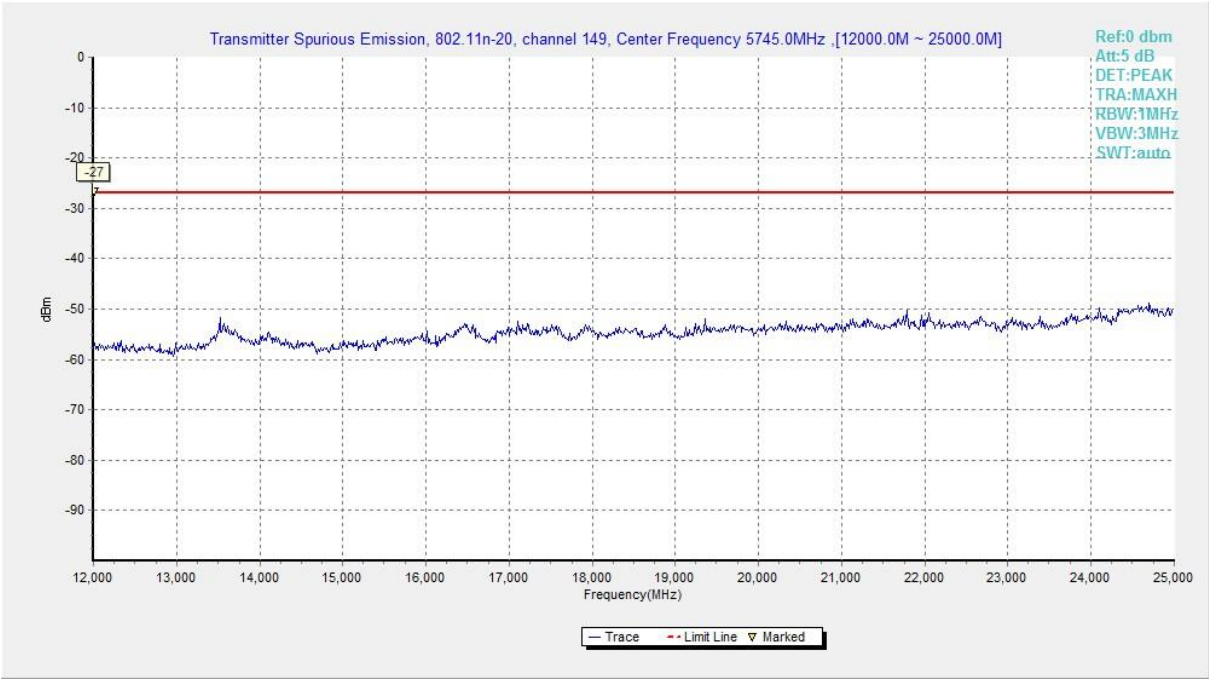


Fig. 23 Conducted Spurious Emission (802.11n-HT20, Ch149, 12 GHz-25 GHz)

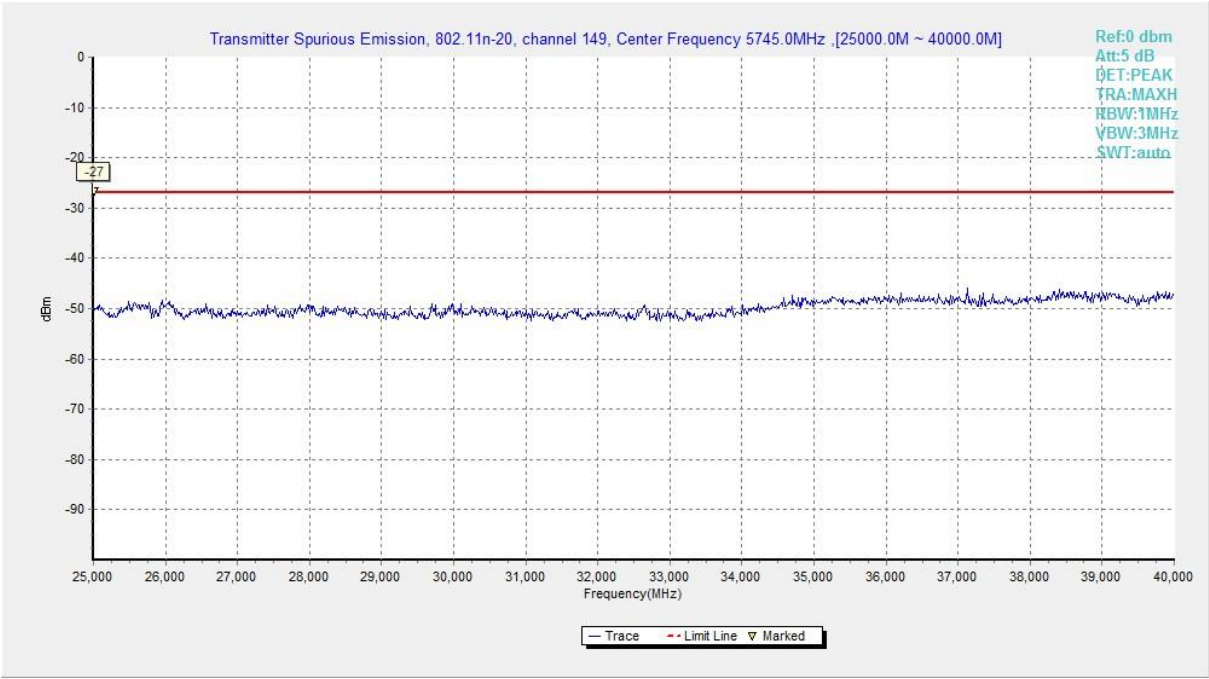


Fig. 24 Conducted Spurious Emission (802.11n-HT20, Ch149, 25 GHz-40 GHz)

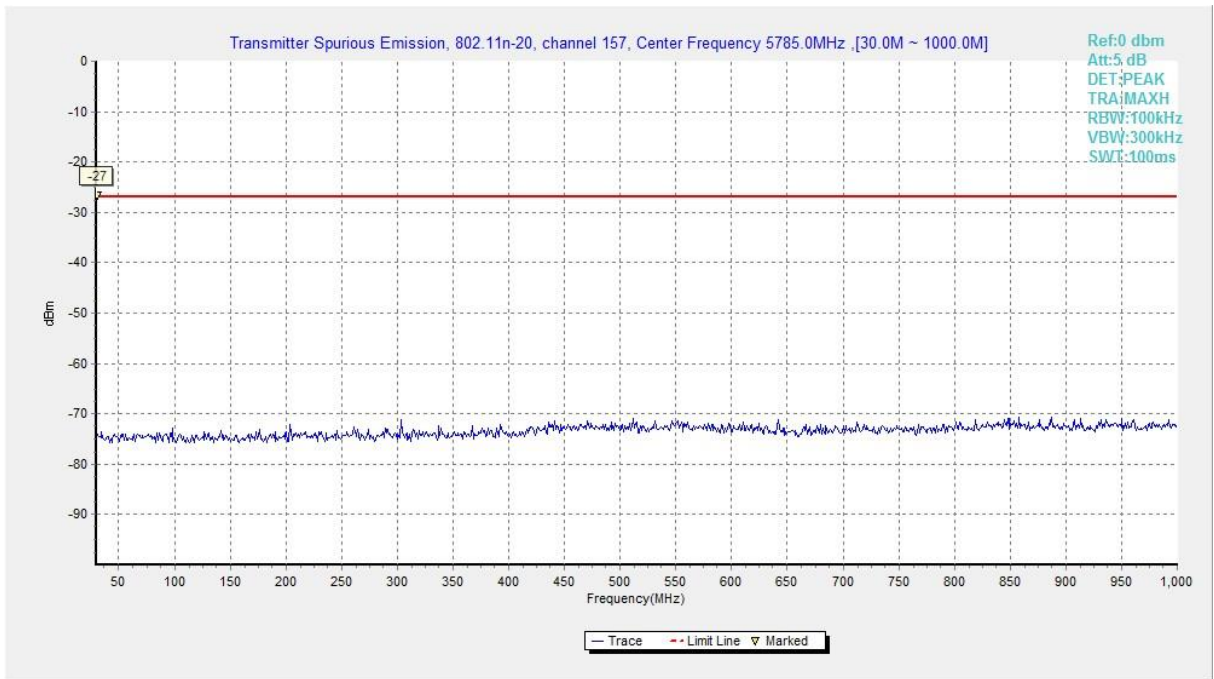


Fig. 25 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

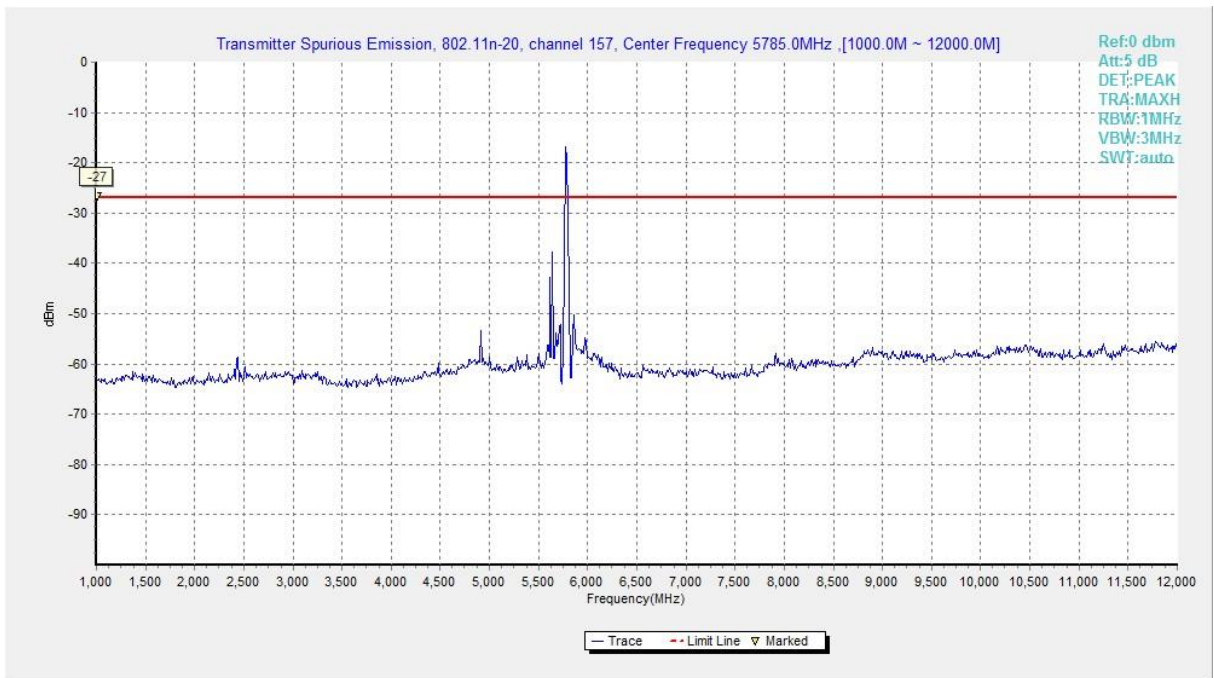


Fig. 26 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -12 GHz)

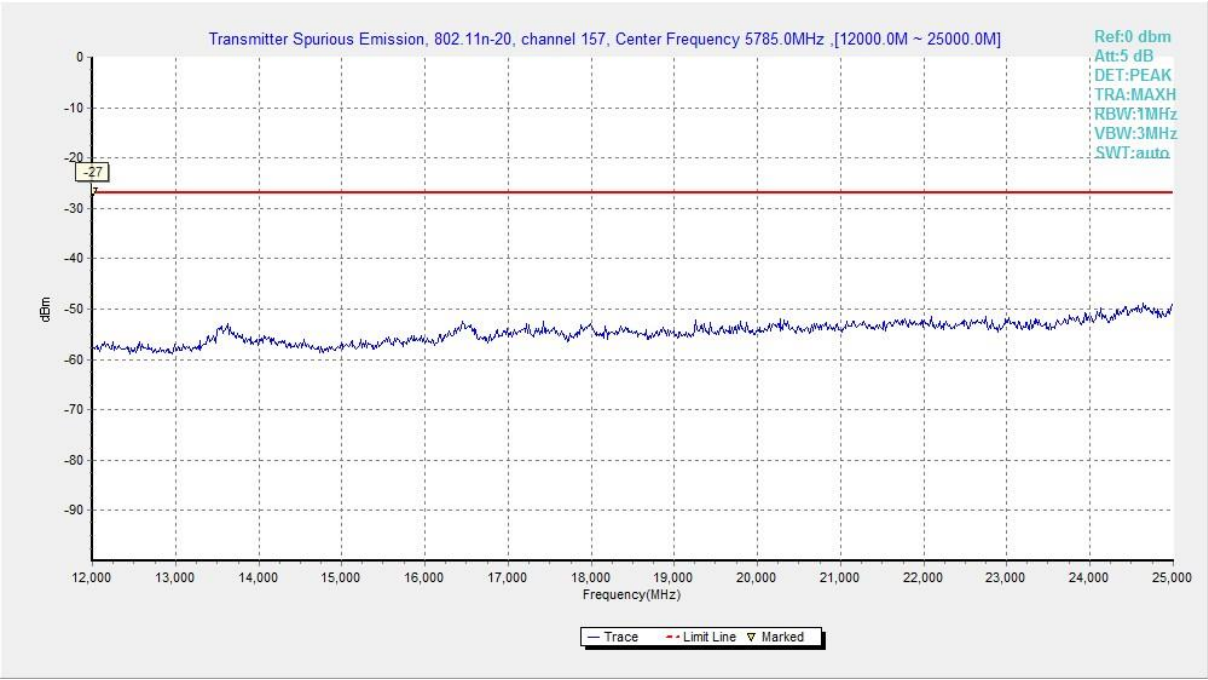


Fig. 27 Conducted Spurious Emission (802.11n-HT20, Ch157, 12 GHz-25 GHz)

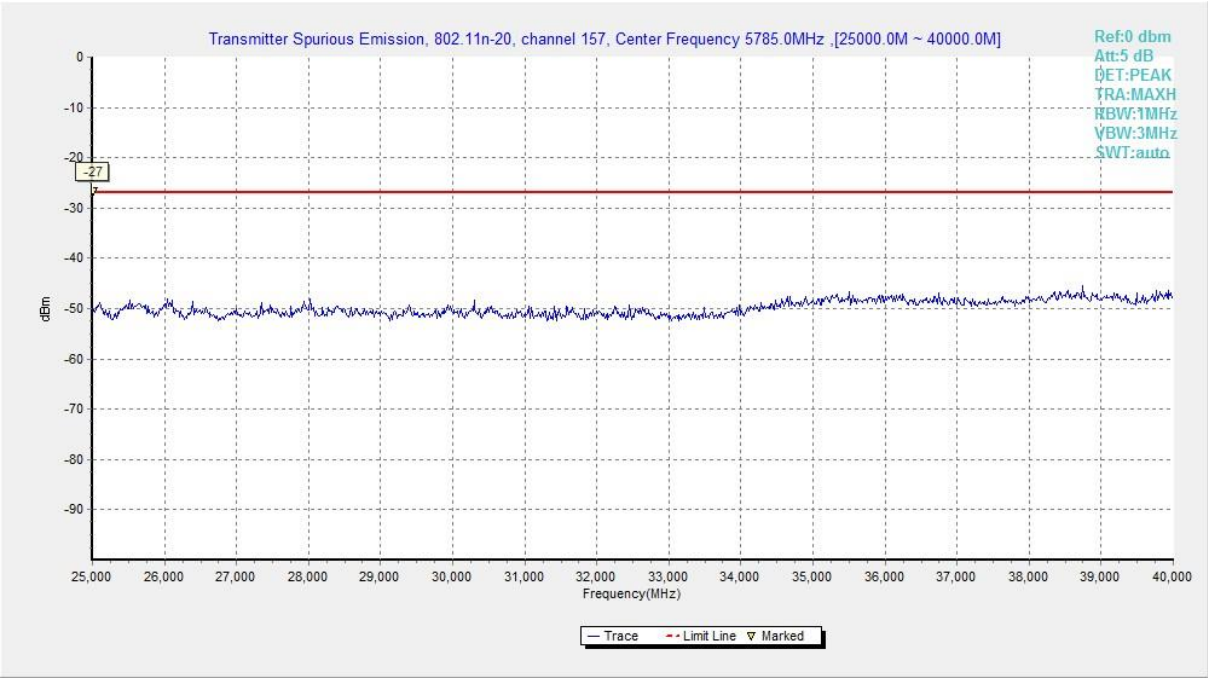


Fig. 28 Conducted Spurious Emission (802.11n-HT20, Ch157, 25 GHz-40 GHz)

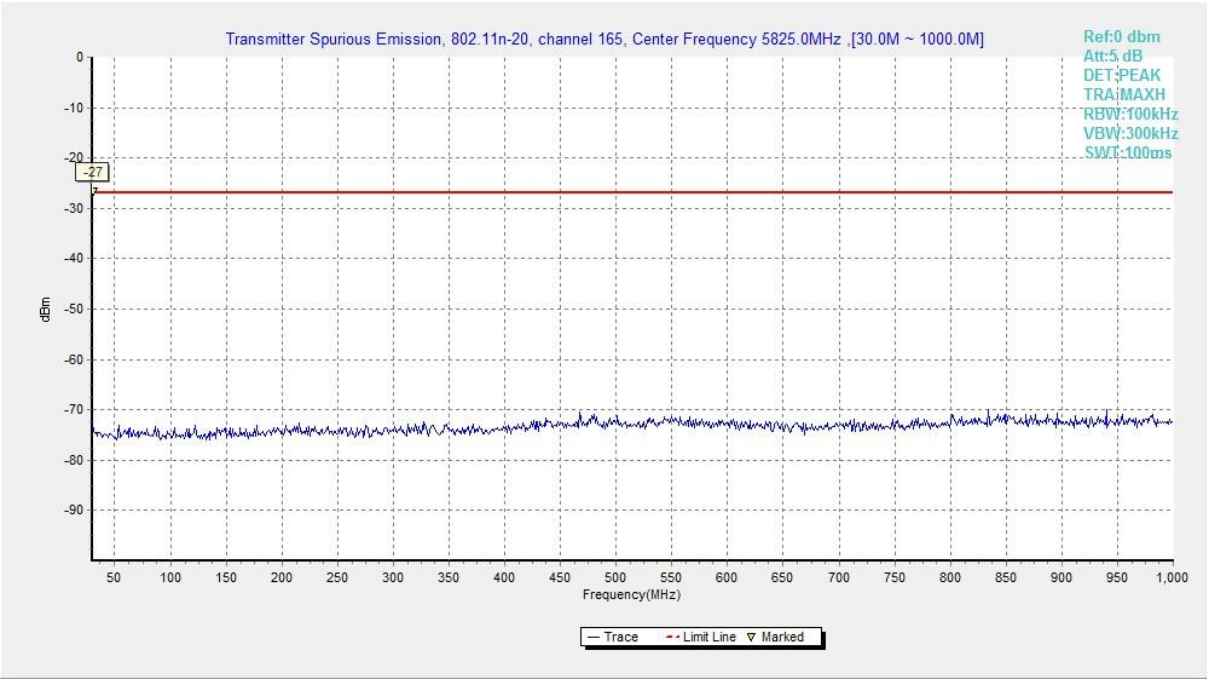


Fig. 29 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)

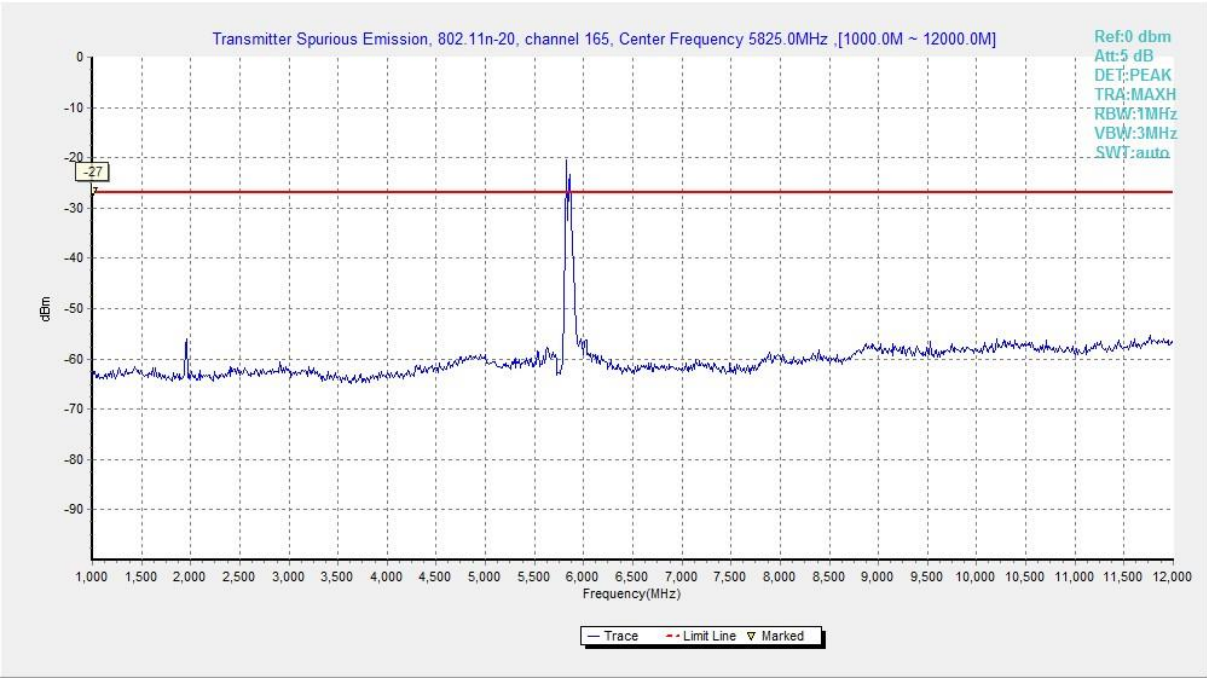


Fig. 30 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -12 GHz)

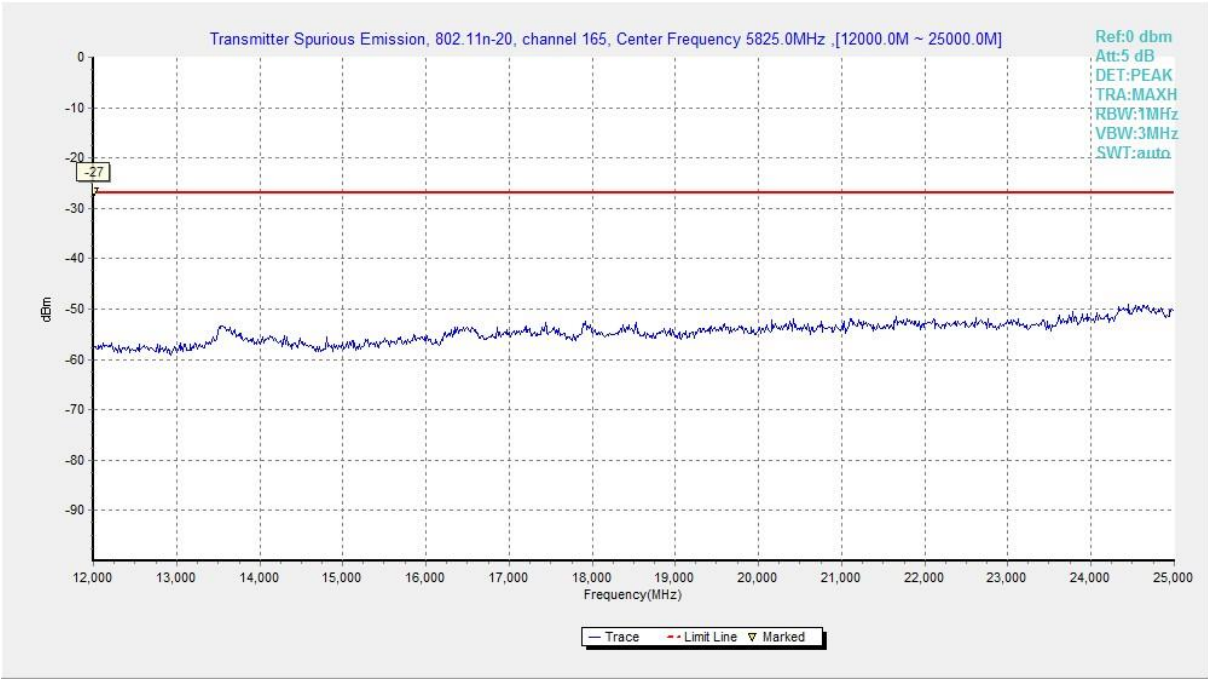


Fig. 31 Conducted Spurious Emission (802.11n-HT20, Ch165, 12 GHz-25 GHz)

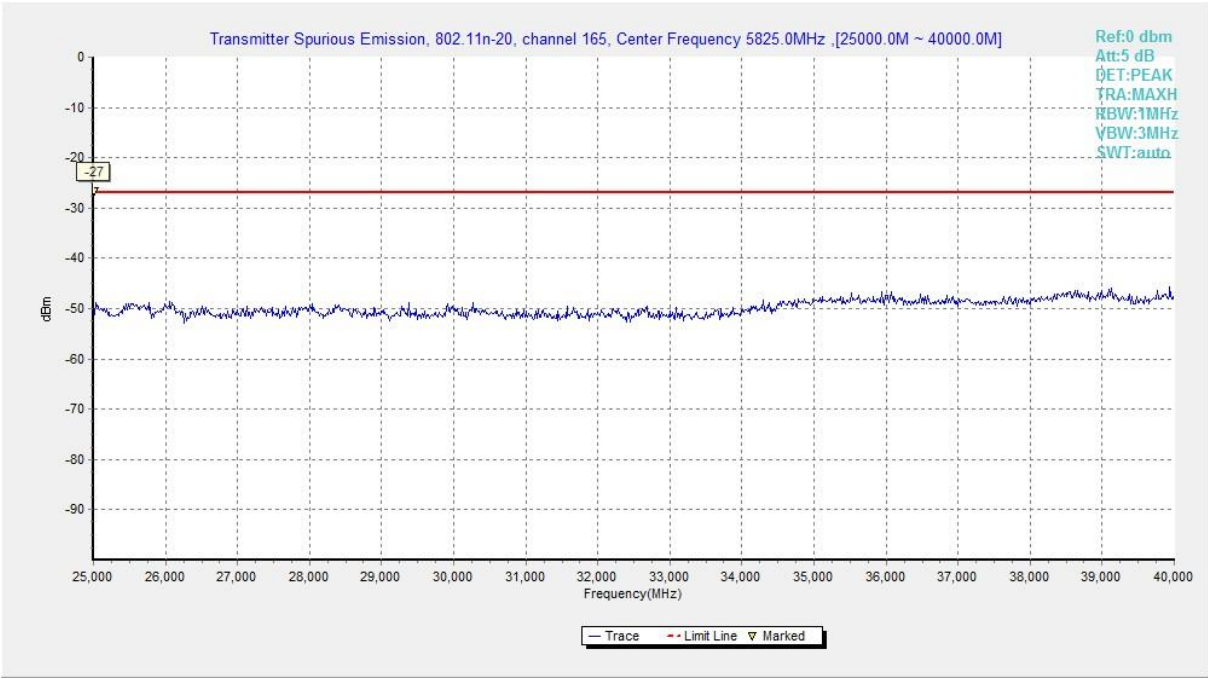


Fig. 32 Conducted Spurious Emission (802.11n-HT20, Ch165, 25 GHz-40 GHz)

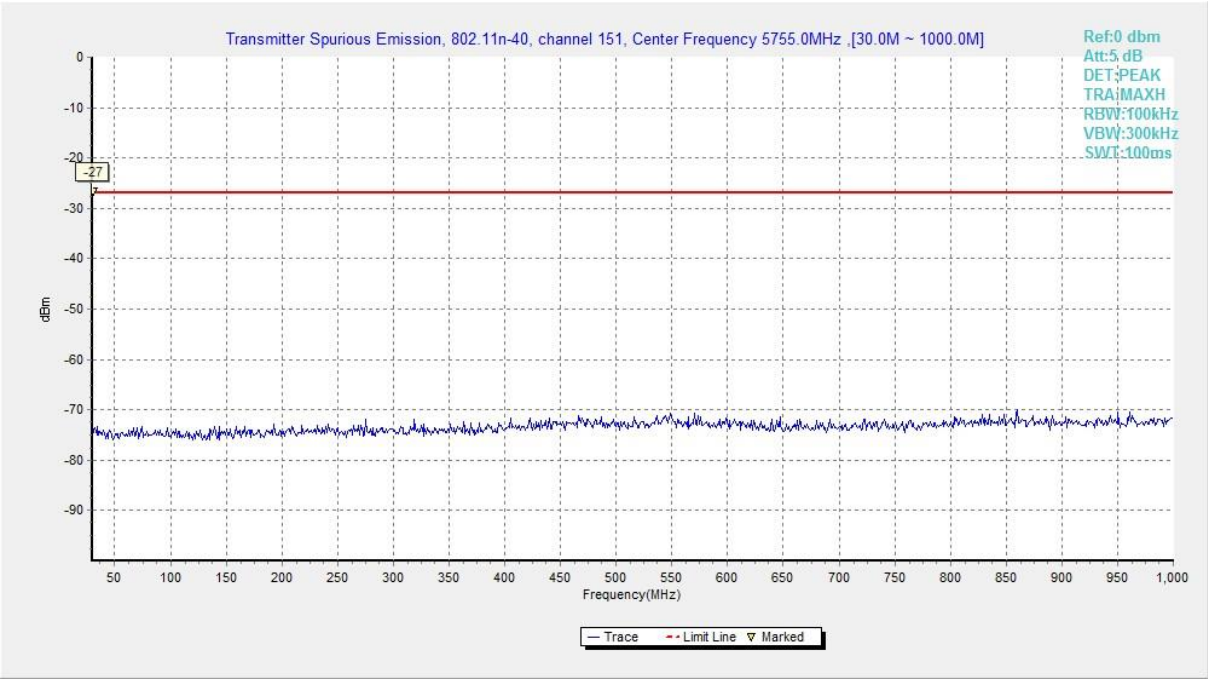


Fig. 33 Conducted Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)

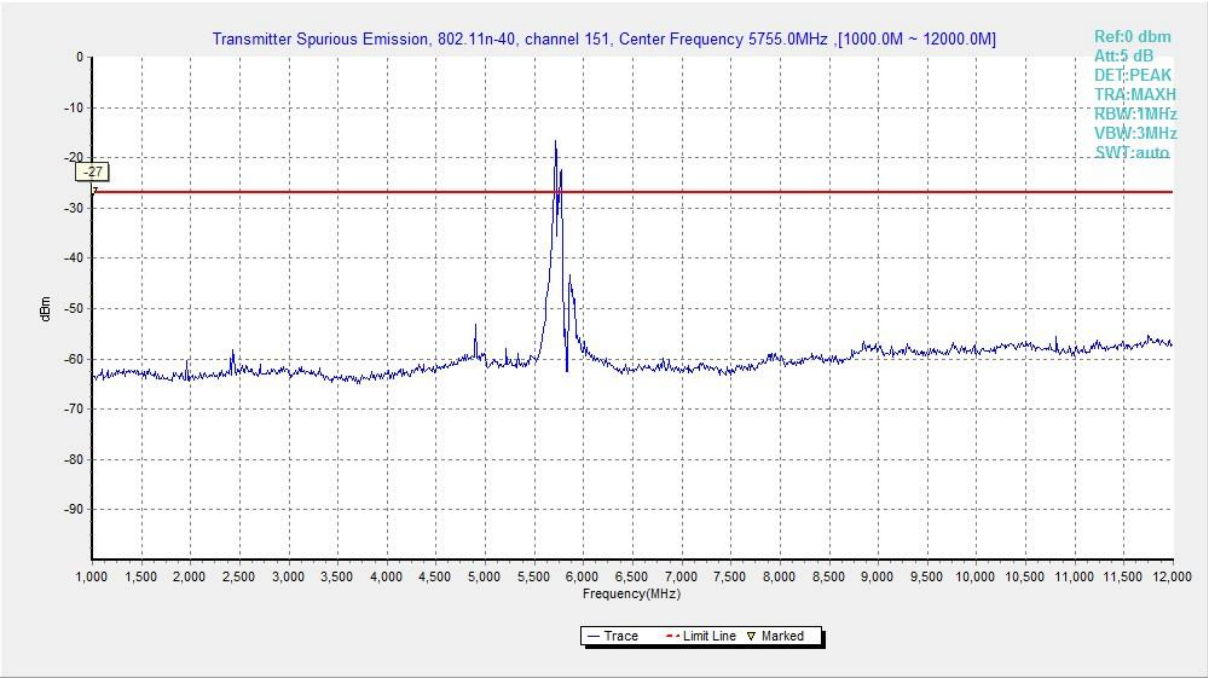


Fig. 34 Conducted Spurious Emission (802.11n-HT40, Ch151, 1 GHz -12 GHz)

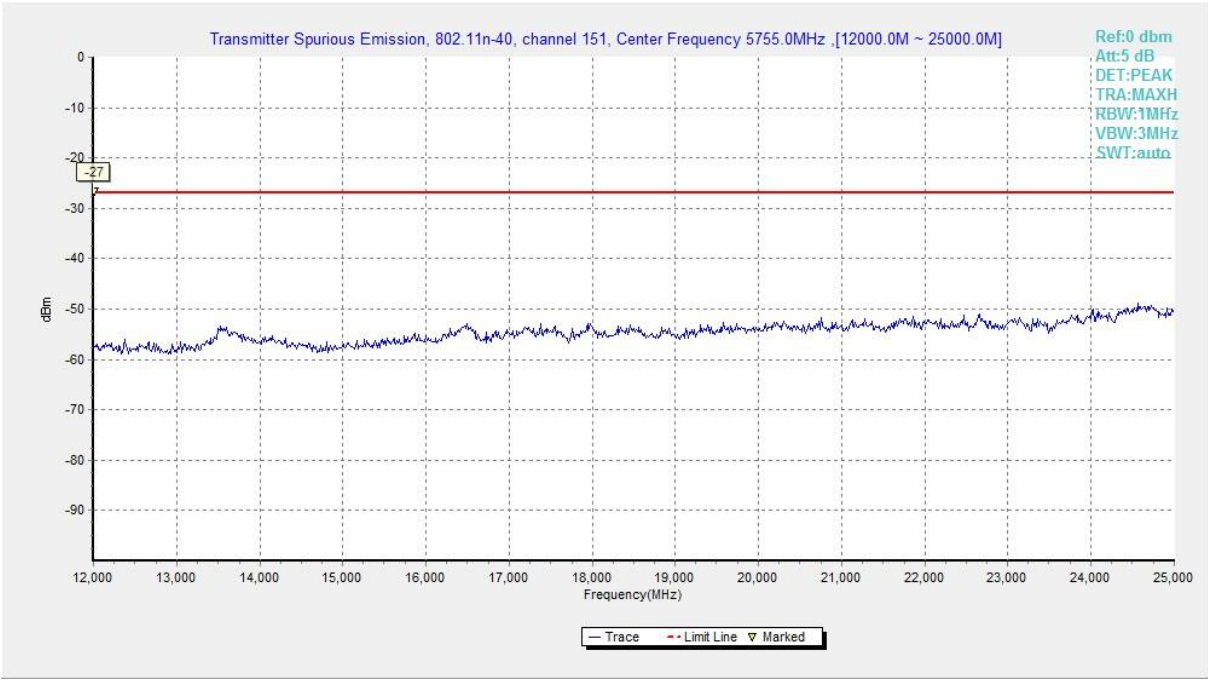


Fig. 35 Conducted Spurious Emission (802.11n-HT40, Ch151, 12 GHz-25 GHz)

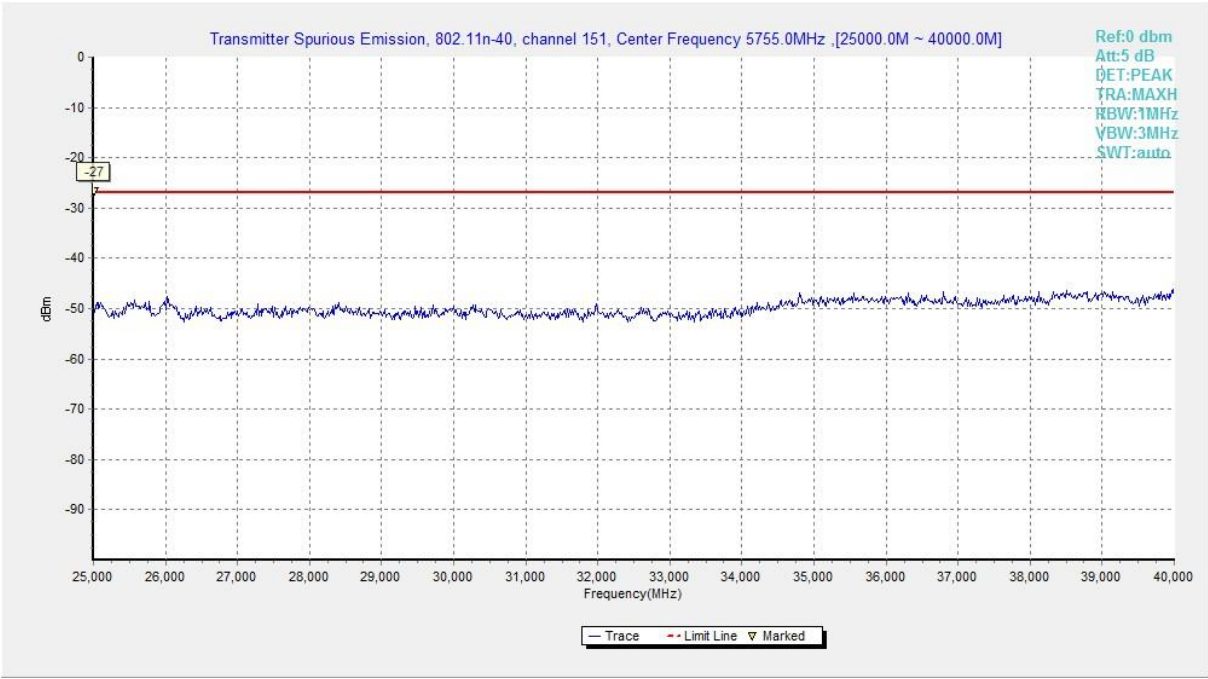


Fig. 36 Conducted Spurious Emission (802.11n-HT40, Ch151, 25 GHz-40 GHz)

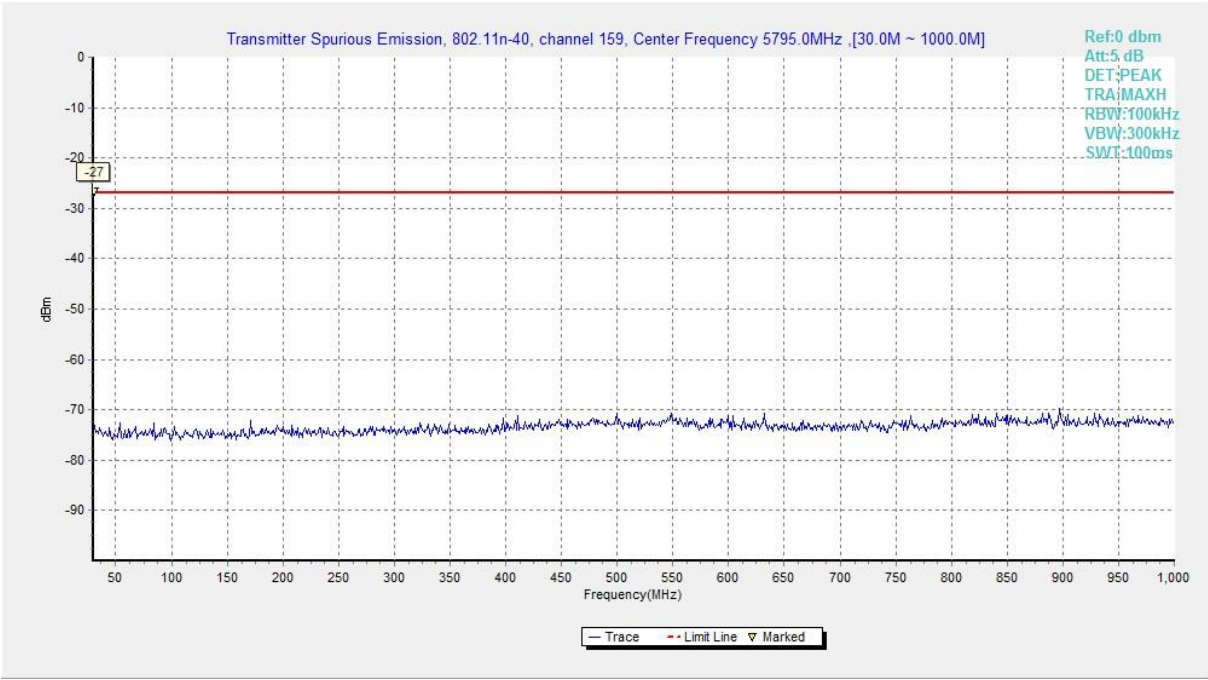


Fig. 37 Conducted Spurious Emission (802.11n-HT40, Ch159, 30 MHz-1 GHz)

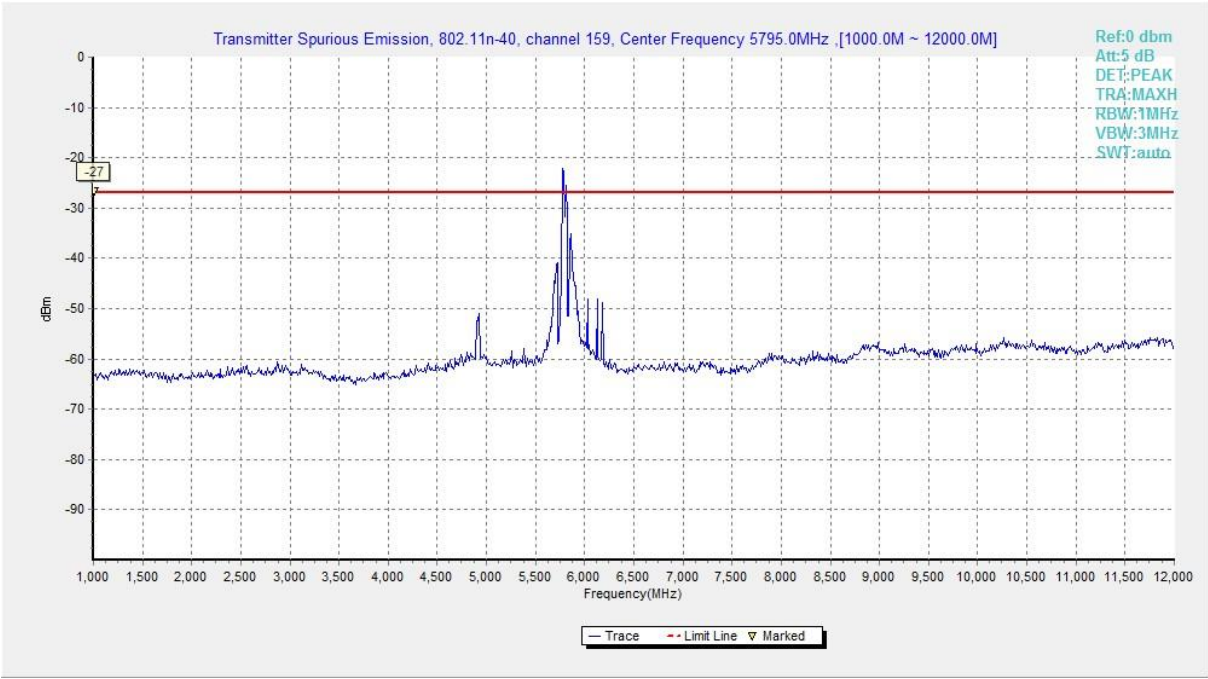


Fig. 38 Conducted Spurious Emission (802.11n-HT40, Ch159, 1 GHz -12 GHz)

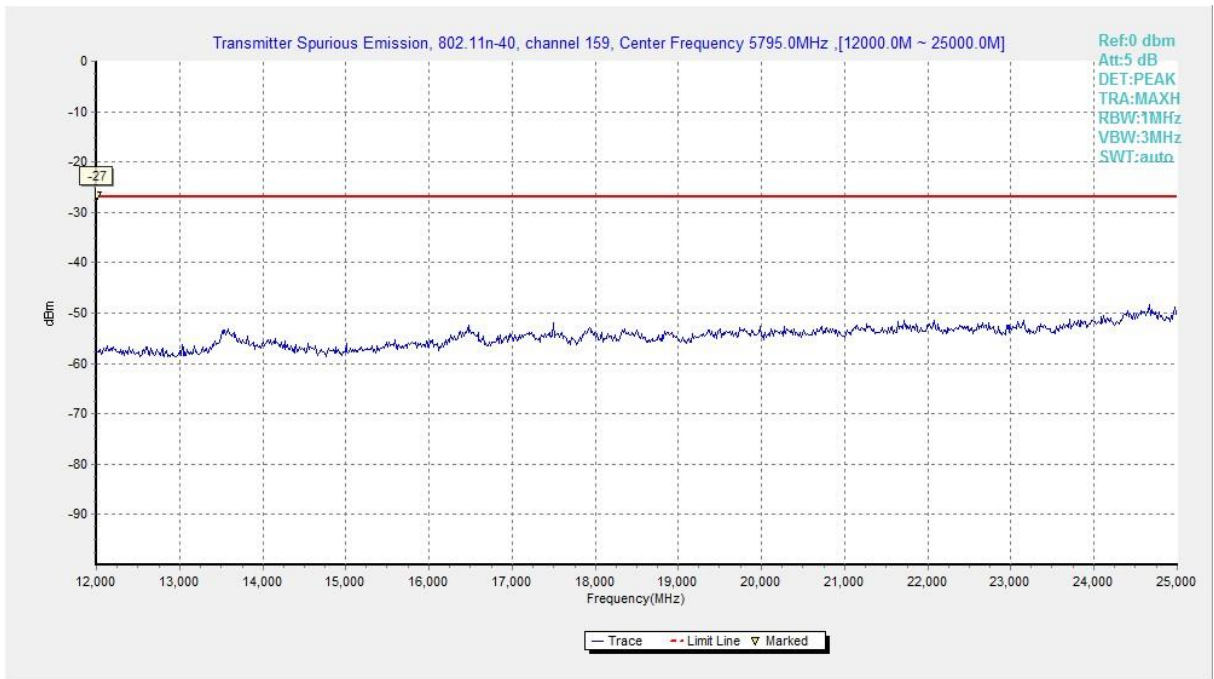


Fig. 39 Conducted Spurious Emission (802.11n-HT40, Ch159, 12 GHz-25 GHz)

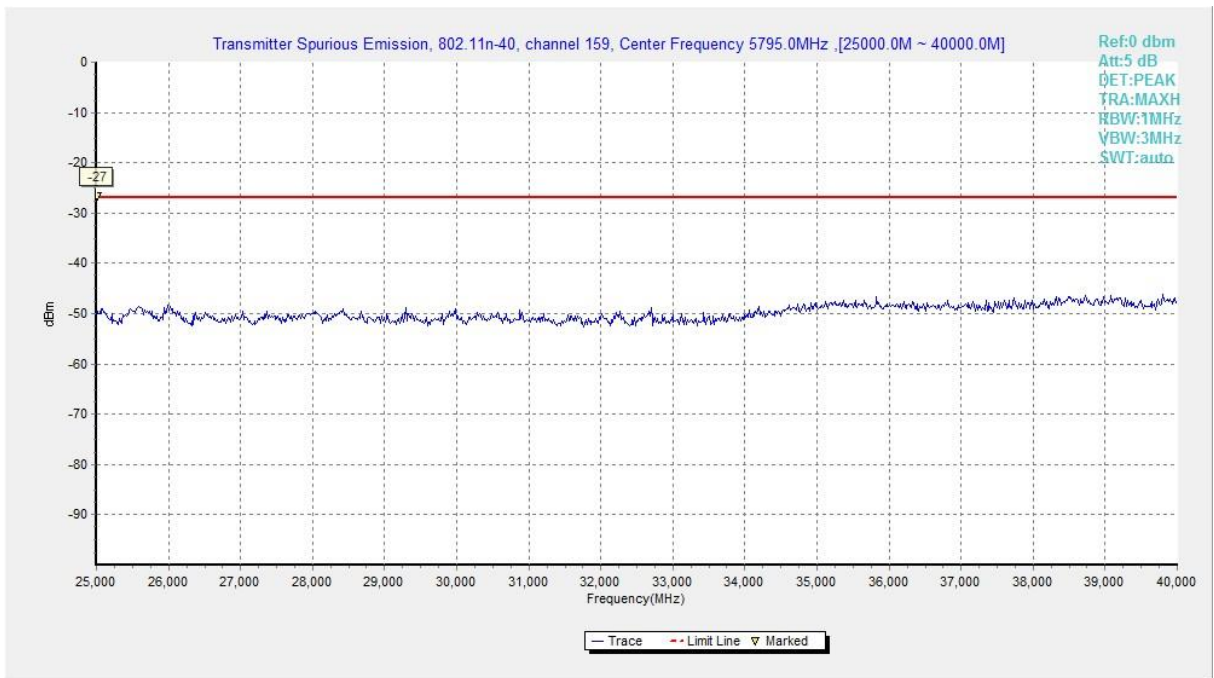


Fig. 40 Conducted Spurious Emission (802.11n-HT40, Ch159, 25 GHz-40 GHz)

A.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBµV/m)	Measurement distance(m)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Measurement Results:

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

Average Results:

EUT: 34a

802.11a

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
5724.888	65.20	-16.47	34.20	47.47	H
17950.500	35.70	-5.42	33.80	7.32	H
17985.700	35.60	-5.42	43.40	-2.38	V
17992.300	35.60	-5.42	43.40	-2.38	H
17886.700	35.50	-5.74	43.40	-2.16	H
17994.500	35.50	-5.42	43.40	-2.48	H

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17990.100	35.90	-5.42	43.40	-2.08	H
17981.300	35.90	-5.42	33.80	7.52	H
17963.700	35.70	-5.42	43.40	-2.28	V
17969.200	35.60	-5.42	43.40	-2.38	H
17974.700	35.60	-5.42	43.40	-2.38	H
17976.900	35.60	-5.42	43.40	-2.38	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5856.161	42.50	-16.48	34.20	24.78	H
17981.300	35.80	-5.42	33.80	7.42	H
17974.700	35.80	-5.42	43.40	-2.18	V
17986.800	35.80	-5.42	43.40	-2.18	H
17962.600	35.70	-5.42	43.40	-2.28	H
17995.600	35.70	-5.42	43.40	-2.28	H

802.11n-HT20

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5724.957	65.50	-16.47	34.20	47.77	H
17958.200	35.70	-5.42	33.80	7.32	H
17990.100	35.70	-5.42	43.40	-2.28	V
17994.500	35.70	-5.42	43.40	-2.28	H
17974.700	35.60	-5.42	43.40	-2.38	H
17967.000	35.60	-5.42	43.40	-2.38	H

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17965.900	35.80	-5.42	43.40	-2.18	H
17991.200	35.80	-5.42	33.80	7.42	H
17960.400	35.70	-5.42	43.40	-2.28	V
17959.300	35.70	-5.42	43.40	-2.28	H
17939.500	35.60	-5.42	43.40	-2.38	H
17971.400	35.60	-5.42	43.40	-2.38	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5831.365	54.70	-16.48	34.20	36.98	H
17947.200	35.90	-5.42	33.80	7.52	H
17985.700	35.80	-5.42	43.40	-2.18	V
17969.200	35.80	-5.42	43.40	-2.18	H
17991.200	35.70	-5.42	43.40	-2.28	H
17962.600	35.70	-5.42	43.40	-2.28	H

802.11n-HT40

Ch151

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5724.465	64.40	-16.47	34.20	46.67	H
17954.900	35.90	-5.42	33.80	7.52	H
17978.000	35.70	-5.42	43.40	-2.28	V
17981.300	35.70	-5.42	43.40	-2.28	H
17982.400	35.70	-5.42	43.40	-2.28	H
17990.100	35.70	-5.42	43.40	-2.28	H

Ch159

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5884.278	43.10	-16.24	34.20	25.14	H
17991.200	35.90	-5.42	33.80	7.52	H
17985.700	35.80	-5.42	43.40	-2.18	V
17979.100	35.70	-5.42	43.40	-2.28	H
17973.600	35.70	-5.42	43.40	-2.28	H
17981.300	35.70	-5.42	43.40	-2.28	H

Peak Results:

802.11a

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5723.519	84.80	-16.47	34.20	67.07	H
17949.400	48.50	-5.42	33.80	20.12	H
17758.000	47.60	-5.74	43.40	9.94	V
17930.700	47.60	-5.42	43.40	9.62	H
17971.400	47.30	-5.42	43.40	9.32	H
17793.200	47.30	-5.74	43.40	9.64	H

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17829.500	47.90	-5.74	43.40	10.24	H
17926.300	47.50	-5.42	33.80	19.12	H
17870.200	47.50	-5.74	43.40	9.84	V
17640.300	47.40	-6.90	43.40	10.90	H
17917.500	47.30	-5.42	43.40	9.32	H
17920.800	47.20	-5.42	43.40	9.22	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5853.240	55.70	-16.48	34.20	37.98	H
17964.800	47.80	-5.42	33.80	19.42	H
17642.500	47.60	-6.90	43.40	11.10	V
17773.400	47.50	-5.74	43.40	9.84	H
17948.300	47.50	-5.42	43.40	9.52	H
17895.500	47.40	-5.74	43.40	9.74	H

802.11n-HT20

Ch149

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5724.750	81.40	-16.47	34.20	63.67	H
17978.000	48.40	-5.42	33.80	20.02	H
17684.300	48.30	-6.90	43.40	11.80	V
17761.300	47.70	-5.74	43.40	10.04	H
17142.000	47.50	-6.30	40.10	13.70	H
17981.300	47.50	-5.42	43.40	9.52	H

Ch157

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17511.600	47.50	-5.92	43.40	10.02	H
17703.000	47.40	-6.90	33.80	20.50	H
17974.700	47.40	-5.42	43.40	9.42	V
17971.400	47.30	-5.42	43.40	9.32	H
17531.400	47.30	-5.92	43.40	9.82	H
17961.500	47.30	-5.42	43.40	9.32	H

Ch165

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5851.676	72.20	-16.48	34.20	54.48	H
17775.600	47.90	-5.74	33.80	19.84	H
17898.800	47.90	-5.74	43.40	10.24	V
17976.900	47.50	-5.42	43.40	9.52	H
17874.600	47.40	-5.74	43.40	9.74	H
17947.200	47.40	-5.42	43.40	9.42	H

802.11n-HT40

Ch151

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5719.207	77.20	-16.47	34.20	59.47	H
17814.100	47.70	-5.74	33.80	19.64	H
17513.800	47.50	-5.92	43.40	10.02	V
17953.800	47.40	-5.42	43.40	9.42	H
17789.900	47.30	-5.74	43.40	9.64	H
17971.400	47.30	-5.42	43.40	9.32	H

Ch159

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5882.335	56.70	-16.24	34.20	38.74	H
17969.200	47.80	-5.42	33.80	19.42	H
17935.100	47.80	-5.42	43.40	9.82	V
17754.700	47.50	-5.74	43.40	9.84	H
17400.500	47.50	-5.92	40.10	13.32	H
17660.100	47.40	-6.90	43.40	10.90	H

Sample calculation: Peak detector, 5882.335MHz

Result =P_{Mea} (38.74 dBμV)+ G_A (34.20 dB/m)+ G_{PL}(-16.24dB) =56.70 dBμV/m

Conclusion: PASS

A.6. Band Edges Compliance

A6.1 Band Edges - conducted

Measurement Limit:

Standard	Limit (dBm/MHz)
FCC 47 CFR Part 15.407(b)(4)	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The measurement is made according to KDB 789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.41	P
	5825 MHz	Fig.42	P
802.11n HT20	5745 MHz	Fig.43	P
	5825 MHz	Fig.44	P
802.11n HT40	5755 MHz	Fig.45	P
	5795 MHz	Fig.46	P

Conclusion: PASS

Test graphs as below:

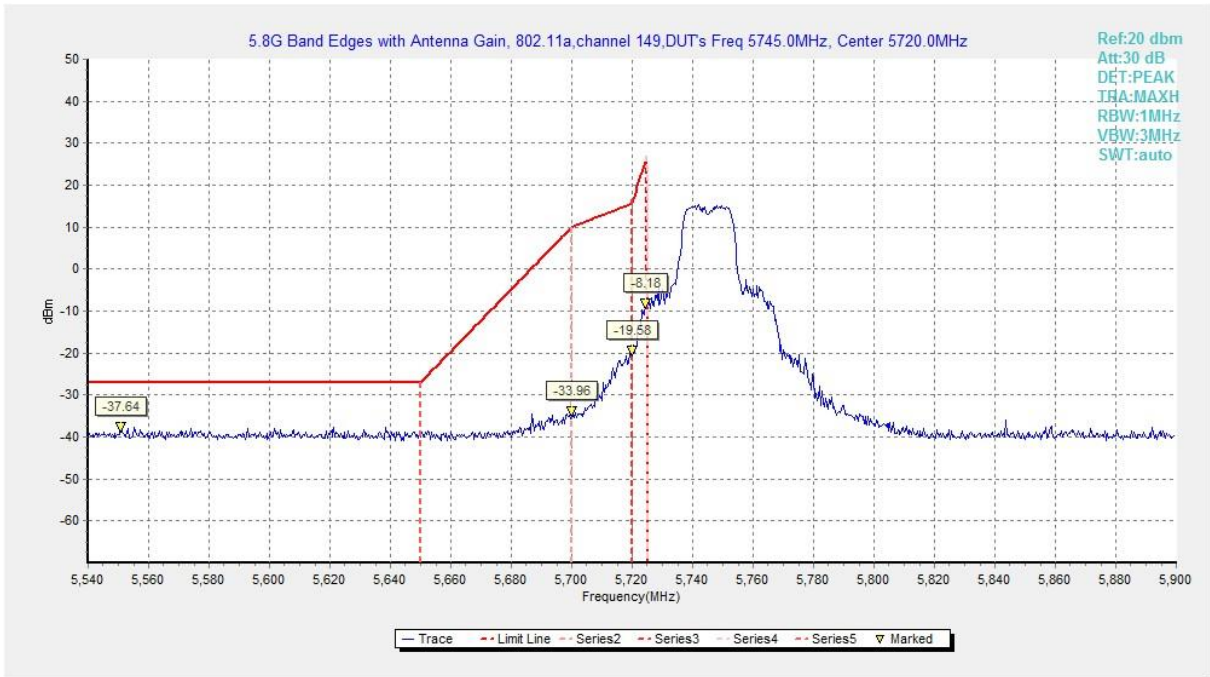


Fig. 41 Band Edges (802.11a, 5745MHz)

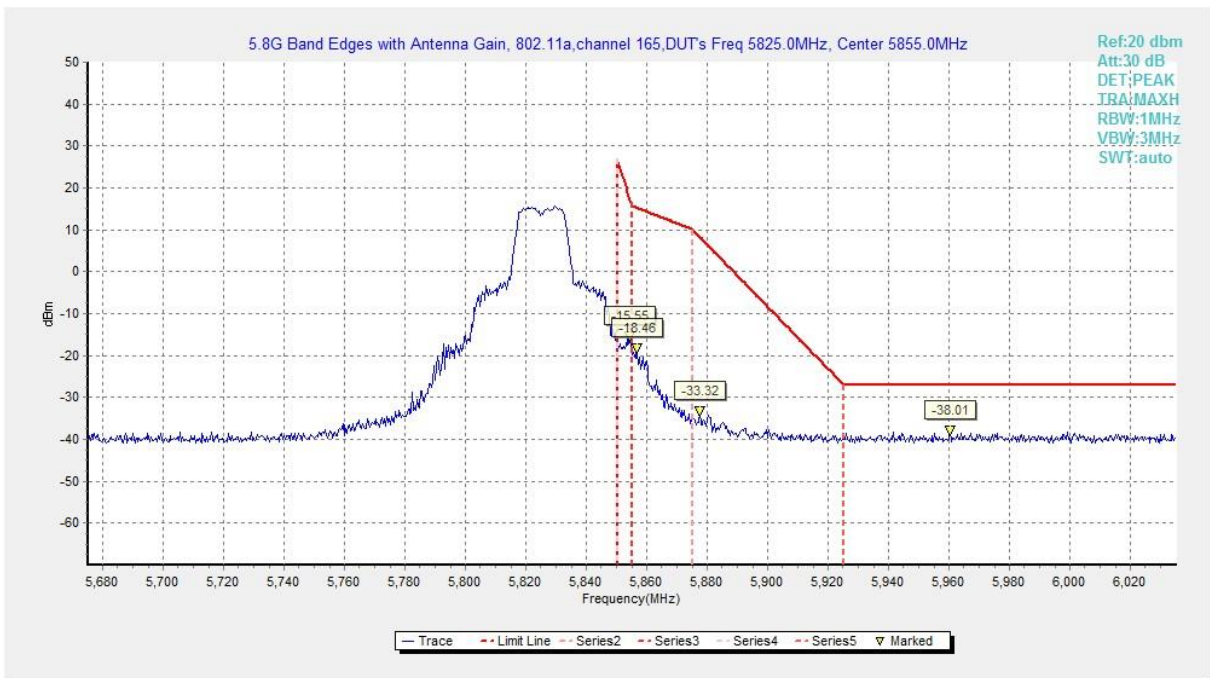


Fig. 42 Band Edges (802.11a, 5825MHz)

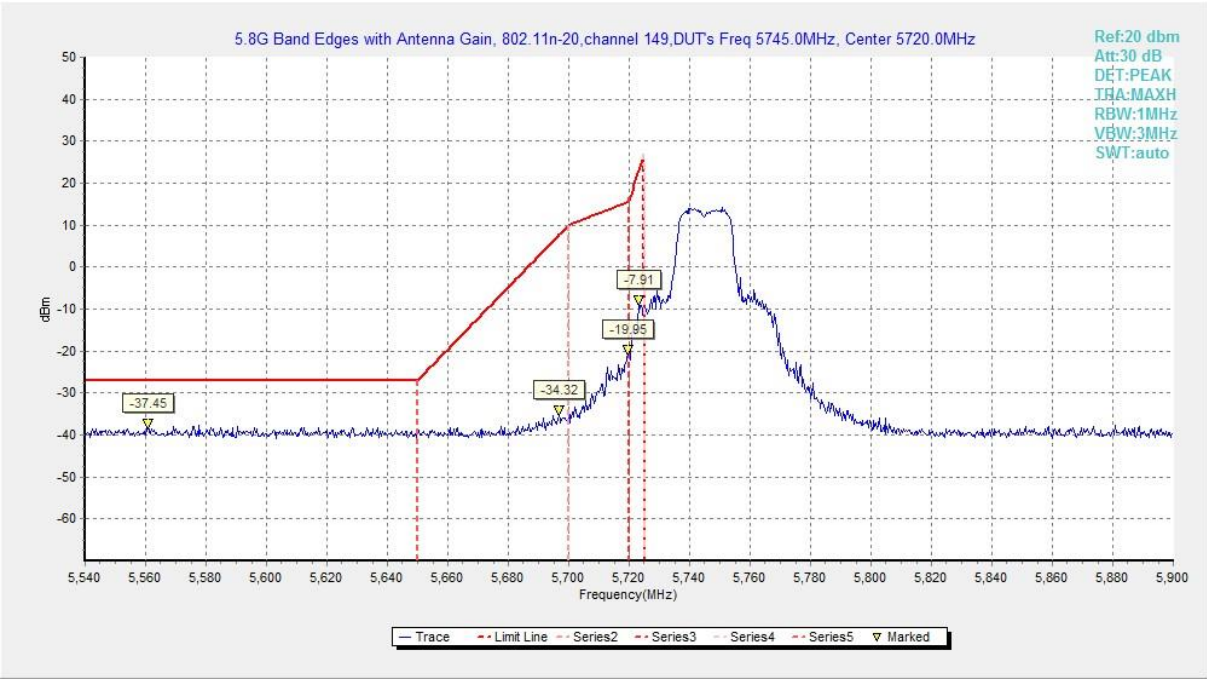


Fig. 43 Band Edges (802.11n-HT20, 5745MHz)

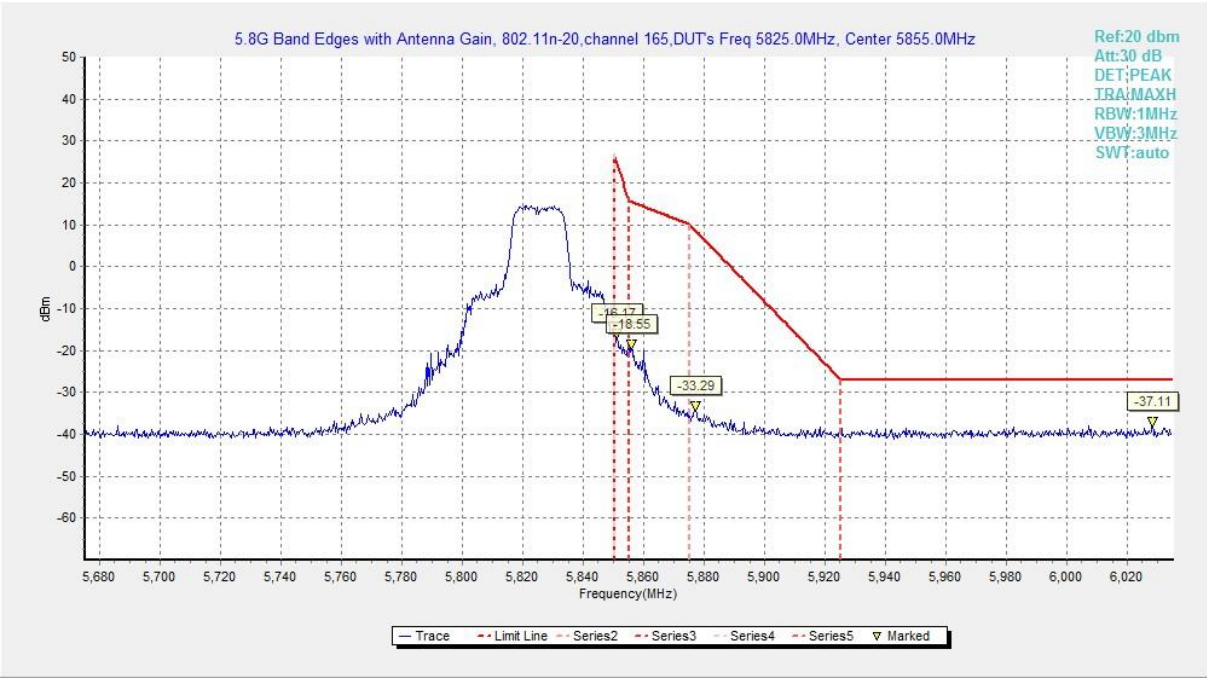


Fig. 44 Band Edges (802.11n-HT20, 5825MHz)

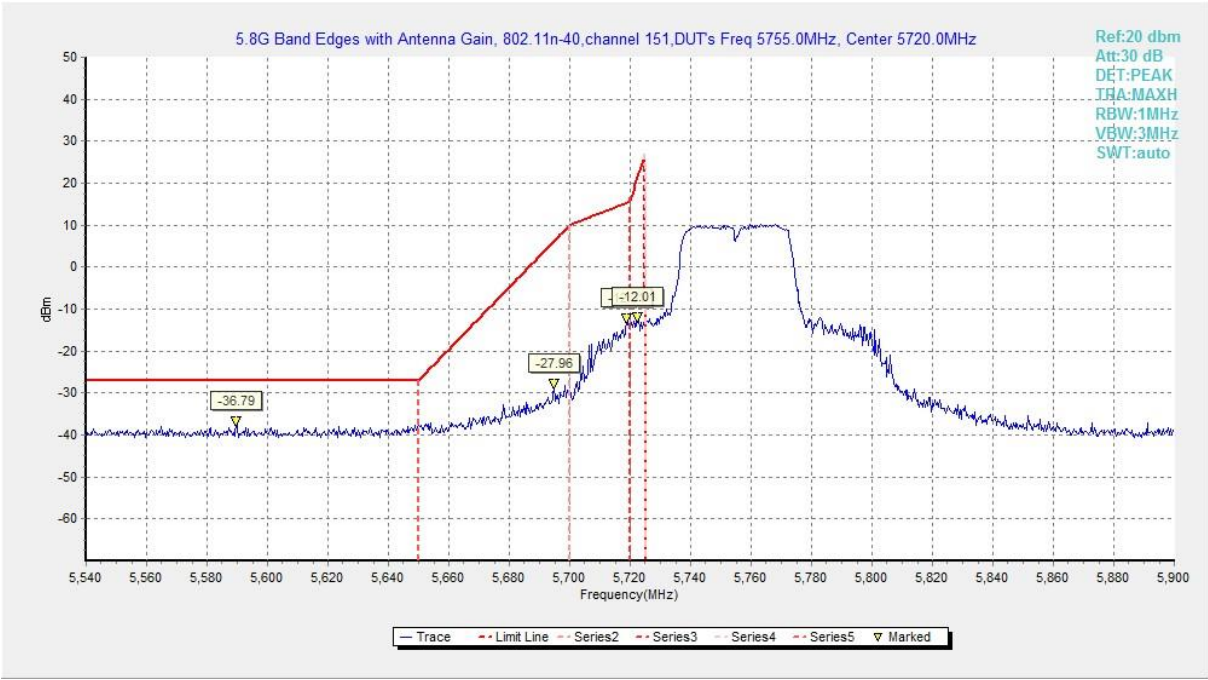


Fig. 45 Band Edges (802.11n-HT40, 5755MHz)



Fig. 46 Band Edges (802.11n-HT40, 5795MHz)

A 6.2 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033 D02
 In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.47	P
	5825 MHz	Fig.48	P
802.11n HT20	5745 MHz	Fig.49	P
	5825 MHz	Fig.50	P
802.11n HT40	5755 MHz	Fig.51	P
	5795 MHz	Fig.52	P

Conclusion: PASS
Test graphs as below:

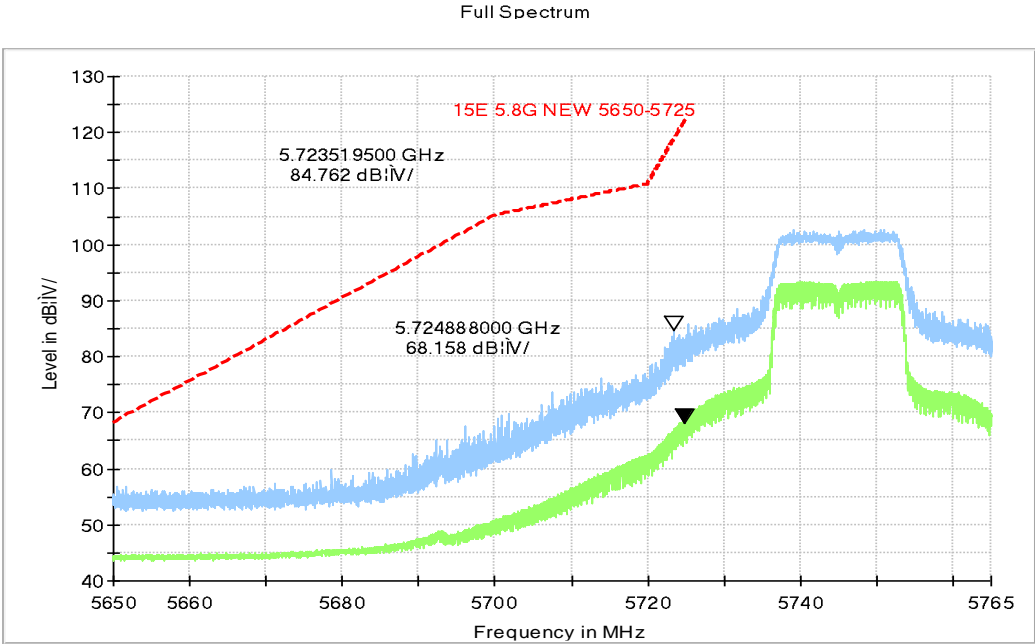


Fig. 47 Band Edges (802.11a, 5745MHz)

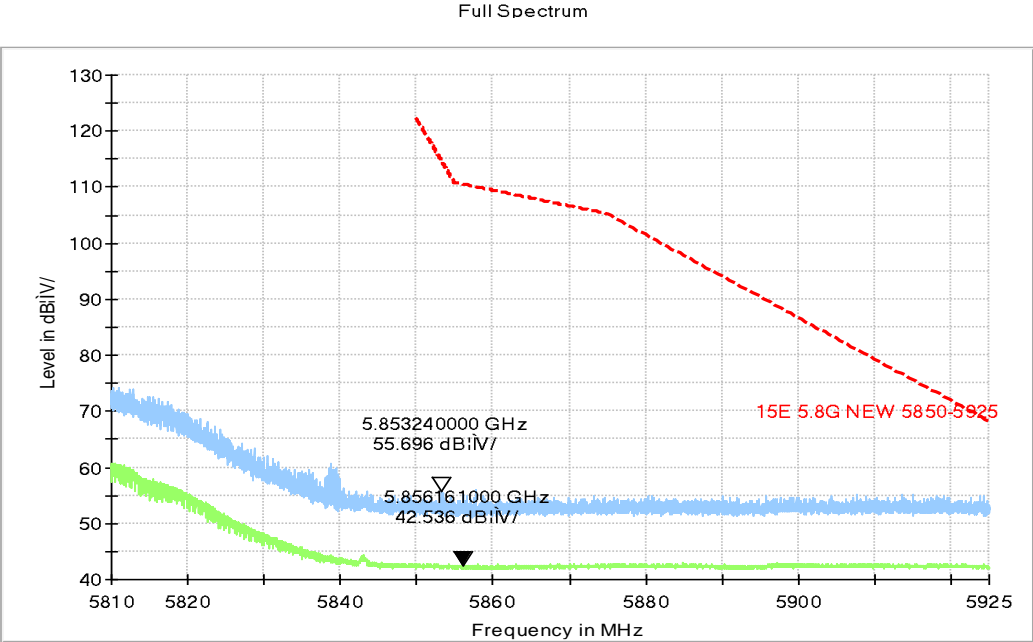


Fig. 48 Band Edges (802.11a, 5825MHz)

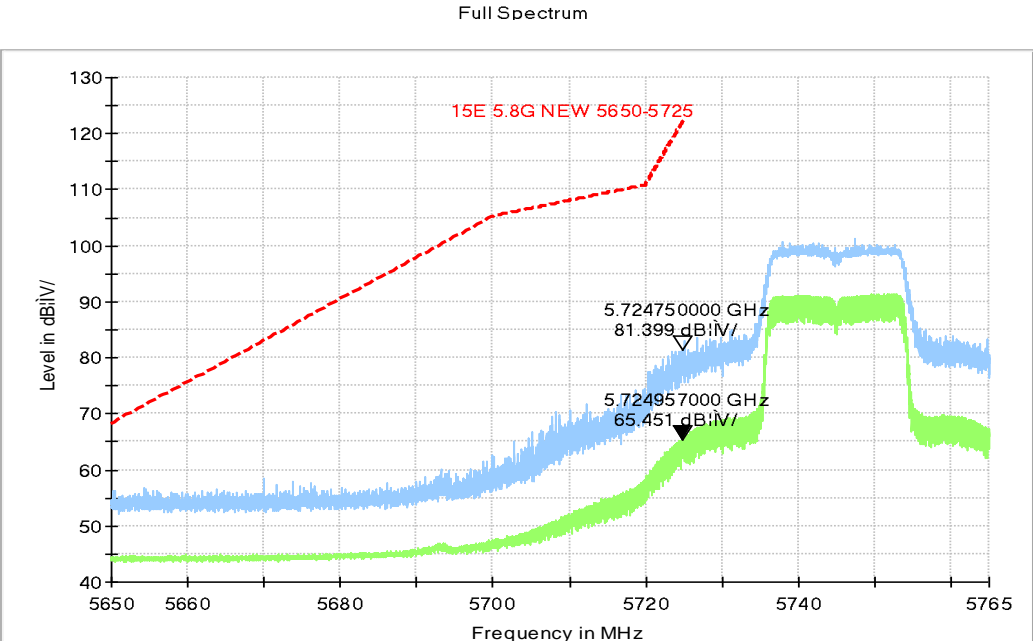


Fig. 49 Band Edges (802.11n-HT20, 5745MHz)

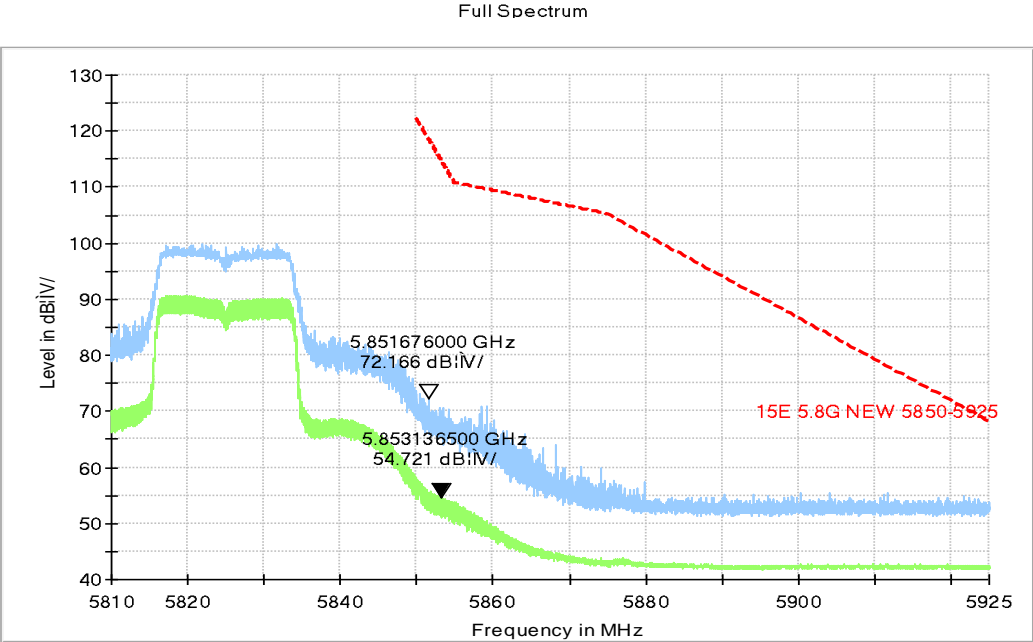


Fig. 50 Band Edges (802.11n-HT20, 5825MHz)

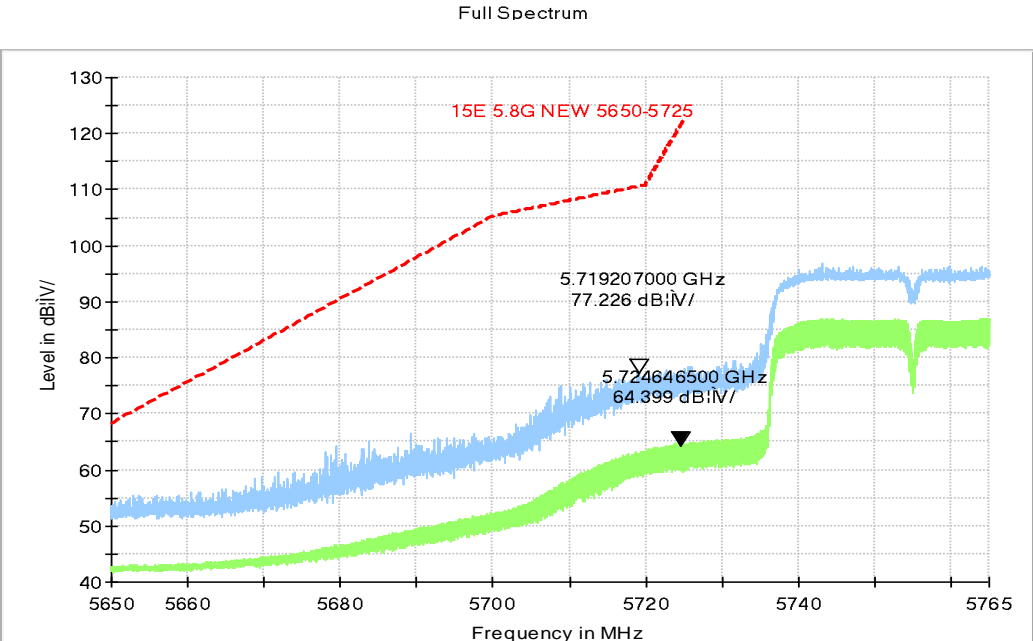


Fig. 51 Band Edges (802.11n-HT40, 5755MHz)

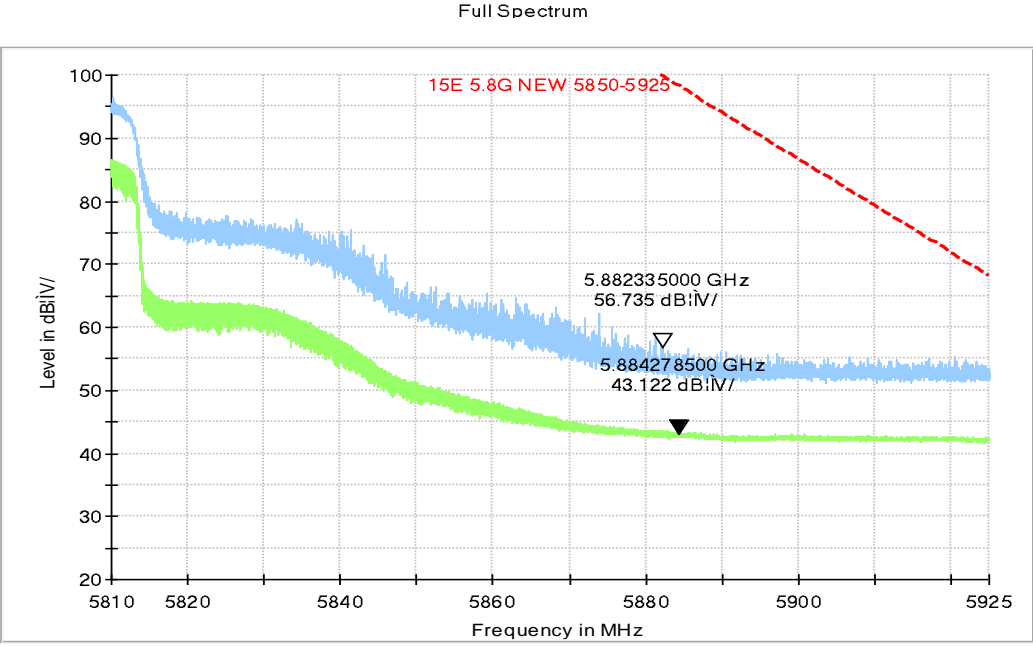


Fig. 52 Band Edges (802.11n-HT40, 5795MHz)

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
110	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.2\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig. 53 Fig.55	Fig. 54	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.53 Fig.55	Fig.54	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS

Test graphs as below:

Traffic UC11US PUAN

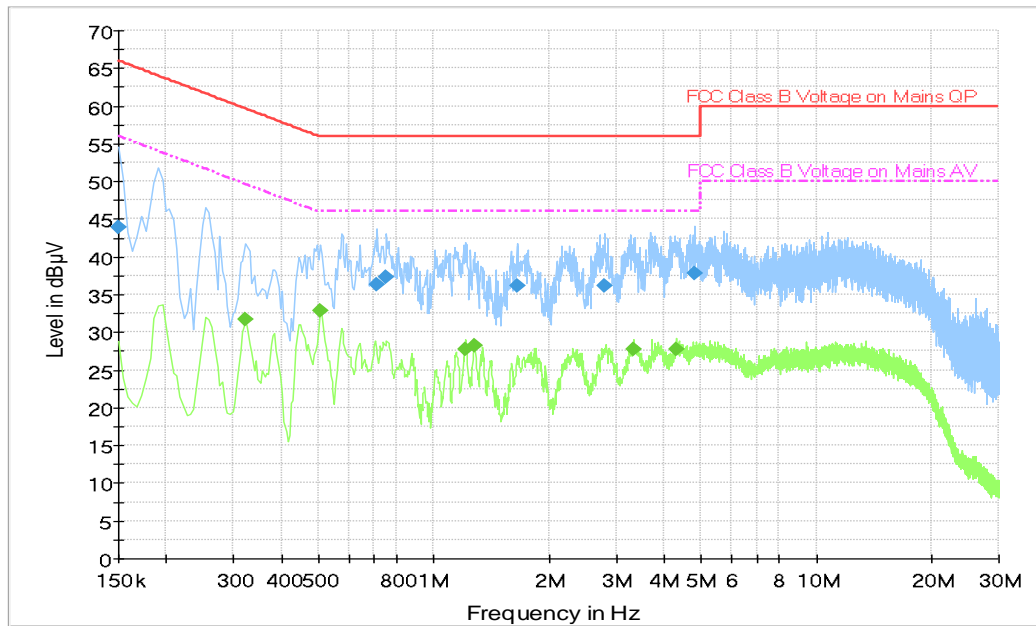


Fig. 53 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.9	L1	30.7	22.1	66.0
0.712500	36.4	L1	19.8	19.6	56.0
0.753000	37.4	L1	19.8	18.6	56.0
1.657500	36.1	L1	19.6	19.9	56.0
2.796000	36.2	L1	19.6	19.8	56.0
4.821000	37.8	L1	19.6	18.2	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.321000	31.7	N	19.8	18.0	49.7
0.505500	32.9	N	19.8	13.1	46.0
1.212000	27.7	L1	19.6	18.3	46.0
1.279500	28.3	N	19.6	17.7	46.0
3.331500	27.8	L1	19.6	18.2	46.0
4.299000	27.8	L1	19.6	18.2	46.0

Idle UC11US PUAN

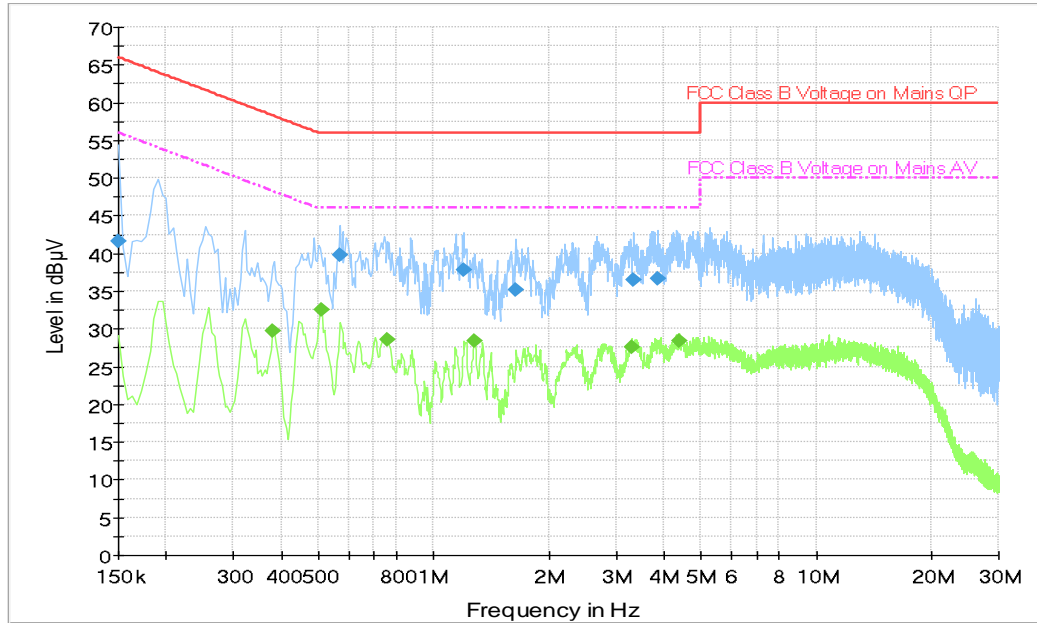


Fig. 54 AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.7	N	30.6	24.3	66.0
0.568500	39.7	L1	19.8	16.3	56.0
1.198500	37.9	L1	19.7	18.1	56.0
1.635000	35.2	L1	19.6	20.8	56.0
3.327000	36.5	L1	19.6	19.5	56.0
3.862500	36.6	L1	19.6	19.4	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.379500	29.8	N	19.8	18.5	48.3
0.510000	32.6	N	19.8	13.4	46.0
0.757500	28.6	N	19.8	17.4	46.0
1.279500	28.5	N	19.6	17.5	46.0
3.304500	27.6	L1	19.6	18.4	46.0
4.398000	28.3	L1	19.6	17.7	46.0

Traffic UC11US Chenyang

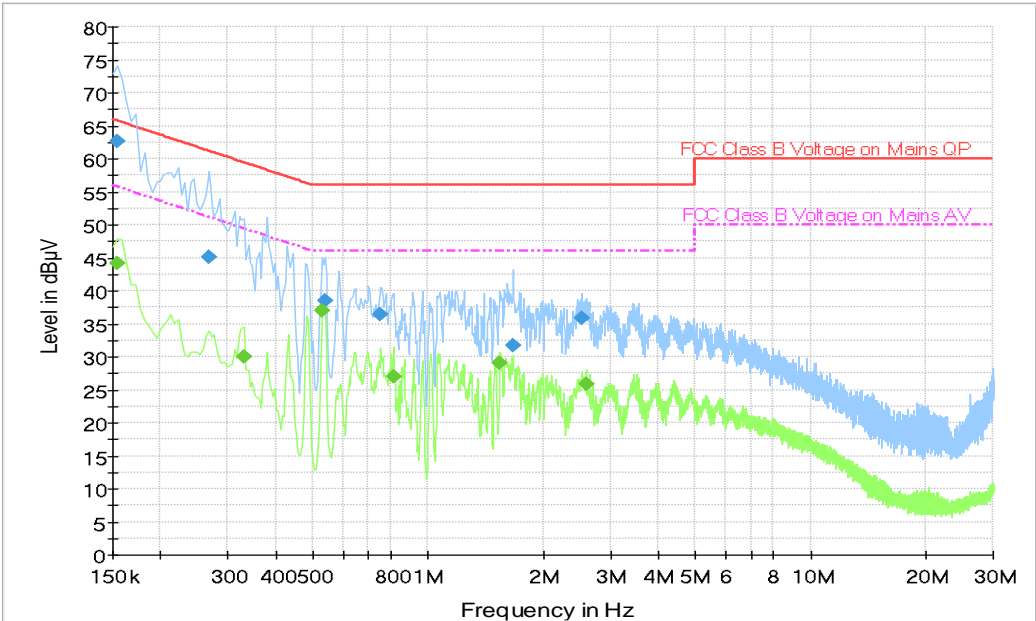


Fig. 55 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	62.7	L1	29.7	3.1	65.8
0.267000	45.2	L1	19.8	16.0	61.2
0.537000	38.5	L1	19.8	17.5	56.0
0.753000	36.5	L1	19.8	19.5	56.0
1.671000	31.7	N	19.6	24.3	56.0
2.530500	35.9	L1	19.6	20.1	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	44.2	L1	29.7	11.5	55.8
0.330000	30.0	L1	19.8	19.4	49.5
0.528000	37.1	L1	19.8	8.9	46.0
0.811500	27.0	L1	19.7	19.0	46.0
1.540500	29.1	L1	19.6	16.9	46.0
2.589000	25.9	L1	19.6	20.1	46.0

ANNEX B: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2019-09-26 through 2020-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

*** END OF REPORT BODY ***