

For managing, maintaining and deploying your Onyx Beacons please visit
connect.OnyxBeacon.com

Feel free to contact us with any feedback or help you need.

To make most of your beacons use the Onyx Beacon App from the iTunes App Store or Google Play store and use our Onyx Beacon SDKs for iOS and Android.

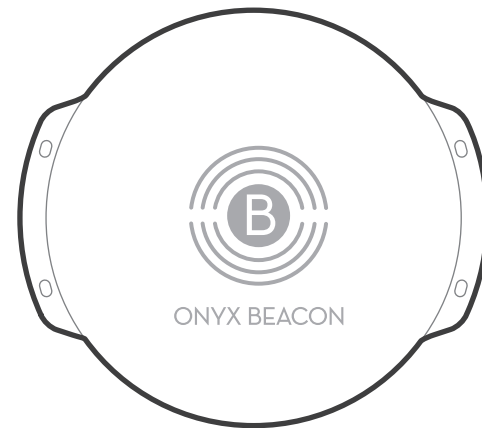

Onyx Beacon **Beacon Enterprise**

U s e r M a n u a l


Your Enterprise Beacon comes usually shipped with 2 AA or 4 AA batteries and/or a USB-to-DC cable and/or USB charger in the package. In most cases the batteries are shipped separately in the box. In some cases the batteries are already inserted in the Enterprise Beacon enclosure, depending on your country or order specifications.

The Enterprise Beacon can be powered in the following way(s):

- with 2 AA batteries, or-with 4 AA batteries, or-with only the USB-to-DC cable connected to a USB port (supplied in package when ordered), or-with only the USB-to-DC cable connected a USB charger (supplied in package when ordered), or-with 2 or 4 AA batteries and USB-to-DC cable connected to USB port, or-with 2 or 4 AA batteries and USB-to-DC cable connected to USB charger.

The batteries can be inserted or replaced and the USB-to-DC cable can be connected in the Enterprise Beacon by following a few simple steps.

1

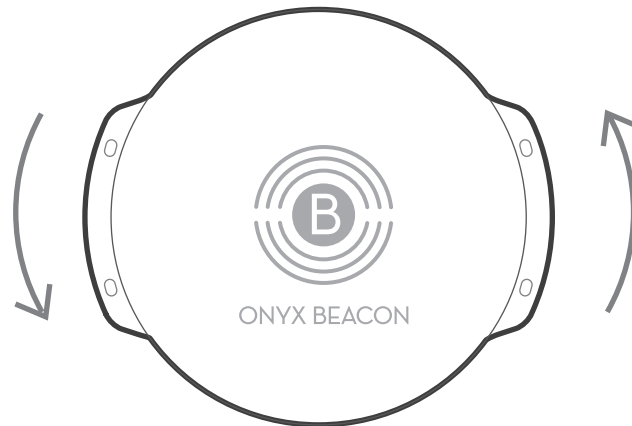

Twist the top of the case in the indicated direction open (counterclockwise). To separate the top from the bottom part of the enclosure.

2


Insert or replace either 2 or 4 AA batteries as indicated.

Make sure you have the waterproof seal in place for the beacon housing when using it outdoors.

Note: Please use always new AA batteries and do not mix new with used batteries, or batteries of different types in one beacon.
To remove the battery, push it out of the metal frame with a thin non-metallic object.

If operated with only a external USB charger or via a USB port please insert the supplied USB-to-DC cable.


Make sure the supplied USB-to-DC cable and its waterproof seal is inserted fully in the beacon housing to assure the beacon can operate in a waterproof way.

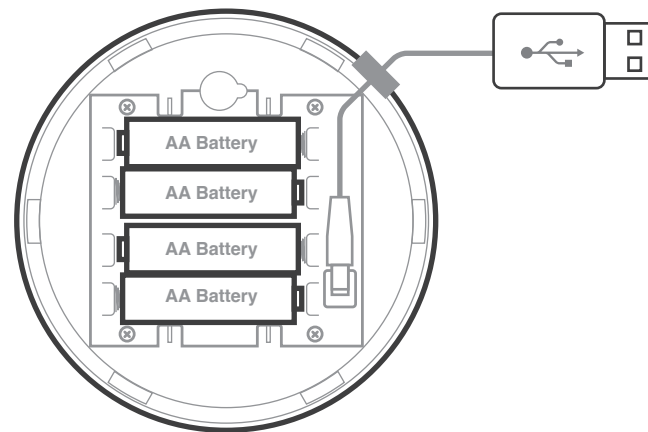


3

Close the enclosure by twisting the top of the enclosure back on the bottom of the enclosure in the indicated direction (clockwise). see step 1

4

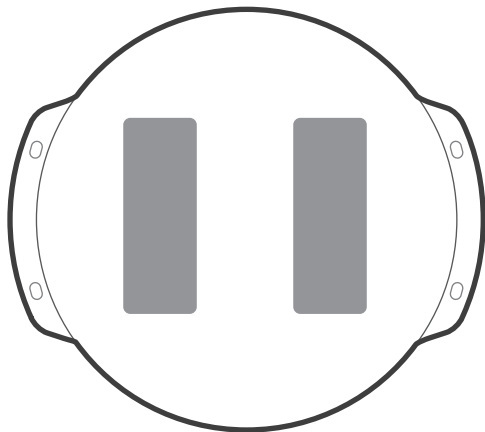

Mounting the Enterprise Beacon on the wall is simple. Just glue it to the wall using the 3M® VHB™ Tape that you find in the back of the Enterprise Beacon.

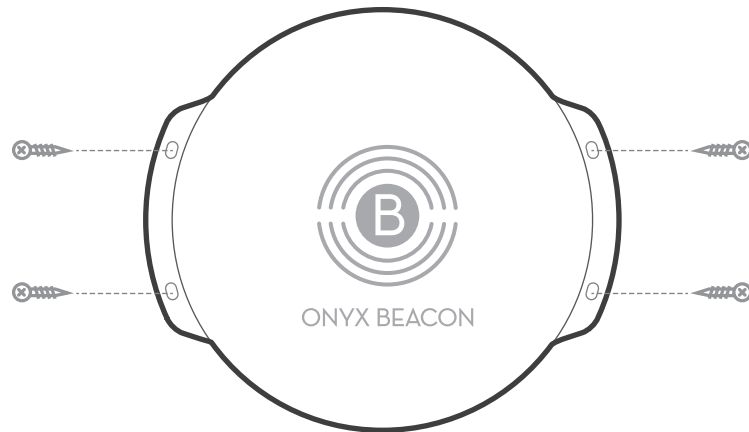

The Enterprise Beacon can also be mounted to the surface with 4 screws.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

- English:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.