

TEST REPORT

Reference No...... : WTX24X03047639W003
FCC ID..... : 2ACGT-ODE001
Applicant..... : GUANGZHOU SHANGKE INFORMATION TECHNOLOGY CO., LTD
Address..... : Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe District, Guangzhou, Guangdong Province,China
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Tablet PC
Model No...... : ODE001
Standards..... : FCC Part 15.407
Date of Receipt sample..... : 2024-03-11
Date of Test..... : 2024-03-20 to 2024-03-29
Date of Issue..... : 2024-03-29
Test Report Form No...... : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION5

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)5

1.2 TEST STANDARDS6

1.3 TEST METHODOLOGY6

1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING6

1.5 EUT OPERATING DURING TEST7

1.6 TEST FACILITY7

1.7 EUT SETUP AND TEST MODE8

1.8 MEASUREMENT UNCERTAINTY9

1.9 TEST EQUIPMENT LIST AND DETAILS10

2. SUMMARY OF TEST RESULTS13

3. ANTENNA REQUIREMENT14

3.1 STANDARD APPLICABLE14

3.2 EVALUATION INFORMATION14

4. AUTOMATICALLY DISCONTINUE TRANSMISSION15

4.1 STANDARD APPLICABLE15

4.2 SUMMARY OF TEST RESULTS15

5. POWER SPECTRAL DENSITY16

5.1 STANDARD APPLICABLE16

5.2 TEST PROCEDURE16

5.3 SUMMARY OF TEST RESULTS/PLOTS17

6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH18

6.1 STANDARD APPLICABLE18

6.2 TEST PROCEDURE18

6.3 SUMMARY OF TEST RESULTS/PLOTS20

7. MAXIMUM CONDUCTED OUTPUT POWER21

7.1 STANDARD APPLICABLE21

7.2 TEST PROCEDURE21

7.3 SUMMARY OF TEST RESULTS/PLOTS22

8. RADIATED SPURIOUS EMISSIONS23

8.1 STANDARD APPLICABLE23

8.2 TEST PROCEDURE23

8.3 TEST RECEIVER SETUP25

8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION25

8.5 SUMMARY OF TEST RESULTS/PLOTS25

9. FREQUENCY STABILITY34

9.1 STANDARD APPLICABLE34

9.2 TEST PROCEDURE34

9.3 SUMMARY OF TEST RESULTS/PLOTS34

10. CONDUCTED EMISSIONS35

10.1 TEST PROCEDURE35

10.2 BASIC TEST SETUP BLOCK DIAGRAM35

10.3 TEST RECEIVER SETUP35

10.4 SUMMARY OF TEST RESULTS/PLOTS35

APPENDIX SUMMARY38

APPENDIX A39

APPENDIX B43

APPENDIX C50

APPENDIX D54

APPENDIX PHOTOGRAPHS 55

Report version

Version No.	Date of issue	Description
Rev.00	2024-03-29	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Tablet PC
Trade Name:	ODEA
Model No.:	ODE001
Adding Model(s):	ODE002, ODE003, ODE005, ODE006, ODE007, ODE008, ODE009, ODE010, ODE011, ODE012, ODE013, ODE015, ODE016, ODE017, ODE018, ODE019, ODE020, ODE021, ODE022, ODE023, ODE025, ODE026, ODE027, ODE028, ODE029, ODE030, ODE031, ODE032, ODE033, ODE035, ODE036, ODE037, ODE038, ODE039, TA10, TLA001, TLA002, TLA007, TLA016
Rated Voltage:	Charging Port:DC5V Battery:DC3.80V
Battery Capacity:	8000mAh
Power Adapter:	Model:XY-CU01200500200U01 Input:AC100-240V~50-60Hz 0.4A MAX Output:DC5.0V,2.0A
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ODE001, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5180-5240MHz
Max. RF Output Power:	15.85dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM,256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	2.36dBi
<p><i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a	Default	Default	Default	/	/	/	/	/	/	/	/	/	/
802.11n-HT20	Default	Default	Default	/	/	/	/	/	/	/	/	/	/
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40	Default	Default	/	/	/	/	/	/	/	/	/	/	
Mode	NCB: 80MHz												
	5210	5290	5530	5610	5690	5775							
802.11ac-VHT80	Default	/	/	/	/	/	/						

Reference No.: WTX24X03047639W003

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz
TM3	802.11n-HT40	5190MHz,5230MHz
TM4	802.11ac-VHT80	5210MHz

Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	1.0	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	1.0	Shielded	With Ferrite
Earphone	1.0	Unshielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	L13 Yoga	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2024-02-27	2025-02-26
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2024-02-24	2025-02-23
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2024-02-24	2025-02-23
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28

<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-02-24	2025-02-23
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an FPC antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth (< 1MHz, or < 500kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $RBW=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX24X03047639W003

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW \geq 3MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

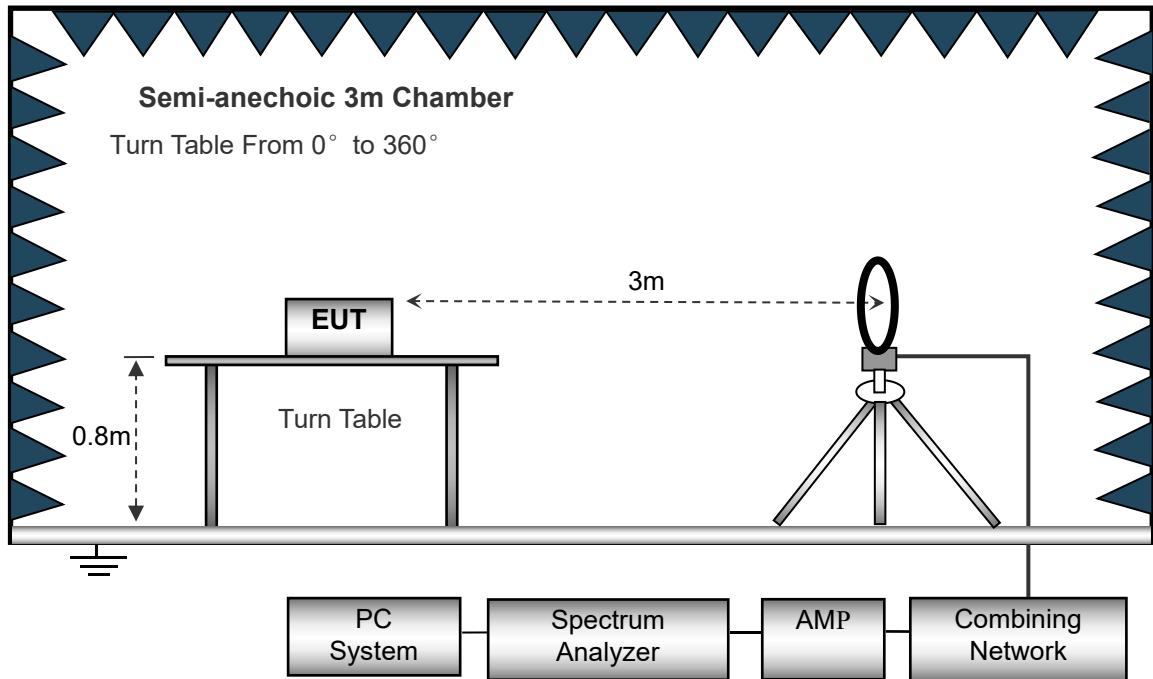
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



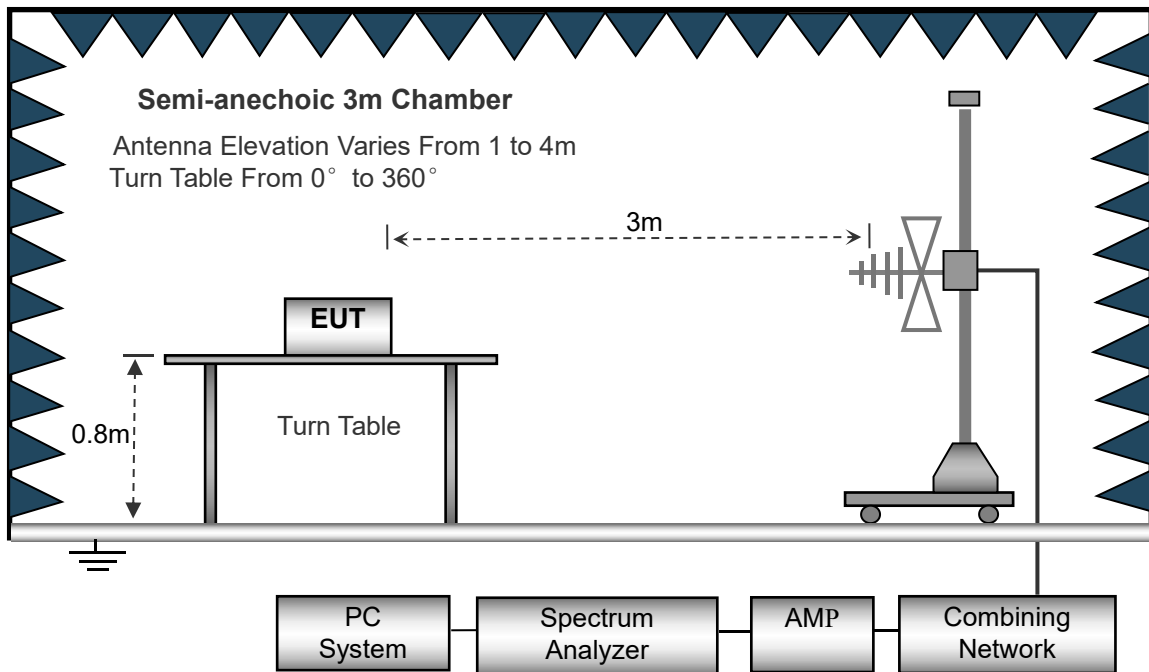The test setup for emission measurement from 30MHz to 1GHz.



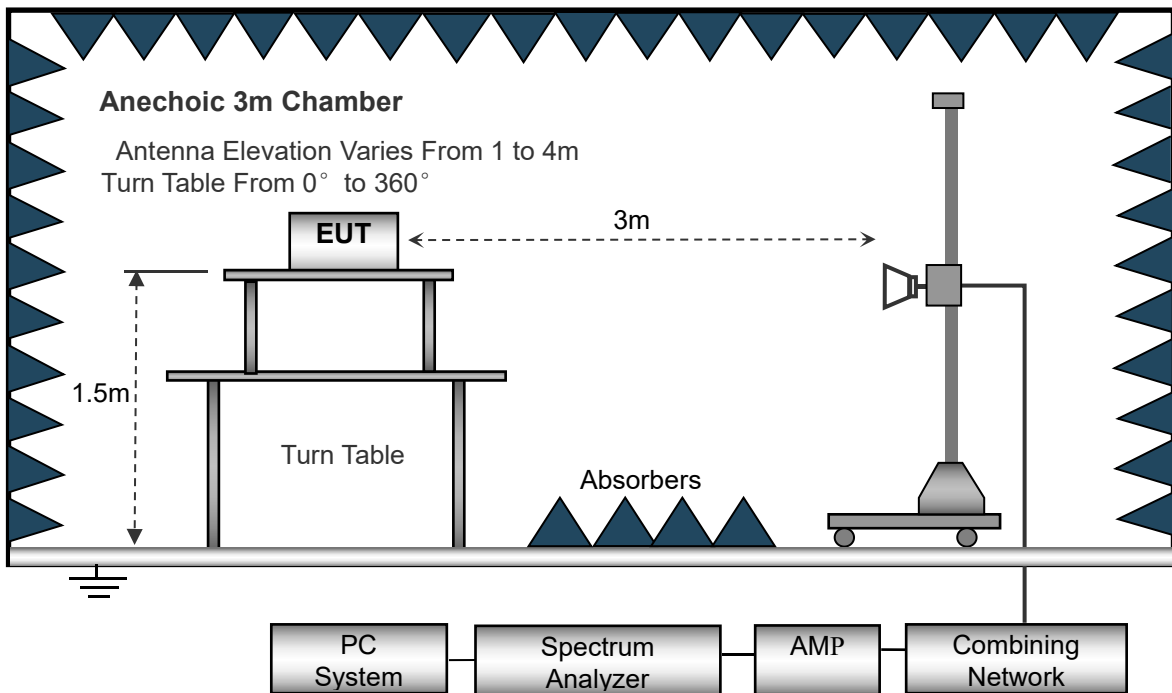The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

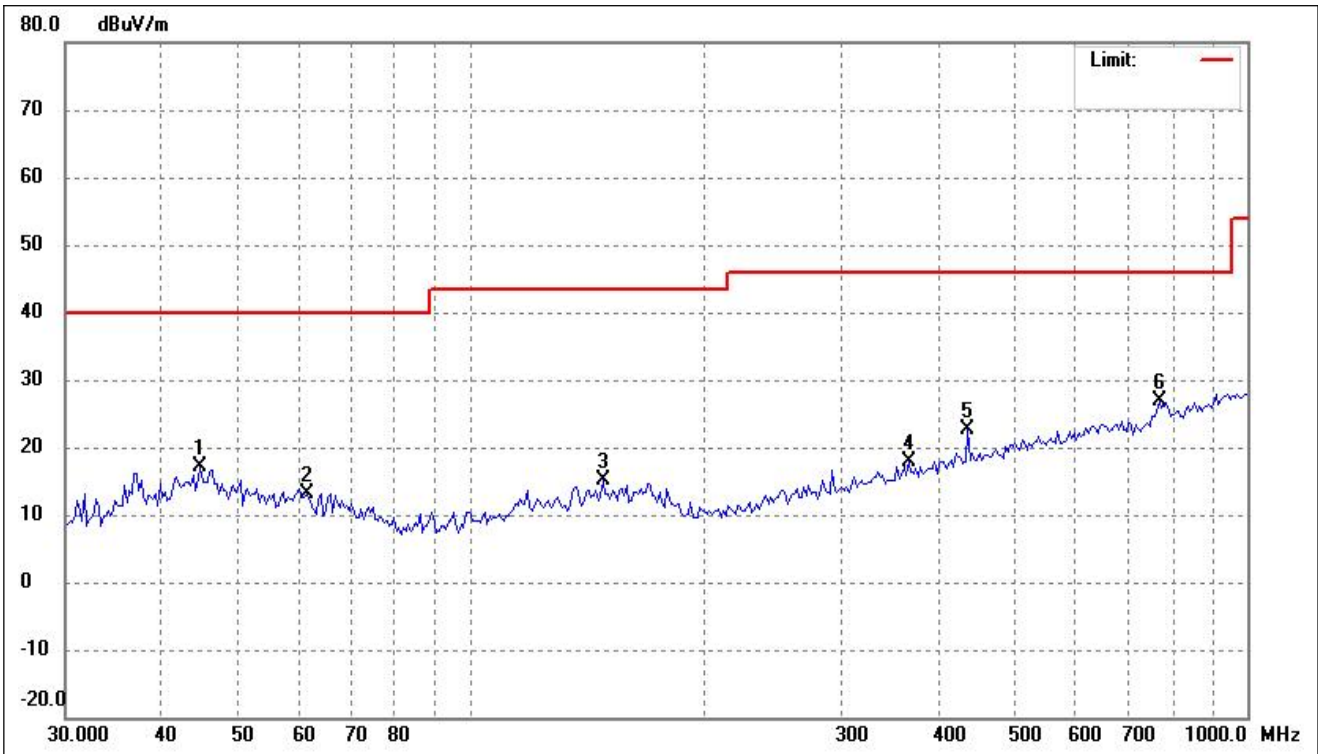

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.7793	29.48	-12.47	17.01	40.00	-22.99	-	-	peak
2	61.4343	26.42	-13.20	13.22	40.00	-26.78	-	-	peak
3	147.8747	27.95	-12.77	15.18	43.50	-28.32	-	-	peak
4	366.0866	28.70	-10.70	18.00	46.00	-28.00	-	-	peak
5	436.3956	31.51	-8.96	22.55	46.00	-23.45	-	-	peak
6	771.0475	30.77	-3.97	26.80	46.00	-19.20	-	-	peak

802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

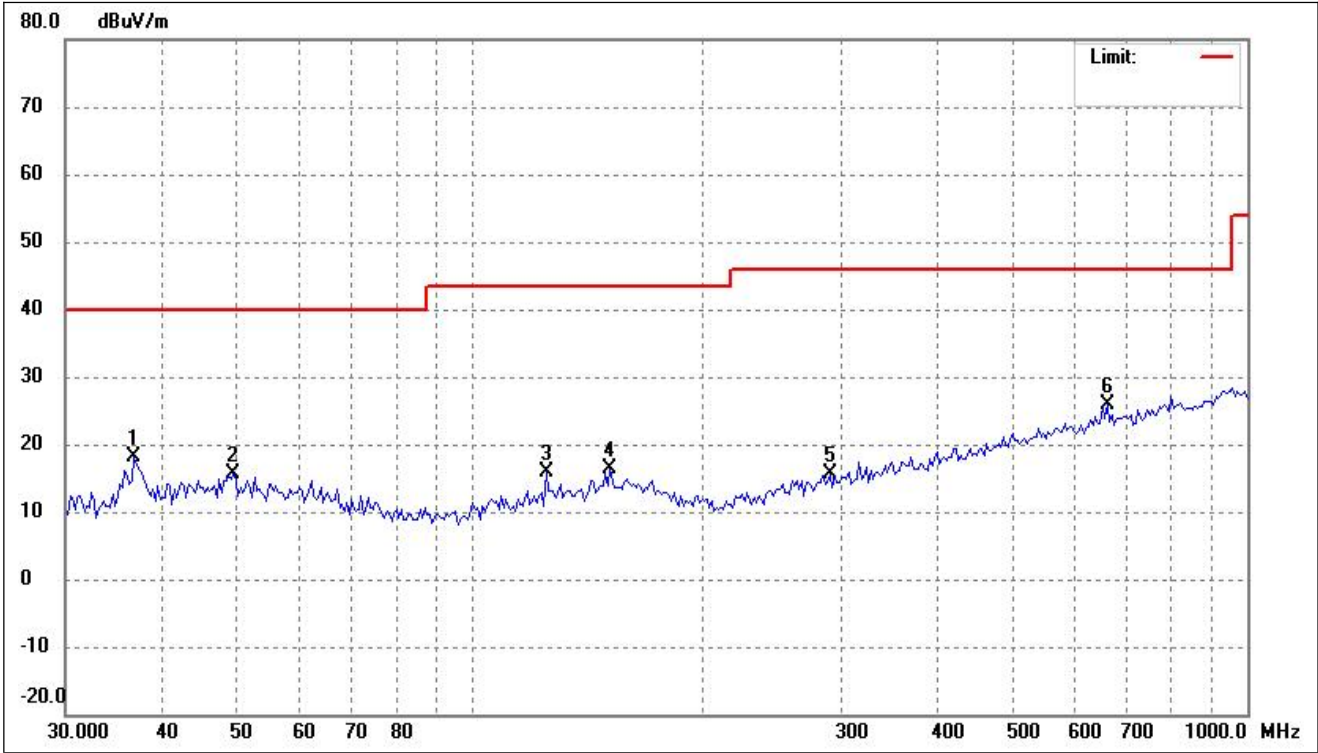


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7811	31.25	-13.17	18.08	40.00	-21.92	-	-	peak
2	49.4087	27.85	-12.13	15.72	40.00	-24.28	-	-	peak
3	124.9249	30.05	-14.19	15.86	43.50	-27.64	-	-	peak
4	151.0252	28.98	-12.61	16.37	43.50	-27.13	-	-	peak
5	290.3170	28.10	-12.58	15.52	46.00	-30.48	-	-	peak
6	660.6025	31.21	-5.28	25.93	46.00	-20.07	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

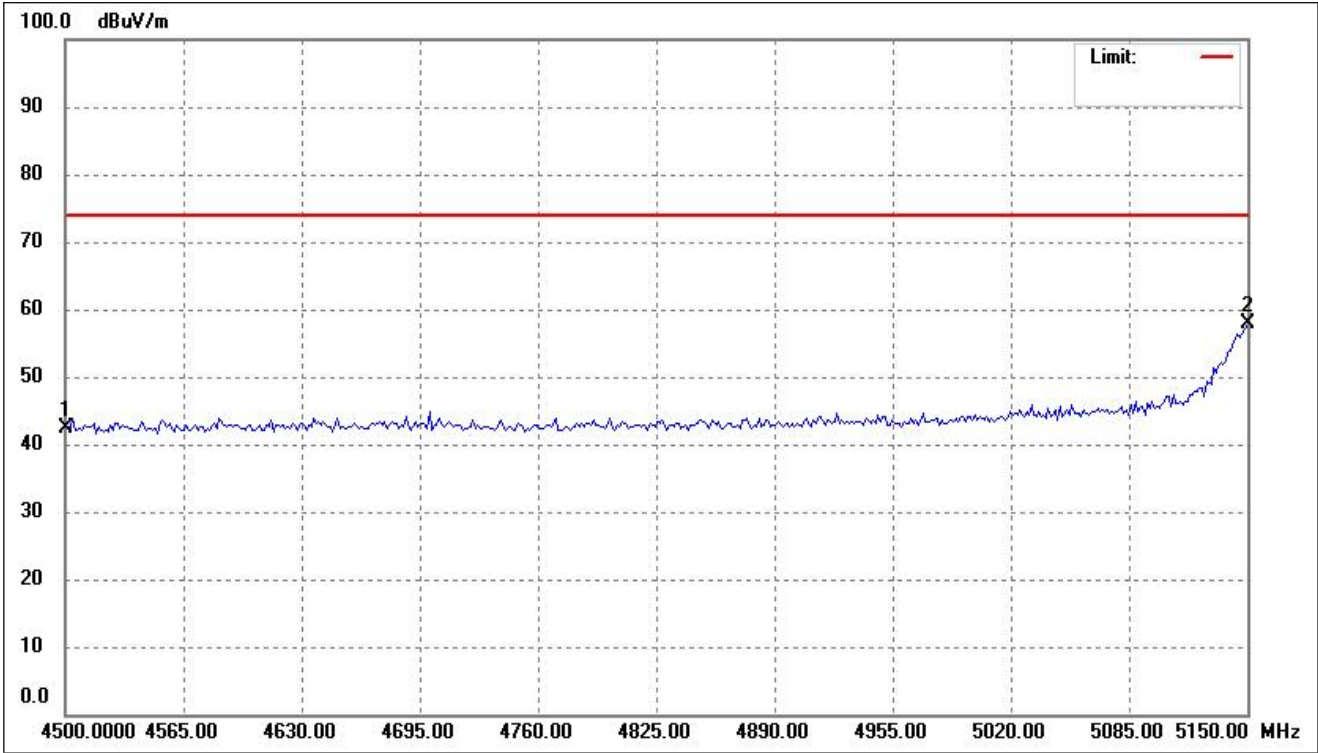

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	55.46	-13.10	42.36	74.00	-31.64	-	-	peak
2	5150.000	69.43	-11.66	57.77	74.00	-16.23	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

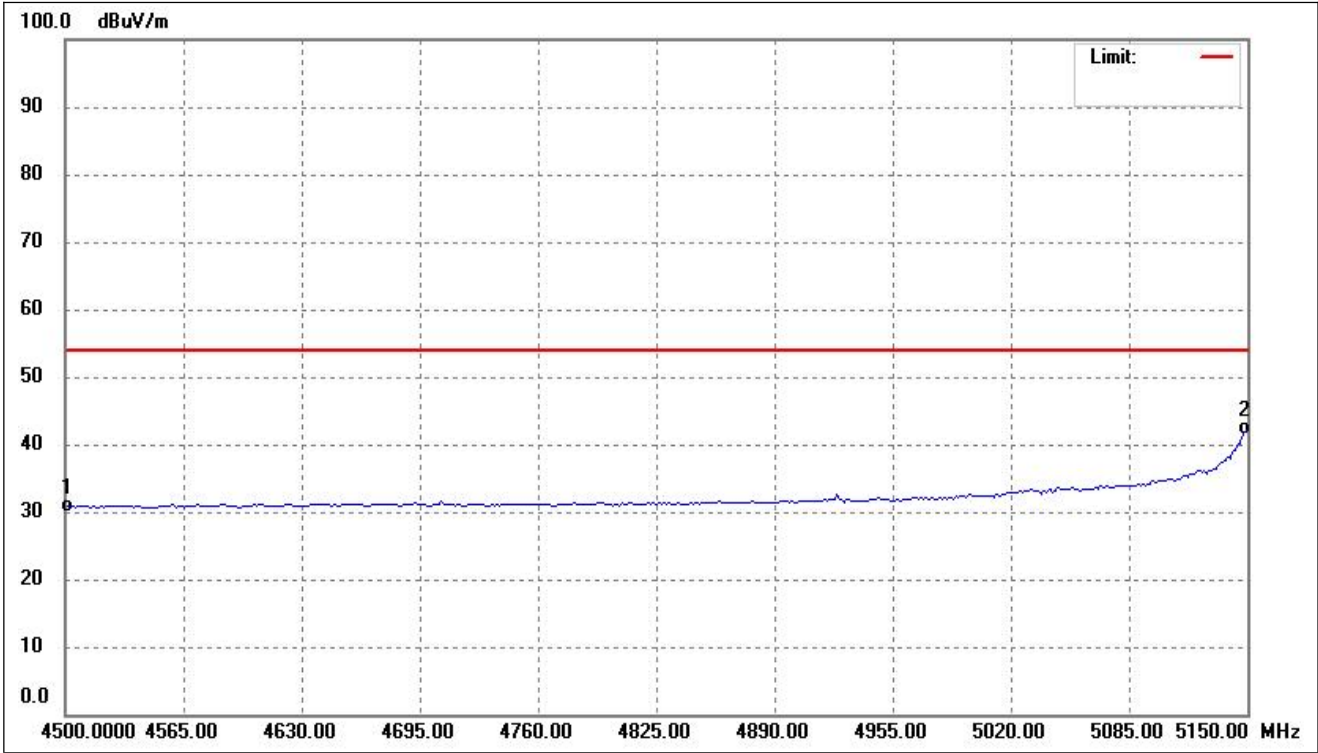

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	43.90	-13.10	30.80	54.00	-23.20	-	-	AVG
2	5150.000	53.92	-11.66	42.26	54.00	-11.74	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-' Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz(802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	45.88	7.11	52.99	74	-21.01	H	PK
10360	41.86	7.11	48.97	54	-5.03	H	AV
15540	40.40	8.22	48.62	74	-25.38	H	PK
15540	35.00	8.22	43.22	54	-10.78	H	AV
10360	44.92	7.11	52.03	74	-21.97	V	PK
10360	38.63	7.11	45.74	54	-8.26	V	AV
15540	37.49	8.22	45.71	74	-28.29	V	PK
15540	32.30	8.22	40.52	54	-13.48	V	AV
Middle Channel (5200MHz)							
10400	45.00	7.22	52.22	74	-21.78	H	PK
10400	39.82	7.22	47.04	54	-6.96	H	AV
15600	37.75	8.67	46.42	74	-27.58	H	PK
15600	32.83	8.67	41.50	54	-12.50	H	AV
10400	46.99	7.22	54.21	74	-19.79	V	PK
10400	39.42	7.22	46.64	54	-7.36	V	AV
15600	40.55	8.67	49.22	74	-24.78	V	PK
15600	33.97	8.67	42.64	54	-11.36	V	AV
High Channel (5240MHz)							
10480	45.77	7.69	53.46	74	-20.54	H	PK
10480	39.08	7.69	46.77	54	-7.23	H	AV
15720	40.48	8.93	49.41	74	-24.59	H	PK
15720	33.14	8.93	42.07	54	-11.93	H	AV
10480	45.06	7.69	52.75	74	-21.25	V	PK
10480	38.21	7.69	45.90	54	-8.10	V	AV
15720	38.46	8.93	47.39	74	-26.61	V	PK
15720	33.46	8.93	42.39	54	-11.61	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.91	-27
Highest	Above 5350	-42.63	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz(802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	45.19	7.11	52.30	74	-21.70	H	PK
10360	39.84	7.11	46.95	54	-7.05	H	AV
15540	37.77	8.22	45.99	74	-28.01	H	PK
15540	32.33	8.22	40.55	54	-13.45	H	AV
10360	42.86	7.11	49.97	74	-24.03	V	PK
10360	34.72	7.11	41.83	54	-12.17	V	AV
15540	35.84	8.22	44.06	74	-29.94	V	PK
15540	30.04	8.22	38.26	54	-15.74	V	AV
Middle Channel (5200MHz)							
10400	47.36	7.22	54.58	74	-19.42	H	PK
10400	39.94	7.22	47.16	54	-6.84	H	AV
15600	38.34	8.67	47.01	74	-26.99	H	PK
15600	35.17	8.67	43.84	54	-10.16	H	AV
10400	45.98	7.22	53.20	74	-20.80	V	PK
10400	38.53	7.22	45.75	54	-8.25	V	AV
15600	37.33	8.67	46.00	74	-28.00	V	PK
15600	31.12	8.67	39.79	54	-14.21	V	AV
High Channel (5240MHz)							
10480	44.75	7.69	52.44	74	-21.56	H	PK
10480	39.70	7.69	47.39	54	-6.61	H	AV
15720	38.63	8.93	47.56	74	-26.44	H	PK
15720	33.46	8.93	42.39	54	-11.61	H	AV
10480	42.03	7.69	49.72	74	-24.28	V	PK
10480	36.81	7.69	44.50	54	-9.50	V	AV
15720	36.57	8.93	45.50	74	-28.50	V	PK
15720	30.26	8.93	39.19	54	-14.81	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-29.76	-27
Highest	Above 5350	-37.73	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	46.00	7.25	53.25	74	-20.75	H	PK
10380	39.60	7.25	46.85	54	-7.15	H	AV
15570	38.46	8.33	46.79	74	-27.21	H	PK
15570	34.60	8.33	42.93	54	-11.07	H	AV
10380	41.89	7.25	49.14	74	-24.86	V	PK
10380	33.39	7.25	40.64	54	-13.36	V	AV
15570	33.23	8.33	41.56	74	-32.44	V	PK
15570	27.20	8.33	35.53	54	-18.47	V	PK
High Channel (5230MHz)							
10460	47.76	7.54	55.30	74	-18.70	H	PK
10460	40.94	7.54	48.48	54	-5.52	H	AV
15690	40.51	8.86	49.37	74	-24.63	H	PK
15690	31.96	8.86	40.82	54	-13.18	H	AV
10460	42.63	7.54	50.17	74	-23.83	V	PK
10460	33.86	7.54	41.40	54	-12.60	V	AV
15690	34.29	8.86	43.15	74	-30.85	V	PK
15690	28.10	8.86	36.96	54	-17.04	V	PK

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.38	-27
Highest	Above 5350	-38.57	-27

Note: the data just list the worst cases

Reference No.: WTX24X03047639W003

- For the frequency band 5.15-5.25GHz (802.11ac-VHT80)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Middle Channel (5210MHz)							
10420	44.84	7.25	52.09	74	-21.91	H	PK
10420	36.91	7.25	44.16	54	-9.84	H	AV
15630	37.28	8.33	45.61	74	-28.39	H	PK
15630	30.44	8.33	38.77	54	-15.23	H	AV
10420	40.31	7.25	47.56	74	-26.44	V	PK
10420	32.60	7.25	39.85	54	-14.15	V	AV
15630	33.43	8.33	41.76	74	-32.24	V	PK
15630	26.13	8.33	34.46	54	-19.54	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.71	-27
Highest	Above 5350	-39.64	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

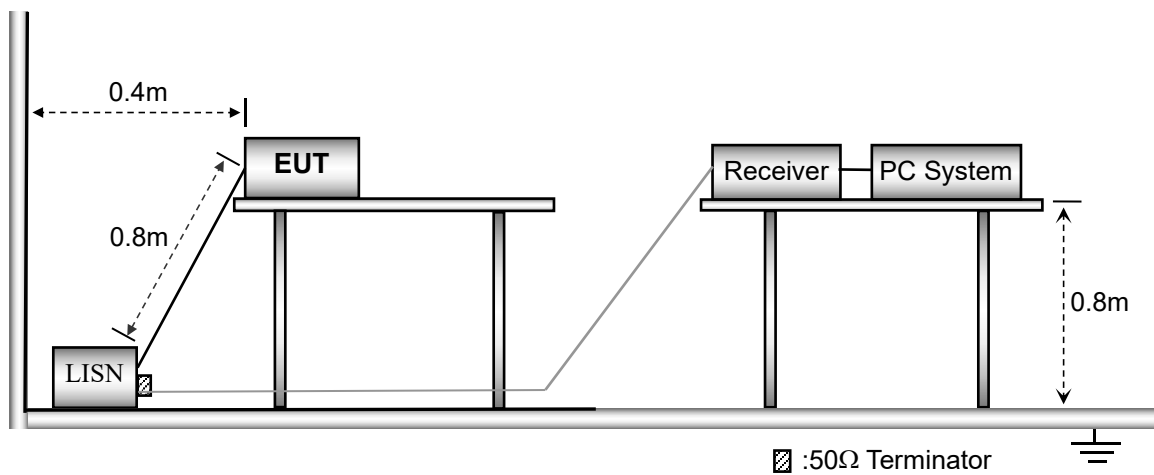
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

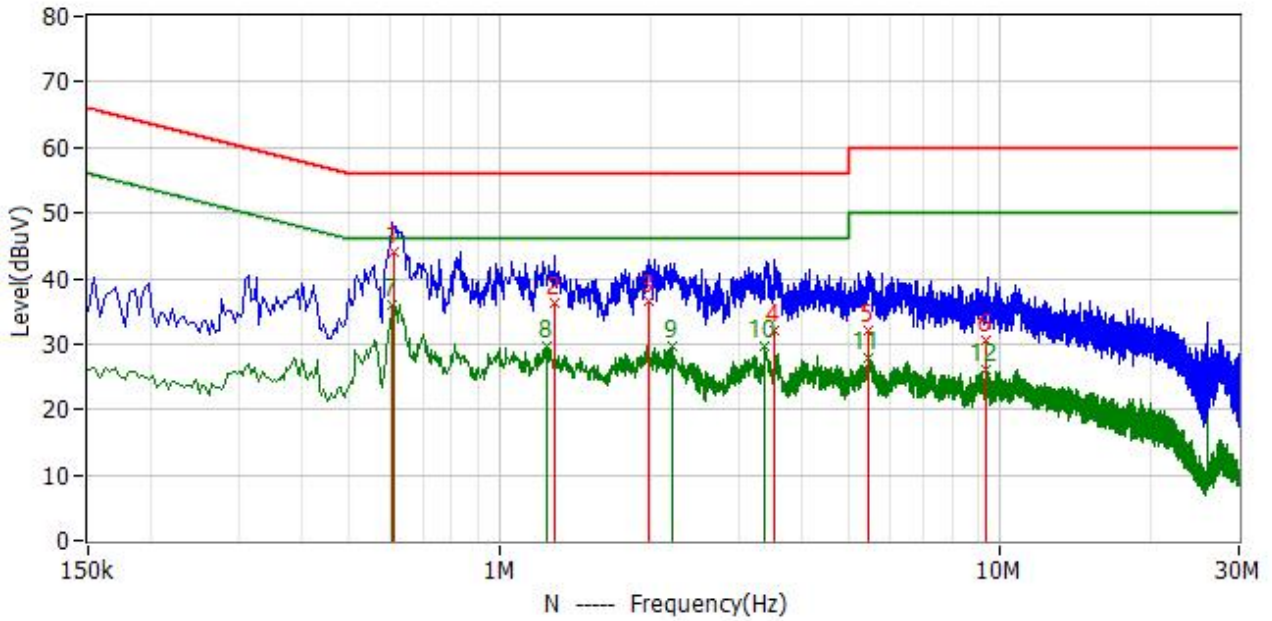

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	614.000kHz	34.3	9.7	44.0	56.0	-12.0	QP
2	1.290MHz	26.5	9.7	36.2	56.0	-19.8	QP
3	1.990MHz	26.8	9.7	36.5	56.0	-19.5	QP
4	3.522MHz	22.3	9.8	32.1	56.0	-23.9	QP
5	5.438MHz	22.3	9.8	32.1	60.0	-27.9	QP
6	9.398MHz	20.7	9.9	30.6	60.0	-29.4	QP
7*	610.000kHz	26.2	9.7	35.9	46.0	-10.1	AV
8*	1.238MHz	20.0	9.7	29.7	46.0	-16.3	AV
9*	2.214MHz	20.0	9.7	29.7	46.0	-16.3	AV
10*	3.390MHz	19.9	9.8	29.7	46.0	-16.3	AV
11*	5.446MHz	18.2	9.8	28.0	50.0	-22.0	AV
12*	9.394MHz	16.2	9.9	26.1	50.0	-23.9	AV

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

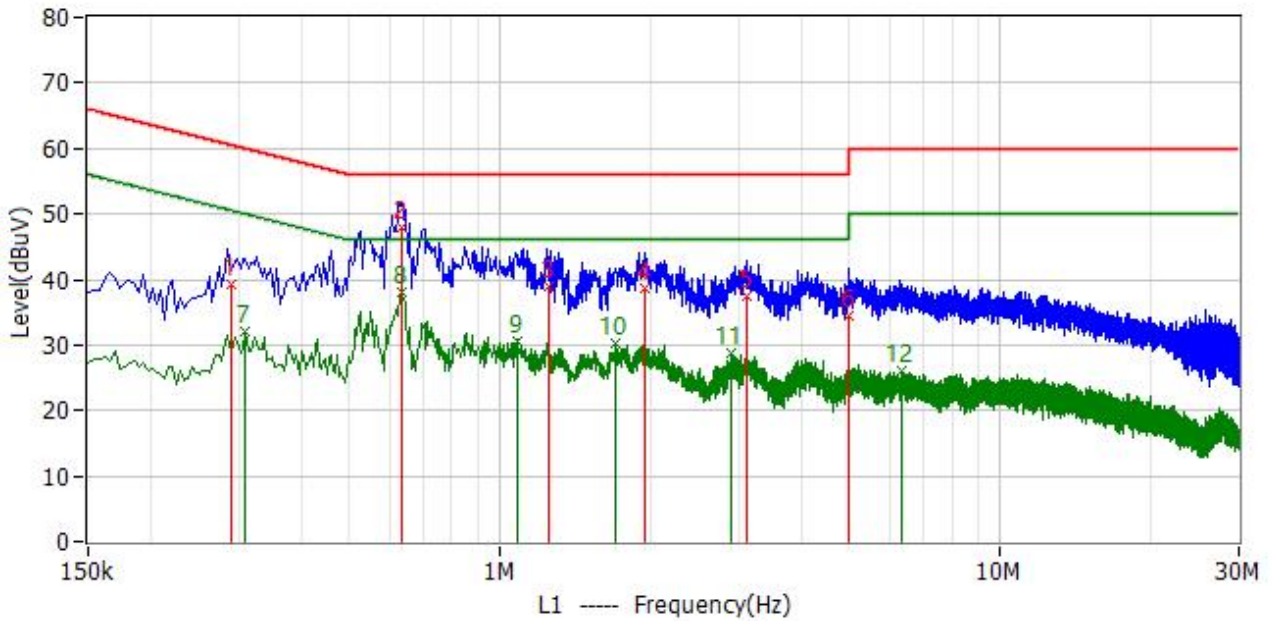

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	290.000kHz	29.3	10.1	39.4	60.5	-21.1	QP
2	638.000kHz	38.1	9.7	47.8	56.0	-8.2	QP
3	1.254MHz	29.3	9.8	39.1	56.0	-16.9	QP
4	1.942MHz	28.9	9.8	38.7	56.0	-17.3	QP
5	3.118MHz	27.6	9.9	37.5	56.0	-18.5	QP
6	4.978MHz	24.6	9.9	34.5	56.0	-21.5	QP
7*	310.000kHz	21.9	10.1	32.0	50.0	-17.9	AV
8*	634.000kHz	28.5	9.7	38.2	46.0	-7.8	AV
9*	1.078MHz	20.9	9.8	30.7	46.0	-15.3	AV
10*	1.706MHz	20.5	9.8	30.3	46.0	-15.7	AV
11*	2.902MHz	18.9	9.9	28.8	46.0	-17.2	AV
12*	6.374MHz	16.3	9.8	26.1	50.0	-23.9	AV

APPENDIX SUMMARY




Project No.	WTX24X03047639W	Test Engineer	BAldi Zhong
Start date	2024/3/20	Finish date	2024/3/25
Temperature	21.9°C	Humidity	57%
RF specifications	U-NII		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant




APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	4.62	11
	5200	4.66	11
	5240	4.58	11
802.11n-HT20	5180	3.58	11
	5200	3.69	11
	5240	3.78	11
802.11n-HT40	5190	0.59	11
	5230	0.69	11
802.11ac-VHT80	5210	-3.59	11

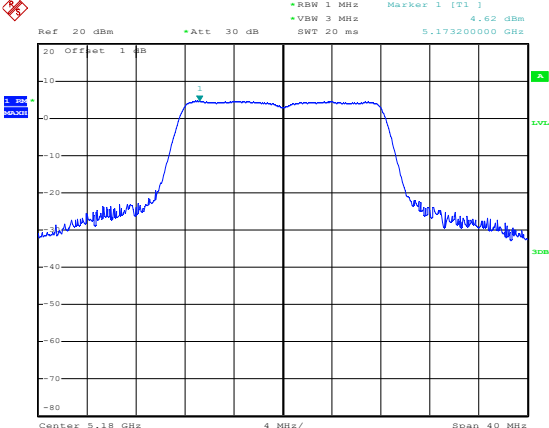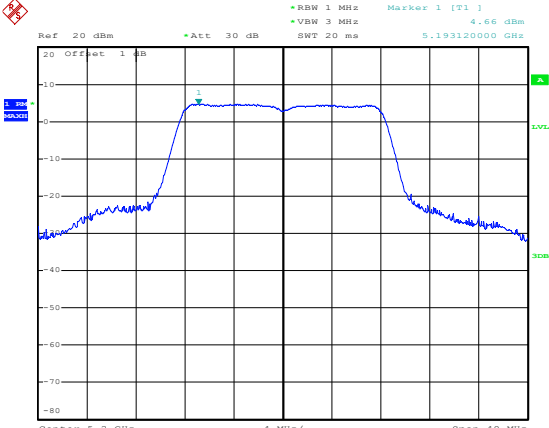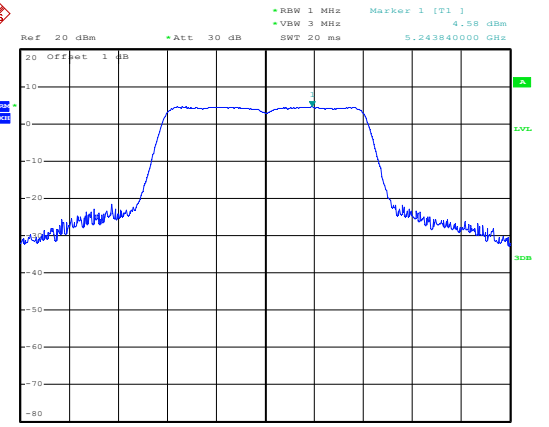5150-5250MHz

<p>802.11a-Low</p>	 <p>Date: 25.MAR.2024 15:14:57</p>
<p>802.11a-Middle</p>	 <p>Date: 25.MAR.2024 15:15:27</p>
<p>802.11a-High</p>	 <p>Date: 25.MAR.2024 15:15:43</p>
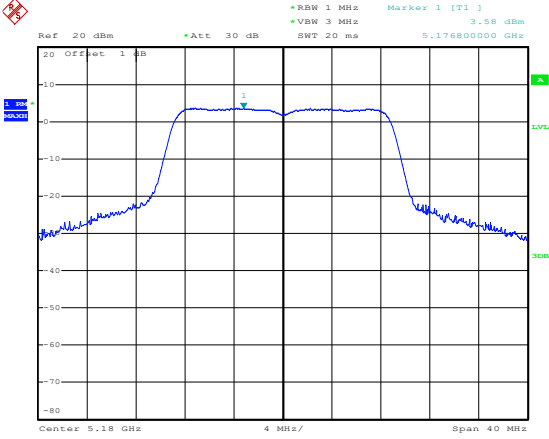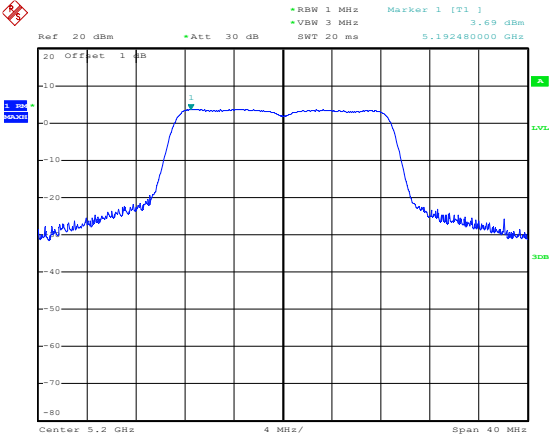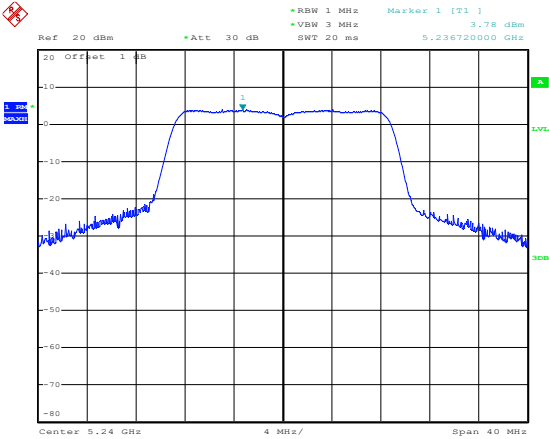
<p>802.11n-HT20-Low</p>	 <p>Date: 25.MAR.2024 15:16:21</p>
<p>802.11n-HT20-Middle</p>	 <p>Date: 25.MAR.2024 15:16:53</p>
<p>802.11n-HT20-High</p>	 <p>Date: 25.MAR.2024 15:17:20</p>

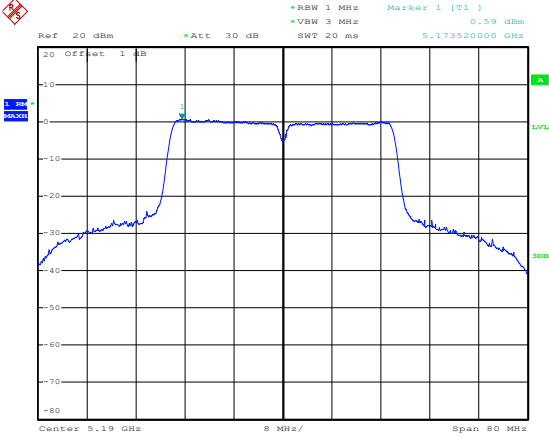
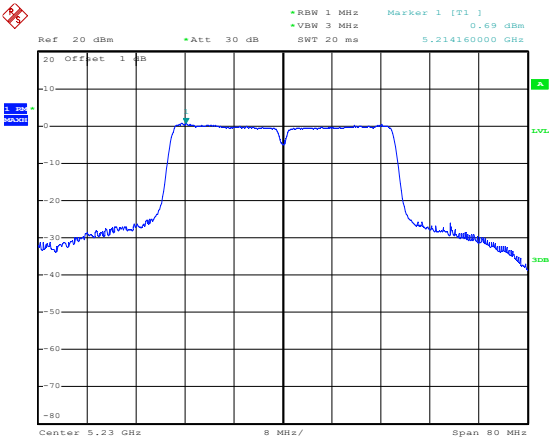
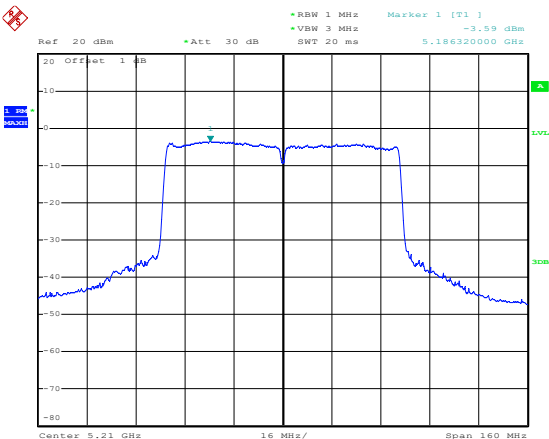
<p>802.11n-HT40-Low</p>	 <p>Date: 25.MAR.2024 15:18:01</p>
<p>802.11n-HT40-High</p>	 <p>Date: 25.MAR.2024 15:18:34</p>
<p>802.11ac-VHT80-Low</p>	 <p>Date: 25.MAR.2024 15:18:59</p>

APPENDIX B


Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.70	17.28	Pass
	5200	21.10	17.28	Pass
	5240	21.80	17.36	Pass
802.11n-HT20	5180	31.44	18.24	Pass
	5200	27.24	18.32	Pass
	5240	29.04	18.24	Pass
802.11n-HT40	5190	44.20	37.92	Pass
	5230	43.40	37.92	Pass
802.11ac-VHT80	5210	86.40	77.12	Pass

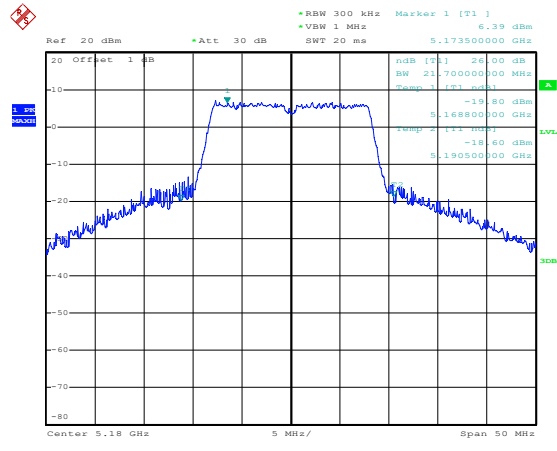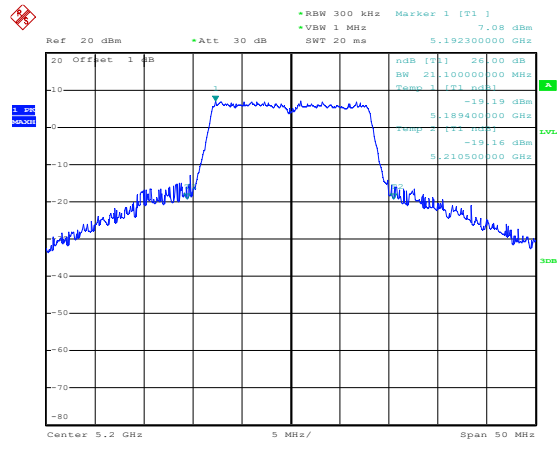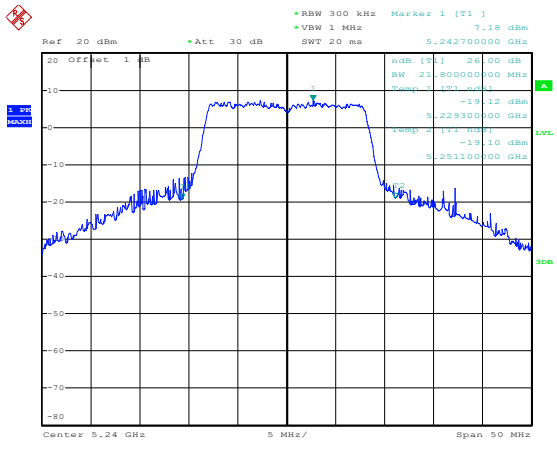-26 dBm
5150-5250MHz


<p>802.11a-Low</p>	 <p>Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 6.39 dBm VBW 1 MHz SWT 20 ms 5.173500000 GHz</p> <p>20 Offset 1 dB hdB [T1] 26.00 dB BW 21.700000000 MHz Span 1.073 GHz -19.80 dBm 5.168800000 GHz Temp 2.113 MHz -18.60 dBm 5.190500000 GHz</p> <p>Center 5.18 GHz 5 MHz/ Span 50 MHz</p> <p>Date: 25.MAR.2024 15:20:27</p>
<p>802.11a-Middle</p>	 <p>Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 7.08 dBm VBW 1 MHz SWT 20 ms 5.192300000 GHz</p> <p>20 Offset 1 dB hdB [T1] 26.00 dB BW 21.100000000 MHz Span 1.073 GHz -19.19 dBm 5.189400000 GHz Temp 2.113 MHz -19.16 dBm 5.210500000 GHz</p> <p>Center 5.2 GHz 5 MHz/ Span 50 MHz</p> <p>Date: 25.MAR.2024 15:20:43</p>
<p>802.11a-High</p>	 <p>Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 7.18 dBm VBW 1 MHz SWT 20 ms 5.242700000 GHz</p> <p>20 Offset 1 dB hdB [T1] 26.00 dB BW 21.800000000 MHz Span 1.073 GHz -19.12 dBm 5.229300000 GHz Temp 2.113 MHz -19.10 dBm 5.251100000 GHz</p> <p>Center 5.24 GHz 5 MHz/ Span 50 MHz</p> <p>Date: 25.MAR.2024 15:21:04</p>

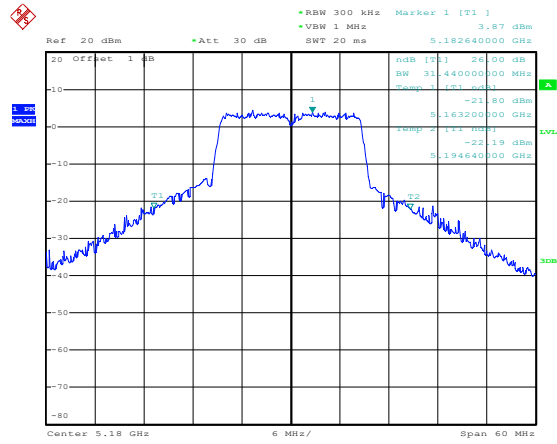802.11n-HT20-Low




Date: 25.MAR.2024 15:22:02

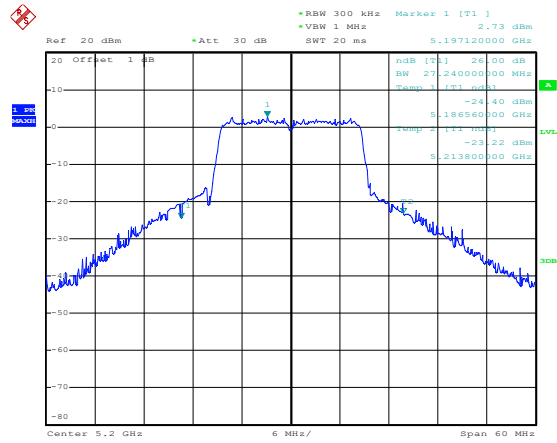802.11n-HT20-Middle




Date: 25.MAR.2024 15:22:18

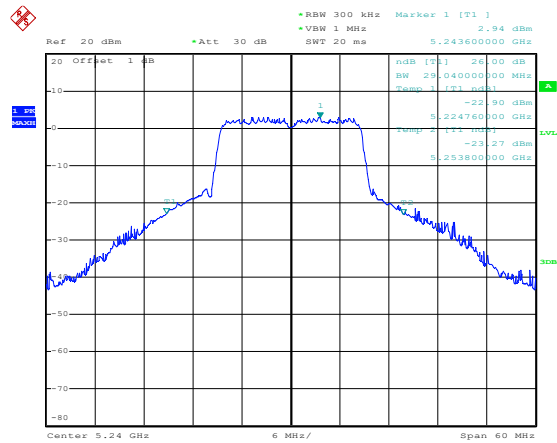802.11n-HT20-High




Date: 25.MAR.2024 15:22:39

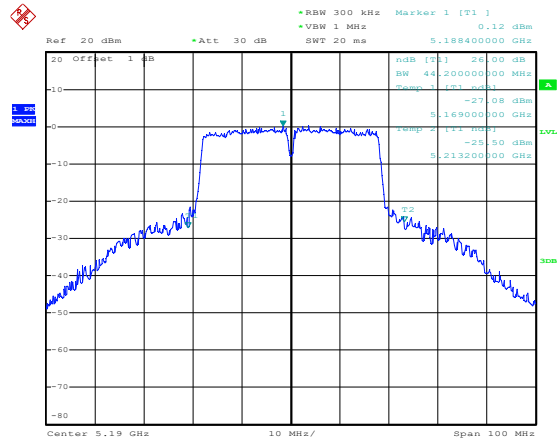802.11n-HT40-Low




Date: 25.MAR.2024 15:24:17

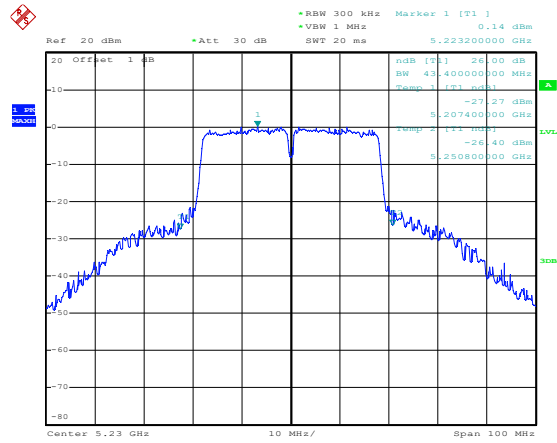802.11n-HT40-High



Date: 25.MAR.2024 15:24:34

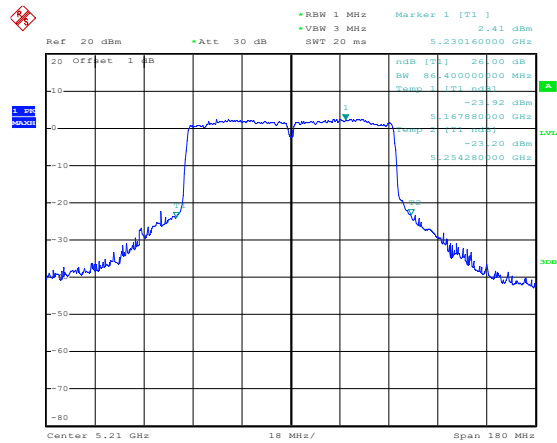802.11ac-VHT80-Low




Date: 25.MAR.2024 15:25:52

99%
5150-5250MHz


<p>802.11a-Low</p>	<p>Date: 25.MAR.2024 15:28:11</p>
<p>802.11a-Middle</p>	<p>Date: 25.MAR.2024 15:28:38</p>
<p>802.11a-High</p>	<p>Date: 25.MAR.2024 15:29:42</p>

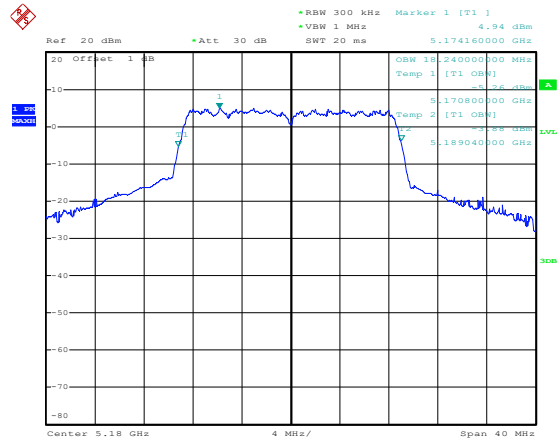802.11n-HT20-Low




Date: 25.MAR.2024 15:30:14

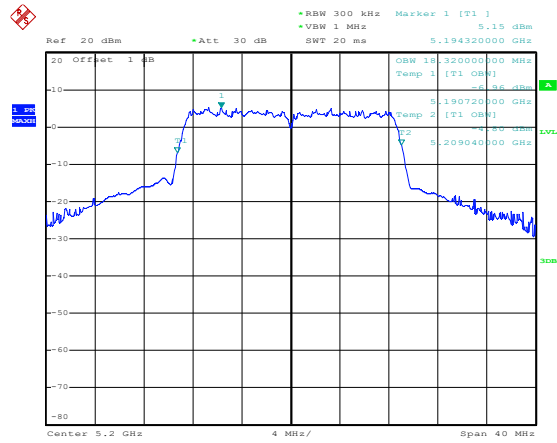802.11n-HT20-Middle






Date: 25.MAR.2024 15:30:33

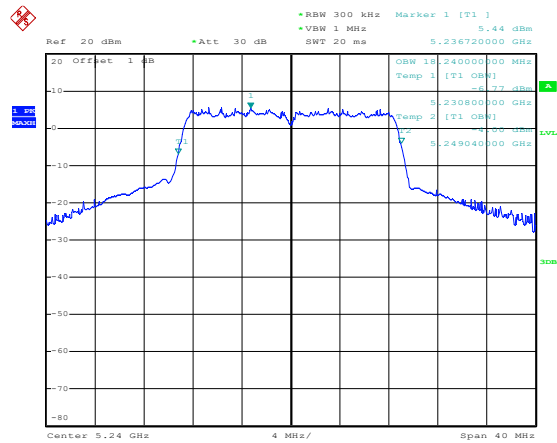802.11n-HT20-High



Date: 25.MAR.2024 15:30:53

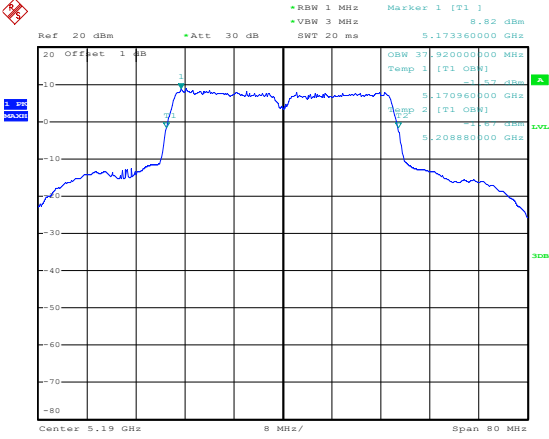
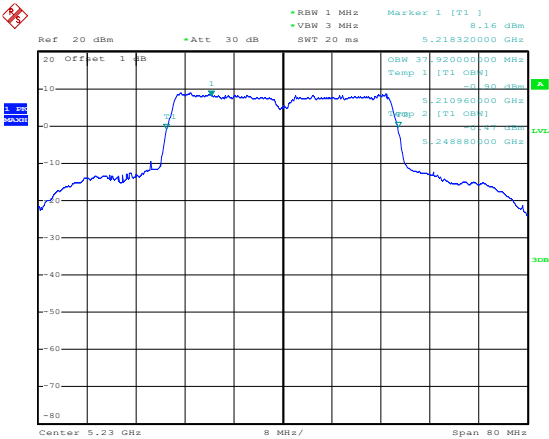
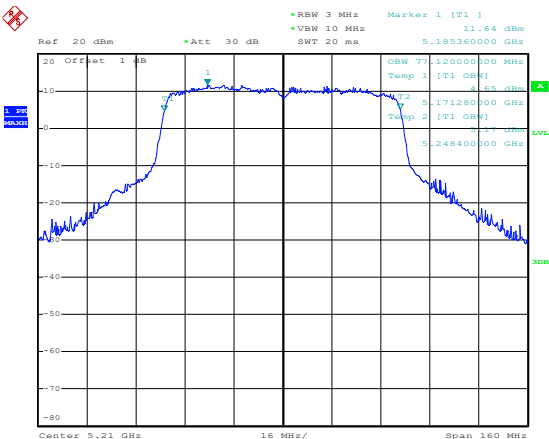
<p>802.11n-HT40-Low</p>	 <p>Date: 25.MAR.2024 15:31:17</p>
<p>802.11n-HT40-High</p>	 <p>Date: 25.MAR.2024 15:32:12</p>
<p>802.11ac-VHT80-Low</p>	 <p>Date: 25.MAR.2024 15:33:23</p>




APPENDIX C




Maximum Conducted Output Power

U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	15.75	23.98
	5200	15.81	23.98
	5240	15.85	23.98
802.11n-HT20	5180	14.86	23.98
	5200	15.08	23.98
	5240	15.17	23.98
802.11n-HT40	5190	14.38	23.98
	5230	14.65	23.98
802.11ac-VHT80	5210	13.58	23.98

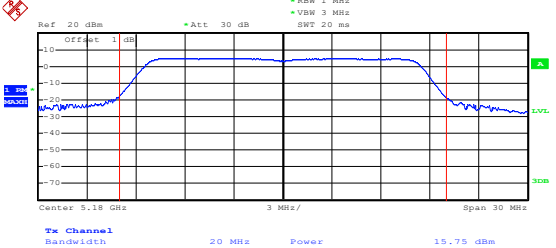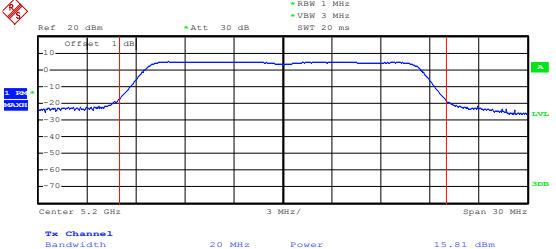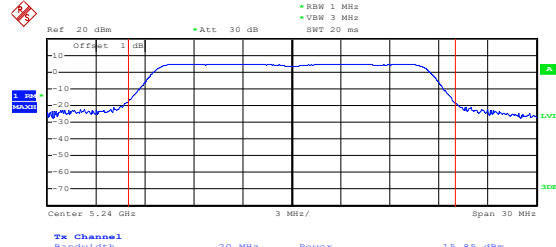5150-5250MHz

<p>802.11a-Low</p>	 <p>Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms</p> <p>Center: 5.18 GHz, Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz, Power: 15.75 dBm</p> <p>Date: 25.MAR.2024 15:06:38</p>
<p>802.11a-Middle</p>	 <p>Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms</p> <p>Center: 5.2 GHz, Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz, Power: 15.81 dBm</p> <p>Date: 25.MAR.2024 15:07:25</p>
<p>802.11a-High</p>	 <p>Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms</p> <p>Center: 5.24 GHz, Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz, Power: 15.85 dBm</p> <p>Date: 25.MAR.2024 15:07:42</p>
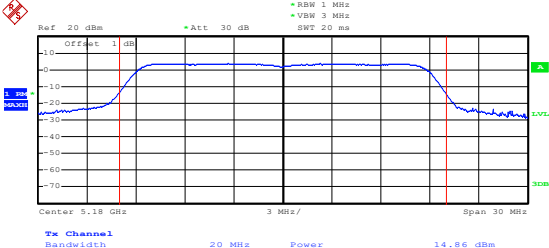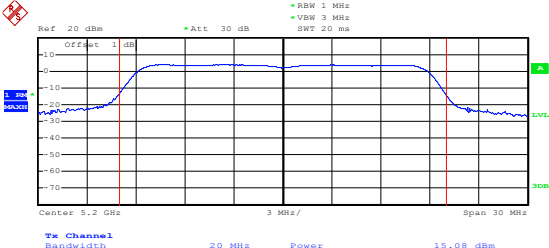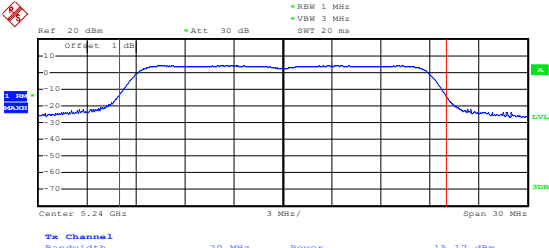
<p>802.11n-HT20-Low</p>	 <p>Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms</p> <p>Center: 5.18 GHz Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz Power: 14.86 dBm</p> <p>Date: 25.MAR.2024 15:08:02</p>
<p>802.11n-HT20-Middle</p>	 <p>Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms</p> <p>Center: 5.2 GHz Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz Power: 15.08 dBm</p> <p>Date: 25.MAR.2024 15:09:00</p>
<p>802.11n-HT20-High</p>	 <p>Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms</p> <p>Center: 5.24 GHz Span: 30 MHz</p> <p>Tx Channel Bandwidth: 20 MHz Power: 15.17 dBm</p> <p>Date: 25.MAR.2024 15:09:16</p>
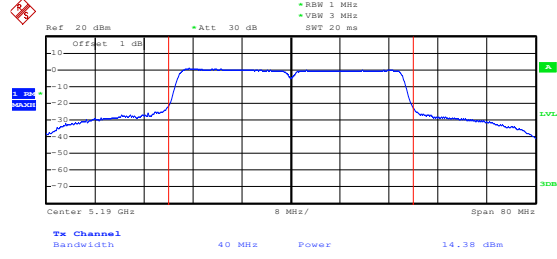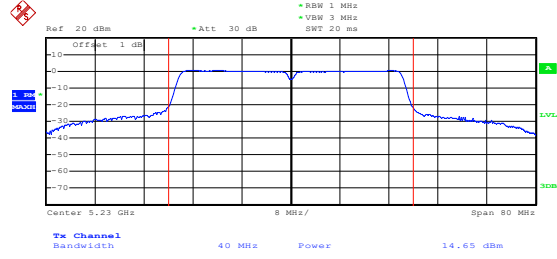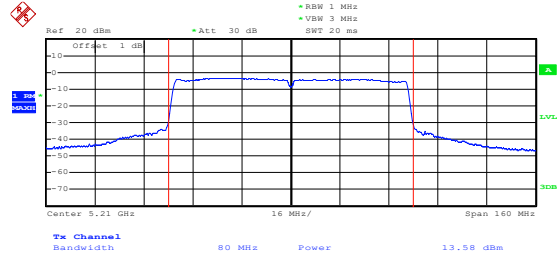
<p>802.11n-HT40-Low</p>	 <p>Date: 25.MAR.2024 15:09:44</p>
<p>802.11n-HT40-High</p>	 <p>Date: 25.MAR.2024 15:10:42</p>
<p>802.11ac-VHT80-Low</p>	 <p>Date: 25.MAR.2024 15:11:24</p>

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	1582	0.3043
100%		-20	1581	0.3041
100%		-10	1599	0.3075
100%		0	1591	0.3060
100%		+10	1593	0.3063
100%		+20	1592	0.3062
100%		+30	1595	0.3067
100%		+40	1599	0.3075
100%		+50	1590	0.3059
Low Battery power		3.4	+20	1582
High Battery power	4.2	+20	1581	0.3041

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****