

FCC Test Report

Report No.: RF180206E02

FCC ID: 2ACH3UKAZA2A0

Test Model: UKAZA2A001

Received Date: Feb. 06, 2018

Test Date: Feb. 08, 2018

Issued Date: Feb. 26, 2018

Applicant: ALPS ELECTRIC (NORTH AMERICA), INC.

Address: 1500 Atlantic Boulevard, Auburn Hills, Michigan 48326, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	7
3.2.1 Test Mode Applicability and Tested Channel Detail	8
3.3 Description of Support Units	9
3.3.1 Configuration of System under Test	9
3.4 General Description of Applied Standards	10
4 Test Types and Results	11
4.1 Radiated Power and Unwanted Emission Measurement	11
4.1.1 Limits of Radiated Power and Unwanted Emission Measurement	11
4.1.2 Test Instruments	12
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	17
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Occupied Bandwidth Measurement	24
4.2.1 Test Setup	24
4.2.2 Test Instruments	24
4.2.3 Test Procedure	24
4.2.4 Deviation from Test Standard	24
4.2.5 EUT Operating Conditions	24
4.2.6 Test Results	25
4.3 Frequency Stability Measurement	26
4.3.1 Limits of Conducted Emission Measurement	26
4.3.2 Test Instruments	26
4.3.3 Test Procedure	26
4.3.4 Test Setup	27
4.3.5 Test Results	27
5 Pictures of Test Arrangements	28
Appendix – Information on the Testing Laboratories	29

Release Control Record

Issue No.	Description	Date Issued
RF180206E02	Original release.	Feb. 26, 2018

1 Certificate of Conformity

Product: Ultra Short Range Radar

Brand: ALPS

Test Model: UKAZA2A001

Sample Status: ENGINEERING SAMPLE

Applicant: ALPS ELECTRIC (NORTH AMERICA), INC.

Test Date: Feb. 08, 2018

Standards: 47 CFR FCC Part 95, Subpart M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Mary Ko , **Date:** Feb. 26, 2018
Mary Ko / Specialist

Approved by : May Chen , **Date:** Feb. 26, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 95, Subpart M			
FCC Clause	Test Item	Result	Remarks
95.3367 (a)/(b)	Equivalent Isotropically Radiated Power (EIRP) Test	PASS	Meet the requirement of limit.
95.3379(a)	Unwanted Emission Test	PASS	Meet the requirement of limit.
95.3379(b)	Frequency Stability Test	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth Measurement	PASS	Meet the requirement of limit.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Ultra Short Range Radar
Brand	ALPS
Test Model	UKAZA2A001
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc
Modulation Type	FMCW
Operating Frequency	77 ~ 80.06GHz
Emission designator	2G96F1N
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The antenna provided to the EUT, please refer to the following table:

Antenna Type	Connector Type	Frequency range (GHz)
Patch Antenna	none	77 ~ 81

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

Frequency range is 77~80.06GHz provided for test.

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	FS	OB	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge **RE<1G**: Radiated Emission below 1GHz Measurement

FS: Frequency Stability

OB: Occupied Bandwidth measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (system)	TESTED BY
RE\geq1G	23deg. C, 68%RH 21deg. C, 68%RH	DC 12V	Weiwei Lo
RE<1G	23deg. C, 67%RH	DC 12V	Weiwei Lo
FS	25deg. C, 68%RH	DC 12V	Weiwei Lo
OB	25deg. C, 68%RH	DC 12V	Weiwei Lo

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	DC Power Supply	Topward	6603D	795558	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client

3.3.1 Configuration of System under Test

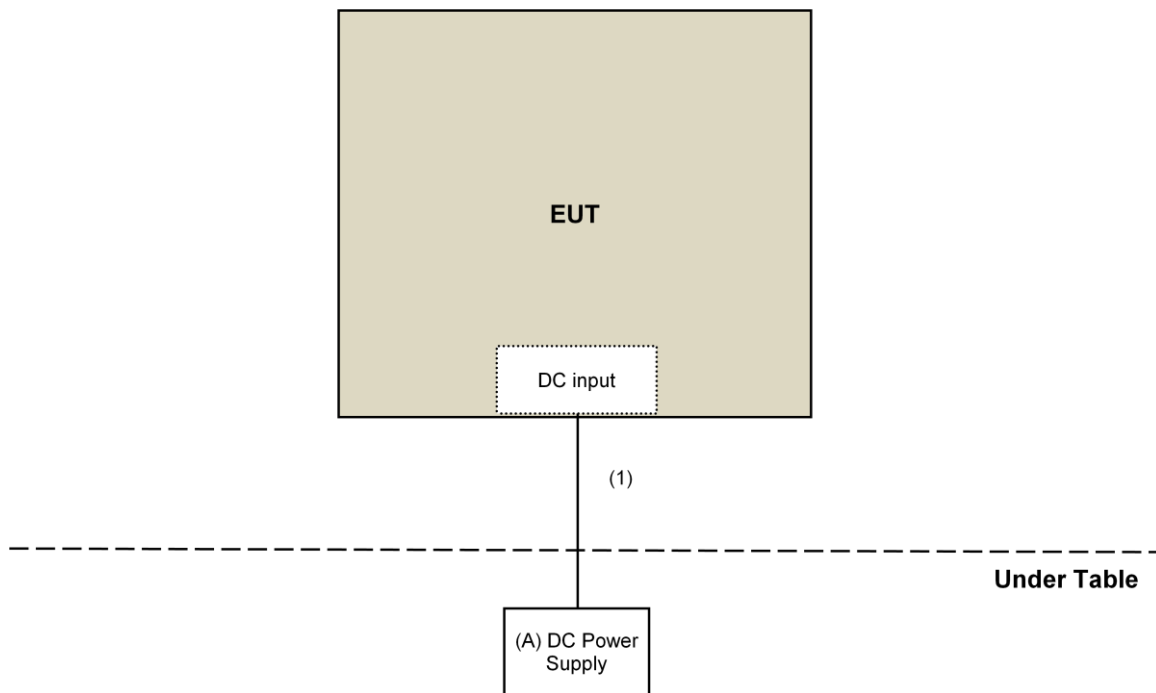

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 95, Subpart M

ANSI 63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Power and Unwanted Emission Measurement

4.1.1 Limits of Radiated Power and Unwanted Emission Measurement

According to 95.3367 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (GHz)	Equivalent Isotropically Radiated Power (EIRP)	
	Peak	Average
76 ~ 81	55 dBm/MHz	50 dBm/MHz

According to 95.3379 the power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:

(1) Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The tighter limit applies at the band edges.
2. The limits are based on the frequency of the unwanted emissions and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
3. The emissions limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9.0-90.0 kHz, 110.0-490.0 kHz, and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector with a 1 MHz RBW.

(2) The power density of radiated emissions outside the 76-81 GHz band above 40.0 GHz shall not exceed the following, based on measurements employing an average detector with a 1 MHz RBW:

(i) For radiated emissions outside the 76-81 GHz band between 40 GHz and 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 600 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.

(ii) For radiated emissions above 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 1000 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.

(3) For field disturbance sensors and radar systems operating in the 76-81 GHz band, the spectrum shall be investigated up to 231.0 GHz.

4.1.2 Test Instruments

Below 40GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Loop Antenna ^(*) TESEQ	HLA 6121	45745	May 19, 2017	May 18, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Jan. 29, 2018 Jan. 29, 2018 Jan. 29, 2018	Jan. 28, 2019 Jan. 28, 2019 Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Feb. 08, 2018

Above 40GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 21, 2017	Nov. 20, 2018
Spectrum Analyzer Keysight	N9030A	MY55410176	July 19, 2017	July 18, 2018
*Millimeter-Wave SA Extension Module (50~75 GHz) Keysight	N9029AV15	US54250107	Oct. 17, 2017	Oct. 16, 2019
*Millimeter-Wave SA Extension Module (75~110 GHz) Keysight	N9029AV10	US53250010	Oct. 17, 2017	Oct. 16, 2019
*Waveguide Harmonic Mixer Keysight	M1971E	MY55270157	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (33~55GHz) OML	M22HWD	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna (33~55GHz) OML	M22RH	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (50~75GHz) OML	M15RH	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna (50~75GHz) OML	M15HWD	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (75~110GHz) OML	M10HWD	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna (75~110GHz) OML	M10RH	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (110~170GHz) OML	M06RH	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna(110~170GHz) OML	M06HWD	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (140~220GHz) OML	M05HWD	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna (140~220GHz) OML	M05RH	110215-1	Oct. 17, 2017	Oct. 16, 2019
*Harmonic Mixer (220~325GHz) OML	M03HWA	M03HWA_140505-1	Oct. 17, 2017	Oct. 16, 2019
*Horn Antenna (220~325GHz) OML	M03RH	M03RH_140508-1	Oct. 17, 2017	Oct. 16, 2019
*Diplexer EMCI	DPL26	DPL26_01	Oct. 17, 2017	Oct. 16, 2019
*Diplexer EMCI	DPL26	DPL26_02	Oct. 17, 2017	Oct. 16, 2019
*Precision 30dB Attenuator Keysight	11708A	MY55260015	Oct. 17, 2017	Oct. 16, 2019
*Zero-Bias Detector (50~75GHz) Vdi	WR15ZBD	WR15R5 1-30	Oct. 17, 2017	Oct. 16, 2019
4CH Infiniivision Oscilloscope Keysight	DSOX6004A	MY55190202	Dec. 13, 2017	Dec. 12, 2018
*WR15CH Conical Horn Keysight	WR15CH	WR15CH-01	Oct. 17, 2017	Oct. 16, 2019
*WR10CH Conical Horn Keysight	WR10CH	WR10CH-01	Oct. 17, 2017	Oct. 16, 2019
*Millimeter-Wave Signal Generator Frequency Extension Module (50~75 GHz) Keysight	E8257DV15	US54250106	Oct. 17, 2017	Oct. 16, 2019
*Millimeter-Wave Signal Generator Frequency Extension Module (75~110 GHz) Keysight	E8257DV10	US53250009	Oct. 17, 2017	Oct. 16, 2019
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4
4. The CANADA Site Registration No. is IC 7450H-2.
5. Test Date: Feb. 08, 2018

4.1.3 Test Procedures

For Radiated emission: Below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission: 30 MHz ~ 40GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK) at frequency from 1GHz to 40GHz.
3. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Average detection (AV) at frequency from 1GHz to 40GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. Shorter measurement distances may be used to improve the measurement system's noise floor. As ANSI C63.26 description is based on the measurement in distance of 3 meters, the data obtained at 0.3-meter distance was extrapolate results to the 3-m distance:

Test value at 3-meter distance (dBuV)

= Test value at 0.3 meter distance (dBuV) - 20log(3/0.3)(dB)

= Test value at 0.3meter distance (dBuV) - 20(dB).

* Measurements made at 0.3 meter distance. Test value converted to account for 3-meter measurement distance.

For Radiated emission: Above 40GHz

External mixers are utilized.

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The distance at which limits are typically specified is 3 meter; however, closer measurement distances may be utilized.
- c. Begin handheld measurements with the test antenna (horn) at a distance of 1 meter from the EUT, in a horizontally polarized position. Slowly adjust its position, entirely covering the plane 1 meter from the EUT.
- d. Repeat (b) with the horn in a vertically polarized position.
- e. If the emission cannot be detected at 1 meter, reduce the RBW in order to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.
- f. Note the maximum level indicated on the Spectrum Analyzer.
- g. Based on the distance at which the measurement was made and the calculated distance to the edge of the far field, determine the appropriate distance attenuation factor. Apply this factor to the calculated field strength in order to determine the equivalent field strength at the distance at which the regulatory limit is specified. Compare to the appropriate limits
- h. Repeat (a) - (f) for every emission that must be measured, up through the required frequency range of investigation

NOTE:

1. The resolution bandwidth is 8MHz and video bandwidth of test receiver/spectrum analyzer is 50MHz for Peak and Average detection for fundamental emission.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak and Average detection at frequency above 40GHz.

Far Field Boundary Calculations

The far-field boundary is given as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

where: L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters


FREQUENCY RANGE (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
77~80.06	0.023	0.00377	0.281

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

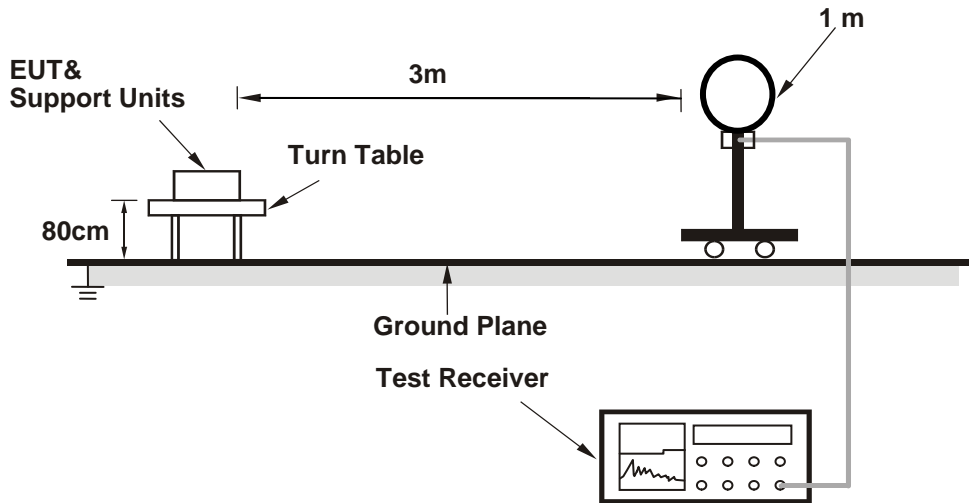

For Radiated emission 30MHz to 1GHz

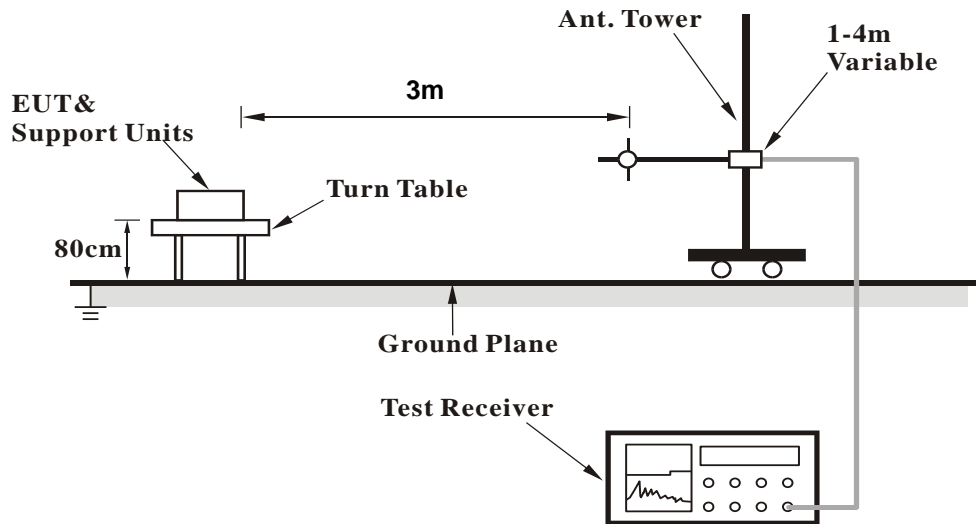

For Radiated emission above 1GHz

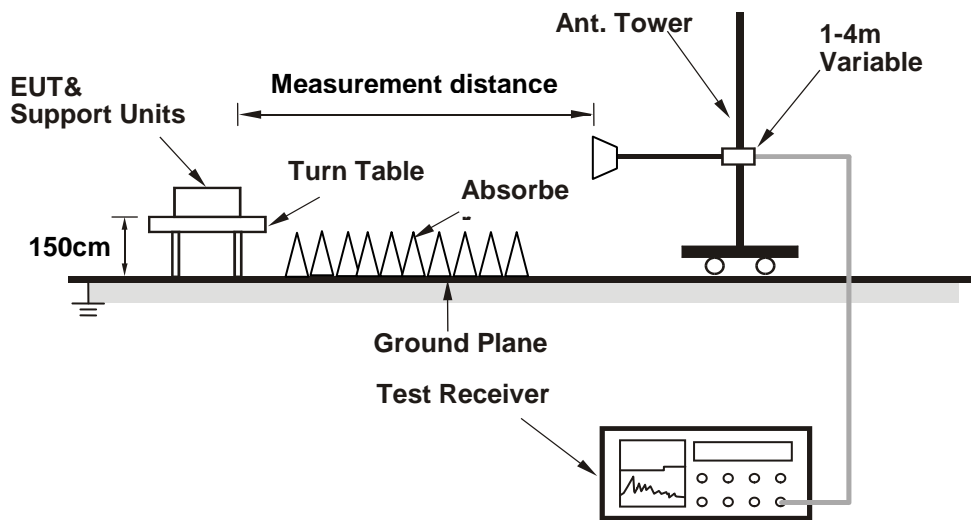

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data

FREQUENCY RANGE	1GHz ~ 18GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.86	42.3 PK	74.0	-31.7	1.00 H	133	43.6	-1.3
2	2748.86	33.3 AV	54.0	-20.7	1.00 H	133	34.6	-1.3
3	10365.41	47.8 PK	74.0	-26.2	1.50 H	258	34.6	13.2
4	10365.41	34.5 AV	54.0	-19.5	1.50 H	258	21.3	13.2
5	14399.90	55.7 PK	74.0	-18.3	1.00 H	56	39.3	16.4
6	14399.90	49.4 AV	54.0	-4.6	1.00 H	56	33.0	16.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2662.03	42.1 PK	74.0	-31.9	1.50 V	52	43.9	-1.8
2	2662.03	33.2 AV	54.0	-20.8	1.50 V	52	35.0	-1.8
3	7504.98	45.7 PK	74.0	-28.3	2.00 V	191	35.8	9.9
4	7504.98	31.8 AV	54.0	-22.2	2.00 V	191	21.9	9.9
5	12671.94	48.2 PK	74.0	-25.8	2.00 V	241	35.5	12.7
6	12671.94	35.3 AV	54.0	-18.7	2.00 V	241	22.6	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

FREQUENCY RANGE	18GHz ~ 40GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
------------------------	---------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	25233.06	39.0 PK	74.0	-35.0	1.00 H	72	56.3	-17.3
2	25233.06	33.1 AV	54.0	-20.9	1.00 H	72	50.4	-17.3
3	30274.45	39.4 PK	74.0	-34.6	1.00 H	100	58.0	-18.6
4	30274.45	34.0 AV	54.0	-20.0	1.00 H	100	52.6	-18.6
5	36057.14	43.0 PK	74.0	-31.0	1.00 H	181	60.9	-17.9
6	36057.14	37.0 AV	54.0	-17.0	1.00 H	181	54.9	-17.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	21744.11	36.9 PK	74.0	-37.1	1.50 V	62	56.0	-19.1
2	21744.11	32.9 AV	54.0	-21.1	1.50 V	62	52.0	-19.1
3	31579.78	40.4 PK	74.0	-33.6	1.00 V	147	58.5	-18.1
4	31579.78	36.1 AV	54.0	-17.9	1.00 V	147	54.2	-18.1
5	39546.09	45.2 PK	74.0	-28.8	2.00 V	84	57.3	-12.1
6	39546.09	41.7 AV	54.0	-12.3	2.00 V	84	53.8	-12.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

FREQUENCY RANGE	40GHz ~ 100GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
------------------------	----------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL						
NO.	FREQ. RANGE (GHz)	Raw Value (dBm)	Receiver Antenna Gain (dBi)	EIRP Level (dBm)	EIRP Limit (dBm)	PASS/FAIL
1	80.048	-33.3	23.9	2.9 PK	55	PASS
2	80.048	-62.6	23.9	-26.4 AV	50	PASS
ANTENNA POLARITY & TEST DISTANCE: VERTICAL						
NO.	FREQ. RANGE (GHz)	Raw Value (dBm)	Receiver Antenna Gain (dBi)	EIRP Level (dBm)	EIRP Limit (dBm)	PASS/FAIL
1	80.048	-46.7	23.9	-10.5 PK	55	PASS
2	80.048	-75.7	23.9	-39.5 AV	50	PASS

REMARKS:

1. The measured power level is converted to EIRP using the Friis equation:

$$EIRP = \text{Raw Value} - \text{Receiver Antenna Gain} + 20 \cdot \log(4 \cdot 3.1416 \cdot D / \lambda)$$

where:

D is the measurement distance

λ is the wavelength

*Measurements made at 0.3 meter distance.

FREQUENCY RANGE	100GHz ~ 231GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
------------------------	-----------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL

NO.	FREQ. (GHz)	Raw Value (dBm)	Receiver Antenna Gain (dBi)	EIRP Level (dBm)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	PASS/FAIL
1	157	-60.7	23.7	-18.5	12.49 PK	600	PASS
2	231	-55.6	23.6	-9.9	90.482 PK	1000	PASS

ANTENNA POLARITY & TEST DISTANCE: VERTICAL

NO.	FREQ. (GHz)	Raw Value (dBm)	Receiver Antenna Gain (dBi)	EIRP Level (dBm)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	PASS/FAIL
1	157	-61.0	23.7	-18.8	11.656 PK	600	PASS
2	231	-57.3	23.6	-11.6	61.173 PK	1000	PASS

REMARKS:

1. The measured power level is converted to EIRP using the Friis equation:

$$EIRP = P_T * G_T = (P_R / G_R) * (4 * \pi * D / \lambda)^2$$

where:

PR is the power of the receive measurement

GR is the gain of the receive measurement antenna

D is the measurement distance

λ is the wavelength

*Measurements made at 1 meter distance.

Below 1GHz Data

FREQUENCY RANGE	9kHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.89	21.8 QP	43.5	-21.7	2.00 H	272	30.7	-8.9
2	324.95	27.6 QP	46.0	-18.4	1.00 H	360	34.0	-6.4
3	383.47	28.0 QP	46.0	-18.0	1.00 H	41	32.9	-4.9
4	577.52	28.9 QP	46.0	-17.1	1.50 H	66	29.5	-0.6
5	676.41	30.0 QP	46.0	-16.0	1.50 H	86	28.9	1.1
6	826.32	35.1 QP	46.0	-10.9	1.00 H	28	31.7	3.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	266.00	22.6 QP	46.0	-23.4	1.00 V	58	31.0	-8.4
2	285.79	22.8 QP	46.0	-23.2	1.00 V	56	30.4	-7.6
3	537.46	26.9 QP	46.0	-19.1	1.50 V	220	28.4	-1.5
4	619.11	28.7 QP	46.0	-17.3	1.00 V	40	28.2	0.5
5	797.71	33.2 QP	46.0	-12.8	1.00 V	0	30.2	3.0
6	878.77	32.7 QP	46.0	-13.3	1.50 V	56	28.5	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Occupied Bandwidth Measurement

4.2.1 Test Setup

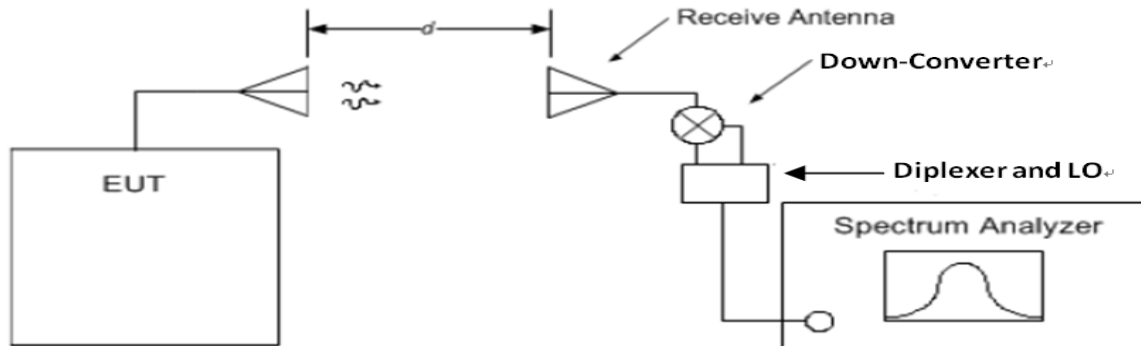

4.2.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.2.4 Deviation from Test Standard


No deviation.

4.2.5 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.6 Test Results

Frequency Range (GHz)	Occupied Bandwidth (GHz)
77 ~ 80.06	2.9598

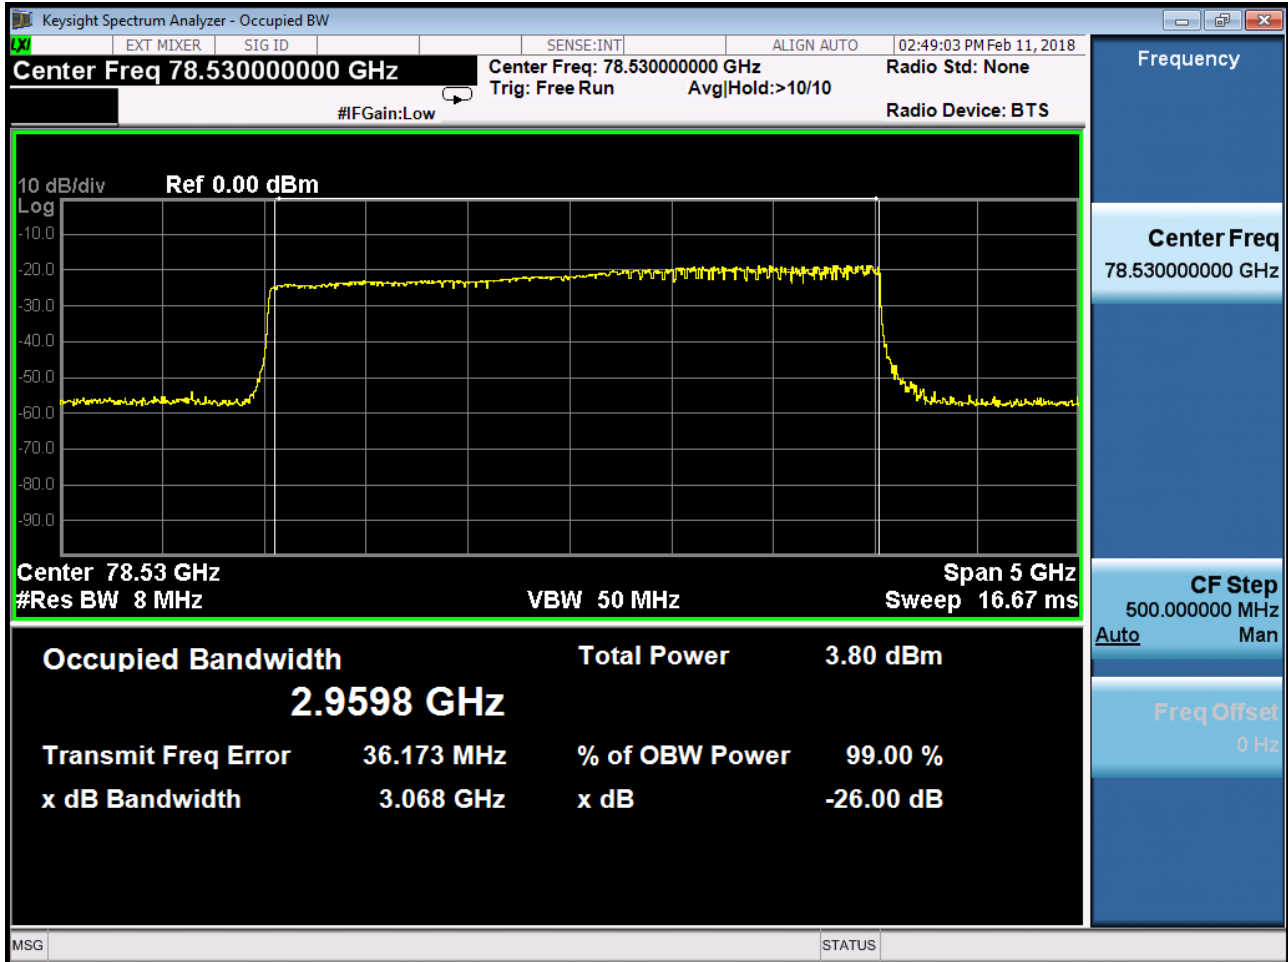

4.3 Frequency Stability Measurement

4.3.1 Limits of Conducted Emission Measurement

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation.

4.3.2 Test Instruments


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
True RMS Clamp Meter FLUKE	325	31130711WS	May 29, 2017	May 28, 2018
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 10, 2018	Jan. 09, 2019
DC Power Supply Topward	6603D	795558	NA	NA
Spectrum Analyzer Keysight	N9030A	MY55410176	July 19, 2017	July 18, 2018
*Millimeter-Wave SA Extension Module (50~75 GHz) Keysight	N9029AV15	US54250107	Oct. 17, 2017	Oct. 16, 2019
*Millimeter-Wave SA Extension Module (75~110 GHz) Keysight	N9029AV10	US53250010	Oct. 17, 2017	Oct. 16, 2019
*Waveguide Harmonic Mixer Keysight	M1971E	MY55270157	Oct. 17, 2017	Oct. 16, 2019

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 4. Tested Date: Feb. 08, 2018

4.3.3 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

4.3.4 Test Setup

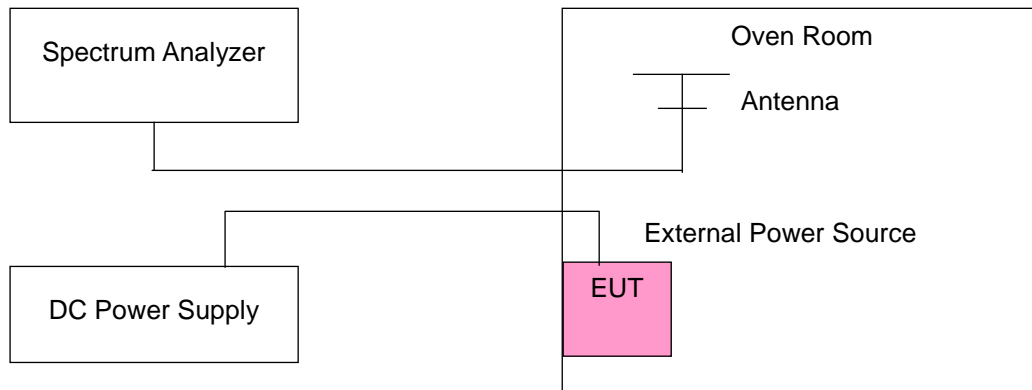

4.3.5 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 79498 MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	12	79497.8049	PASS	79497.7882	PASS	79497.737	PASS	79497.7727	PASS
40	12	79498.0364	PASS	79498.0017	PASS	79498.0002	PASS	79497.9991	PASS
30	12	79497.943	PASS	79497.9497	PASS	79497.9412	PASS	79497.9462	PASS
20	12	79497.9574	PASS	79497.9468	PASS	79497.9645	PASS	79497.9886	PASS
10	12	79498.1657	PASS	79498.1206	PASS	79498.1184	PASS	79498.1146	PASS
0	12	79497.9894	PASS	79498.0369	PASS	79497.9793	PASS	79497.9722	PASS
-10	12	79497.8028	PASS	79497.8607	PASS	79497.8117	PASS	79497.8387	PASS
-20	12	79497.9862	PASS	79497.9629	PASS	79497.9925	PASS	79497.9798	PASS

Frequency Stability Versus Voltage									
Operating Frequency: 79498 MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	13.8	79497.9624	PASS	79497.9372	PASS	79497.9596	PASS	79497.9918	PASS
	12	79497.9574	PASS	79497.9468	PASS	79497.9645	PASS	79497.9886	PASS
	10.2	79497.9495	PASS	79497.9501	PASS	79497.9548	PASS	79498.0034	PASS

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---