

FCC PART 15C TEST REPORT



Issued to

testo Instruments (Shenzhen) Co., Ltd.

For

Mobile printer for data loggers

Model Name: 0572 0576
Trade Name: Testo
Brand Name: Testo
FCC ID: 2ACVD05720576
Standard: 47 CFR Part 15 Subpart C
Test date: July 14, 2014 – July 25, 2014
Issue date: August 12, 2014

By

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District,
ShenZhen, GuangDong Province, P.R. China 518101

Tested by Cai Junlong
Cai Junlong
(Test Engineer)

Date 2014.8.12

Approved by Zeng Dexin
Zeng Dexin
(Chief Engineer)

Date 2014.8.12

Review by Peng Huarui
Peng Huarui
(Dept. Manager)

Date 2014.8.12

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate



TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 EUT DESCRIPTION.....	3
1.2 TEST STANDARDS AND RESULTS	5
1.3 FACILITIES AND ACCREDITATIONS	6
1.3.1 FACILITIES	6
1.3.2 TEST ENVIRONMENT CONDITIONS	6
1.3.3 MEASUREMENT UNCERTAINTY	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.2 RADIATED EMISSION	8
2.2.1 TEST REQUIREMENT	8
2.2.2 TEST EQUIPMENT	9
2.2.3 TEST SETUP	9
2.2.4 TEST RESULT	11
2.3 FREQUENCY TOLERANCE	14
2.3.1 TEST REQUIREMENT	14
2.3.2 TEST EQUIPMENT	14
2.3.3 TEST SETUP	14
2.3.4 TEST RESULT	14
2.4 20DB BANDWIDTH	16
2.4.1 TEST REQUIREMENT	16
2.4.2 TEST EQUIPMENT	16
2.4.3 TEST SETUP	16
2.4.4 TEST RESULT	16

Change History		
Issue	Date	Reason for change
1.0	August 12, 2014	First edition
2.0	September 10, 2014	Second edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type:	Mobile printer for data loggers
Serial No:	(n.a., marked #1 by test site)
Hardware Version:	V2.1
Software Version:	V1.0
Applicant:	testo Instruments (Shenzhen) Co., Ltd. Block A, B4 Building, China Merchants Guangming Sci&Tech Park, No.3009 Guan Guang Road, Guangming New District, Shenzhen City
Manufacturer:	testo Instruments (Shenzhen) Co., Ltd. Block A, B4 Building, China Merchants Guangming Sci&Tech Park, No.3009 Guan Guang Road, Guangming New District, Shenzhen City
Frequency Range:	13.553MHz~13.567MHz
Frequency:	13.56MHz
Channel Number:	1
Modulation Type:	ASK
Antenna Type:	FPCB Antenna
Antenna Gain:	0

Power supply:	Battery	
	Brand Name:	Springpower
	Model No.:	18650
	Serial No.:	(n.a. marked #1 by test site)
	Capacitance:	2600mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2V
Ancillary Equipment:	AC Adapter (Charger for Battery)	
	Brand Name:	SIL
	Model No.:	SSC-5W-05 050100
	Serial No.:	(n.a. marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz,200mA
	Rated Output:	≡ 5V, 1000mA

NOTE:

1. The ancillary equipment testo 184-H1 is supplied by the applicant for testing purpose.
2. The EUT is a Mobile printer for data loggers which supports NFC function. It was used to produce



report printouts in conjunction with compatible devices: testo 175/176(built during or after 2004);
testo 184(built during or after 2013).

3. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-12 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna requirement	PASS
2	15.207	Conducted Emission	(n.a.)
3	15.209 15.225(a)(b)(c)(d)	Radiated Emission	PASS
4	15.225(e)	Frequency Tolerance	PASS
5	15.215(c)	20dB Bandwidth	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.4-2009.

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.4-2009 and CISPR Publication 22:2008; the FCC registration number is 695796.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Radiated Emission:	±3.1dB
-----------------------------------	--------

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The EUT has a FPCB printed antenna for NFC module. Please refer to EUT photos for more photos.



Result: Compliant

2.2 Radiated Emission

2.2.1 Test Requirement

A. Radiated Emission <30MHz (9KHz-30MHz, H-field)

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 30 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated Spurious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;

$$3 \text{ m Limit(dBuV/m)} = 20\log(X)+40\log(30/3)= 20\log(15848)+40\log(30/3) = 124\text{dBuV}$$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency range (MHz)	Field Strength@30m		Field Strength@3m
	μV/m	dBμV/m	dBμV/m
Below 13.110	30	29.5	69.5
13.110 ~ 13.410	106	40.5	80.5
13.410 ~ 13.553	334	50.5	90.5
13.553 ~13.567	15.848	84	124
13.567 ~ 13.710	334	50.5	90.5
13.710 ~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

NOTE:

- a) Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
- b) In the emission tables above, the tighter limit applies at the band edges.

B. Radiated Emission >30MHz (30MHz-1GHz, E-field)

According to FCC section 15.205, the field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	μV/m	dBμV/m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:


- a) Field Strength (dB μ V/m) = 20*log[Field Strength (μ V/m)].
- b) In the emission tables above, the tighter limit applies at the band edges.

2.2.2 Test Equipment


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMC Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
Receiver	Narda	PMM 9060	001WX11001	2014.2.21	2015.2.20
Receiver	Narda	PMM 9010	595WX11007	2014.2.21	2015.2.20
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.2.21	2015.2.20
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.2.25	2015.2.24
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2014.2.25	2015.2.24
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2014.2.25	2015.2.24
Coaxial Cable	Morlab	EMC02	CB06	(n.a.)	(n.a.)

2.2.3 Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

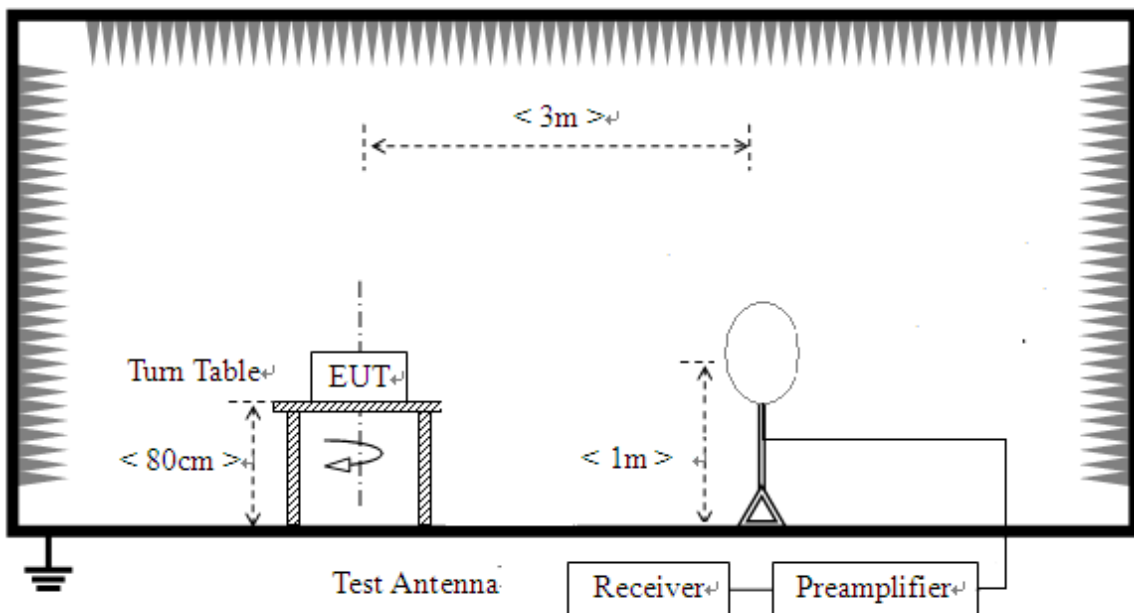

2) For radiated emissions from 30MHz to 1GHz

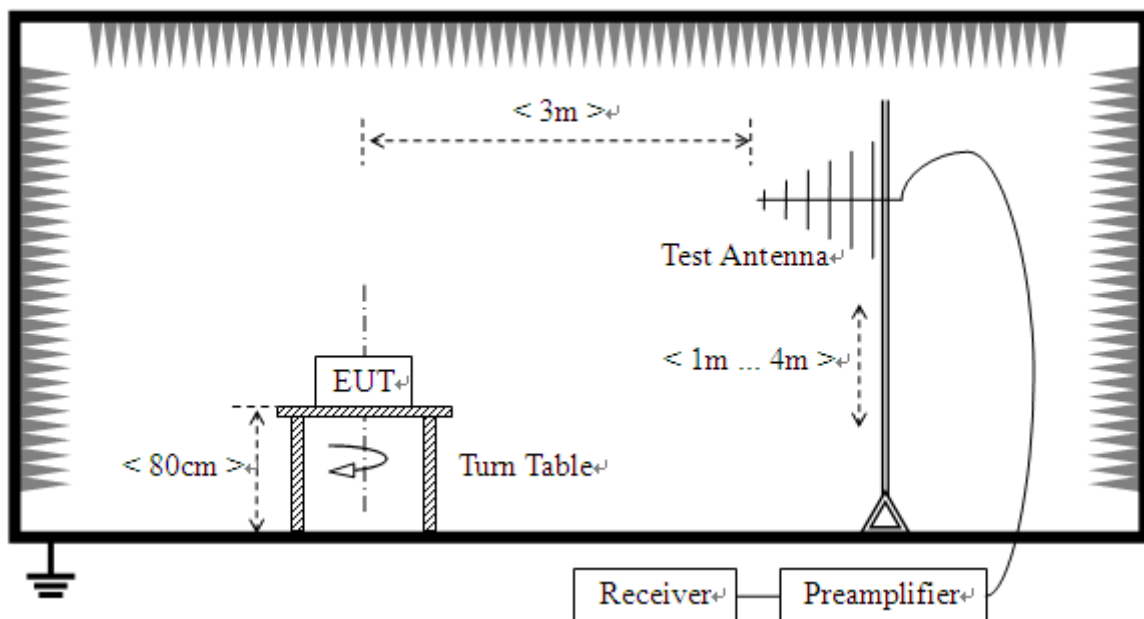

3) For radiated emissions above 1GHz

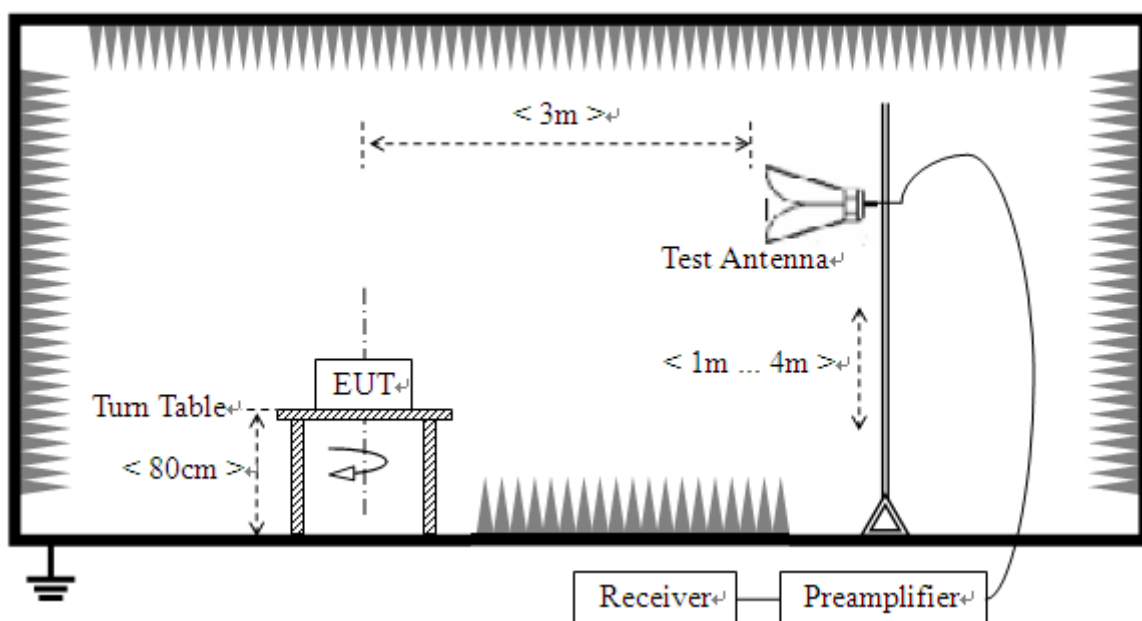


The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:


- 1) In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

2.2.4 Test Result


A. Radiated Emission <30MHz (9KHz-30MHz, H-field)

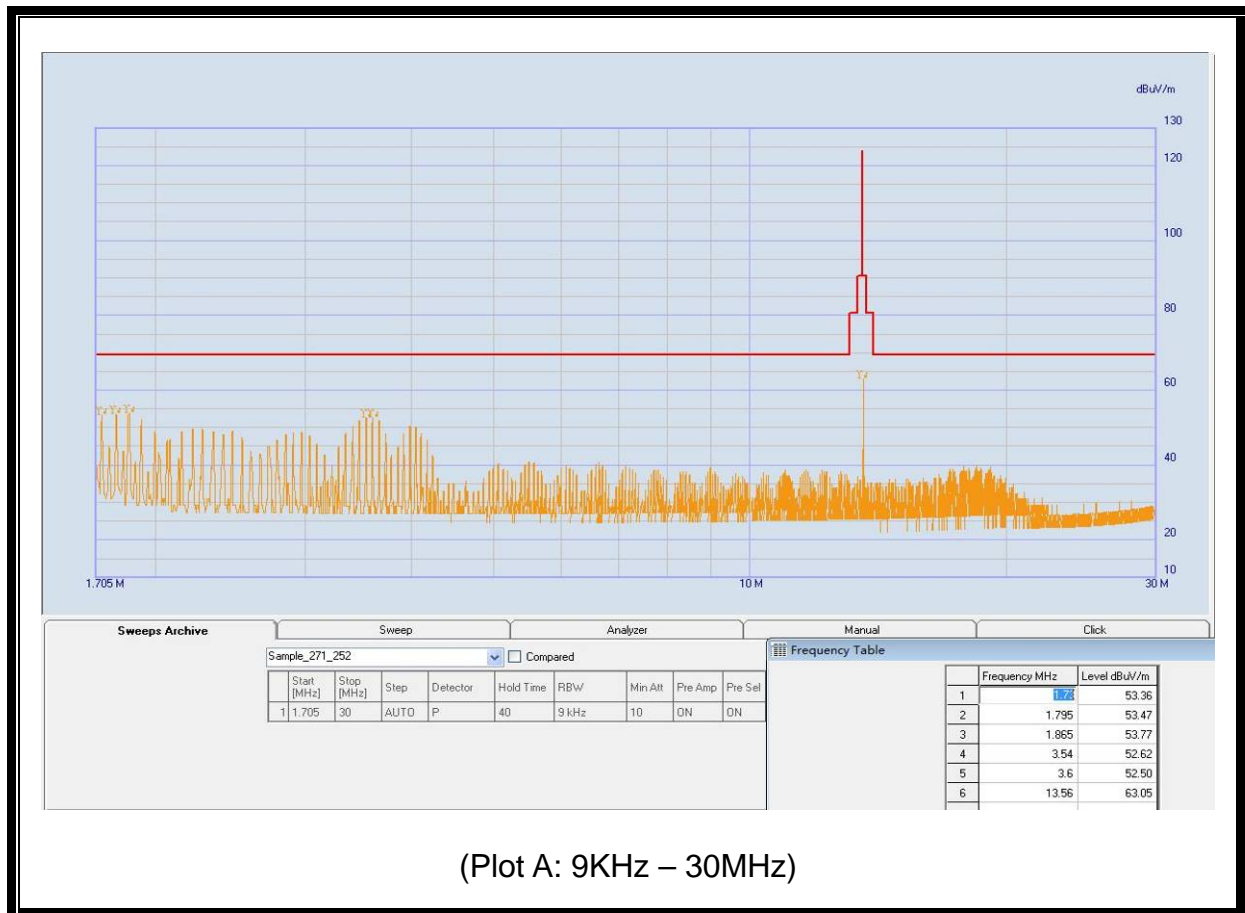

B. Radiated Emission >30MHz (30MHz-1GHz, E-field)

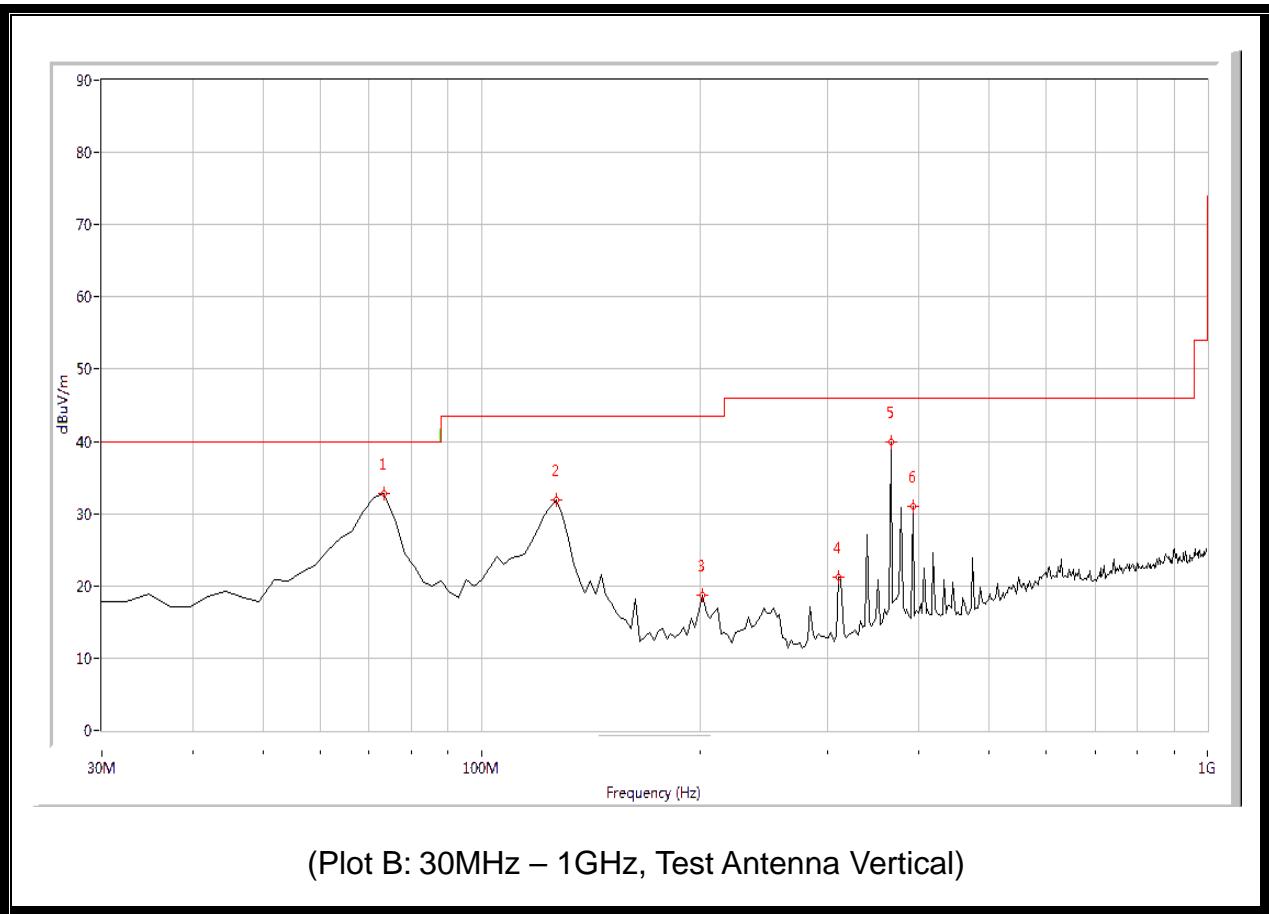

NO.	Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
1	73.541	N.A	32.83	N.A	N.A	40.0	N.A	Vertical	Pass
2	126.758	N.A	31.86	N.A	N.A	43.5	N.A	Vertical	Pass
3	201.746	N.A	18.68	N.A	N.A	43.5	N.A	Vertical	Pass
4	310.599	N.A	21.19	N.A	N.A	46.0	N.A	Vertical	Pass
5	366.234	N.A	40.00	N.A	N.A	46.0	N.A	Vertical	Pass
6	392.843	N.A	30.92	N.A	N.A	46.0	N.A	Vertical	Pass

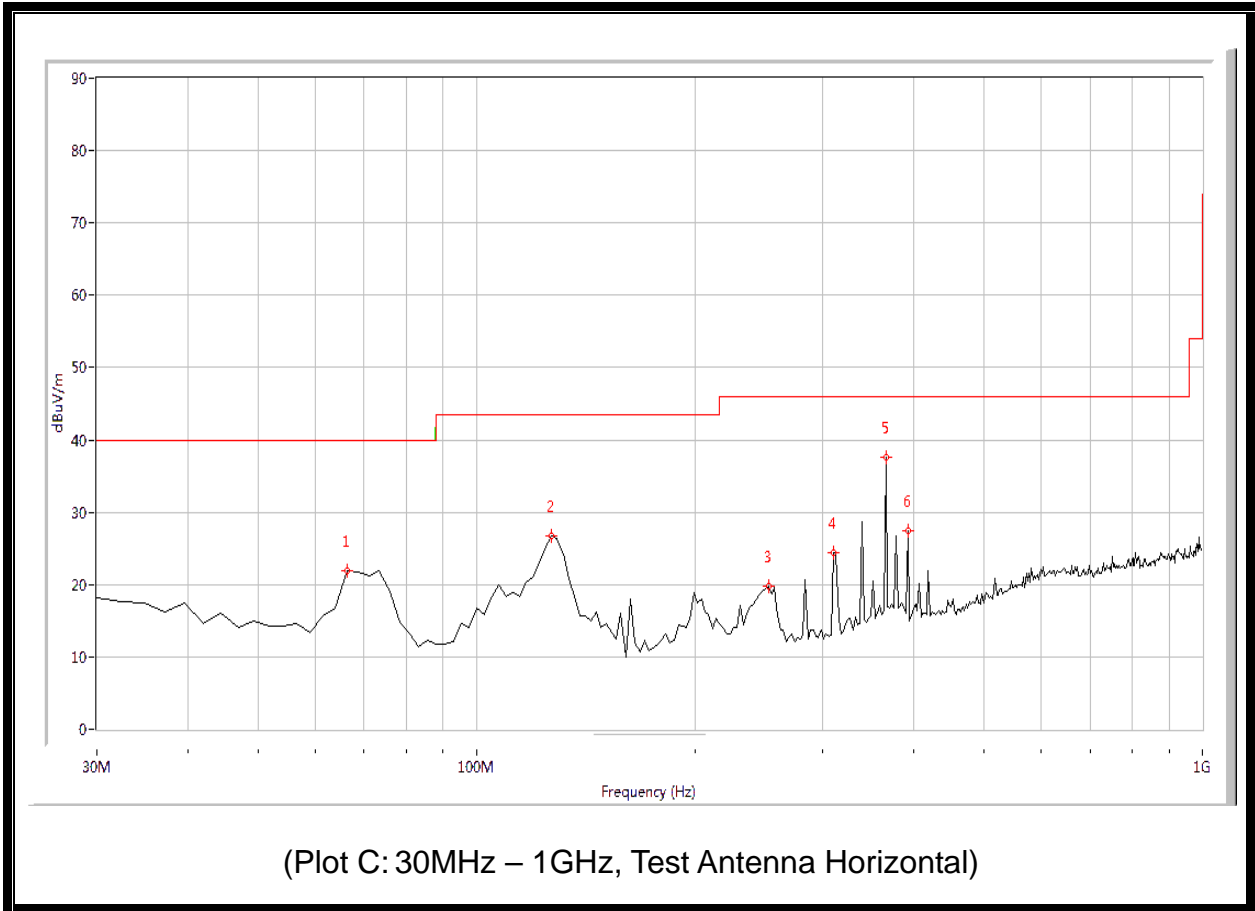

NO.	Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
1	66.284	N.A	21.85	N.A	N.A	40.0	N.A	Horizontal	Pass
2	126.758	N.A	26.81	N.A	N.A	43.5	N.A	Horizontal	Pass
3	252.544	N.A	19.83	N.A	N.A	46.0	N.A	Horizontal	Pass
4	310.599	N.A	24.33	N.A	N.A	46.0	N.A	Horizontal	Pass
5	366.234	N.A	37.56	N.A	N.A	46.0	N.A	Horizontal	Pass
6	392.843	N.A	27.45	N.A	N.A	46.0	N.A	Horizontal	Pass

Result: PASS

2.3 Frequency Tolerance


2.3.1 Test Requirement

According to FCC section 15.225, the devices operating in the 13.553~13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

2.3.2 Test Equipment

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.2.21	2015.2.20
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.2.21	2015.2.20
RF cable	Morlab	RF03	CB03	(n.a.)	(n.a.)

2.3.3 Test Setup

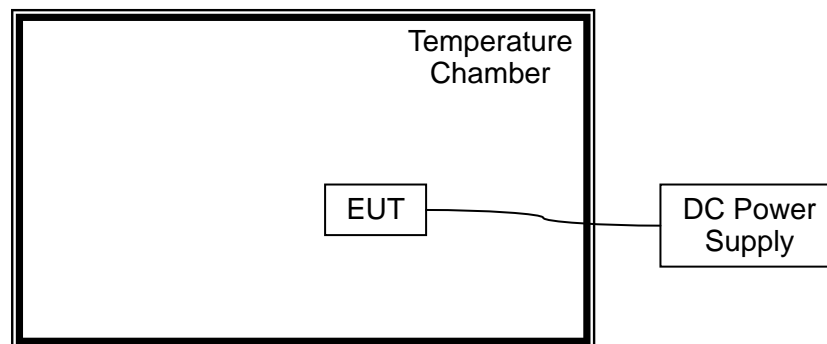

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT was measured by transmitter mode continuously.

2.3.4 Test Result

Operating Frequency: 13,560,000 Hz

Deference Voltage: 3.7V

Deviant Limit: $\pm 0.01\%$



VOLTAGE(%)	Test Conditions		Frequency(Hz)	Deviation(%)	Verdict
	Power (VDC)	Temperature (°C)			
100		-20	13,559,685	-0.002321	
100		-10	13,559,677	-0.002382	
100		0	13,559,652	-0.002566	
100		+10	13,559,614	-0.002845	
100		+20	13,559,562	-0.003229	
100		+25	13,559,553	-0.003297	
100		+30	13,559,544	-0.003363	
100		+40	13,559,551	-0.003311	
100		+50	13,560,579	+0.004269	
Battery End Point		3.145	+20	13,559,571	
115	4.255	+20	13,559,592	-0.003008	

2.4 20dB Bandwidth


2.4.1 Test Requirement

According to FCC section 15.215(c), the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

2.4.2 Test Equipment

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMC Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
Receiver	Narda	PMM 9060	001WX11001	2014.2.21	2015.2.20
Receiver	Narda	PMM 9010	595WX11007	2014.2.21	2015.2.20
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.2.21	2015.2.20
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2014.2.25	2015.2.24
Coaxial Cable	Morlab	EMC02	CB06	(n.a.)	(n.a.)

2.4.3 Test Setup

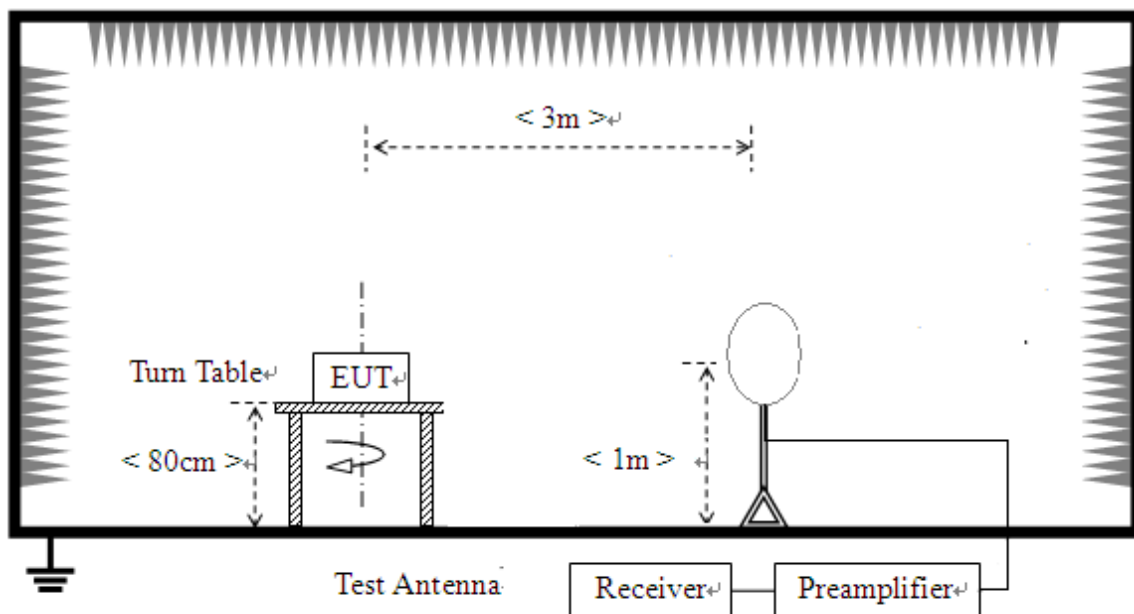


2.4.4 Test Result



Centre Frequency	Measurement		Limit		Verdict
	20dB Bandwidth (KHz)	Frequency Range (MHz)	20dB Bandwidth(KHz)	Frequency Range (MHz)	
13.56MHz	4.00	13.55775~13.56175	14	13.553~13.567	Pass

Please refer to the following plot:

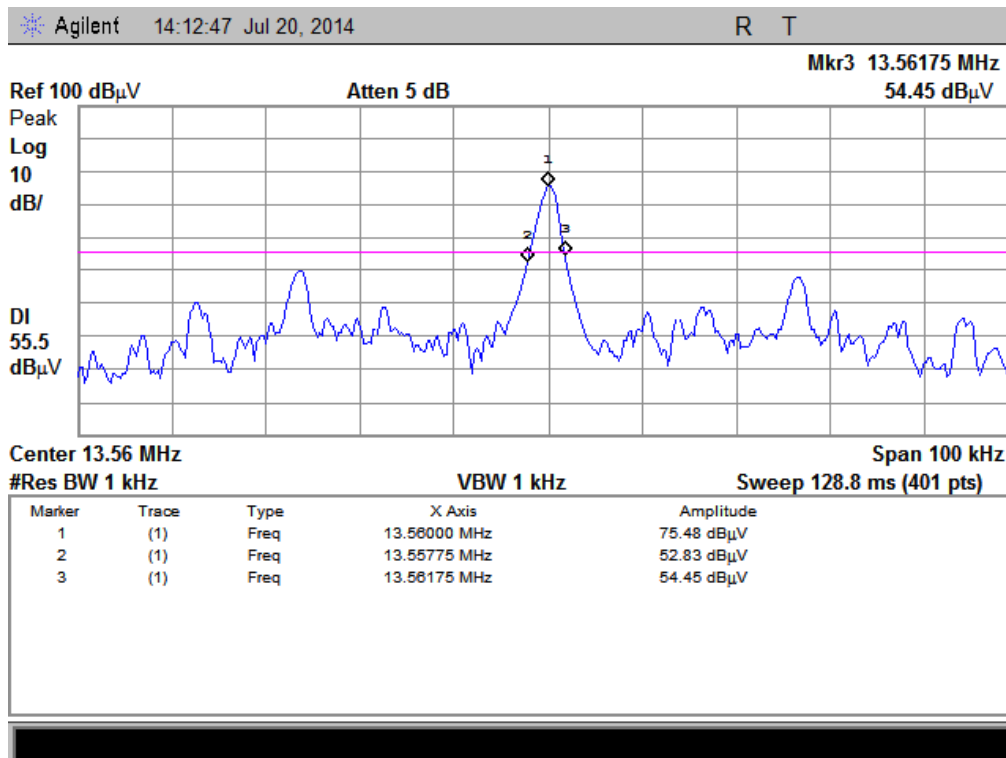

**** END OF REPORT ****