



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 95 MEASUREMENT AND TEST REPORT

For

Shenzhen ChangTaiWei Electronic CO.,LTD

5/F.,6 Block, XinGu Industrial zone, GuShu Village, XiXiang Town, BaoAn District, Shenzhen City,
GuangDong Province, China

FCC ID: 2ACVFM-880B

Report Type: Original Report	Product Type: Walkie Talkie
Report Number: ATC210518-17942E-RF	
Report Date: 2021-06-24	
Reviewed By: Ivan Cao Assistant Manager	
Prepared By: Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 TEST METHODOLOGY3
 MEASUREMENT UNCERTAINTY.....4
 TEST FACILITY4

SYSTEM TEST CONFIGURATION5
 DESCRIPTION OF TEST CONFIGURATION5
 EQUIPMENT MODIFICATIONS5
 SUPPORT EQUIPMENT LIST AND DETAILS5
 EXTERNAL I/O CABLE.....5
 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

TEST EQUIPMENT LIST8

§2.1093 - RF EXPOSURE INFORMATION9
 APPLICABLE STANDARD9
 TEST RESULT9

FCC §95.587(b)(1)(2)(3) – ANTENNA REQUIREMENT10
 APPLICABLE STANDARD10
 ANTENNA DESCRIPTION.....10

FCC §2.1046 & §95.567 - RF OUTPUT POWER.....11
 APPLICABLE STANDARD11
 TEST PROCEDURE11
 TEST DATA11

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC.....13
 APPLICABLE STANDARD13
 TEST PROCEDURE13
 TEST DATA13

FCC §2.1049 & §95.573 & §95.579 - AUTHOURIZED BANDWIDTH AND EMISSION MASK.....24
 APPLICABLE STANDARD24
 TEST PROCEDURE24
 TEST DATA24

FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY32
 APPLICABLE STANDARD32
 TEST PROCEDURE32
 TEST DATA32

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Product	Walkie Talkie
Tested Model	M-880
Frequency Range	462.5500~462.7250MHz 467.5625~467.7125MHz
Transmit Power (ERP)	462.5500~462.7250MHz: Low Power: 20.33dBm High Power: 23.89dBm 467.5625~467.7125MHz: Low Power: 17.61dBm High Power: 20.27dBm
Channel Spacing	12.5kHz
Modulation Technique	FM
Antenna Specification*	0dBi(It is provided by the applicant)
Voltage Range	DC 3.6V from batteries or DC 5V from adapter
Sample serial number	ATC210518-17942E-RF-S1(Assigned by BACL, Dongguan)
Received date	2021-05-18
Sample/EUT Status	Good condition
Adapter information	Model: W&T-AD1806C050100UU Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2A

Objective

This test report is in accordance with Part 2 and Part 95, Subpart A & Subpart B of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with Part 95 Subpart A, Subpart B of the Federal Communication Commissions rules with TIA-603-E, Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	±5%
RF Output Power with Power meter	0.61dB
RF conducted test with spectrum	3.12 dB (150 kHz to 30 MHz)
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1°C
Humidity	5%
Supply voltages	0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

FRS Channel List

Channel No.	Channel Frequency (MHz)	Channel No.	Channel Frequency (MHz)
1	462.5625	12	467.6625
2	462.5875	13	467.6875
3	462.6125	14	467.7125
4	462.6375	15	462.5500
5	462.6625	16	462.5750
6	462.6875	17	462.6000
7	462.7125	18	462.6250
8	467.5625	19	462.6500
9	467.5875	20	462.6750
10	467.6125	21	462.7000
11	467.6375	22	462.7250

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

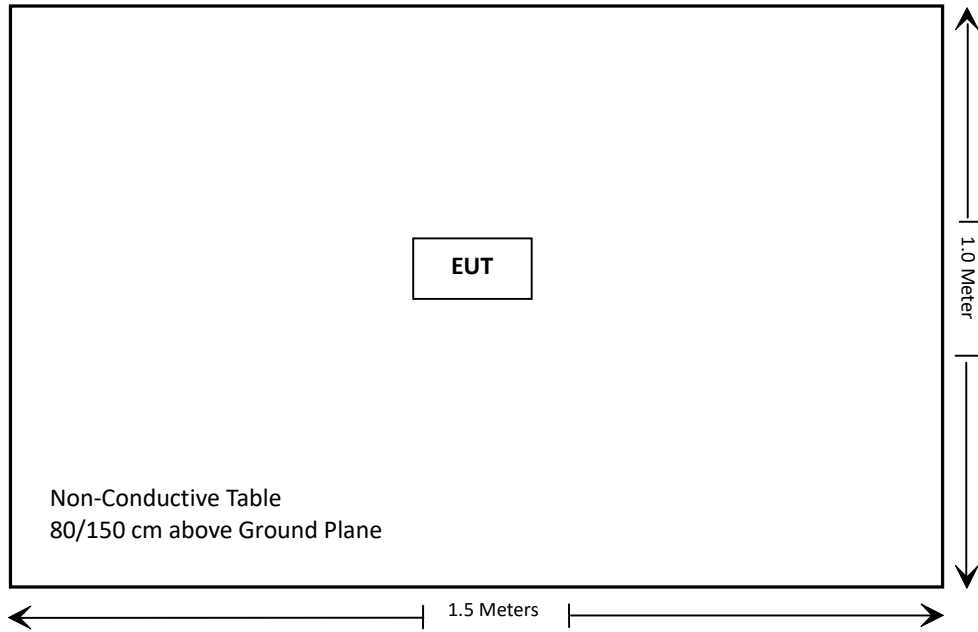

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1093	RF Exposure	Compliance
§95.587(b)(1)(2)(3)	Antenna Requirement	Compliance
§2.1046, §95.567	RF Output Power	Compliance
§2.1047, §95.575	Modulation Characteristic	Compliance
§2.1049, §95.573, §95.579	Authorized Bandwidth & Emission Mask	Compliance
§2.1053, §95.579	Radiated Spurious Emission	Compliance
§2.1055(d), §95.565	Frequency Stability	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-09-05	2021-09-05
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2020-09-05	2021-09-05
RF Conducted test					
HP	RF Communication test set	8920A	3438A05201	2020-07-07	2021-07-07
R&S	Spectrum Analyzer	FSV40	101474	2021-01-09	2022-01-09
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2021-02-24	2022-02-23
Pro instrument	DC Power Supply	Pps3300	3300012	NCR	NCR
UNI-T	Multimeter	UT39A	M130199938	2020-07-23	2021-07-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

§2.1093.

Test Result

Compliance, please refer to the SAR report: ATC210518-17942E-20.

FCC §95.587(b)(1)(2)(3) – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 95.587, (b) Antenna. The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.

Antenna Description

The EUT has an integral vertically polarized antenna arrangement and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §2.1046 & §95.567 - RF OUTPUT POWER

Applicable Standard

Per FCC §2.1046, and §95.567, Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	58 %
ATM Pressure:	101.0 kPa

The testing was performed by JOE Qiao on 2021-06-02.

Test Mode: Transmitting

High Power:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
462.6375	H	103.55	22.22	0	0.67	21.55	33	11.45
462.6375	V	102.94	24.56	0	0.67	23.89	33	9.11
467.6375	H	99.29	18.09	0	0.68	17.41	27	9.59
467.6375	V	99.18	20.95	0	0.68	20.27	27	6.73

Low Power:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
462.6375	H	99.46	18.13	0	0.67	17.46	33	15.54
462.6375	V	99.38	21.00	0	0.67	20.33	33	12.67
467.6375	H	96.11	14.91	0	0.68	14.23	27	12.77
467.6375	V	96.52	18.29	0	0.68	17.61	27	9.39

Test Result: Compliance.

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC

Applicable Standard

Per FCC §2.1047 and §95.575: Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Test Procedure

Test Method: TIA/EIA-603-E

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by JOE Qiao on 2021-06-02.


Please refer to the following tables and plots.

Test Mode: Transmitting

MODULATION LIMITING


Carrier Frequency: 462.6375MHz

Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	0.437	0.074	0.424	0.069	2.500
400	0.703	0.088	0.692	0.076	2.500
500	0.953	0.108	0.942	0.092	2.500
600	1.222	0.124	1.211	0.111	2.500
700	1.492	0.143	1.481	0.127	2.500
800	1.739	0.180	1.726	0.165	2.500
900	1.885	0.196	1.871	0.185	2.500
1000	1.983	0.217	1.972	0.203	2.500
1200	2.152	0.240	2.140	0.229	2.500
1400	2.058	0.281	2.042	0.265	2.500
1600	2.123	0.297	2.111	0.276	2.500
1800	2.094	0.322	2.081	0.310	2.500
2000	2.129	0.333	2.117	0.319	2.500
2100	2.118	0.335	2.098	0.321	2.500
2200	2.093	0.331	2.079	0.324	2.500
2300	2.102	0.346	2.090	0.329	2.500
2400	2.135	0.359	2.123	0.343	2.500
2500	2.104	0.366	2.092	0.352	2.500
2600	2.007	0.368	1.996	0.356	2.500
2700	1.976	0.376	1.963	0.359	2.500
2800	1.924	0.352	1.911	0.341	2.500
2900	1.813	0.347	1.796	0.332	2.500
3000	1.648	0.320	1.634	0.307	2.500

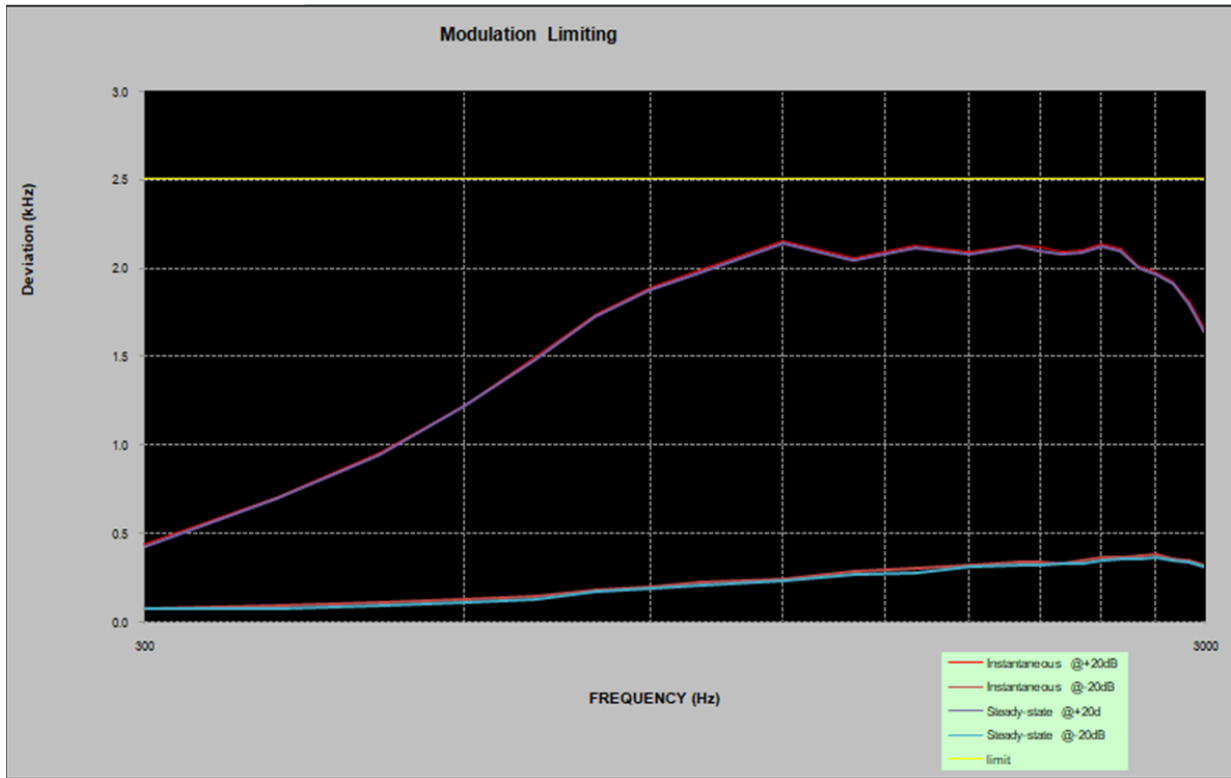

Carrier Frequency: 467.6375MHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	0.441	0.069	0.423	0.063	2.500
400	0.712	0.075	0.698	0.072	2.500
500	0.956	0.098	0.939	0.086	2.500
600	1.225	0.136	1.219	0.127	2.500
700	1.496	0.152	1.485	0.142	2.500
800	1.745	0.176	1.731	0.168	2.500
900	1.988	0.204	1.979	0.197	2.500
1000	2.125	0.227	2.118	0.215	2.500
1200	2.048	0.244	2.034	0.237	2.500
1400	2.133	0.276	2.126	0.269	2.500
1600	2.096	0.295	2.087	0.286	2.500
1800	2.127	0.314	2.118	0.305	2.500
2000	2.119	0.334	2.111	0.326	2.500
2100	2.081	0.345	2.073	0.332	2.500
2200	2.062	0.355	2.059	0.346	2.500
2300	2.041	0.366	2.032	0.351	2.500
2400	1.975	0.371	1.967	0.364	2.500
2500	1.925	0.366	1.918	0.357	2.500
2600	1.874	0.355	1.863	0.342	2.500
2700	1.773	0.335	1.761	0.321	2.500
2800	1.695	0.308	1.682	0.301	2.500
2900	1.575	0.275	1.554	0.265	2.500
3000	1.403	0.236	1.372	0.221	2.500

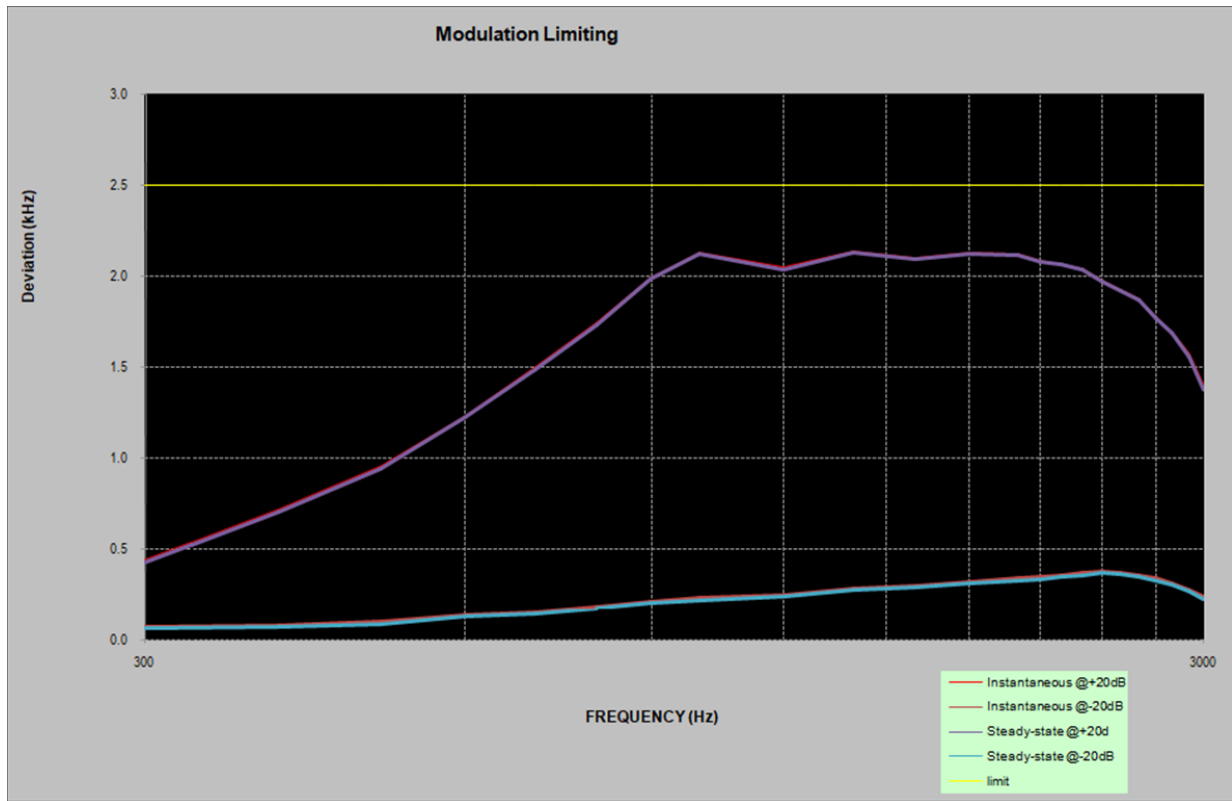

Audio Frequency Response


Carrier Frequency: 462.6375MHz

Audio Frequency (Hz)	Response Attenuation (dB)
300	-13.47
400	-9.32
500	-6.86
600	-4.76
700	-3.80
800	-2.23
900	-1.15
1000	0
1200	1.20
1400	2.61
1600	3.78
1800	4.39
2000	5.46
2100	5.69
2200	5.74
2300	5.91
2400	6.36
2500	6.65
2600	6.58
2700	6.26
2800	6.18
2900	6.12
3000	5.26

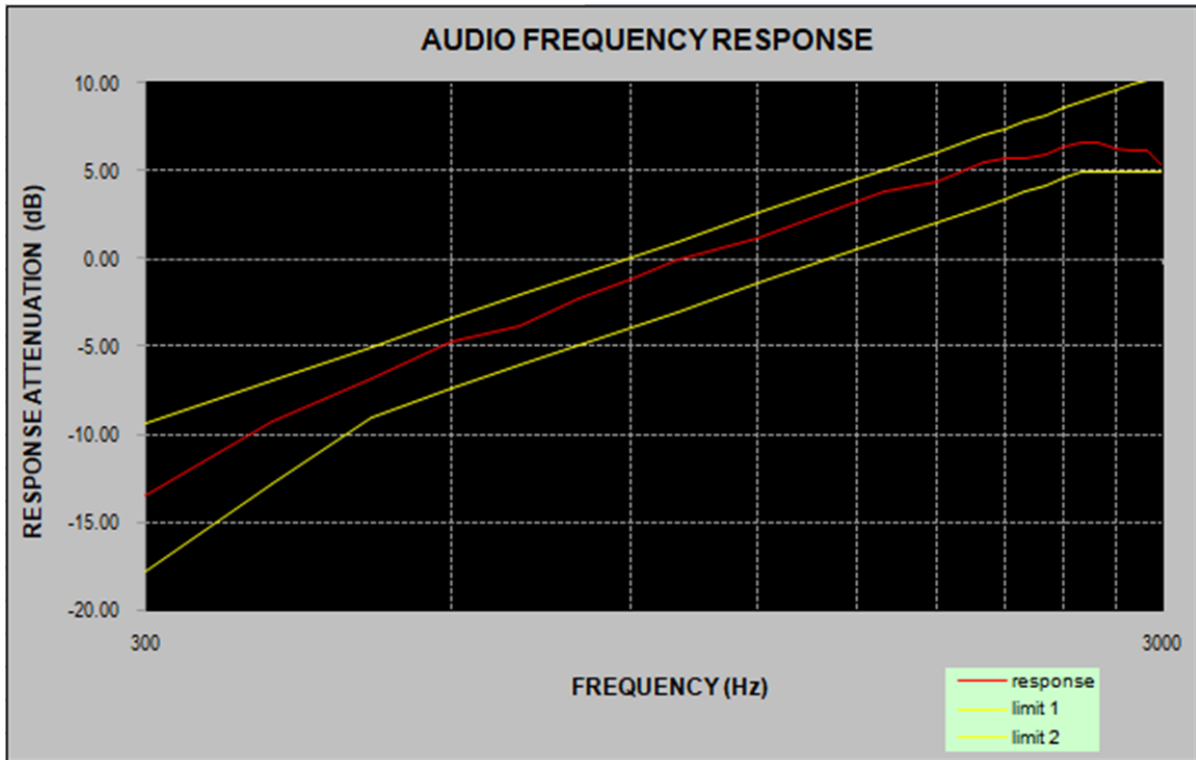

Carrier Frequency: 467.6375MHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-13.31
400	-9.17
500	-7.05
600	-5.32
700	-3.72
800	-2.32
900	-1.21
1000	0
1200	1.26
1400	2.67
1600	3.82
1800	4.46
2000	5.52
2100	5.72
2200	5.82
2300	5.94
2400	6.34
2500	6.62
2600	6.49
2700	6.24
2800	6.13
2900	6.18
3000	5.35

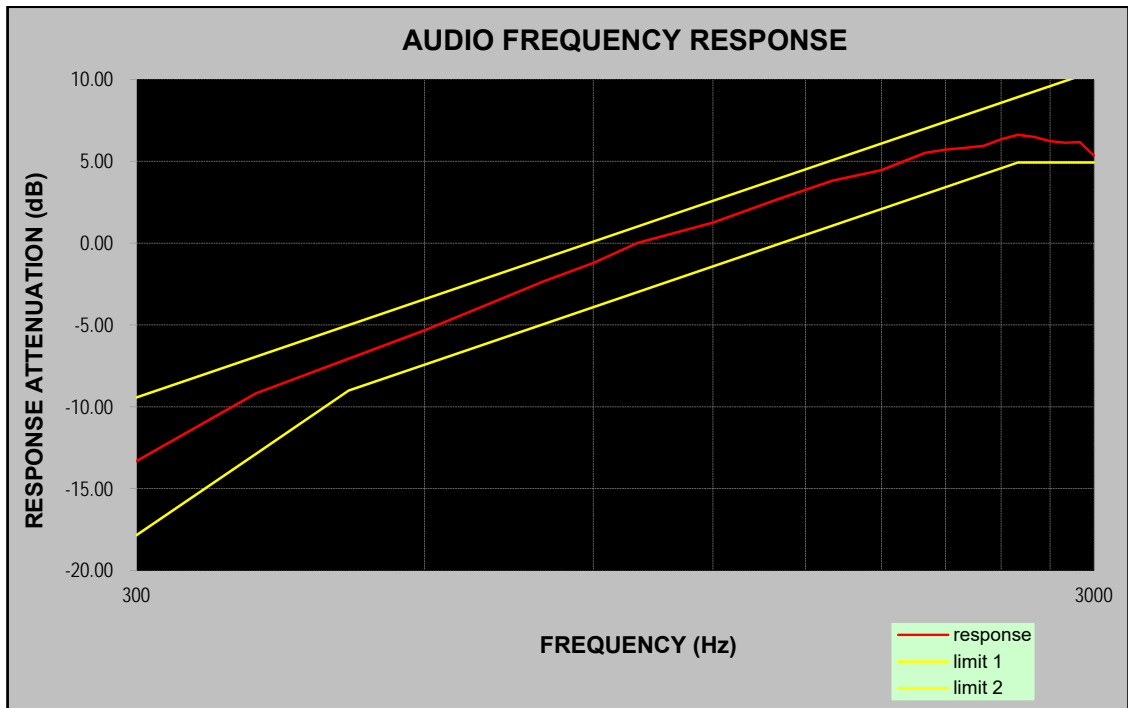

Audio frequency lows pass filter response


Carrier Frequency: 462.6375MHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0	/
3.0	-15.75	0
4.0	-73.65	-12.5
5.0	-85.95	-22.2
6.0	-86.75	-30.1
7.0	-84.54	-36.8
8.0	-88.46	-42.6
9.0	-86.15	-47.7
10.0	-85.13	-52.3
15.0	-87.61	-69.9
20.0	-87.77	-82.4

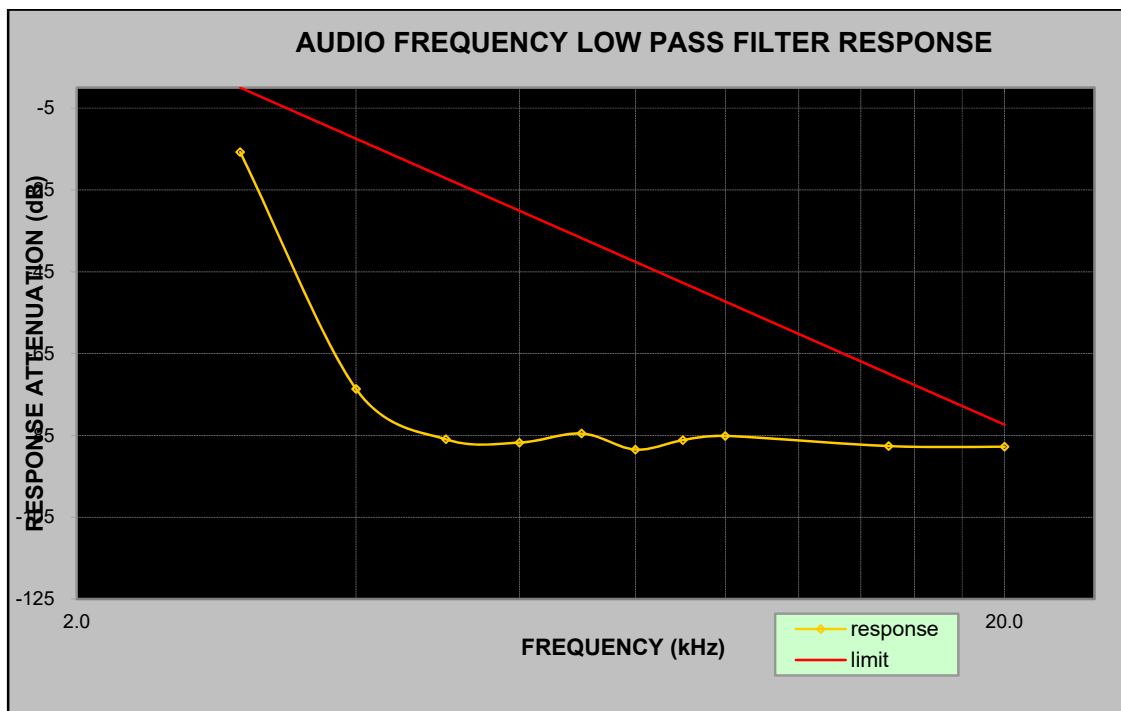

Carrier Frequency: 467.6375MHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0	/
3.0	-14.5	0
4.0	-68.0	-12.5
5.0	-80.7	-22.2
6.0	-85.3	-30.1
7.0	-83.7	-36.8
8.0	-86.2	-42.6
9.0	-85.7	-47.7
10.0	-84.9	-52.3
15.0	-86.5	-69.9
20.0	-87.2	-82.4

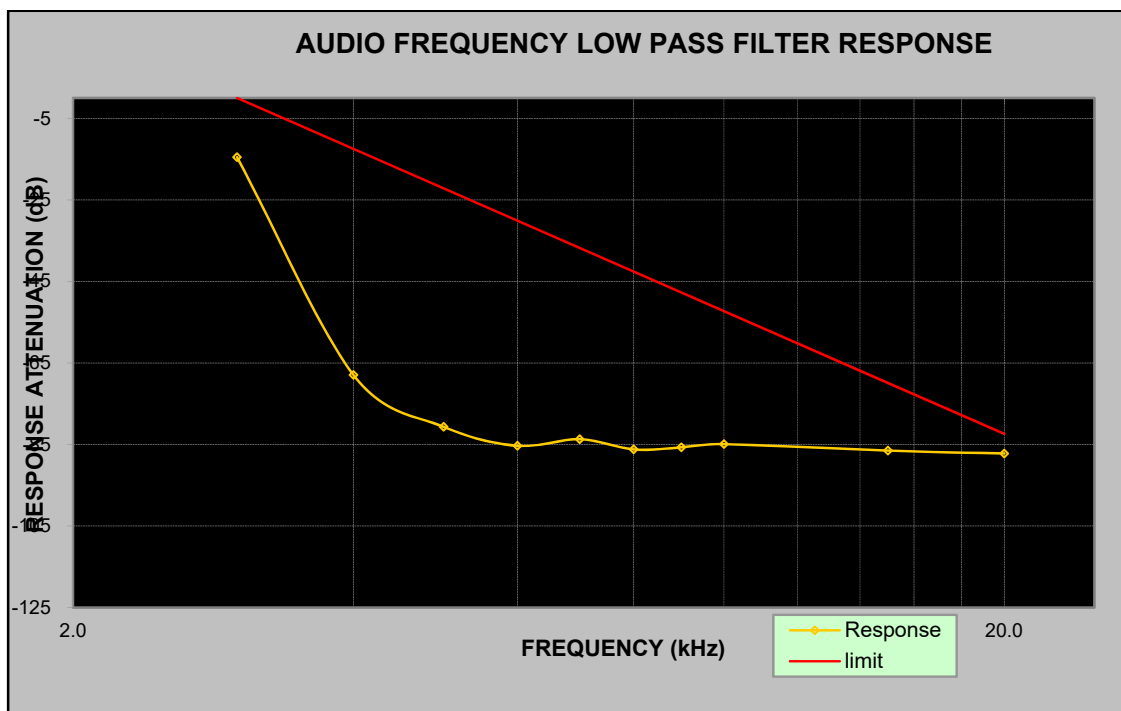

FCC §2.1049 & §95.573 & §95.579 - AUTHOURIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.573. Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

(1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.

(2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.

(3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

Test Procedure

TIA-603-E, section 2.2.11

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by JOE Qiao on 2021-06-02.

Test Mode: Transmitting


Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	20dB Emissions Bandwidth (kHz)
Analog	12.5	462.6375	High power	9.91	10.20
Analog	12.5	462.6375	Low power	9.91	10.20
Analog	12.5	467.6375	High power	9.91	10.20
Analog	12.5	467.6375	Low power	9.91	10.20

Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$:

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$


F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

OBW, 462.6375 MHz-High power

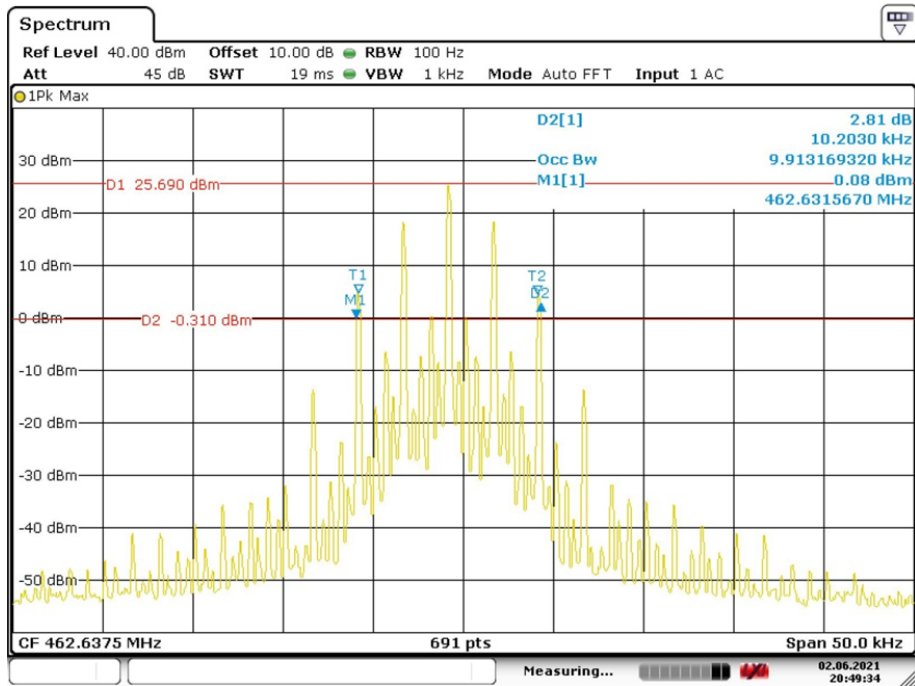


Date: 2.JUN.2021 20:49:34

OBW, 462.6375 MHz-Low power

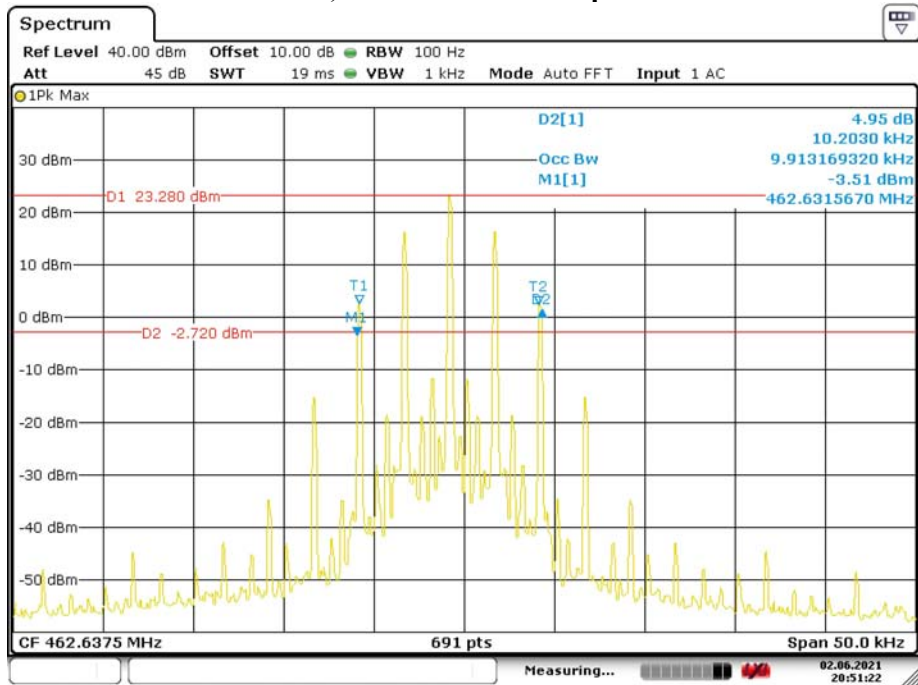


Date: 2.JUN.2021 20:51:22

Emission Mask, 462.6375 MHz - High power

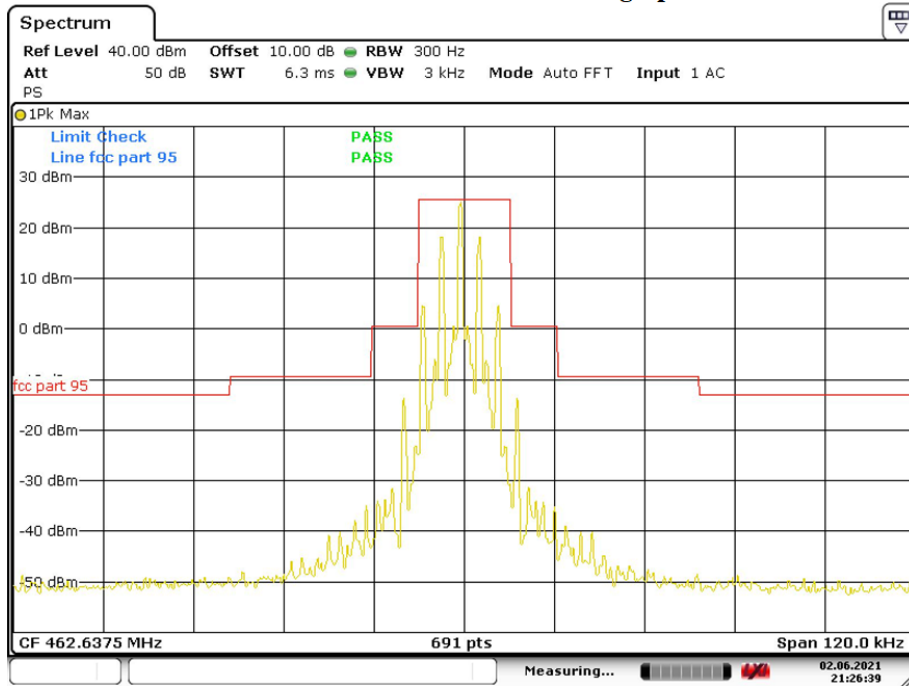


Date: 2.JUN.2021 21:26:39

Emission Mask, 462.6375 MHz - Low power

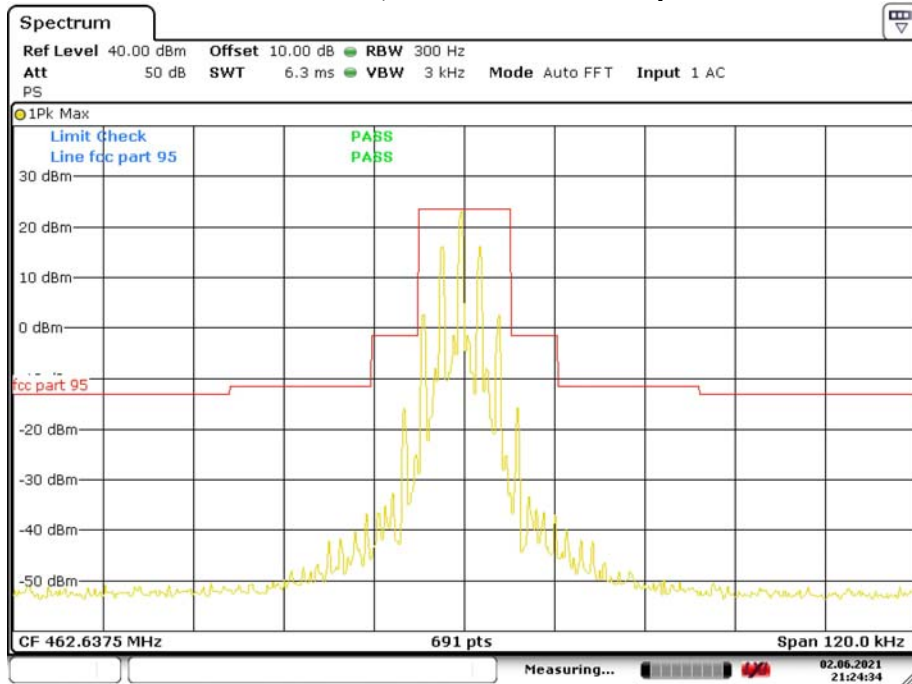


Date: 2.JUN.2021 21:24:34


OBW, 467.6375 MHz-High power

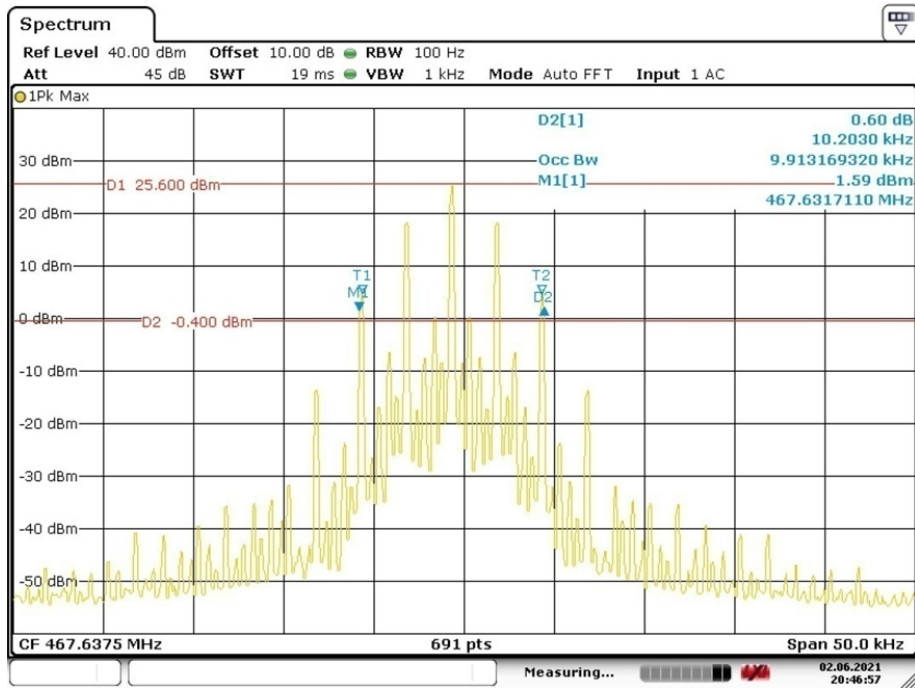

OBW, 467.6375 MHz - Low power

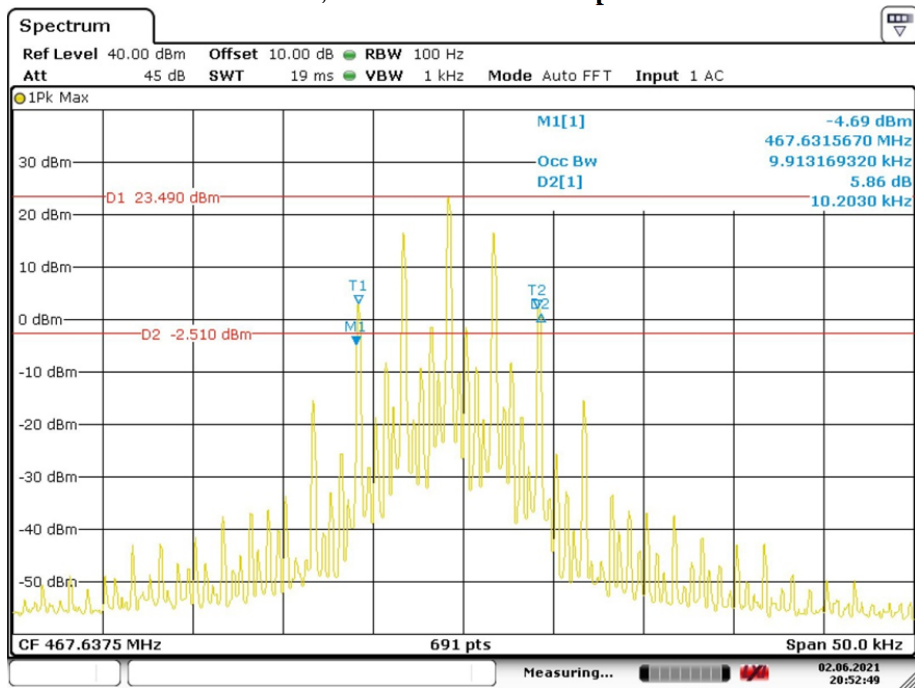


Emission Mask, 467.6375 MHz-High power

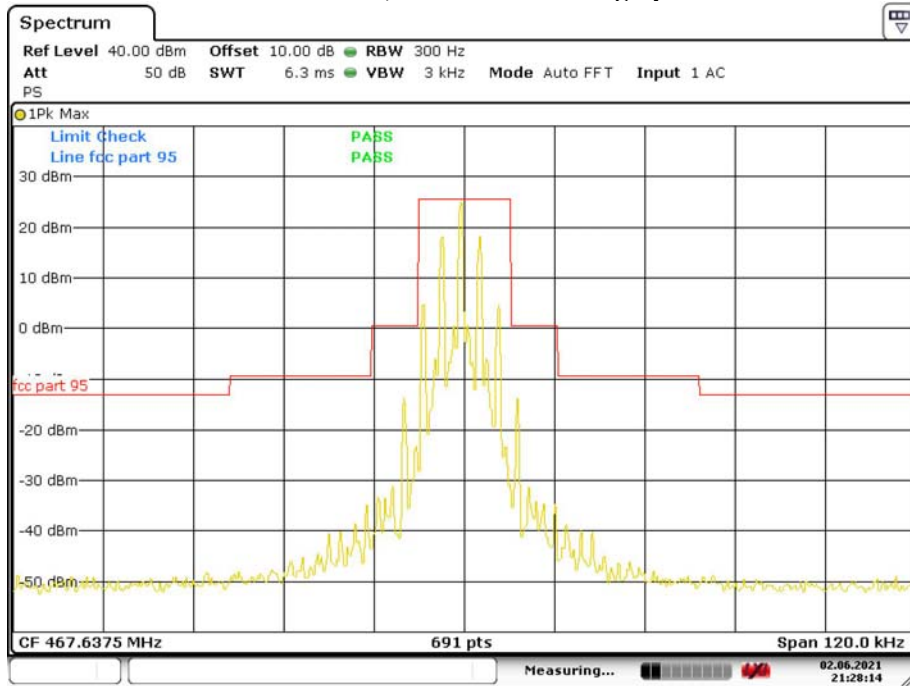

Date: 2.JUN.2021 21:28:14

Emission Mask, 467.6375 MHz-Low power

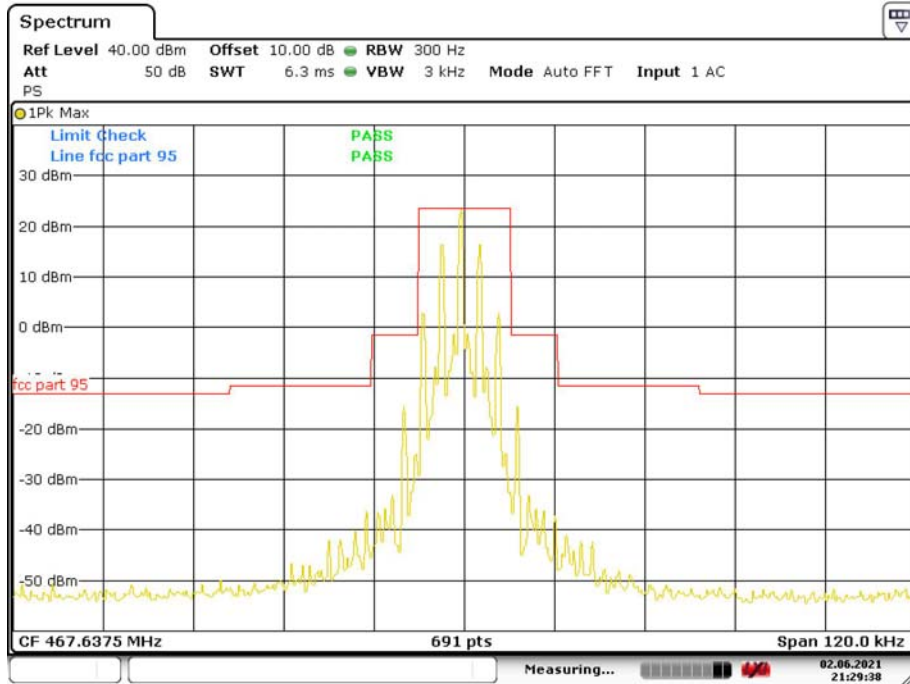

Date: 2.JUN.2021 21:29:39

FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION

Applicable Standard

FCC §2.1053 and §95.579. Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) *Attenuation requirements.* The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) *Measurement bandwidths.* The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) *Measurement conditions.* The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ -the absolute level
Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by JOE Qiao on 2021-06-02.

Test Mode: Transmitting (Worst case for High power level)

Frequency (MHz)	Polar (H/V)	Turntable Angle Degree	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
				Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
462.6375MHz									
925.27	H	75	73.33	-22.76	0.00	0.97	-23.73	-13	10.73
1387.91	H	157	69.94	-34.44	9.53	1.21	-26.12	-13	13.12
1850.55	H	164	61.25	-43.62	11.05	1.20	-33.77	-13	20.77
2313.19	H	335	62.48	-41.58	11.94	1.20	-30.84	-13	17.84
2775.83	H	215	58.76	-44.41	12.31	1.38	-33.48	-13	20.48
3238.46	H	248	61.37	-41.00	12.30	1.55	-30.25	-13	17.25
3701.10	H	219	59.14	-42.15	12.24	1.55	-31.46	-13	18.46
925.27	V	142	81.67	-16.25	0.00	0.97	-17.22	-13	4.22
1387.91	V	36	75.62	-28.87	9.53	1.21	-20.55	-13	7.55
1850.55	V	258	66.78	-38.03	11.05	1.20	-28.18	-13	15.18
2313.19	V	163	68.91	-36.02	11.94	1.20	-25.28	-13	12.28
2775.83	V	124	62.35	-41.40	12.31	1.38	-30.47	-13	17.47
3238.46	V	179	62.77	-38.82	12.30	1.55	-28.07	-13	15.07
3701.10	V	226	60.18	-40.54	12.24	1.55	-29.85	-13	16.85
467.6375MHz									
935.27	H	75	71.58	-24.09	0.00	0.94	-25.03	-13	12.03
1402.91	H	129	68.49	-35.99	9.59	1.23	-27.63	-13	14.63
1870.55	H	36	61.38	-43.48	11.11	1.19	-33.56	-13	20.56
2338.19	H	162	59.71	-44.30	11.97	1.20	-33.53	-13	20.53
2805.83	H	155	58.13	-44.99	12.32	1.40	-34.07	-13	21.07
3273.46	H	267	57.92	-44.38	12.29	1.56	-33.65	-13	20.65
3741.1	H	308	58.37	-42.79	12.25	1.53	-32.07	-13	19.07
935.27	V	94	79.72	-17.71	0.00	0.94	-18.65	-13	5.65
1402.91	V	217	74.68	-29.89	9.59	1.23	-21.53	-13	8.53
1870.55	V	263	65.34	-39.45	11.11	1.19	-29.53	-13	16.53
2338.19	V	204	64.21	-40.74	11.97	1.20	-29.97	-13	16.97
2805.83	V	211	60.19	-43.41	12.32	1.40	-32.49	-13	19.49
3273.46	V	13	61.41	-40.02	12.29	1.56	-29.29	-13	16.29
1402.91	V	97	60.23	-40.55	12.25	1.53	-29.83	-13	16.83

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2: Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY

Applicable Standard

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from –30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565, Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage (item 1 or item 2 will be chosen according to different condition) :

1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by JOE Qiao on 2021-06-02.

Test Mode: Transmitting

Reference Frequency:462.6375MHz, Limit:2.5 ppm, 12.5kHz			
Environment Temperature (°C)	Power Supplied (V _{DC})	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	3.6	462.637562	0.134
40	3.6	462.637561	0.132
30	3.6	462.637563	0.136
20	3.6	462.637572	0.156
10	3.6	462.637569	0.149
0	3.6	462.637571	0.153
-10	3.6	462.637559	0.128
-20	3.6	462.637568	0.147
-30	3.6	462.637558	0.125
Frequency Stability Ver. Input Voltage			
20	3.2	462.637552	0.112
20	4.0	462.637563	0.136

Reference Frequency:467.6375 MHz, Limit:2.5 ppm, 12.5kHz			
Environment Temperature (°C)	Power Supplied (V _{DC})	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	3.6	467.637563	0.135
40	3.6	467.637557	0.122
30	3.6	467.637566	0.141
20	3.6	467.637573	0.156
10	3.6	467.637569	0.148
0	3.6	467.637574	0.158
-10	3.6	467.637571	0.152
-20	3.6	467.637558	0.125
-30	3.6	467.637560	0.128
Frequency Stability Ver. Input Voltage			
20	3.2	467.637572	0.154
20	4.0	467.637573	0.156

Note: the battery operating end point voltage is 3.2V which was provided by the applicant.

******* END OF REPORT *******