

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

LED TV

MODEL No.: T550TGA4BUA,E4STA5517,TU55GTG, WG55UX4100,
WG55XXXXXXXXXX,T55XXXXXXXXXXXX, EXXXXXXXXXXXX
(where X would be any Arabian number or English letter or blank)

FCC ID: 2ACWIE4STA5517

Trade Mark: Westinghouse, Element

REPORT NO.: ES180319001E

ISSUE DATE: April 20, 2018

Prepared for

Shenyang Tongfang Multimedia Technology Co., Limited.
No.10 Nanping East Road HunNan New District Shenyang,
LiaoNing Province P.R .China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

1 TEST RESULT CERTIFICATION

Applicant:	Shenyang Tongfang Multimedia Technology Co., Limited. No.10 Nanping East Road HunNan New District Shenyang, LiaoNing Province P.R .China
Manufacturer:	Shenyang Tongfang Multimedia Technology Co., Limited. No.10 Nanping East Road HunNan New District Shenyang, LiaoNing Province P.R .China
Product Description:	LED TV
Model Number:	T550TGA4BUA,E4STA5517,TU55GTG, WG55UX4100, WG55XXXXXXXXXX,T55XXXXXXXXXX, EXXXXXXXXXX (where X would be any Arabian number or English letter or blank) (Note: These models are identical except for decorative parts in front panels, color of enclosures and design of signal input/output terminals in secondary circuits. Here T550TGA4BUA was selected for full test.)
File Number:	ES180319001E
Date of Test:	March 19, 2018 to April 08, 2018


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD.. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test : March 19, 2018 to April 08, 2018

Prepared by : 
Yaping Shen/Editor

Reviewer : 
Joe Xia/Supervisor


Approve & Authorized Signer : 
Lisa Wang/Manager

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION2

2 EUT TECHNICAL DESCRIPTION.....4

3 SUMMARY OF TEST RESULT6

4 TEST METHODOLOGY7

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS7

4.2 MEASUREMENT EQUIPMENT USED7

4.3 DESCRIPTION OF TEST MODES.....8

5 FACILITIES AND ACCREDITATIONS 11

5.1 FACILITIES..... 11

5.2 LABORATORY ACCREDITATIONS AND LISTINGS..... 11

6 TEST SYSTEM UNCERTAINTY 12

7 SETUP OF EQUIPMENT UNDER TEST 13

7.1 RADIO FREQUENCY TEST SETUP..... 13

7.2 RADIO FREQUENCY TEST SETUP..... 13

7.3 CONDUCTED EMISSION TEST SETUP 15

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM..... 16

7.5 SUPPORT EQUIPMENT 16

8 TEST REQUIREMENTS..... 17

8.1 BANDWIDTH MEASUREMENT 17

8.2 MAXIMUM CONDUCTED OUTPUT POWER..... 42

8.3 MAXIMUM PEAK POWER DENSITY..... 46

8.4 FREQUENCY STABILITY..... 79

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION..... 91

8.6 POWER LINE CONDUCTED EMISSIONS..... 114

8.7 ANTENNA APPLICATION 117

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)			
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g/a:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20)/ac(HT20): MCS0-MCS15; 802.11n(HT40): MCS0-MCS15; 802.11ac(HT40):MCS0-MCS19; 802.11ac(VHT80):MCS0-MCS19; Bluetooth DSS: 1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation Bluetooth DTS: 1Mbps for GFSK modulation			
Modulation	WIFI: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; DSSS with DBPSK/DQPSK/CCK for 802.11b; BT DSS: GFSK modulation (1Mbps) pi/4-DQPSK modulation (2Mbps) 8DPSK modulation (3Mbps) BT DTS: GFSK modulation (1Mbps)			
Operating Frequency Range	WIFI 5G Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n(HT20)/ac(VHT20)	5180-5240	4
		802.11n(HT40)/ac(VHT40)	5190-5230	2
		802.11 ac(VHT80)	5210	1
	UNII Band III	802.11a/n(HT20)/ac(VHT20)	5745-5825	5
		802.11n(HT40)/ac(VHT40)	5755-5795	2
		802.11 ac(VHT80)	5775	1
2.4G WIFI: 2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40); Bluetooth: 2402-2480MHz				
Transmit Power Max	16.72 dBm for WIFI 2.4G Band; 3.19 dBm for BT DSS; -3.53 dBm for BT DTS; 18.12 dBm for UNII Band I; 16.97 dBm for UNII Band III			

Antenna Type	Metel Antenna Two antenna for WIFI One antenna for BT
Max Antenna Gain	4.0 dBi for BT 4.0 dBi for BLE 4.0 dBi for WIFI 2.4 Band 5.0 dBi for WIFI 5G Band I 5.0 dBi for WIFI 5G Band III
Directional Gain	7.01 dBi for WIFI 2.4G Band 8.01 dBi for WIFI 5G Band I 8.01 dBi for WIFI 5G Band III
Power supply	AC 100-240V 50/60Hz 180W

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v01r03, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ACWIE4STA5517 A filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789003 D2 General UNII Test Procedures New Rules v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/28/2017	05/28/2018
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/28/2017	05/28/2018
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	05/28/2018
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/28/2017	05/28/2018
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/28/2017	05/28/2018
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/28/2017	05/28/2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/28/2017	05/28/2018
Pre-Amplifier	HP	8447D	2944A07999	05/28/2017	05/28/2018
Bilog Antenna	Schwarzbeck	VULB9163	142	05/28/2017	05/28/2018
Loop Antenna	ARA	PLA-1030/B	1029	05/28/2017	05/28/2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/28/2017	05/28/2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/28/2017	05/28/2018
Cable	Schwarzbeck	AK9513	ACRX1	05/28/2017	05/28/2018
Cable	Rosenberger	N/A	FP2RX2	05/28/2017	05/28/2018
Cable	Schwarzbeck	AK9513	CRPX1	05/28/2017	05/28/2018
Cable	Schwarzbeck	AK9513	CRRX2	05/28/2017	05/28/2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/28/2017	05/28/2018
peak power analyzer	Agilent	8990B	4657524	05/28/2017	05/28/2018
Spectrum Analyzer	Agilent	N9010A	My53470879	05/28/2017	05/28/2018
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	05/28/2017	05/28/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT20): MCS15; 802.11n (HT40): MCS0; 802.11n (HT40): MCS15; 802.11ac (HT20): MCS0; 802.11ac (HT20): MCS15; 802.11ac (HT40): MCS0; 802.11ac (HT40): MCS19; 802.11ac (HT80): MCS0; 802.11ac (HT80): MCS19;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with UNII Band I

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n(VHT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac(HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

Wifi 5G with UNII Band III

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n(HT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac(VHT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS,2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, July 06, 2016

The Certificate Registration Number is 709623.

Accredited by FCC, July 06, 2016

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

: EMTEK(SHENZHEN) CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

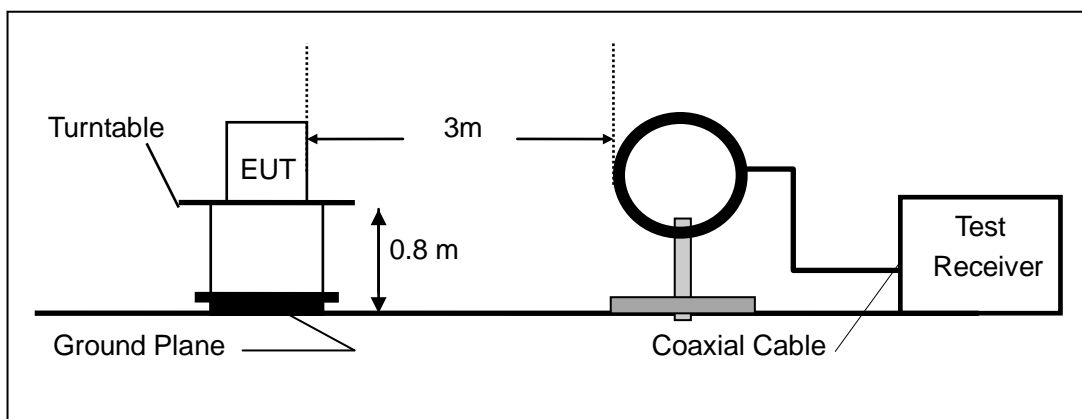

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

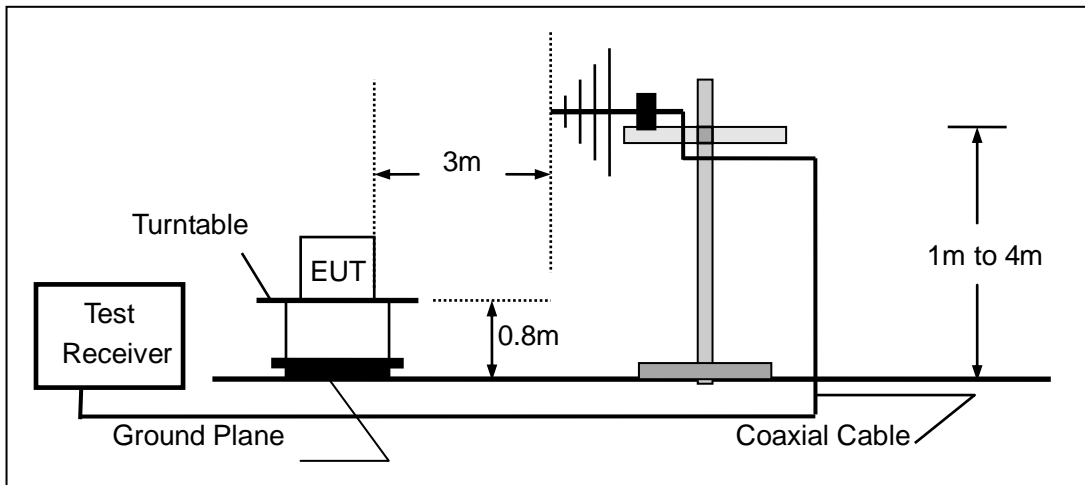

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

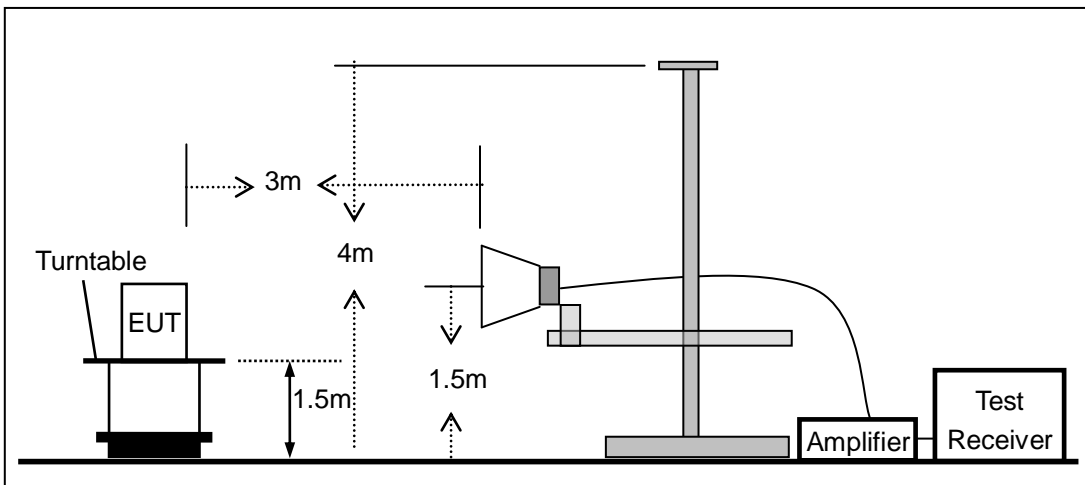


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

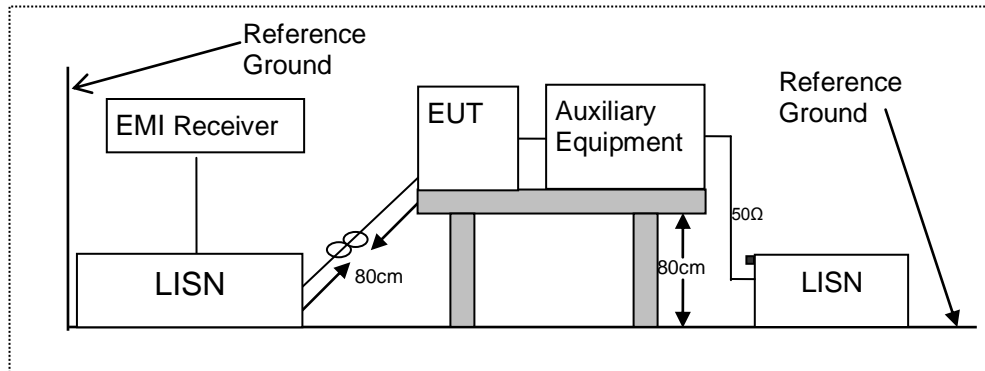

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

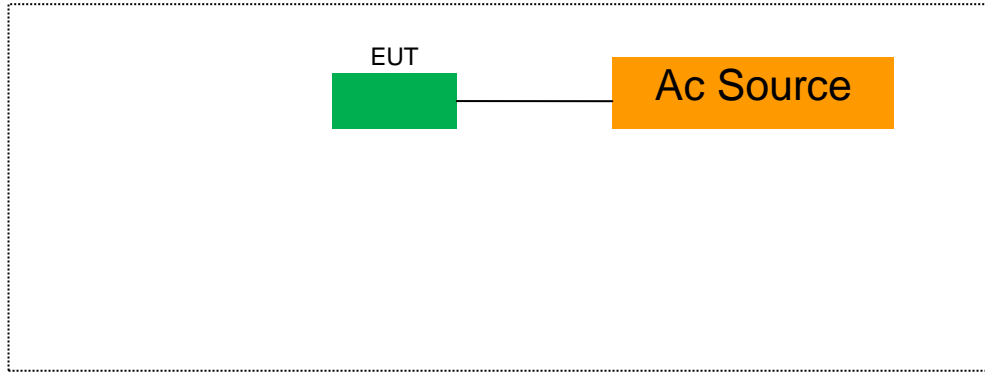

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(e) for UNII Band III

8.1.2 Conformance Limit

No limit requirement.

The minimum 6 dB emission bandwidth of at least 500 KHz for the UNII Band III.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below

■ The following procedure shall be used for measuring (26 dB) power bandwidth:

Center Frequency: test Frequency

Set RBW = approximately 1% of the emission bandwidth.

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

X dB Bandwidth: 26 dB

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Minimum Emission Bandwidth for the UNII Band III

Center Frequency: test Frequency

Set RBW = 100 kHz

Set VBW $\geq 3 \cdot$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

X dB Bandwidth: 6 dB

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ The following procedure shall be used for measuring (99 %) power bandwidth:

Set center frequency to the nominal EUT channel center frequency.

Set span = 1.5 times to 5.0 times the OBW.

Set RBW = 1 % to 5 % of the OBW

Set VBW $\geq 3 \cdot$ RBW

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used.

Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

We tested antenna A and antenna B. The test results are similar, the worst test data for Antenna A:

<input checked="" type="checkbox"/> 802.11a mode						
Temperature :		28°C	Test Date :		April 08,2018	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	20.77	16.62	N/A	N/A
	CH40	5200	22.53	16.59	N/A	N/A
	CH48	5240	19.58	16.56	N/A	N/A
UNII Band III	CH149	5745	19.54	16.55	N/A	N/A
	CH157	5785	19.36	19.51	N/A	N/A
	CH165	5825	19.37	16.56	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode						
Temperature :		28°C	Test Date :		April 08,2018	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	20.03	17.60	N/A	N/A
	CH40	5200	19.90	17.66	N/A	N/A
	CH48	5240	20.07	17.60	N/A	N/A
UNII Band III	CH149	5745	19.83	17.60	N/A	N/A
	CH157	5785	19.72	17.59	N/A	N/A
	CH165	5825	19.89	17.59	N/A	N/A
Note: N/A (Not Applicable)						

802.11ac(VHT20) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	19.91	17.59	N/A	N/A
	CH40	5200	19.86	17.62	N/A	N/A
	CH48	5240	19.85	17.60	N/A	N/A
UNII Band III	CH149	5745	19.97	17.61	N/A	N/A
	CH157	5785	19.63	17.60	N/A	N/A
	CH165	5825	19.72	17.60	N/A	N/A

Note:
N/A (Not Applicable)

802.11n(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH38	5190	40.40	36.03	N/A	N/A
	CH46	5230	40.44	36.10	N/A	N/A
UNII Band III	CH151	5755	40.13	36.08	N/A	N/A
	CH159	5795	40.15	36.00	N/A	N/A

Note:
N/A (Not Applicable)

802.11ac(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH38	5190	36.08	40.25	N/A	N/A
	CH46	5230	36.10	40.99	N/A	N/A
UNII Band III	CH151	5755	36.06	40.04	N/A	N/A
	CH159	5795	35.98	40.08	N/A	N/A

Note:
N/A (Not Applicable)

802.11ac(VHT80) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH42	5210	75.20	79.59	N/A	N/A
UNII Band III	CH155	5775	75.08	79.35	N/A	N/A

Note:
N/A (Not Applicable)


UNII Band III

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong


Operation Mode	Channel Number	Channel Freq. (MHz)	6dB EBW	Limit (MHz)	Verdict
802.11a	CH149	5745	16.36	500	PASS
	CH157	5785	16.38	500	PASS
	CH165	5825	16.32	500	PASS
802.11n (VHT20)	CH149	5745	17.53	500	PASS
	CH157	5785	15.03	500	PASS
	CH165	5825	16.90	500	PASS
802.11ac (VHT20)	CH149	5745	16.66	500	PASS
	CH157	5785	16.92	500	PASS
	CH165	5825	16.81	500	PASS
802.11n (VHT40)	CH151	5755	35.23	500	PASS
	CH159	5795	34.82	500	PASS
802.11ac (VHT40)	CH151	5755	35.51	500	PASS
	CH159	5795	34.81	500	PASS
802.11ac (VHT80)	CH155	5775	74.22	500	PASS

Note:
N/A (Not Applicable)


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5180

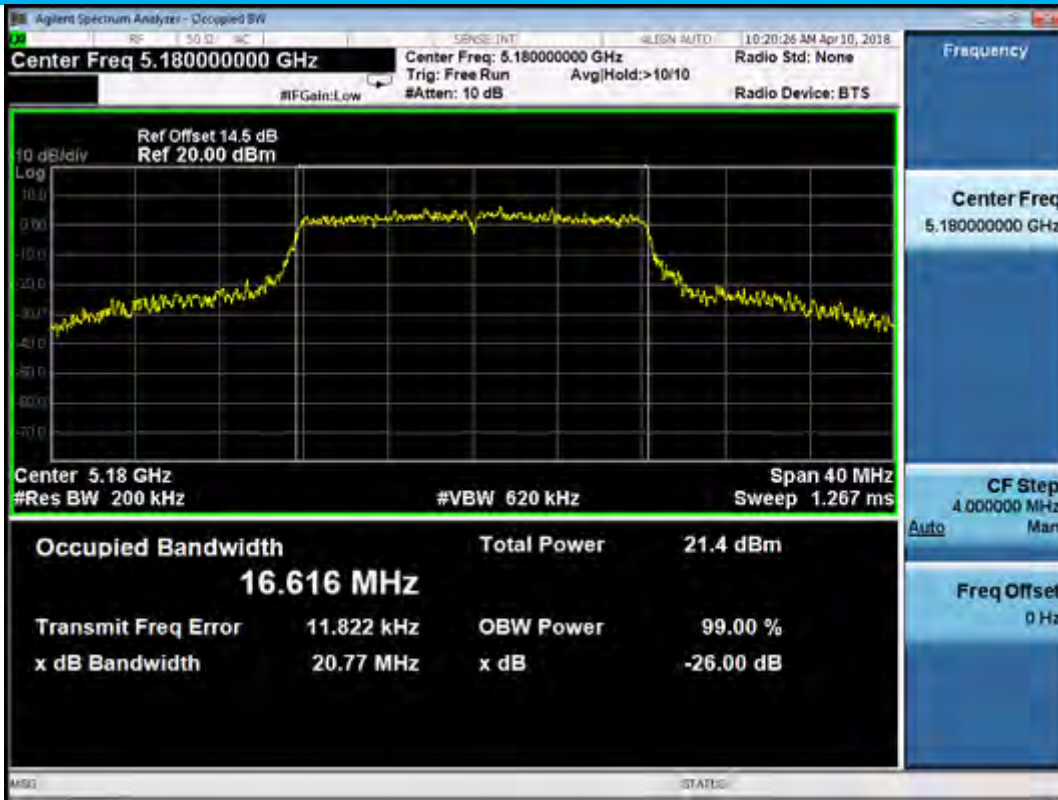


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5200

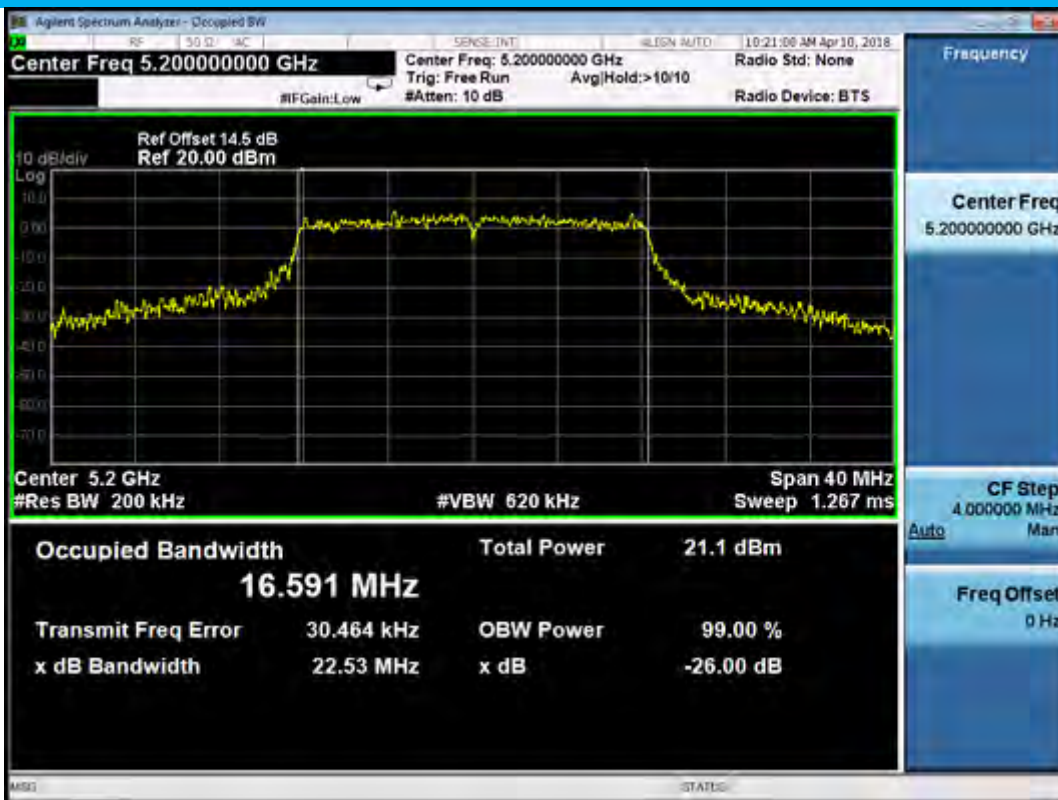


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5240

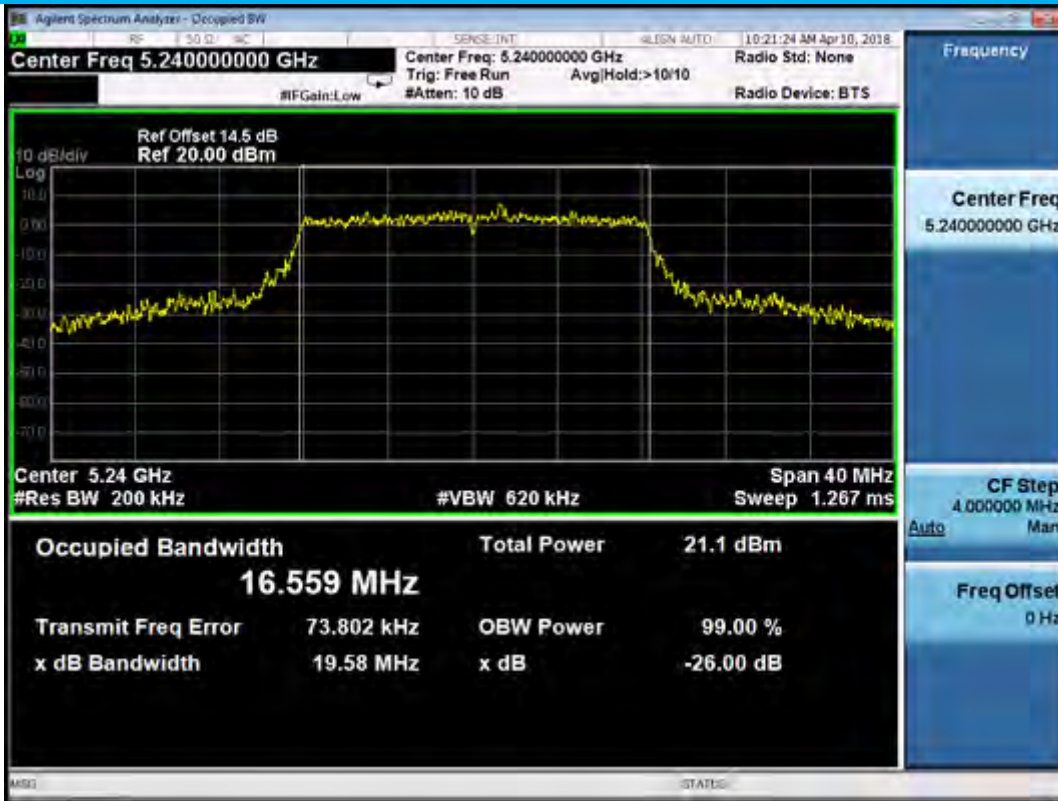


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5745

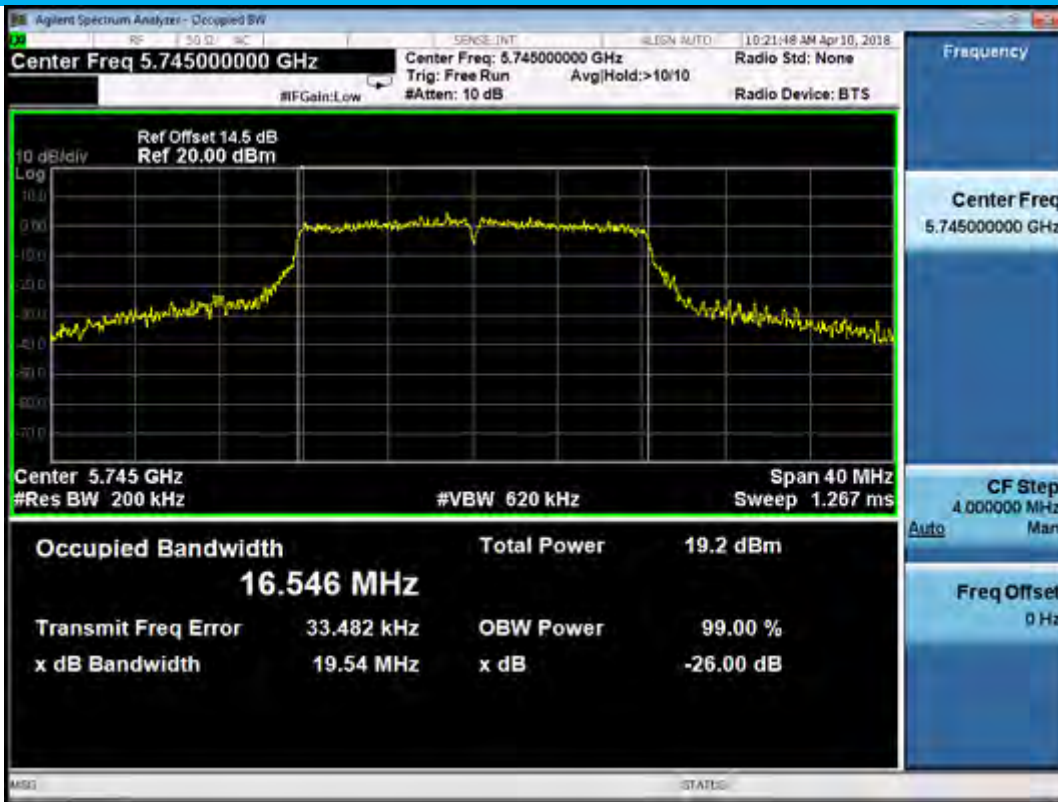


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5785

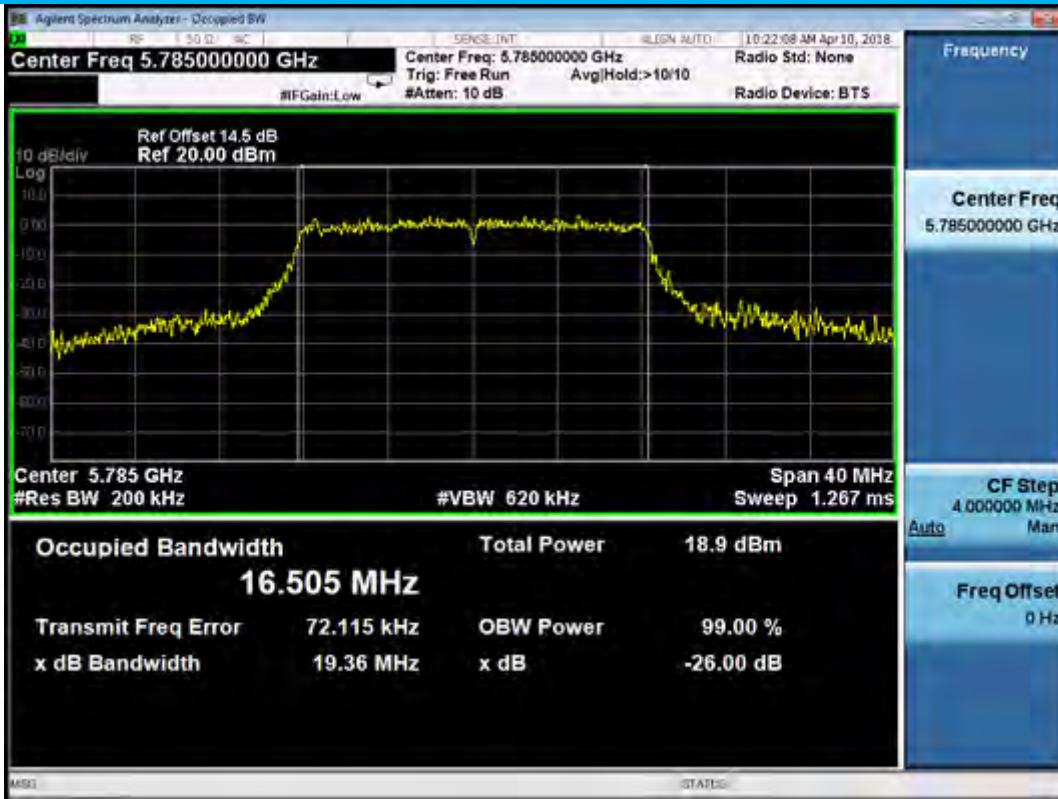


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5825

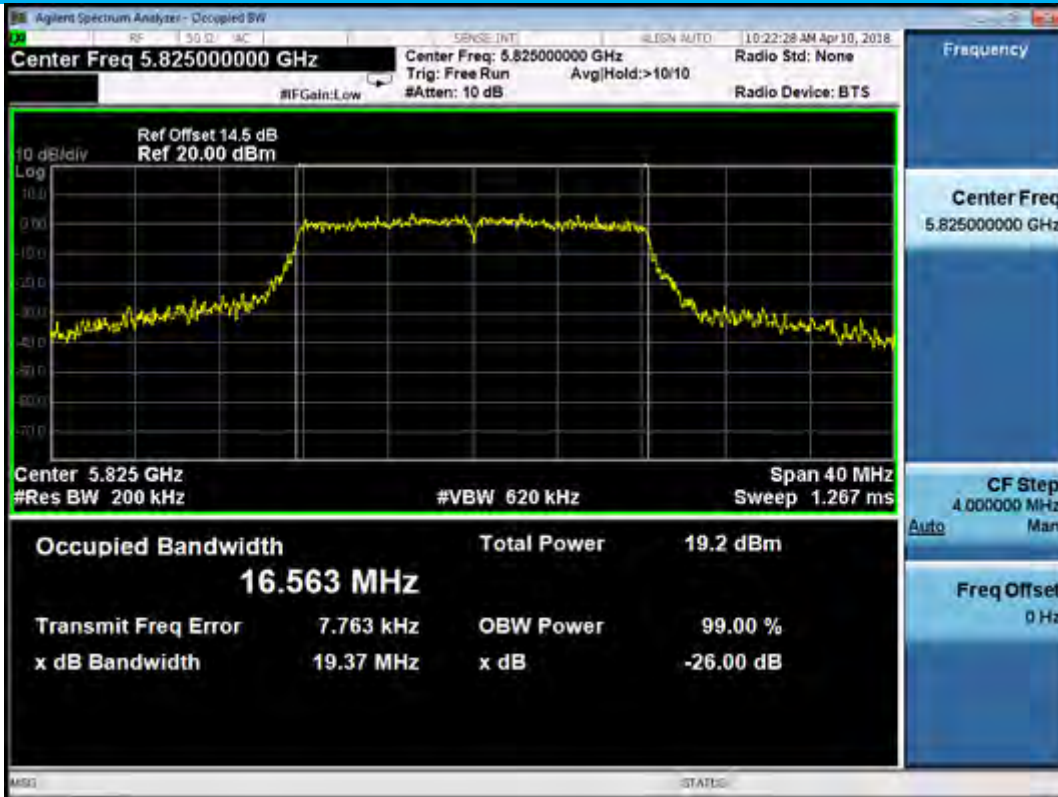

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5180

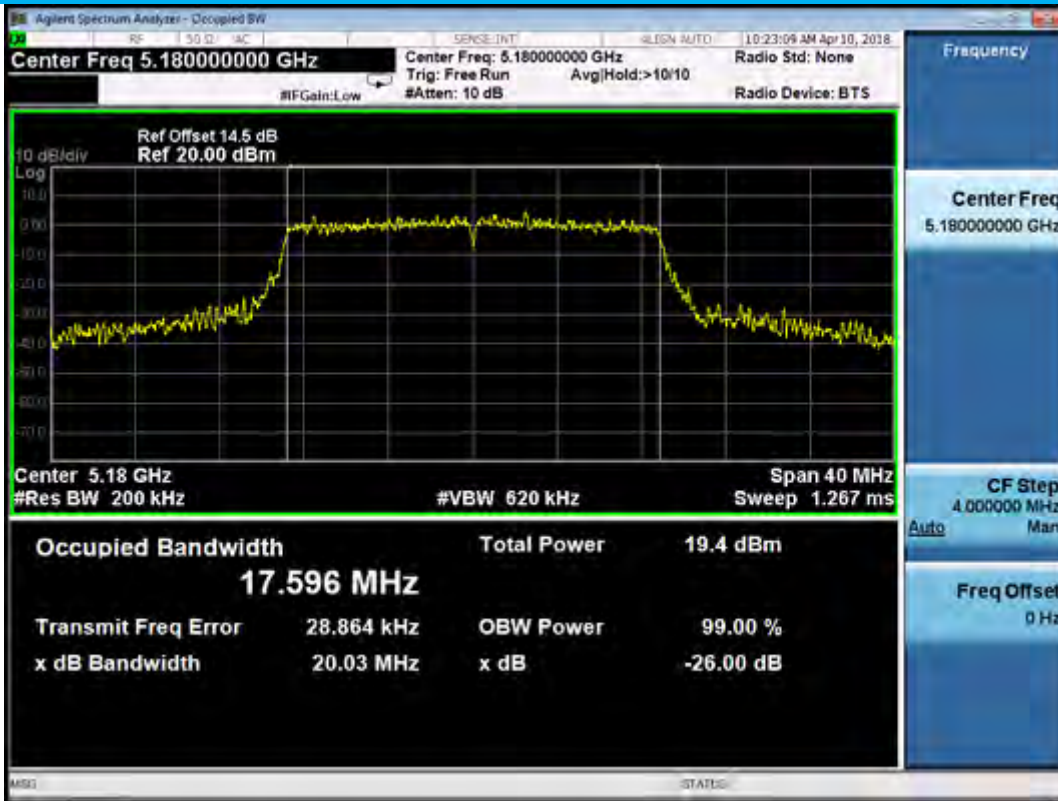


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5200

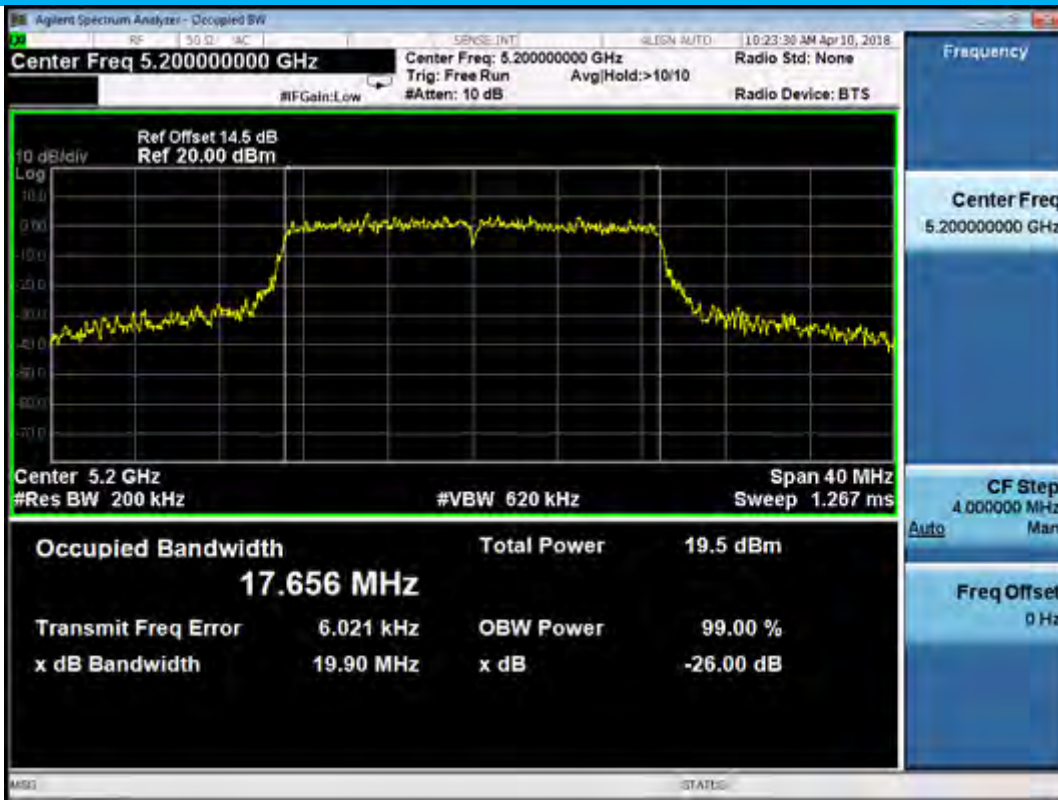


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5240




Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5745

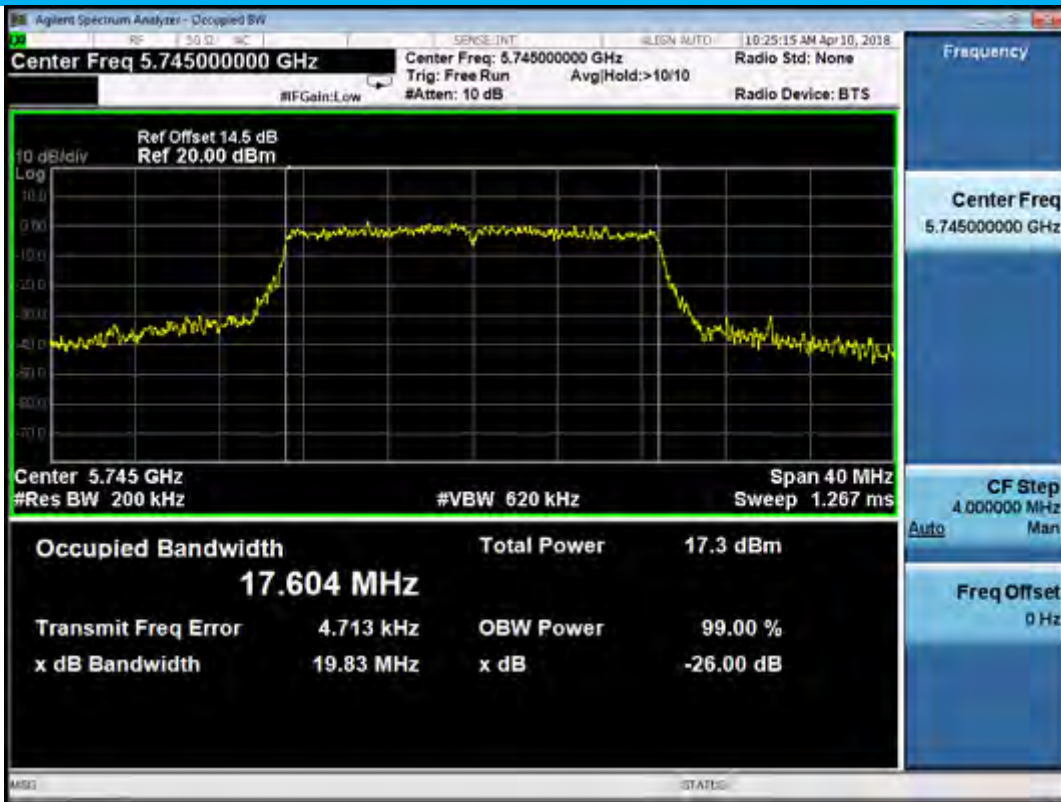


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5785

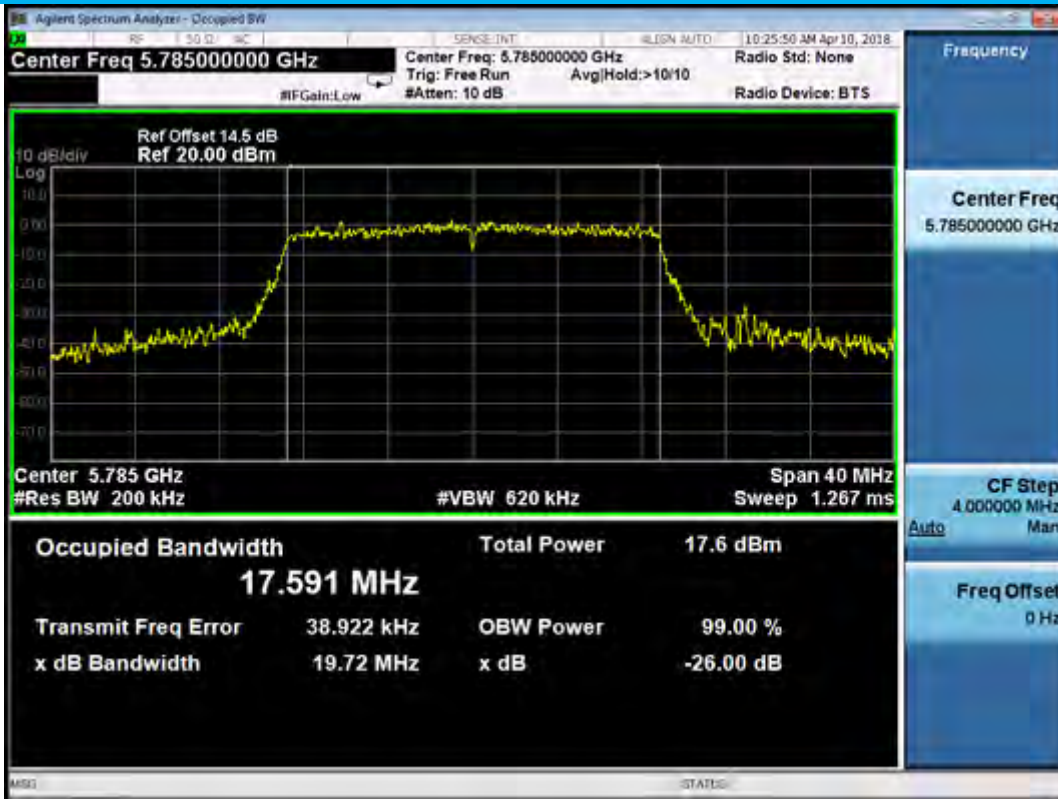


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5825

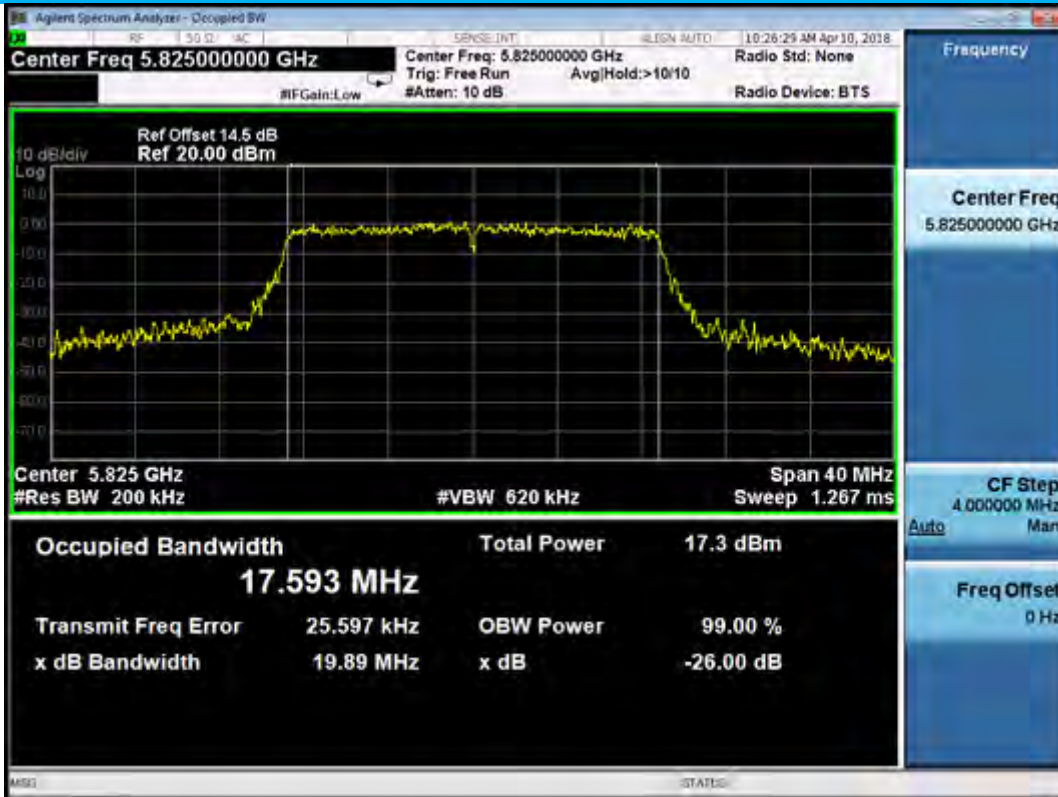


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5180

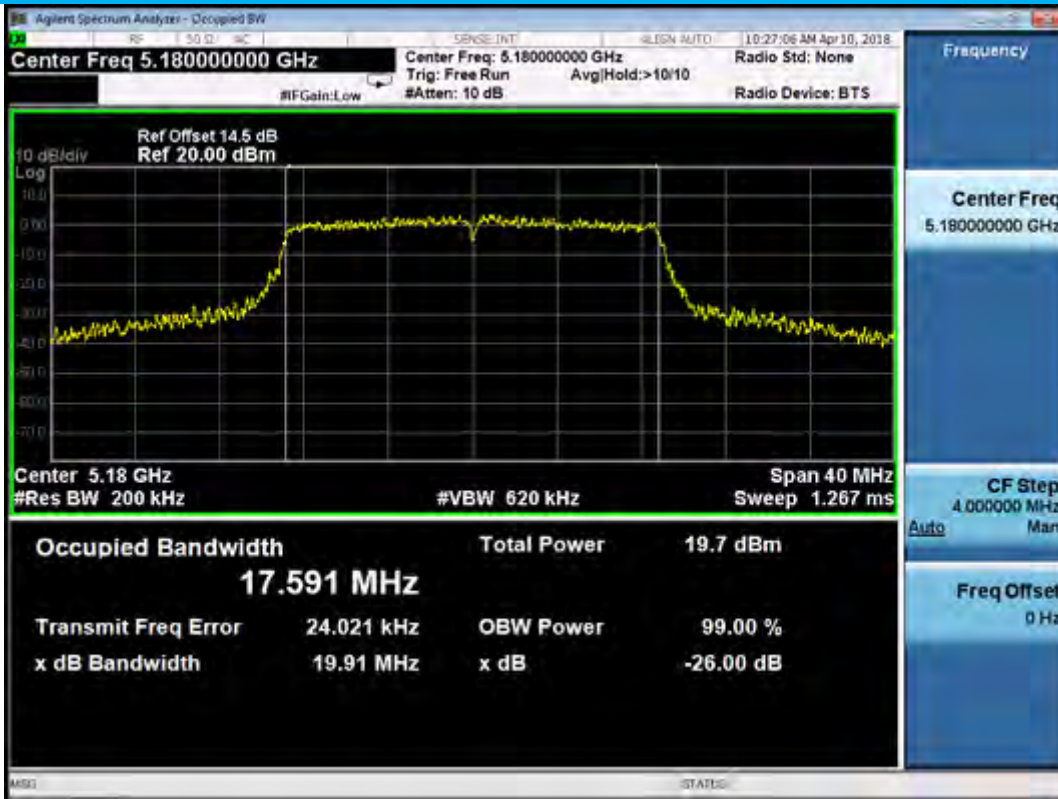


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5200

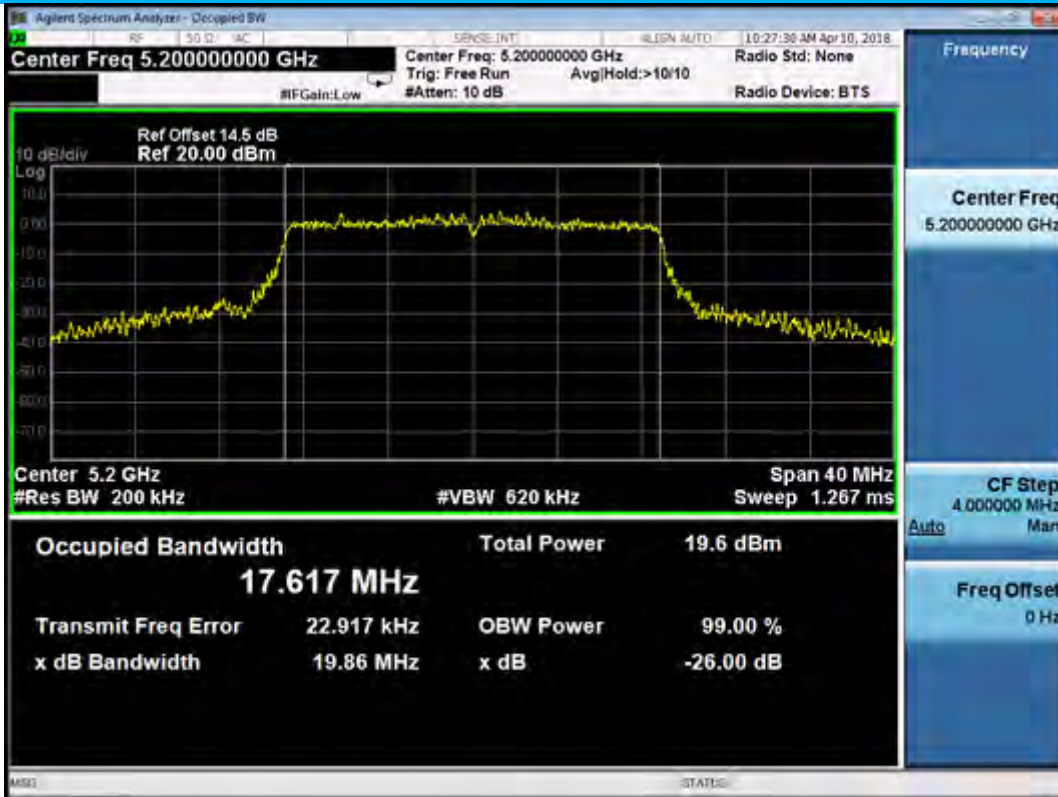

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5240

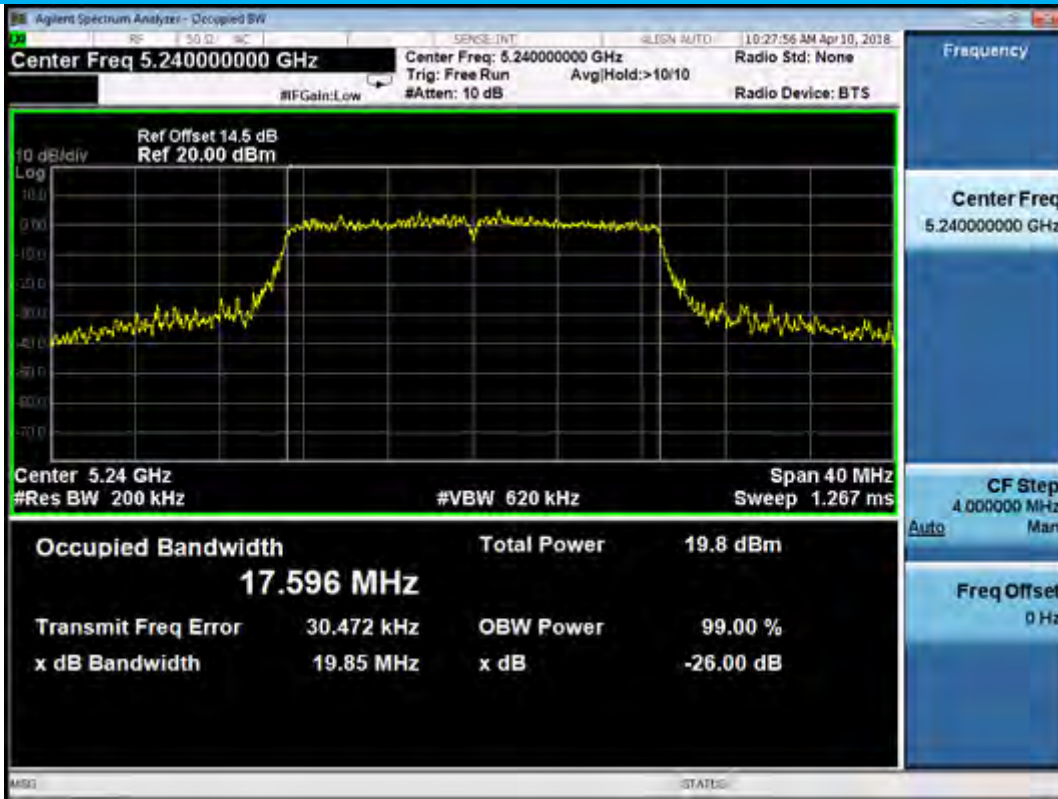

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5745

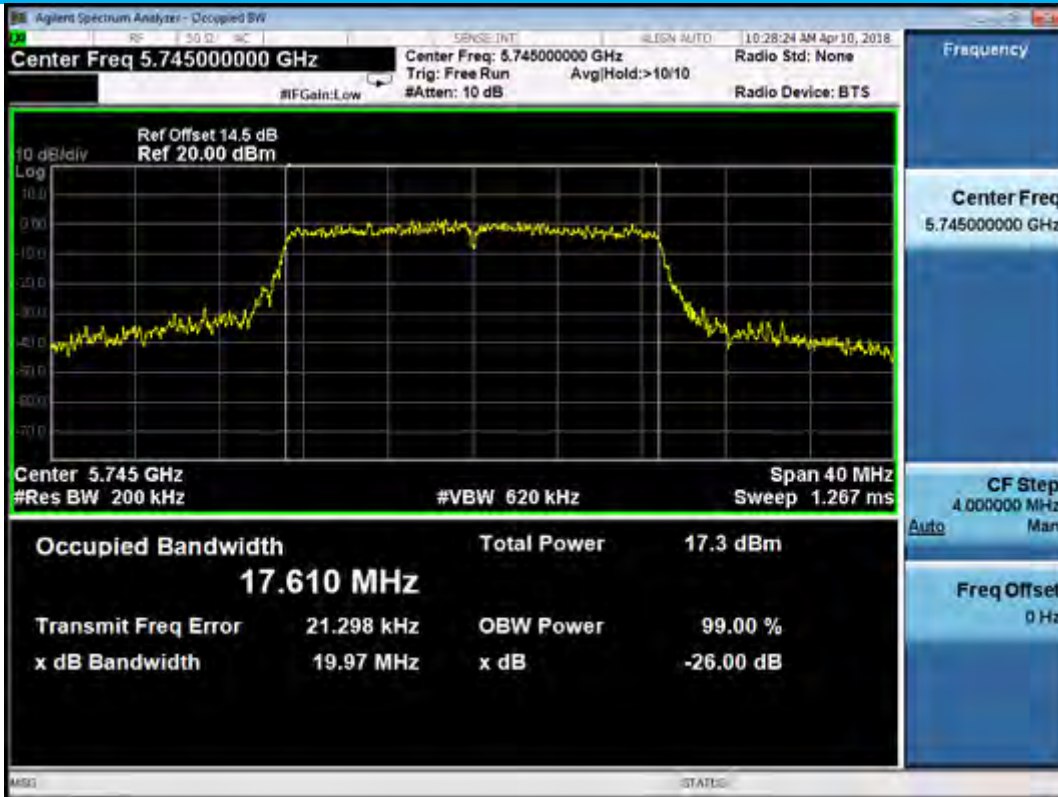


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5785




Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5825




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5190

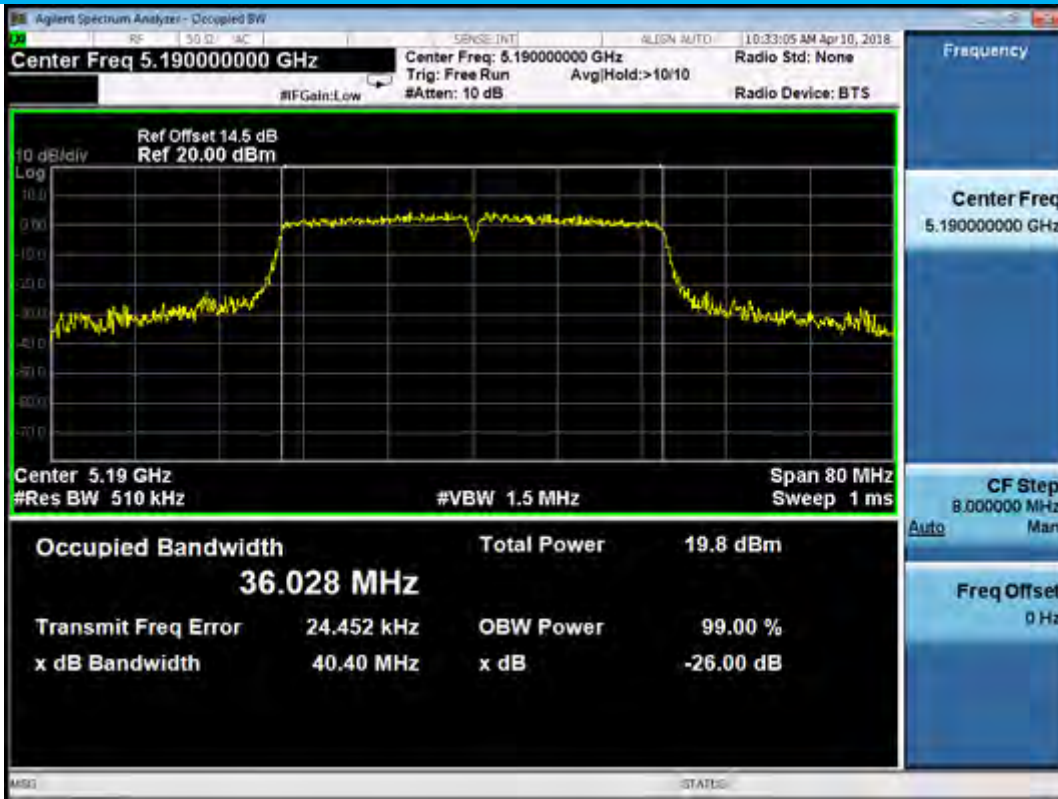


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5230

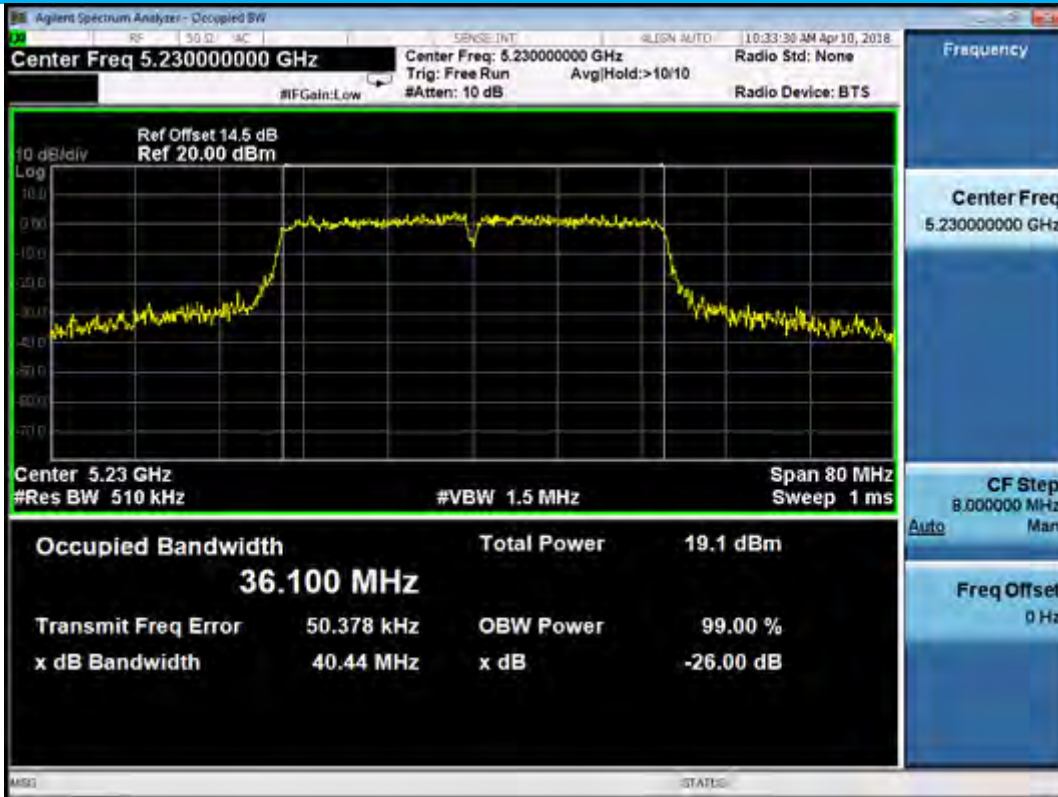

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5755

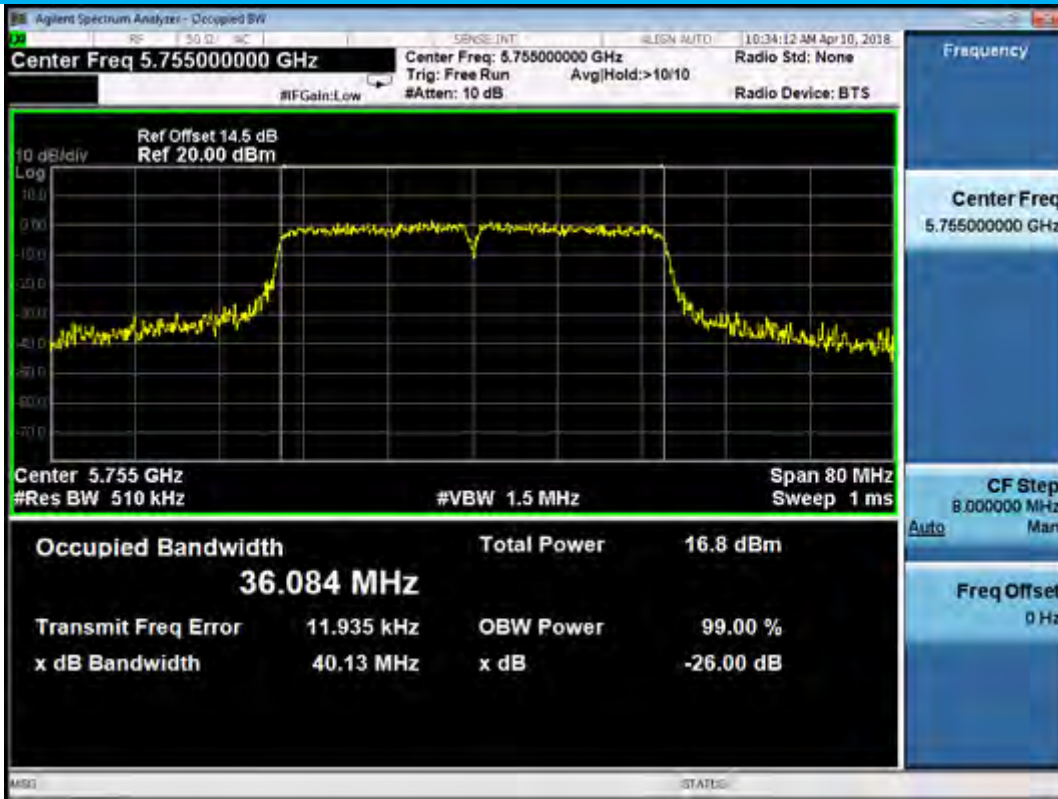


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5795

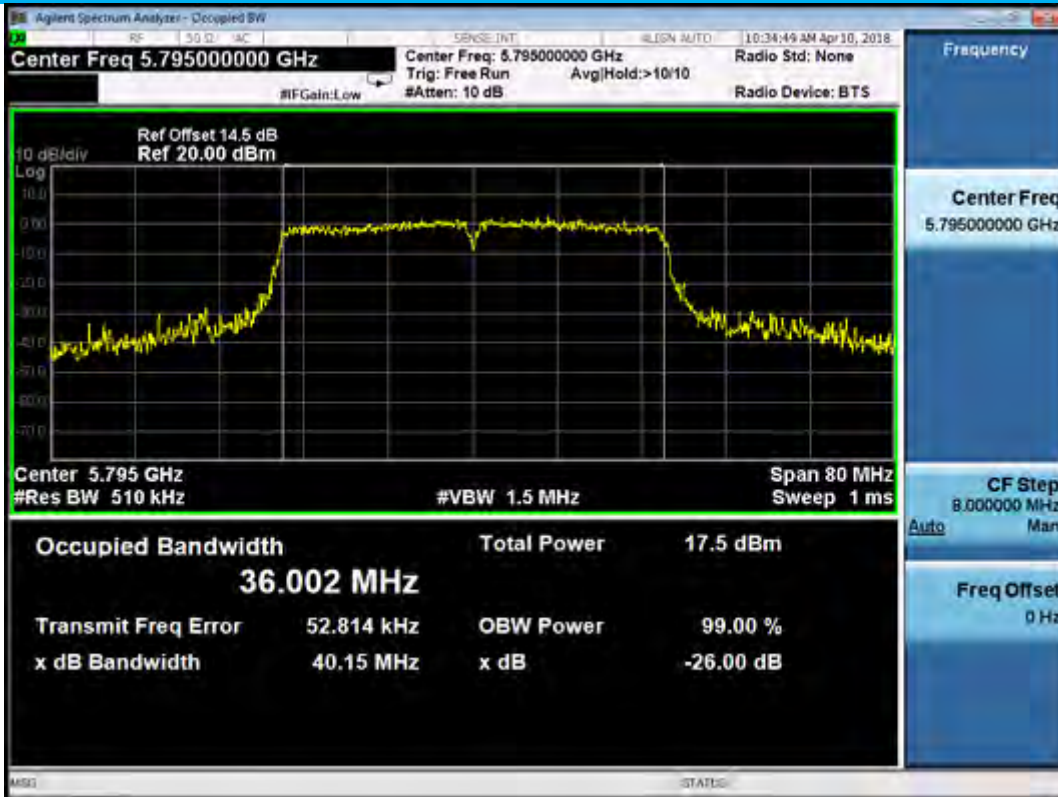


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5190




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5230

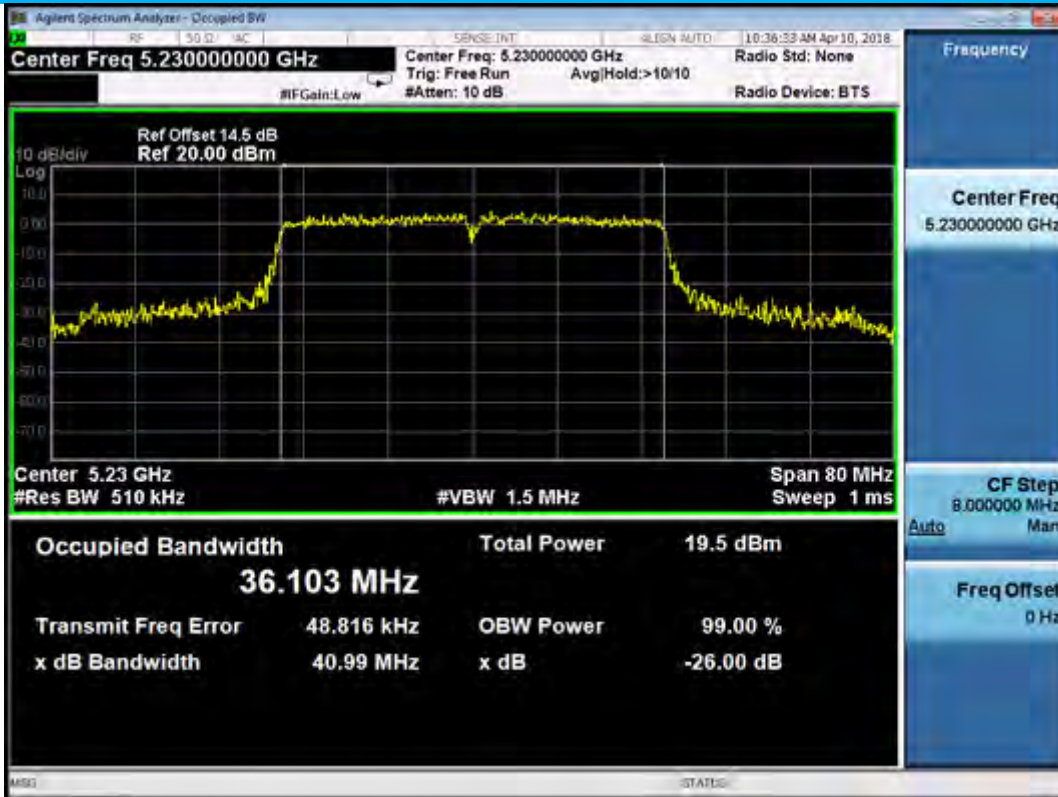


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5755

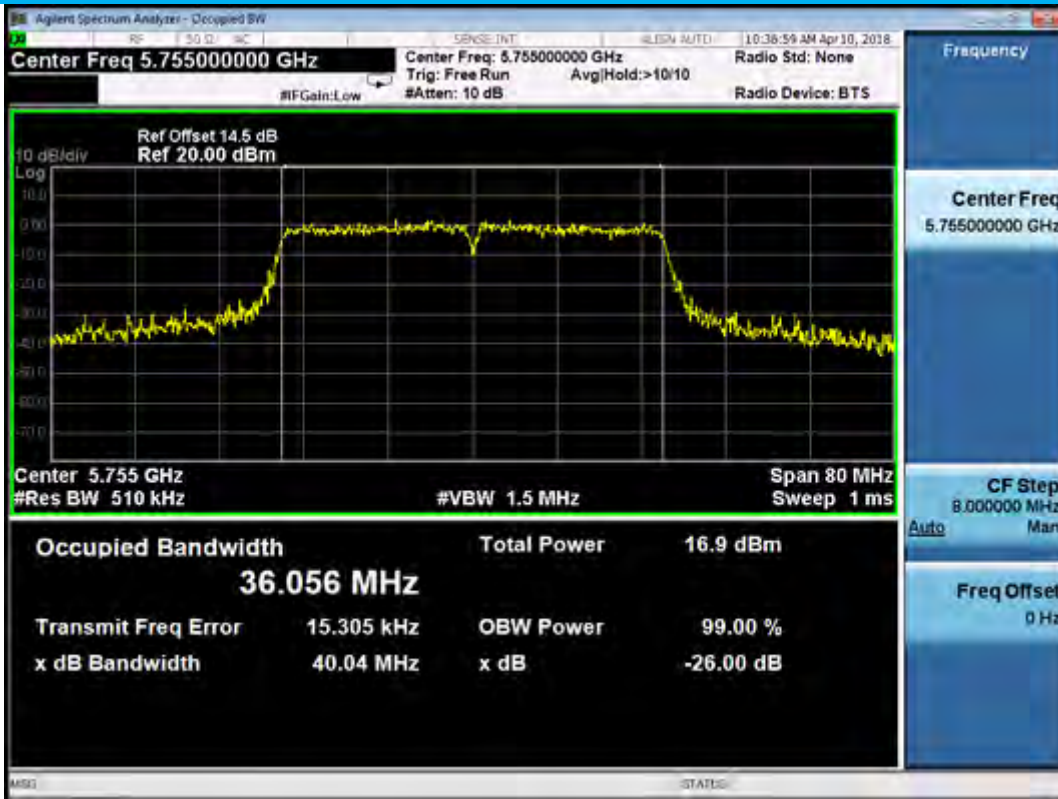


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5795

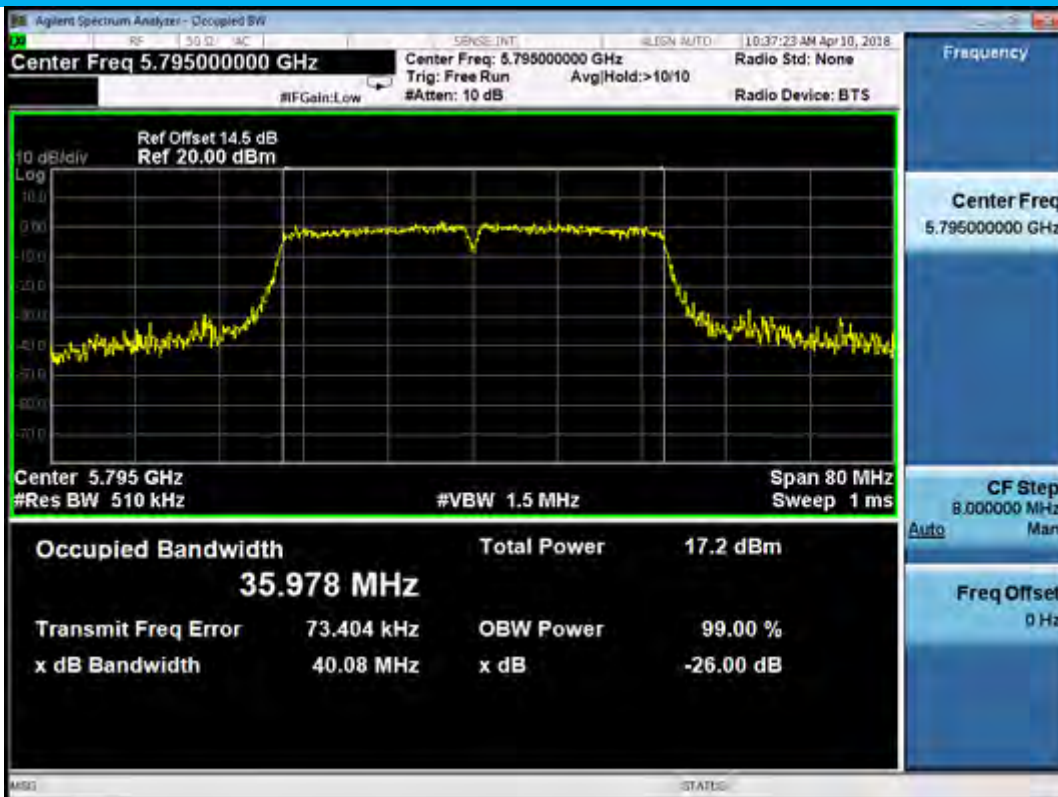

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5210

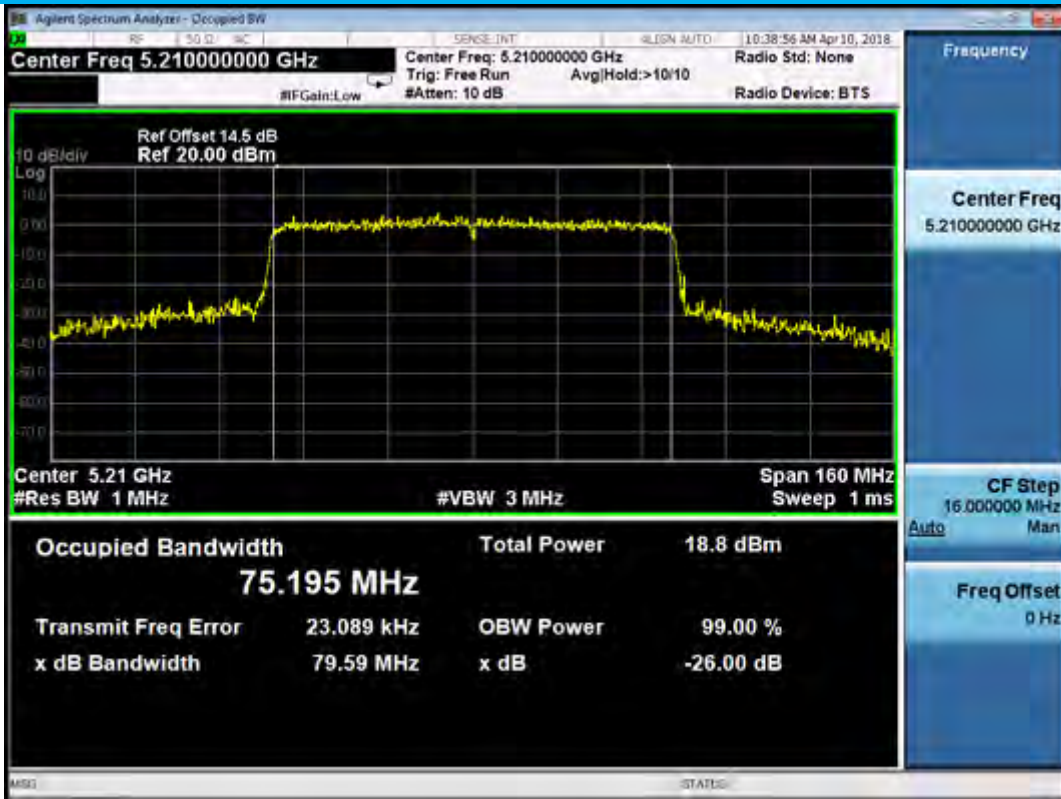


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5775

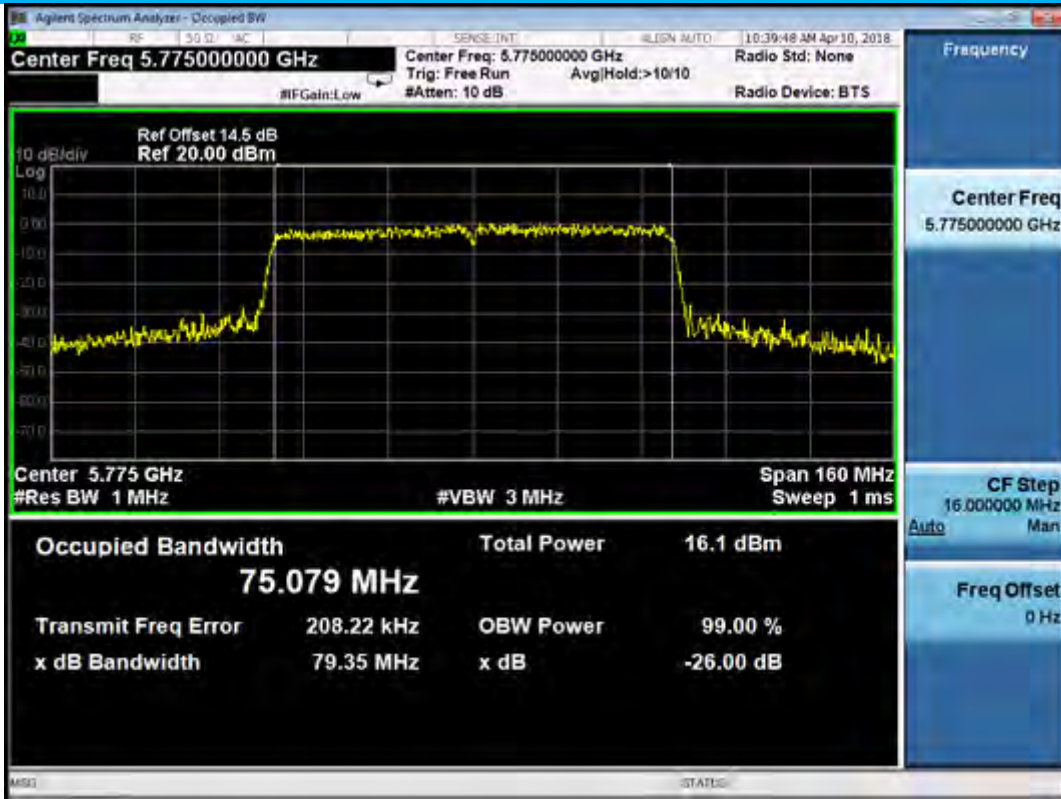

Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz) 5745

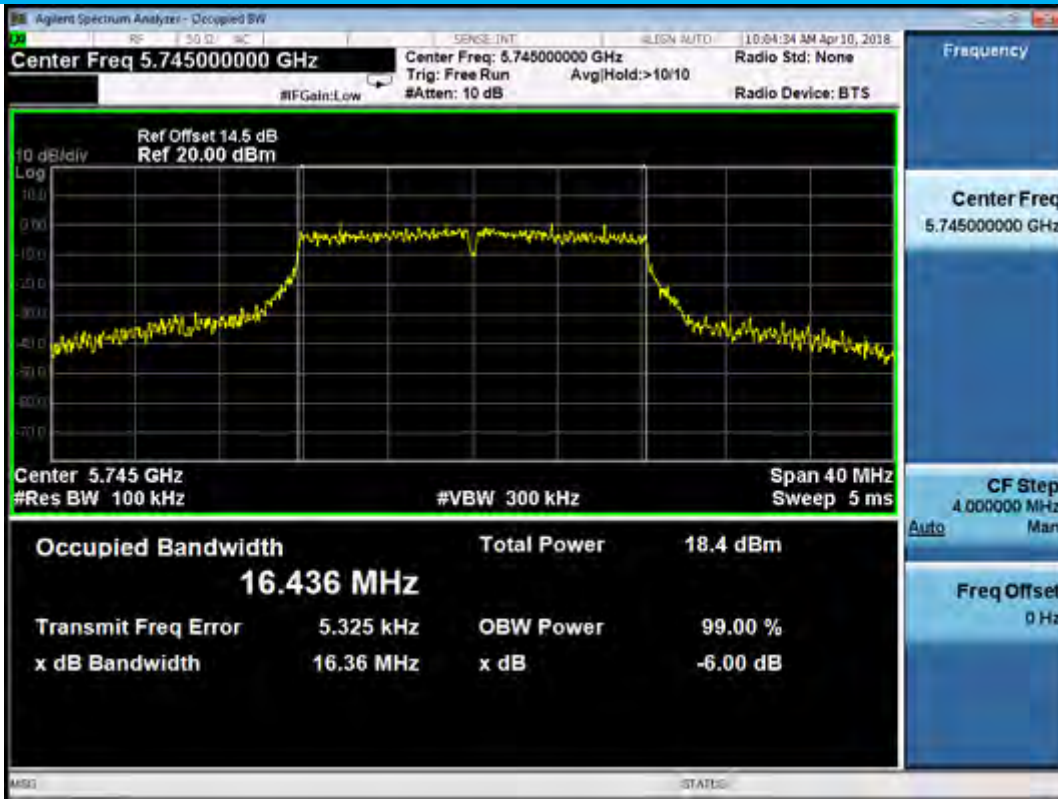


Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz) 5785



Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz) 5825

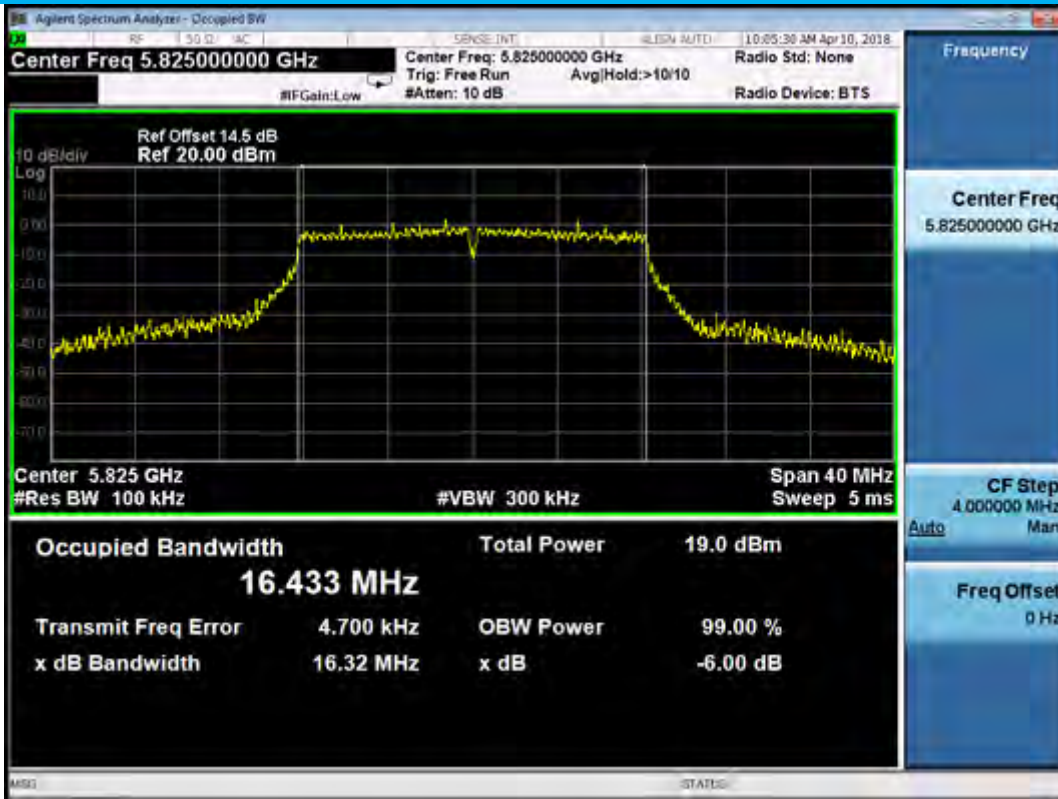

Minimum Emission Bandwidth
Test Model 802.11n(VHT20) mode


UNII Band III
Frequency(MHz) 5745




Minimum Emission Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5785



Minimum Emission Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5825

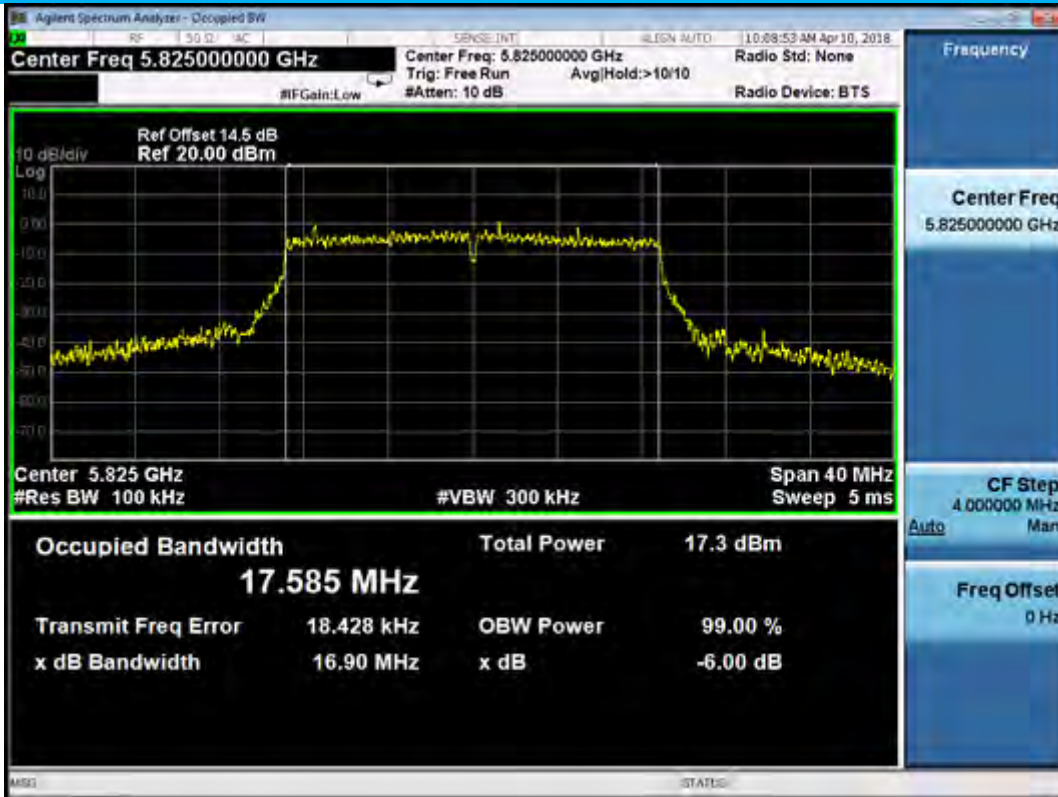


Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5745

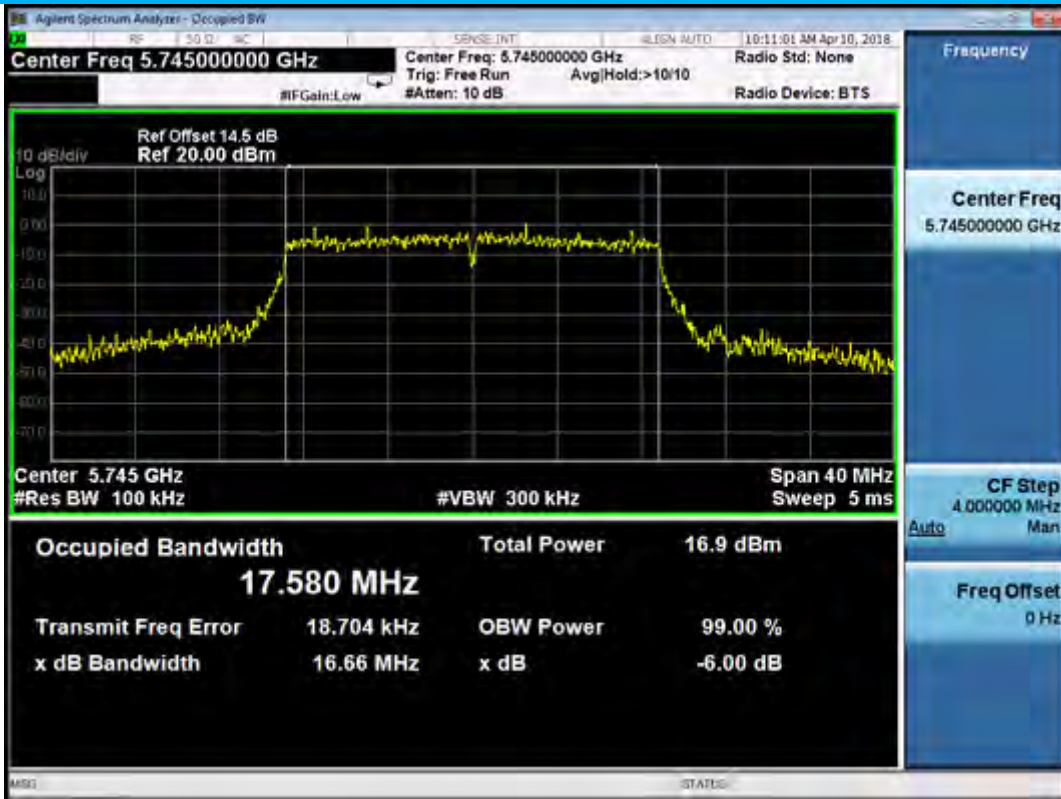


Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5785




Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5825

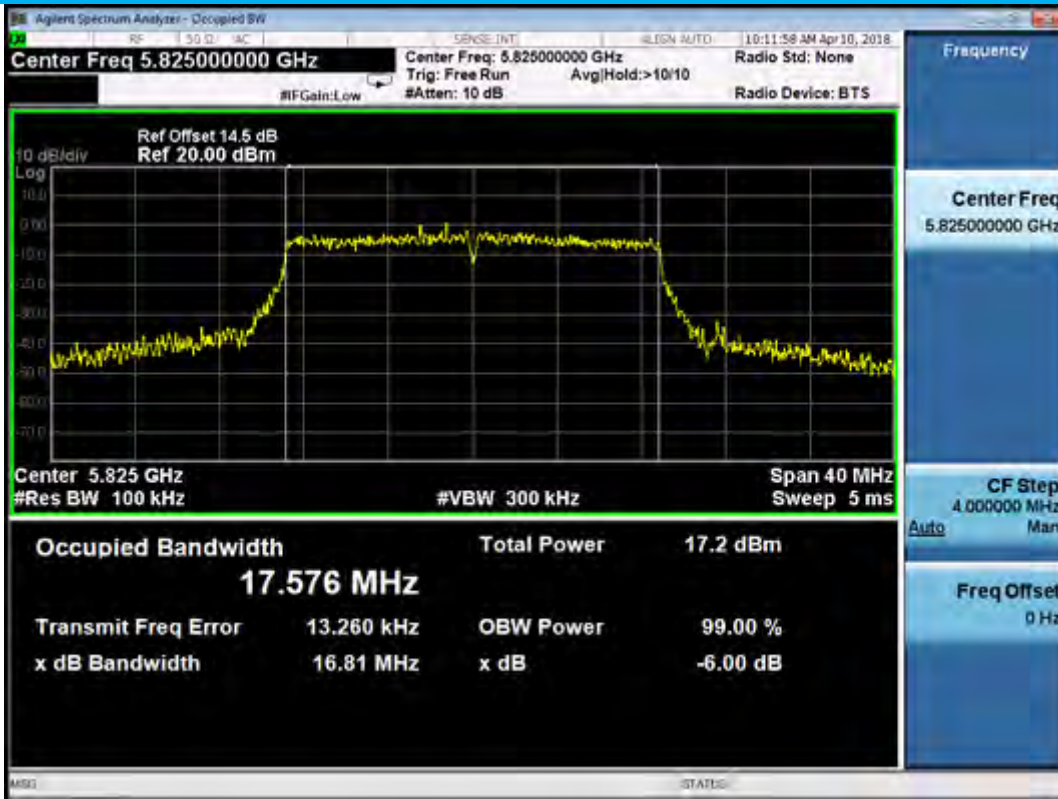

Minimum Emission Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5755

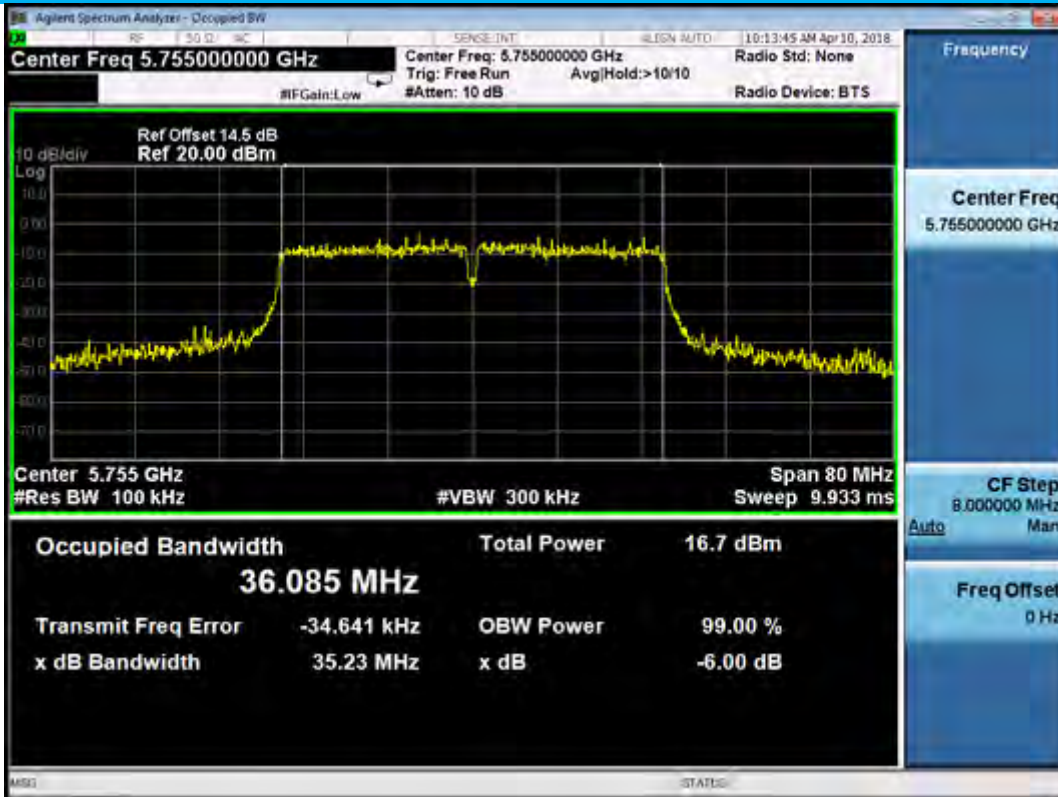


Minimum Emission Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5795

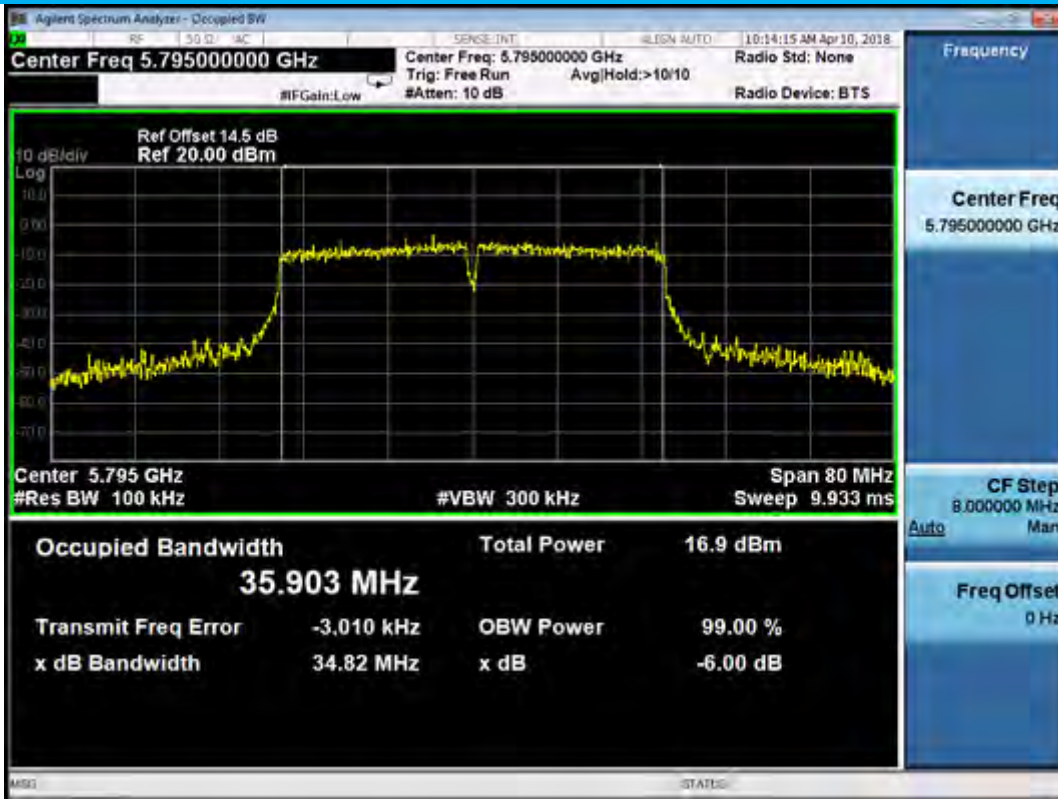


Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5755



Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5795

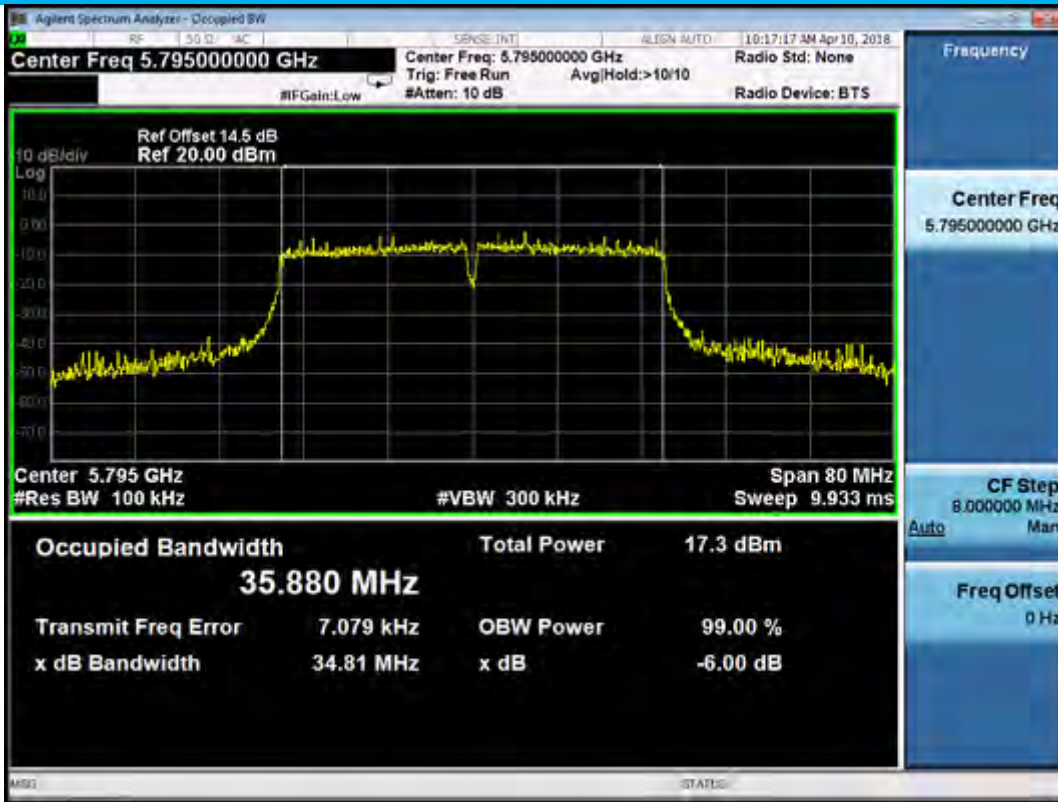

Minimum Emission Bandwidth UNII Band III
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5775

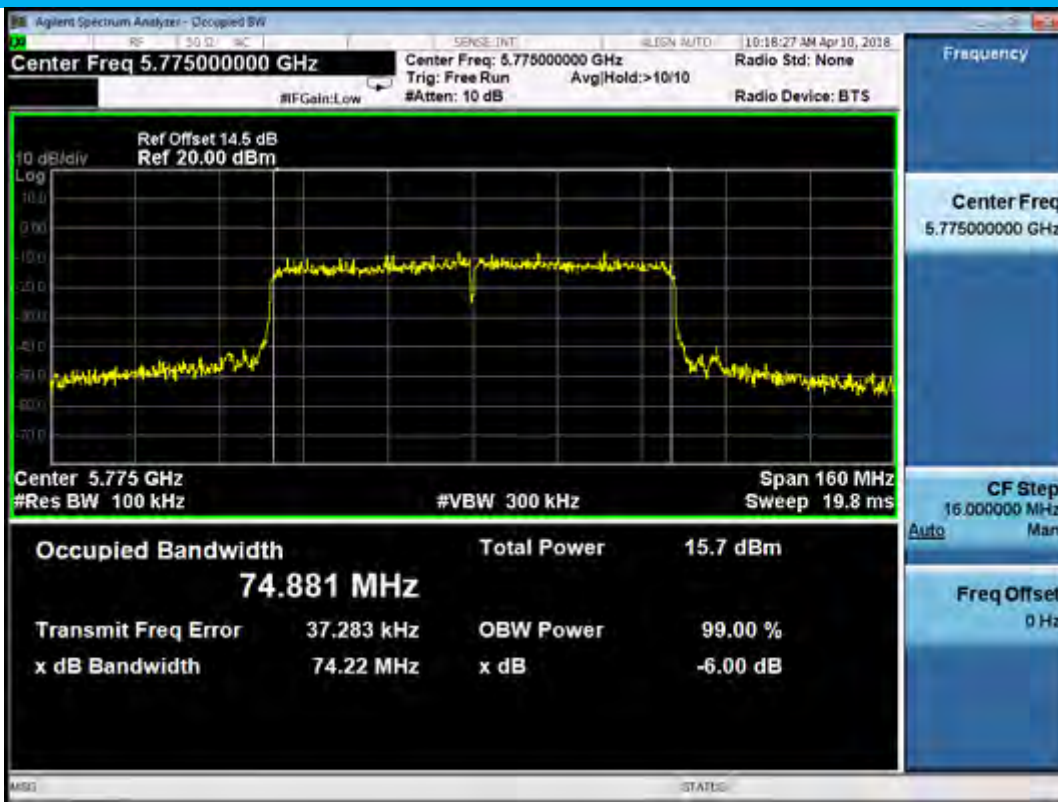

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

<input checked="" type="checkbox"/> 802.11a mode						
Temperature :		28°C	Test Date :		April 08,2018	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)		Limit (dBm)	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	18.12	13.93	24	Pass
	CH40	5200	17.87	13.43	24	Pass
	CH48	5240	17.74	13.74	24	Pass
UNII Band III	CH149	5745	15.86	15.35	30	Pass
	CH157	5785	15.79	15.79	30	Pass
	CH165	5825	16.23	15.73	30	Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode							
Temperature :		28°C	Test Date :		April 08,2018		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	16.19	12.11	17.62	21.99	Pass
	CH40	5200	16.30	11.91	17.65	21.99	Pass
	CH48	5240	15.90	12.85	17.65	21.99	Pass
UNII Band III	CH149	5745	14.29	13.81	17.07	27.99	Pass
	CH157	5785	14.05	13.86	16.97	27.99	Pass
	CH165	5825	14.71	13.92	17.34	27.99	Pass
Note: N/A (Not Applicable)							

802.11ac(VHT20) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	16.24	11.96	17.62	21.99	Pass
	CH40	5200	16.25	11.70	17.56	21.99	Pass
	CH48	5240	15.95	12.74	17.65	21.99	Pass
UNII Band III	CH149	5745	14.00	13.85	16.94	27.99	Pass
	CH157	5785	14.06	13.86	16.97	27.99	Pass
	CH165	5825	14.43	14.22	17.34	27.99	Pass

Note:
N/A (Not Applicable)

802.11n(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	15.88	11.07	17.12	21.99	Pass
	CH46	5230	15.78	12.21	17.36	21.99	Pass
UNII Band III	CH151	5755	13.34	13.10	16.23	27.99	Pass
	CH159	5795	14.03	13.41	16.74	27.99	Pass

Note:
N/A (Not Applicable)

802.11ac(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (MHz)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	15.59	11.09	16.91	21.99	Pass
	CH46	5230	15.61	12.33	17.28	21.99	Pass
UNII Band III	CH151	5755	13.62	13.14	16.40	27.99	Pass
	CH159	5795	13.86	13.24	16.57	27.99	Pass

Note:
N/A (Not Applicable)

802.11ac(VHT80) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	14.67	10.42	16.06	21.99	Pass
UNII Band III	CH155	5775	13.01	12.38	15.72	27.99	Pass

Note:
N/A (Not Applicable)

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".
- 2) Use the peak search function on the instrument to find the peak of the spectrum.
- 3) The result is the PPSD.
- 4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth.

8.3.5 Test Results

802.11a mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density		Limit	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	5.52	1.46	≤11dBm/1MHz	Pass
	CH40	5200	5.57	1.47	≤11dBm/1MHz	Pass
	CH48	5240	5.64	3.06	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	0.74	0.69	≤30dBm/500KHz	Pass
	CH157	5785	1.12	0.62	≤30dBm/500KHz	Pass
	CH165	5825	1.06	1.31	≤30dBm/500KHz	Pass

Note:
N/A (Not Applicable)

802.11n(VHT20) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	3.40	-0.64	3.76	≤8.99dBm/1MHz	Pass
	CH40	5200	3.31	-0.55	4.16	≤8.99dBm/1MHz	Pass
	CH48	5240	3.30	0.29	3.91	≤8.99dBm/1MHz	Pass
UNII Band III	CH149	5745	-1.32	-1.65	-0.57	≤27.99dBm/500KHz	Pass
	CH157	5785	-1.27	-1.62	-0.81	≤27.99dBm/500KHz	Pass
	CH165	5825	-0.82	-1.23	-0.56	≤27.99dBm/500KHz	Pass

Note:
N/A (Not Applicable)

802.11ac(VHT20) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	3.67	0.31	3.84	≤8.99dBm/1MHz	Pass
	CH40	5200	3.88	-0.43	4.28	≤8.99dBm/1MHz	Pass
	CH48	5240	3.50	0.65	3.91	≤8.99dBm/1MHz	Pass
UNII Band III	CH149	5745	-1.64	-1.59	-1.44	≤27.99dBm/500KHz	Pass
	CH157	5785	-0.90	-1.15	-1.19	≤27.99dBm/500KHz	Pass
	CH165	5825	-0.91	-1.54	-0.94	≤27.99dBm/500KHz	Pass

Note:
N/A (Not Applicable)

802.11n(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	0.26	-3.74	0.95	≤8.99dBm/1MHz	Pass
	CH46	5230	0.29	-3.24	0.30	≤8.99dBm/1MHz	Pass
UNII Band III	CH151	5755	-5.43	-4.72	-5.06	≤27.99dBm/500KHz	Pass
	CH159	5795	-4.46	-4.18	-4.46	≤27.99dBm/500KHz	Pass

Note:
N/A (Not Applicable)

802.11ac(VHT40) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	0.43	-3.75	0.76	≤8.99dBm/1MHz	Pass
	CH46	5230	0.54	-3.10	0.44	≤8.99dBm/1MHz	Pass
UNII Band III	CH151	5755	-5.32	-5.82	-4.24	≤27.99dBm/500KHz	Pass
	CH159	5795	-4.17	-5.59	-4.61	≤27.99dBm/500KHz	Pass

Note:
N/A (Not Applicable)


802.11ac(VHT80) mode

Temperature : 28°C Test Date : April 08,2018
Humidity : 65 % Test By: King Kong


Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	-3.75	-8.98	-3.48	≤8.99dBm/1MHz	Pass
UNII Band III	CH155	5775	-8.61	-9.56	-8.74	≤27.99dBm/500KHz	Pass

Note:
N/A (Not Applicable)

Power Spectral Density	UNII Band I
Test Model 802.11a	Frequency(MHz) 5180
Ant0	

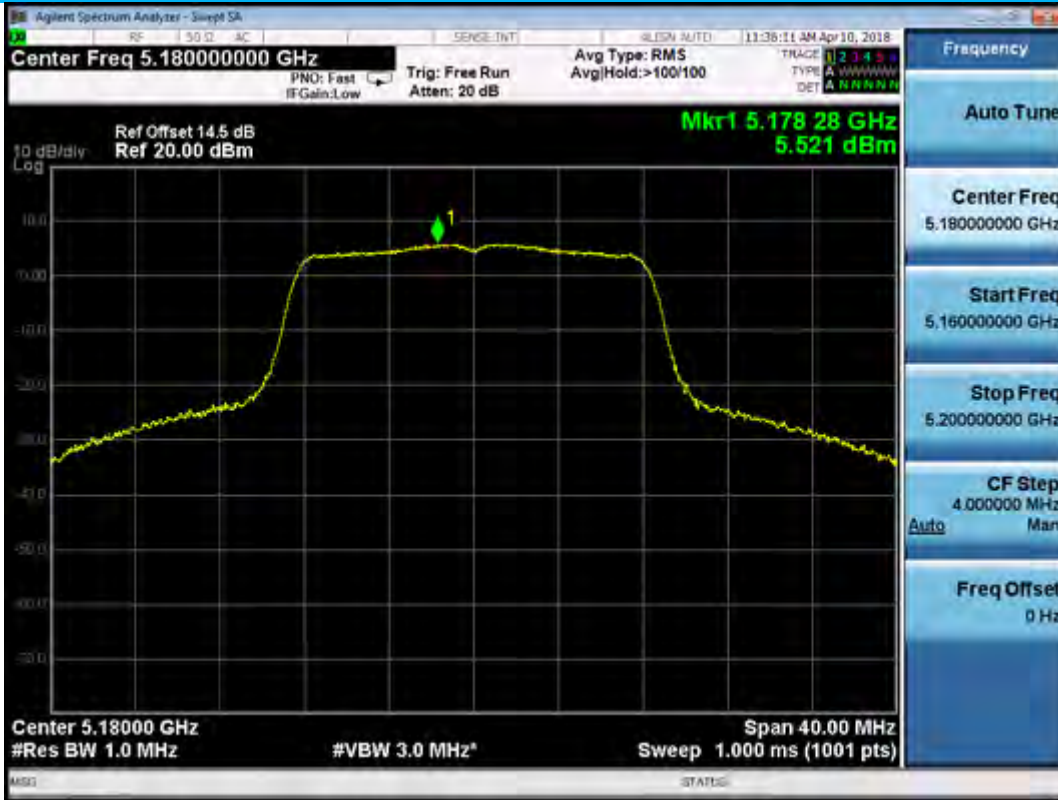


Ant1

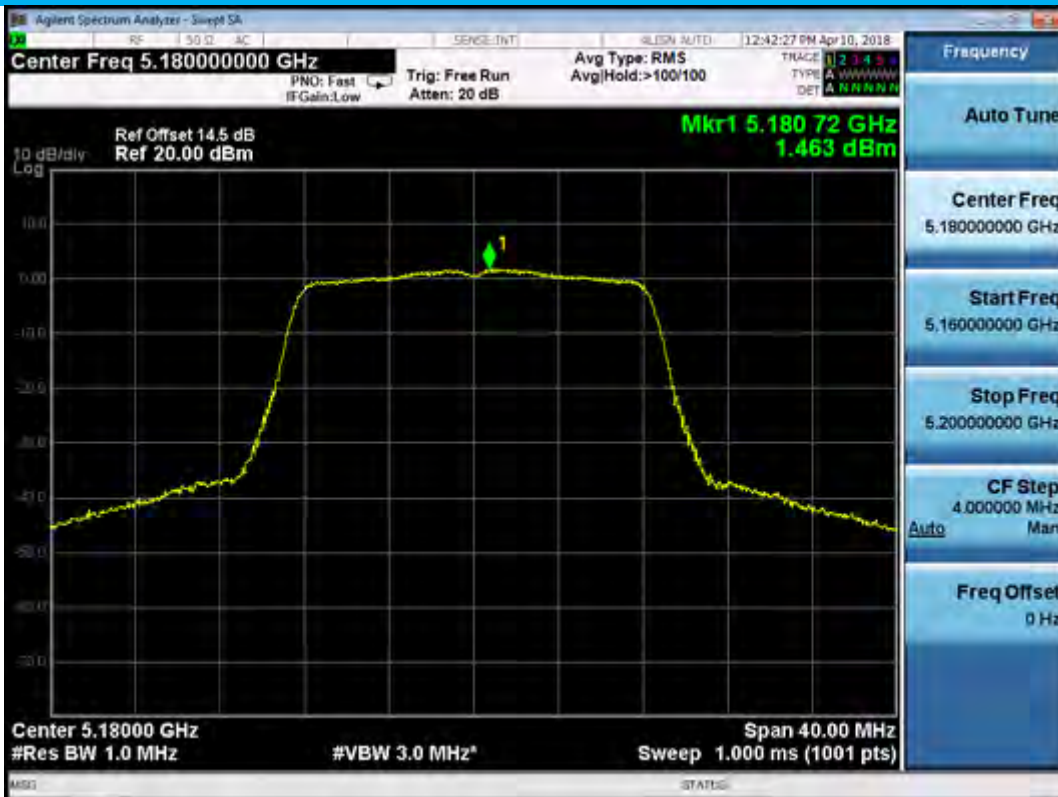


Power Spectral Density
Test Model 802.11a
Ant0


UNII Band I
Frequency(MHz) 5200

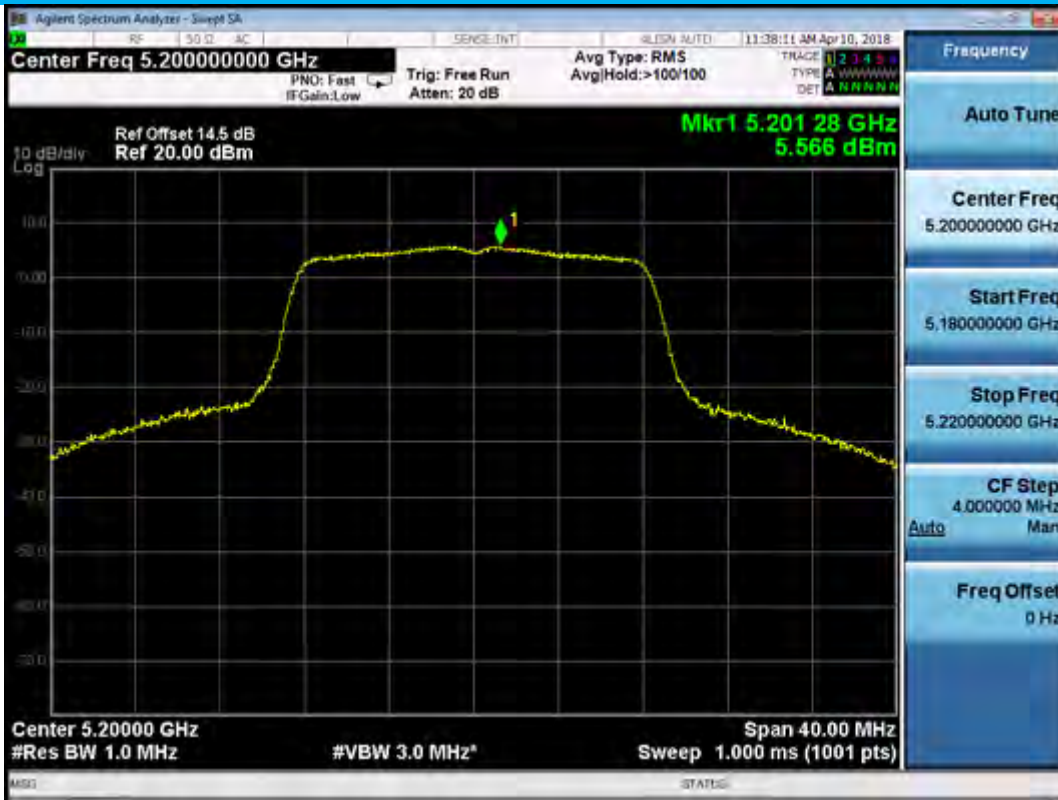


Ant1

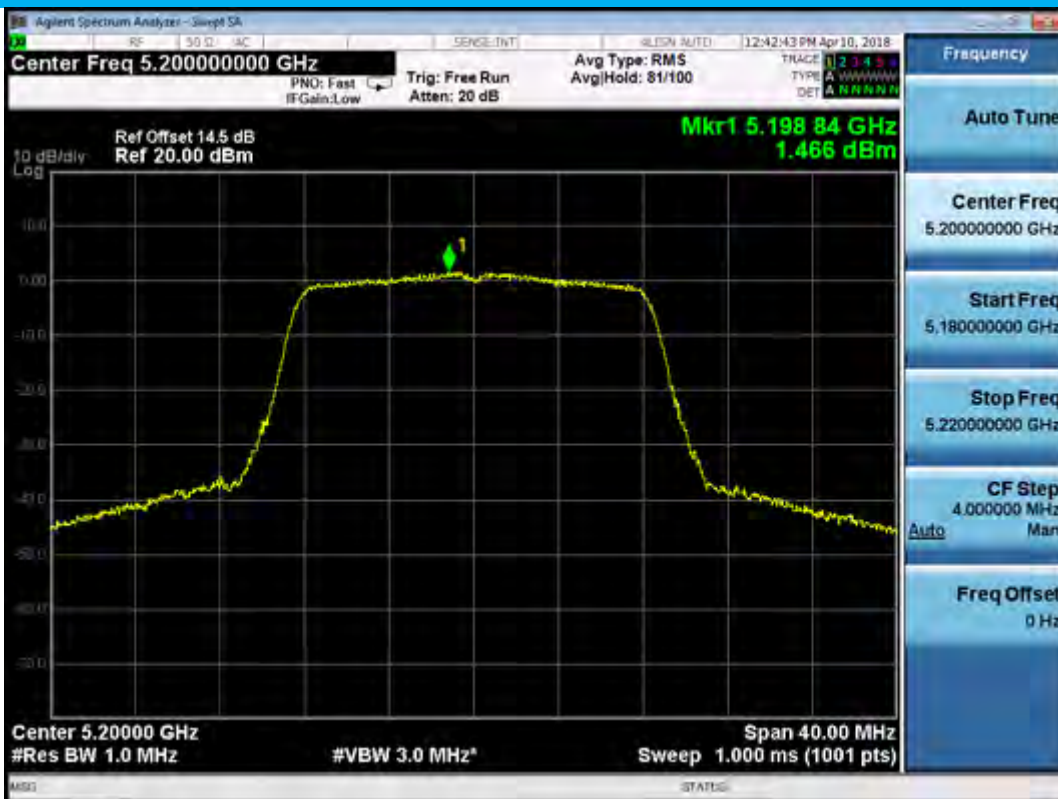

Power Spectral Density UNII Band I
 Test Model 802.11a Frequency(MHz) 5240
 Ant0

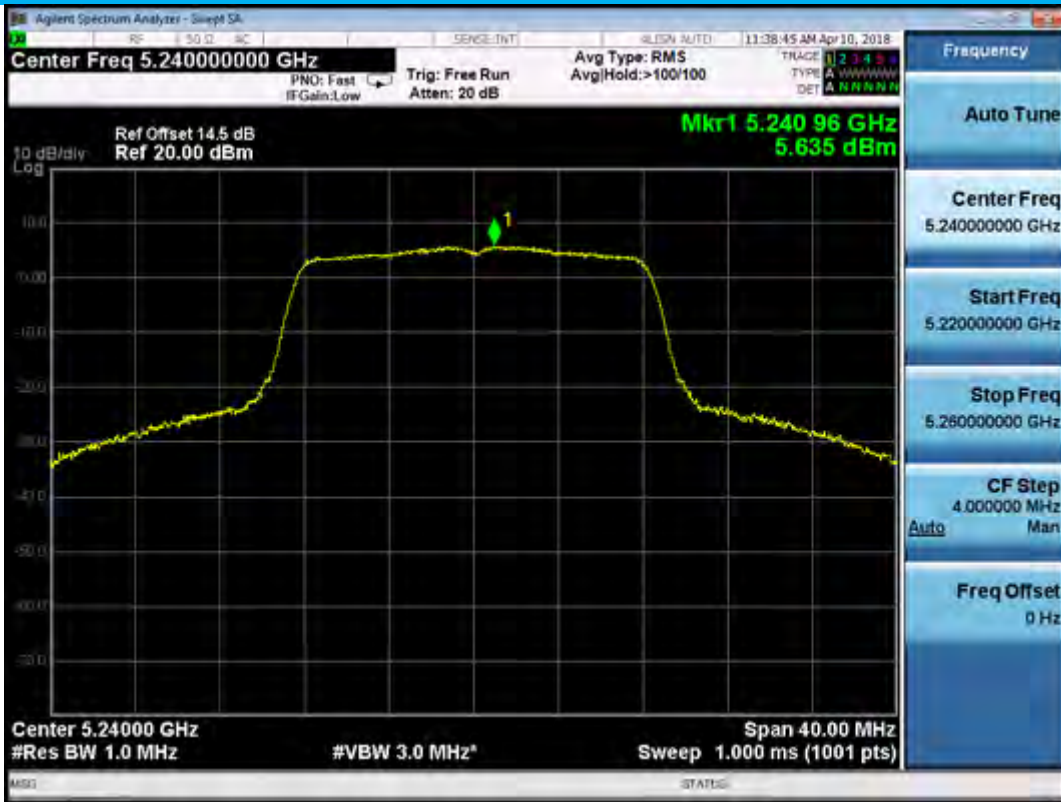

Ant1

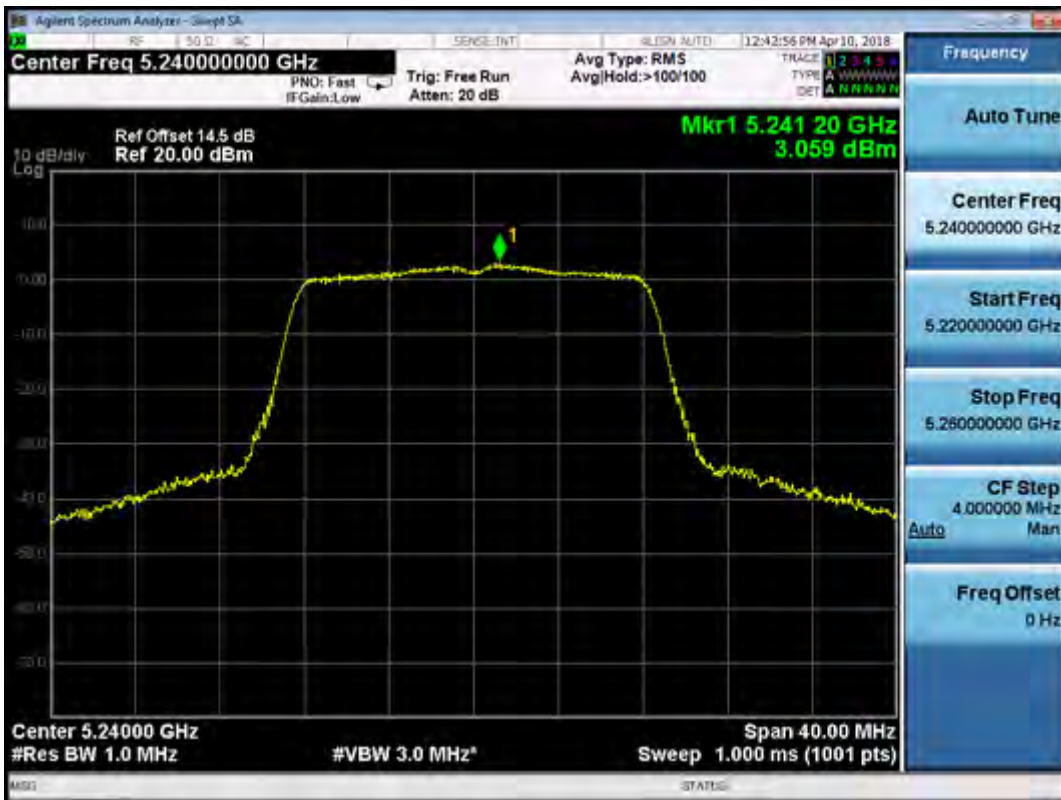


Power Spectral Density
Test Model 802.11a
Ant0


UNII Band III
Frequency(MHz) 5745




Ant1

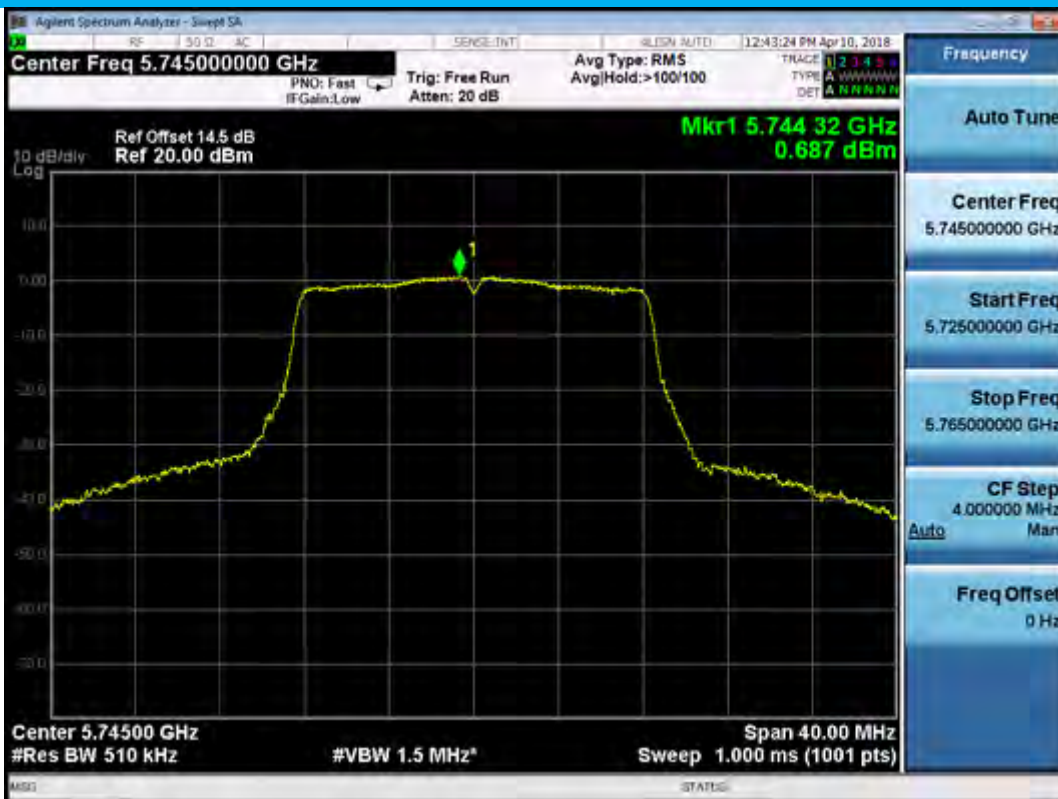


Power Spectral Density UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5180
 Ant0

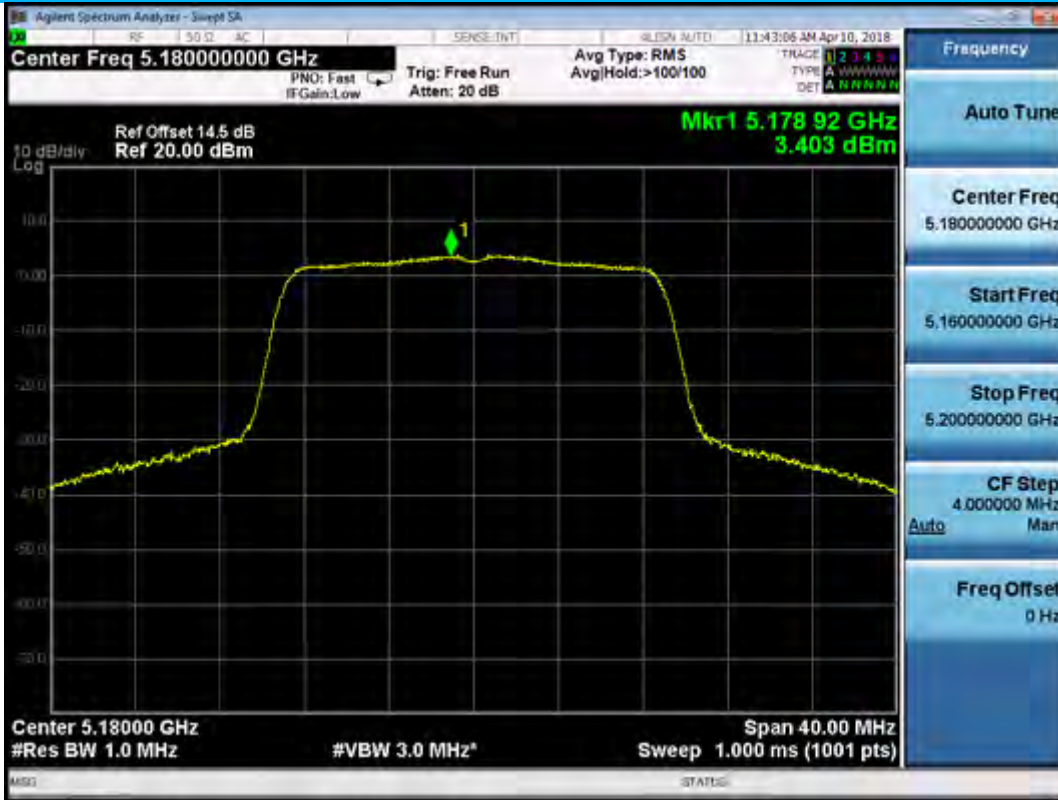


Ant1

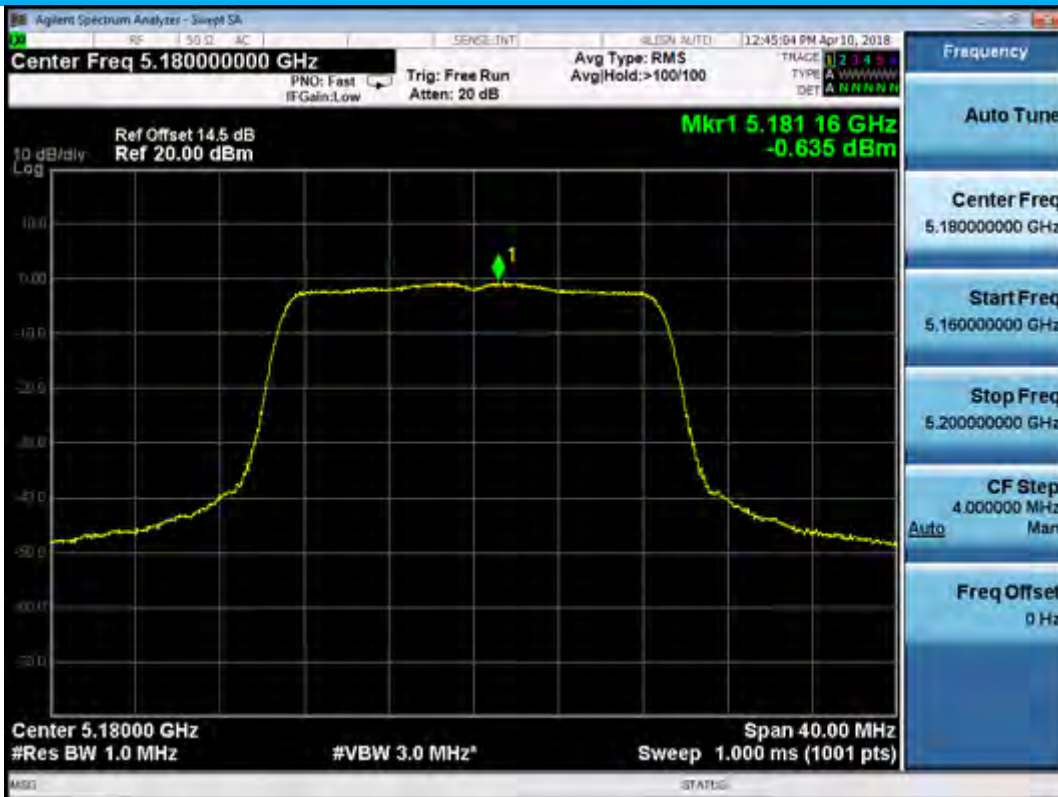


Power Spectral Density UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5200
 Ant0

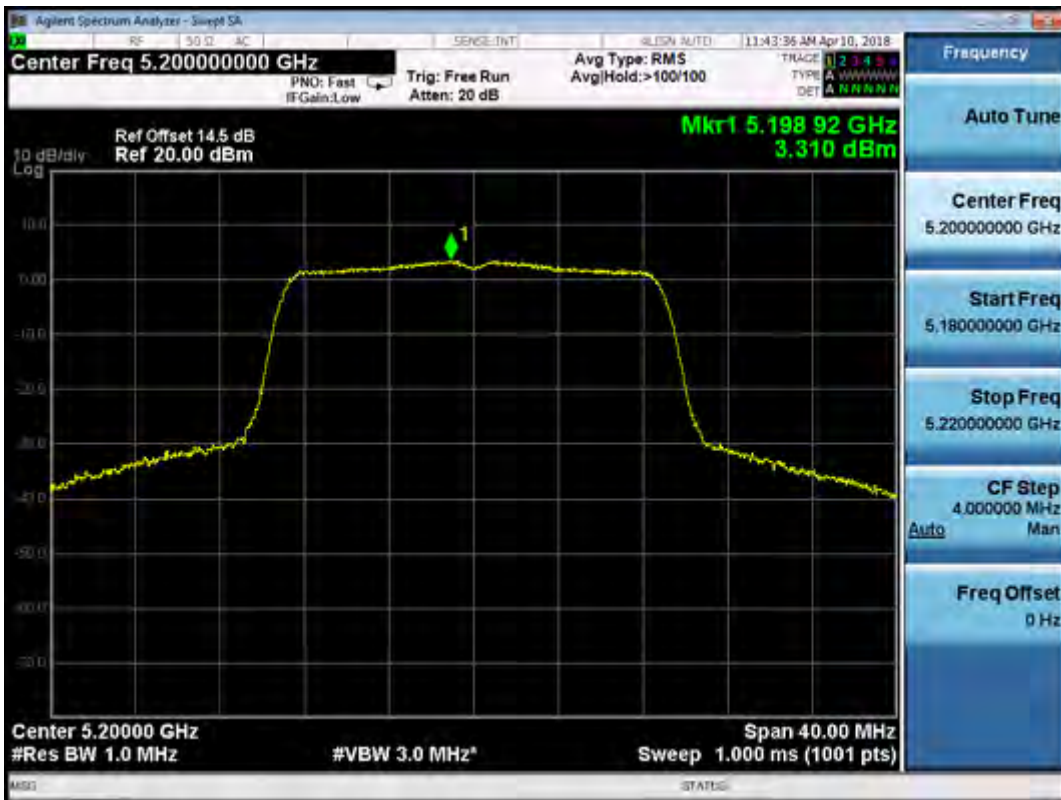


Ant1

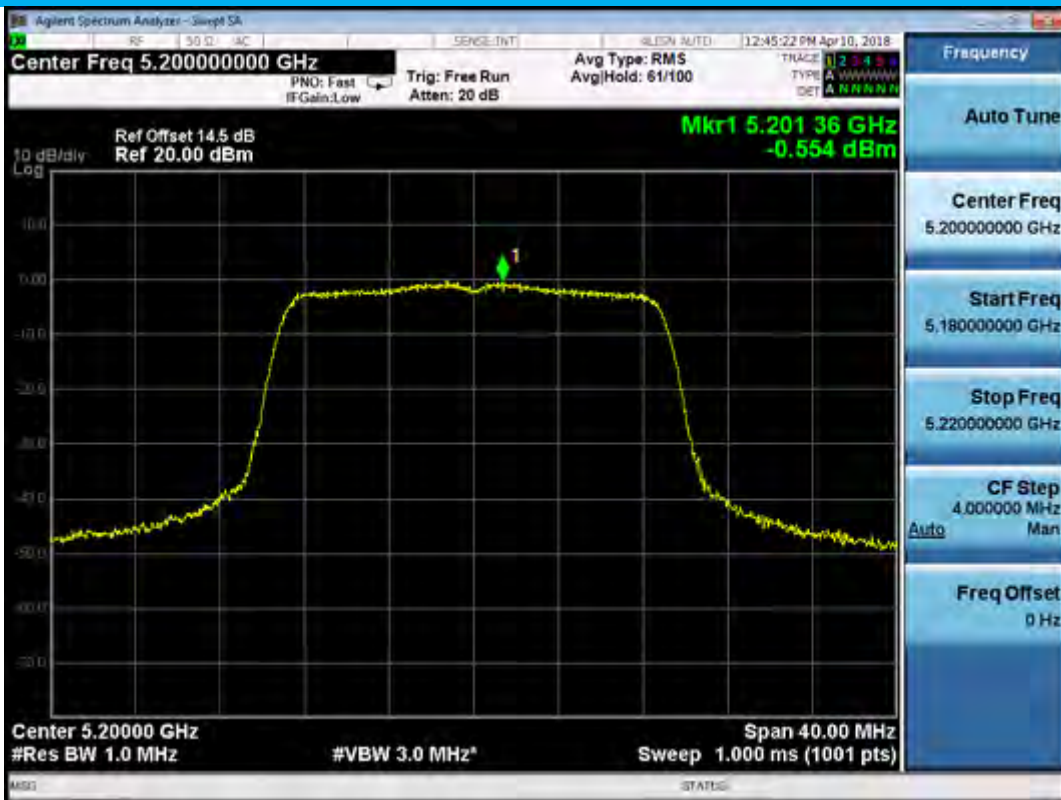


Power Spectral Density UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5745
 Ant0

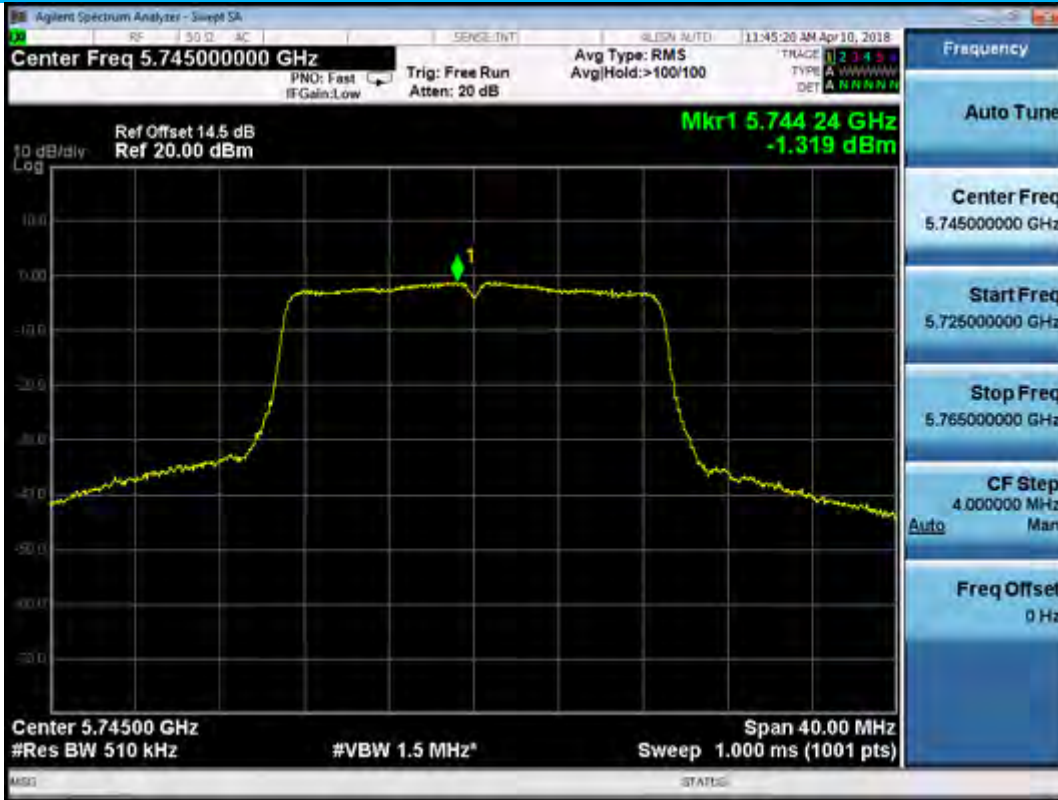


Ant1

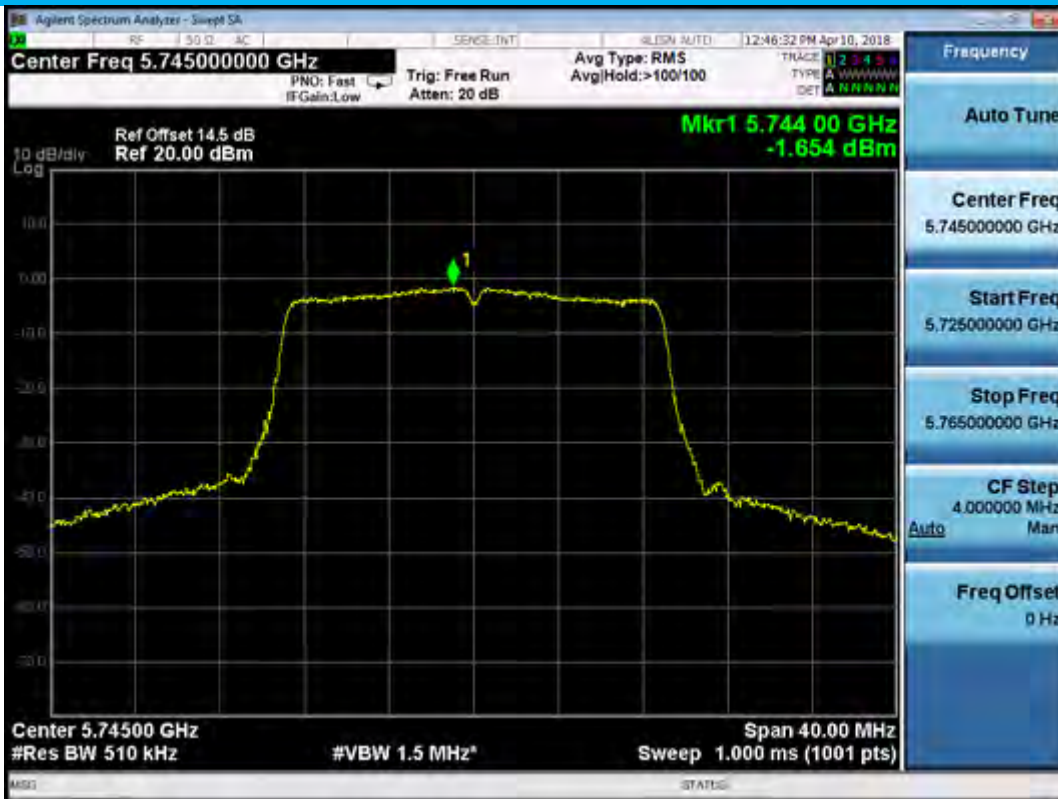


Power Spectral Density UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5785
 Ant0

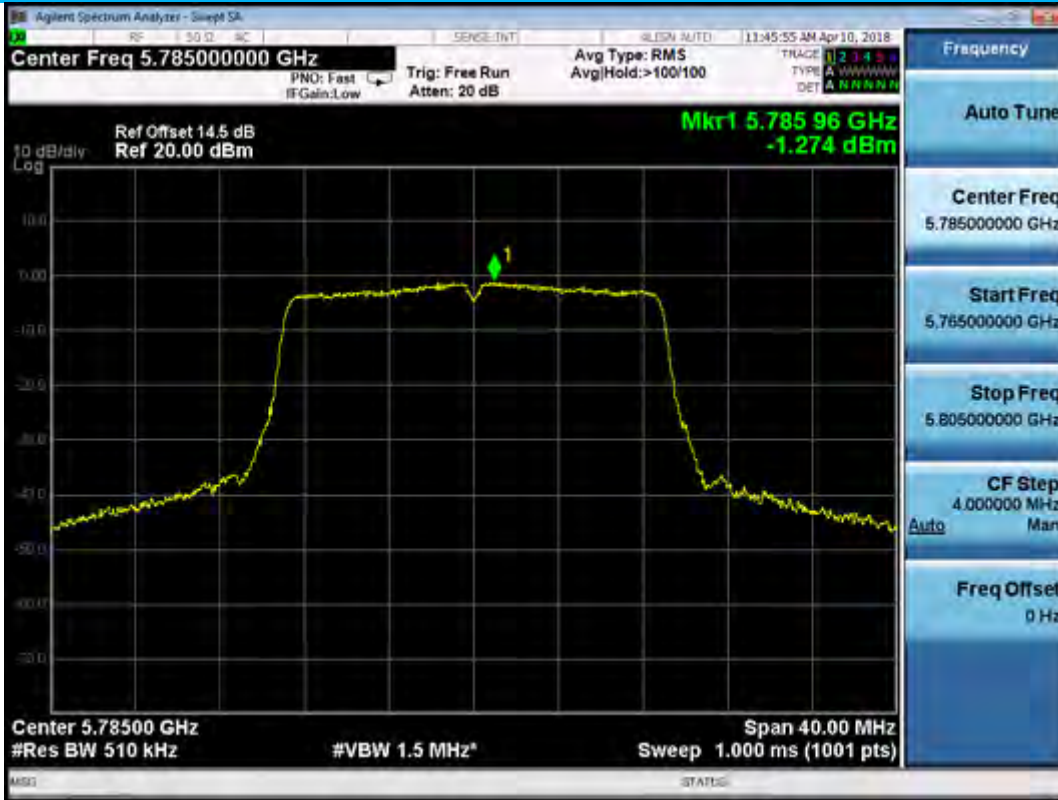


Ant1

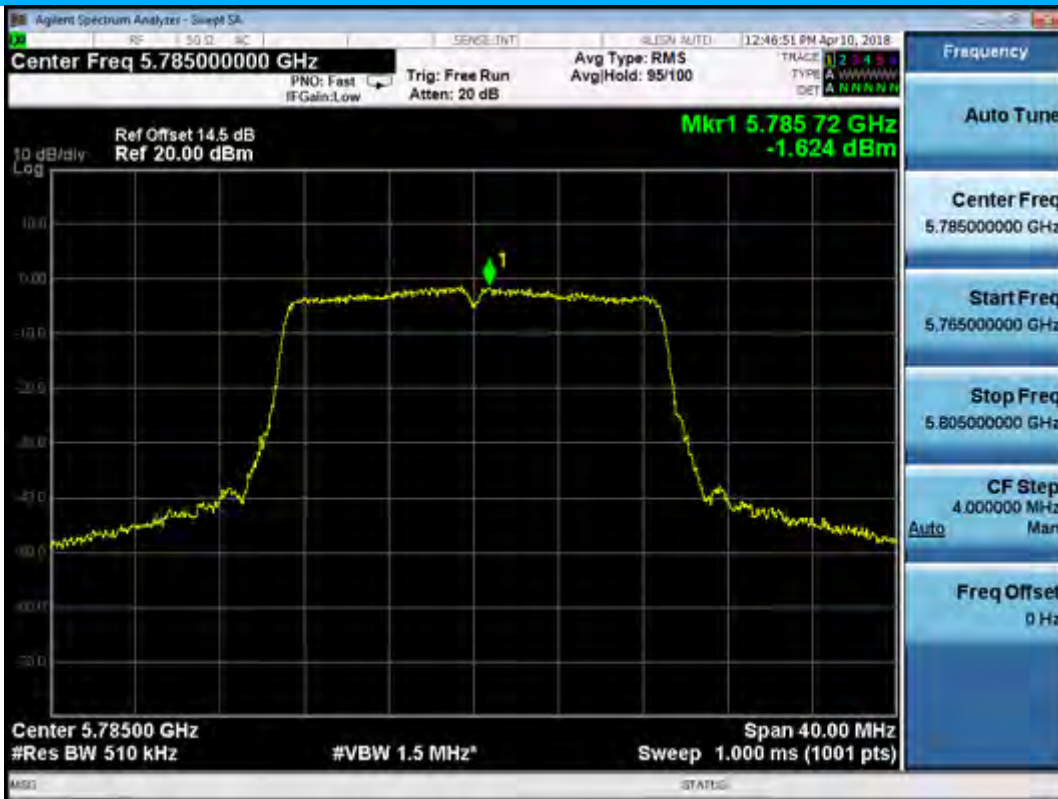


Power Spectral Density UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5825
 Ant0

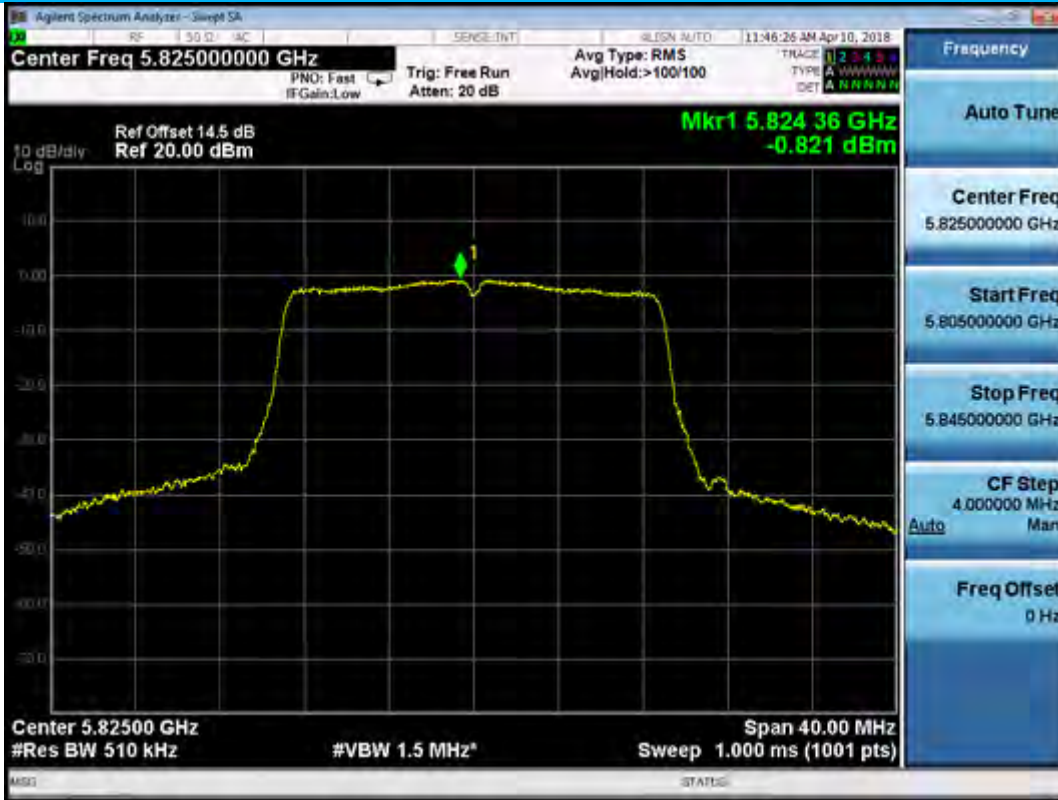


Ant1

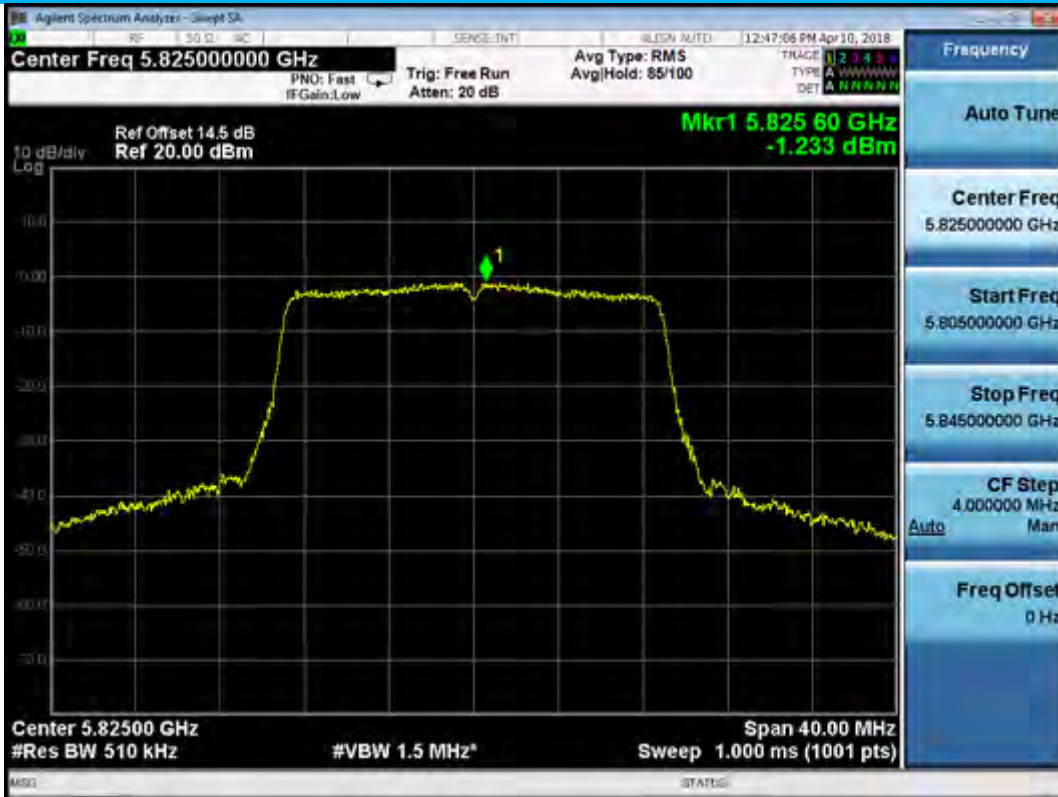


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5180
 Ant0

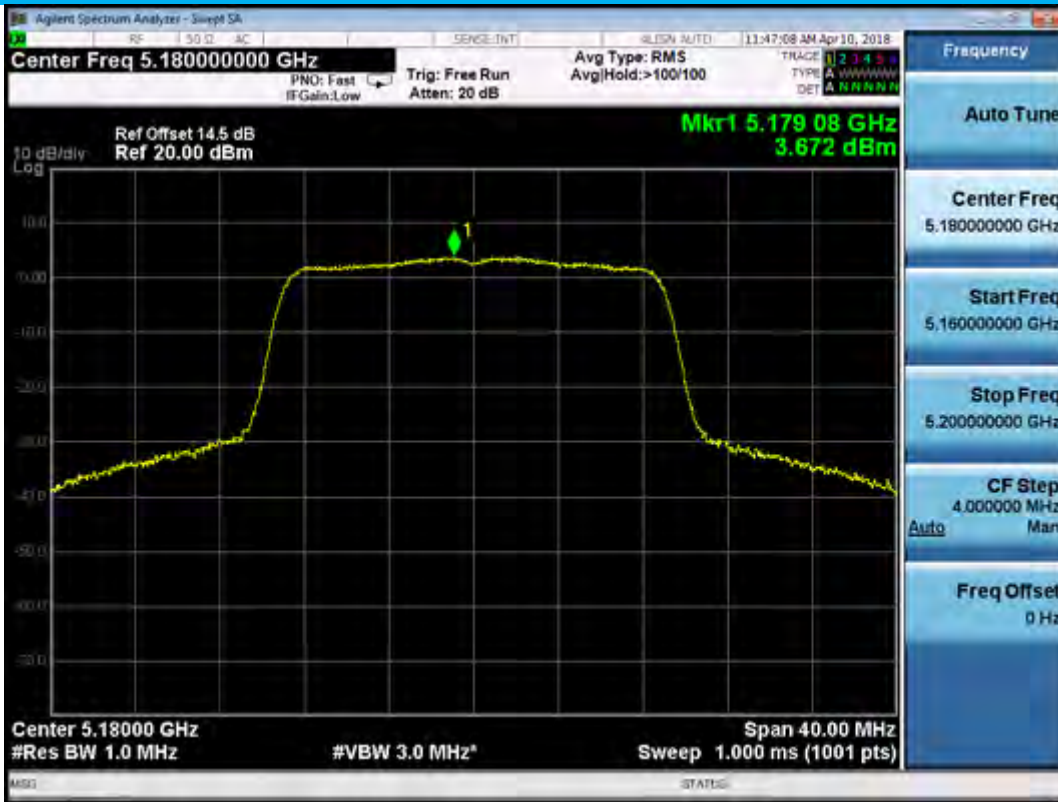


Ant1

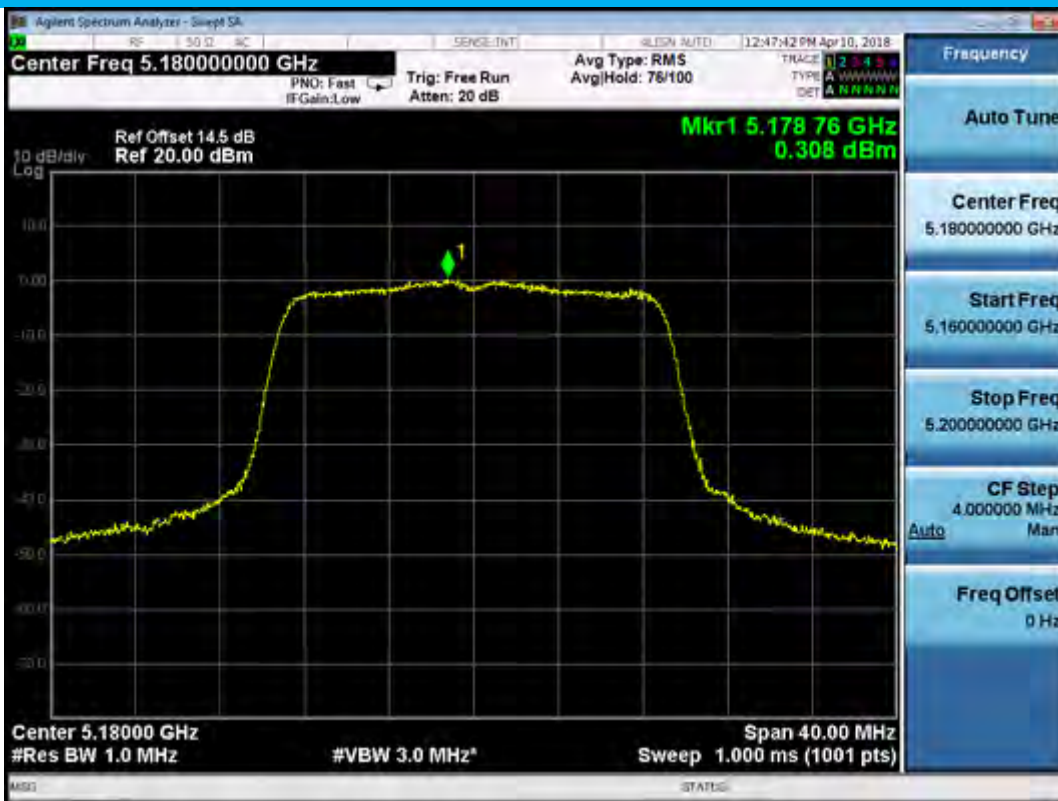


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5200
 Ant0

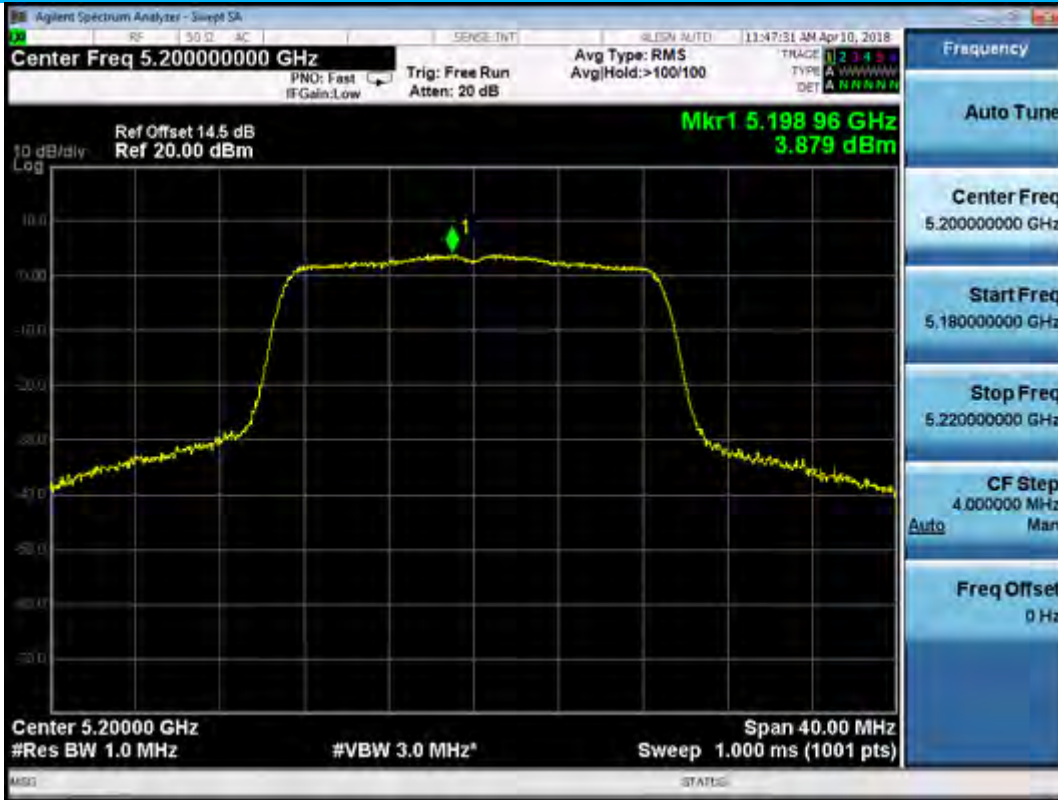


Ant1

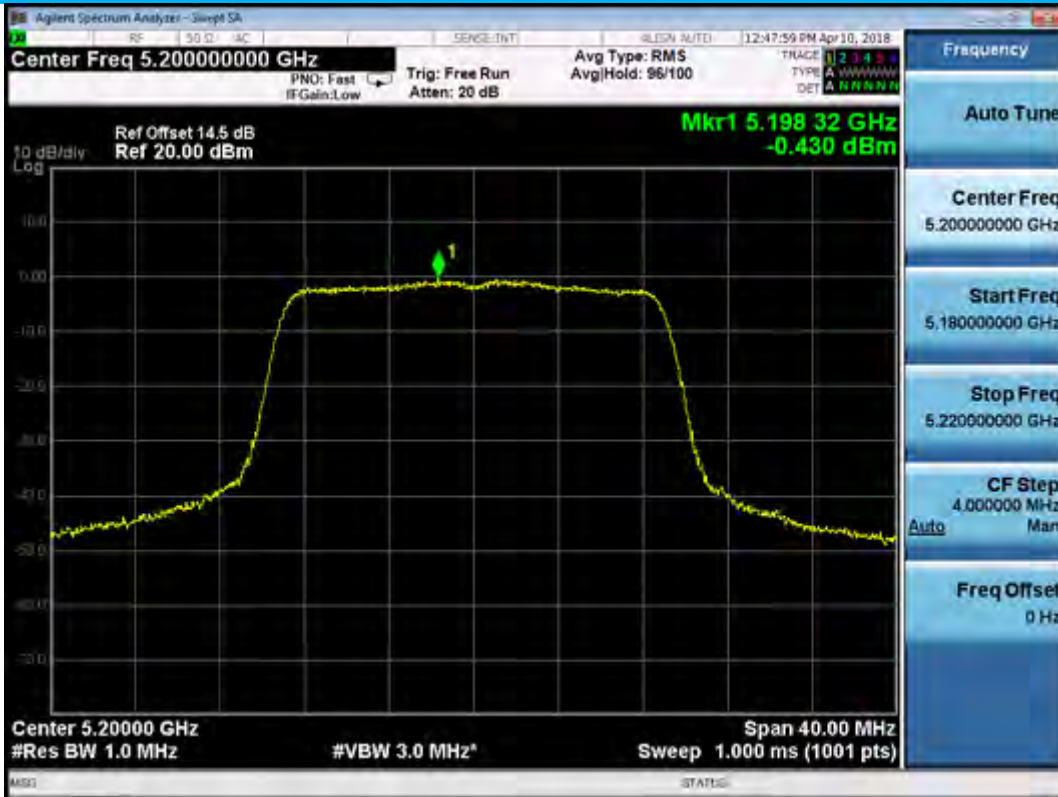


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5240
 Ant0

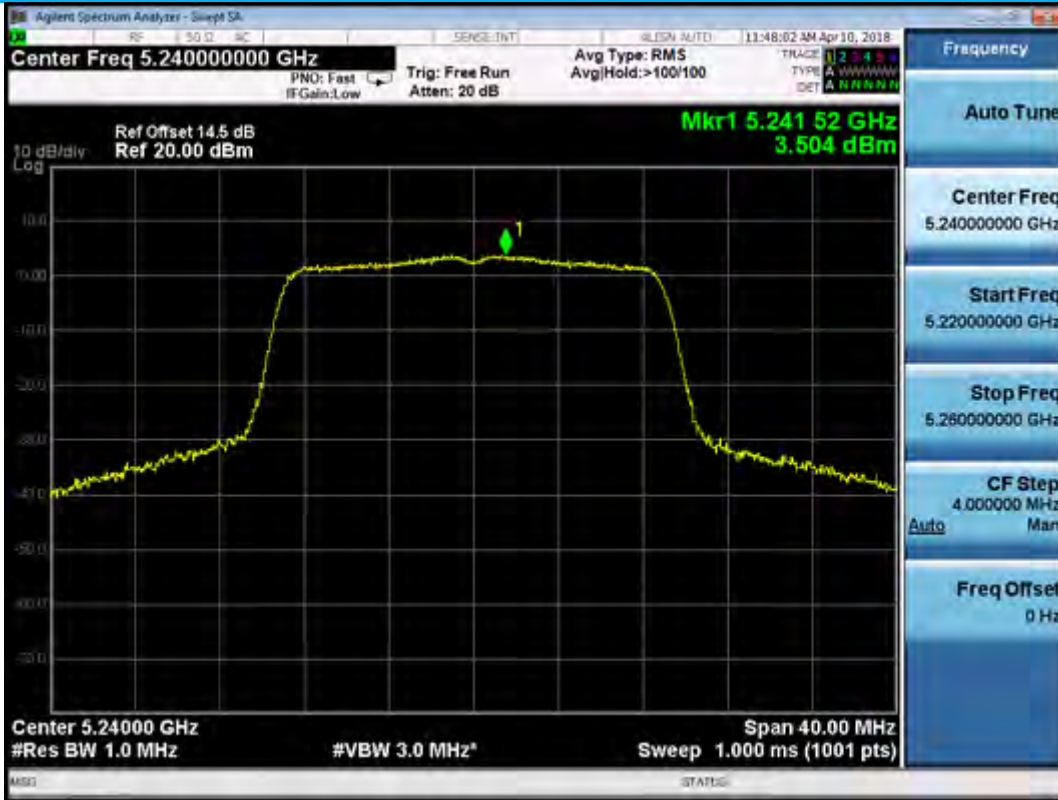


Ant1

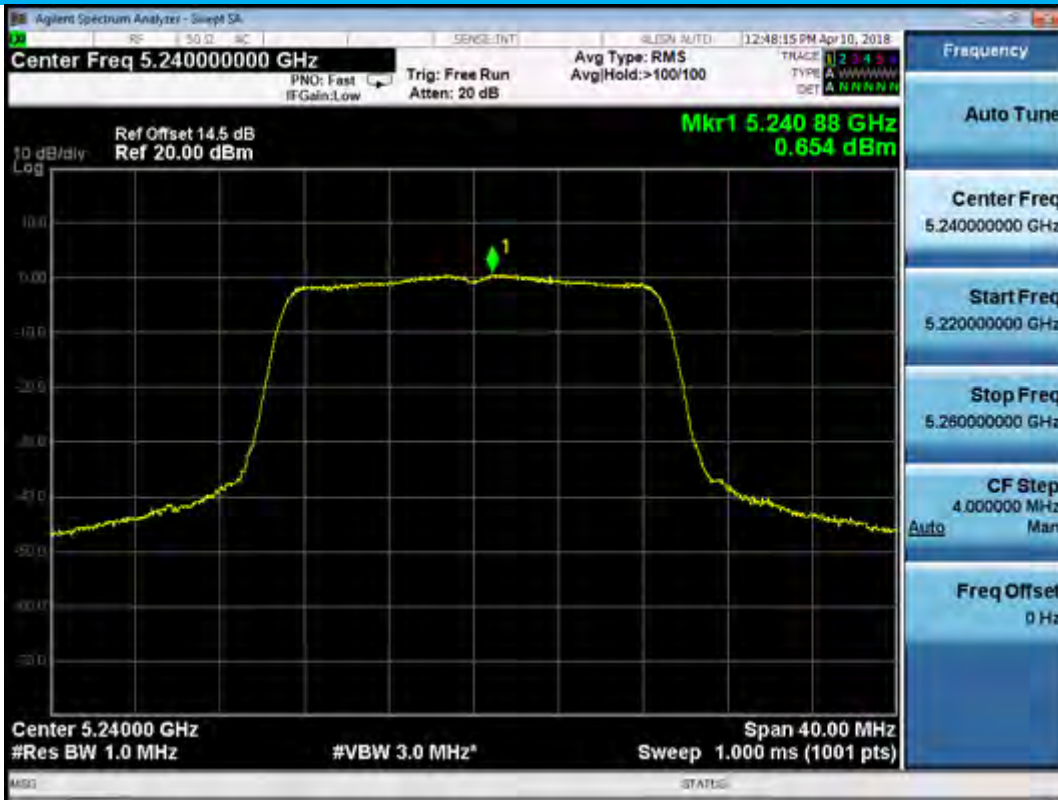


Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5785
 Ant0

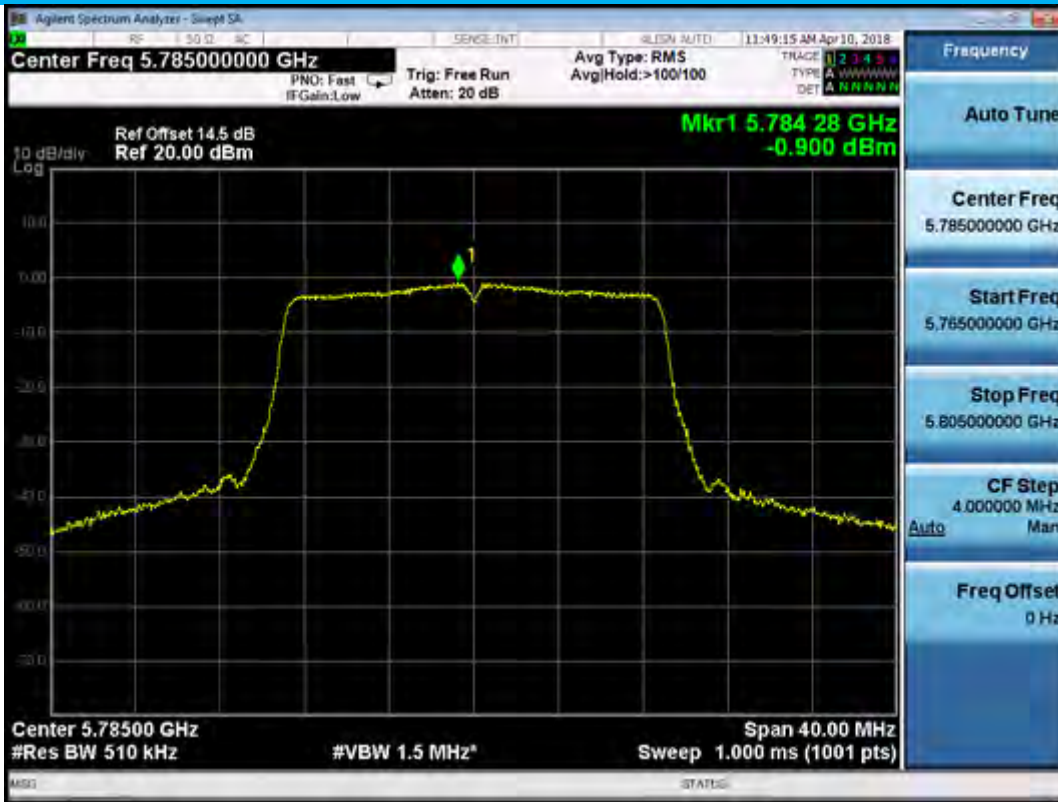


Ant1

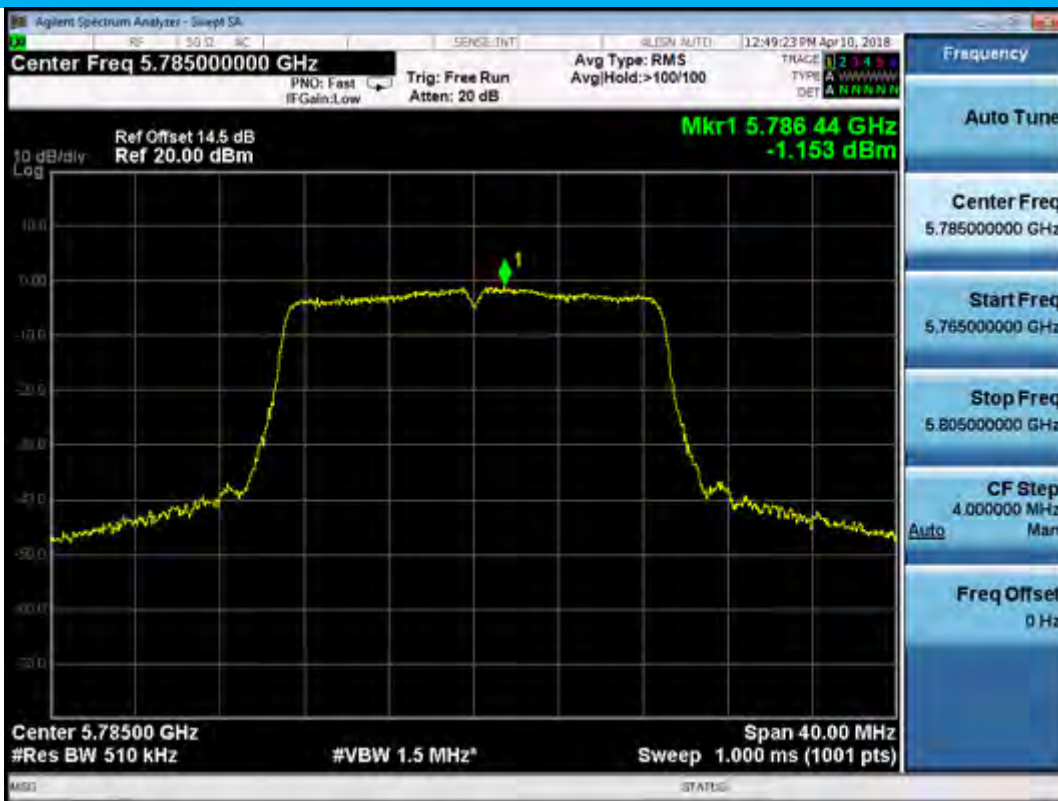


Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5825
 Ant0

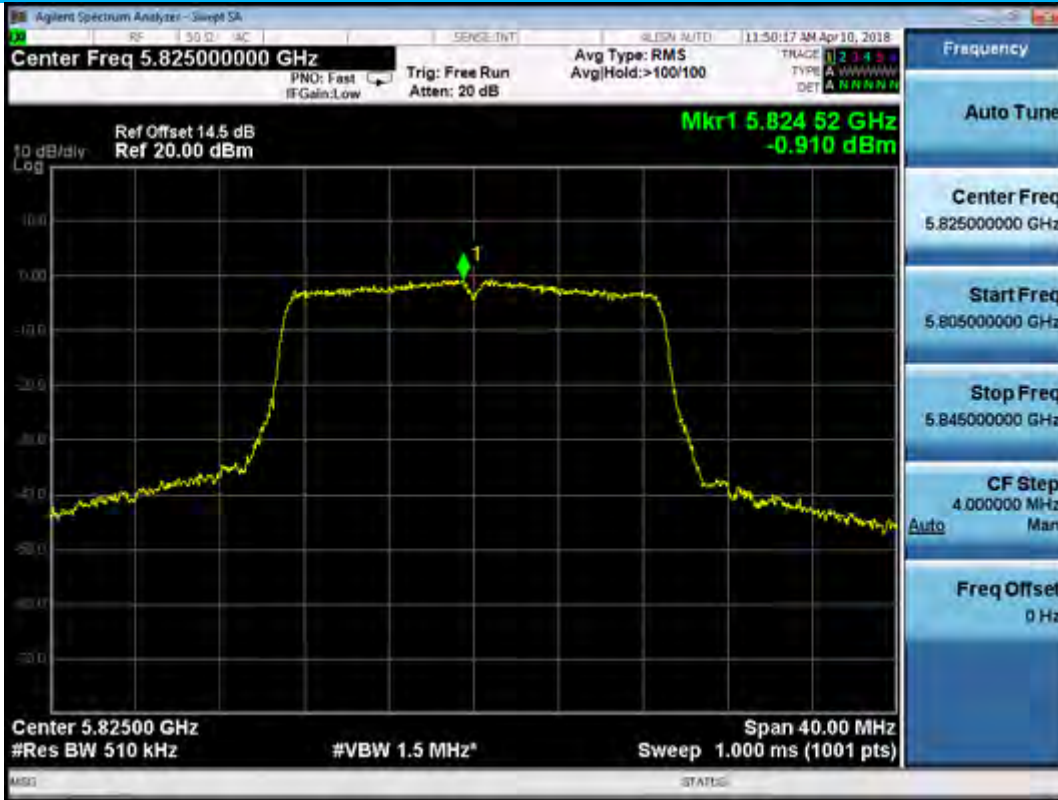


Ant1

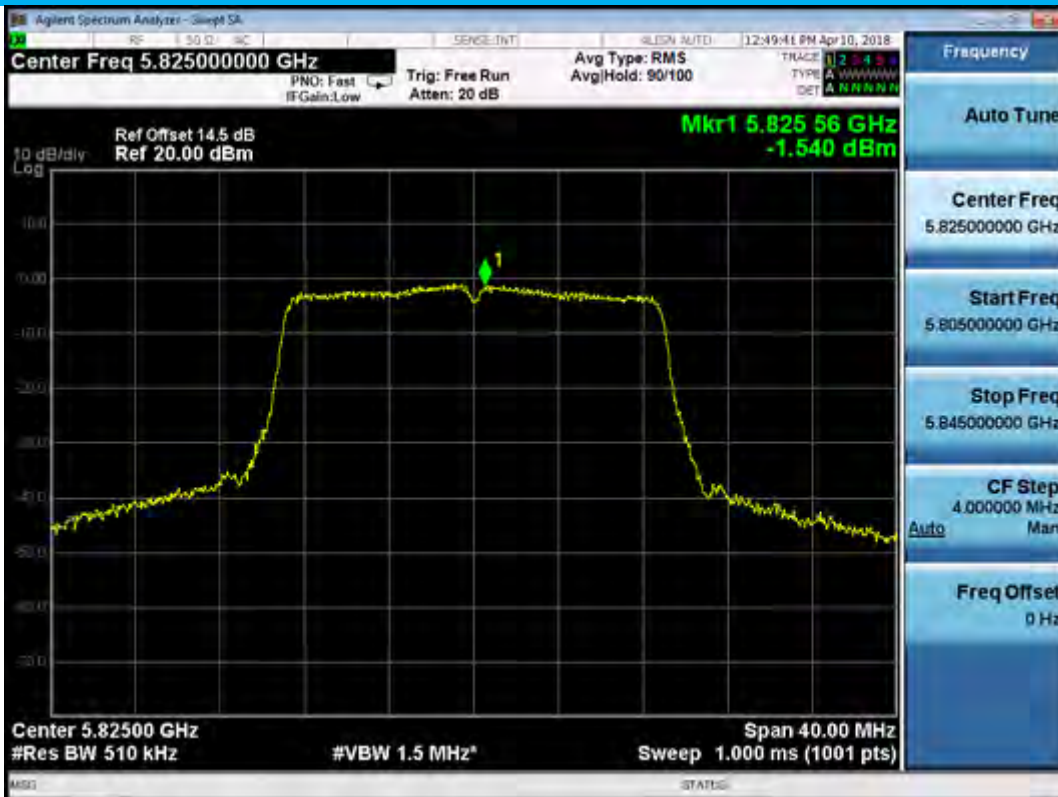


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5190
 Ant0

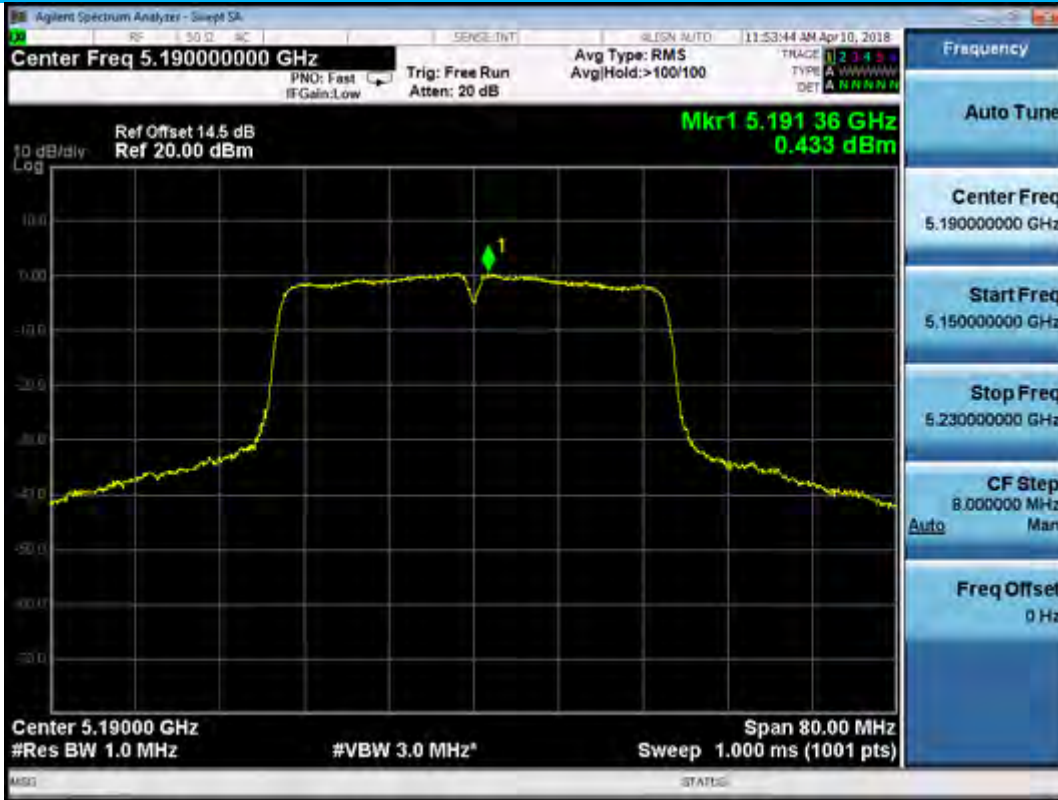


Ant1

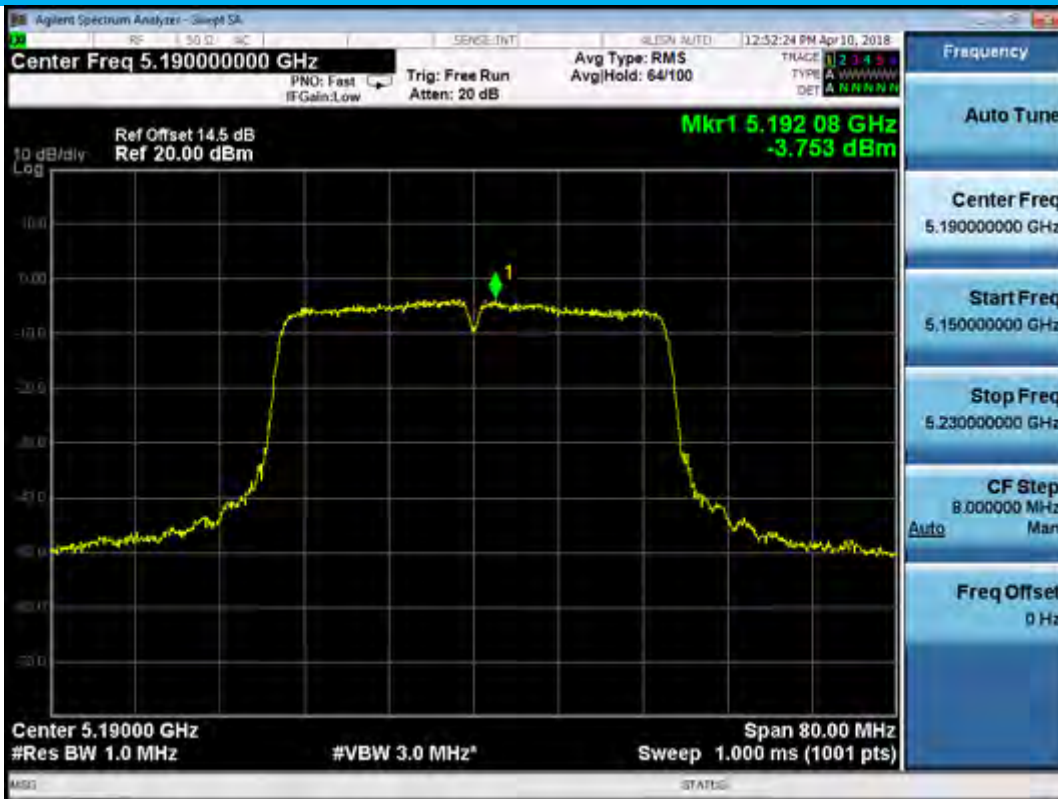


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5230
 Ant0

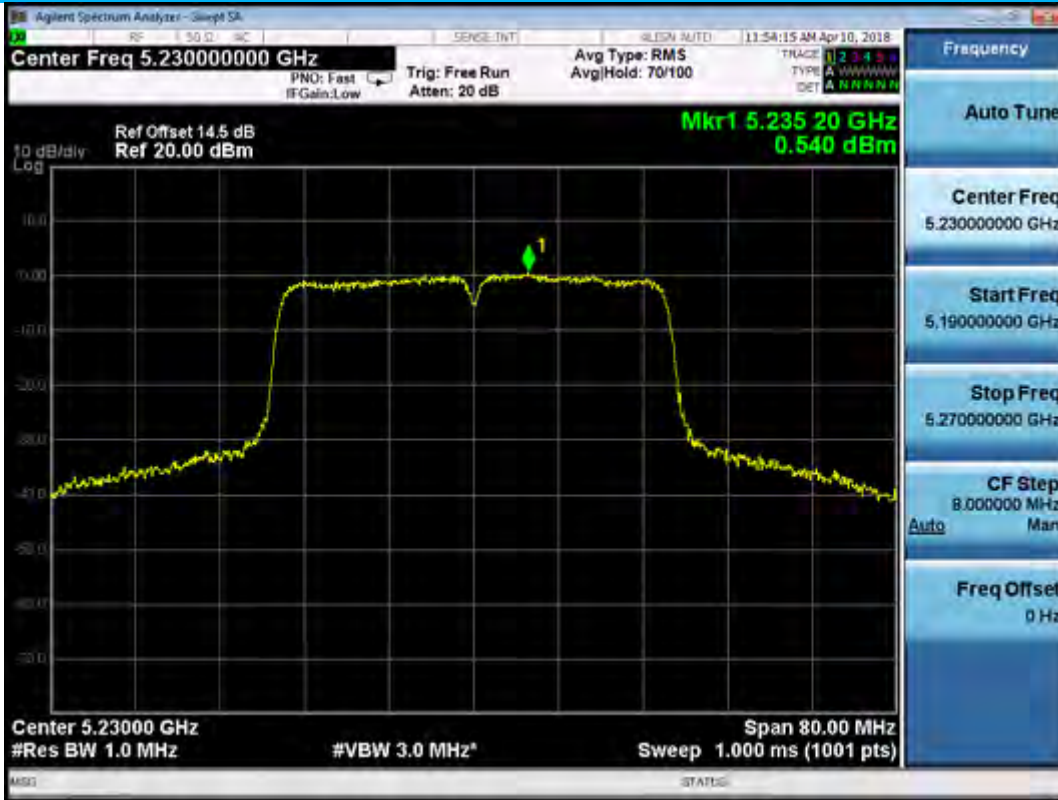


Ant1

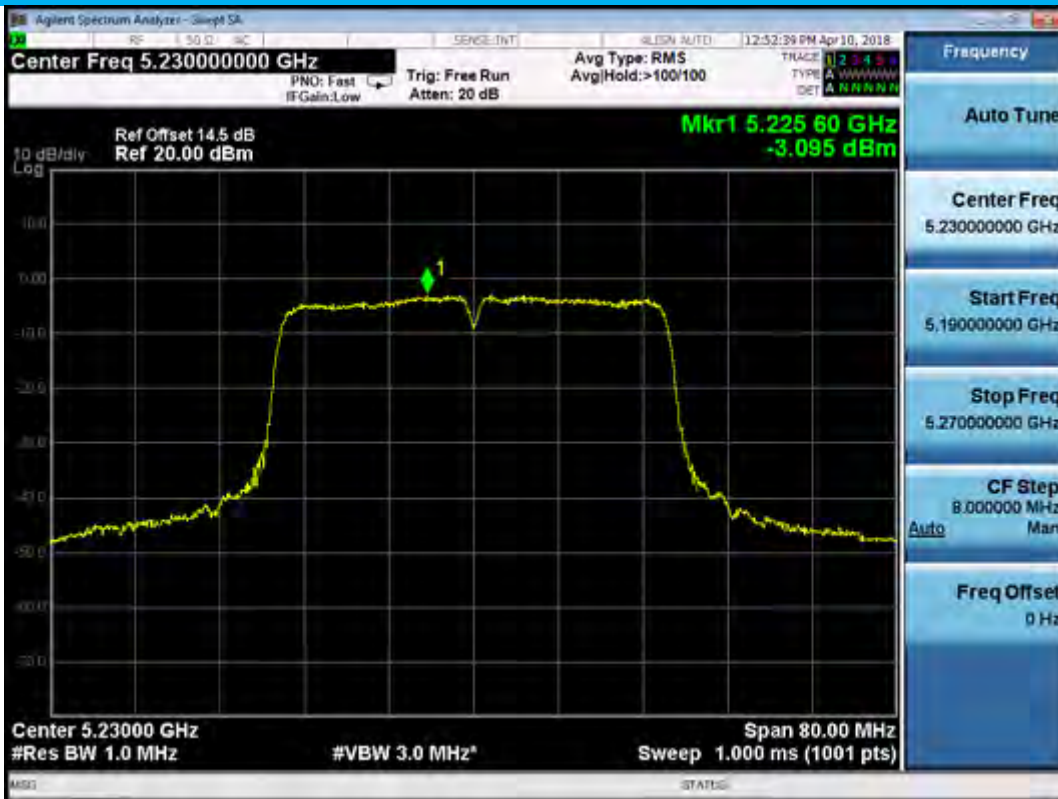

Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5775
 Ant0

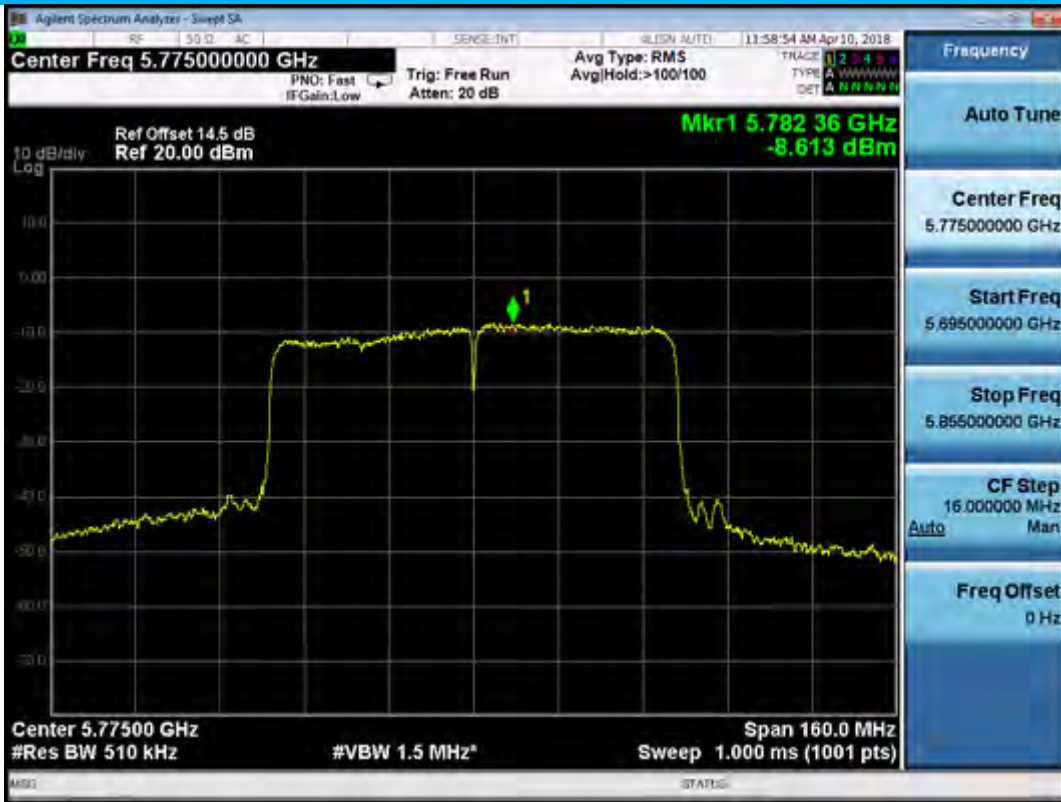

Ant1

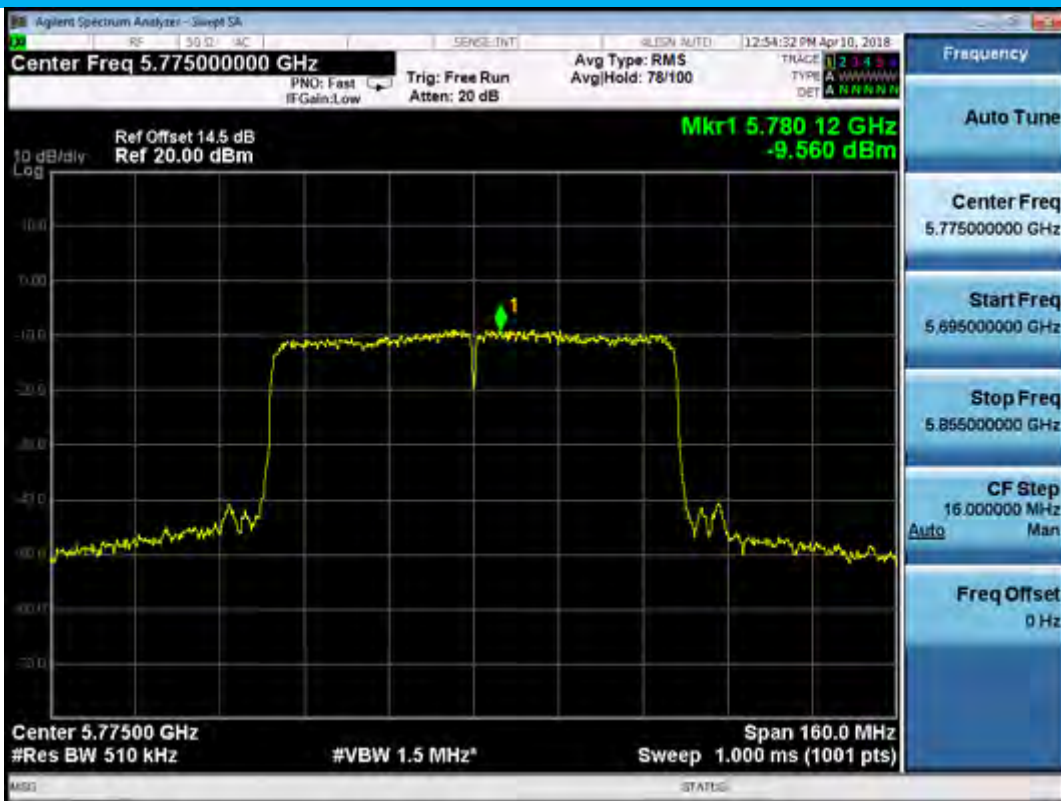

8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)
ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set the video bandwidth (VBW) =30 kHz.

Set Span= Entire absence of modulation emissions bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

The test data for Antenna A

802.11a mode	5180
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.969745	-30.255	Pass
	-10	5179.969598	-30.402	Pass
	0	5179.969641	-30.359	Pass
	10	5179.969354	-30.646	Pass
	20	5179.969159	-30.841	Pass
	30	5179.969247	-30.753	Pass
	40	5179.970536	-29.464	Pass
	50	5179.969158	-30.842	Pass
85% Vnom	20	5179.969125	-30.875	Pass
115% Vnom	20	5179.969582	-30.418	Pass

802.11a mode	5200
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.961456	-38.544	Pass
	-10	5199.961123	-38.877	Pass
	0	5199.961367	-38.633	Pass
	10	5199.961159	-38.841	Pass
	20	5200.031257	31.257	Pass
	30	5199.961694	-38.306	Pass
	40	5199.961157	-38.843	Pass
	50	5199.961159	-38.841	Pass
85% Vnom	20	5199.961367	-38.633	Pass
115% Vnom	20	5199.961147	-38.853	Pass

802.11a mode	5240
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.977458	-22.542	Pass
	-10	5239.977126	-22.874	Pass
	0	5239.977369	-22.631	Pass
	10	5239.977457	-22.543	Pass
	20	5239.977132	-22.868	Pass
	30	5239.977458	-22.542	Pass
	40	5239.977217	-22.783	Pass
	50	5239.978159	-21.841	Pass
85% Vnom	20	5239.977853	-22.147	Pass
115% Vnom	20	5239.977349	-22.651	Pass

802.11a mode 5745
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.986475	-13.525	Pass
	-10	5744.986159	-13.841	Pass
	0	5744.986472	-13.528	Pass
	10	5744.986159	-13.841	Pass
	20	5744.986348	-13.652	Pass
	30	5744.986861	-13.139	Pass
	40	5744.986351	-13.649	Pass
50	5744.986147	-13.853	Pass	
85% Vnom	20	5744.986856	-13.144	Pass
115% Vnom	20	5744.986159	-13.841	Pass

802.11a mode 5785
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.991748	-8.252	Pass
	-10	5784.991459	-8.541	Pass
	0	5784.991112	-8.888	Pass
	10	5784.991423	-8.577	Pass
	20	5784.991561	-8.439	Pass
	30	5784.991125	-8.875	Pass
	40	5784.991531	-8.469	Pass
50	5784.991167	-8.833	Pass	
85% Vnom	20	5784.991949	-8.051	Pass
115% Vnom	20	5784.991536	-8.464	Pass

802.11a mode 5825
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.982148	-17.852	Pass
	-10	5824.982259	-17.741	Pass
	0	5824.982259	-17.741	Pass
	10	5824.982325	-17.675	Pass
	20	5824.982364	-17.636	Pass
	30	5824.982257	-17.743	Pass
	40	5824.982147	-17.853	Pass
50	5824.982323	-17.677	Pass	
85% Vnom	20	5824.983369	-16.631	Pass
115% Vnom	20	5824.983452	-16.548	Pass

802.11n(VHT20) mode 5180
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5180.001445	1.445	Pass
	-10	5180.001258	1.258	Pass
	0	5180.001364	1.364	Pass
	10	5180.001336	1.336	Pass
	20	5180.001259	1.259	Pass
	30	5180.001741	1.741	Pass
	40	5180.001257	1.257	Pass
	50	5180.001159	1.159	Pass
85% Vnom	20	5180.001367	1.367	Pass
115% Vnom	20	5180.001224	1.224	Pass

802.11n(VHT20) mode 5200
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.976365	-23.635	Pass
	-10	5199.975421	-24.579	Pass
	0	5199.975578	-24.422	Pass
	10	5199.975159	-24.841	Pass
	20	5199.975349	-24.651	Pass
	30	5199.975412	-24.588	Pass
	40	5199.975247	-24.753	Pass
	50	5199.975258	-24.742	Pass
85% Vnom	20	5199.975367	-24.633	Pass
115% Vnom	20	5199.976341	-23.659	Pass

802.11n(VHT20) mode 5240
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.982459	-17.541	Pass
	-10	5239.981421	-18.579	Pass
	0	5239.981475	-18.525	Pass
	10	5239.981574	-18.426	Pass
	20	5239.981564	-18.436	Pass
	30	5239.981364	-18.636	Pass
	40	5239.981329	-18.671	Pass
	50	5239.981257	-18.743	Pass
85% Vnom	20	5239.981159	-18.841	Pass
115% Vnom	20	5239.981782	-18.218	Pass

802.11n(VHT20) mode 5745
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.980268	-19.732	Pass
	-10	5744.980349	-19.651	Pass
	0	5744.980158	-19.842	Pass
	10	5744.980126	-19.874	Pass
	20	5744.980342	-19.658	Pass
	30	5744.980248	-19.752	Pass
	40	5744.980259	-19.741	Pass
50	5744.980741	-19.259	Pass	
85% Vnom	20	5744.980582	-19.418	Pass
115% Vnom	20	5744.980436	-19.564	Pass

802.11n(VHT20) mode 5785
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.988851	-11.149	Pass
	-10	5784.988159	-11.841	Pass
	0	5784.988348	-11.652	Pass
	10	5784.988456	-11.544	Pass
	20	5784.988224	-11.776	Pass
	30	5784.988369	-11.631	Pass
	40	5784.988126	-11.874	Pass
50	5784.988348	-11.652	Pass	
85% Vnom	20	5784.988258	-11.742	Pass
115% Vnom	20	5784.988149	-11.851	Pass

802.11n(VHT20) mode 5825
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.991549	-8.451	Pass
	-10	5824.991216	-8.784	Pass
	0	5824.991348	-8.652	Pass
	10	5824.991123	-8.877	Pass
	20	5824.991367	-8.633	Pass
	30	5824.991149	-8.851	Pass
	40	5824.991252	-8.748	Pass
50	5824.991259	-8.741	Pass	
85% Vnom	20	5824.991647	-8.353	Pass
115% Vnom	20	5824.991226	-8.774	Pass

802.11ac(VHT20) mode 5180
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.996148	-3.852	Pass
	-10	5179.996259	-3.741	Pass
	0	5179.996346	-3.654	Pass
	10	5179.996257	-3.743	Pass
	20	5179.996326	-3.674	Pass
	30	5179.996248	-3.752	Pass
	40	5179.996369	-3.631	Pass
50	5179.996364	-3.636	Pass	
85% Vnom	20	5179.996159	-3.841	Pass
115% Vnom	20	5179.996885	-3.115	Pass

802.11ac(VHT20) mode 5200
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.985695	-14.305	Pass
	-10	5199.984346	-15.654	Pass
	0	5199.984259	-15.741	Pass
	10	5199.984412	-15.588	Pass
	20	5199.984367	-15.633	Pass
	30	5199.984486	-15.514	Pass
	40	5199.984126	-15.874	Pass
	50	5199.984547	-15.453	Pass
85% Vnom	20	5199.984295	-15.705	Pass
115% Vnom	20	5199.984368	-15.632	Pass

802.11ac(VHT20) mode 5240
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5240.002776	2.776	Pass
	-10	5240.002596	2.596	Pass
	0	5240.002421	2.421	Pass
	10	5240.002485	2.485	Pass
	20	5240.002356	2.356	Pass
	30	5240.002367	2.367	Pass
	40	5240.002259	2.259	Pass
	50	5240.002864	2.864	Pass
85% Vnom	20	5240.002145	2.145	Pass
115% Vnom	20	5240.002948	2.948	Pass

802.11ac(VHT20) mode 5745
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.967335	-32.665	Pass
	-10	5744.967346	-32.654	Pass
	0	5744.967358	-32.642	Pass
	10	5744.967842	-32.158	Pass
	20	5744.967862	-32.138	Pass
	30	5744.967459	-32.541	Pass
	40	5744.968369	-31.631	Pass
	50	5744.967125	-32.875	Pass
85% Vnom	20	5744.967364	-32.636	Pass
115% Vnom	20	5744.967247	-32.753	Pass

802.11ac(VHT20) mode 5785
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.994594	-5.406	Pass
	-10	5784.994364	-5.636	Pass
	0	5784.994249	-5.751	Pass
	10	5784.994228	-5.772	Pass
	20	5784.994467	-5.533	Pass
	30	5784.994225	-5.775	Pass
	40	5784.995149	-4.851	Pass
	50	5784.994642	-5.358	Pass
85% Vnom	20	5784.994331	-5.669	Pass
115% Vnom	20	5784.994216	-5.784	Pass

802.11ac(VHT20) mode 5825
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.987448	-12.552	Pass
	-10	5824.988395	-11.605	Pass
	0	5824.987461	-12.539	Pass
	10	5824.987248	-12.752	Pass
	20	5824.987267	-12.733	Pass
	30	5824.987157	-12.843	Pass
	40	5824.988367	-11.633	Pass
	50	5824.987147	-12.853	Pass
85% Vnom	20	5824.987257	-12.743	Pass
115% Vnom	20	5824.987249	-12.751	Pass

802.11n(VHT40) mode 5190
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.975475	-24.525	Pass
	-10	5189.976482	-23.518	Pass
	0	5189.976369	-23.631	Pass
	10	5189.976142	-23.858	Pass
	20	5189.975134	-24.866	Pass
	30	5189.975364	-24.636	Pass
	40	5189.975547	-24.453	Pass
	50	5189.975225	-24.775	Pass
85% Vnom	20	5189.975369	-24.631	Pass
115% Vnom	20	5189.975374	-24.626	Pass

802.11n(VHT40) mode 5230
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.972875	-27.125	Pass
	-10	5229.972547	-27.453	Pass
	0	5229.972425	-27.575	Pass
	10	5229.972564	-27.436	Pass
	20	5229.972359	-27.641	Pass
	30	5229.972684	-27.316	Pass
	40	5229.972578	-27.422	Pass
	50	5229.972521	-27.479	Pass
85% Vnom	20	5229.972249	-27.751	Pass
115% Vnom	20	5229.972956	-27.044	Pass

802.11n(VHT40) mode	5755
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.994571	-5.429	Pass
	-10	5754.994456	-5.544	Pass
	0	5754.994258	-5.742	Pass
	10	5754.994374	-5.626	Pass
	20	5754.994368	-5.632	Pass
	30	5754.994259	-5.741	Pass
	40	5754.994482	-5.518	Pass
	50	5754.994451	-5.549	Pass
85% Vnom	20	5754.994594	-5.406	Pass
115% Vnom	20	5754.994267	-5.733	Pass

802.11n(VHT40) mode	5795
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.985564	-14.436	Pass
	-10	5794.985258	-14.742	Pass
	0	5794.985364	-14.636	Pass
	10	5794.985149	-14.851	Pass
	20	5794.985751	-14.249	Pass
	30	5794.986482	-13.518	Pass
	40	5794.985368	-14.632	Pass
	50	5794.985244	-14.756	Pass
85% Vnom	20	5794.985259	-14.741	Pass
115% Vnom	20	5794.986285	-13.715	Pass

802.11ac(VHT40) mode	5190
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.981558	-18.442	Pass
	-10	5189.980541	-19.459	Pass
	0	5189.980256	-19.744	Pass
	10	5189.980321	-19.679	Pass
	20	5189.980247	-19.753	Pass
	30	5189.980268	-19.732	Pass
	40	5189.980451	-19.549	Pass
50	5189.980259	-19.741	Pass	
85% Vnom	20	5189.980647	-19.353	Pass
115% Vnom	20	5189.980334	-19.666	Pass

802.11ac(VHT40) mode	5230
Temperature : --	Test Date : April 08,2018
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.984324	-15.676	Pass
	-10	5229.984369	-15.631	Pass
	0	5229.984853	-15.147	Pass
	10	5229.984247	-15.753	Pass
	20	5229.984258	-15.742	Pass
	30	5229.984654	-15.346	Pass
	40	5229.984559	-15.441	Pass
50	5229.985153	-14.847	Pass	
85% Vnom	20	5229.984482	-15.518	Pass
115% Vnom	20	5229.984421	-15.579	Pass

802.11ac(VHT40) mode 5755
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.983461	-16.539	Pass
	-10	5754.983248	-16.752	Pass
	0	5754.984451	-15.549	Pass
	10	5754.983582	-16.418	Pass
	20	5754.983369	-16.631	Pass
	30	5754.983251	-16.749	Pass
	40	5754.983145	-16.855	Pass
50	5754.983256	-16.744	Pass	
85% Vnom	20	5754.983364	-16.636	Pass
115% Vnom	20	5754.983229	-16.771	Pass

802.11ac(VHT40) mode 5795
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.974754	-25.246	Pass
	-10	5794.974759	-25.241	Pass
	0	5794.974258	-25.742	Pass
	10	5794.974364	-25.636	Pass
	20	5794.974751	-25.249	Pass
	30	5794.974578	-25.422	Pass
	40	5794.974965	-25.035	Pass
	50	5794.974421	-25.579	Pass
85% Vnom	20	5794.974358	-25.642	Pass
115% Vnom	20	5794.974852	-25.148	Pass

802.11ac(VHT80) mode 5210
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5209.969571	-30.429	Pass
	-10	5209.969596	-30.404	Pass
	0	5209.969521	-30.479	Pass
	10	5209.969364	-30.636	Pass
	20	5209.969558	-30.442	Pass
	30	5209.969469	-30.531	Pass
	40	5209.969561	-30.439	Pass
50	5209.969249	-30.751	Pass	
85% Vnom	20	5209.969871	-30.129	Pass
115% Vnom	20	5209.969264	-30.736	Pass

802.11ac(VHT80) mode 5775
 Temperature : -- Test Date : April 08,2018
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5774.980669	-19.331	Pass
	-10	5774.980654	-19.346	Pass
	0	5774.980248	-19.752	Pass
	10	5774.980526	-19.474	Pass
	20	5774.980348	-19.652	Pass
	30	5774.980574	-19.426	Pass
	40	5774.980249	-19.751	Pass
50	5774.980364	-19.636	Pass	
85% Vnom	20	5774.981128	-18.872	Pass
115% Vnom	20	5774.980251	-19.749	Pass

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)
According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Remark: 1. Emission level in $\text{dB}\mu\text{V}/\text{m}=20 \log (\text{uV}/\text{m})$
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for < 30 MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set VBW \leq RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is $<$ 98 percent, set VBW \geq $1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

■ For Undesirable radiated Spurious Emission in UNII Band I

The voltage 120V & 240V and the modes 802.11a/n/ac has been tested and the worst result (801.11n(VHT20)) recorded as below:

● ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7090.32	V	54.13	-41.10	-27	-14.10
9778.73	V	59.64	-35.59	-27	-8.59
13159.31	V	60.24	-34.99	-27	-7.99
6954.23	H	55.58	-39.65	-27	-12.65
10322.76	H	60.42	-34.81	-27	-7.81
13346.24	H	61.59	-33.64	-27	-6.64

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5220

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7088.95	V	54.85	-40.38	-27	-13.38
8120.73	V	54.54	-40.69	-27	-13.69
13160.36	V	59.61	-35.62	-27	-8.62
6952.89	H	55.25	-39.98	-27	-12.98
10323.82	H	59.87	-35.36	-27	-8.36
13344.89	H	58.99	-36.24	-27	-9.24

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7087.43	V	52.92	-42.31	-27	-15.31
9780.78	V	59.66	-35.57	-27	-8.57
13158.85	V	59.54	-35.69	-27	-8.69
6951.43	H	54.63	-40.6	-27	-13.6
10324.8	H	59.25	-35.98	-27	-8.98
13343.45	H	59.19	-36.04	-27	-9.04

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

● Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5149.05	H	68.15	-27.08	-27	Pass
5138.55	V	68.35	-26.88	-27	Pass

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5352.15	V	68.39	-26.84	-27	Pass
5359.05	H	68.76	-26.47	-27	Pass


Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)

802.11a 802.11n(HT20) 802.11n(HT40)

5180 5200 5240 Ant.Pol H

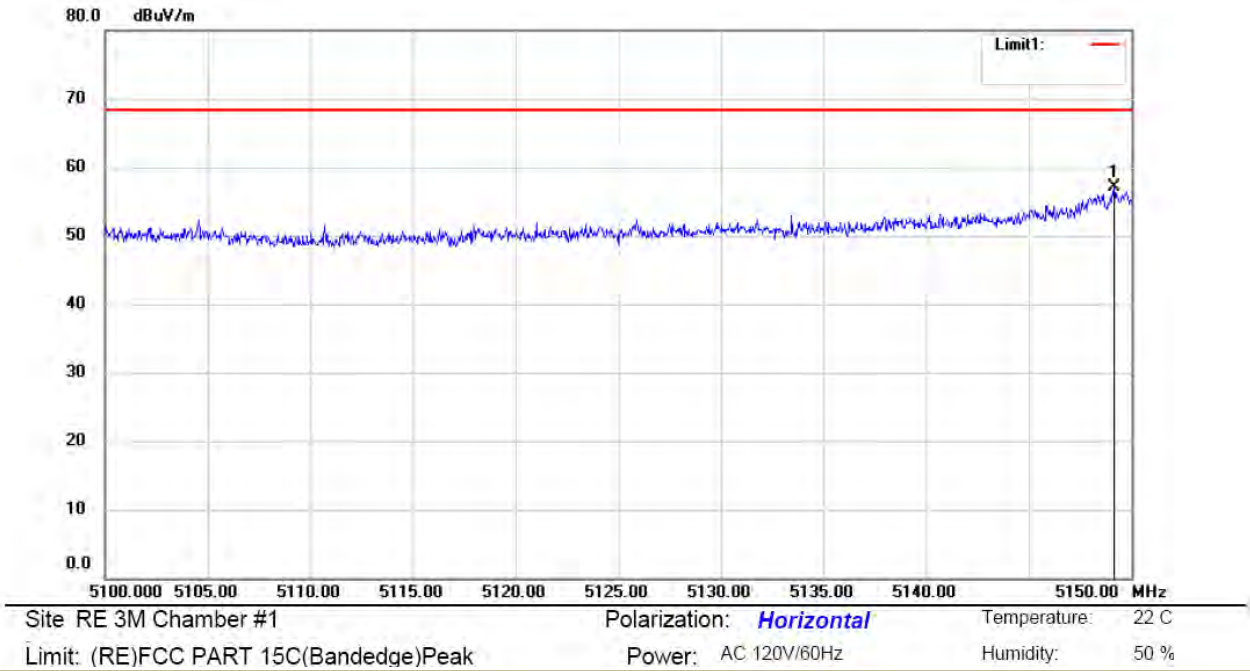


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)

802.11a 802.11n(HT20) 802.11n(HT40)

5180 5200 5240 Ant.Pol V

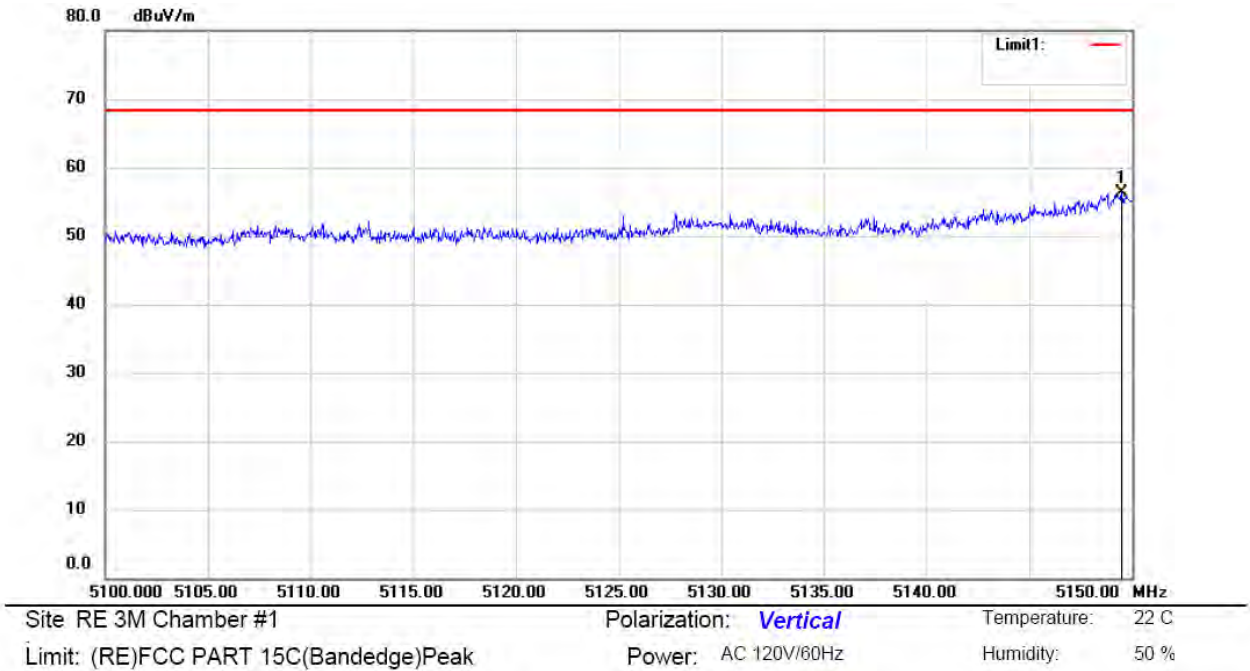


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

802.11a 802.11n(HT20) 802.11n(HT40)

5180 5200 5240 Ant.Pol H

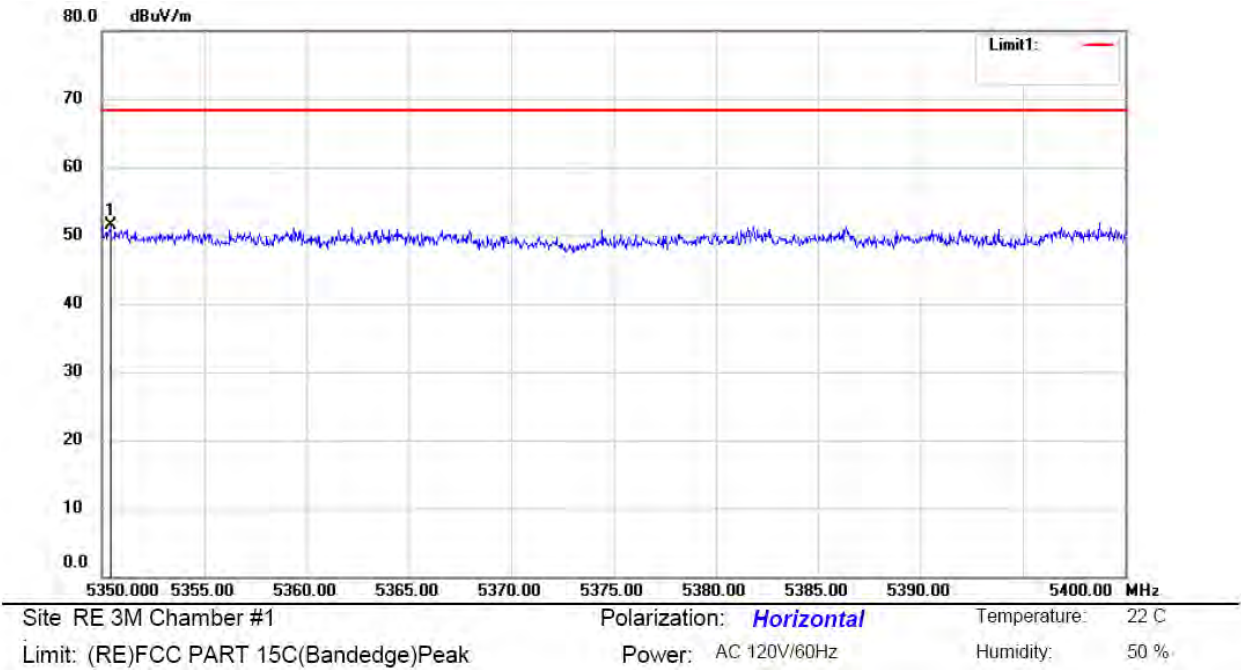


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

802.11a 802.11n(HT20) 802.11n(HT40)

5180 5200 5240 Ant.Pol V

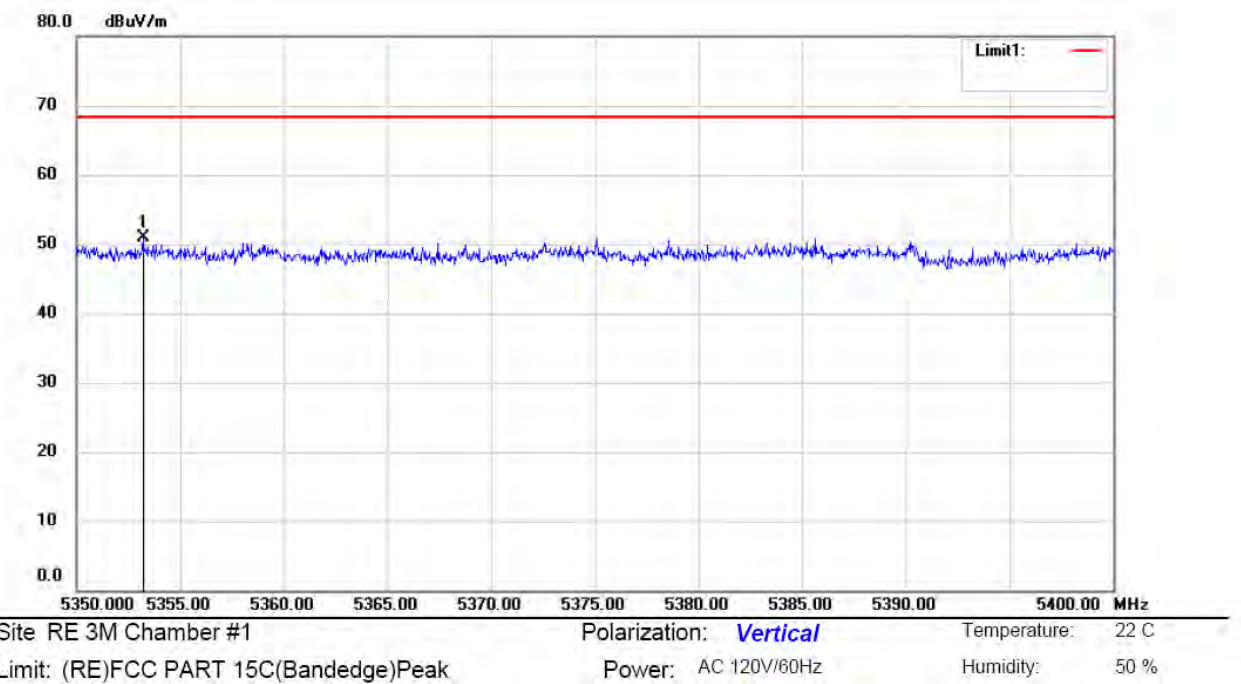

- For Undesirable radiated Spurious Emission in UNII Band III

All the modes 802.11a/n/ac has been tested and the worst result 802.11(HT20) recorded as below:

- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7142.69	V	50.33	-44.9	-27.00	-17.9
9838.38	V	51.49	-43.74	-27.00	-16.74
13214.11	V	67.97	-27.26	-27.00	-0.26
7004.02	H	55.58	-39.65	-27.00	-12.65
10382.46	H	60.81	-34.42	-27.00	-7.42
13398.47	H	63.26	-31.97	-27.00	-4.97

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5785

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7141.34	V	45.34	-49.89	-27.00	-22.89
9837	V	46.56	-48.67	-27.00	-21.67
13215.18	V	59.18	-36.05	-27.00	-9.05
7005.12	H	48.72	-46.51	-27.00	-19.51
10381.03	H	52.69	-42.54	-27.00	-15.54
13399.45	H	55.83	-39.4	-27.00	-12.4

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7142.41	V	45.77	-49.46	-27.00	-22.46
9835.63	V	46.49	-48.74	-27.00	-21.74
13216.22	V	59.58	-35.65	-27.00	-8.65
7006.17	H	47.61	-47.62	-27.00	-20.62
10379.69	H	51.28	-43.95	-27.00	-16.95
13400.51	H	54.19	-41.04	-27.00	-14.04

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

- Undesirable radiated Spurious Emission in band edge

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5745


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5725.00	H	50.18	-45.05	-17	PASS
5724.75	V	48.39	-46.84	-17	PASS

Temperature :	28°C	Test Date :	April 08,2018
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5881.75	H	51.76	-43.47	-17	PASS
5874.87	V	49.84	-45.39	-17	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


● Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

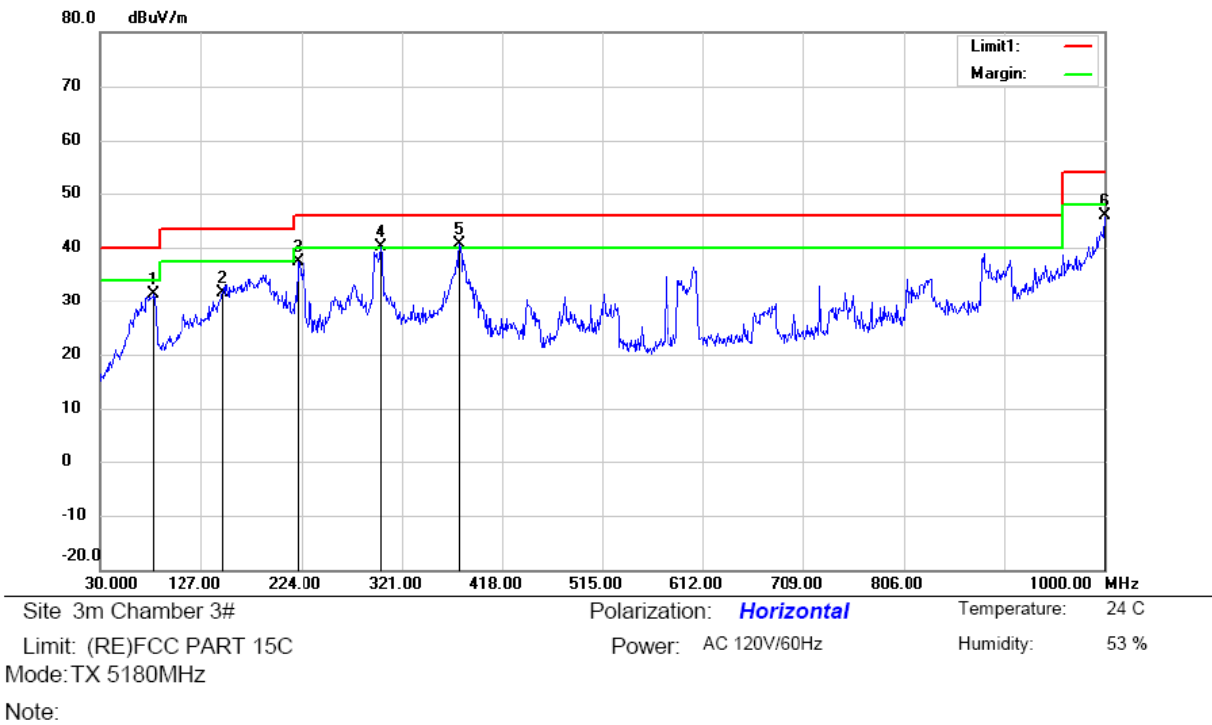

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		81.4100	48.21	-16.83	31.38	40.00	-8.62	QP		
2		148.3400	50.89	-19.26	31.63	43.50	-11.87	QP		
3		220.1200	52.39	-15.03	37.36	46.00	-8.64	QP		
4	I	300.6300	52.54	-12.45	40.09	46.00	-5.91	QP		
5	*	377.2600	50.66	-10.14	40.52	46.00	-5.48	QP		
6		1000.000	44.44	1.33	45.77	54.00	-8.23	QP		

*:Maximum data x:Over limit I:over margin

Operator: LQZ

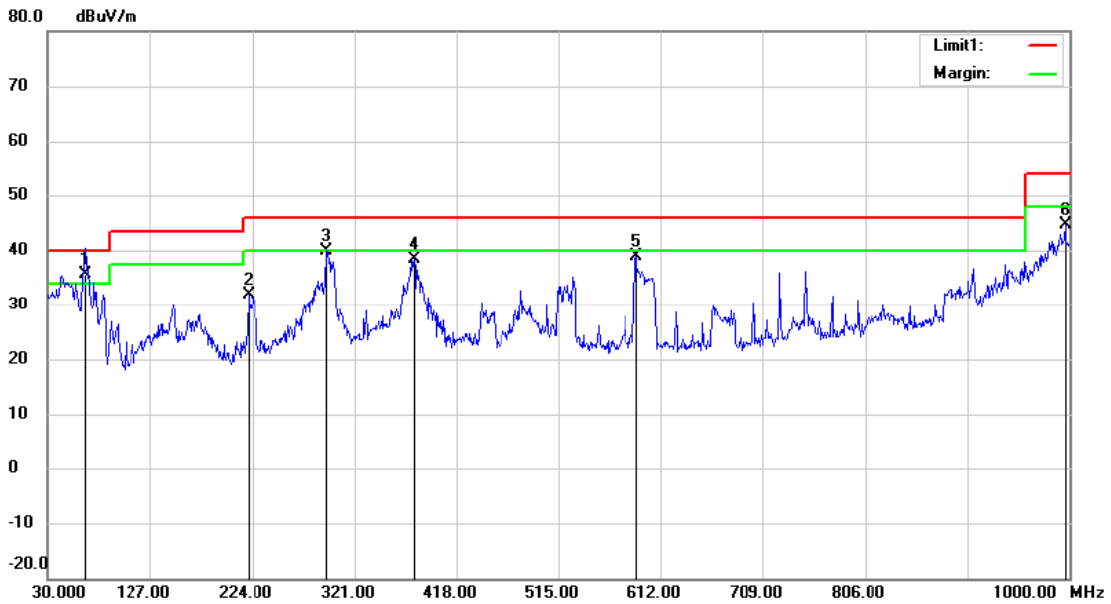


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5180MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	65.8900	52.28	-16.58	35.70	40.00	-4.30	QP			
2		220.1200	46.90	-15.03	31.87	46.00	-14.13	QP			
3		294.8100	51.98	-12.21	39.77	46.00	-6.23	QP			
4		378.2300	48.45	-10.06	38.39	46.00	-7.61	QP			
5		588.7200	44.15	-5.38	38.77	46.00	-7.23	QP			
6		996.1200	43.22	1.29	44.51	54.00	-9.49	QP			

*:Maximum data x:Over limit !:over margin

Operator: LQZ

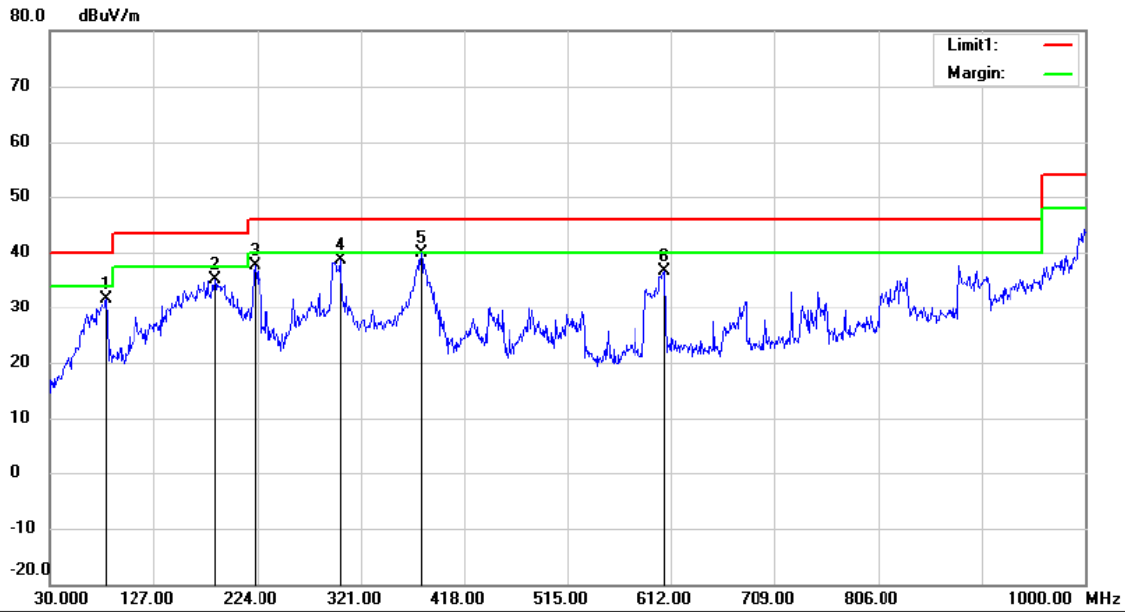


Site: 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5200MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		82.3800	49.23	-17.50	31.73	40.00	-8.27	QP		
2		184.2300	51.79	-16.75	35.04	43.50	-8.46	QP		
3		222.0600	52.63	-14.94	37.69	46.00	-8.31	QP		
4		301.6000	50.96	-12.42	38.54	46.00	-7.46	QP		
5	*	378.2300	50.05	-10.06	39.99	46.00	-6.01	QP		
6		606.1800	41.50	-4.85	36.65	46.00	-9.35	QP		

*:Maximum data x:Over limit !:over margin

Operator: LQZ

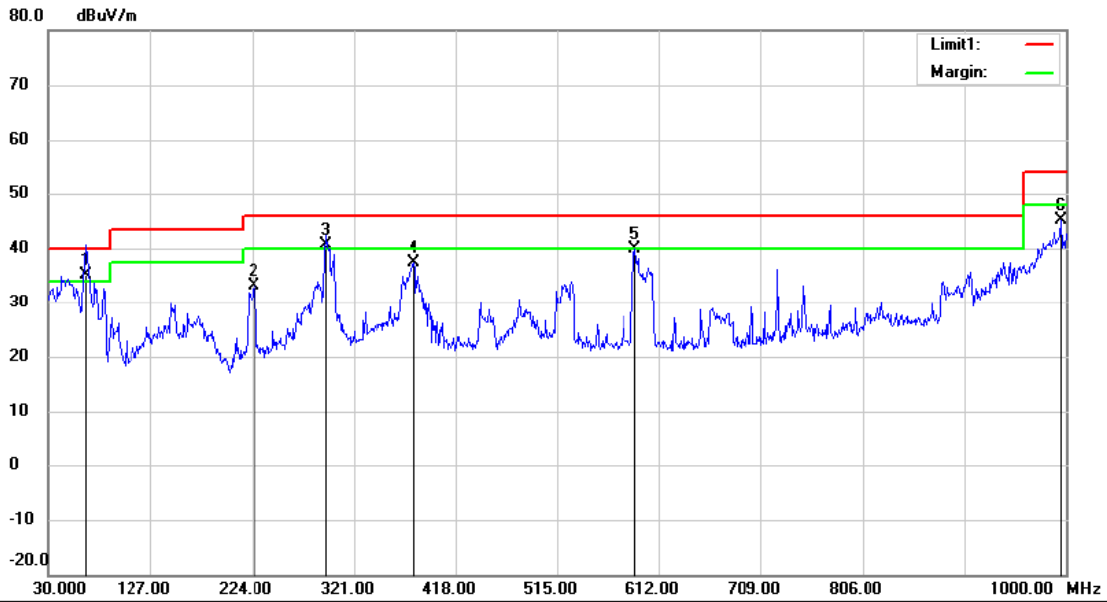


Site: 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5200MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	65.8900	51.78	-16.58	35.20	40.00	-4.80			QP	
2		225.9400	47.73	-14.70	33.03	46.00	-12.97			QP	
3	!	293.8400	52.89	-12.29	40.60	46.00	-5.40			QP	
4		378.2300	47.55	-10.06	37.49	46.00	-8.51			QP	
5		589.6900	45.32	-5.36	39.96	46.00	-6.04			QP	
6		995.1500	43.80	1.28	45.08	54.00	-8.92			QP	

*:Maximum data x:Over limit !:over margin

Operator: LQZ

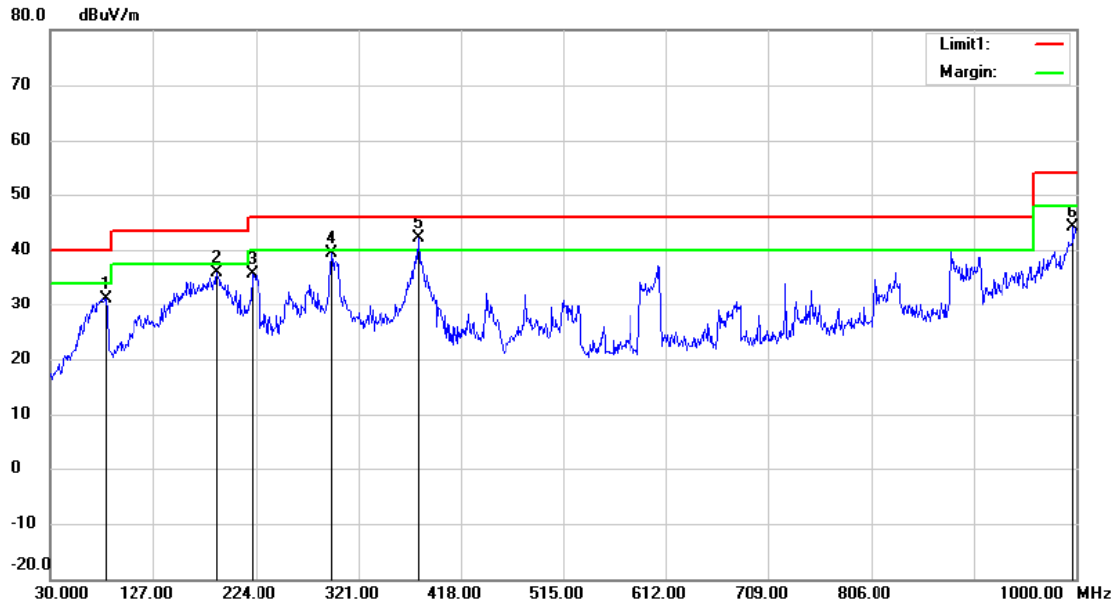

Site 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C

Limit: (RE)FCC PART 15C

Power: AC 120V/60Hz

Humidity: 53 %


Mode: TX 5240MHz

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		82.3800	48.63	-17.50	31.13	40.00	-8.87			QP
2		187.1400	52.30	-16.50	35.80	43.50	-7.70			QP
3		220.1200	50.57	-15.03	35.54	46.00	-10.46			QP
4		295.7800	51.50	-12.23	39.27	46.00	-6.73			QP
5	*	378.2300	52.26	-10.06	42.20	46.00	-3.80			QP
6		997.0900	42.82	1.30	44.12	54.00	-9.88			QP

*:Maximum data x:Over limit !:over margin

Operator: LQZ

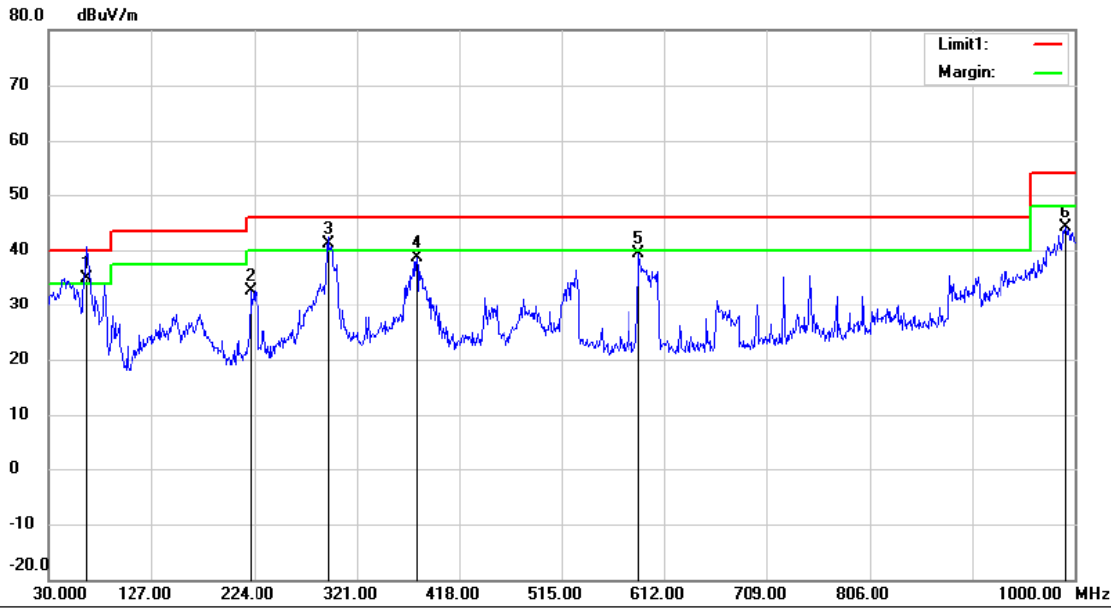


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5240MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	I	65.8900	51.38	-16.58	34.80	40.00	-5.20	QP			
2		221.0900	47.65	-14.98	32.67	46.00	-13.33	QP			
3	*	293.8400	53.39	-12.29	41.10	46.00	-4.90	QP			
4		378.2300	48.74	-10.06	38.68	46.00	-7.32	QP			
5		587.7500	44.87	-5.40	39.47	46.00	-6.53	QP			
6		991.2700	42.85	1.24	44.09	54.00	-9.91	QP			

*:Maximum data x:Over limit I:over margin

Operator: LQZ

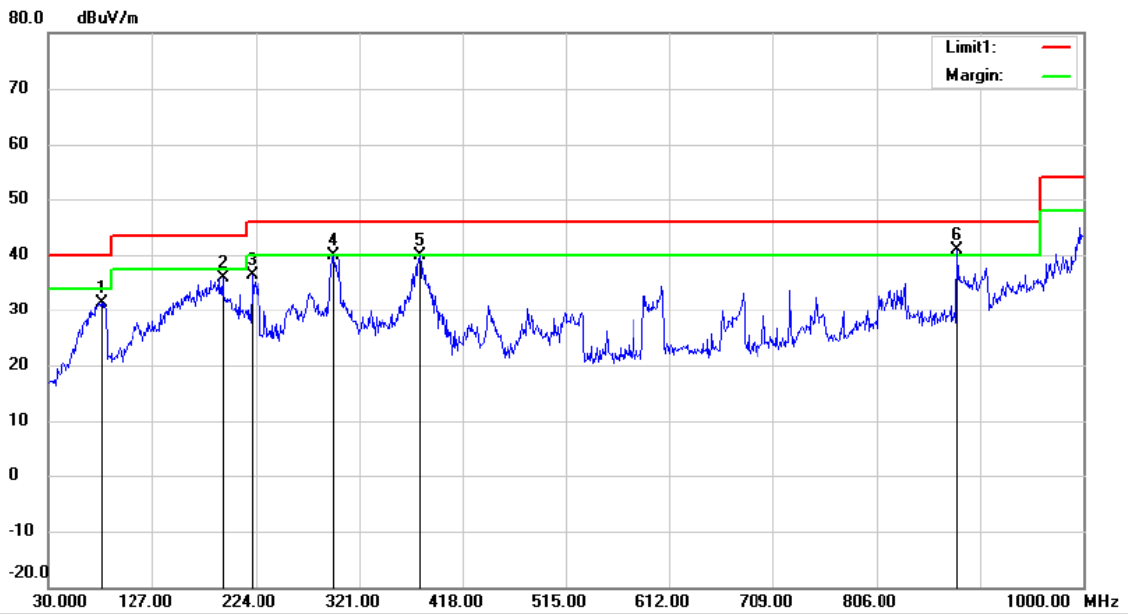


Site 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5745MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		79.4700	47.63	-16.27	31.36	40.00	-8.64			QP
2		192.9600	51.79	-15.94	35.85	43.50	-7.65			QP
3		221.0900	51.40	-14.98	36.42	46.00	-9.58			QP
4		296.7500	52.24	-12.28	39.96	46.00	-6.04			QP
5		378.2300	49.83	-10.06	39.77	46.00	-6.23			QP
6	*	881.6600	41.69	-0.79	40.90	46.00	-5.10			QP

*:Maximum data x:Over limit !:over margin

Operator: LQZ

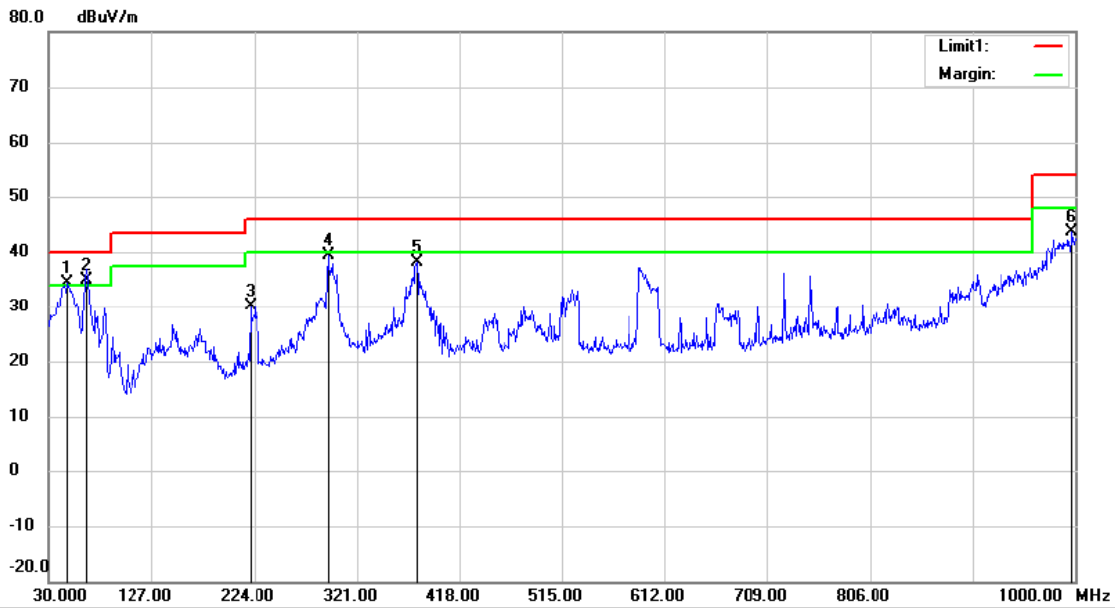


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:TX 5745MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	47.4600	48.34	-13.85	34.49	40.00	-5.51			QP
2	*	65.8900	51.38	-16.58	34.80	40.00	-5.20			QP
3		220.1200	45.24	-15.03	30.21	46.00	-15.79			QP
4		293.8400	51.58	-12.29	39.29	46.00	-6.71			QP
5		378.2300	48.30	-10.06	38.24	46.00	-7.76			QP
6		997.0900	42.40	1.30	43.70	54.00	-10.30			QP

*:Maximum data x:Over limit !:over margin

Operator: LQZ

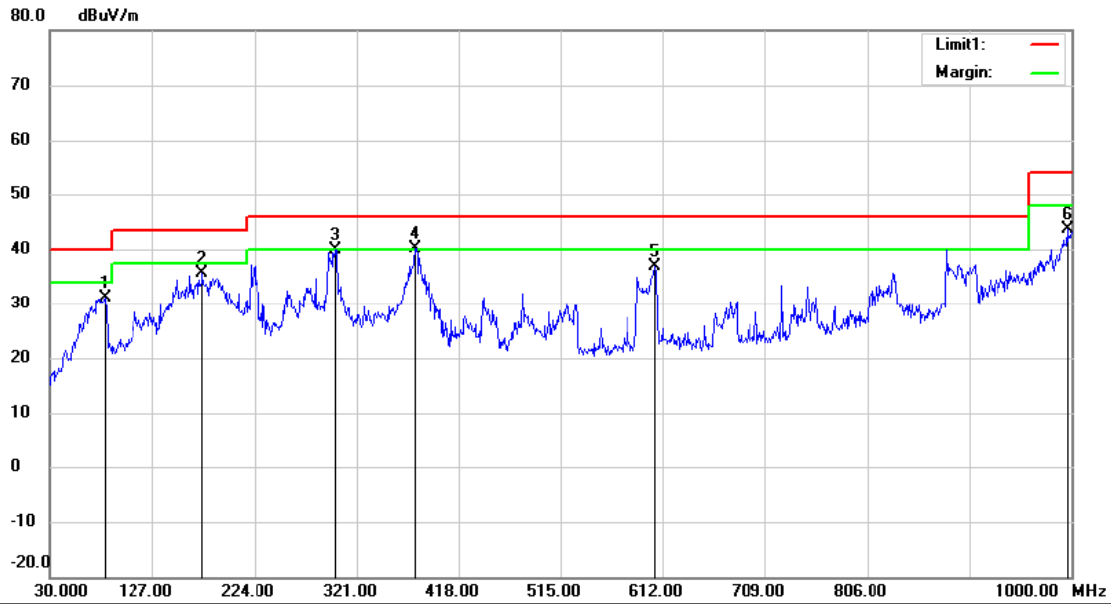


Site 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:TX 5785MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		82.3800	48.59	-17.50	31.09	40.00	-8.91			QP
2		174.5300	53.39	-17.84	35.55	43.50	-7.95			QP
3		300.6300	52.37	-12.45	39.92	46.00	-6.08			QP
4	*	377.2600	50.21	-10.14	40.07	46.00	-5.93			QP
5		604.2400	41.80	-4.89	36.91	46.00	-9.09			QP
6		996.1200	42.40	1.29	43.69	54.00	-10.31			QP

*:Maximum data x:Over limit l:over margin

Operator: LQZ

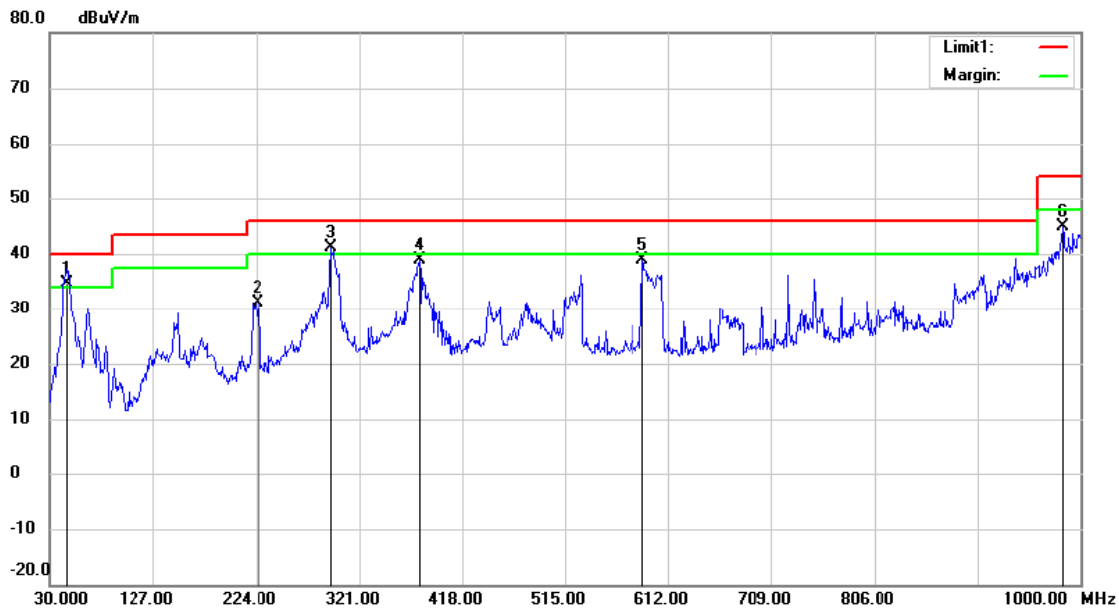


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5785MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	!	46.4900	48.56	-13.96	34.60	40.00	-5.40	QP		
2		225.9400	45.93	-14.70	31.23	46.00	-14.77	QP		
3	*	293.8400	53.47	-12.29	41.18	46.00	-4.82	QP		
4		378.2300	48.87	-10.06	38.81	46.00	-7.19	QP		
5		587.7500	44.36	-5.40	38.96	46.00	-7.04	QP		
6		983.5100	43.72	1.27	44.99	54.00	-9.01	QP		

*:Maximum data x:Over limit !:over margin

Operator: LQZ

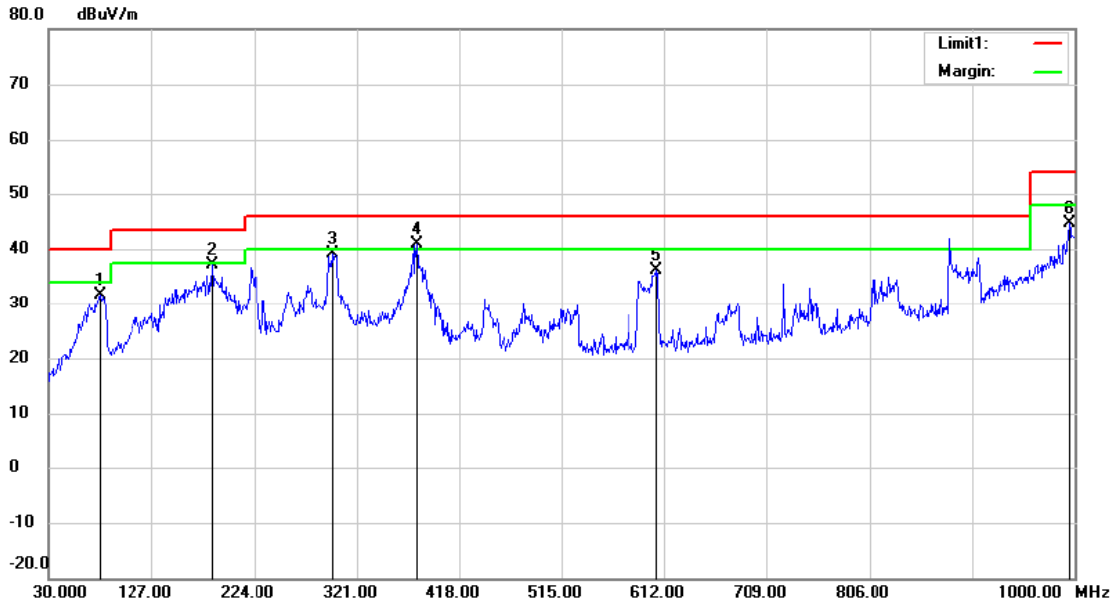


Site 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5825MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		78.5000	48.57	-17.04	31.53	40.00	-8.47	QP		
2		184.2300	53.94	-16.75	37.19	43.50	-6.31	QP		
3		297.7200	51.46	-12.33	39.13	46.00	-6.87	QP		
4	*	378.2300	50.90	-10.06	40.84	46.00	-5.16	QP		
5		604.2400	41.04	-4.89	36.15	46.00	-9.85	QP		
6		995.1500	43.39	1.28	44.67	54.00	-9.33	QP		

*:Maximum data x:Over limit !:over margin

Operator: LQZ

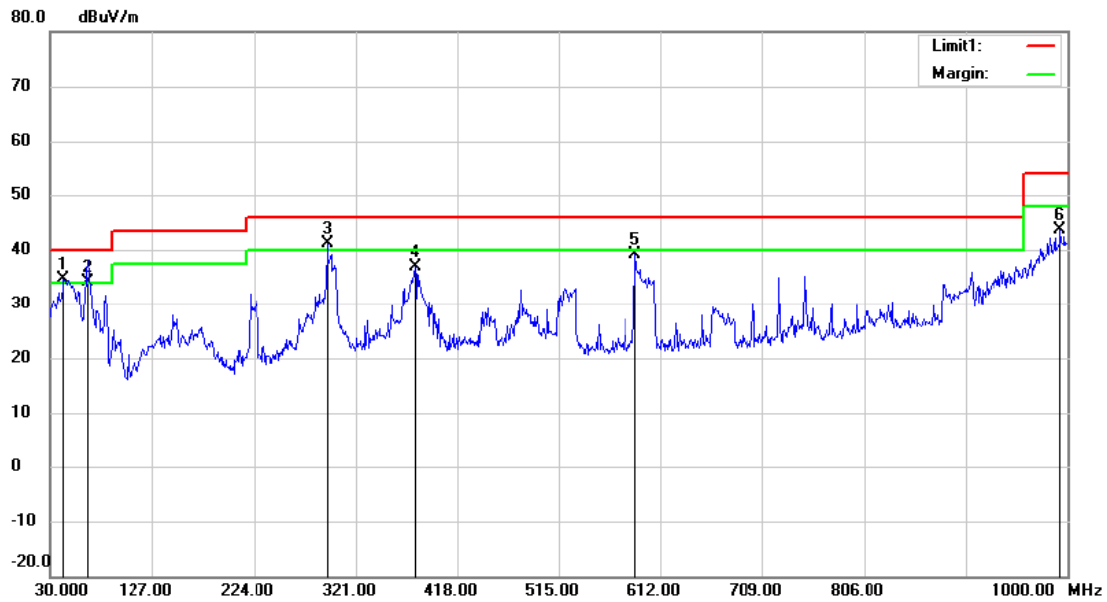

Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: TX 5825MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	!	42.6100	48.79	-14.26	34.53	40.00	-5.47	QP			
2	!	64.9200	50.39	-16.19	34.20	40.00	-5.80	QP			
3	*	293.8400	53.42	-12.29	41.13	46.00	-4.87	QP			
4		378.2300	46.97	-10.06	36.91	46.00	-9.09	QP			
5		587.7500	44.46	-5.40	39.06	46.00	-6.94	QP			
6		993.2100	42.31	1.26	43.57	54.00	-10.43	QP			

*:Maximum data x:Over limit !:over margin

Operator: LQZ

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass


We test the EUT at 120V and 240V, and show the worst result as bellow.

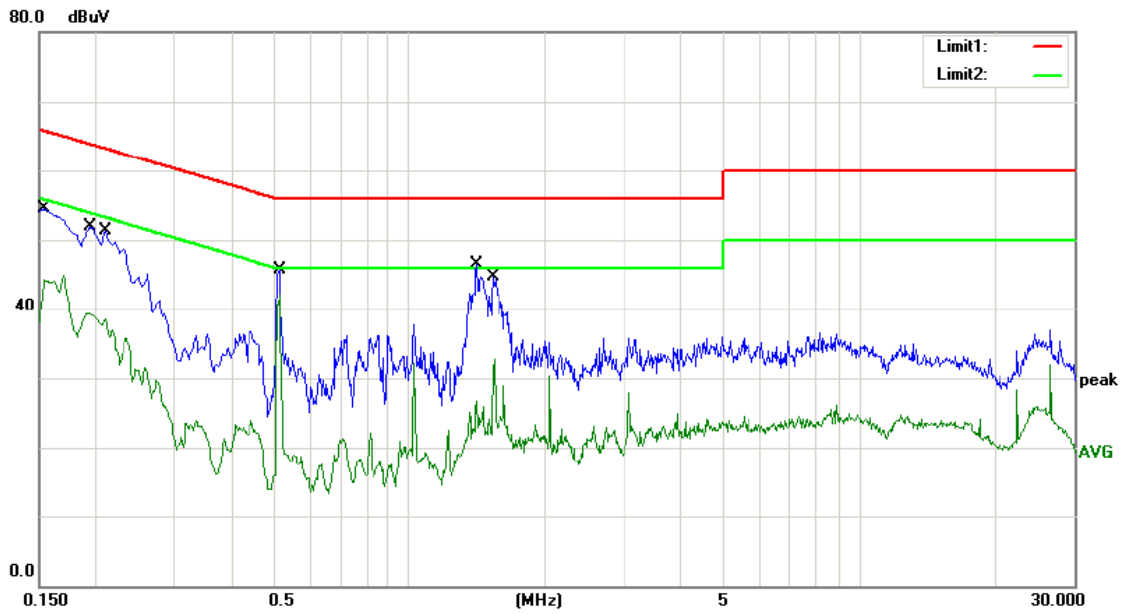

Site site #1 Phase: **L1** Temperature: 25
 Limit: (CE)FCC PART 15 C_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI (TX2437)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	40.52	9.78	50.30	65.78	-15.48	QP	
2		0.1540	28.32	9.78	38.10	55.78	-17.68	AVG	
3		0.1940	38.71	9.79	48.50	63.86	-15.36	QP	
4		0.1940	29.25	9.79	39.04	53.86	-14.82	AVG	
5		0.2100	36.91	9.79	46.70	63.21	-16.51	QP	
6		0.2100	27.09	9.79	36.88	53.21	-16.33	AVG	
7		0.5140	32.76	9.84	42.60	56.00	-13.40	QP	
8	*	0.5140	32.22	9.84	42.06	46.00	-3.94	AVG	
9		1.4060	32.66	9.84	42.50	56.00	-13.50	QP	
10		1.4060	13.02	9.84	22.86	46.00	-23.14	AVG	
11		1.5340	31.76	9.84	41.60	56.00	-14.40	QP	
12		1.5340	13.09	9.84	22.93	46.00	-23.07	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: Washington

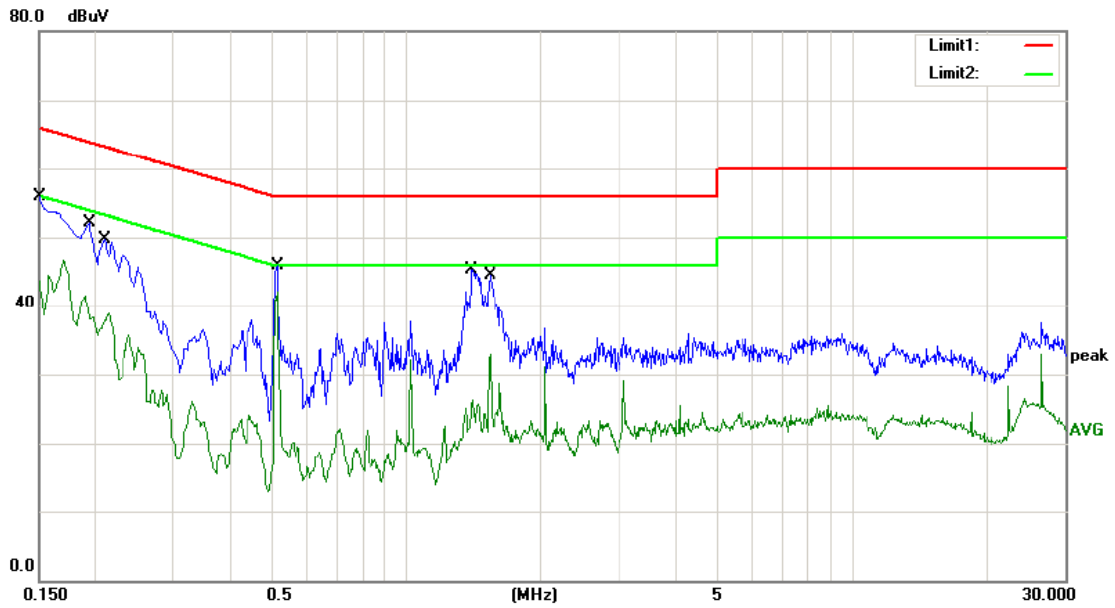

Site site #1
 Limit: (CE)FCC PART 15 C QP
 Mode: WIFI (TX2437)
 Note:

Phase: **N** Temperature: 25
 Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	43.32	9.78	53.10	66.00	-12.90	QP	
2		0.1500	33.93	9.78	43.71	56.00	-12.29	AVG	
3		0.1940	38.71	9.79	48.50	63.86	-15.36	QP	
4		0.1940	28.33	9.79	38.12	53.86	-15.74	AVG	
5		0.2100	36.41	9.79	46.20	63.21	-17.01	QP	
6		0.2100	27.59	9.79	37.38	53.21	-15.83	AVG	
7		0.5140	33.66	9.84	43.50	56.00	-12.50	QP	
8	*	0.5140	32.34	9.84	42.18	46.00	-3.82	AVG	
9		1.4020	32.76	9.84	42.60	56.00	-13.40	QP	
10		1.4020	15.61	9.84	25.45	46.00	-20.55	AVG	
11		1.5380	31.46	9.84	41.30	56.00	-14.70	QP	
12		1.5380	23.04	9.84	32.88	46.00	-13.12	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Washington

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

The EUT has a Metal antenna for BT, the max gain is 4.0 dBi;

The EUT has two Metal antenna for WIFI 2.4 Band, the max gain is 4.0 dBi;

The EUT has two Metal antenna: for WIFI 5G Band, the max gain is 5.0 dBi for WIFI 5G Band I, and the max gain is 5.0dBi for WIFI 5G Band II.

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.