

FCC TEST REPORT
for
Shenzhen Zilink Electrical Appliance Co., Ltd.

Wi-Fi Doorbell
Model No.: Cobell, Cobell-HD, Qdoors, Qdoors-HD,
DB31S, DB32S, DB33S, DB31H, DB32H, DB33H

Prepared for : Shenzhen Zilink Electrical Appliance Co., Ltd.
Address : F1, 9th Floor, Antaihe Industrial Building, No.2 Furong 7Rd.,
Shajing, Baoan District, Shenzhen, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011501206I
Date of Test : Jan. 05~ 19, 2015
Date of Report : Jan. 20, 2015

TABLE OF CONTENTS

Description	Page
Test Report	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility.....	5
1.3. Measurement Uncertainty.....	5
1.4. Test Summary.....	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. TEST PROCEDURE	8
4. RADIATION INTERFERENCE	9
4.1. Requirements (15.231):.....	9
4.2 Test Procedure.....	9
4.3 Test Results.....	9
5. 20DB BANDWIDTH	11
5.1. Requirements (15.231):.....	11
5.2. EUT Setup.....	11
5.3. Test Results.....	11
6. DUTY CYCLE	13
6.1. EUT Setup.....	13
6.2. Test Procedure.....	13
6.3. Requirements & Result.....	13
7. TEST PHOTO	16
7.1. Photo of Radiation Emission Test.....	16
APPENDIX I (EXTERNAL PHOTOS)	17
APPENDIX II (INTERNAL PHOTOS)	20

TEST REPORT

Applicant : Shenzhen Zilink Electrical Appliance Co., Ltd.
Manufacturer : Shenzhen Zilink Electrical Appliance Co., Ltd.
EUT : Wi-Fi Doorbell
Model No. : Cobell, Cobell-HD, Qdoors, Qdoors-HD, DB31S, DB32S, DB33S, DB31H, DB32H, DB33H
Serial No. : N.A.
Rating : DC 12V
Trade Mark : 

Measurement Procedure Used:
FCC Part15 Subpart C, Paragraph 15.231

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited

Date of Test : Jan. 05~ 19, 2015




Prepared by :

(Tested Engineer / Kebo Zhang)



Reviewer :

(Project Manager / Amy Ding)



Approved & Authorized Signer :

(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wi-Fi Doorbell

Model Number : Cobell, Cobell-HD, Qdoors, Qdoors-HD, DB31S, DB32S, DB33S, DB31H, DB32H, DB33H
(Note: All samples are the same except the model number and appearance, so we prepare "Cobell" for EMC test only.)

Test Power Supply : DC 12V

Frequency : 433.92MHz

Antenna : 0dBi Integrated Antenna

Applicant : Shenzhen Zilink Electrical Appliance Co., Ltd.
Address : F1, 9th Floor, Antaihe Industrial Building, No.2 Furong 7Rd., Shajing, Baoan District, Shenzhen, China

Manufacturer : Shenzhen Zilink Electrical Appliance Co., Ltd.
Address : F1, 9th Floor, Antaihe Industrial Building, No.2 Furong 7Rd., Shajing, Baoan District, Shenzhen, China

Factory : Shenzhen Zilink Electrical Appliance Co., Ltd.
Address : F1, 9th Floor, Antaihe Industrial Building, No.2 Furong 7Rd., Shajing, Baoan District, Shenzhen, China

Date of receiver : Jan. 05, 2015

Date of Test : Jan. 05~ 19, 2015

1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, February 22, 2013.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

1.4. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart C Section 15.231 for Emissions

Tests Carried Out Under FCC Part 15 Subpart C

Standard	Test Items	Status	Application
Part 15 Subpart C Section 15.231	Disturbance Voltage at The Mains Terminals	x	N/A, without AC power supply
	Radiation Emission	✓	
	20dB Bandwidth	✓	
	Duty Cycle	✓	

✓ Indicates that the test is applicable.
x Indicates that the test is not applicable.

2. MEASURING DEVICE AND TEST EQUIPMENT

The following test equipments were used during test:

Equipment	Manufacturer	Model #	Serial #	Date of Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	US39390 582	Aug. 08, 2014	1 Year
Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 22, 2014	1 Year
Bilog Broadband Antenna	Schwarzbeck	VULB916 3	VULB 9163-289	Apr. 24, 2014	1 Year
Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
Preamplifier	Instruments corporation	EMC0118 30	980100	Aug. 08, 2014	1 Year
Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
AC Power Source	Sepcial power system	YF650	N/A	N/A	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
EMI Test Software EZ-EMC	SHURPLE	EZ-EMC	N/A	N/A	N/A
Coaxial Cable	N/A	N/A	N/A	N/A	N/A
Coaxial Cable	N/A	N/A	N/A	N/A	N/A
Coaxial Cable	N/A	N/A	N/A	N/A	N/A
3m Semi-Anechoic Chamber	Zhong Yu Electronic	N/A	N/A	N/A	N/A

3. Test Procedure

JUSTIFICATION

ANSI C63.4 2009 section 12.1.4.1 requires that hand-held or body-worn devices shall include rotation of the EUT through three orthogonal axes to determine the attitude that maximizes the emissions. The EUT is a hand-held device. As such, preliminary tests were performed to determine the orientation that produced the highest level of emissions. This was with the DUT orientated vertically as shown in Section 7.1.

GENERAL:

This report shall NOT be reproduced except in full without the written approval of Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33.20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

4. Radiation Interference

4.1. Requirements (15.231):

According to 15.231(b), the field strength of emissions from Intentional Radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)
40.66 - 40.70	67.04	2,250	47.04	225
70 - 130	61.94	1,250	41.94	125
130 - 174	* 61.94 - 71.48	* 1,250 - 3,750	* 41.94 - 51.48	* 125 - 375
174 - 260	71.48	3,750	51.48	375
260 - 470	* 71.48 - 81.94	* 3,750 - 12,500	* 51.48 - 61.94	* 375 - 1,250
above 470	81.94	12,500	61.94	1,250

4.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

4.3 Test Results

PASS.

The test data Please refer the following pages.

Data:

Horizontal

Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit
MHz	dB	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB
60.49	1.47	12.35	41.77	58.59	30.64	40.00	-9.36
433.92	1.51	12.53	41.33	98.02	70.73	80.82	-10.09
867.94	1.64	13.33	41.42	75.54	49.09	60.82	-11.73
**1301.76	2.36	18.56	39.95	65.18	46.15	54.00	-7.85
1735.68	3.00	21.32	38.30	65.41	51.43	60.82	-9.39
2169.60	3.10	24.05	38.41	64.03	52.77	60.82	-8.05
2603.52	3.11	25.75	38.82	61.04	51.08	60.82	-9.74
3037.44	---	---	---	---	---	---	---
3471.36	---	---	---	---	---	---	---
**3905.28	---	---	---	---	---	---	---
4339.20	---	---	---	---	---	---	---
	---	---	---	---	---	---	---

Vertical

Frequency	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit
MHz	dB	dB/m	dB	dB μ V	dB μ V/m	dB μ V/m	dB
556.77	0.85	9.47	43.68	70.02	36.66	46.00	-9.34
433.92	1.51	12.53	41.33	99.65	72.36	80.82	-8.46
867.94	1.64	13.33	41.42	79.79	53.34	60.82	-7.48
**1301.76	2.36	18.56	39.95	64.44	45.41	54.00	-8.59
1735.68	3.00	21.32	38.30	68.56	54.58	60.82	-6.24
2169.60	3.10	24.05	38.41	64.78	53.52	60.82	-7.30
2603.52	3.11	25.75	38.82	62.45	52.49	60.82	-8.33
3037.44	---	---	---	---	---	---	---
3471.36	---	---	---	---	---	---	---
**3905.28	---	---	---	---	---	---	---
4339.20	---	---	---	---	---	---	---
433.92	---	---	---	---	---	---	---

NOTE: 1. All values measured above 1GHz are recorded as Peak values.

2. “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. “**” in the table above means the restricted band.

5. 20dB Bandwidth

5.1. Requirements (15.231):

In accordance with Part15.231(c), the fundamental frequency bandwidth was kept within 0.25% of the center frequency for devices operating >70MHz and <900MHz.

Fundamental Frequency (MHz)	Limit of 20dB Bandwidth (kHz)
433.92	433920x0.0025=1084.8

5.2. EUT Setup

The radiated emission tests were performed in the in the 3m Semi-anechoic chamber, using the setup accordance with the ANSI C63.4-2009.


The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

5.3. Test Results

Pass.

Please refer the following plot.

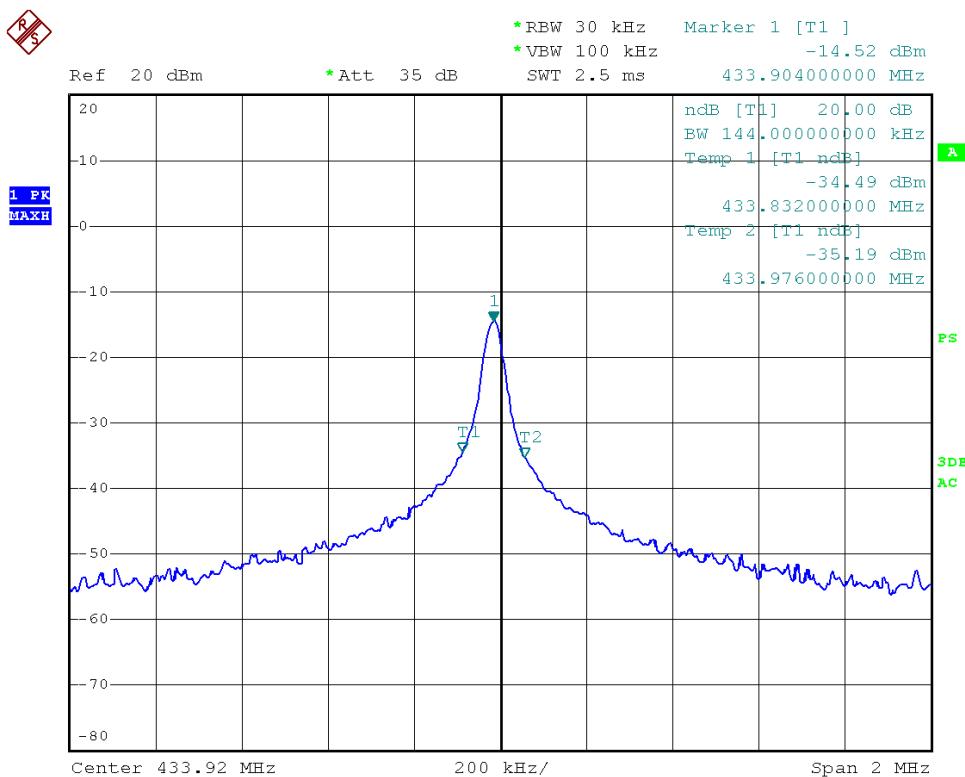

6. DUTY CYCLE

6.1. EUT Setup

The radiated emission tests were performed in the in the 3m Semi-anechoic chamber, using the setup accordance with the ANSI C63.4-2009.

The EUT was placed on the center of the nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level.

6.2. Test Procedure

The EUT was placed on a turntable which is 0.8m above ground plane.

Set EUT operating in continuous transmitting mode

Set Test Receiver into spectrum analyzer mode, Tune the spectrum analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth(RBW) to 100kHz and video bandwidth(VBW) to 100kHz, Span was set to 0Hz.

The Duty Cycle was measured and recorded.

6.3. Requirements & Result

1. Regulation 15.231(a) The provisions of this Section are restricted to periodic operation within the band 40.66 -40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted.

Result:

The EUT is a remote switch without audio or video transmitted.


The EUT meets the requirements of this section.

2. Regulation 15.231(a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

Test plots see following pages.

The EUT meets the requirements of this section.

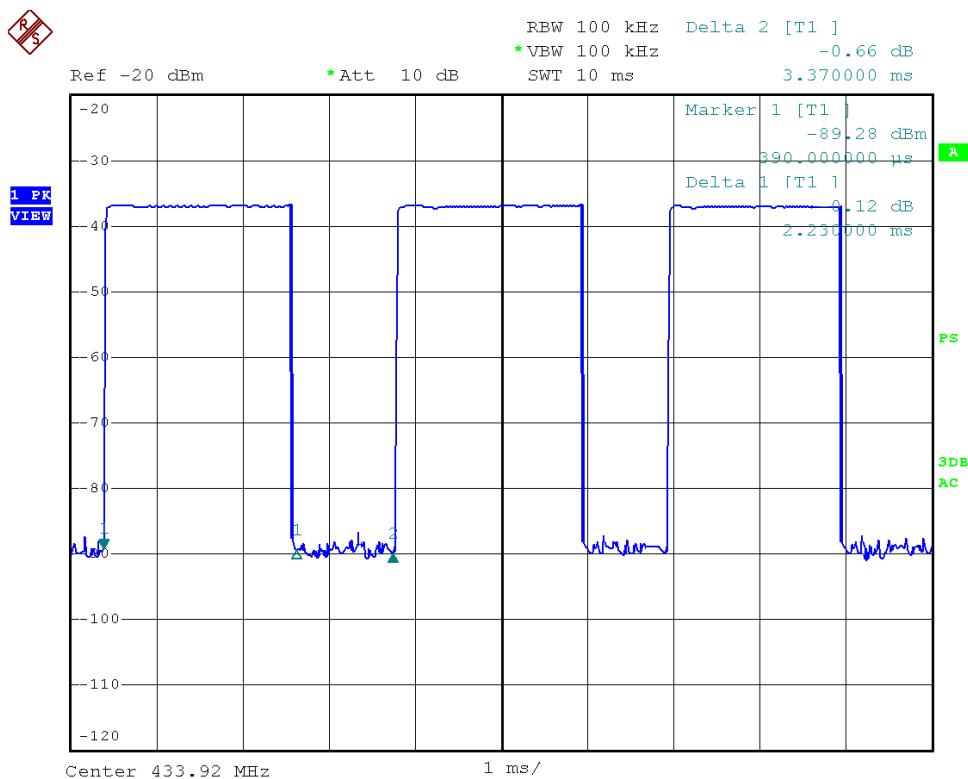

Note: “Marker 1” means the moment button was persistent pressed, and “Marker 2” means where the transmitter deactivated automatically.

3. Regulation 15.231(a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT doesn't have automatic transmission.

4. Regulation 15.231(a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than one seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed one seconds per hour.

Result:

The EUT doesn't employ periodic transmission.

5. Regulation 15.231(a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.


Result:

This section is not applicable to the EUT.

The results: The unit does meet the FCC PART 15 C Section 15.231 requirements.

7. TEST PHOTO

7.1. Photo of Radiation Emission Test

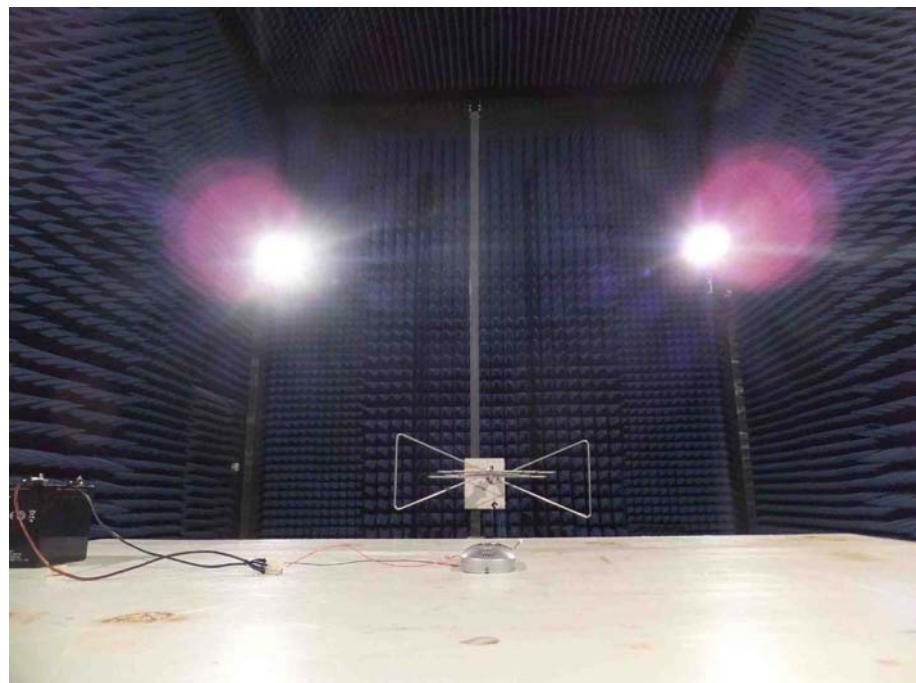

APPENDIX I (EXTERNAL PHOTOS)

Figure 1
The EUT-Top View

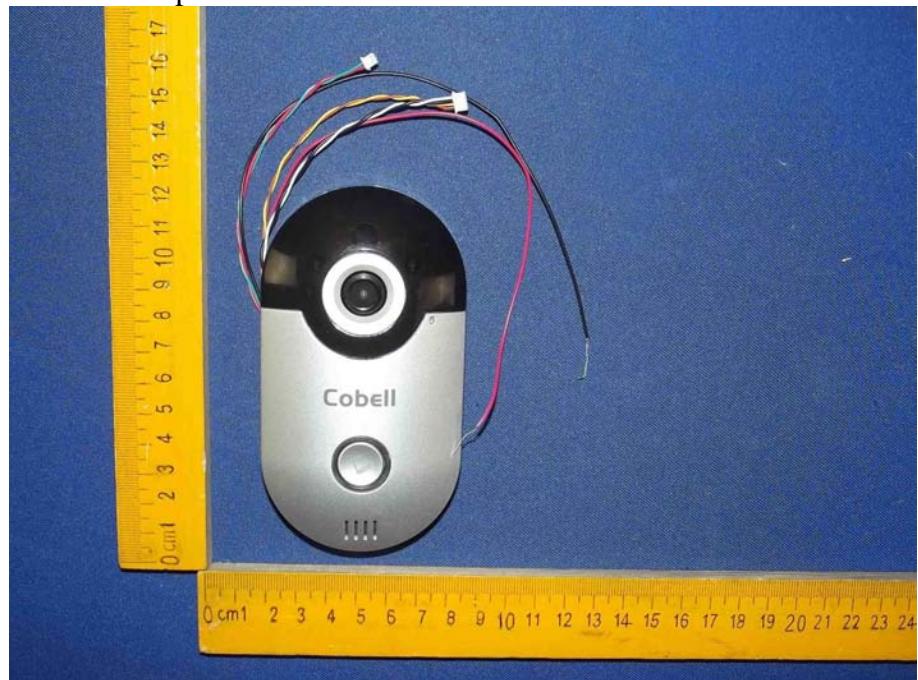


Figure 2
The EUT-Bottom View

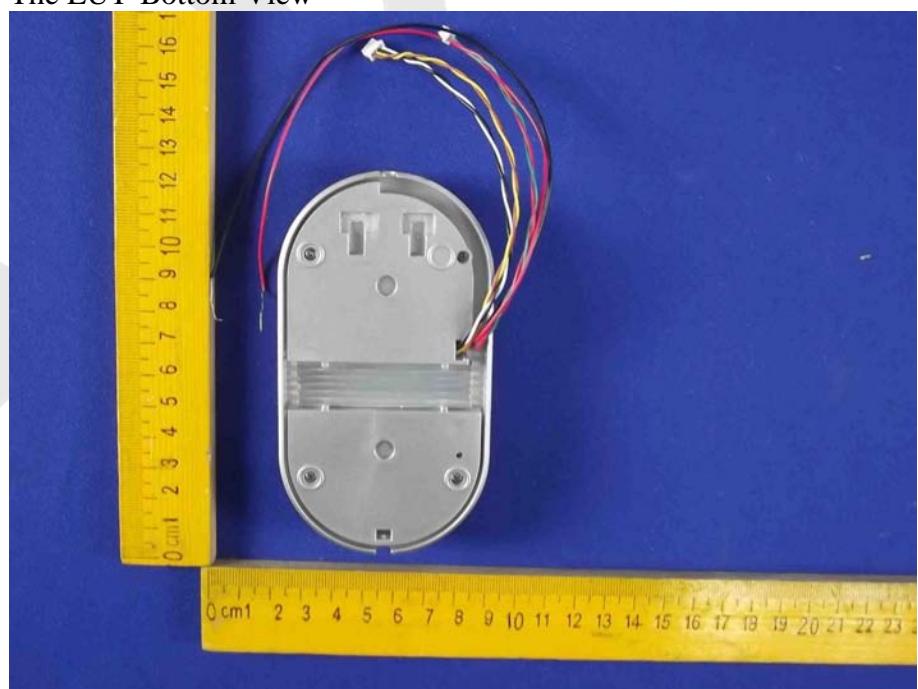


Figure 3
The EUT-Front View



Figure 4
The EUT-Back View



Figure 5
The EUT-Right View



Figure 6
The EUT-Left View



APPENDIX II (INTERNAL PHOTOS)

Figure 7
The EUT-Inside View



Figure 8
PCB of the EUT-Front View

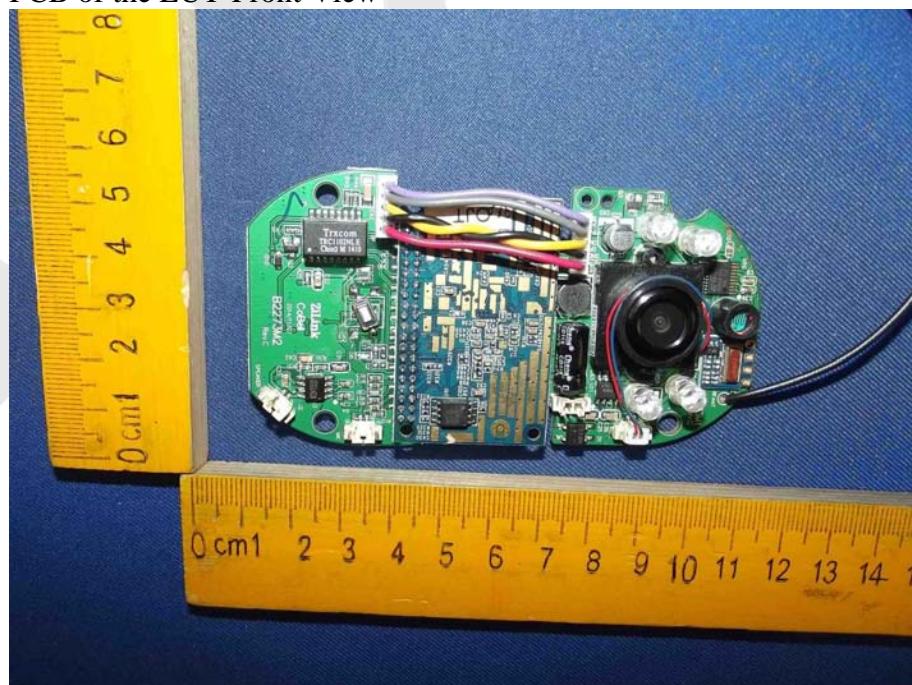


Figure 9
PCB of the EUT-Back View

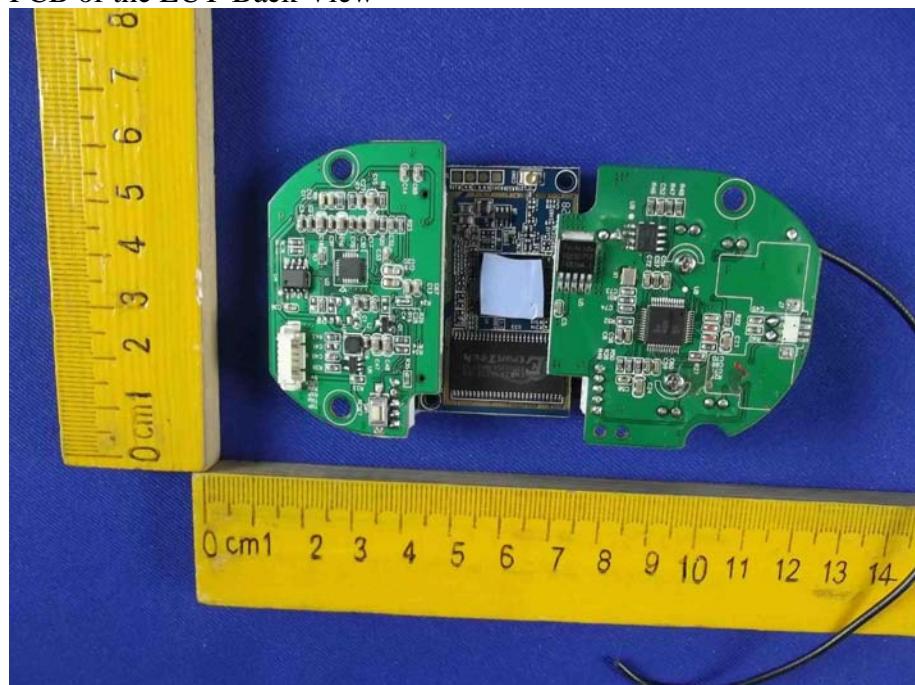


Figure 10
PCB of the EUT-Front View

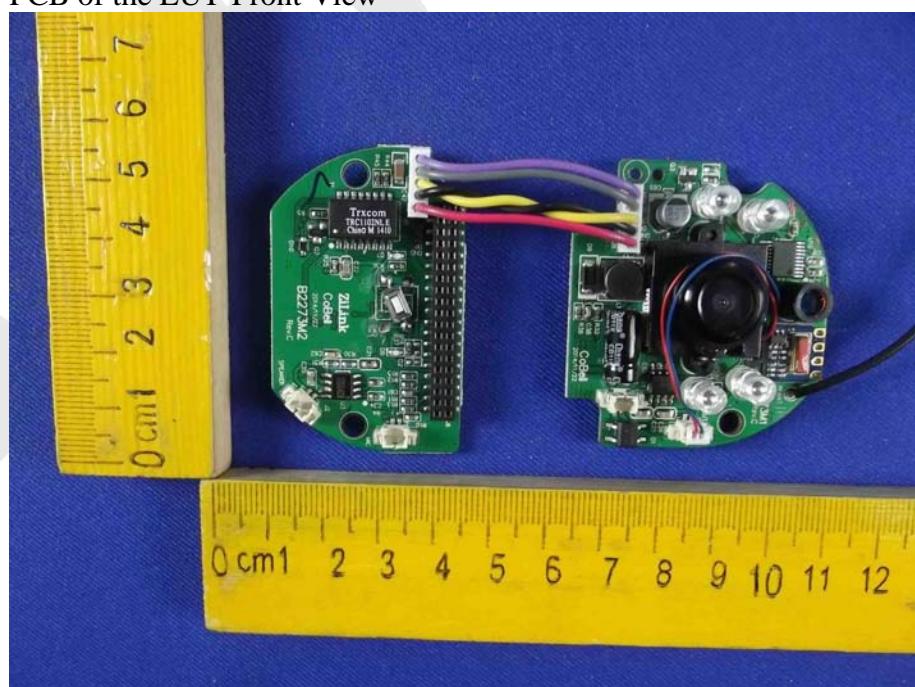


Figure 11
PCB of the EUT-Back View

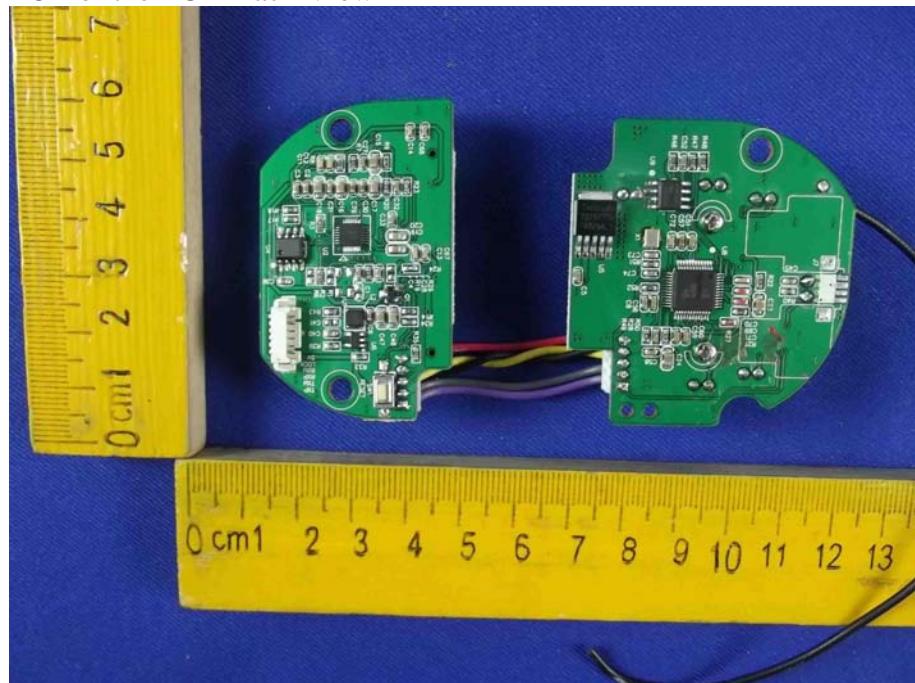


Figure 12
PCB of the EUT-Front View (WiFi Module)

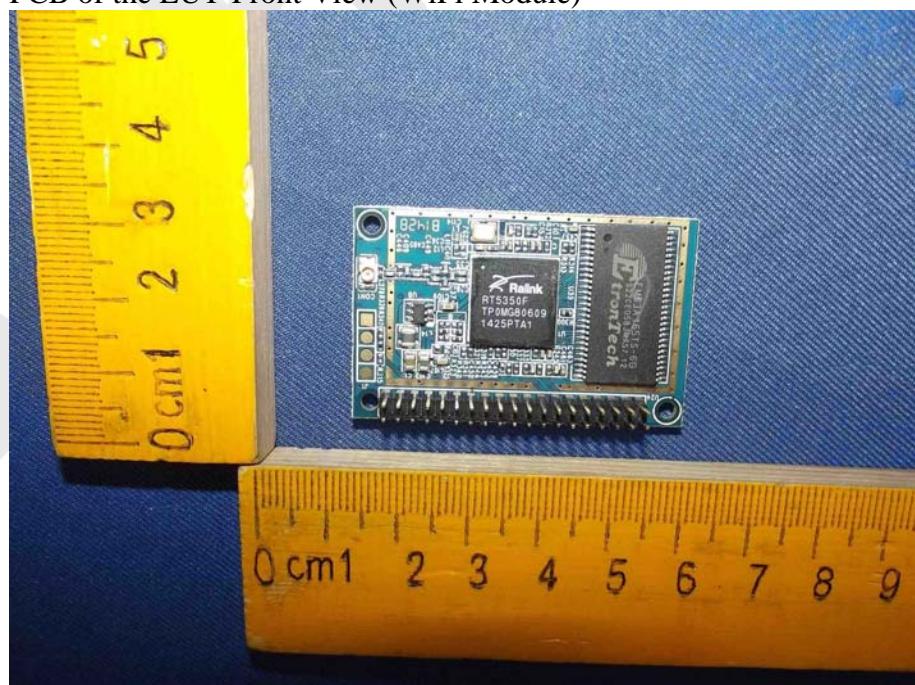


Figure 13
PCB of the EUT-Back View (WiFi Module)

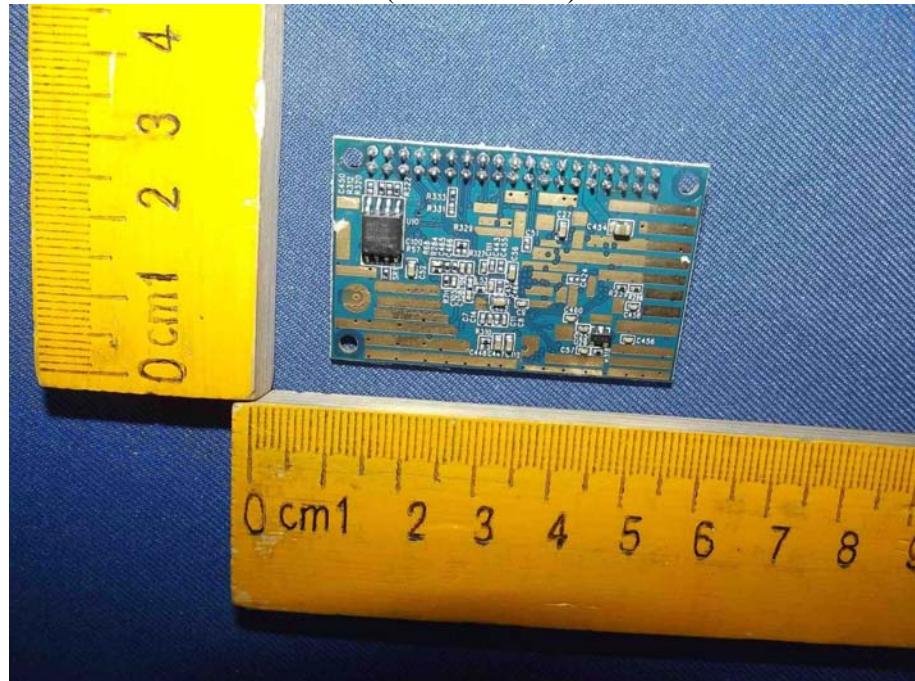


Figure 14
PCB of the EUT-Front View (WiFi Module)



Figure 15
PCB of the EUT-Back View (WiFi Module)

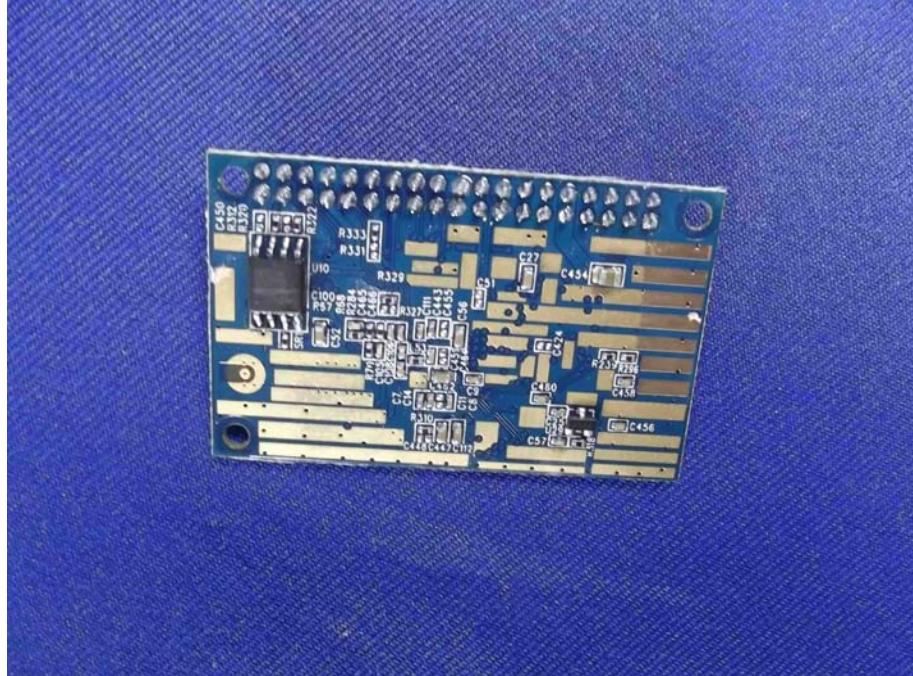


Figure 16
PCB of the EUT-Module View (433MHz)

