



FCC TEST REPORT

FCC ID: 2AD37JUPW11

Product Name:	10W fast charge wireless charger
Trademark:	j5 create
Model Number:	JUPW1101
Prepared For :	Kaijet Technology International Corporation
Address :	8F., No109, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan (R.O.C.)
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Apr. 19 – Apr. 26, 2018
Date of Report :	Apr. 26, 2018
Report No.:	BCTC-LH180400806E



TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1.GENERAL INFORMATION	4
1.1. Report information.....	4
1.2. Measurement Uncertainty.....	4
1.3. Test Facility.....	4
1.4. Test Uncertainty.....	4
2.PRODUCT DESCRIPTION	5
2.1. EUT Description.....	5
2.2. Test mode.....	5
2.3. Block Diagram of EUT Configuration.....	5
2.4. Test Conditions.....	6
2.5. Description Of Support Units (Conducted Mode).....	6
3.TEST RESULTS SUMMARY	6
4.TEST EQUIPMENT USED	7
4.1. For Conducted Emission Test.....	7
4.2. For Radiated Emission Measurement.....	7
5.CONDUCTED EMISSION TEST.....	8
5.1. Block Diagram of Test Setup.....	8
5.2. Test Standard.....	8
5.3. Conducted Emission Limit.....	8
5.4. EUT Configuration on Test.....	8
5.5. Operating Condition of EUT.....	9
5.6. Test Procedure.....	9
5.7. Test Result.....	9
6.RADIATED EMISSION MEASUREMENT	14
6.1. Block Diagram of Test Setup.....	14
6.2. Test Standard and Limit	15
6.3. EMI Test Receiver Setup	15
6.4. Test Procedure.....	16
6.5. Test Result.....	16
7. EUT TEST PHOTOS.....	22
8. EUT PHOTOS	24



TEST REPORT DECLARATION

Applicant : Kaijet Technology International Corporation
Address : 8F., No109, Zhongcheng Rd., Tucheng Dist., New Taipei City 236,
Taiwan (R.O.C.)
EUT Description : 10W fast charge wireless charger
Model Number JUPW1101


Test Standards:

FCC Part 15 C

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang
Reviewer(Supervisor): Jade Yang
Approved(Manager): Carson Zhang





1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

1.2. Measurement Uncertainty

Available upon request.

1.3. Test Facility

Site Description
Name of Firm : Shenzhen BCTC Testing Co., Ltd.

Site Location : BCTC Building & 1-2F, East of B Building,
Pengzhou Industrial, Fuyuan 1st Road, Qiaotou
Community, Fuyong Street, Bao'an District,
Shenzhen, China

1.4. Test Uncertainty

Conducted Emission = ± 2.66 dB
Uncertainty
Radiated Emission Uncertainty = ± 4.15 dB

2. PRODUCT DESCRIPTION

2.1.EUT Description

Description : **10W fast charge wireless charger**

Applicant : **Kaijet Technology International Corporation**
 8F., No109, Zhongcheng Rd., Tucheng Dist., New Taipei City 236,
 Taiwan (R.O.C.)

Manufacturer : **GUAN HONG ELECTRONICS LTD**
 4F-2(Taoyuan City, Taoyuan District Palit Street 11 56 4F-2)

Trademark : **j5 create**

Model Number : JUPW1101

Serial Model : N/A

Model Difference : N/A

Power Supply : Input: 5V/2A 9V/2A 12V/1.5A
 Output: 5V/1/1.5A 9V/1.1A

Frequency range : 110-205KHz

Work Frequency : 127.7KHz


Operation Frequency each of channel

Channel List	
Channel	Frequency (kHz)
00	127.7

2.2.Test mode

Test Modes	keeping TX+Charging mode
------------	--------------------------

2.3.Block Diagram of EUT Configuration

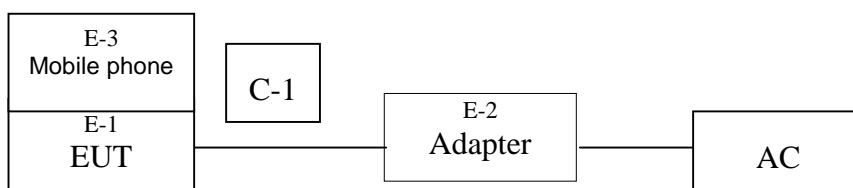



2.4. Test Conditions

Temperature: 23~25°C

Relative Humidity: 55~63 %

2.5. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	10W fast charge wireless charger	N/A	JUPW1101	N/A	EUT
E-2	Adapter	N/A	BCTC-001	N/A	AC100-240V 50/60Hz 500mA Output: 5V $\overline{\text{---}}$ 3A 9V $\overline{\text{---}}$ 2A, 12V $\overline{\text{---}}$ 1.5A
E-3	Mobile phone	BN41	Redmi Note 4X	N/A	Lab. Provide

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

Remark: “N/A” means “Not applicable.”



4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1 01165-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

5. CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

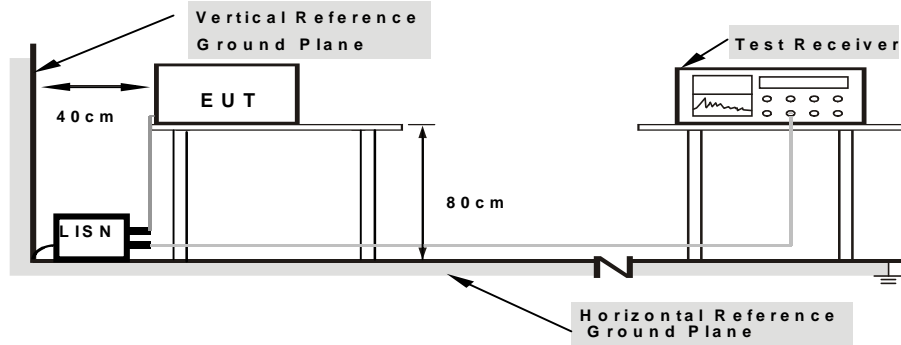

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

(EUT: **10W fast charge wireless charger**)

5.2. Test Standard

FCC§15.207

5.3. Conducted Emission Limit

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1. milestone dual

Model Number: **JUPW1101**



5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulators as shown in Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in test modes (EUT Working) and test it.

5.6. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.


5.7. Test Result

PASS

Please refer to the following pages.



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V For Adapter (adapter input:AC120V/60Hz)	Test Mode:	Normal Link

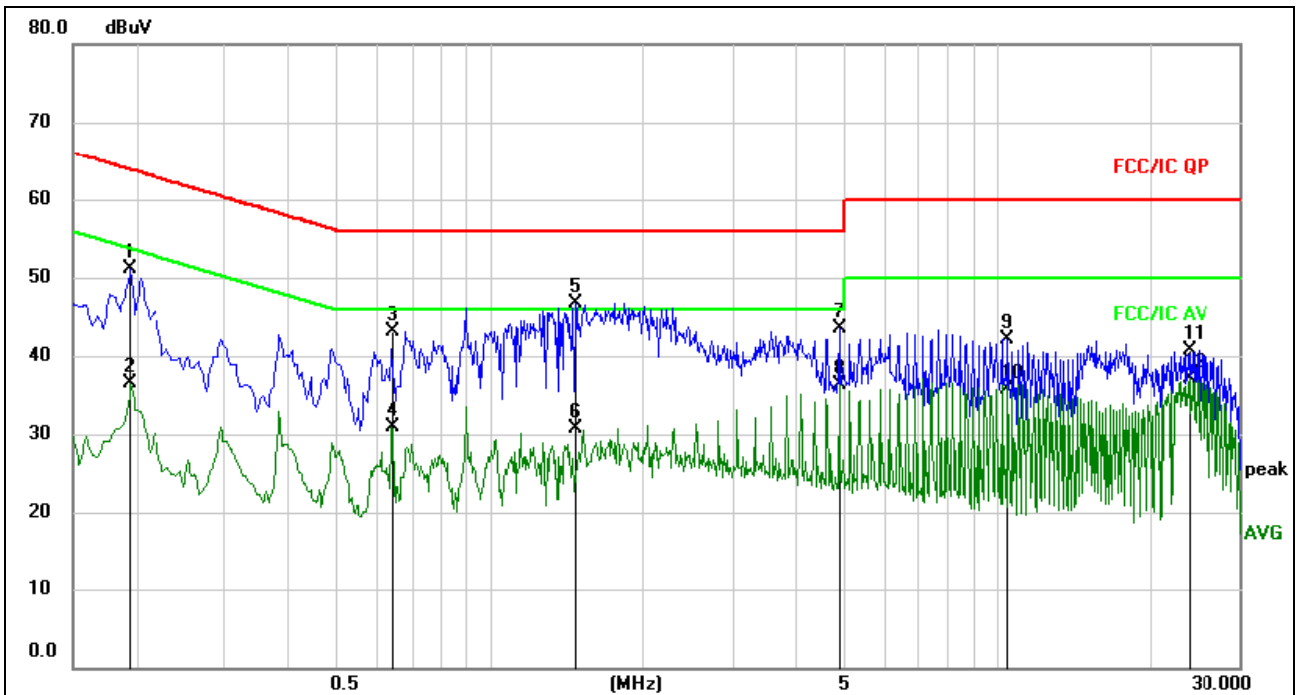


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1949	41.47	9.65	51.12	63.83	-12.71	QP	
2		0.1949	26.79	9.65	36.44	53.83	-17.39	AVG	
3		0.6405	33.52	9.68	43.20	56.00	-12.80	QP	
4		0.6405	21.29	9.68	30.97	46.00	-15.03	AVG	
5	*	1.4775	37.04	9.70	46.74	56.00	-9.26	QP	
6		1.4775	21.09	9.70	30.79	46.00	-15.21	AVG	
7		4.8525	33.84	9.74	43.58	56.00	-12.42	QP	
8		4.8525	26.54	9.74	36.28	46.00	-9.72	AVG	
9		10.4730	32.30	9.83	42.13	60.00	-17.87	QP	
10		10.4730	25.87	9.83	35.70	50.00	-14.30	AVG	
11		24.0090	30.76	9.87	40.63	60.00	-19.37	QP	
12		24.0090	27.17	9.87	37.04	50.00	-12.96	AVG	



EUT:	10W fast charge wireless charger	Model Name. :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V For Adapter (adapter input:AC120V/60Hz)	Test Mode:	Normal Link

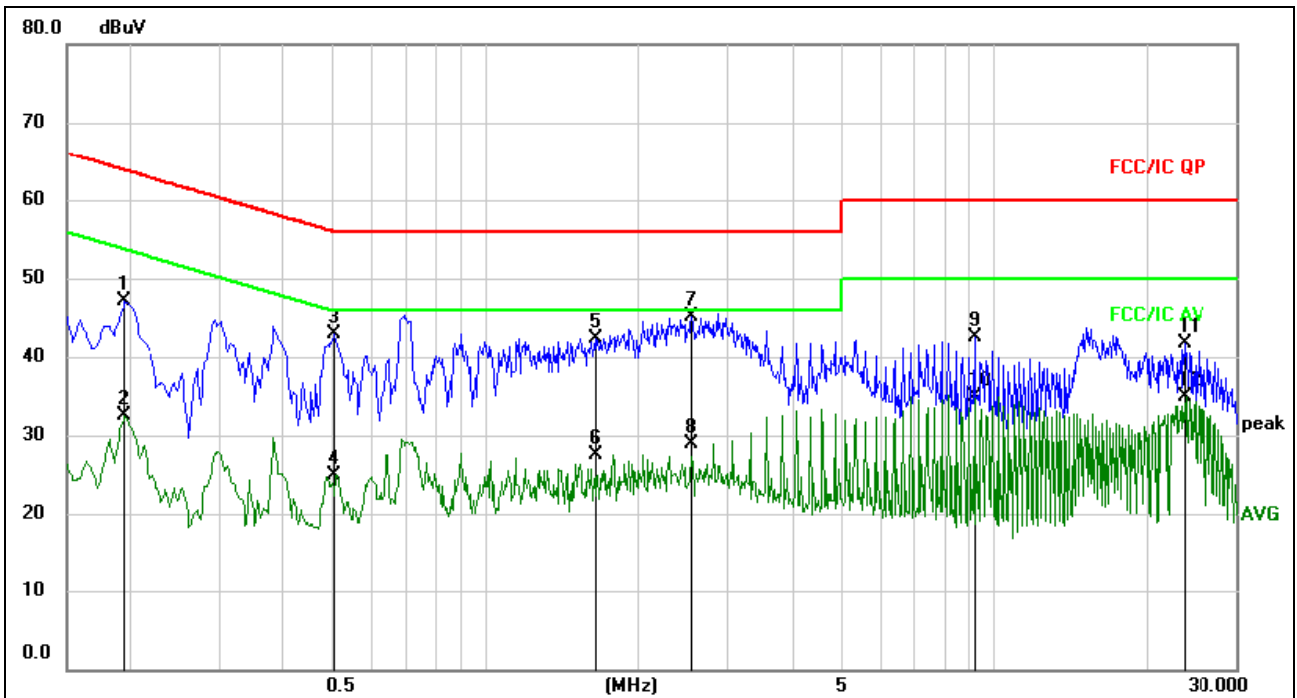


Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1949	37.38	9.65	47.03	63.83	-16.80	QP	
2		0.1949	22.77	9.65	32.42	53.83	-21.41	AVG	
3		0.5055	33.27	9.68	42.95	56.00	-13.05	QP	
4		0.5055	15.14	9.68	24.82	46.00	-21.18	AVG	
5		1.6530	32.59	9.70	42.29	56.00	-13.71	QP	
6		1.6530	17.73	9.70	27.43	46.00	-18.57	AVG	
7	*	2.5530	35.37	9.72	45.09	56.00	-10.91	QP	
8		2.5530	19.18	9.72	28.90	46.00	-17.10	AVG	
9		9.1950	32.72	9.82	42.54	60.00	-17.46	QP	
10		9.1950	25.04	9.82	34.86	50.00	-15.14	AVG	
11		23.7525	31.78	9.87	41.65	60.00	-18.35	QP	
12		23.7525	24.96	9.87	34.83	50.00	-15.17	AVG	



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 9V For Adapter (adapter input:AC120V/60Hz)	Test Mode:	Charging

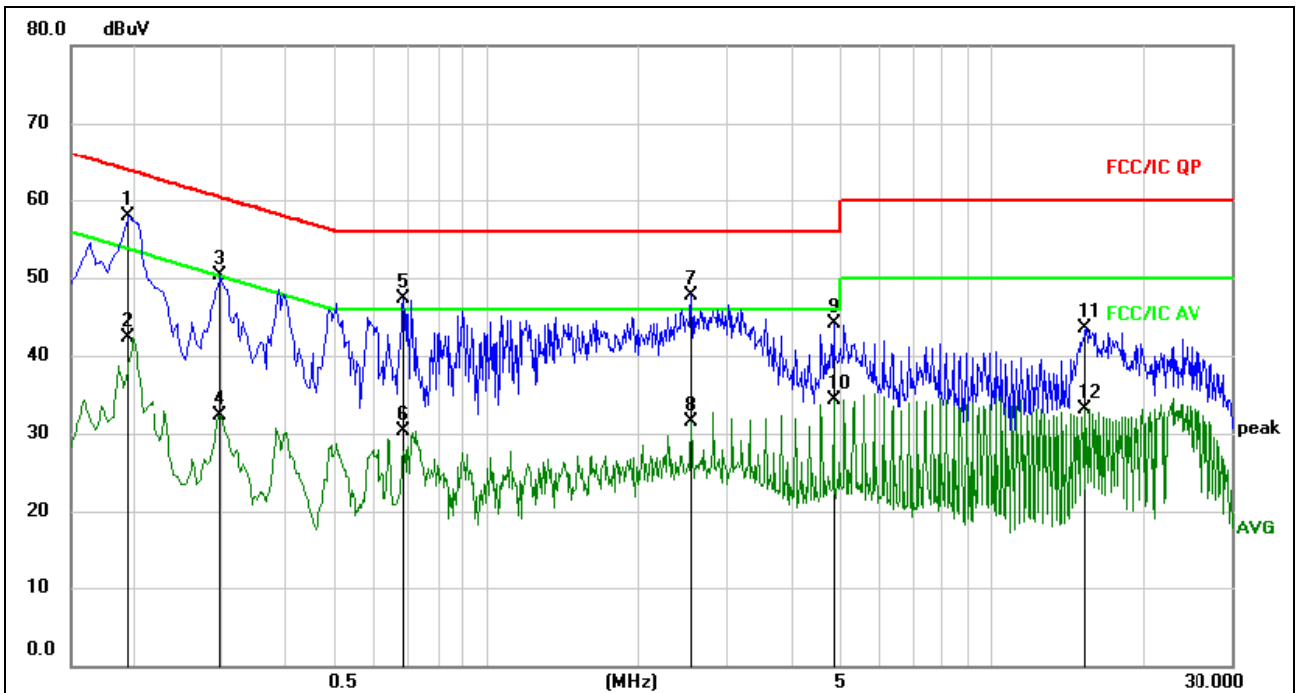


Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1949	48.35	9.65	58.00	63.83	-5.83	QP	
2		0.1949	32.69	9.65	42.34	53.83	-11.49	AVG	
3		0.2985	40.63	9.66	50.29	60.28	-9.99	QP	
4		0.2985	22.72	9.66	32.38	50.28	-17.90	AVG	
5		0.6855	37.72	9.68	47.40	56.00	-8.60	QP	
6		0.6855	20.68	9.68	30.36	46.00	-15.64	AVG	
7		2.5530	38.08	9.72	47.80	56.00	-8.20	QP	
8		2.5530	21.81	9.72	31.53	46.00	-14.47	AVG	
9		4.8525	34.30	9.74	44.04	56.00	-11.96	QP	
10		4.8525	24.62	9.74	34.36	46.00	-11.64	AVG	
11		15.3240	33.56	9.87	43.43	60.00	-16.57	QP	
12		15.3240	23.29	9.87	33.16	50.00	-16.84	AVG	



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 9V For Adapter (adapter input:AC120V/60Hz)	Test Mode:	Charging

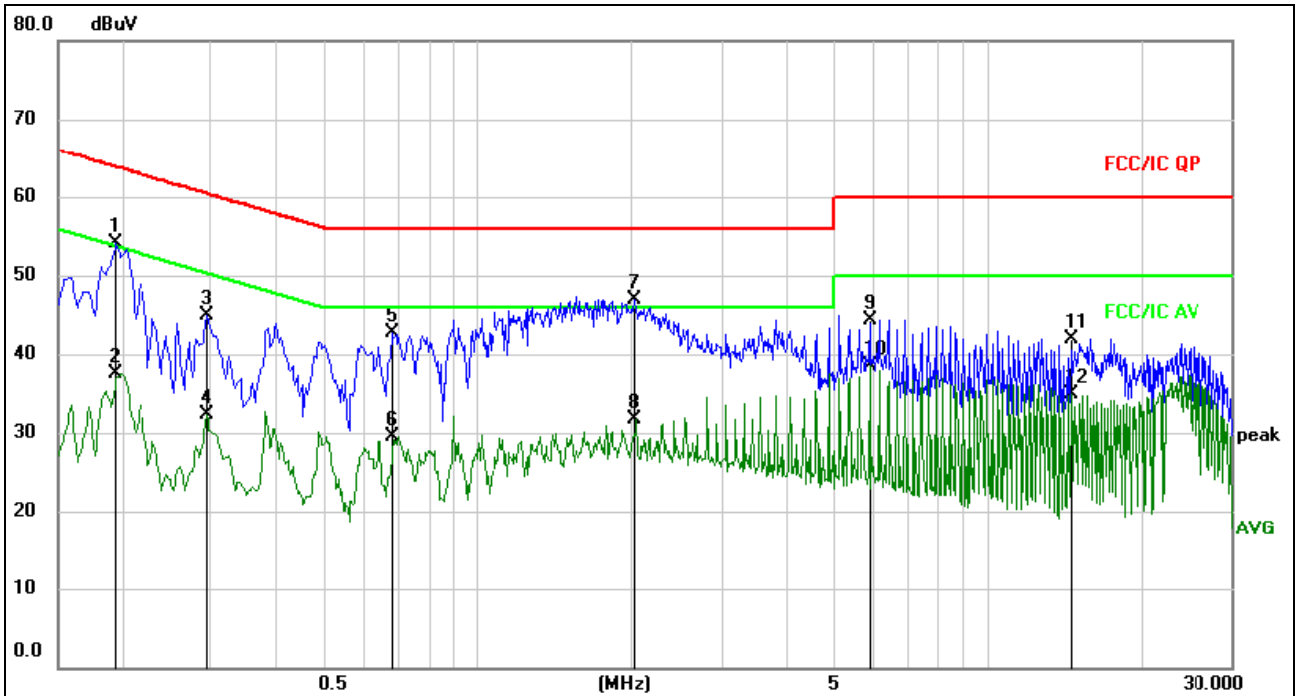


Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1949	44.43	9.65	54.08	63.83	-9.75	QP	
2		0.1949	27.90	9.65	37.55	53.83	-16.28	AVG	
3		0.2940	35.27	9.66	44.93	60.41	-15.48	QP	
4		0.2940	22.69	9.66	32.35	50.41	-18.06	AVG	
5		0.6765	32.93	9.68	42.61	56.00	-13.39	QP	
6		0.6765	19.84	9.68	29.52	46.00	-16.48	AVG	
7	*	2.0310	37.20	9.71	46.91	56.00	-9.09	QP	
8		2.0310	22.05	9.71	31.76	46.00	-14.24	AVG	
9		5.8740	34.60	9.76	44.36	60.00	-15.64	QP	
10		5.8740	28.68	9.76	38.44	50.00	-11.56	AVG	
11		14.5590	32.14	9.86	42.00	60.00	-18.00	QP	
12		14.5590	25.01	9.86	34.87	50.00	-15.13	AVG	

6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of connection between the EUT and the simulators

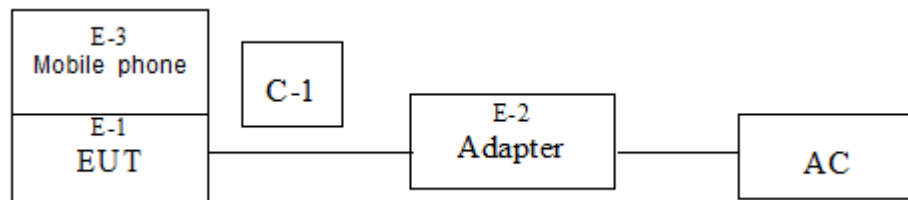


(EUT: 10W fast charge wireless charger)

6.1.2. Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

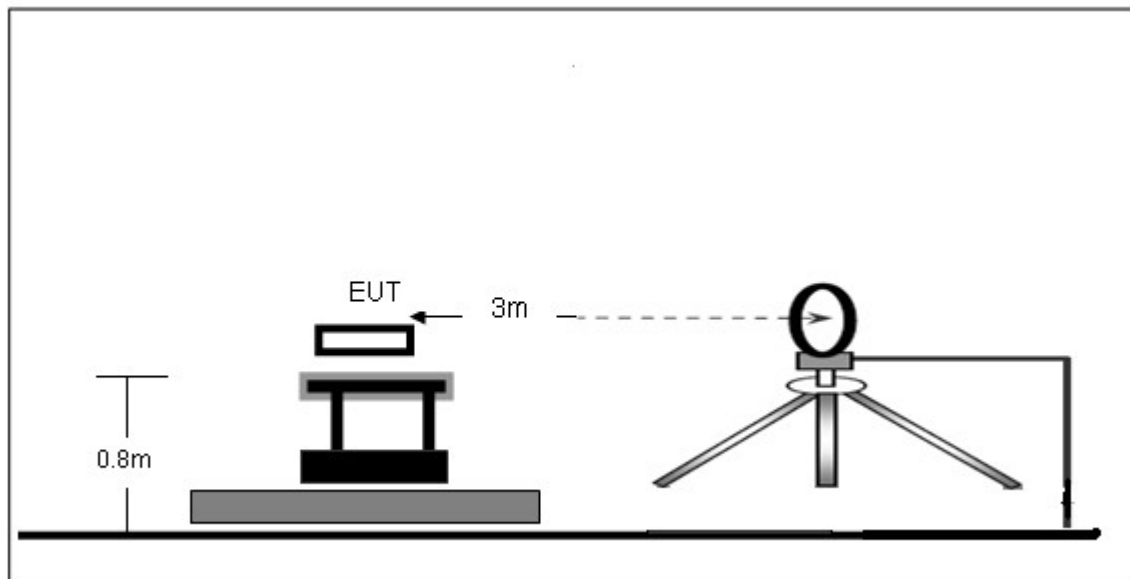

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

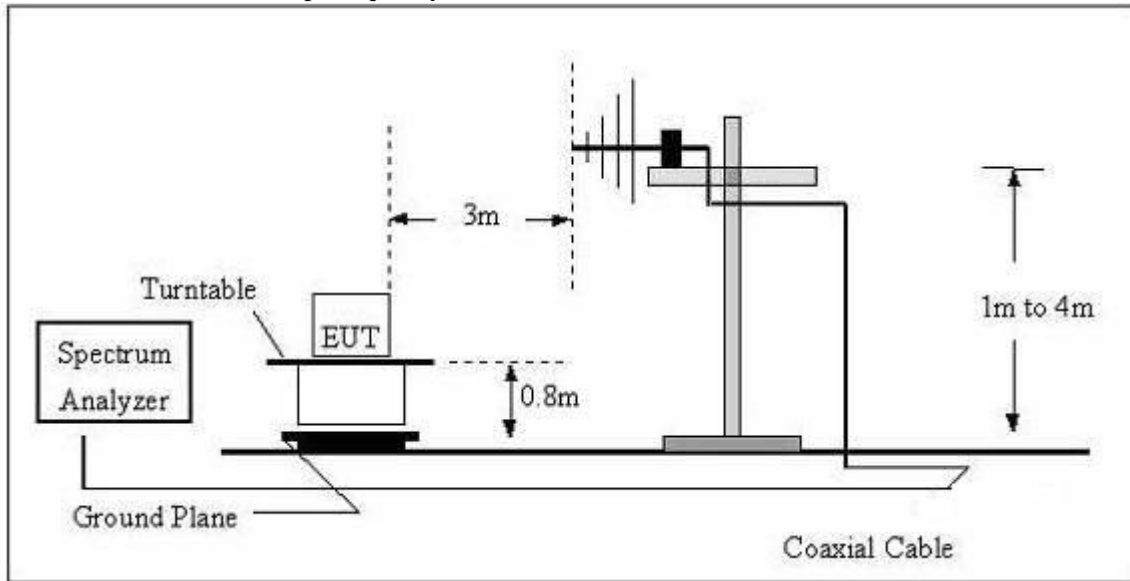

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.2. Test Standard and Limit

FCC §15.209; §15.205;

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	-	74.0	Peak	3

6.3. EMI Test Receiver Setup

The system was investigated from 9kHz to1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:



Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 kHz	1 kHz	QP
150 kHz – 30MHz	9kHz	30kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

6.4. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.5. Test Result

PASS

Please refer to the following pages.



9kHz-30MHz

EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 9V For Adapter(adapter intpu:AC120V/60Hz)		
Test Mode :	Normal Link		

Frequency (kHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
19.3400	38.79	20.15	58.94	141.88	-85.74	PK
19.3400	34.40	20.15	54.55	121.88	-68.13	AV
87.8200	58.22	20.33	78.55	128.73	-55.51	PK
87.8200	55.21	20.33	75.54	108.73	-38.52	AV
118.2500	68.60	20.55	89.15	126.15	-19.31	PK
118.2500	64.93	20.55	85.48	106.15	-22.98	AV
766.4200	23.36	20.64	44.00	69.91	-25.93	QP
875.3200	38.02	21.26	59.28	68.76	-9.03	QP
1115.0000	13.77	22.32	36.09	66.66	-29.82	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.



30MHz-1GHz

EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V For Adapter(adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

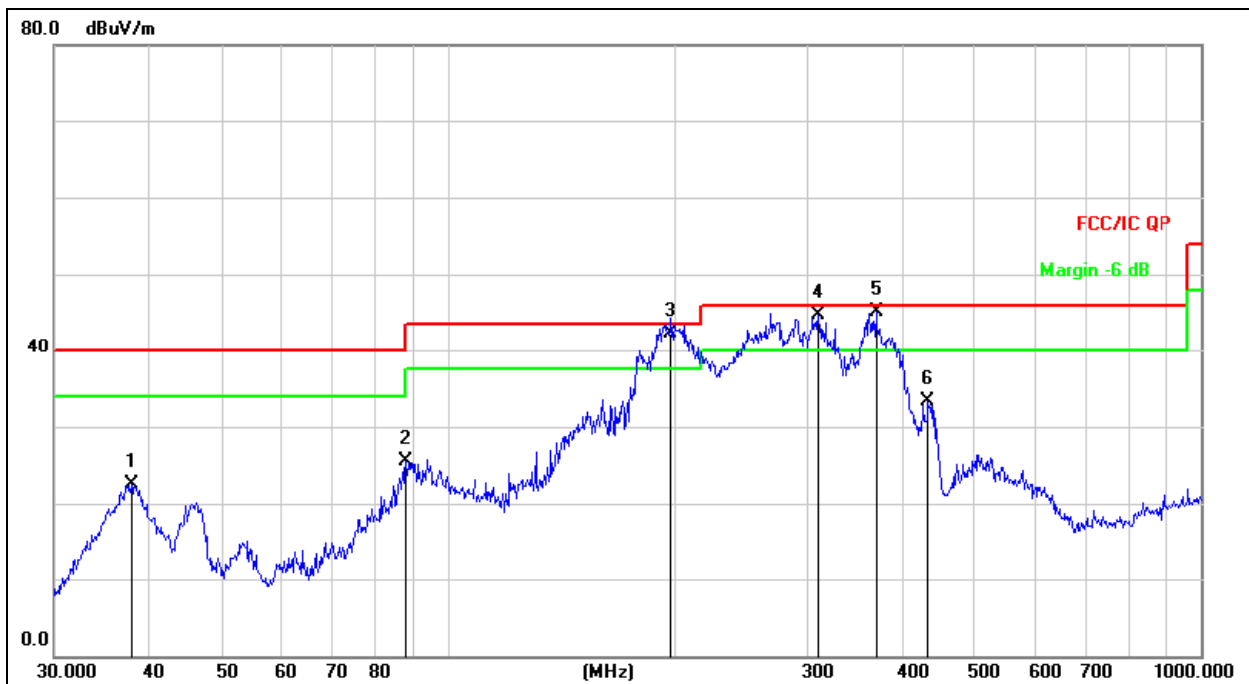


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.9450	37.98	-15.45	22.53	40.00	-17.47	QP
2		87.7248	43.36	-17.94	25.42	40.00	-14.58	QP
3	!	197.2001	58.82	-16.50	42.32	43.50	-1.18	QP
4	!	309.9977	58.18	-13.54	44.64	46.00	-1.36	QP
5	*	369.4047	57.38	-12.19	45.19	46.00	-0.81	QP
6		432.5457	44.10	-10.84	33.26	46.00	-12.74	QP



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V For Adapter(adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

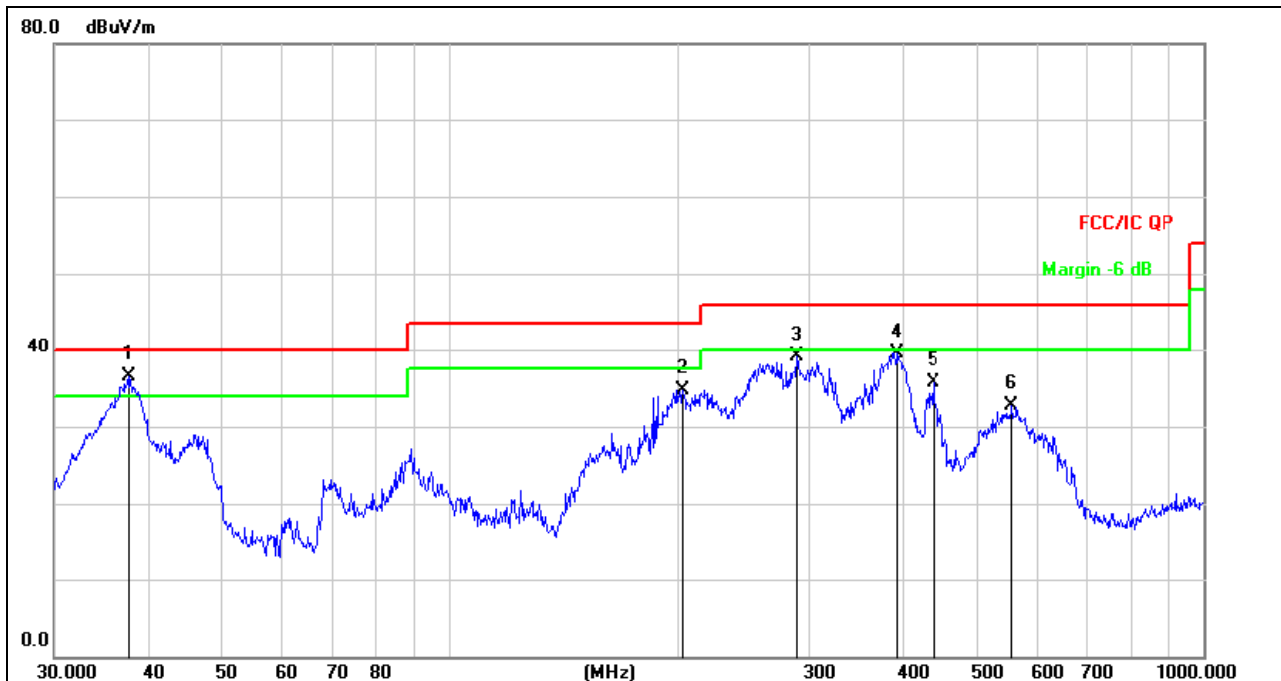


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	37.5479	52.03	-15.59	36.44	40.00	-3.56	QP
2		203.5228	51.02	-16.26	34.76	43.50	-8.74	QP
3		289.0021	53.19	-14.07	39.12	46.00	-6.88	QP
4		392.0951	51.64	-12.06	39.58	46.00	-6.42	QP
5		437.1199	46.43	-10.78	35.65	46.00	-10.35	QP
6		556.7744	40.69	-8.05	32.64	46.00	-13.36	QP



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 9V For Adapter(adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

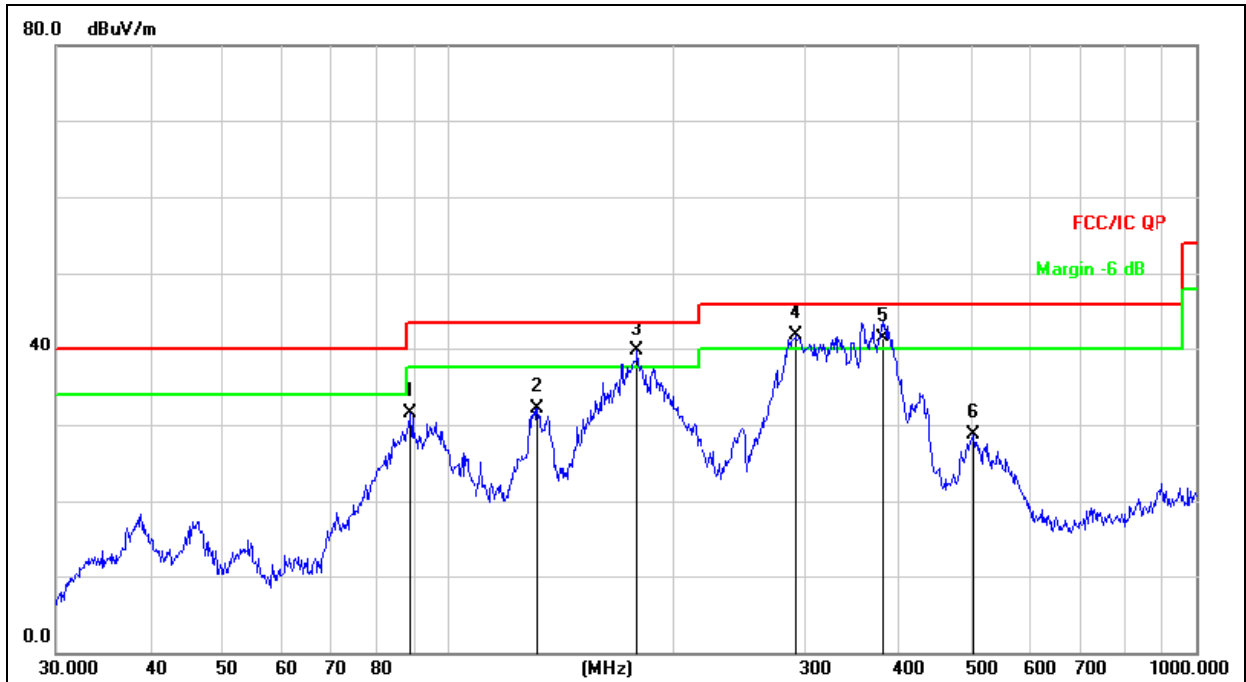


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		88.9639	49.18	-17.67	31.51	43.50	-11.99	QP
2		131.7577	51.18	-19.13	32.05	43.50	-11.45	QP
3	*	178.7584	57.79	-18.14	39.65	43.50	-3.85	QP
4	!	292.0583	55.79	-13.90	41.89	46.00	-4.11	QP
5	!	379.9141	53.71	-12.15	41.56	46.00	-4.44	QP
6		504.7062	37.94	-9.23	28.71	46.00	-17.29	QP



EUT:	10W fast charge wireless charger	Model Name :	JUPW1101
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 9V For Adapter(adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

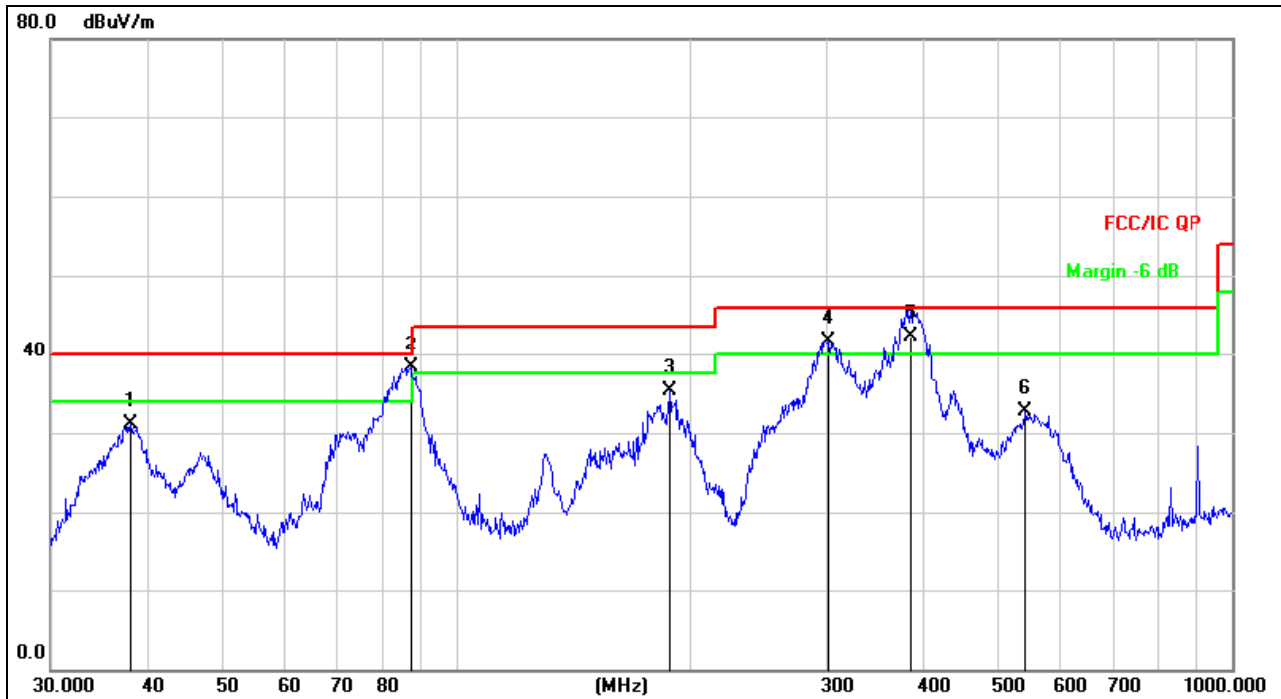


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.9450	46.54	-15.45	31.09	40.00	-8.91	QP
2	*	87.1117	56.38	-18.07	38.31	40.00	-1.69	QP
3		187.7530	52.66	-17.30	35.36	43.50	-8.14	QP
4	!	301.4224	55.22	-13.46	41.76	46.00	-4.24	QP
5	!	383.6031	54.33	-12.12	42.21	46.00	-3.79	QP
6		541.3725	41.41	-8.61	32.80	46.00	-13.20	QP

7. EUT TEST PHOTOS

Conducted Measurement Photos

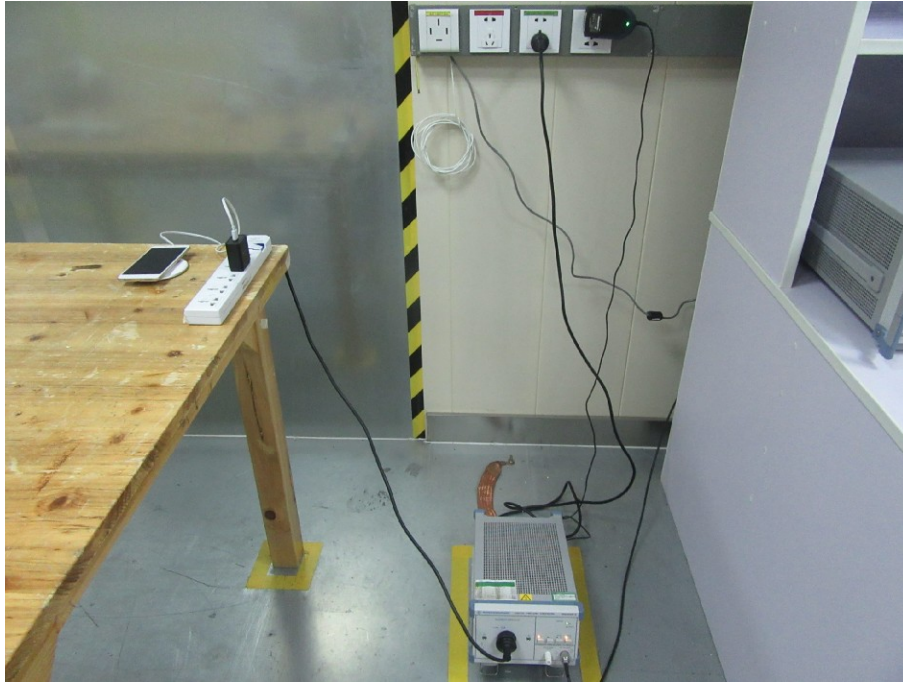

Radiated Measurement Photos
9KHz-30MHz



30MHz-1GHz



8. EUT PHOTOS



***** END OF REPORT *****