

TEST REPORT

of

FCC Part 15 Subpart C

New Application; Class I PC; Class II PC

Product : ScreenCast
Brand: J5create
Model: JVAW56; JVAW54
Model Difference: For market segmentation
FCC ID: 2AD37JVAW56
FCC Rule Part: §15.247, Cat: DTS
Applicant: Kaijet Technology International Corporation
Address: 8F., No. 109, Zhongcheng Road, Tucheng Dist.,
New Taipei City, Taiwan R.O.C

Test Performed by:
International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4;

*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-20LR074FC DTS

Issue Date : 2020/04/16



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report **MUST** not be used to claim product endorsement by TAF or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

VERIFICATION OF COMPLIANCE

Applicant: Kaijet Technology International Corporation
Product Description: ScreenCast
Brand Name: J5create
Model No.: JVAW56; JVAW54
Model Difference: For market segmentation
FCC ID: 2AD37JVAW56
Date of test: 2020/03/19 ~ 2020/04/15
Date of EUT Received: 2020/03/19

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:	<u>Bill Huang</u>	Date:	<u>2020/04/16</u>
	<i>Bill Huang / Senior Engineer</i>		
Prepared By:	<u>Gigi yeh</u>	Date:	<u>2020/04/16</u>
	<i>Gigi Yeh / Senior Engineer</i>		
Approved By:	<u>Jerry Liu</u>	Date:	<u>2020/04/16</u>
	<i>Jerry Liu / Technical Manager</i>		

Version

Version No.	Date	Description
00	2020/04/16	Initial creation of document

Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	$\leq 30\text{MHz}$: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

Table of Contents

1	General Information	7
1.1	Related Submittal(s) / Grant (s)	9
1.2	Test Methodology	9
1.3	Test Facility	9
1.4	Special Accessories	9
1.5	Equipment Modifications	9
2	System Test Configuration	10
2.1	EUT Configuration	10
2.2	EUT Exercise	10
2.3	Test Procedure	10
2.4	Configuration of Tested System	11
3	Summary of Test Results	12
4	Description of Test Modes	12
5	Conduced Emission Test	13
5.1	Standard Applicable:	13
5.2	Measurement Equipment Used:	13
5.3	EUT Setup:	13
5.4	Measurement Procedure:	14
5.5	Measurement Result:	14
6	Peak Output Power	17
6.1	Standard Applicable:	17
6.2	Measurement Equipment Used:	18
6.3	Test Set-up:	18
6.4	Measurement Procedure:	18
6.5	Measurement Result:	19
7	6dB Bandwidth	20
7.1	Standard Applicable:	20
7.2	Measurement Equipment Used:	20
7.3	Test Set-up:	20
7.4	Measurement Procedure:	20
7.5	Measurement Result:	21
8	Spurious Radiated Emission Test	28
8.1	Standard Applicable	28
8.2	Measurement Equipment Used:	28
8.3	Test SET-UP:	29
8.4	Measurement Procedure:	30
8.5	Field Strength Calculation	31
8.6	Measurement Result:	31
9.	100kHz Bandwidth of Band Edges Measurement	56
9.1	Standard Applicable:	56
9.2	Measurement Equipment Used:	56
9.3	Test SET-UP:	58
9.4	Measurement Procedure:	59
9.5	Field Strength Calculation:	59
9.6	Measurement Result:	59
10.	Peak Power Spectral Density	76
10.1	Standard Applicable:	76
10.2	Measurement Equipment Used:	76
10.3	Test Set-up:	76
10.4	Measurement Procedure:	76

10.5	Measurement Result:	77
11.	Antenna Requirement	84
11.1	Standard Applicable:	84
11.2	Antenna Connected Construction:	84

1 General Information

General:

Product Name	ScreenCast	
Brand Name	J5create	
Model Name	JVAW56; JVAW54	
Model Difference	For market segmentation	
Power Tolerance:	+/- 1 dB	
Power Supply	5Vdc from adapter	
	Adapter:	1. Model: A1385

WLAN

Wi-Fi	Frequency Range (MHz)	Channels	Peak / Average Rated Power	Modulation Technology
802.11b	2412 – 2462(DTS)	11	19.70dBm (PK)	OFDM
802.11g	2412 – 2462(DTS)	11	23.62dBm (PK)	
802.11n (2.4G)	HT20 2412 – 2462(DTS)	11	22.94dBm (PK)	
802.11n (2.4G)	HT40 2422 – 2452(DTS)	7	22.95dBm (PK)	
Modulation type		CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM		
Antenna Designation		Fixed PIFA Antenna WiFi 2.4G Antenna : -0.8 dBi According to KDB662911 D01 SM-MIMO signals could be considered uncorrelated for purposes of directional gain computation. Directional gain = G_{ANT}		

The EUT is compliance with IEEE 802.11 b/g/n Standard.

This report applies for 2.4GHz Wifi

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

S/N	WN1A2005000001
Test SoftWare Version	0.0003.07.20190211
RF power setting in TEST SoftWare	2.4GHz b:36 g:45 n20:41 n40:41
Power Setting	2.4GHz b:36 g:45 n20:41 n40:41

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AD37JVAW56** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 15.247 Meas Guidance v0.5r02

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of International Standards Laboratory Corp. <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents . FCC Registration Number is: 487532; Designation Number is: TW0997.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013. Con-ducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m/1.5m (Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maxi-mum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)

Radiated Emission



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	HP	440	N/A	N/A	N/A

AC Conducted Emission



Table 1-1 Support Equipment Used in Tested System

Item	Equipment	Mrf/Brand	Model name	Series No	Data Cable	Power Cable
1	Adapter	Apple	A1385	N/A	N/A	N/A
2	monitor	Acer	P243W A	N/A	N/A	N/A

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§ 15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)	Peak Output Power/ EIRP	Compliant
§15.247(a)(2)	6dB Power Bandwidth	Compliant
§ 15.247(d)	100 kHz Bandwidth Of Frequency Band Edges	Compliant
§ 15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§ 15.203	Antenna Requirement	Compliant

4 Description of Test Modes

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

Wifi:

802.11 b mode: Channel low (2412MHz) 、 mid (2437MHz) 、 high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) 、 mid (2437MHz) 、 high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n _20MHz: Channel low (2412MHz) 、 mid (2437MHz) 、 high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

5 Conducted Emission Test

5.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

Conducted Emission Test Site					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal Due.
Chamber05 -1 Cable	WOKEN	CFD 300-NL	Chamber05 -1 Cable	08/29/2019	08/29/2020
EMI Receiver 13	ROHDE & SCHWARZ	ESCI	101015	07/25/2019	07/25/2020
LISN 20	ROHDE & SCHWARZ	ENV216	101477	11/06/2019	11/06/2020
LISN 22	ROHDE & SCHWARZ	ENV216	101478	08/13/2019	08/13/2020
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10: 2014.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.
4. Both 120V & 240V have been verified, and 120V/60Hz was defined as the worst-case and record in the report.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode: Normal Operation (Worst data) Adaptor mode: A1385




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Conducted Emission Measurement

operator: Mark
Temperature: 26 °C
Humidity: 60 %

Date: 2019/12/6

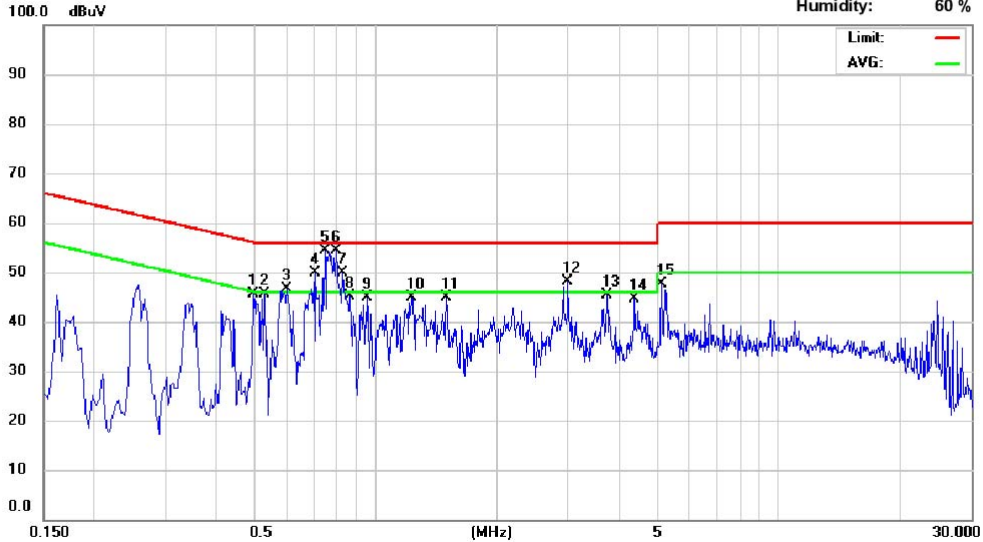

Site: Conduction 03

Phase: L1

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.498	32.12	20.56	9.72	41.84	56.03	-14.19	30.28	46.03	-15.75
2	0.530	31.88	13.60	9.72	41.60	56.00	-14.40	23.32	46.00	-22.68
3	0.602	35.07	24.41	9.73	44.80	56.00	-11.20	34.14	46.00	-11.86
4	0.710	32.88	21.30	9.74	42.62	56.00	-13.38	31.04	46.00	-14.96
5	0.750	40.10	28.29	9.74	49.84	56.00	-6.16	38.03	46.00	-7.97
6	0.798	36.57	24.32	9.74	46.31	56.00	-9.69	34.06	46.00	-11.94
7	0.830	34.88	24.37	9.74	44.62	56.00	-11.38	34.11	46.00	-11.89
8	0.862	30.48	19.25	9.74	40.22	56.00	-15.78	28.99	46.00	-17.01
9	0.954	29.92	16.51	9.74	39.66	56.00	-16.34	26.25	46.00	-19.75
10	1.226	27.55	13.59	9.75	37.30	56.00	-18.70	23.34	46.00	-22.66
11	1.502	27.39	17.19	9.77	37.16	56.00	-18.84	26.96	46.00	-19.04
12	2.998	37.18	26.30	9.81	46.99	56.00	-9.01	36.11	46.00	-9.89
13	3.746	29.55	20.11	9.83	39.38	56.00	-16.62	29.94	46.00	-16.06
14	4.386	29.60	21.91	9.85	39.45	56.00	-16.55	31.76	46.00	-14.24
15	5.122	35.38	28.47	9.87	45.25	60.00	-14.75	38.34	50.00	-11.66




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Conducted Emission Measurement

Date: 2019/12/6

operator: Mark
Temperature: 26 °C
Humidity: 60 %

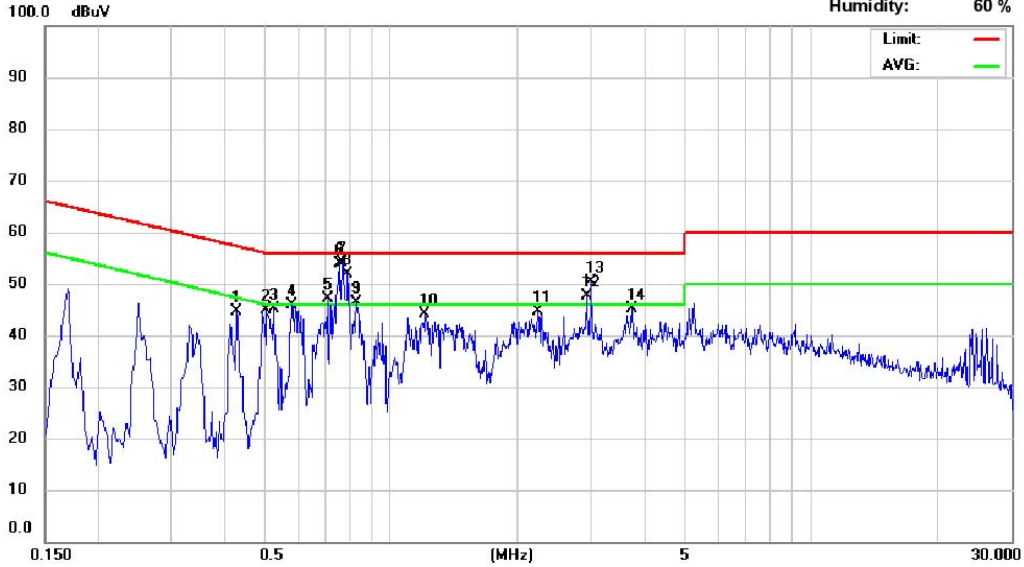

Site: Conduction 03

Phase: N

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.430	29.35	17.92	9.70	39.05	57.25	-18.20	27.62	47.25	-19.63
2	0.506	32.09	22.27	9.70	41.79	56.00	-14.21	31.97	46.00	-14.03
3	0.526	29.25	10.52	9.70	38.95	56.00	-17.05	20.22	46.00	-25.78
4	0.582	31.90	21.20	9.72	41.62	56.00	-14.38	30.92	46.00	-15.08
5	0.706	29.23	18.37	9.72	38.95	56.00	-17.05	28.09	46.00	-17.91
6	0.754	41.43	29.48	9.72	51.15	56.00	-4.85	39.20	46.00	-6.80
7	0.766	40.69	29.30	9.72	50.41	56.00	-5.59	39.02	46.00	-6.98
8	0.790	37.98	23.85	9.72	47.70	56.00	-8.30	33.57	46.00	-12.43
9	0.830	31.45	23.05	9.72	41.17	56.00	-14.83	32.77	46.00	-13.23
10	1.206	28.23	17.94	9.74	37.97	56.00	-18.03	27.68	46.00	-18.32
11	2.238	27.22	19.43	9.77	36.99	56.00	-19.01	29.20	46.00	-16.80
12	2.922	32.89	24.77	9.80	42.69	56.00	-13.31	34.57	46.00	-11.43
13	3.002	37.60	25.58	9.80	47.40	56.00	-8.60	35.38	46.00	-10.62
14	3.754	31.11	22.33	9.83	40.94	56.00	-15.06	32.16	46.00	-13.84

6 Peak Output Power

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

6.2 Measurement Equipment Used:

Location Conducted	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conducted	Power Meter	Anritsu	ML2495A	1116010	10/04/2019	10/04/2020
Conducted	Power Sensor	Anritsu	MA2411B	34NKF50	10/04/2019	10/04/2020
Conducted	Power Sensor	DARE	RPR3006W	13I00030SNO33	01/03/2020	01/03/2021
Conducted	Power Sensor	DARE	RPR3006W	13I00030SNO34	01/09/2020	01/09/2021
Conducted	Power Sensor	DARE	RPR3006W	14I00889SNO35	06/27/2019	06/27/2020
Conducted	Power Sensor	DARE	RPR3006W	14I00889SNO36	06/27/2019	06/27/2020
Conducted	Temperature Chamber	KSON	THS-B4H100	2287	03/11/2020	03/11/2021
Conducted	DC Power supply	ABM	8185D	N/A	01/03/2020	01/03/2021
Conducted	AC Power supply	EXTECH	CFC105W	NA	N/A	N/A
Conducted	Spectrum analyzer	Keysight	N9010A	MY56070257	10/05/2019	10/05/2020
Conducted	Spectrum analyzer	R&S	FSP40	100116	01/10/2020	01/10/2021
Conducted	Test Software	DARE	Radiation Ver:2013.1.23	NA	NA	NA
Conducted	Test Software	R&S	CMUGO Ver:2.0.0	N/A	N/A	N/A
Conducted	Radio Communication Analyzer	R&S	CMU200	111968	11/29/2019	11/29/2020
Conducted	Radio Communication Analyzer	R&S	CMW500	1201.002K50108 793-JG	10/11/2019	10/11/2020
Conducted	BT Simulator	Agilent	N4010A	MY48100200	NA	NA
Conducted	GPS Simulator	Welnavigate	GS-50	701523	NA	NA

6.3 Test Set-up:

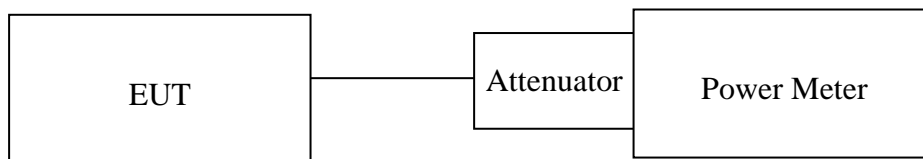

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

Freq. (MHz)	Output Power (dBm)				Duty Factor (dB)	Total Output Power (dBm)	Output Power Limit (dBm)
	Chain 0	Chain 1	Chain 2	Chain 3			
2412	19.7				0.00	19.70	30.00
2437	18.66				0.00	18.66	30.00
2462	17.53				0.00	17.53	30.00
2412	23.62				0.28	23.90	30.00
2437	23.55				0.28	23.83	30.00
2462	23.2				0.28	23.48	30.00
2412	22.17				0.23	22.40	30.00
2437	22.94				0.23	23.17	30.00
2462	21.78				0.23	22.01	30.00
2422	22.45				0.37	22.82	30.00
2437	22.95				0.37	23.32	30.00
2452	21.5				0.37	21.87	30.00

7 6dB Bandwidth


7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

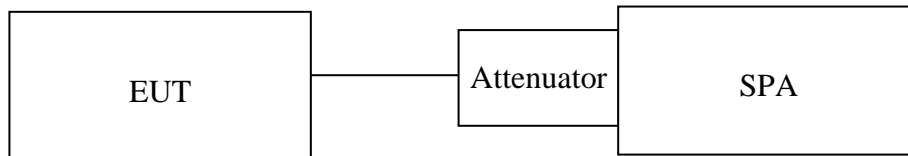

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = 3*RBW, Span= cover the complete power envelope of the signal of the UUT Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.


7.5 Measurement Result:

Band	Frequency (MHz)	6dB Bandwidth (MHz)	6dB BW Limit (kHz)
802.11b	2412	10.14	> 500
	2437	10.14	> 500
	2462	10.14	> 500
802.11g	2412	16.55	> 500
	2437	16.54	> 500
	2462	16.55	> 500
802.11n HT20	2412	17.72	> 500
	2437	17.75	> 500
	2462	17.69	> 500
802.11n HT40	2422	36.48	> 500
	2437	36.47	> 500
	2452	36.48	> 500


Note: Refer to next page for plots.

802.11b


6dB Band Width Test Data CH-Low

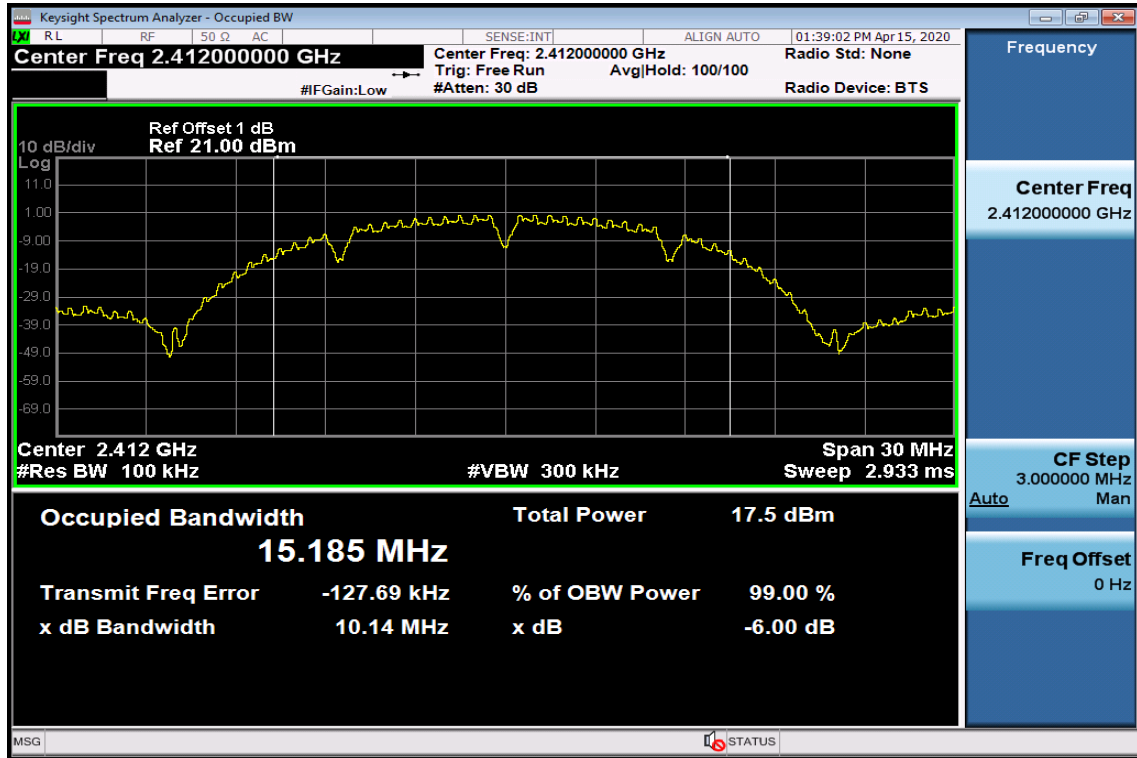

6dB Band Width Test Data CH-Mid

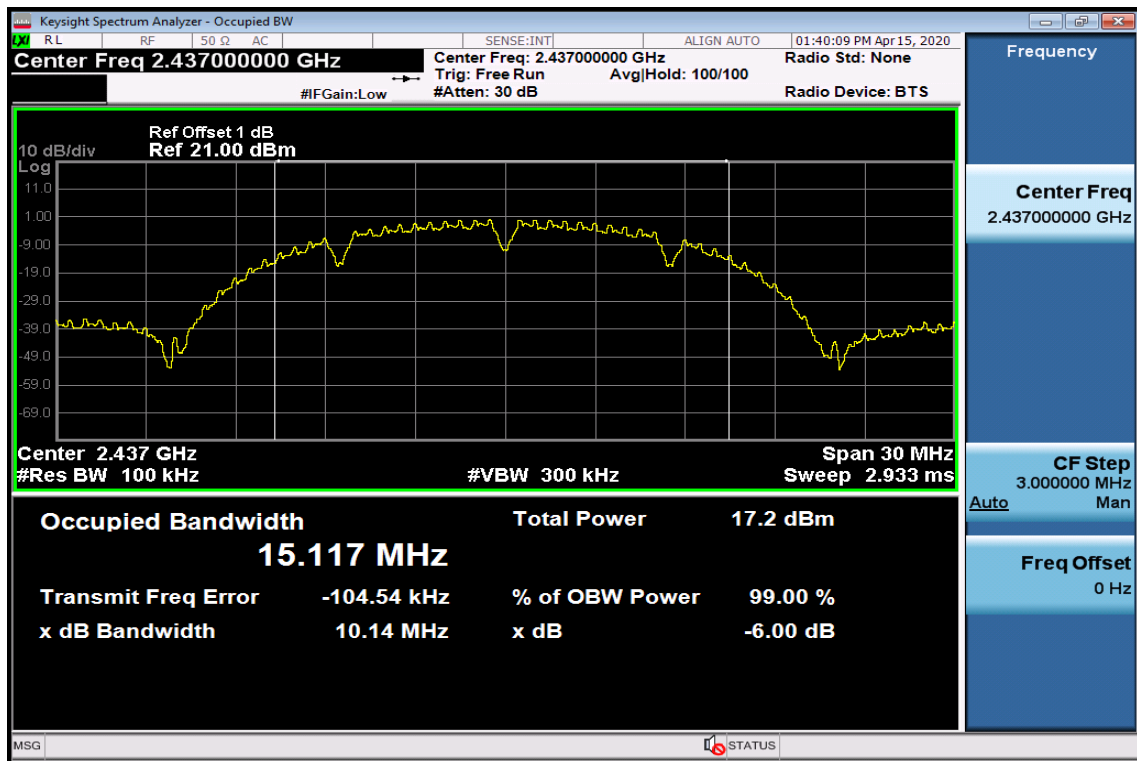


6dB Band Width Test Data CH-High

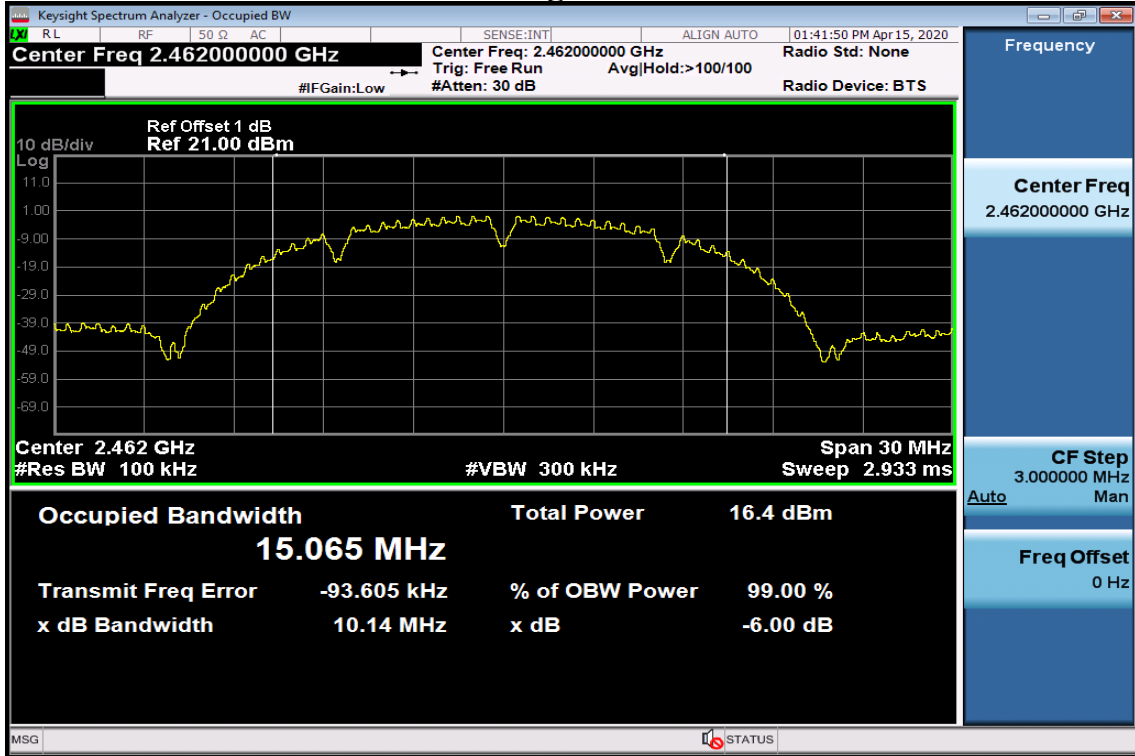


802.11g


6dB Band Width Test Data CH-Low

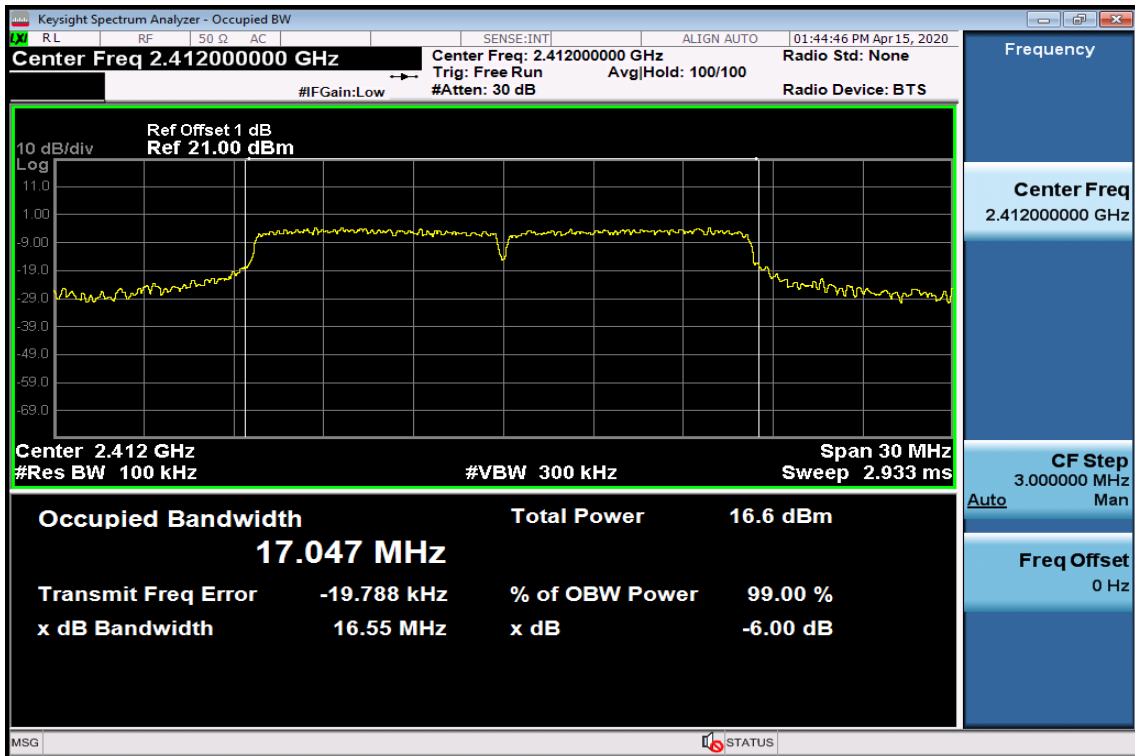

6dB Band Width Test Data CH-Mid

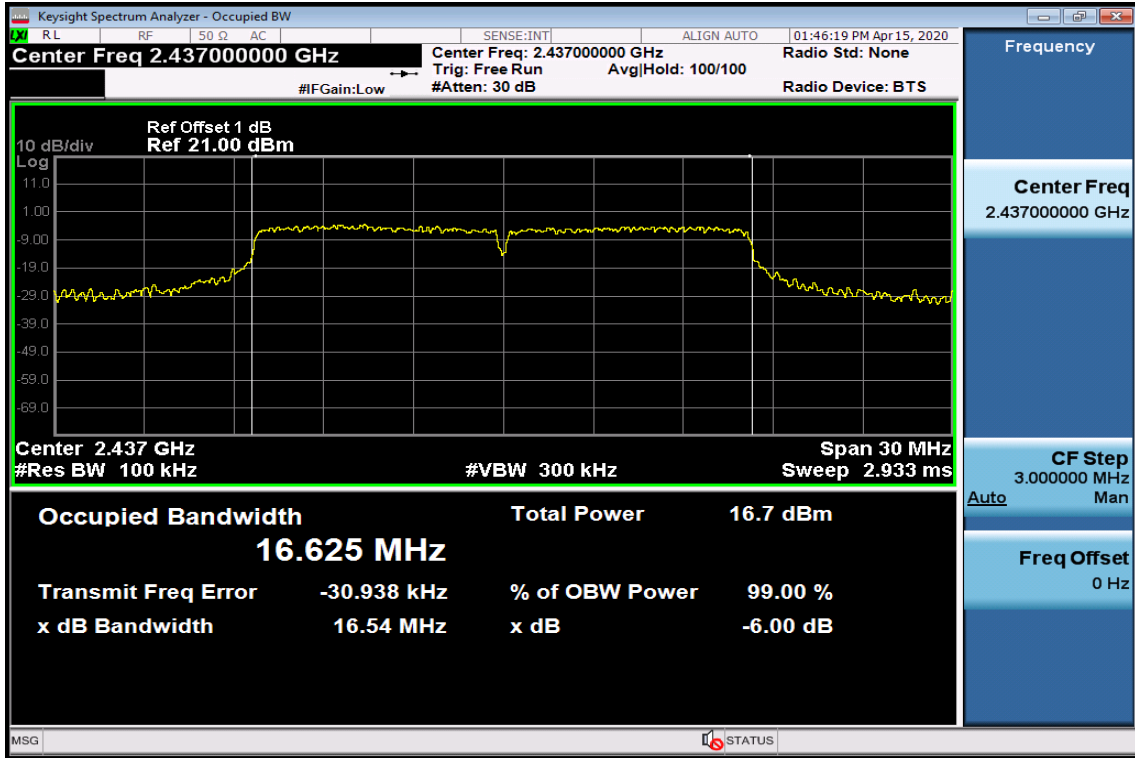


6dB Band Width Test Data CH-High

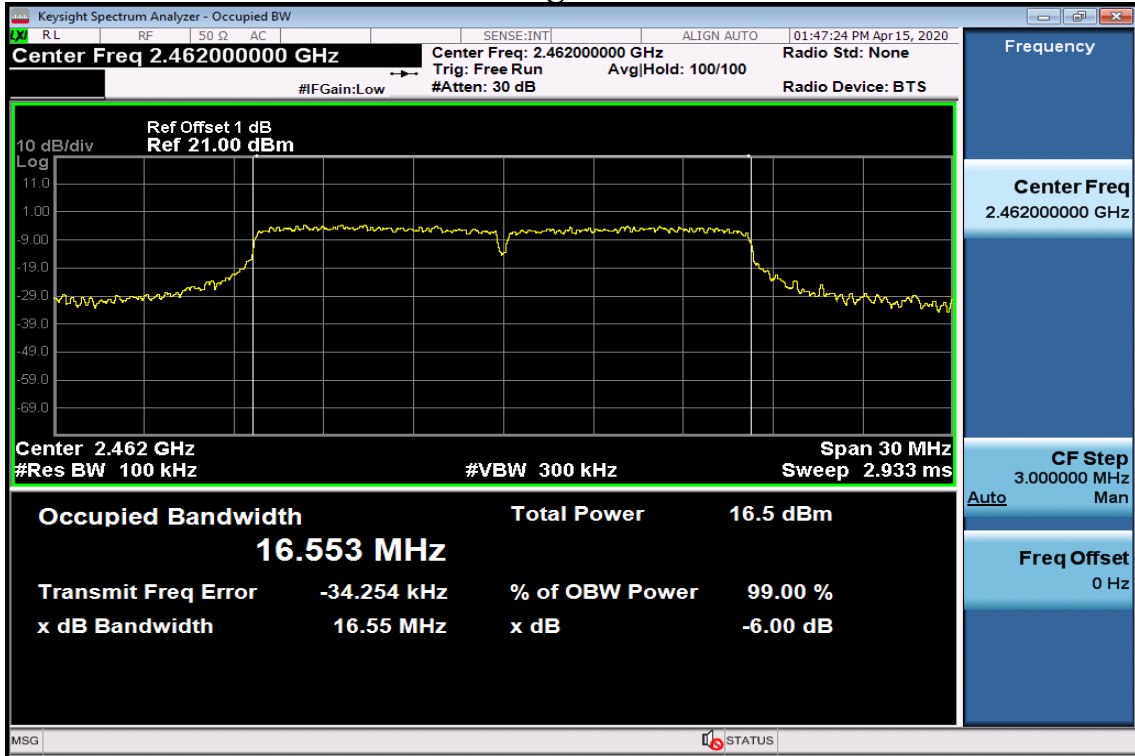


802.11n_20M


6dB Band Width Test Data CH-Low

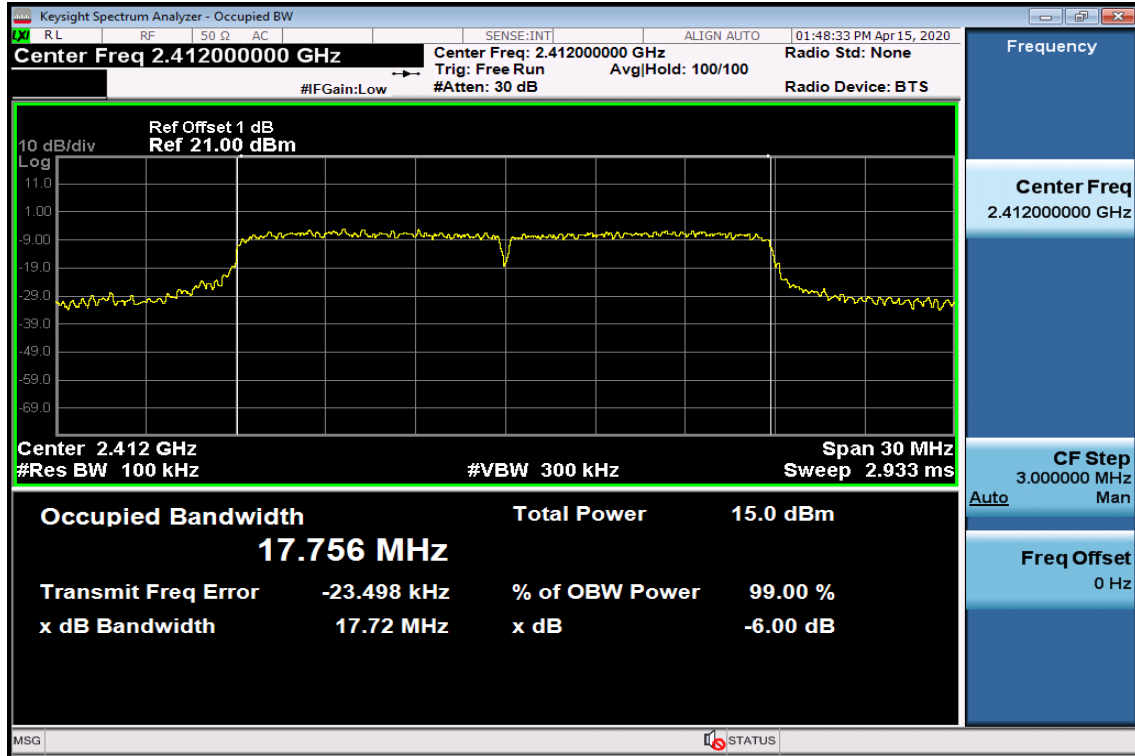

6dB Band Width Test Data CH-Mid

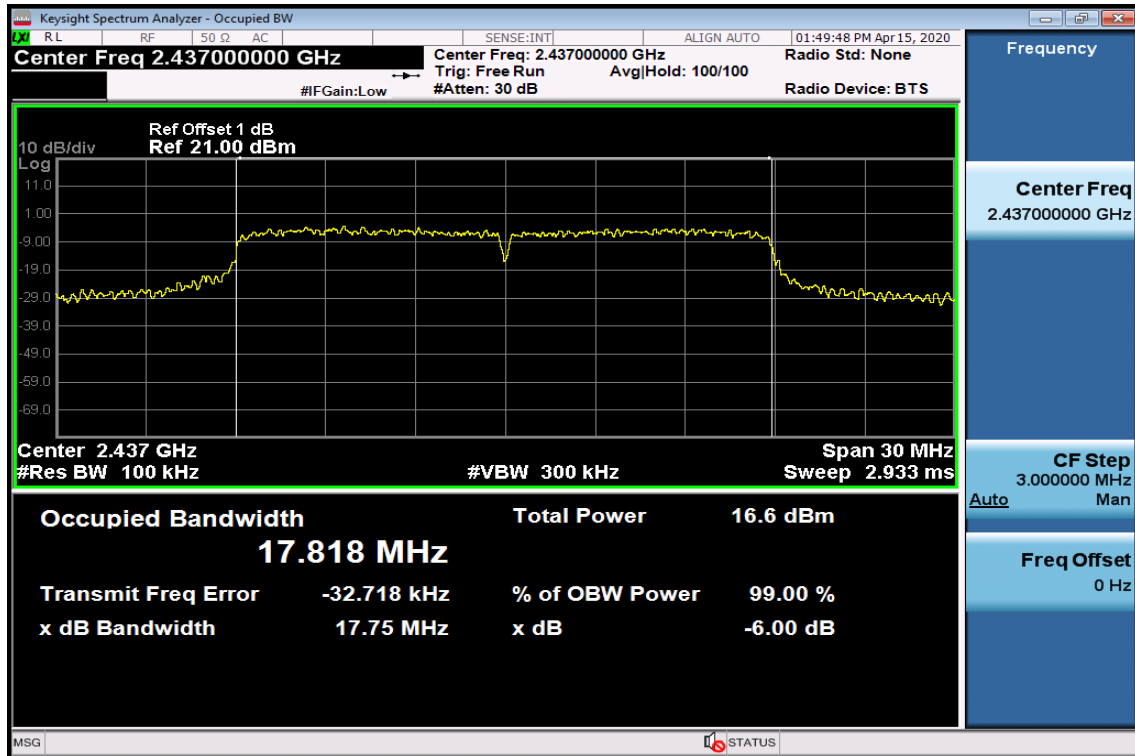


6dB Band Width Test Data CH-High

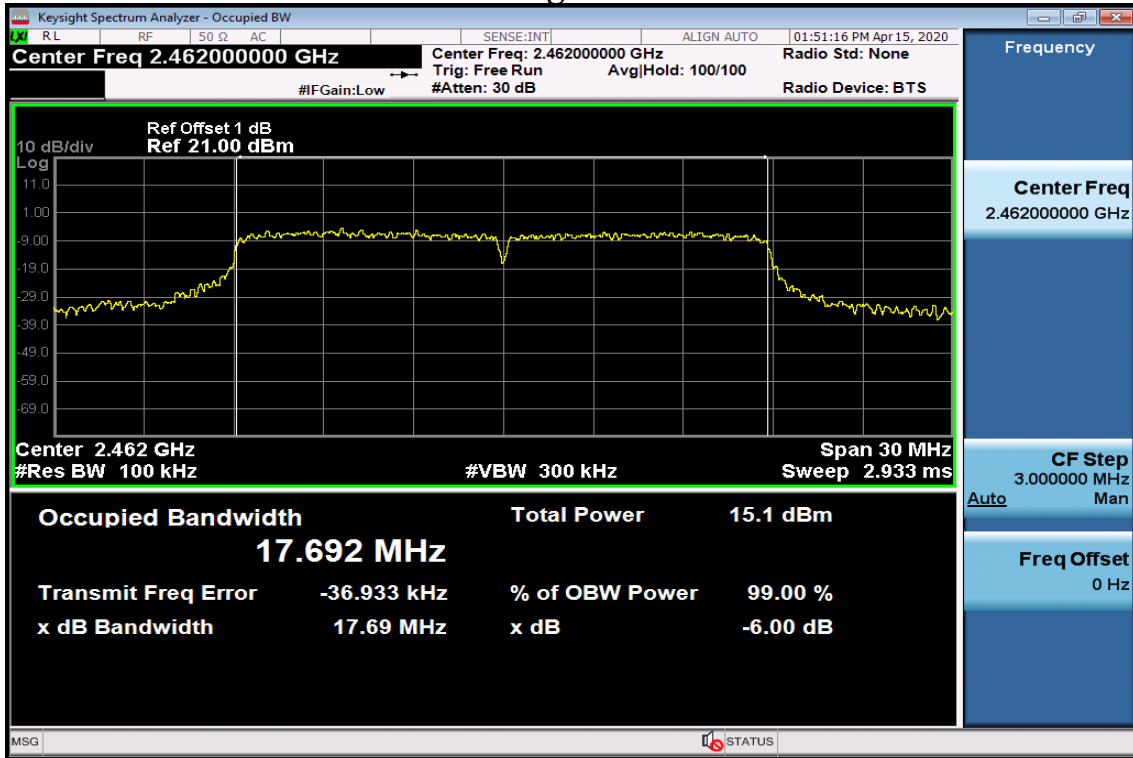


802.11n_40M


6dB Band Width Test Data CH-Low

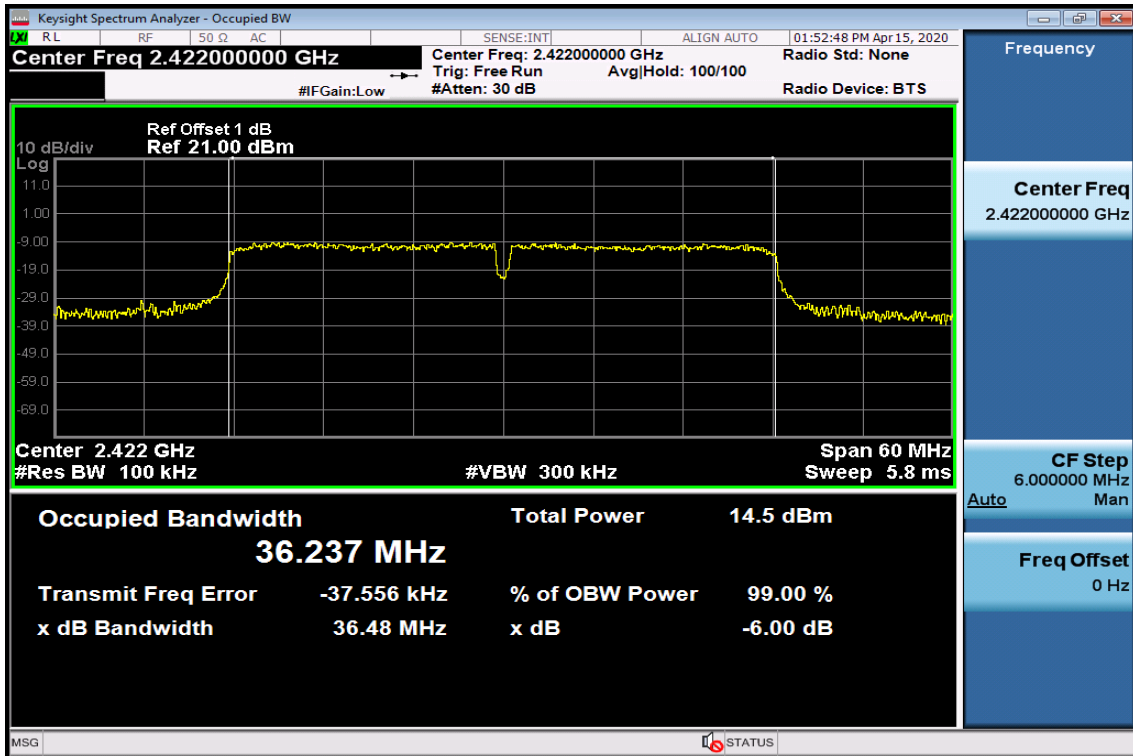

6dB Band Width Test Data CH-Mid

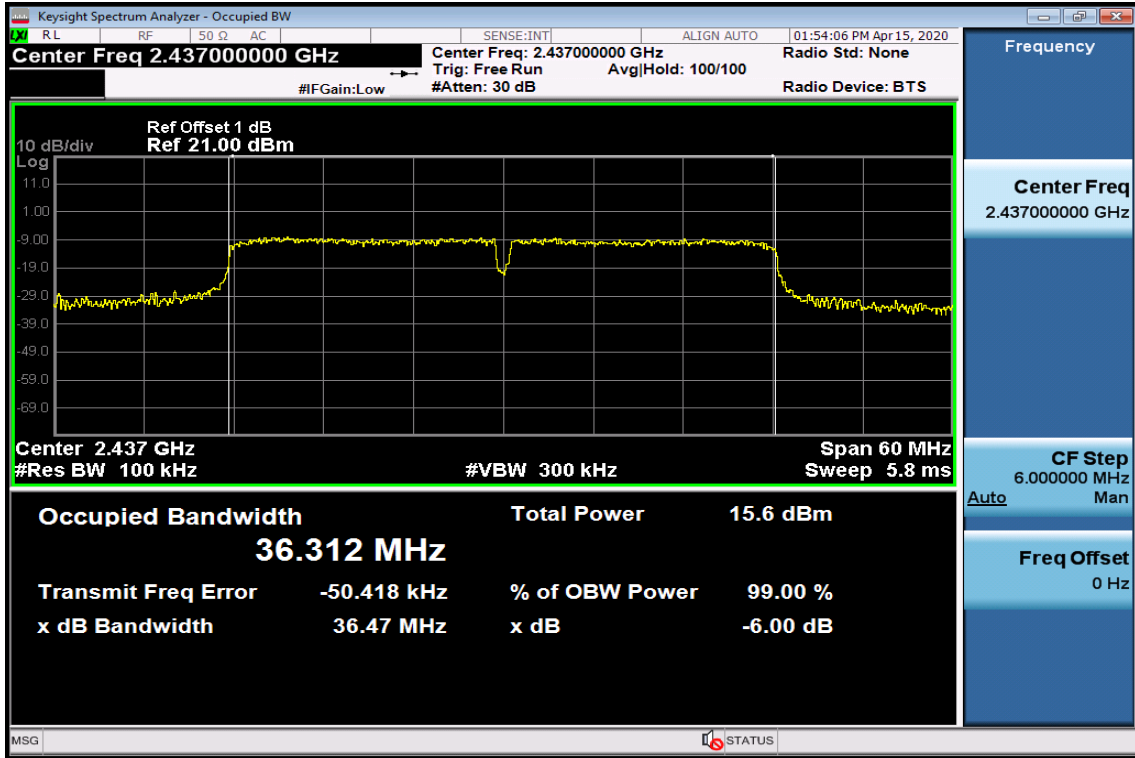

6dB Band Width Test Data CH-High

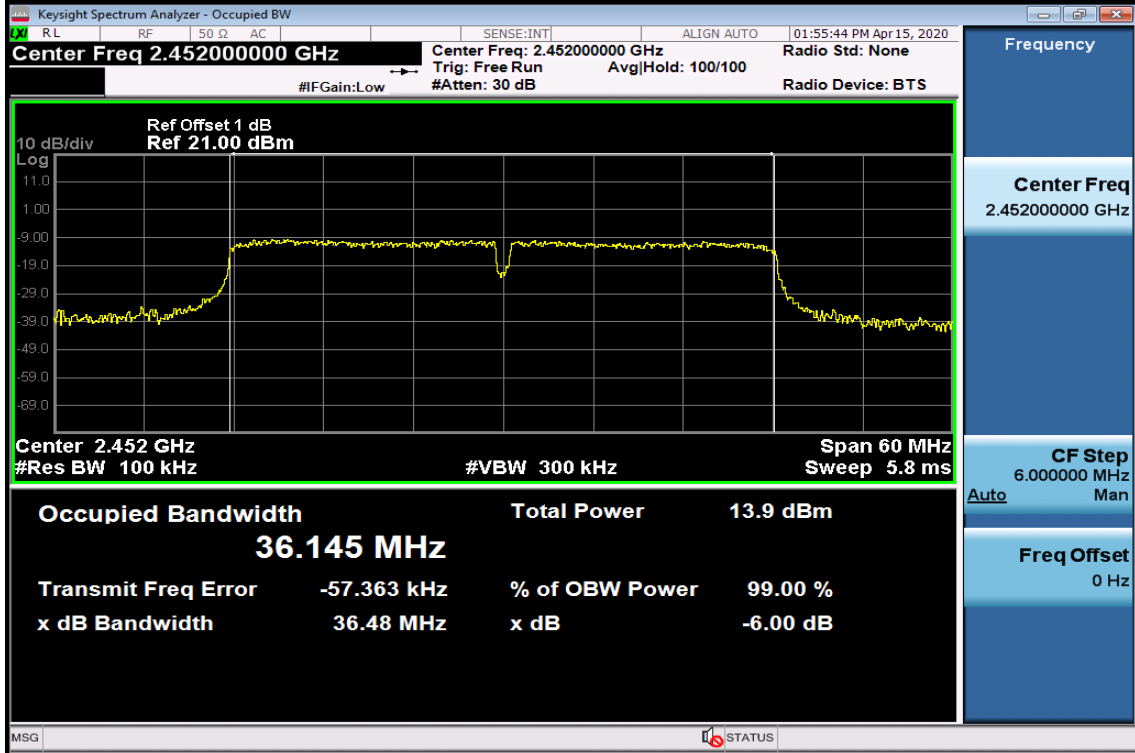

8 Spurious Radiated Emission Test

8.1 Standard Applicable

According to §15.247(d), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.


8.2.2 Radiated emission:

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Chamber 19	EMI Receiver	R&S	ESR3	102461	08/08/2018	08/08/2020
Chamber 19	Loop Antenna	EM	EM-6879	271	05/31/2019	05/31/2020
Chamber 19	Bilog Antenna (30MHz-1GHz)	Schwarzbeck	VULB9168 w 5dB Att.	736	02/11/2020	02/11/2021
Chamber 19	Horn antenna (1GHz-18GHz)	Schwarzbeck	9120D	9120D-1627	06/17/2019	06/17/2020
Chamber 19	Horn antenna (18GHz-26GHz)	Com-power	AH-826	081001	11/25/2019	11/25/2020
Chamber 19	Horn antenna (26GHz-40GHz)	Com-power	AH-640	100A	03/13/2020	03/13/2021
Chamber 19	Preamplifier (9kHz-1GHz)	HP	8447F	3113A06362	01/06/2020	01/06/2021
Chamber 19	Preamplifier (1GHz-26GHz)	Agilent	8449B	3008A02471	10/05/2019	10/05/2020
Chamber 19	Preamplifier (26GHz-40GHz)	MITEQ	JS4-26004000-27-5A	818471	05/06/2019	05/06/2020
Chamber 19	RF Cable (9kHz-18GHz)	HUBER SU-HNER	Sucoflex 104A	MY1397/4A	01/10/2020	01/10/2021
Chamber 19	RF Cable (18GHz-40GHz)	HUBER SU-HNER	Sucoflex 102	27963/2&374 21/2	11/21/2019	11/21/2020
Chamber 19	Signal Generator	Anritsu	MG3692A	20311	01/06/2020	01/06/2021
Chamber 19	Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


8.3 Test SET-UP:

The test item only performed radiated mode

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

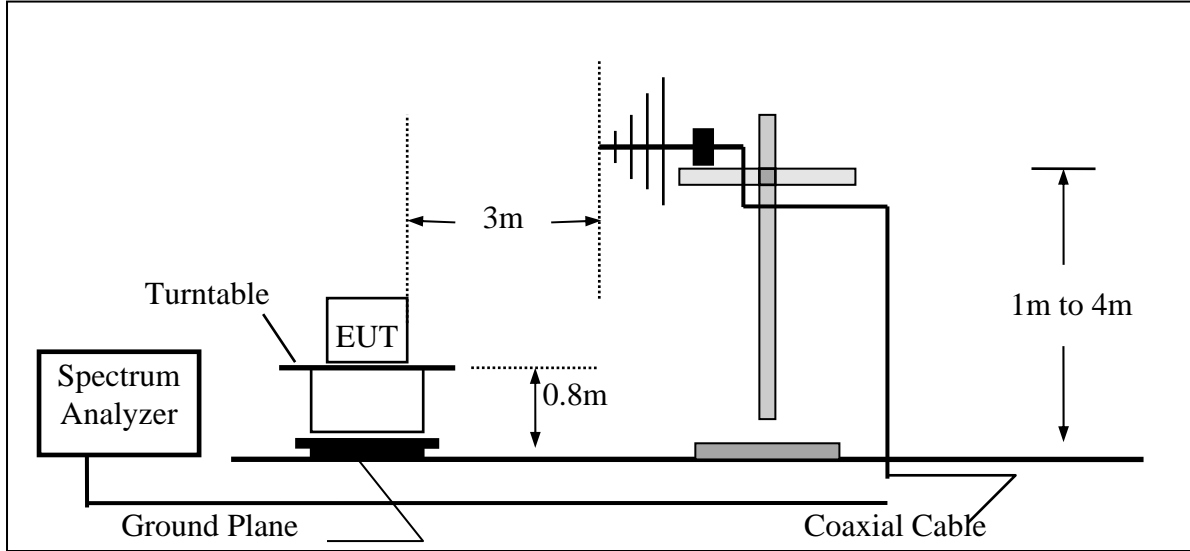

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

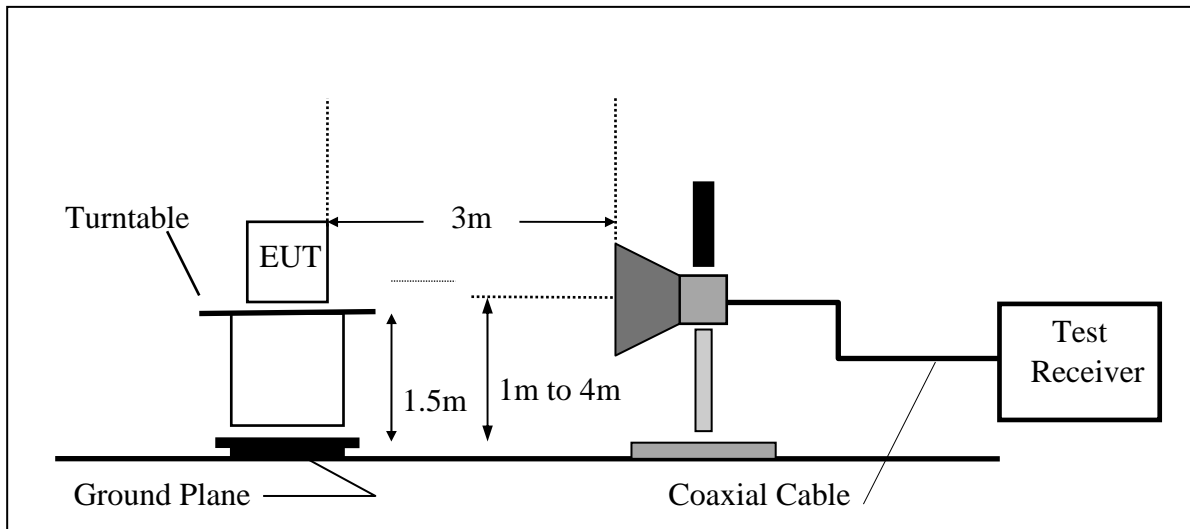

8.4 Measurement Procedure:

1. According 414788 section 2, Either OATS or chamber for radiated emission below 30MHz, the test was done at 966 chamber, the test site was evaluated with OATS and the Chamber has test signals level greater than OATS's.
2. The EUT was placed on a turn table which is 0.8m/1.5m above ground plane in 966 chamber.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Repeat above procedures until all frequency measured were complete.

Test receiver setting : Blew 1GHz
 Detector : Average(9kHz – 90kHz, 110kHz – 90kHz), Quasi-Peak
 Bandwidth : 200Hz, 120kHz
 Test spectrum setting : Above 1GHz
 Peak : RBW=1MHz, VBW=3MHz,Sweep=auto
 Average : RBW=1MHz, VBW set as the table below, Sweep=auto

Average Measurement Setting (VBW)

Mode	ON time (ms)	Total time (ms)	Duty Cycle	Duty Factor	1/Ton	VBW (kHz)
b	8.200	8.300	98.795%	0.00	0.122	0.01
g	1.338	1.427	93.726%	0.28	0.748	1
HT20	1.259	1.327	94.856%	0.23	0.794	1
HT40	0.632	0.688	91.864%	0.37	1.581	2

8.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	178.41	35.15	-6.06	29.09	43.50	-14.41	Peak	VERTICAL
2	266.68	35.83	-5.05	30.78	46.00	-15.22	Peak	VERTICAL
3	499.48	44.22	-0.71	43.51	46.00	-2.49	Peak	VERTICAL
4	516.94	39.95	-0.30	39.65	46.00	-6.35	Peak	VERTICAL
5	831.22	29.93	5.11	35.04	46.00	-10.96	Peak	VERTICAL
6	951.50	30.71	7.18	37.89	46.00	-8.11	Peak	VERTICAL
1	104.69	46.26	-9.36	36.90	43.50	-6.60	Peak	HORIZONTAL
2	141.55	44.59	-5.41	39.18	43.50	-4.32	Peak	HORIZONTAL
3	178.41	40.03	-6.06	33.97	43.50	-9.53	Peak	HORIZONTAL
4	500.45	43.15	-0.68	42.47	46.00	-3.53	Peak	HORIZONTAL
5	518.88	44.56	-0.23	44.33	46.00	-1.67	Peak	HORIZONTAL
6	951.50	31.56	7.18	38.74	46.00	-7.26	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	104.69	37.97	-9.36	28.61	43.50	-14.89	Peak	VERTICAL
2	179.38	35.32	-6.15	29.17	43.50	-14.33	Peak	VERTICAL
3	308.39	33.73	-3.75	29.98	46.00	-16.02	Peak	VERTICAL
4	499.48	44.14	-0.71	43.43	46.00	-2.57	Peak	VERTICAL
5	518.88	44.21	-0.23	43.98	46.00	-2.02	Peak	VERTICAL
6	951.50	31.89	7.18	39.07	46.00	-6.93	Peak	VERTICAL
1	104.69	45.96	-9.36	36.60	43.50	-6.90	Peak	HORIZONTAL
2	141.55	43.98	-5.41	38.57	43.50	-4.93	Peak	HORIZONTAL
3	179.38	40.51	-6.15	34.36	43.50	-9.14	Peak	HORIZONTAL
4	438.37	36.81	-1.34	35.47	46.00	-10.53	Peak	HORIZONTAL
5	491.72	43.63	-0.85	42.78	46.00	-3.22	Peak	HORIZONTAL
6	518.88	41.03	-0.23	40.80	46.00	-5.20	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	103.72	37.56	-9.58	27.98	43.50	-15.52	Peak	VERTICAL
2	179.38	35.70	-6.15	29.55	43.50	-13.95	Peak	VERTICAL
3	304.51	33.79	-3.83	29.96	46.00	-16.04	Peak	VERTICAL
4	497.54	41.15	-0.75	40.40	46.00	-5.60	Peak	VERTICAL
5	515.00	40.97	-0.38	40.59	46.00	-5.41	Peak	VERTICAL
6	951.50	30.14	7.18	37.32	46.00	-8.68	Peak	VERTICAL
1	142.52	43.77	-5.36	38.41	43.50	-5.09	Peak	HORIZONTAL
2	177.44	40.42	-5.96	34.46	43.50	-9.04	Peak	HORIZONTAL
3	439.34	37.31	-1.32	35.99	46.00	-10.01	Peak	HORIZONTAL
4	497.54	42.39	-0.75	41.64	46.00	-4.36	Peak	HORIZONTAL
5	518.88	40.57	-0.23	40.34	46.00	-5.66	Peak	HORIZONTAL
6	951.50	30.57	7.18	37.75	46.00	-8.25	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	169.68	41.19	-5.08	36.11	43.50	-7.39	Peak	VERTICAL
2	245.34	41.19	-5.81	35.38	46.00	-10.62	Peak	VERTICAL
3	584.84	37.46	0.98	38.44	46.00	-7.56	Peak	VERTICAL
4	598.42	37.97	1.43	39.40	46.00	-6.60	Peak	VERTICAL
5	822.49	30.69	5.06	35.75	46.00	-10.25	Peak	VERTICAL
6	977.69	28.33	7.40	35.73	54.00	-18.27	Peak	VERTICAL
1	72.68	44.53	-8.36	36.17	40.00	-3.83	Peak	HORIZONTAL
2	179.38	44.36	-6.15	38.21	43.50	-5.29	Peak	HORIZONTAL
3	247.28	49.91	-5.76	44.15	46.00	-1.85	Peak	HORIZONTAL
4	323.91	37.24	-3.46	33.78	46.00	-12.22	Peak	HORIZONTAL
5	598.42	38.81	1.43	40.24	46.00	-5.76	Peak	HORIZONTAL
6	840.92	29.28	5.16	34.44	46.00	-11.56	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	52.31	33.57	-5.20	28.37	40.00	-11.63	Peak	VERTICAL
2	171.62	41.74	-5.22	36.52	43.50	-6.98	Peak	VERTICAL
3	246.31	40.59	-5.79	34.80	46.00	-11.20	Peak	VERTICAL
4	582.90	39.36	0.98	40.34	46.00	-5.66	Peak	VERTICAL
5	833.16	30.50	5.11	35.61	46.00	-10.39	Peak	VERTICAL
6	945.68	26.99	7.06	34.05	46.00	-11.95	Peak	VERTICAL
1	71.71	43.10	-8.14	34.96	40.00	-5.04	Peak	HORIZONTAL
2	179.38	44.18	-6.15	38.03	43.50	-5.47	Peak	HORIZONTAL
3	239.52	48.01	-5.98	42.03	46.00	-3.97	Peak	HORIZONTAL
4	584.84	36.99	0.98	37.97	46.00	-8.03	Peak	HORIZONTAL
5	842.86	29.68	5.16	34.84	46.00	-11.16	Peak	HORIZONTAL
6	988.36	28.93	7.42	36.35	54.00	-17.65	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	53.28	33.12	-5.26	27.86	40.00	-12.14	Peak	VERTICAL
2	168.71	38.15	-5.06	33.09	43.50	-10.41	Peak	VERTICAL
3	247.28	40.46	-5.76	34.70	46.00	-11.30	Peak	VERTICAL
4	584.84	39.15	0.98	40.13	46.00	-5.87	Peak	VERTICAL
5	598.42	40.49	1.43	41.92	46.00	-4.08	Peak	VERTICAL
6	833.16	33.82	5.11	38.93	46.00	-7.07	Peak	VERTICAL
1	179.38	44.07	-6.15	37.92	43.50	-5.58	Peak	HORIZONTAL
2	239.52	47.78	-5.98	41.80	46.00	-4.20	Peak	HORIZONTAL
3	304.51	36.83	-3.83	33.00	46.00	-13.00	Peak	HORIZONTAL
4	528.58	36.99	-0.04	36.95	46.00	-9.05	Peak	HORIZONTAL
5	582.90	37.93	0.98	38.91	46.00	-7.09	Peak	HORIZONTAL
6	833.16	29.99	5.11	35.10	46.00	-10.90	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	178.41	35.15	-6.06	29.09	43.50	-14.41	Peak	VERTICAL
2	266.68	35.83	-5.05	30.78	46.00	-15.22	Peak	VERTICAL
3	499.48	44.22	-0.71	43.51	46.00	-2.49	Peak	VERTICAL
4	516.94	39.95	-0.30	39.65	46.00	-6.35	Peak	VERTICAL
5	831.22	29.93	5.11	35.04	46.00	-10.96	Peak	VERTICAL
6	951.50	30.71	7.18	37.89	46.00	-8.11	Peak	VERTICAL
1	104.69	46.26	-9.36	36.90	43.50	-6.60	Peak	HORIZONTAL
2	141.55	44.59	-5.41	39.18	43.50	-4.32	Peak	HORIZONTAL
3	177.44	40.10	-5.96	34.14	43.50	-9.36	Peak	HORIZONTAL
4	439.34	37.07	-1.32	35.75	46.00	-10.25	Peak	HORIZONTAL
5	500.45	43.15	-0.68	42.47	46.00	-3.53	Peak	HORIZONTAL
6	518.88	44.56	-0.23	44.33	46.00	-1.67	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	104.69	37.97	-9.36	28.61	43.50	-14.89	Peak	VERTICAL
2	179.38	35.32	-6.15	29.17	43.50	-14.33	Peak	VERTICAL
3	308.39	33.73	-3.75	29.98	46.00	-16.02	Peak	VERTICAL
4	499.48	44.14	-0.71	43.43	46.00	-2.57	Peak	VERTICAL
5	518.88	44.21	-0.23	43.98	46.00	-2.02	Peak	VERTICAL
6	951.50	31.89	7.18	39.07	46.00	-6.93	Peak	VERTICAL
1	104.69	45.96	-9.36	36.60	43.50	-6.90	Peak	HORIZONTAL
2	141.55	43.98	-5.41	38.57	43.50	-4.93	Peak	HORIZONTAL
3	179.38	40.51	-6.15	34.36	43.50	-9.14	Peak	HORIZONTAL
4	491.72	43.63	-0.85	42.78	46.00	-3.22	Peak	HORIZONTAL
5	518.88	41.03	-0.23	40.80	46.00	-5.20	Peak	HORIZONTAL
6	951.50	31.70	7.18	38.88	46.00	-7.12	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	179.38	35.70	-6.15	29.55	43.50	-13.95	Peak	VERTICAL
2	304.51	33.79	-3.83	29.96	46.00	-16.04	Peak	VERTICAL
3	422.85	32.43	-1.70	30.73	46.00	-15.27	Peak	VERTICAL
4	497.54	41.15	-0.75	40.40	46.00	-5.60	Peak	VERTICAL
5	518.88	41.01	-0.23	40.78	46.00	-5.22	Peak	VERTICAL
6	951.50	30.14	7.18	37.32	46.00	-8.68	Peak	VERTICAL
1	142.52	43.77	-5.36	38.41	43.50	-5.09	Peak	HORIZONTAL
2	177.44	40.42	-5.96	34.46	43.50	-9.04	Peak	HORIZONTAL
3	439.34	37.31	-1.32	35.99	46.00	-10.01	Peak	HORIZONTAL
4	497.54	42.39	-0.75	41.64	46.00	-4.36	Peak	HORIZONTAL
5	518.88	40.57	-0.23	40.34	46.00	-5.66	Peak	HORIZONTAL
6	951.50	30.57	7.18	37.75	46.00	-8.25	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	169.68	41.19	-5.08	36.11	43.50	-7.39	Peak	VERTICAL
2	245.34	41.19	-5.81	35.38	46.00	-10.62	Peak	VERTICAL
3	584.84	37.46	0.98	38.44	46.00	-7.56	Peak	VERTICAL
4	598.42	37.97	1.43	39.40	46.00	-6.60	Peak	VERTICAL
5	822.49	30.69	5.06	35.75	46.00	-10.25	Peak	VERTICAL
6	977.69	28.33	7.40	35.73	54.00	-18.27	Peak	VERTICAL
1	72.68	44.53	-8.36	36.17	40.00	-3.83	Peak	HORIZONTAL
2	179.38	44.36	-6.15	38.21	43.50	-5.29	Peak	HORIZONTAL
3	247.28	49.91	-5.76	44.15	46.00	-1.85	Peak	HORIZONTAL
4	571.26	37.11	0.81	37.92	46.00	-8.08	Peak	HORIZONTAL
5	598.42	38.81	1.43	40.24	46.00	-5.76	Peak	HORIZONTAL
6	840.92	29.28	5.16	34.44	46.00	-11.56	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	52.31	33.57	-5.20	28.37	40.00	-11.63	Peak	VERTICAL
2	171.62	41.74	-5.22	36.52	43.50	-6.98	Peak	VERTICAL
3	246.31	40.59	-5.79	34.80	46.00	-11.20	Peak	VERTICAL
4	582.90	39.36	0.98	40.34	46.00	-5.66	Peak	VERTICAL
5	833.16	30.50	5.11	35.61	46.00	-10.39	Peak	VERTICAL
6	966.05	27.58	7.26	34.84	54.00	-19.16	Peak	VERTICAL
1	71.71	43.10	-8.14	34.96	40.00	-5.04	Peak	HORIZONTAL
2	179.38	44.18	-6.15	38.03	43.50	-5.47	Peak	HORIZONTAL
3	239.52	48.01	-5.98	42.03	46.00	-3.97	Peak	HORIZONTAL
4	584.84	36.99	0.98	37.97	46.00	-8.03	Peak	HORIZONTAL
5	718.70	30.62	3.16	33.78	46.00	-12.22	Peak	HORIZONTAL
6	842.86	29.68	5.16	34.84	46.00	-11.16	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (below 1GHz) ((802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	168.71	38.15	-5.06	33.09	43.50	-10.41	Peak	VERTICAL
2	247.28	40.46	-5.76	34.70	46.00	-11.30	Peak	VERTICAL
3	584.84	39.15	0.98	40.13	46.00	-5.87	Peak	VERTICAL
4	598.42	40.49	1.43	41.92	46.00	-4.08	Peak	VERTICAL
5	833.16	33.82	5.11	38.93	46.00	-7.07	Peak	VERTICAL
6	918.52	27.70	6.63	34.33	46.00	-11.67	Peak	VERTICAL
1	73.65	42.85	-8.58	34.27	40.00	-5.73	Peak	HORIZONTAL
2	179.38	44.07	-6.15	37.92	43.50	-5.58	Peak	HORIZONTAL
3	239.52	47.78	-5.98	41.80	46.00	-4.20	Peak	HORIZONTAL
4	528.58	36.99	-0.04	36.95	46.00	-9.05	Peak	HORIZONTAL
5	582.90	37.93	0.98	38.91	46.00	-7.09	Peak	HORIZONTAL
6	833.16	29.99	5.11	35.10	46.00	-10.90	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1987.00	56.62	-17.81	38.81	74.00	-35.19	Peak	VERTICAL
2	4824.00	50.85	-9.17	41.68	74.00	-32.32	Peak	VERTICAL
3	7236.00	45.79	-1.65	44.14	74.00	-29.86	Peak	VERTICAL
1	1756.00	58.73	-18.90	39.83	74.00	-34.17	Peak	HORIZONTAL
2	4824.00	52.62	-9.17	43.45	74.00	-30.55	Peak	HORIZONTAL
3	7236.00	44.96	-1.65	43.31	74.00	-30.69	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1994.00	55.87	-17.78	38.09	74.00	-35.91	Peak	VERTICAL
2	4874.00	49.37	-9.04	40.33	74.00	-33.67	Peak	VERTICAL
3	7311.00	45.27	-1.61	43.66	74.00	-30.34	Peak	VERTICAL
1	1301.00	50.46	-19.07	31.39	74.00	-42.61	Peak	HORIZONTAL
2	4874.00	50.65	-9.04	41.61	74.00	-32.39	Peak	HORIZONTAL
3	7311.00	46.42	-1.61	44.81	74.00	-29.19	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1994.00	56.67	-17.78	38.89	74.00	-35.11	Peak	VERTICAL
2	4924.00	47.91	-8.91	39.00	74.00	-35.00	Peak	VERTICAL
3	7386.00	46.03	-1.57	44.46	74.00	-29.54	Peak	VERTICAL
1	1756.00	60.49	-18.90	41.59	74.00	-32.41	Peak	HORIZONTAL
2	4924.00	51.50	-8.91	42.59	74.00	-31.41	Peak	HORIZONTAL
3	7386.00	44.96	-1.57	43.39	74.00	-30.61	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1756.00	63.14	-18.90	44.24	74.00	-29.76	Peak	VERTICAL
2	4824.00	49.07	-9.17	39.90	74.00	-34.10	Peak	VERTICAL
3	7236.00	45.89	-1.65	44.24	74.00	-29.76	Peak	VERTICAL
1	1756.00	60.28	-18.90	41.38	74.00	-32.62	Peak	HORIZONTAL
2	4824.00	48.03	-9.17	38.86	74.00	-35.14	Peak	HORIZONTAL
3	7236.00	46.60	-1.65	44.95	74.00	-29.05	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1756.00	60.27	-18.90	41.37	74.00	-32.63	Peak	VERTICAL
2	4874.00	47.56	-9.04	38.52	74.00	-35.48	Peak	VERTICAL
3	7311.00	45.84	-1.61	44.23	74.00	-29.77	Peak	VERTICAL
1	1756.00	55.89	-18.90	36.99	74.00	-37.01	Peak	HORIZONTAL
2	4874.00	47.50	-9.04	38.46	74.00	-35.54	Peak	HORIZONTAL
3	7311.00	47.12	-1.61	45.51	74.00	-28.49	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1595.00	55.59	-18.99	36.60	74.00	-37.40	Peak	VERTICAL
2	4924.00	46.94	-8.91	38.03	74.00	-35.97	Peak	VERTICAL
3	7386.00	46.03	-1.57	44.46	74.00	-29.54	Peak	VERTICAL
1	1686.00	54.69	-19.09	35.60	74.00	-38.40	Peak	HORIZONTAL
2	4924.00	47.19	-8.91	38.28	74.00	-35.72	Peak	HORIZONTAL
3	7386.00	46.55	-1.57	44.98	74.00	-29.02	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1497.00	55.73	-19.01	36.72	74.00	-37.28	Peak	VERTICAL
2	4824.00	46.21	-9.17	37.04	74.00	-36.96	Peak	VERTICAL
3	7236.00	45.41	-1.65	43.76	74.00	-30.24	Peak	VERTICAL
1	1756.00	59.19	-18.90	40.29	74.00	-33.71	Peak	HORIZONTAL
2	4824.00	46.84	-9.17	37.67	74.00	-36.33	Peak	HORIZONTAL
3	7236.00	45.14	-1.65	43.49	74.00	-30.51	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1994.00	56.59	-17.78	38.81	74.00	-35.19	Peak	VERTICAL
2	4874.00	46.34	-9.04	37.30	74.00	-36.70	Peak	VERTICAL
3	7311.00	45.54	-1.61	43.93	74.00	-30.07	Peak	VERTICAL
1	1756.00	61.27	-18.90	42.37	74.00	-31.63	Peak	HORIZONTAL
2	4874.00	46.67	-9.04	37.63	74.00	-36.37	Peak	HORIZONTAL
3	7311.00	45.37	-1.61	43.76	74.00	-30.24	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1756.00	58.13	-18.90	39.23	74.00	-34.77	Peak	VERTICAL
2	4924.00	46.99	-8.91	38.08	74.00	-35.92	Peak	VERTICAL
3	7386.00	45.64	-1.57	44.07	74.00	-29.93	Peak	VERTICAL
1	1756.00	54.22	-18.90	35.32	74.00	-38.68	Peak	HORIZONTAL
2	4924.00	47.52	-8.91	38.61	74.00	-35.39	Peak	HORIZONTAL
3	7386.00	46.67	-1.57	45.10	74.00	-28.90	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Low	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1987.00	57.79	-17.81	39.98	74.00	-34.02	Peak	VERTICAL
2	4844.00	46.30	-9.12	37.18	74.00	-36.82	Peak	VERTICAL
3	7266.00	46.09	-1.63	44.46	74.00	-29.54	Peak	VERTICAL
1	1756.00	62.13	-18.90	43.23	74.00	-30.77	Peak	HORIZONTAL
2	4844.00	46.27	-9.12	37.15	74.00	-36.85	Peak	HORIZONTAL
3	7266.00	44.62	-1.63	42.99	74.00	-31.01	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH Mid	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1791.00	54.28	-18.79	35.49	74.00	-38.51	Peak	VERTICAL
2	4874.00	46.73	-9.04	37.69	74.00	-36.31	Peak	VERTICAL
3	7311.00	45.28	-1.61	43.67	74.00	-30.33	Peak	VERTICAL
1	1756.00	53.44	-18.90	34.54	74.00	-39.46	Peak	HORIZONTAL
2	4874.00	45.88	-9.04	36.84	74.00	-37.16	Peak	HORIZONTAL
3	7311.00	46.47	-1.61	44.86	74.00	-29.14	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40mode)

Operation Mode	TX mode	Test Date	2020/04/13
Channel number	CH High	Test By	Bill
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1994.00	56.46	-17.78	38.68	74.00	-35.32	Peak	VERTICAL
2	4904.00	46.84	-8.95	37.89	74.00	-36.11	Peak	VERTICAL
3	7356.00	45.57	-1.58	43.99	74.00	-30.01	Peak	VERTICAL
1	1756.00	58.64	-18.90	39.74	74.00	-34.26	Peak	HORIZONTAL
2	4904.00	48.60	-8.95	39.65	74.00	-34.35	Peak	HORIZONTAL
3	7356.00	46.60	-1.58	45.02	74.00	-28.98	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. 100kHz Bandwidth of Band Edges Measurement

9.1 Standard Applicable:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

9.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.


9.2.2. Radiated emission:

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conducted	Spectrum analyzer	R&S	FSP40	100116	01/10/2020	01/10/2021
Chamber 19	EMI Receiver	R&S	ESR3	102461	08/08/2018	08/08/2020
Chamber 19	Loop Antenna	EM	EM-6879	271	05/31/2019	05/31/2020
Chamber 19	Bilog Antenna (30MHz-1GHz)	Schwarzbeck	VULB9168 w 5dB Att.	736	02/11/2020	02/11/2021
Chamber 19	Horn antenna (1GHz-18GHz)	Schwarzbeck	9120D	9120D-1627	06/17/2019	06/17/2020
Chamber 19	Horn antenna (18GHz-26GHz)	Com-power	AH-826	081001	11/25/2019	11/25/2020
Chamber 19	Horn antenna (26GHz-40GHz)	Com-power	AH-640	100A	03/13/2020	03/13/2021
Chamber 19	Preamplifier (9kHz-1GHz)	HP	8447F	3113A06362	01/06/2020	01/06/2021
Chamber 19	Preamplifier (1GHz-26GHz)	Agilent	8449B	3008A02471	10/05/2019	10/05/2020
Chamber 19	Preamplifier (26GHz-40GHz)	MITEQ	JS4-26004000- 27-5A	818471	05/06/2019	05/06/2020
Chamber 19	RF Cable (9kHz-18GHz)	HUBER SU- HNER	Sucoflex 104A	MY1397/4A	01/10/2020	01/10/2021
Chamber 19	RF Cable (18GHz-40GHz)	HUBER SU- HNER	Sucoflex 102	27963/2&374 21/2	11/21/2019	11/21/2020
Chamber 19	Signal Generator	Anritsu	MG3692A	20311	01/06/2020	01/06/2021
Chamber 19	Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


9.3 Test SET-UP:

The test item only performed radiated mode

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

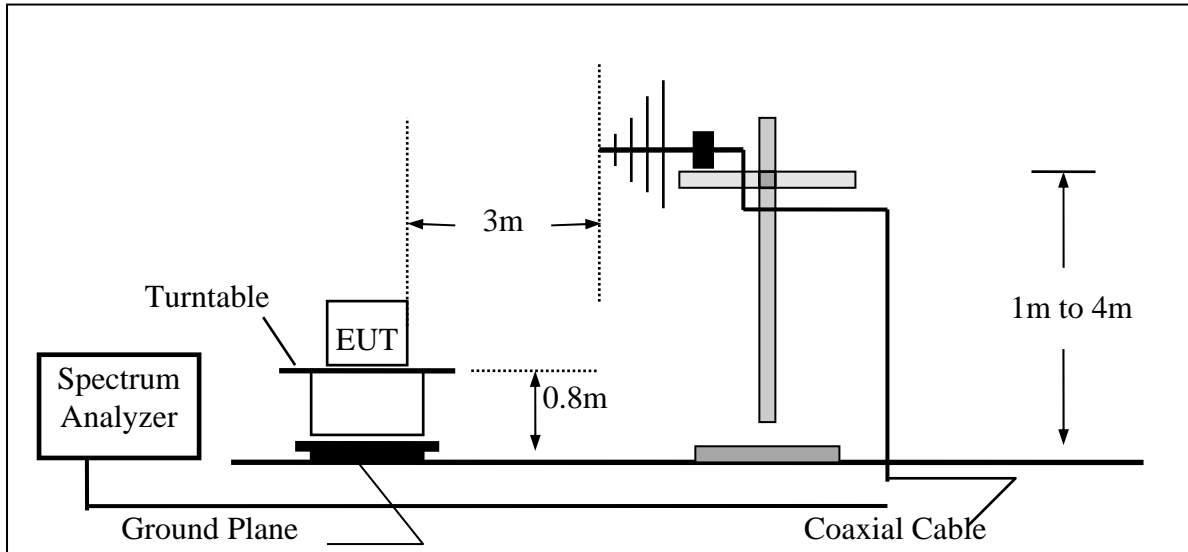

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

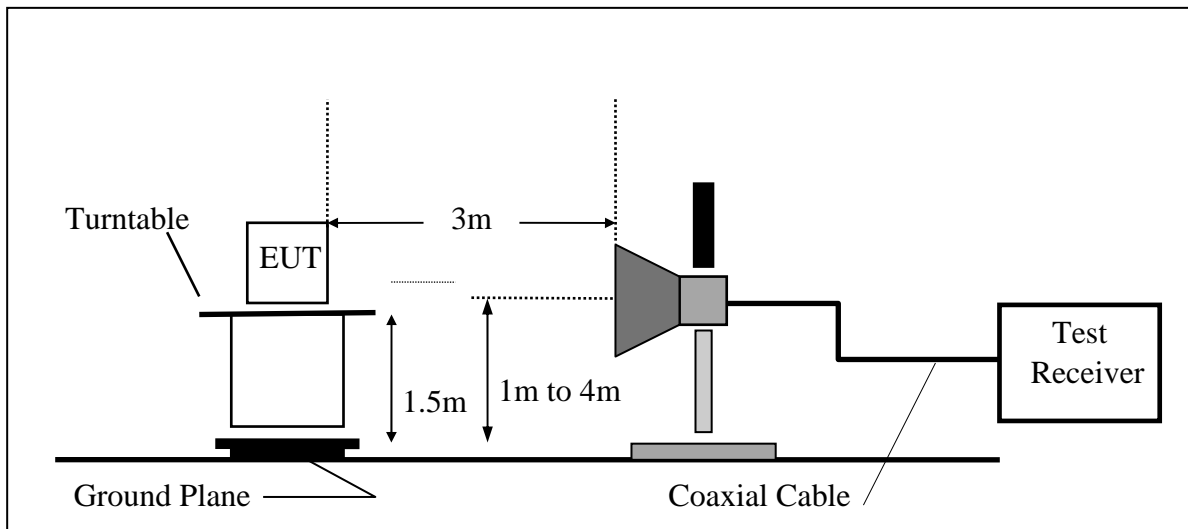

9.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

9.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Emission: 802.11 b mode


Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

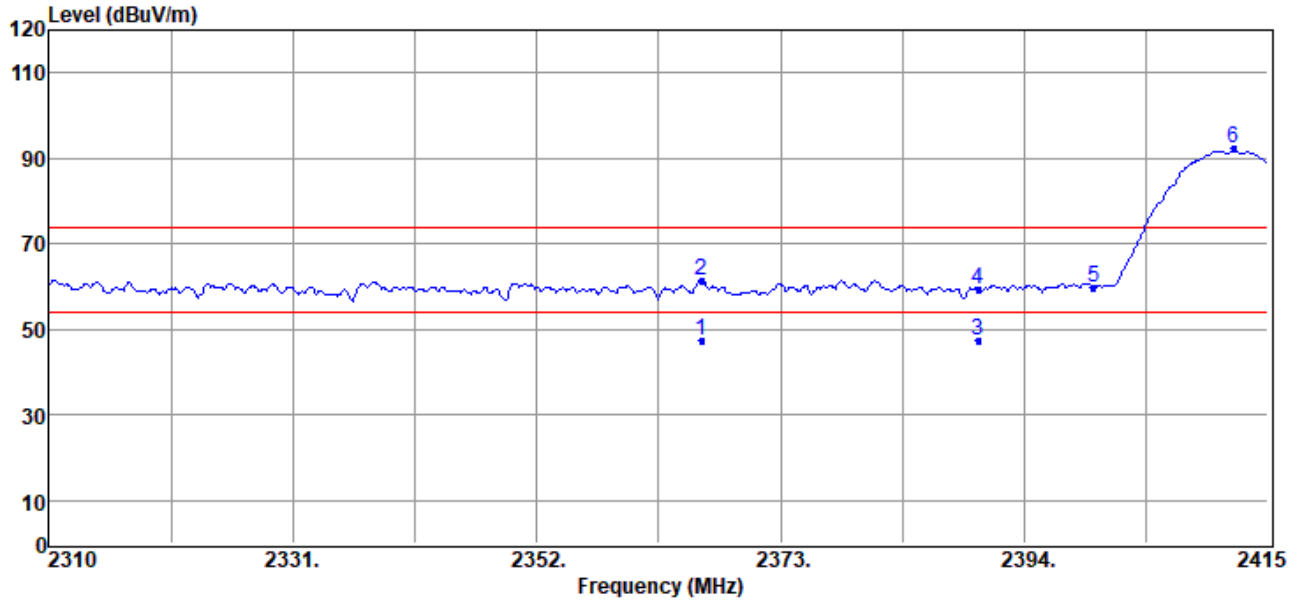

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2366.18	14.69	32.60	47.29	54.00	-6.71	Average	VERTICAL
2	2366.18	28.81	32.60	61.41	74.00	-12.59	Peak	VERTICAL
3	2390.00	14.84	32.59	47.43	54.00	-6.57	Average	VERTICAL
4	2390.00	26.87	32.59	59.46	74.00	-14.54	Peak	VERTICAL
5	2400.00	27.28	32.58	59.86	72.21	-12.35	Peak	VERTICAL
6	2412.06	59.62	32.59	92.21	F	--	Peak	VERTICAL

Remark: F” denotes fundamental frequency

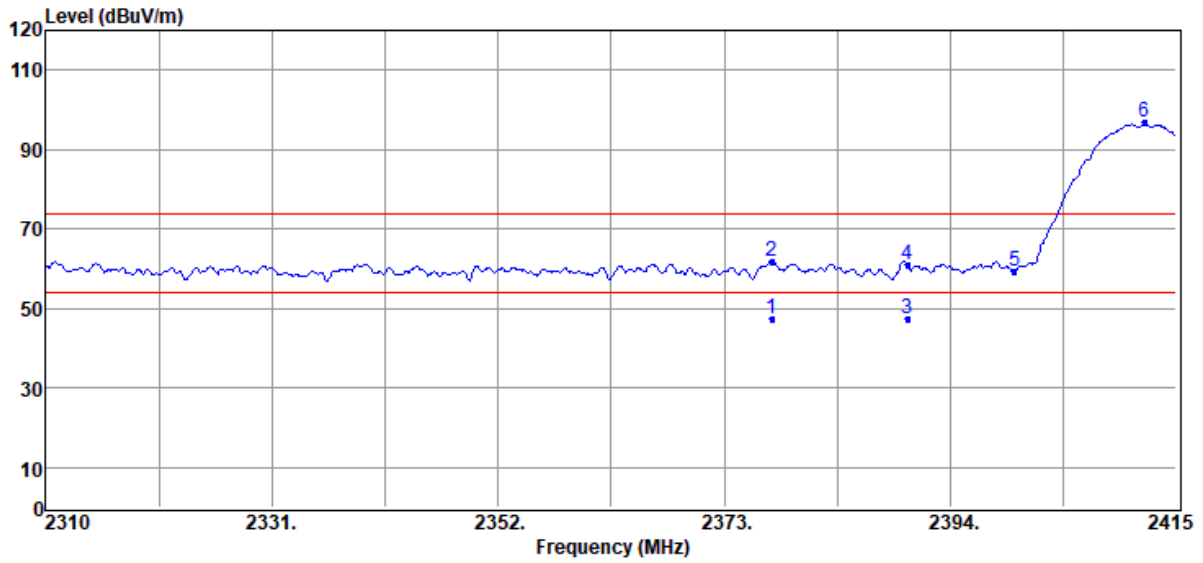


No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2377.41	14.73	32.60	47.33	54.00	-6.67	Average	HORIZONTAL
2	2377.41	29.16	32.60	61.76	74.00	-12.24	Peak	HORIZONTAL
3	2390.01	14.81	32.59	47.40	54.00	-6.60	Average	HORIZONTAL
4	2390.01	28.29	32.59	60.88	74.00	-13.12	Peak	HORIZONTAL
5	2399.99	26.71	32.58	59.29	76.91	-17.62	Peak	HORIZONTAL
6	2412.06	64.32	32.59	96.91	F	---	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency


Operation Mode TX CH High
 Fundamental Frequency 2462 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

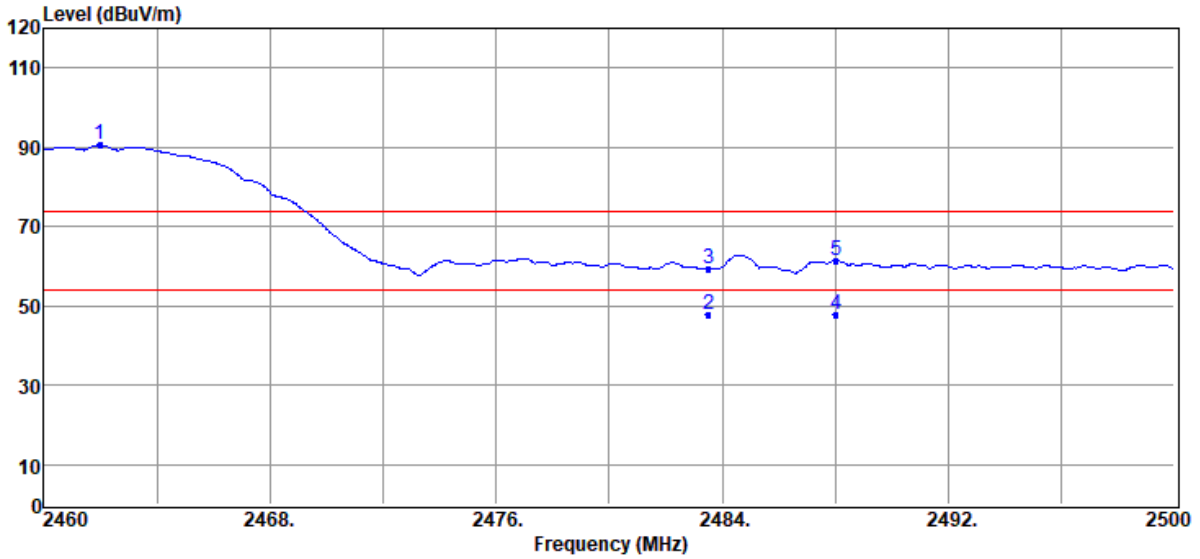

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2462.00	57.91	32.62	90.53	F	---	Peak	VERTICAL
2	2483.52	15.10	32.63	47.73	54.00	-6.27	Average	VERTICAL
3	2483.52	26.60	32.63	59.23	74.00	-14.77	Peak	VERTICAL
4	2488.04	15.11	32.63	47.74	54.00	-6.26	Average	VERTICAL
5	2488.04	28.80	32.63	61.43	74.00	-12.57	Peak	VERTICAL

Remark: F” denotes fundamental frequency

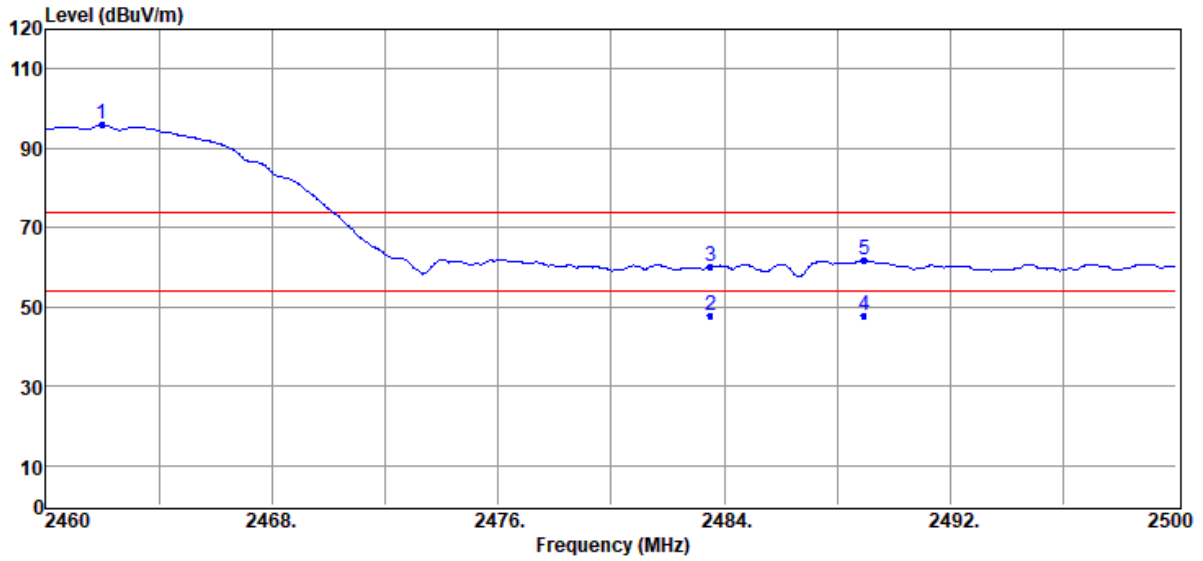


No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2462.00	63.32	32.62	95.94	F	---	Peak	HORIZONTAL
2	2483.52	15.10	32.63	47.73	54.00	-6.27	Average	HORIZONTAL
3	2483.52	27.55	32.63	60.18	74.00	-13.82	Peak	HORIZONTAL
4	2488.96	15.11	32.63	47.74	54.00	-6.26	Average	HORIZONTAL
5	2488.96	29.04	32.63	61.67	74.00	-12.33	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency

Radiated Emission: 802.11 g mode


Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

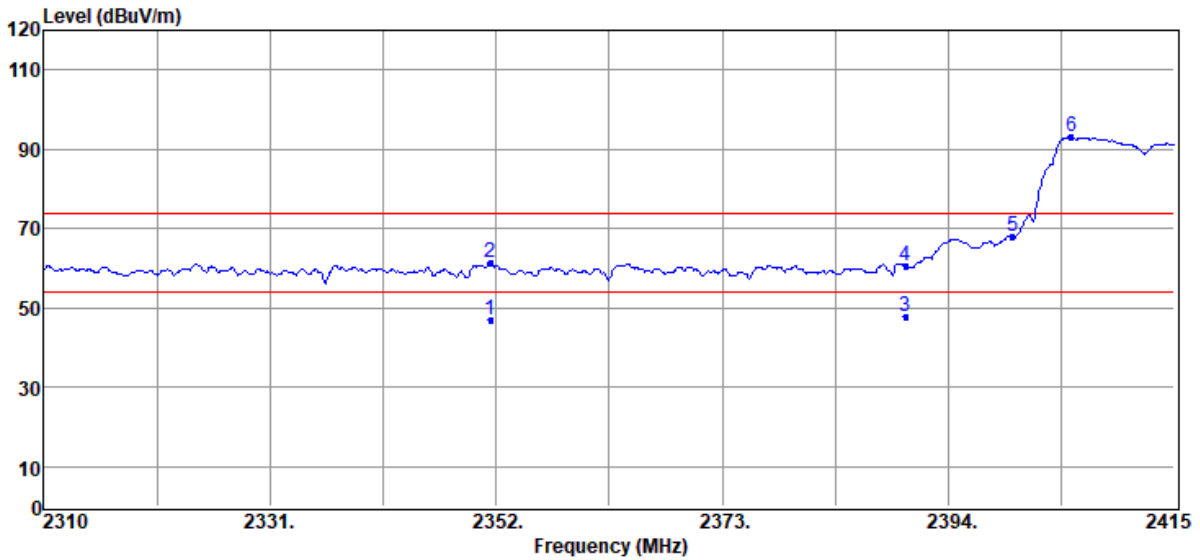

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2351.48	14.57	32.62	47.19	54.00	-6.81	Average	VERTICAL
2	2351.48	28.69	32.62	61.31	74.00	-12.69	Peak	VERTICAL
3	2390.00	15.36	32.59	47.95	54.00	-6.05	Average	VERTICAL
4	2390.00	28.12	32.59	60.71	74.00	-13.29	Peak	VERTICAL
5	2399.99	35.33	32.58	67.91	74.00	-6.09	Peak	VERTICAL
6	2405.45	60.47	32.58	93.05	F	---	Peak	VERTICAL

Remark: F” denotes fundamental frequency

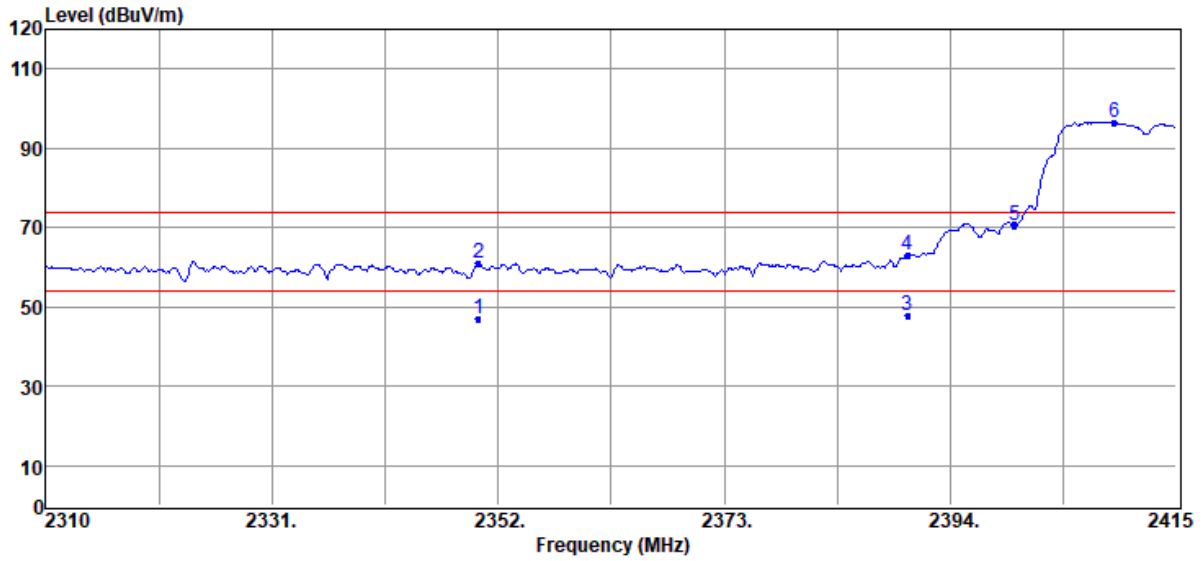


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2350.22	14.58	32.62	47.20	54.00	-6.80	Average	HORIZONTAL
2	2350.22	28.27	32.62	60.89	74.00	-13.11	Peak	HORIZONTAL
3	2390.01	15.06	32.59	47.65	54.00	-6.35	Average	HORIZONTAL
4	2390.01	30.40	32.59	62.99	74.00	-11.01	Peak	HORIZONTAL
5	2400.00	37.96	32.58	70.54	76.53	-5.99	Peak	HORIZONTAL
6	2409.23	63.94	32.59	96.53	F	---	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency


Operation Mode TX CH High
 Fundamental Frequency 2462 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

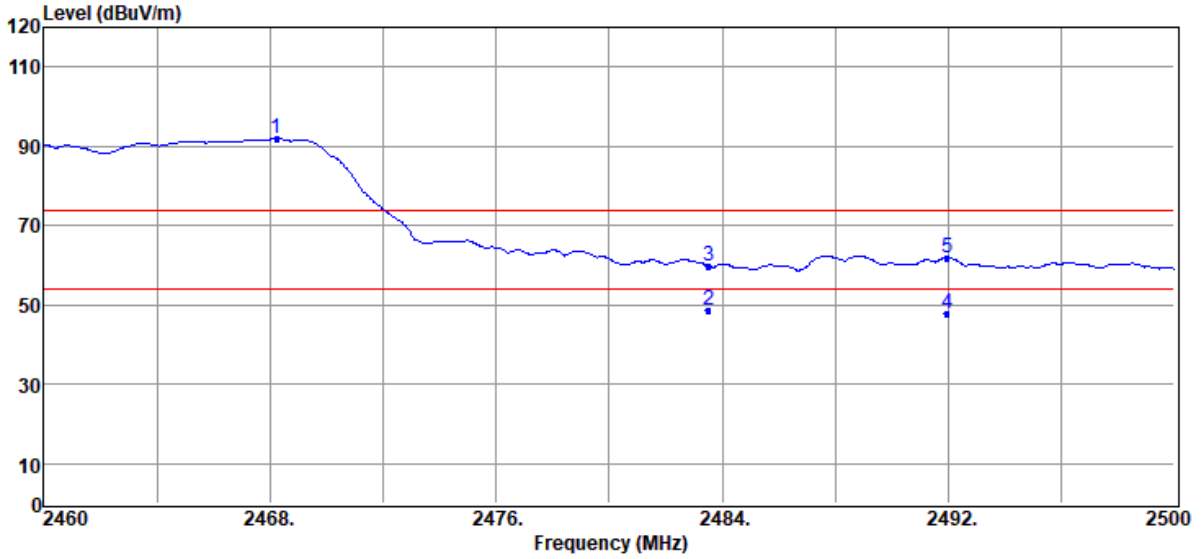

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2468.24	59.24	32.62	91.86	F	---	Peak	VERTICAL
2	2483.52	15.89	32.63	48.52	54.00	-5.48	Average	VERTICAL
3	2483.52	27.32	32.63	59.95	74.00	-14.05	Peak	VERTICAL
4	2491.96	15.21	32.63	47.84	54.00	-6.16	Average	VERTICAL
5	2491.96	29.21	32.63	61.84	74.00	-12.16	Peak	VERTICAL

Remark: F” denotes fundamental frequency

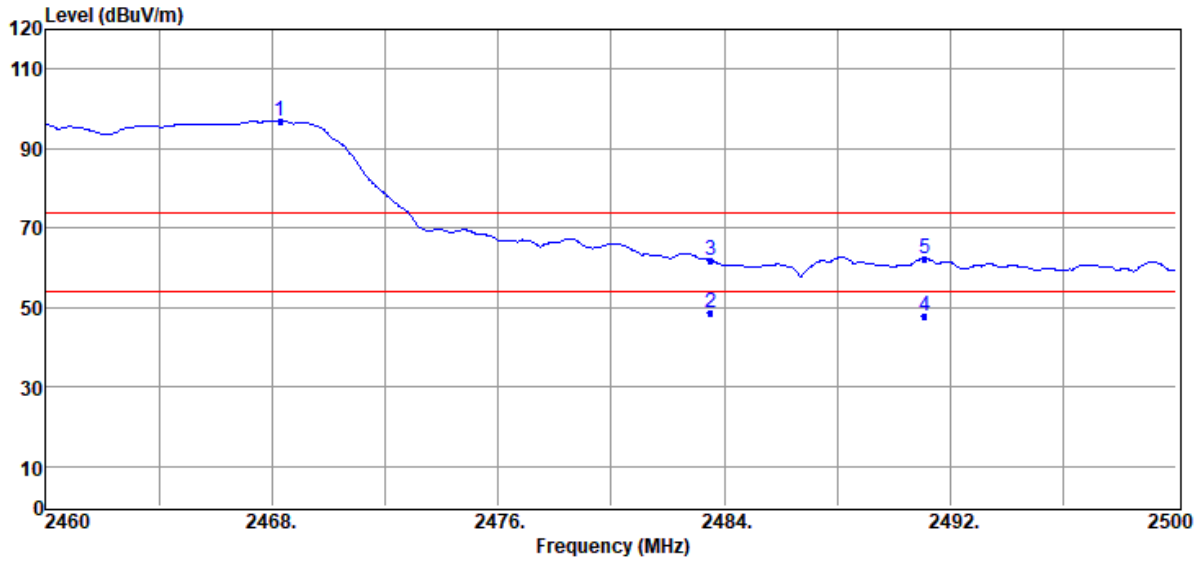


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2468.28	64.32	32.62	96.94	F	---	Peak	HORIZONTAL
2	2483.52	15.86	32.63	48.49	54.00	-5.51	Average	HORIZONTAL
3	2483.52	29.26	32.63	61.89	74.00	-12.11	Peak	HORIZONTAL
4	2491.08	15.14	32.63	47.77	54.00	-6.23	Average	HORIZONTAL
5	2491.08	29.71	32.63	62.34	74.00	-11.66	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency

Radiated Emission: 802.11 n_20 mode


Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

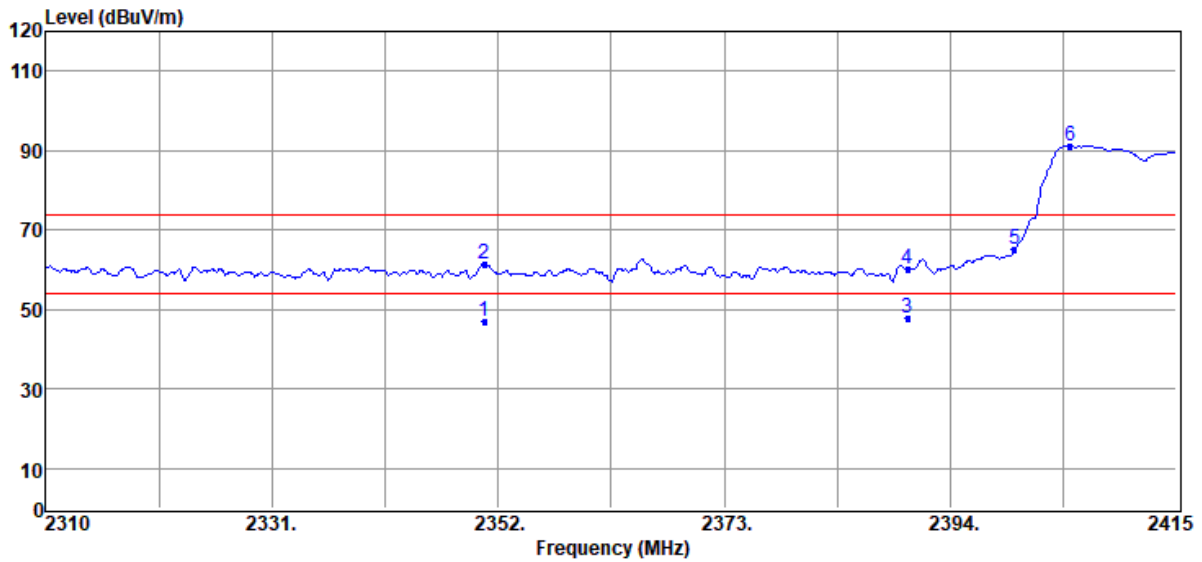

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2350.74	14.45	32.62	47.07	54.00	-6.93	Average	VERTICAL
2	2350.74	28.92	32.62	61.54	74.00	-12.46	Peak	VERTICAL
3	2390.01	15.11	32.59	47.70	54.00	-6.30	Average	VERTICAL
4	2390.01	27.47	32.59	60.06	74.00	-13.94	Peak	VERTICAL
5	2400.00	32.37	32.58	64.95	71.32	-6.37	Peak	VERTICAL
6	2405.13	58.74	32.58	91.32	F	---	Peak	VERTICAL

Remark: F” denotes fundamental frequency

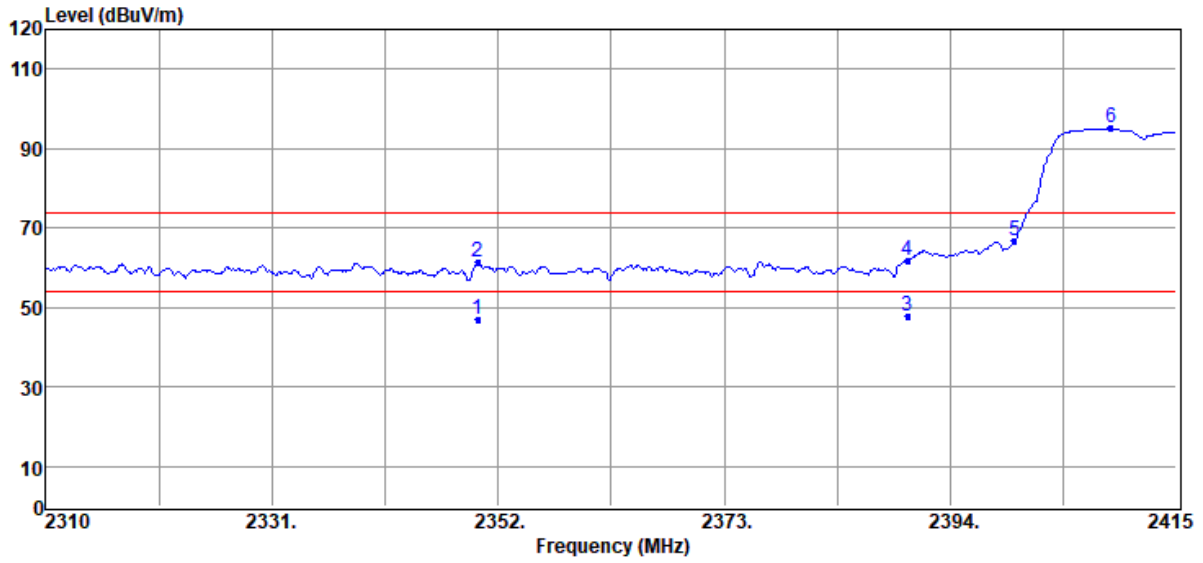


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2350.11	14.33	32.62	46.95	54.00	-7.05	Average	HORIZONTAL
2	2350.11	28.67	32.62	61.29	74.00	-12.71	Peak	HORIZONTAL
3	2390.01	15.36	32.59	47.95	54.00	-6.05	Average	HORIZONTAL
4	2390.01	29.10	32.59	61.69	74.00	-12.31	Peak	HORIZONTAL
5	2400.00	34.12	32.58	66.70	75.07	-8.37	Peak	HORIZONTAL
6	2408.91	62.48	32.59	95.07	F	---	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency


Operation Mode TX CH High
 Fundamental Frequency 2462 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

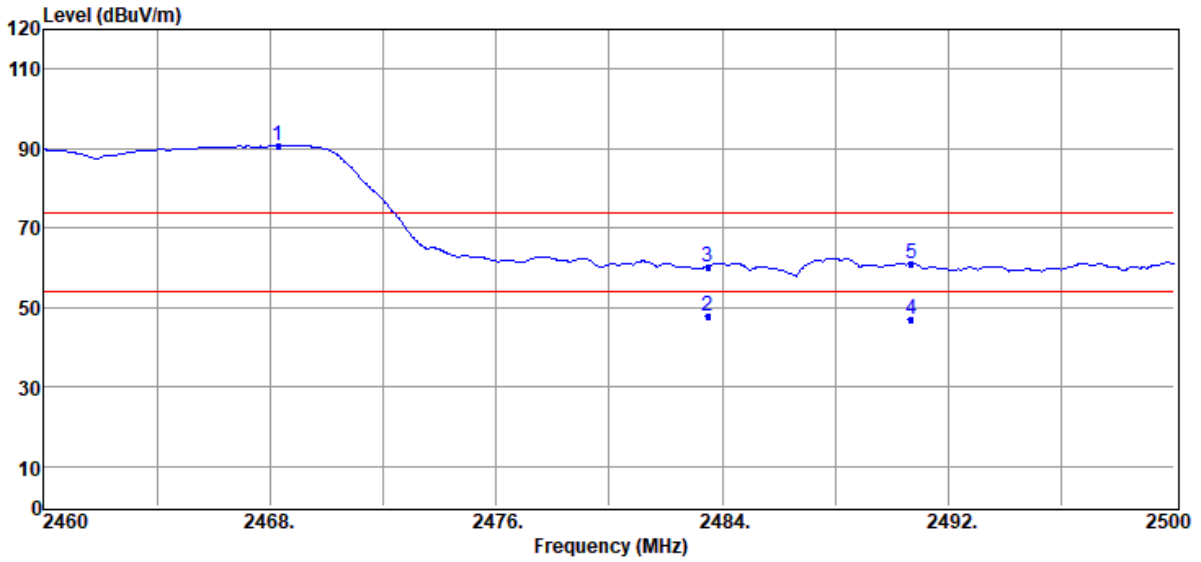

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2468.28	58.10	32.62	90.72	F	---	Peak	VERTICAL
2	2483.50	15.01	32.63	47.64	54.00	-6.36	Average	VERTICAL
3	2483.50	27.68	32.63	60.31	74.00	-13.69	Peak	VERTICAL
4	2490.68	14.19	32.63	46.82	54.00	-7.18	Average	VERTICAL
5	2490.68	28.37	32.63	61.00	74.00	-13.00	Peak	VERTICAL

Remark: F” denotes fundamental frequency

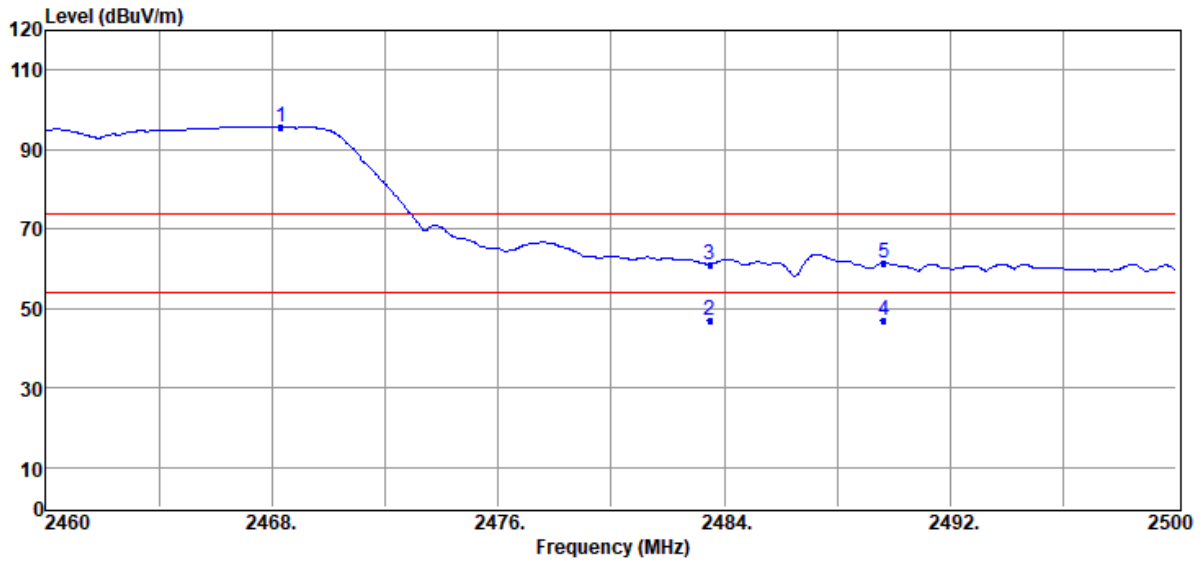


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2468.32	63.15	32.62	95.77	F	---	Peak	HORIZONTAL
2	2483.50	14.44	32.63	47.07	54.00	-6.93	Average	HORIZONTAL
3	2483.50	28.45	32.63	61.08	74.00	-12.92	Peak	HORIZONTAL
4	2489.64	14.40	32.63	47.03	54.00	-6.97	Average	HORIZONTAL
5	2489.64	28.86	32.63	61.49	74.00	-12.51	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency

Radiated Emission: 802.11 n_40 mode


Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

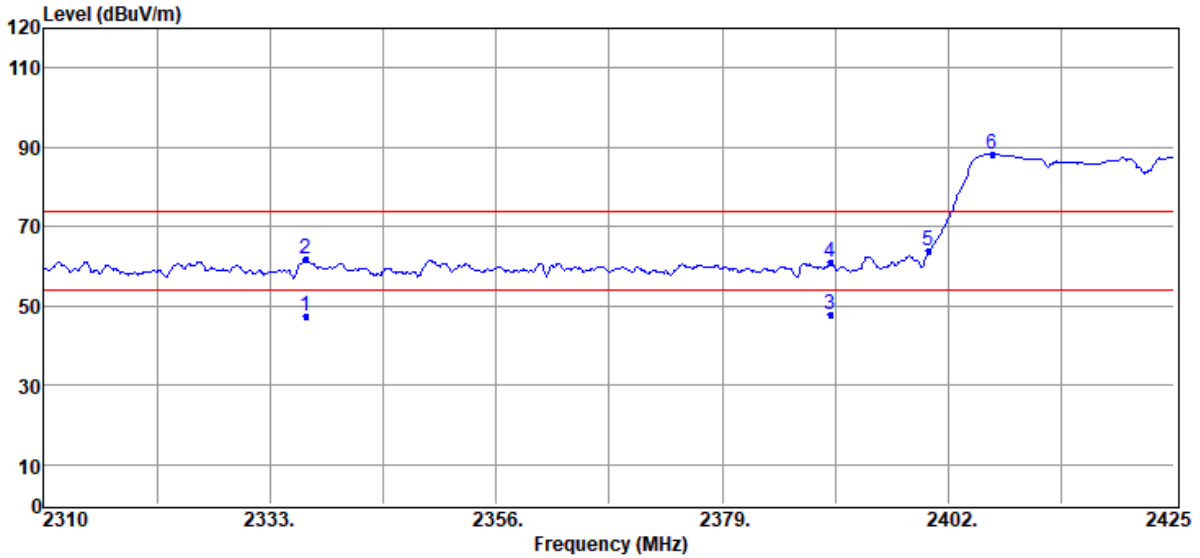

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2336.68	14.97	32.62	47.59	54.00	-6.41	Average	VERTICAL
2	2336.68	29.15	32.62	61.77	74.00	-12.23	Peak	VERTICAL
3	2390.04	15.36	32.59	47.95	54.00	-6.05	Average	VERTICAL
4	2390.04	28.38	32.59	60.97	74.00	-13.03	Peak	VERTICAL
5	2400.00	31.16	32.58	63.74	68.30	-4.56	Peak	VERTICAL
6	2406.49	55.71	32.59	88.30	F	---	Peak	VERTICAL

Remark: F” denotes fundamental frequency

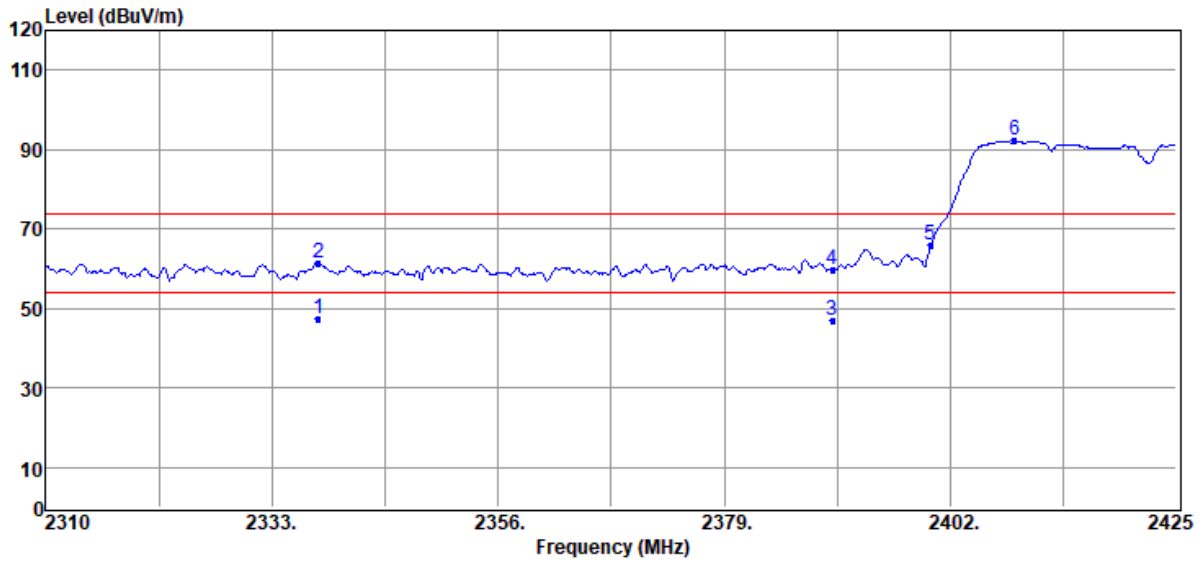


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2337.72	14.64	32.62	47.26	54.00	-6.74	Average	HORIZONTAL
2	2337.72	29.00	32.62	61.62	74.00	-12.38	Peak	HORIZONTAL
3	2390.00	14.33	32.59	46.92	54.00	-7.08	Average	HORIZONTAL
4	2390.00	27.26	32.59	59.85	74.00	-14.15	Peak	HORIZONTAL
5	2400.00	33.55	32.58	66.13	72.32	-6.19	Peak	HORIZONTAL
6	2408.56	59.73	32.59	92.32	F	---	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency


Operation Mode TX CH High
 Fundamental Frequency 2462 MHz
 Temperature 25 °C

Test Date 2020/04/10
 Test By Bill
 Humidity 60 %

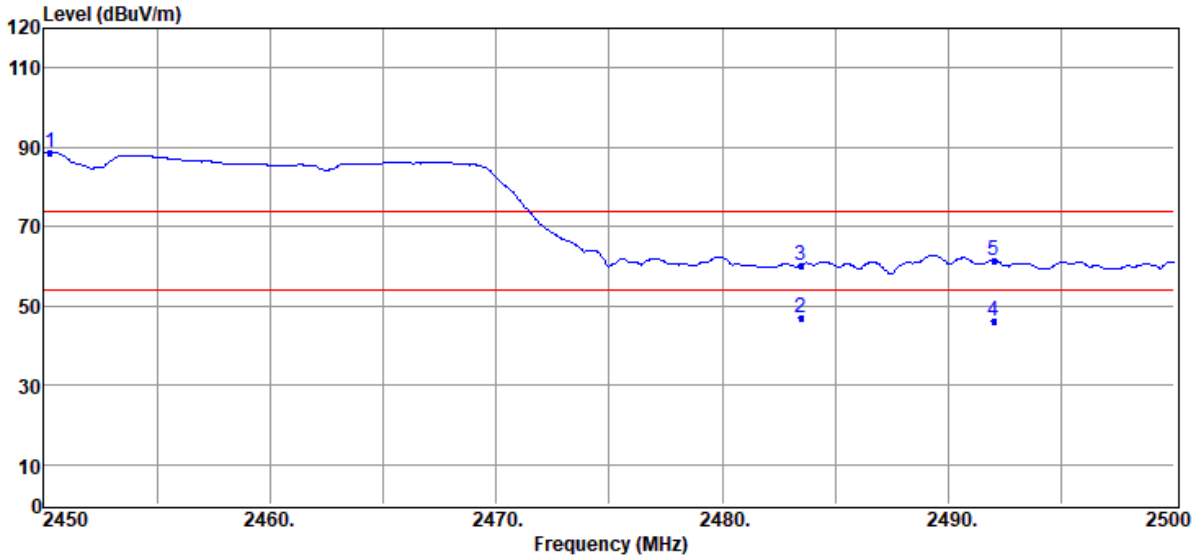

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2450.30	56.19	32.61	88.80	F	---	Peak	VERTICAL
2	2483.50	14.30	32.63	46.93	54.00	-7.07	Average	VERTICAL
3	2483.50	27.77	32.63	60.40	74.00	-13.60	Peak	VERTICAL
4	2492.00	13.70	32.63	46.33	54.00	-7.67	Average	VERTICAL
5	2492.00	28.87	32.63	61.50	74.00	-12.50	Peak	VERTICAL

Remark: F” denotes fundamental frequency

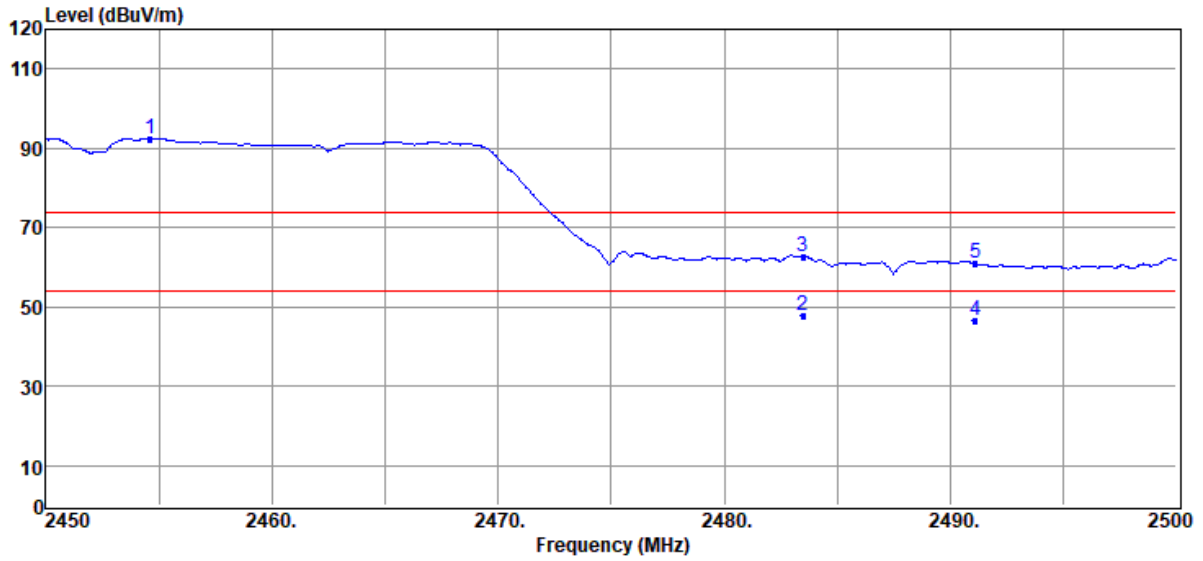

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2454.60	59.77	32.61	92.38	F	---	Peak	HORIZONTAL
2	2483.50	15.02	32.63	47.65	54.00	-6.35	Average	HORIZONTAL
3	2483.50	30.06	32.63	62.69	74.00	-11.31	Peak	HORIZONTAL
4	2491.10	14.16	32.63	46.79	54.00	-7.21	Average	HORIZONTAL
5	2491.10	28.38	32.63	61.01	74.00	-12.99	Peak	HORIZONTAL

Remark: F” denotes fundamental frequency

10. Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 7.3 for details.

10.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW =3kHz, VBW = 10kHz, Set the span to 1.5 DTS bandwidth., Sweep=Auto
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.


10.5 Measurement Result:

Mode	Frequency (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
		Chain 0	Chain 1	Chain 2	Chain 3			
802.11b	2412	-19.389				0.00	-19.39	8.00
	2437	-19.986				0.00	-19.99	8.00
	2462	-20.7				0.00	-20.70	8.00
802.11g	2412	-17.623				0.28	-17.34	8.00
	2437	-17.822				0.28	-17.54	8.00
	2462	-18.097				0.28	-17.82	8.00
802.11n HT20	2412	-18.927				0.23	-18.70	8.00
	2437	-16.424				0.23	-16.19	8.00
	2462	-18.833				0.23	-18.60	8.00
802.11n HT40	2422	-21.932				0.37	-21.56	8.00
	2437	-20.894				0.37	-20.53	8.00
	2452	-21.934				0.37	-21.57	8.00

802.11b Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

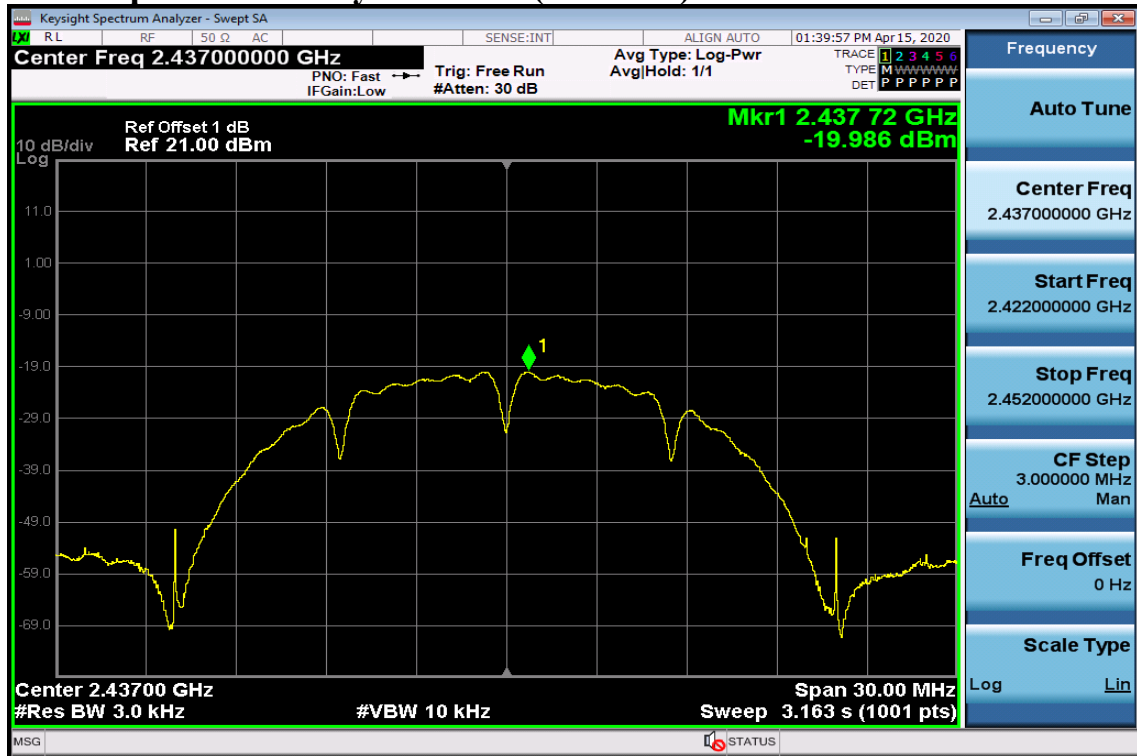


Power Spectral Density Test Plot (CH-High)




802.11g


Power Spectral Density Test Plot (CH-Low)

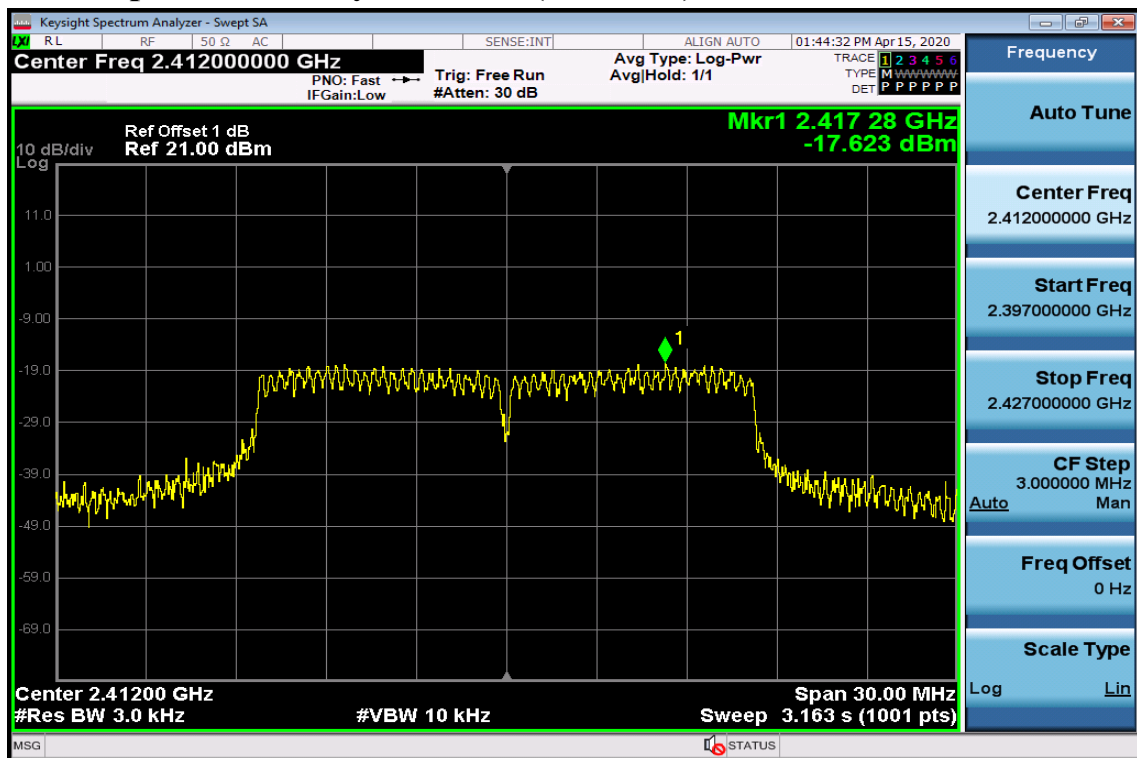


Power Spectral Density Test Plot (CH-Mid)

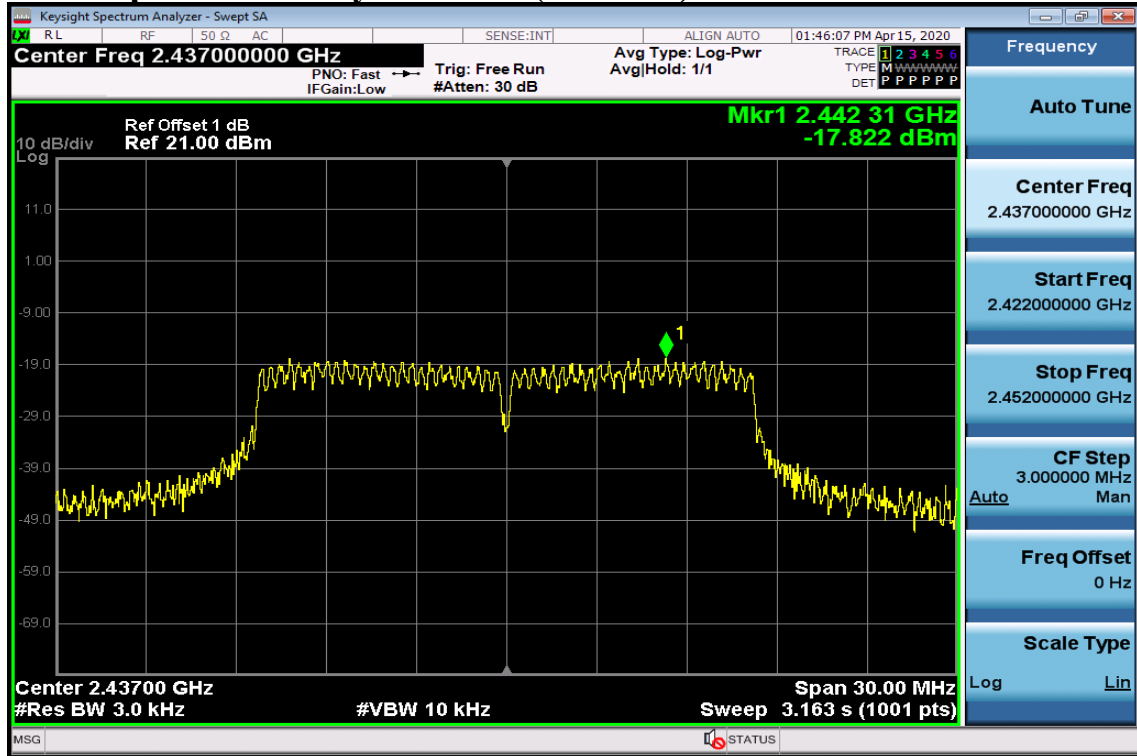


Power Spectral Density Test Plot (CH-High)

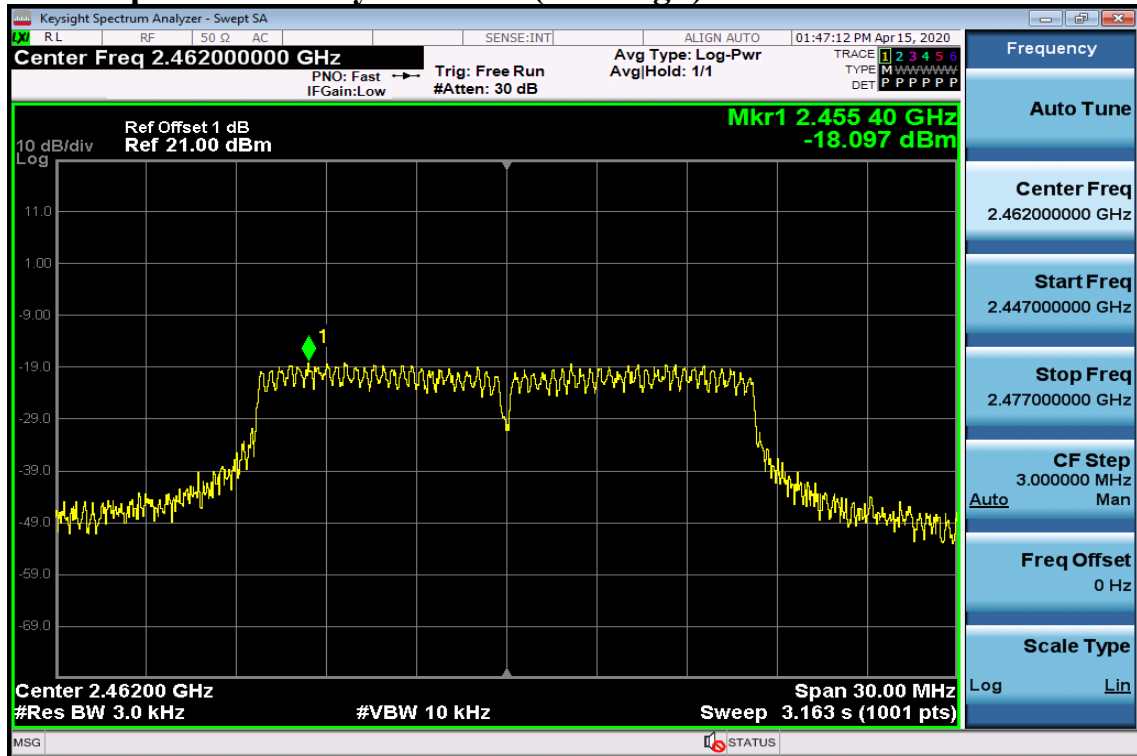


802.11n_20M Power Spectral Density Test Plot (CH-Low)

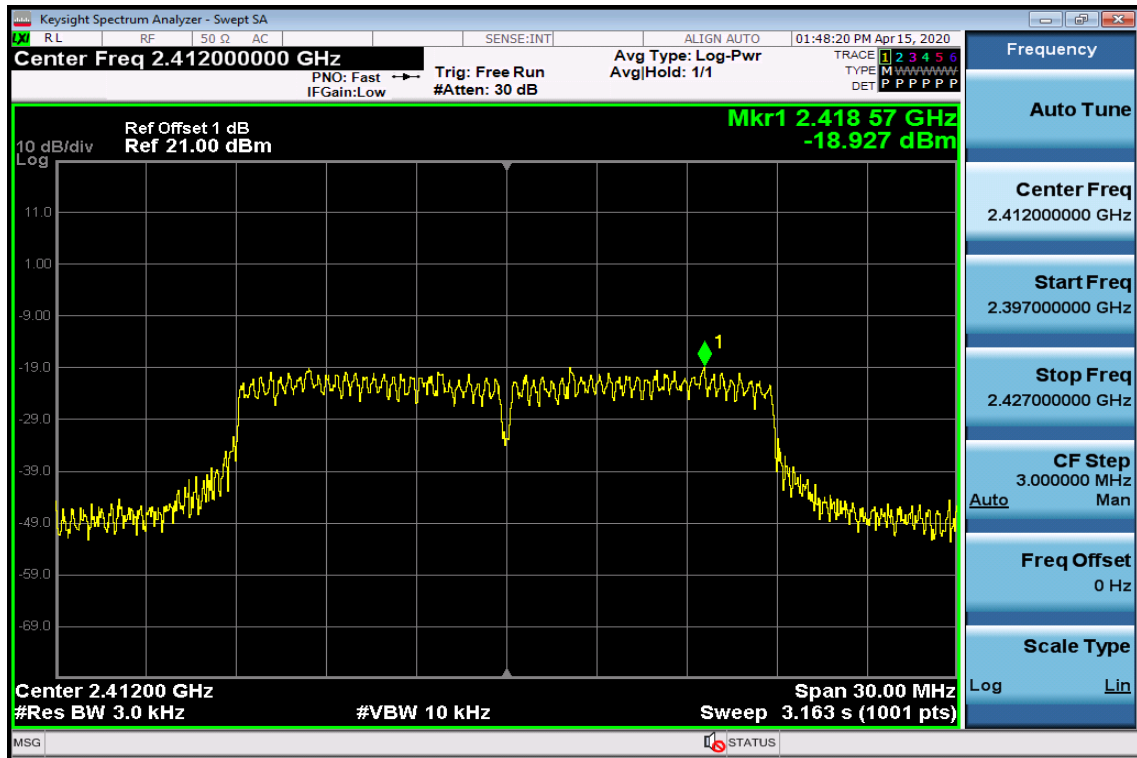

Power Spectral Density Test Plot (CH-Mid)

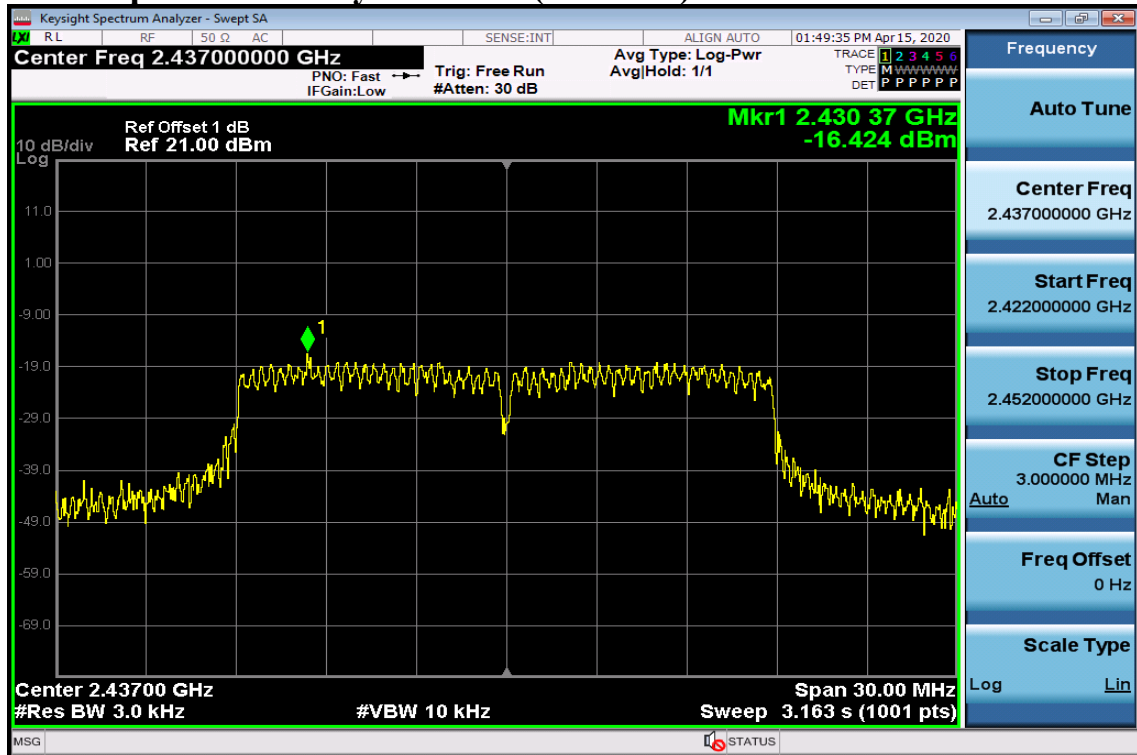


Power Spectral Density Test Plot (CH-High)

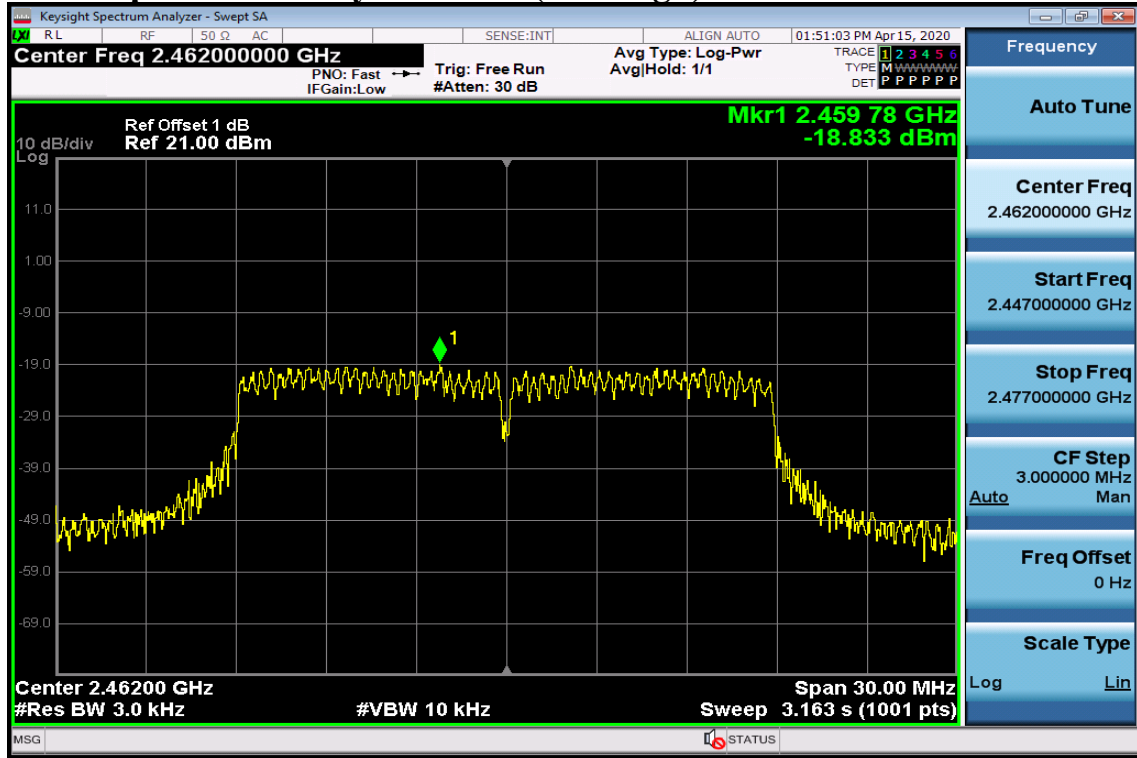

802.11n_40M


Power Spectral Density Test Plot (CH-Low)

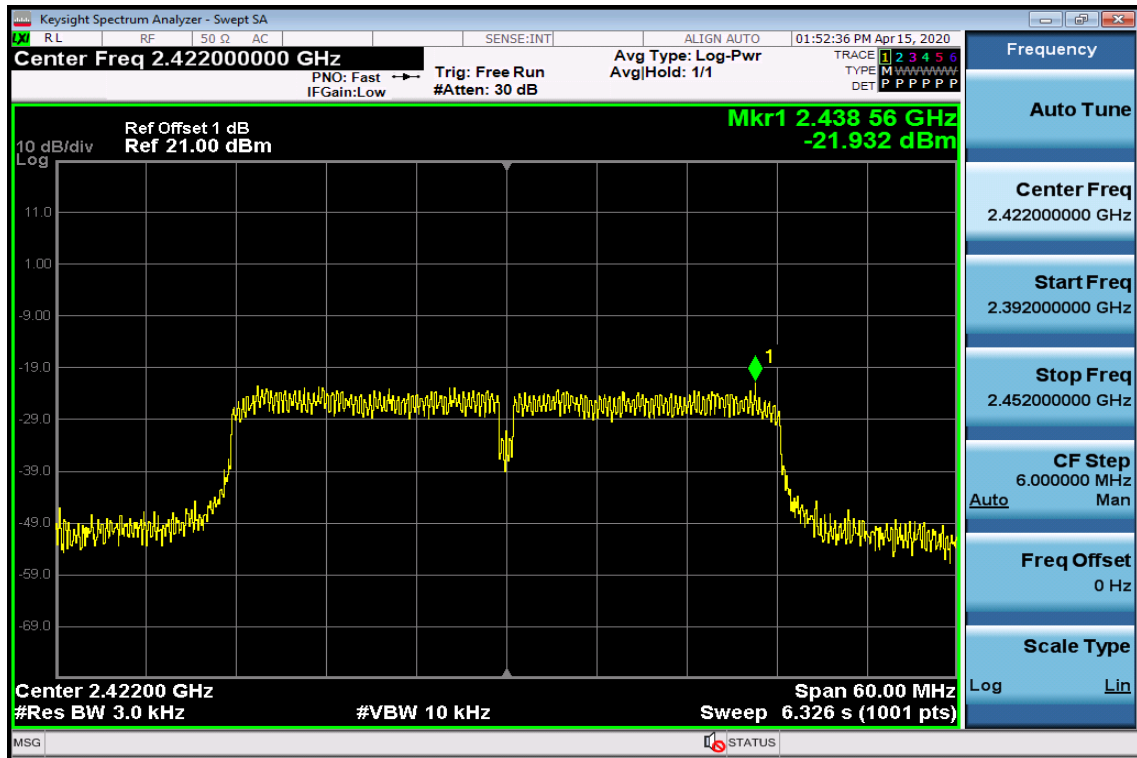

Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)

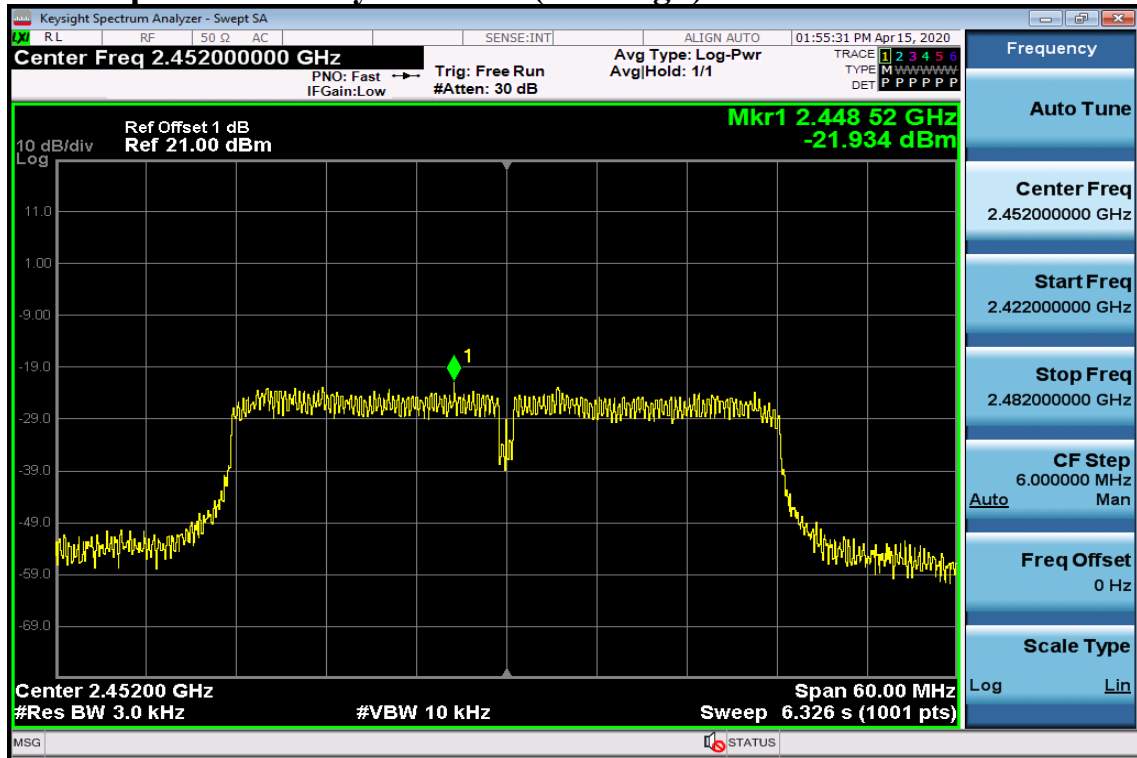

11. Antenna Requirement

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is below table, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Antenna Designation:

	Type	Part No.	Gain (2.4GHz)
Ant 1	PIFA Antenna	ANT-PCB-002	-0.8dBi