



# **RF Exposure Evaluation Report**

**Product**: Mobile Printer

Trade mark : Rongta

Model/Type reference : RPP02N-BU

Serial Number : N/A

Report Number : EED32l00089503

FCCID : 2AD6G-RPP02N-BU

**Date of Issue** : Aug. 16, 2016

Test Standards : 47 CFR Part 1.1307 (2015)

47 CFR Part 2.1093 (2015)

KDB447498D01 v06

Test result : PASS

#### Prepared for:

XIAMEN RONGTA TECHNOLOGY CO., LTD.

3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street
Office, Huli District, Xiamen City

Prepared by:

Centre Testing International Group Co., Ltd. Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Reviewed by: Report Seal

Date:

Hotline: 400-6788-333

Tom - Chen Tom chen (Test Project)

Compiled by:

Kevin yang (Project Engineer)

Sheek Luo (Reviewer)

Approved by:

Sheek Luo (Lab supervisor)

Check No.: 2392191403

Aug. 16, 2016

www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com









Page 2 of 8

Report No.: EED32I00089503

2 Version

Version No.	Date	1	Description	
00	Aug. 16, 2016		Original	
/			(ii)	
			6	6














































































## 3 Contents

							Page
1 COVER PAGE				••••••	••••••	••••••	
2 VERSION		••••••		•••••		••••••	2
3 CONTENTS	•••••	•••••		•••••		•••••	
4 GENERAL INF	ORMATION			•••••		•••••	4
4.1 CLIENT INF 4.2 GENERAL I 4.3 PRODUCT S 4.4 TEST LOCA 4.5 TEST FACIL 4.6 DEVIATION 4.7 ABNORMAL 4.8 OTHER INF	DESCRIPTION O SPECIFICATION ATION LITY FROM STANDA ITIES FROM ST.	F EUTSUBJECTIVE TO	CHIS STANDA	RD			
5 SAR EVALUA							
5.1.2 Limits	ard Requirem						- -





## 4 General Information

## 4.1 Client Information

Applicant:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Applicant:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City
Manufacturer:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Manufacturer:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City
Factory:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Factory:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City

## 4.2 General Description of EUT

Product Name:	Mobile Printer	C'O	
Mode No.(EUT):	RPP02N-BU	(6,1)	(0)
Trade Mark:	Rongta		

## 4.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	3.0	
Modulation Type:	GFSK	
Number of Channel:	79	
Test power grade:	N/A(manufacturer declare)	(3)
Test software of EUT:	Bluetest.exe (manufacturer declare)	(0)
Antenna Type:	PCB layout snake antenna	
Antenna Gain:	0dBi	
Test voltage:	AC 120V, 60Hz	
Max Conducted Output Power:	0.647dBm	
Sample Received Date:	Apr. 21, 2016	
Sample tested Date:	Apr. 21, 2016 to Aug. 16, 2016	73
The tested sample and the	sample information are provided by the client.	(63)



Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com



Report No.: EED32I00089503 Page 5 of 8

#### 4.4 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

#### A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 886427

Centre Testing International (Shenzhen) Corporation. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

#### IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International (Shenzhen) Corporation. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2.

#### IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International (Shenzhen) Corporation., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

#### NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

#### **VCCI**

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Hotline: 400-6788-333 www.cti-cert.com E-mail: info@cti-cert.com Complaint call: 0755-33681700 Complaint E-mail: complaint@cti-cert.com









Report No.: EED32I00089503

Page 6 of 8

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of

Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

### 4.6 Deviation from Standards


None.

#### 4.7 Abnormalities from Standard Conditions

None.

## 4.8 Other Information Requested by the Customer

None.

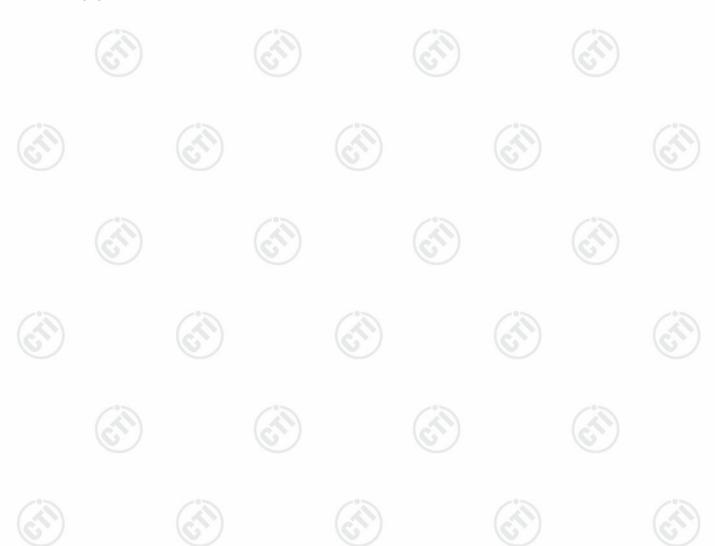







### 5 SAR Evaluation

### 5.1 RF Exposure Compliance Requirement

#### 5.1.1 Standard Requirement

According to KDB447498D01 General RF Exposure Guidance v06 Standalone SAR test exclusion considerations

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

#### **5.1.2 Limits**

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $[\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation<sup>17</sup>

The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq$  50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $\leq$  5 mm, a distance of 5 mm is applied to determine SAR test exclusion

#### 5.1.3 EUT RF Exposure

The Max Conducted Output Power is 0.647dBm in lowest channel(2.402GHz);

The best case gain of the antenna is 0dBi.

EIRP= 0.647dBm + 0dBi = 0.647dBm

0.647dBm logarithmic terms convert to numeric result is nearly 1.16mW

According to the formula. calculate the EIRP test result:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}]$ 

General RF Exposure =  $(1.16\text{mW} / 5 \text{ mm}) \times \sqrt{2.402\text{GHz}} = 0.361$ 

SAR requirement:

S = 3.0

2;

1 < 2.

So the SAR report is not required.











Report No.: EED32I00089503 Page 8 of 8

## **PHOTOGRAPHS OF EUT Constructional Details**

Refer to Report No. EED32I00089501 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

