

## TEST REPORT

**Product** : Smart Security Light  
**Trade mark** : MAXIMUS, KUNA  
**Model/Type reference** : SPL06-07A1W4-BKT, SPL06-07A1W4-ORB,  
SPL08-07A1W4-BKT, SPL08-07A1W4-ORB,  
SPL09-05A1W4-BKT, SPL09-05A1W4-ORB,  
SPL11-07A1W4-BKT, SPL11-07A1W4-ORB  
**Serial Number** : N/A  
**Report Number** : EED32H00200503  
**FCC ID** : 2AD7D-KNP01  
**Date of Issue** : Nov. 25, 2015  
**Test Standards** : 47 CFR Part 15 Subpart C (2014)  
**Test result** : PASS

Prepared for:

**Shenzhen Jiawei Photovoltaic Lighting Co., Ltd.**  
**No.1, 2, 3, 4, Xinfu Industry Zone, Central Community, Pingdi Road,**  
**Longgang District, Shenzhen City, Guangdong Province, P.R. China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**



Compiled by:

Ware Xin

Reviewed by:

Emen - Li

Approved by:

Sheek, Luo

Date:

Nov. 25, 2015

Report Seal

Sheek Luo

Lab supervisor

Check No.: 2295532334

## 2 Version

Version No.	Date	Description
00	Nov. 25, 2015	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark: All test are according to ANSI C63.10-2013 and ANSI C63.4-2014

The tested sample(s) and the sample information are provided by the client.

Model No.: SPL06-07A1W4-BKT, SPL06-07A1W4-ORB, SPL08-07A1W4-BKT, SPL08-07A1W4-ORB, SPL09-05A1W4-BKT, SPL09-05A1W4-ORB, SPL11-07A1W4-BKT, SPL11-07A1W4-ORB

Only the Model SPL06-07A1W4-BKT was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on color, size and package.

## 4 Content


<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 TEST FACILITY	8
6.7 DEVIATION FROM STANDARDS	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.10 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2)	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>13</b>
Appendix A) Conducted Peak Output Power	14
Appendix B) 6dB Occupied Bandwidth	18
Appendix C) Band-edge for RF Conducted Emissions	22
Appendix D) RF Conducted Spurious Emissions	25
Appendix E) Power Spectral Density	32
Appendix F) Antenna Requirement	36
Appendix G) AC Power Line Conducted Emission	37
Appendix H) Restricted bands around fundamental frequency (Radiated)	40
Appendix I) Radiated Spurious Emissions	42
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP</b>	<b>50</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT</b>	<b>52</b>



## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

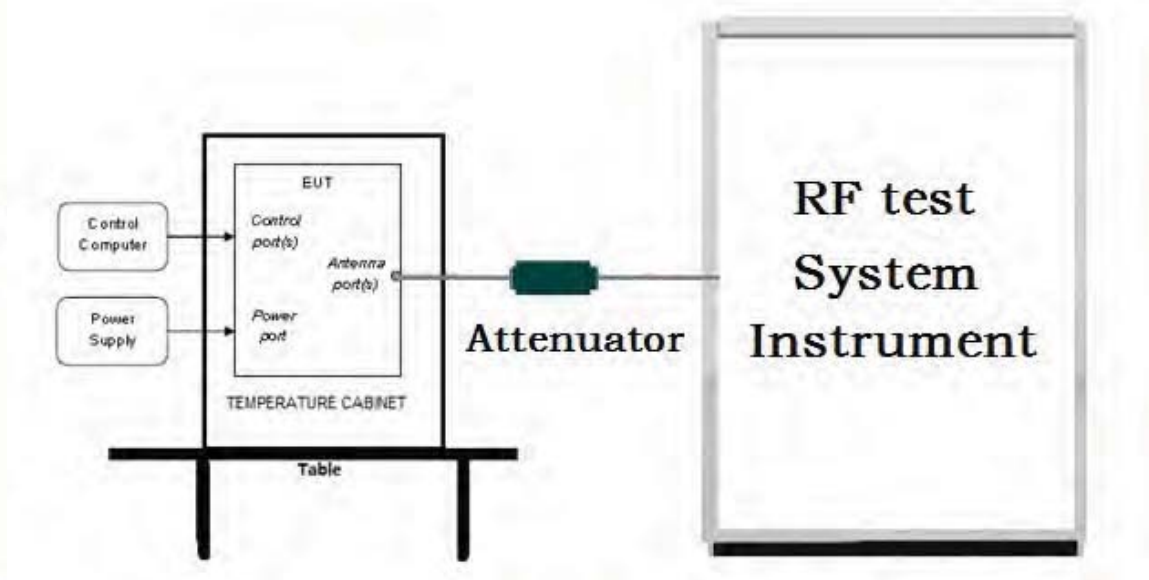

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

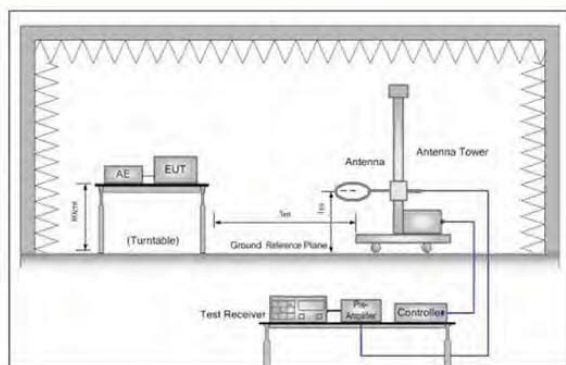


Figure 1. Below 30MHz

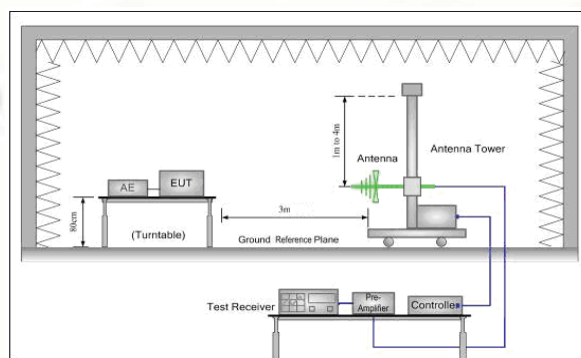


Figure 2. 30MHz to 1GHz


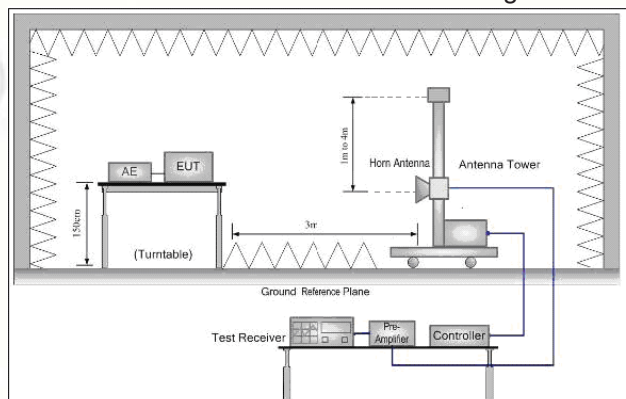


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

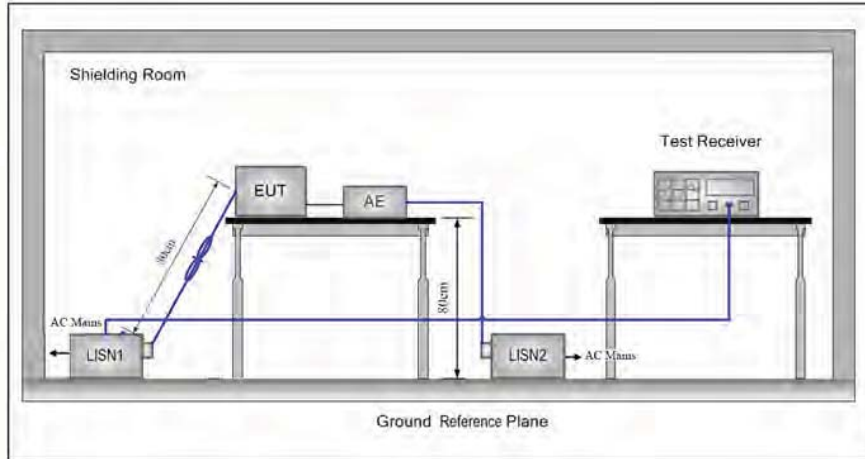

## 5.2 Test Environment

Operating Environment:	
Temperature:	23 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. (Dutycycle>98%)			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
EIRP(dBm)	16.19	16.34	16.61	17.79				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
EIRP(dBm)	16.14	16.03	15.79	15.34	15.11	14.99	14.90	14.80
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
EIRP(dBm)	16.86	16.76	16.65	16.51	16.40	16.27	16.11	16.01

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20).

## 6 General Information

### 6.1 Client Information

Applicant:	Shenzhen Jiawei Photovoltaic Lighting Co., Ltd.
Address of Applicant:	No.1, 2, 3, 4, Xinfu Industry Zone, Central Community, Pingdi Road, Longgang District, Shenzhen City, Guangdong Province, P.R. China
Manufacturer:	Shenzhen Jiawei Photovoltaic Lighting Co., Ltd. Gaoqiao Subsidiary
Address of Manufacturer:	A, B, C, D Plants, No.4, Fugao East Road, Gaoqiao Community, Pingdi Road, Longgang District, Shenzhen City, Guangdong Province, P.R. China
Factory:	Shenzhen Jiawei Photovoltaic Lighting Co., Ltd. Gaoqiao Subsidiary
Address of Factory:	A, B, C, D Plants, No.4, Fugao East Road, Gaoqiao Community, Pingdi Road, Longgang District, Shenzhen City, Guangdong Province, P.R. China

### 6.2 General Description of EUT

Product Name:	Smart Security Light
Mode No.(EUT):	SPL06-07A1W4-BKT, SPL06-07A1W4-ORB, SPL08-07A1W4-BKT, SPL08-07A1W4-ORB, SPL09-05A1W4-BKT, SPL09-05A1W4-ORB, SPL11-07A1W4-BKT, SPL11-07A1W4-ORB
Test Mode No.:	SPL06-07A1W4-BKT
Trade Mark:	MAXIMUS, KUNA
EUT Supports Radios application:	Wlan 2.4GHz 802.11b/g/n(HT20)
Power Supply:	AC 120V/60Hz
Sample Received Date:	Oct. 16, 2015
Sample tested Date:	Oct. 16, 2015 to Nov. 09, 2015

### 6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz						
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels						
Channel Separation:	5MHz						
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)						
Sample Type:	Fixed production						
Antenna Type and Gain:	Type: Integral Gain:4dBi						
Test Voltage:	AC 120V/60Hz						
Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		



## 6.4 Description of Support Units

The EUT has been tested independently.

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

## 6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L1910**

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

### **A2LA-Lab Cert. No. 3061.01**

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **FCC-Registration No.: 565659**

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

### **IC-Registration No.: 7408A**

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

### **IC-Registration No.: 7408B**

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

### **NEMKO-Aut. No.: ELA503**

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

### **VCCI**



The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

## 6.7 Deviation from Standards

None.

## 6.8 Abnormalities from Standard Conditions

None.

## 6.9 Other Information Requested by the Customer

None.

## 6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d	---	04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	04-01-2015	03-31-2016

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber	TDK	SAC-3	---	06-02-2013	06-01-2016
TRILOG Broadband Antenna	schwarzbeck	VULB9163	9163-617	07-13-2015	07-29-2016
Microwave Preamplifier	Agilent	8449B	3008A02425	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-30-2015	06-28-2016
Receiver	R&S	ESCI	100435	06-30-2015	06-28-2016
Multi device Controller	matureo	NCD/070/10711112	---	01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	06-30-2015	06-28-2016
LISN	schwarzbeck	NNBM8125	81251548	06-30-2015	06-28-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Temperature/ Humidity Indicator	TAYLOR	1451	1905	07-08-2015	07-06-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA09CL1 2-0395-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX01CA08CL1 2-0393-001	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA04CL1 2-0396-002	---	01-13-2015	01-12-2016
band rejection filter	Sinoscite	FL5CX02CA03CL1 2-0394-001	---	01-13-2015	01-12-2016

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	06-30-2015	06-28-2016
Receiver	R&S	ESCI	100009	06-30-2015	06-28-2016
Temperature/ Humidity Indicator	Belida	TT-512	101	07-09-2015	07-07-2016
Communication test set	Agilent	E5515C	GB47050533	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
LISN	R&S	ENV216	100098	06-30-2015	06-28-2016
LISN	schwarzbeck	NNLK8121	8121-529	06-30-2015	06-28-2016
LISN	ETS-LINDGREN	3850/2	00051952	11-14-2014	11-13-2015
Voltage Probe	R&S	ESH2-Z3	100042	07-09-2014	07-08-2017
Current Probe	R&S	EZ17	100106	07-09-2014	07-08-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017



## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

## Appendix A) Conducted AV Output Power


Result Table

Mode	Channel	Conducted AV Output Power [dBm]	Verdict
11B	LCH	16.19	PASS
11B	MCH	17.79	PASS
11B	HCH	17.22	PASS
11G	LCH	14.8	PASS
11G	MCH	16.14	PASS
11G	HCH	15.47	PASS
11N20SISO	LCH	16.01	PASS
11N20SISO	MCH	16.86	PASS
11N20SISO	HCH	16.42	PASS

Remark: peak detector

## Test Graph

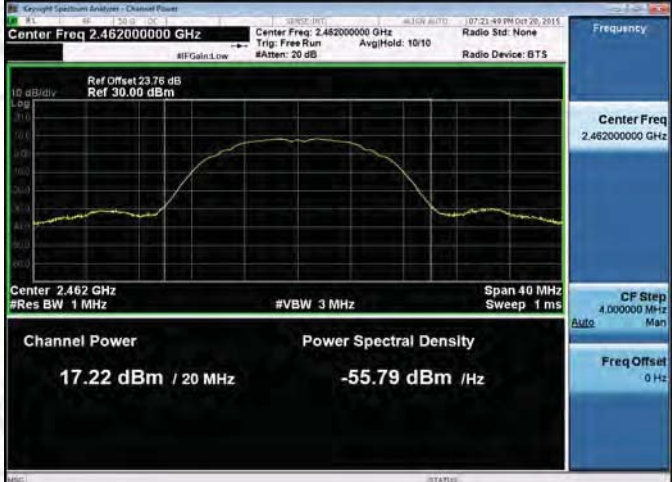


11B/HCH	 <p>Keynote Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 17.22 dBm / 20 MHz</p> <p>Power Spectral Density: -55.79 dBm / Hz</p>
11G/LCH	 <p>Keynote Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 14.80 dBm / 20 MHz</p> <p>Power Spectral Density: -58.21 dBm / Hz</p>
11G/MCH	 <p>Keynote Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 16.14 dBm / 20 MHz</p> <p>Power Spectral Density: -56.87 dBm / Hz</p>



11G/HCH	 <p>Keygraph Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 15.47 dBm / 20 MHz</p> <p>Power Spectral Density: -57.54 dBm /Hz</p>
11N20SISO/LCH	 <p>Keygraph Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 16.01 dBm / 20 MHz</p> <p>Power Spectral Density: -57.00 dBm /Hz</p>
11N20SISO/MCH	 <p>Keygraph Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Channel Power: 16.86 dBm / 20 MHz</p> <p>Power Spectral Density: -56.15 dBm /Hz</p>



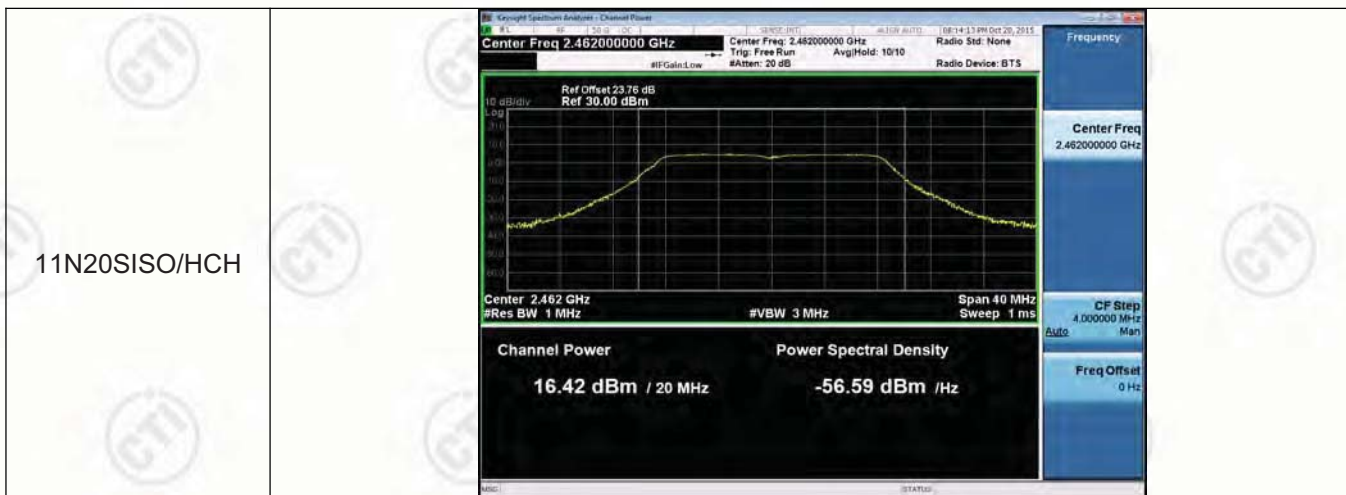


## Appendix B) 6dB Occupied Bandwidth



Result Table

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	10.04	13.916	PASS
11B	MCH	10.08	13.948	PASS
11B	HCH	10.07	13.952	PASS
11G	LCH	16.30	16.458	PASS
11G	MCH	16.32	16.446	PASS
11G	HCH	16.32	16.456	PASS
11N20SISO	LCH	17.18	17.651	PASS
11N20SISO	MCH	17.05	17.643	PASS
11N20SISO	HCH	17.08	17.650	PASS

Remark: peak detector

## Test Graph

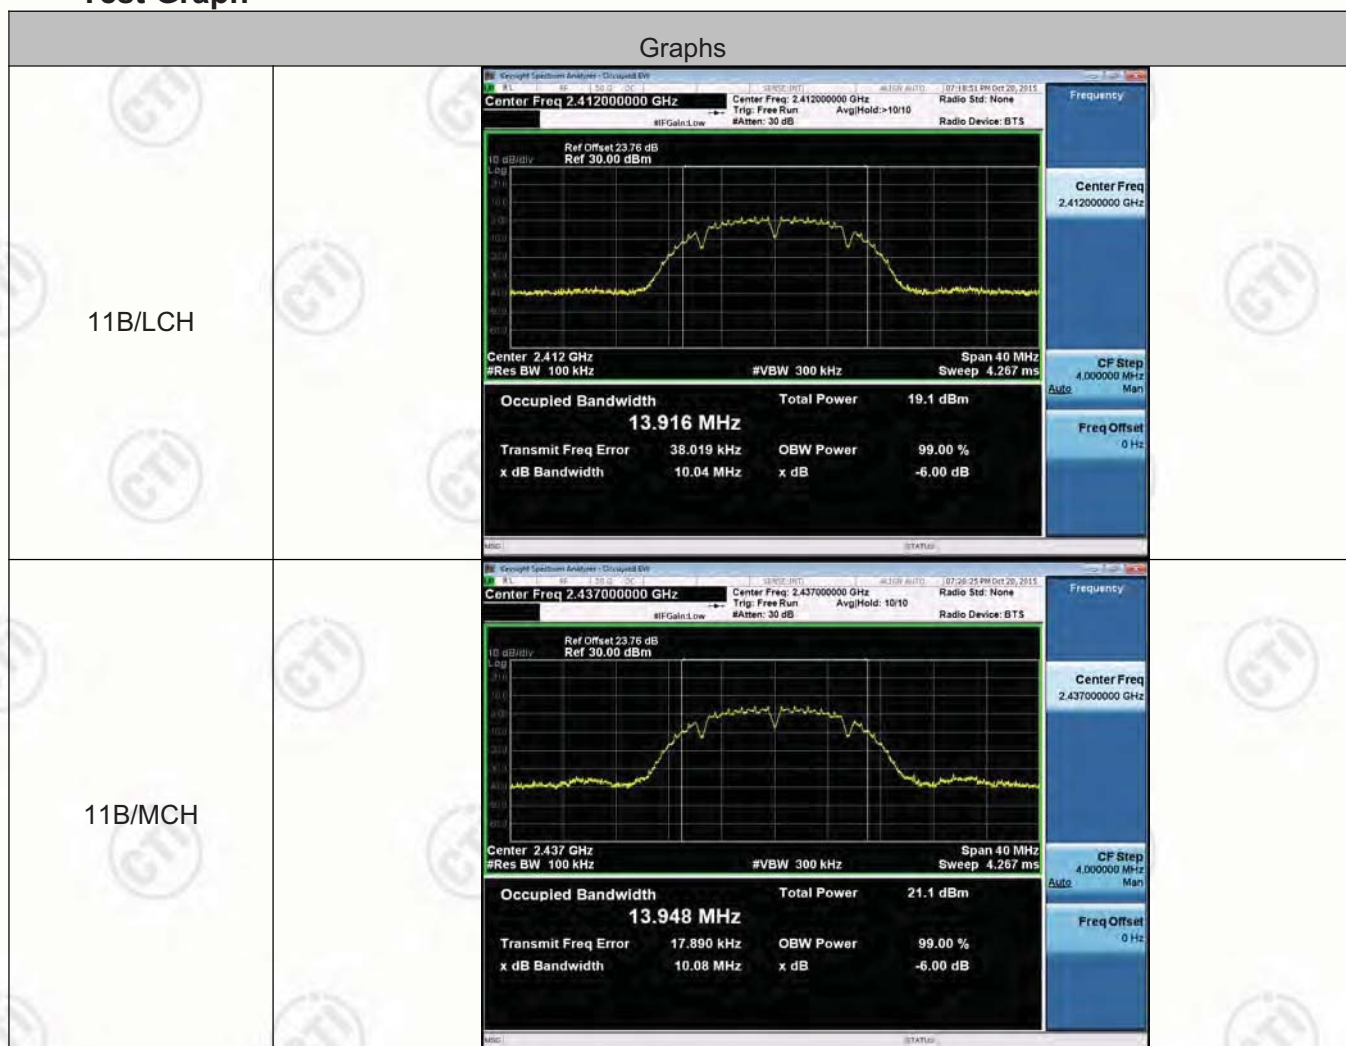

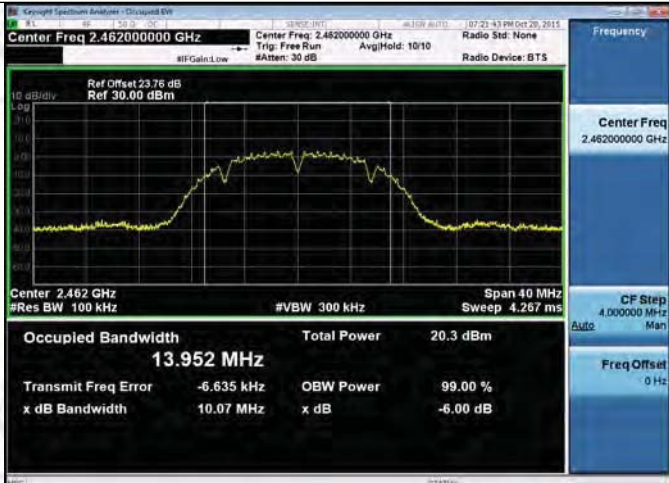11B/HCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 40 MHz Sweep: 4.267 ms</p> <p>Occupied Bandwidth: 13.952 MHz</p> <p>Total Power: 20.3 dBm</p> <p>Transmit Freq Error: -6.635 kHz</p> <p>x dB Bandwidth: 10.07 MHz</p> <p>OBW Power: 99.00 %</p> <p>Freq Offset: 0 Hz</p>
11G/LCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 40 MHz Sweep: 4.267 ms</p> <p>Occupied Bandwidth: 16.458 MHz</p> <p>Total Power: 13.5 dBm</p> <p>Transmit Freq Error: -2.728 kHz</p> <p>x dB Bandwidth: 16.30 MHz</p> <p>OBW Power: 99.00 %</p> <p>Freq Offset: 0 Hz</p>
11G/MCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 23.76 dB Ref: 30.00 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 40 MHz Sweep: 4.267 ms</p> <p>Occupied Bandwidth: 16.446 MHz</p> <p>Total Power: 14.9 dBm</p> <p>Transmit Freq Error: -12.254 kHz</p> <p>x dB Bandwidth: 16.32 MHz</p> <p>OBW Power: 99.00 %</p> <p>Freq Offset: 0 Hz</p>



11G/HCH	 <p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 16.456 MHz</p> <p>Total Power: 14.2 dBm</p> <p>Transmit Freq Error: -20.118 kHz</p> <p>x dB Bandwidth: 16.32 MHz</p>
11N20SISO/LCH	 <p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 17.651 MHz</p> <p>Total Power: 14.6 dBm</p> <p>Transmit Freq Error: 14.298 kHz</p> <p>x dB Bandwidth: 17.18 MHz</p>
11N20SISO/MCH	 <p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 17.643 MHz</p> <p>Total Power: 15.4 dBm</p> <p>Transmit Freq Error: 2.961 kHz</p> <p>x dB Bandwidth: 17.05 MHz</p>





## Appendix C) Band-edge for RF Conducted Emissions

Result Table


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	2.524	-45.748	-27.48	PASS
11B	HCH	3.599	-46.242	-26.40	PASS
11G	LCH	-4.013	-45.812	-34.01	PASS
11G	HCH	-3.668	-45.452	-33.67	PASS
11N20SISO	LCH	-2.437	-46.162	-32.44	PASS
11N20SISO	HCH	-2.630	-44.183	-32.63	PASS

Test Graph



11G/LCH	 <table><thead><tr><th>N</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.418245 GHz</td><td></td><td></td><td>-4.013 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td></td><td></td><td>-37.482 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td></td><td></td><td>-48.229 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.373395 GHz</td><td></td><td></td><td>-45.812 dBm</td></tr></tbody></table>	N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.418245 GHz			-4.013 dBm	2	N	1	f	2.400000 GHz			-37.482 dBm	3	N	1	f	2.390000 GHz			-48.229 dBm	4	N	1	f	2.373395 GHz			-45.812 dBm
N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.418245 GHz			-4.013 dBm																																		
2	N	1	f	2.400000 GHz			-37.482 dBm																																		
3	N	1	f	2.390000 GHz			-48.229 dBm																																		
4	N	1	f	2.373395 GHz			-45.812 dBm																																		
11G/HCH	 <table><thead><tr><th>N</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.48700 GHz</td><td></td><td></td><td>-3.668 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td></td><td></td><td>-48.015 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td></td><td></td><td>-47.684 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48500 GHz</td><td></td><td></td><td>-45.452 dBm</td></tr></tbody></table>	N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.48700 GHz			-3.668 dBm	2	N	1	f	2.48350 GHz			-48.015 dBm	3	N	1	f	2.50000 GHz			-47.684 dBm	4	N	1	f	2.48500 GHz			-45.452 dBm
N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.48700 GHz			-3.668 dBm																																		
2	N	1	f	2.48350 GHz			-48.015 dBm																																		
3	N	1	f	2.50000 GHz			-47.684 dBm																																		
4	N	1	f	2.48500 GHz			-45.452 dBm																																		
11N20SISO/LCH	 <table><thead><tr><th>N</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.417010 GHz</td><td></td><td></td><td>-2.437 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td></td><td></td><td>-36.055 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td></td><td></td><td>-47.451 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.356585 GHz</td><td></td><td></td><td>-46.162 dBm</td></tr></tbody></table>	N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.417010 GHz			-2.437 dBm	2	N	1	f	2.400000 GHz			-36.055 dBm	3	N	1	f	2.390000 GHz			-47.451 dBm	4	N	1	f	2.356585 GHz			-46.162 dBm
N	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.417010 GHz			-2.437 dBm																																		
2	N	1	f	2.400000 GHz			-36.055 dBm																																		
3	N	1	f	2.390000 GHz			-47.451 dBm																																		
4	N	1	f	2.356585 GHz			-46.162 dBm																																		



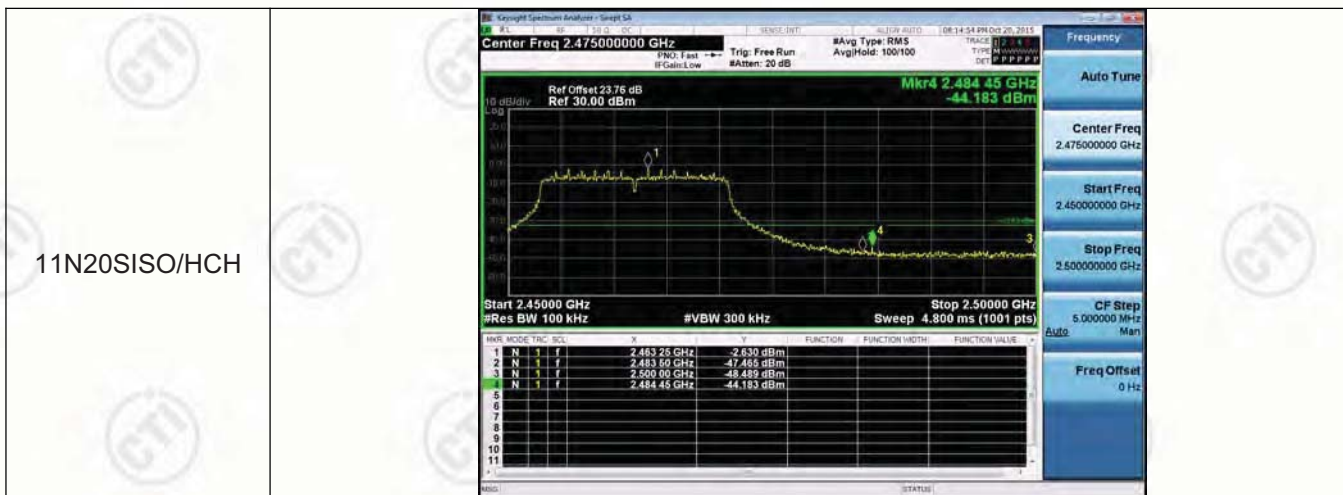




## Appendix D) RF Conducted Spurious Emissions

Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	2.624	<Limit	PASS
11B	MCH	4.238	<Limit	PASS
11B	HCH	3.702	<Limit	PASS
11G	LCH	-3.892	<Limit	PASS
11G	MCH	-2.916	<Limit	PASS
11G	HCH	-3.421	<Limit	PASS
11N20SISO	LCH	-2.615	<Limit	PASS
11N20SISO	MCH	-2.034	<Limit	PASS
11N20SISO	HCH	-2.388	<Limit	PASS

Test Graph


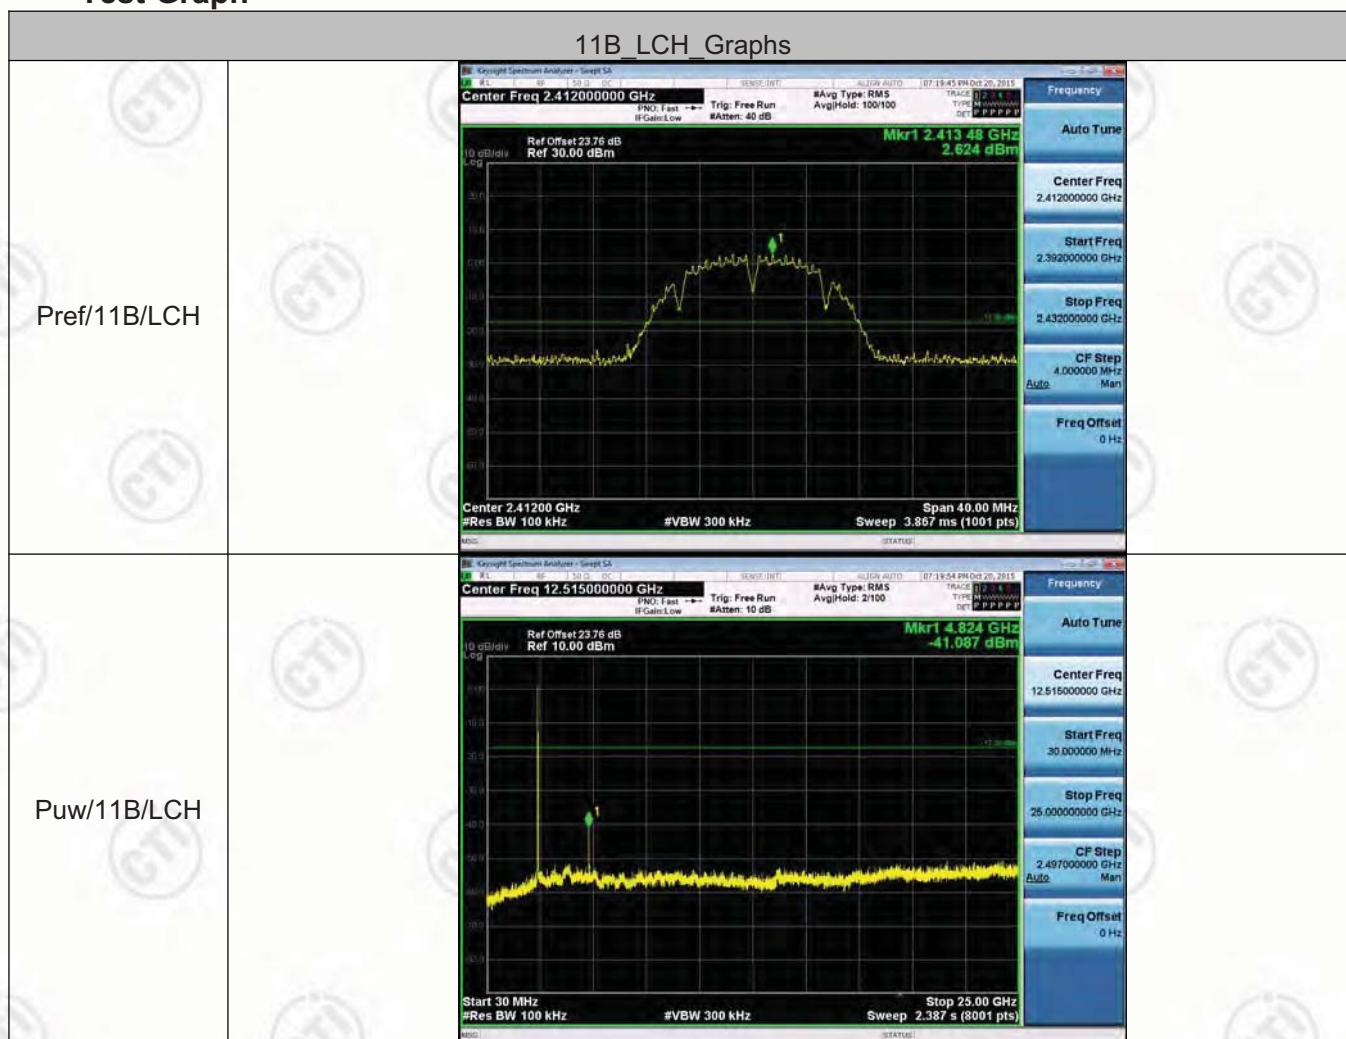








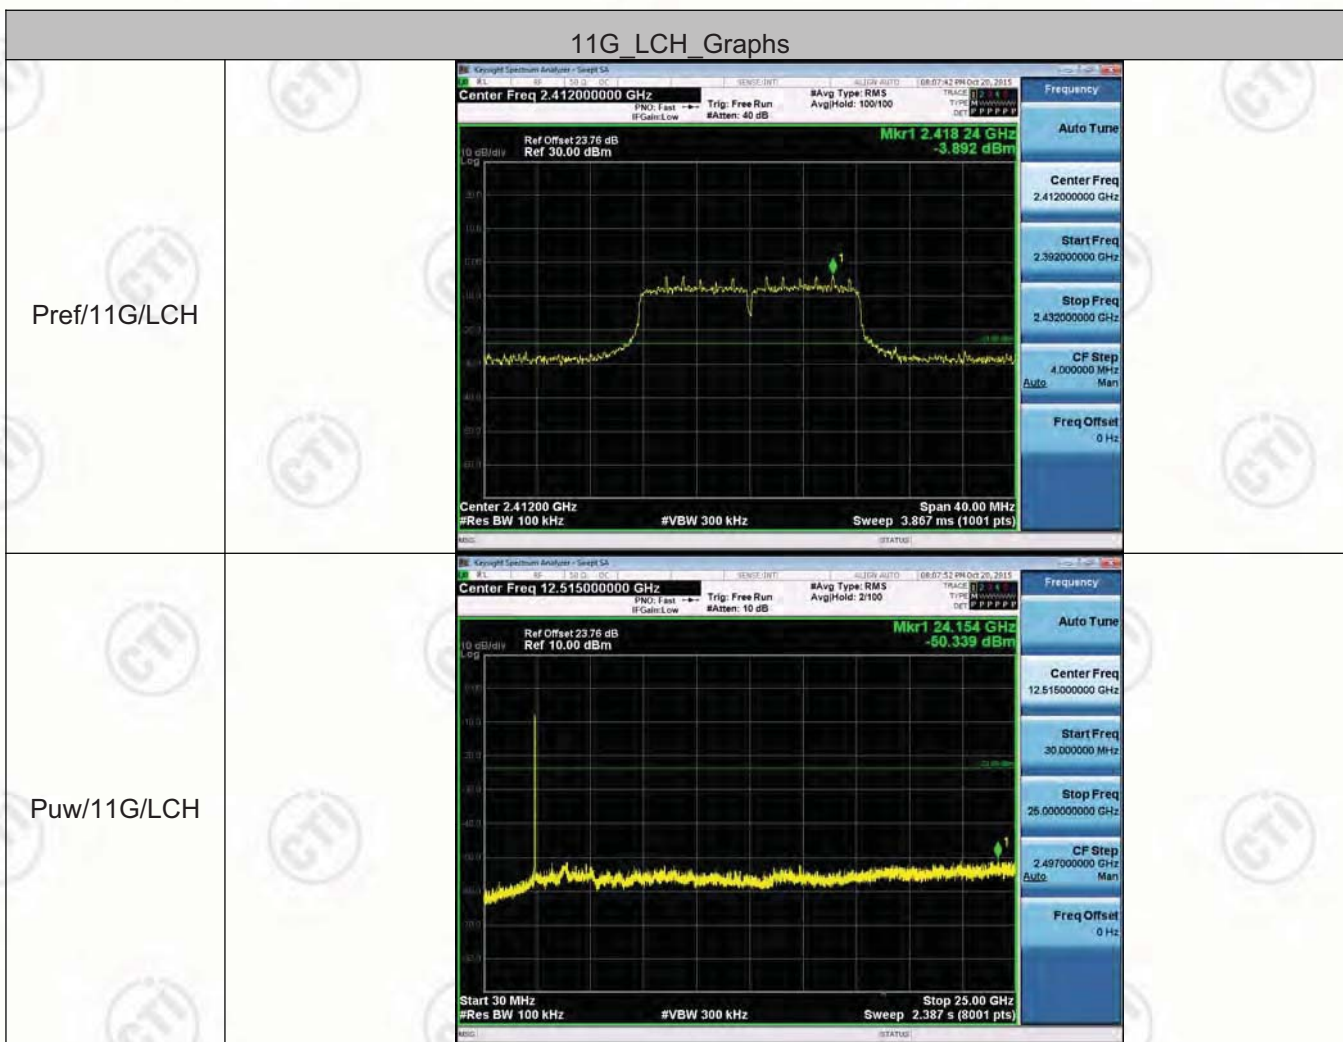
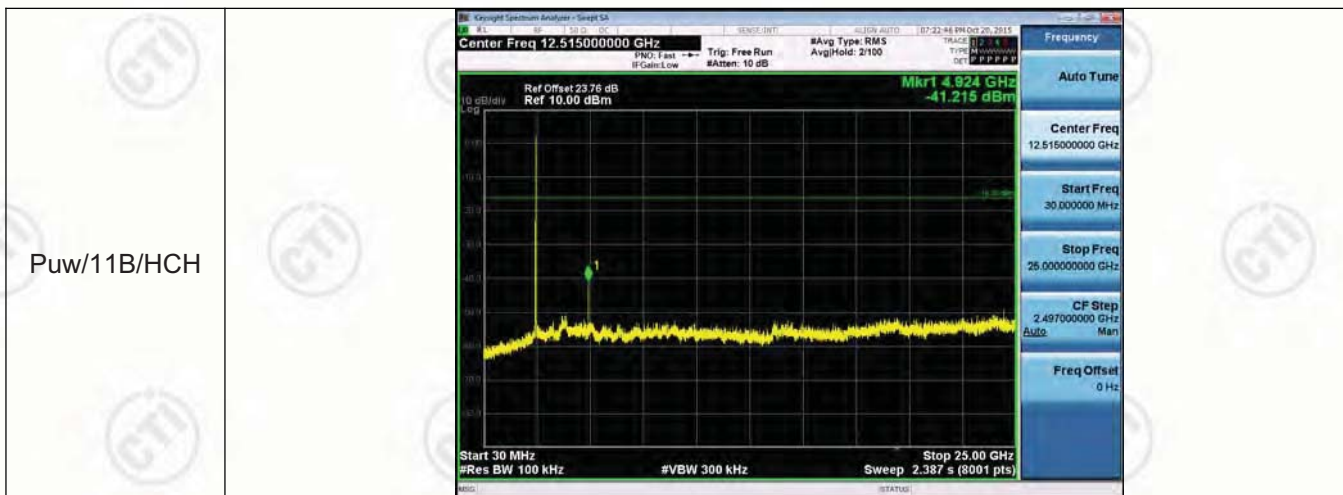




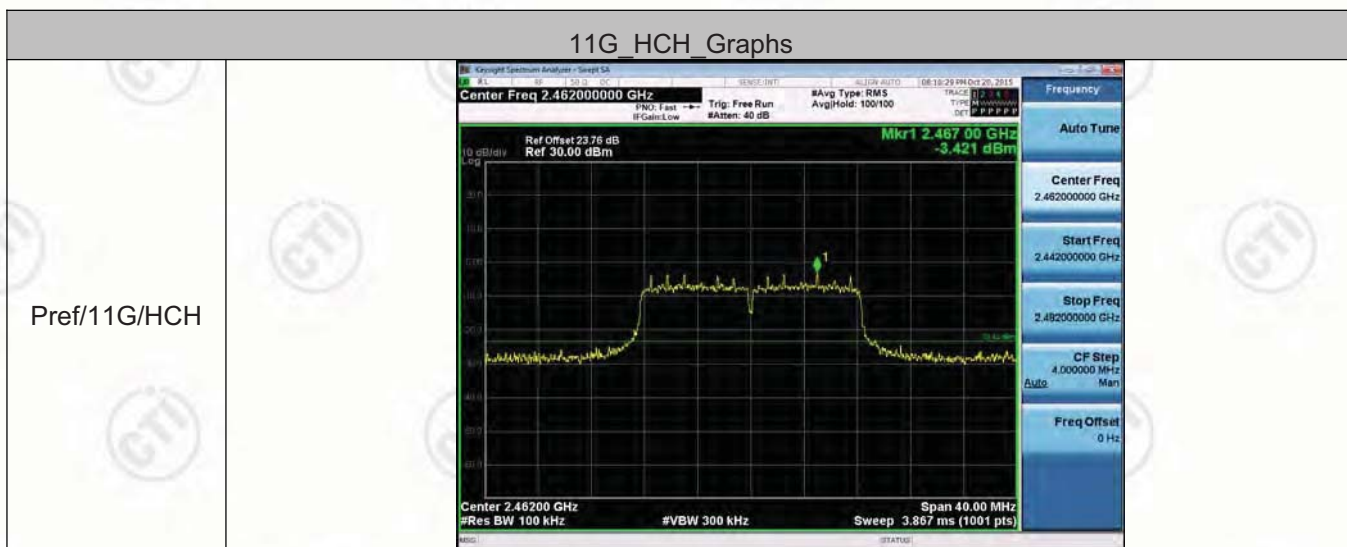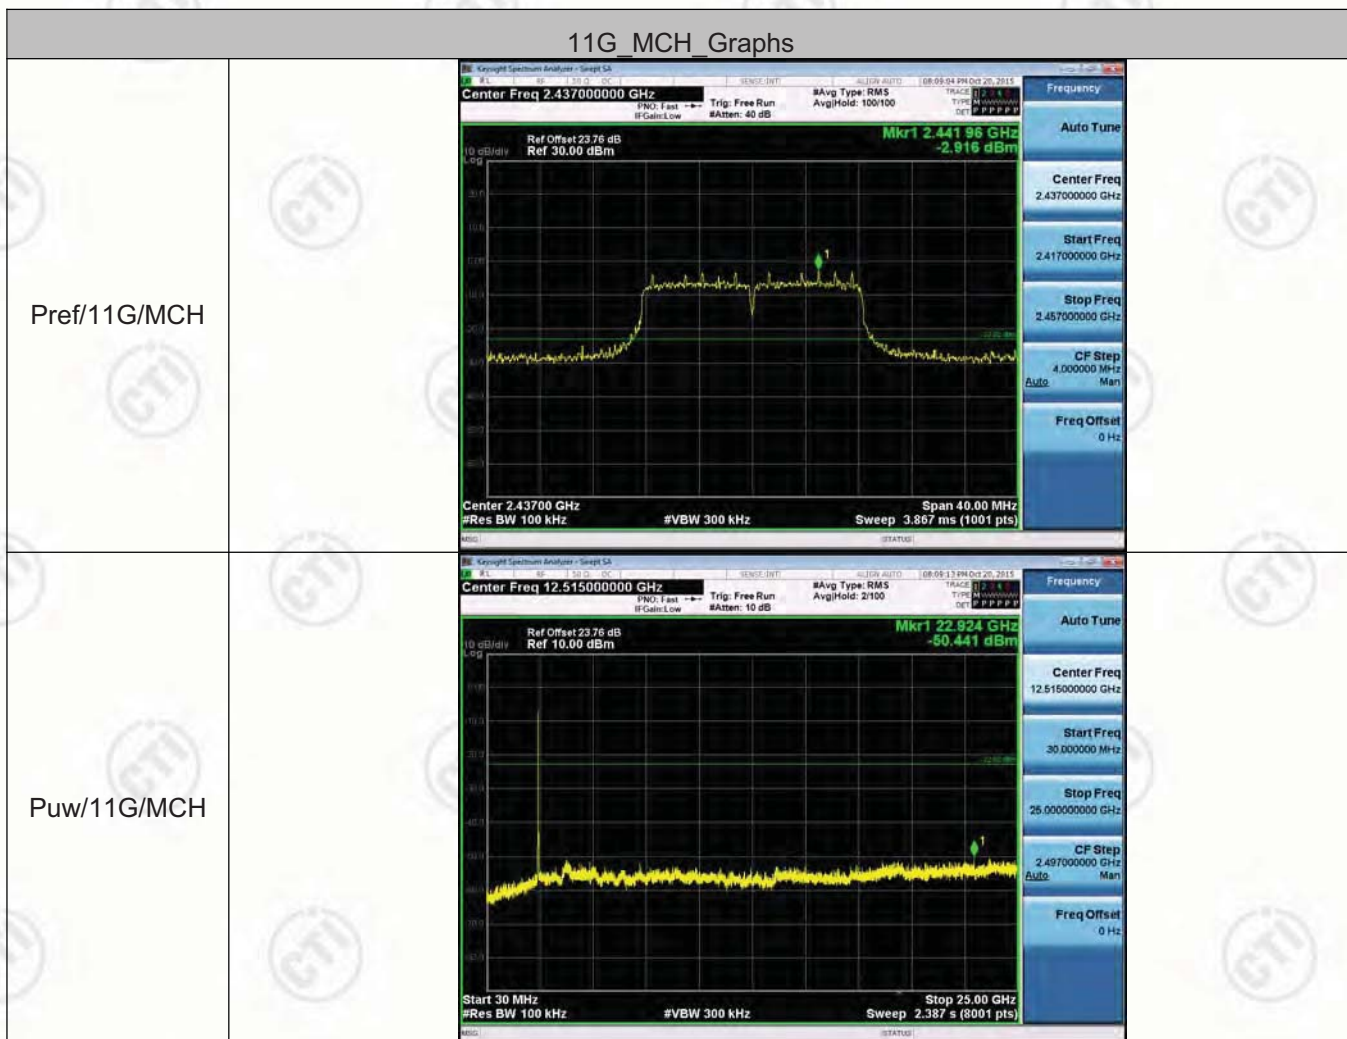


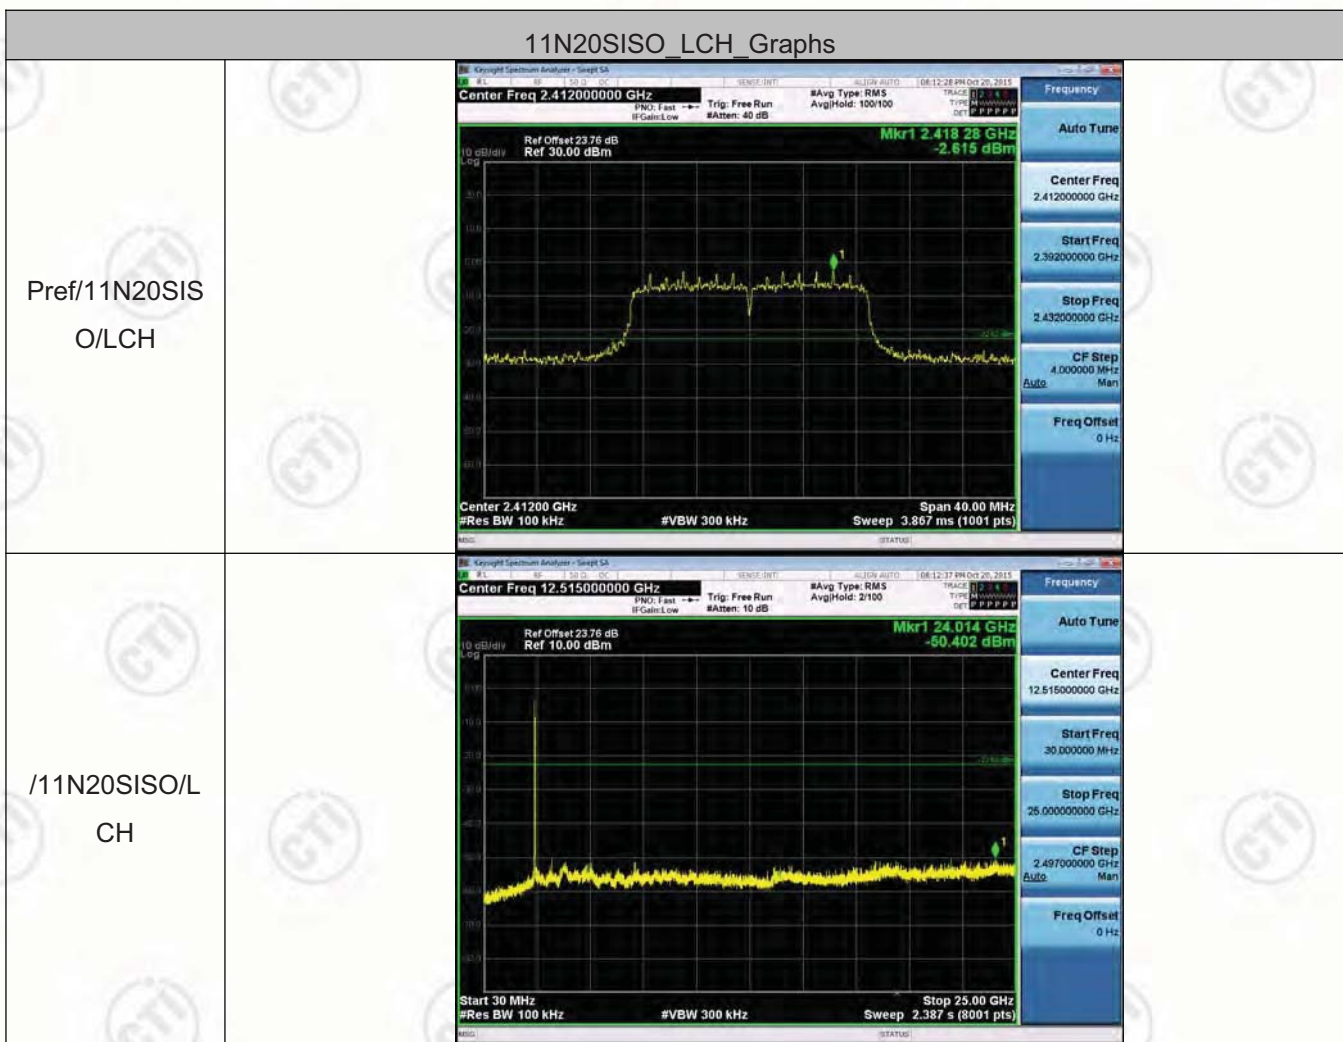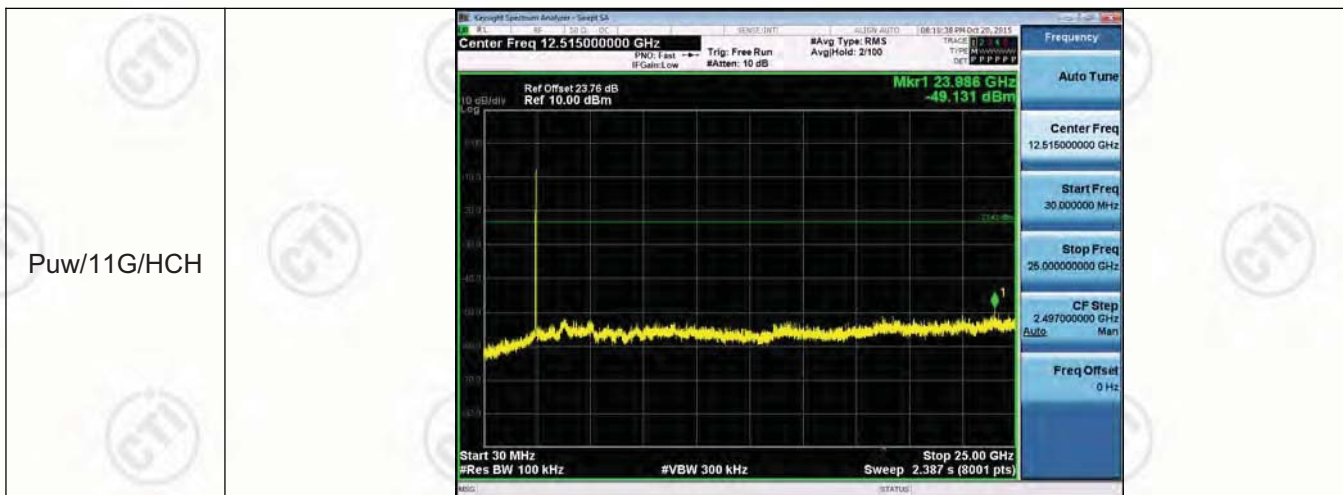



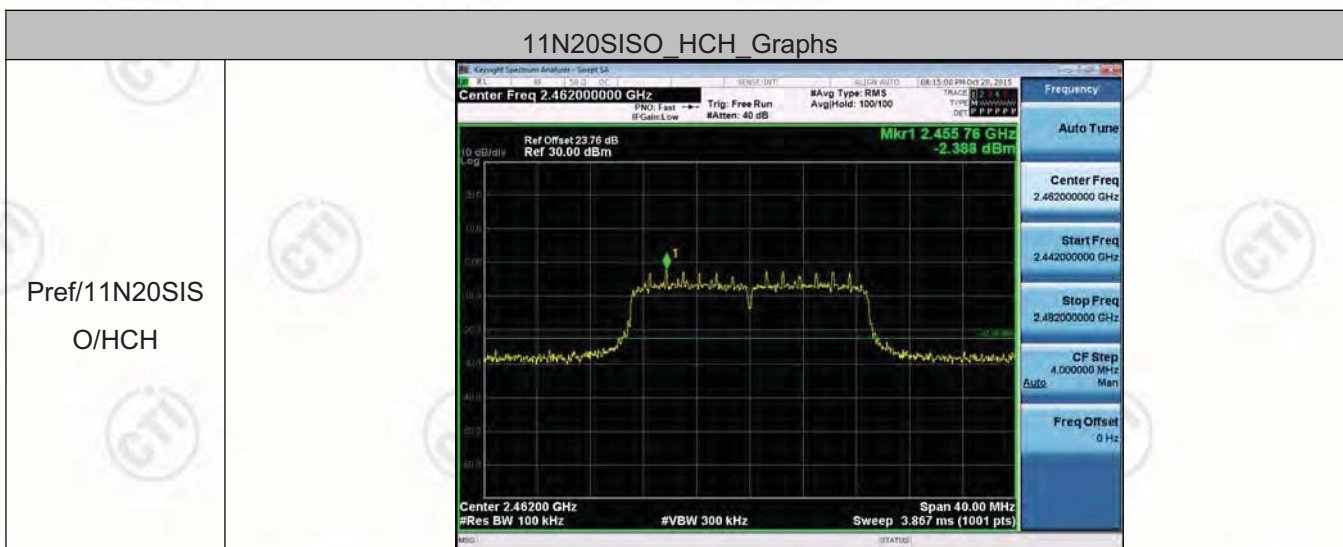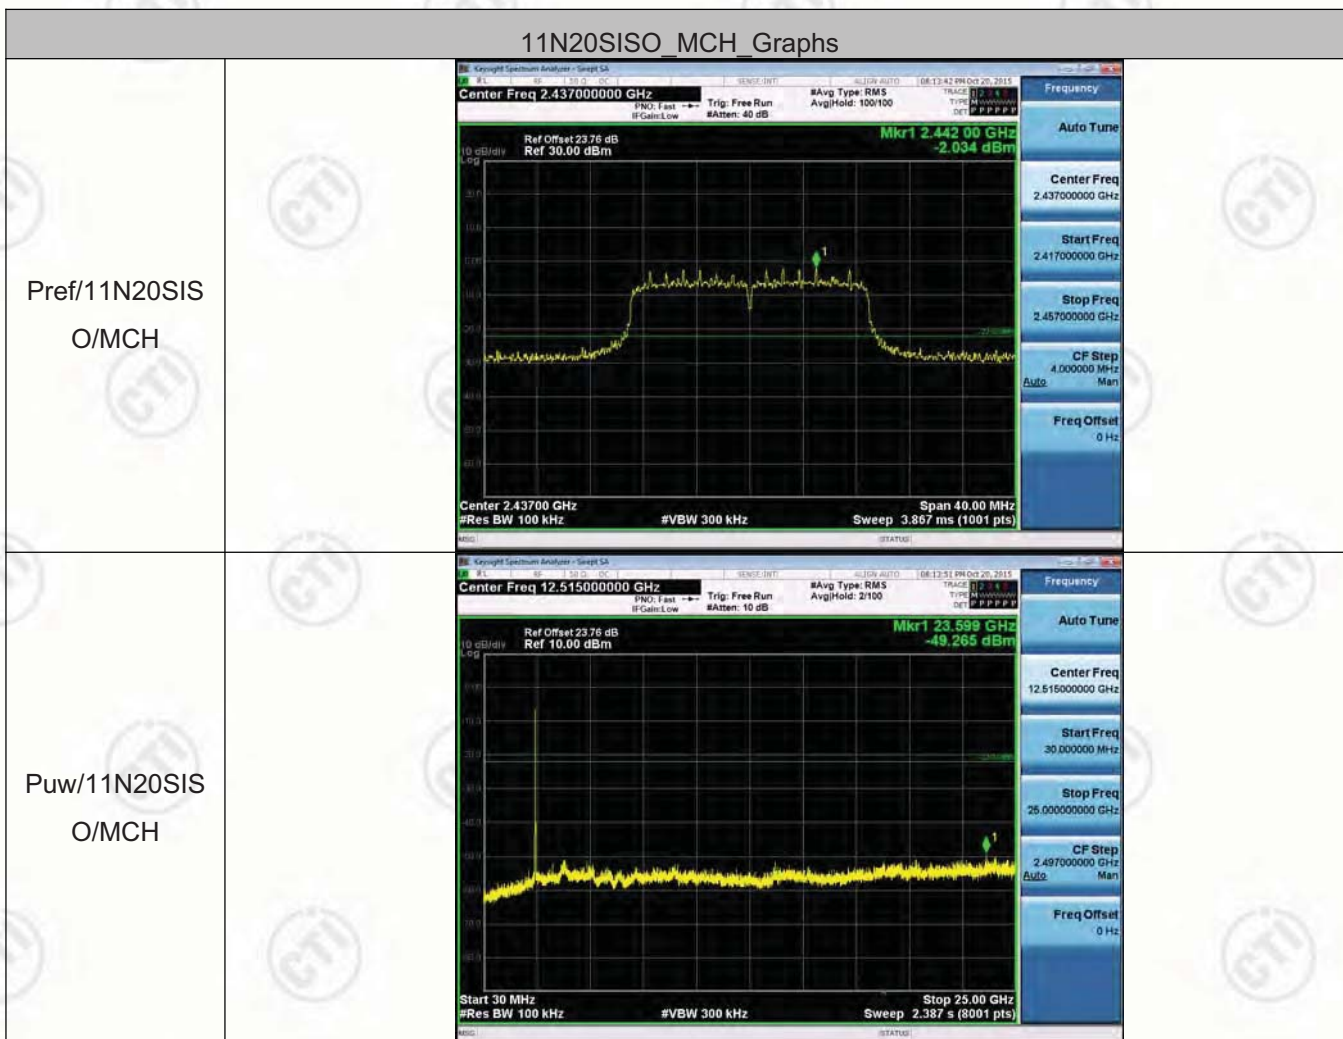



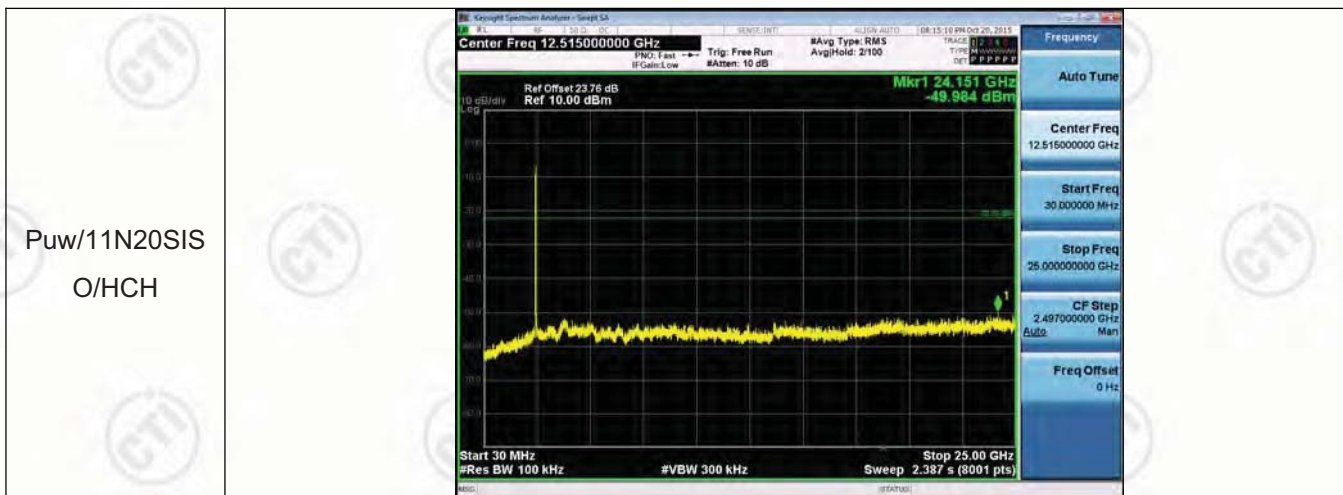

## Appendix E) Power Spectral Density

Result Table

Mode	Channel	Power Spectral Density [dBm]	Verdict
11B	LCH	-12.509	PASS
11B	MCH	-9.891	PASS
11B	HCH	-10.574	PASS
11G	LCH	-20.489	PASS
11G	MCH	-18.032	PASS
11G	HCH	-18.632	PASS
11N20SISO	LCH	-17.503	PASS
11N20SISO	MCH	-16.659	PASS
11N20SISO	HCH	-17.784	PASS


Test Graph



11B/HCH	 <p>Keygraph Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.462740 GHz -10.574 dBm</p> <p>Center 2.462000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 1.593 s (1001 pts)</p> <p>Span 15.11 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45447500 GHz</p> <p>Stop Freq 2.46952500 GHz</p> <p>CF Step 1.510500 MHz Auto</p> <p>Freq Offset 0 Hz</p>
11G/LCH	 <p>Keygraph Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.412905 GHz -20.489 dBm</p> <p>Center 2.412000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.578 s (1001 pts)</p> <p>Span 24.45 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.390775000 GHz</p> <p>Stop Freq 2.424225000 GHz</p> <p>CF Step 2.445000 MHz Auto</p> <p>Freq Offset 0 Hz</p>
11G/MCH	 <p>Keygraph Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.435727 GHz -18.092 dBm</p> <p>Center 2.437000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.581 s (1001 pts)</p> <p>Span 24.48 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.424760000 GHz</p> <p>Stop Freq 2.449240000 GHz</p> <p>CF Step 2.448000 MHz Auto</p> <p>Freq Offset 0 Hz</p>



11G/HCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.468466 GHz -18.632 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.581 s (1001 pts)</p> <p>Span 24.48 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.462000000 GHz</p> <p>Start Freq 2.449760000 GHz</p> <p>Stop Freq 2.474240000 GHz</p> <p>CF Step 2.448000 MHz Man</p> <p>Freq Offset 0 Hz</p>
11N20SISO/LCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.405738 GHz -17.803 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.717 s (1001 pts)</p> <p>Span 25.77 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.412000000 GHz</p> <p>Start Freq 2.399115000 GHz</p> <p>Stop Freq 2.424895000 GHz</p> <p>CF Step 2.577000 MHz Man</p> <p>Freq Offset 0 Hz</p>
11N20SISO/MCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 23.76 dB Ref 10.00 dBm</p> <p>Mkr1 2.443266 GHz -16.659 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.697 s (1001 pts)</p> <p>Span 25.58 MHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.424212500 GHz</p> <p>Stop Freq 2.449787500 GHz</p> <p>CF Step 2.557500 MHz Man</p> <p>Freq Offset 0 Hz</p>

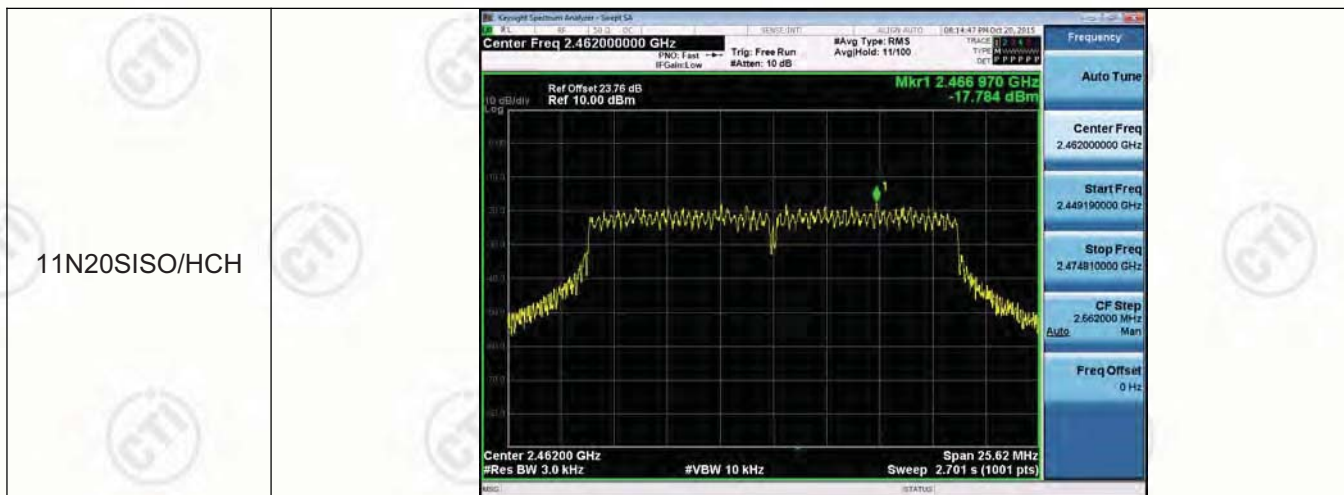

## Appendix F) Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4dBi.

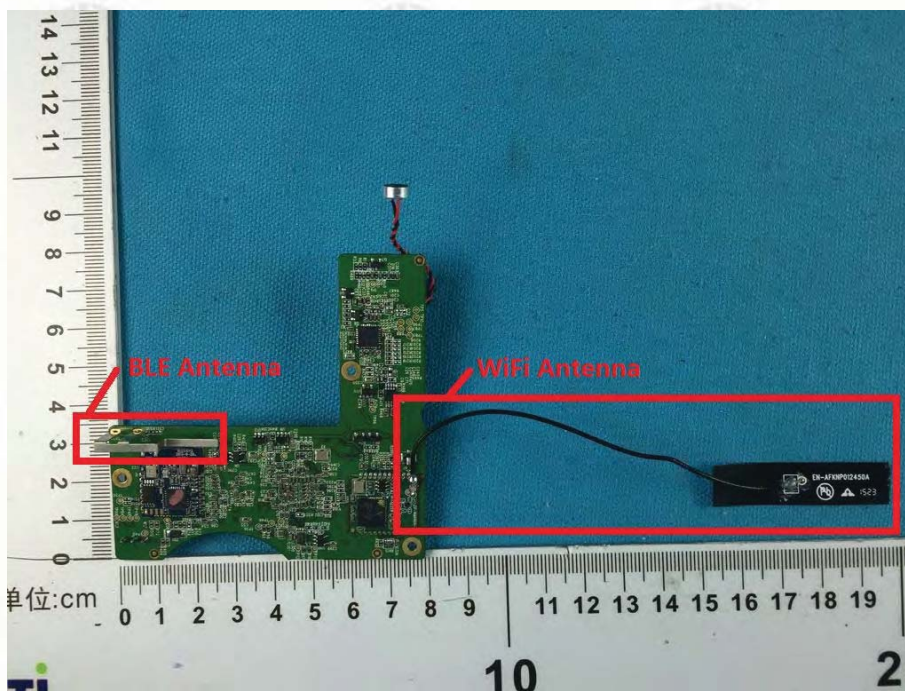



## Appendix G) AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

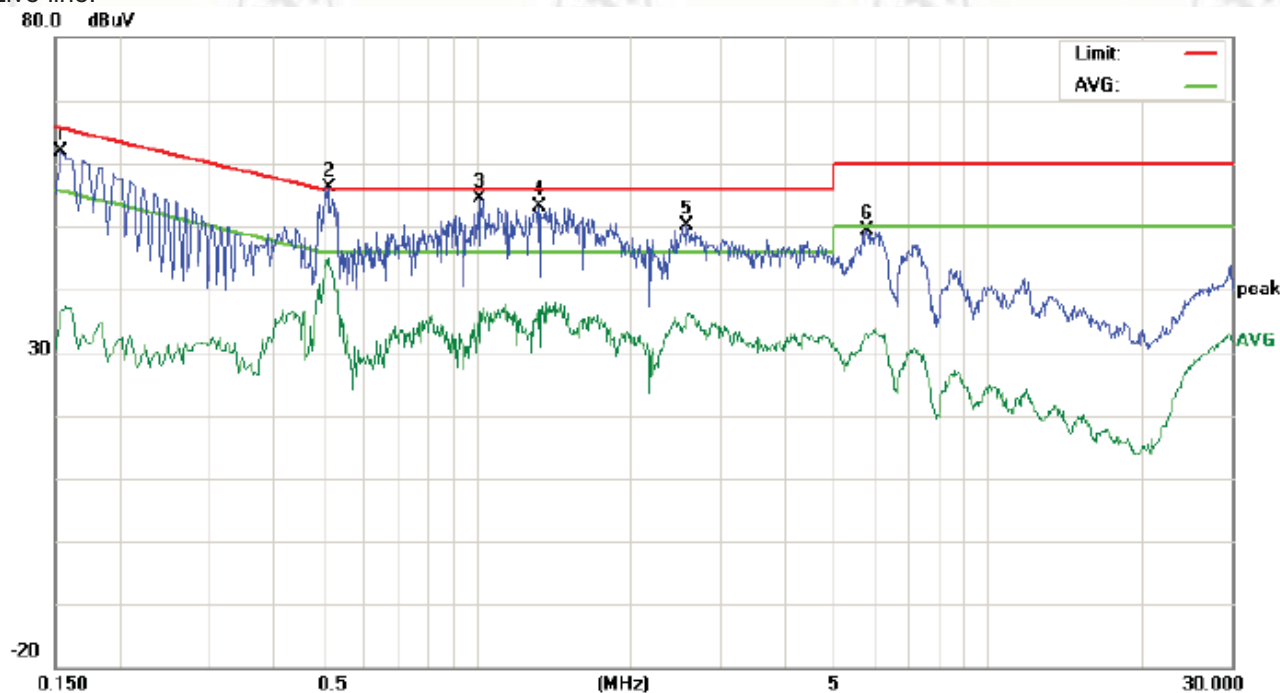

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	52.07	43.40	25.58	9.80	61.87	53.20	35.38	65.78	55.78	-12.58	-20.40	P	
2	0.5140	46.30	42.17	34.39	9.90	56.20	52.07	44.29	56.00	46.00	-3.93	-1.71	P	
3	1.0180	44.40	39.10	24.58	10.00	54.40	49.10	34.58	56.00	46.00	-6.90	-11.42	P	
4	1.3300	43.11	36.35	24.57	10.00	53.11	46.35	34.57	56.00	46.00	-9.65	-11.43	P	
5	2.5940	40.09		25.25	10.00	50.09		35.25	56.00	46.00	-5.91	-10.75	P	
6	5.8220	39.41		23.12	10.00	49.41		33.12	60.00	50.00	-10.59	-16.88	P	

Neutral line:

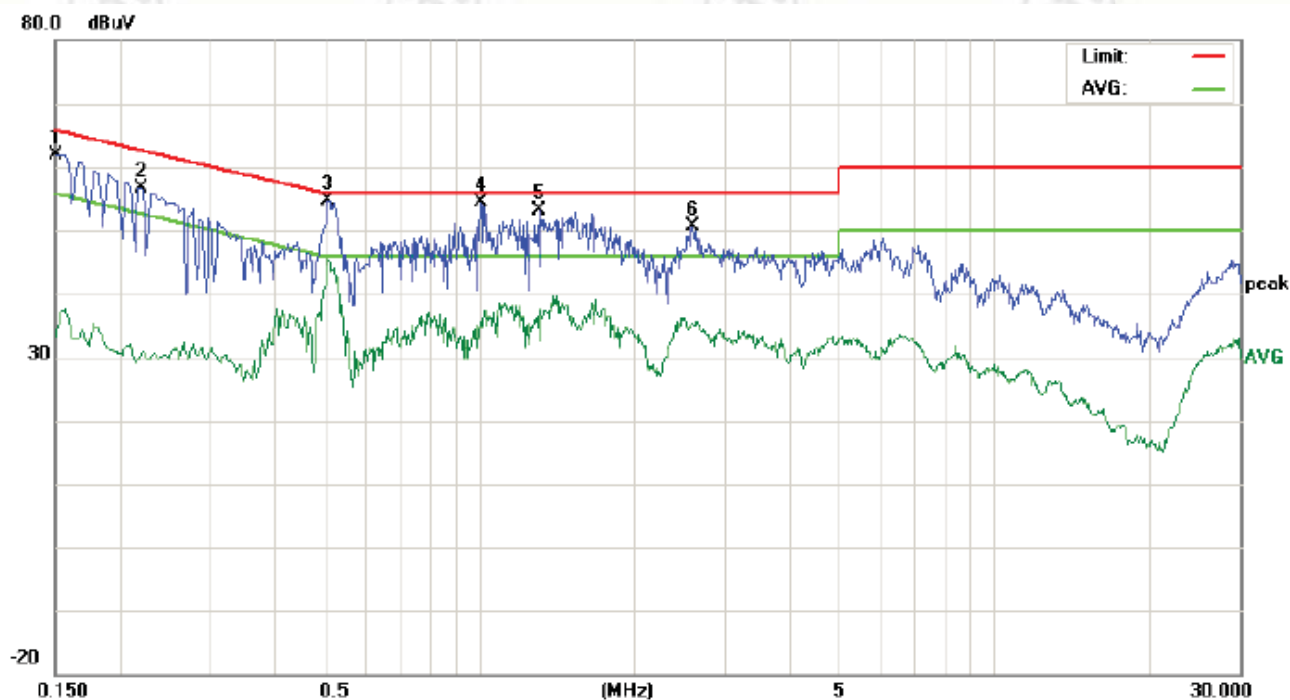

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	52.07	43.89	24.65	9.80	61.87	53.69	34.45	65.99	55.99	-12.30	-21.54	P	
2	0.2220	52.07	37.97	19.92	9.80	61.87	47.77	29.72	62.74	52.74	-14.97	-23.02	P	
3	0.5100	44.81	41.40	34.38	9.90	54.71	51.30	44.28	56.00	46.00	-4.70	-1.72	P	
4	1.0100	44.39	37.47	25.64	10.00	54.39	47.47	35.64	56.00	46.00	-8.53	-10.36	P	
5	1.3099	43.08	36.00	25.43	10.00	53.08	46.00	35.43	56.00	46.00	-10.00	-10.57	P	
6	2.5980	40.59	33.04	24.15	10.00	50.59	43.04	34.15	56.00	46.00	-12.96	-11.85	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



## Appendix H) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

**Test plot as follows:**

Worse case mode:		802.11b (11Mbps)								
Frequency (MHz)	Read Level (dBμV)	Level (dBμV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Premap Factor (dB)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis	Remark	Test channel
2390.00	42.93	42.53	32.53	4.28	37.21	74	-31.47	H	PK	Lowest
2390.00	44.50	44.10	32.53	4.28	37.21	74	-29.90	V	PK	Lowest
2483.50	43.62	43.65	32.71	4.51	37.19	74	-30.35	H	PK	Highest
2483.50	45.86	45.89	32.71	4.51	37.19	74	-28.11	V	PK	Highest

Worse case mode:		802.11g (6Mbps)								
Frequency (MHz)	Read Level (dBμV)	Level (dBμV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Premap Factor (dB)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis	Remark	Test channel
2390.00	48.15	47.75	32.53	4.28	37.21	74	-26.25	H	PK	Lowest
2390.00	46.68	46.28	32.53	4.28	37.21	74	-27.72	V	PK	Lowest
2483.50	45.77	45.80	32.71	4.51	37.19	74	-28.20	H	PK	Highest
2483.50	49.63	49.66	32.71	4.51	37.19	74	-24.34	V	PK	Highest

Worse case mode:		802.11n(HT20) (6.5Mbps)								
Frequency (MHz)	Read Level (dBμV)	Level (dBμV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Premap Factor (dB)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis	Remark	Test channel
2390.00	49.42	49.02	32.53	4.28	37.21	74	-24.98	H	PK	Lowest
2390.00	44.68	44.28	32.53	4.28	37.21	74	-29.72	V	PK	Lowest
2483.50	44.86	44.89	32.71	4.51	37.19	74	-29.11	H	PK	Highest
2483.50	48.26	48.29	32.71	4.51	37.19	74	-25.71	V	PK	Highest

**Note:**

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## Appendix I) Radiated Spurious Emissions


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre)..</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				



# **Radiated Spurious Emissions test Data:** **Radiated Emission below 1GHz**

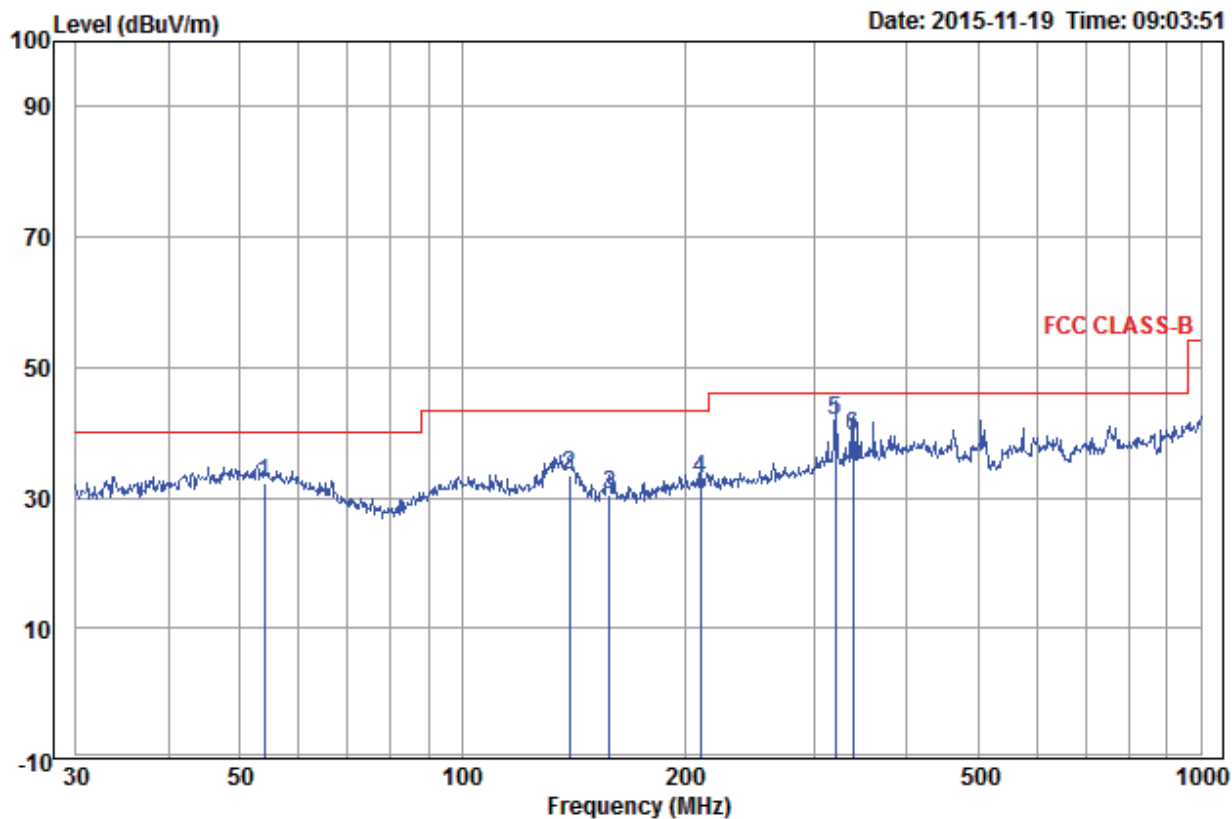

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	53.88	14.57	1.41	16.22	32.20	40.00	-7.80	Horizontal	
2	139.85	10.30	1.58	21.51	33.39	43.50	-10.11	Horizontal	
3	158.11	10.05	1.70	18.73	30.48	43.50	-13.02	Horizontal	
4	210.05	11.78	2.24	18.95	32.97	43.50	-10.53	Horizontal	
5 pp	319.94	14.04	2.52	25.20	41.76	46.00	-4.24	Horizontal	
6	338.40	14.52	2.64	22.20	39.36	46.00	-6.64	Horizontal	

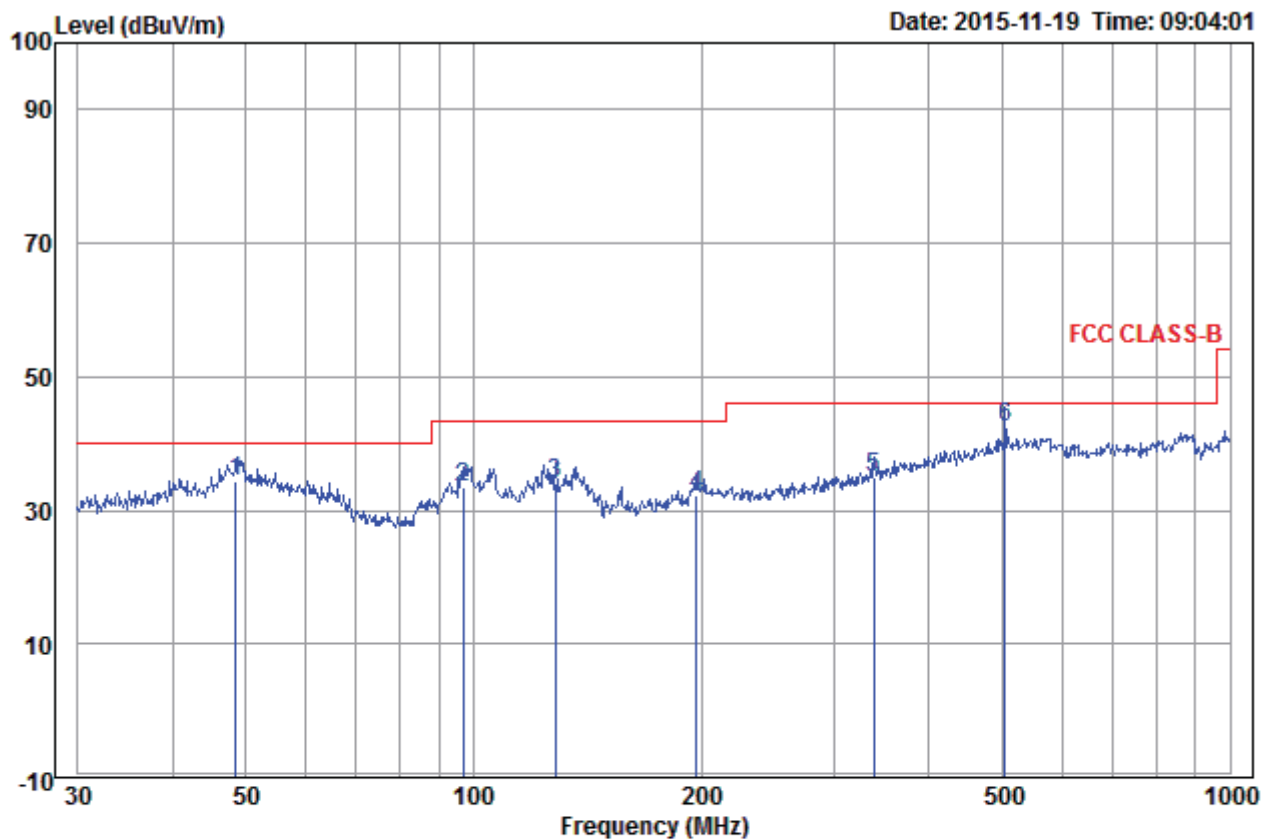

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	48.50	14.98	1.28	18.07	34.33	40.00	-5.67	Vertical	
2	96.77	12.58	1.58	19.19	33.35	43.50	-10.15	Vertical	
3	128.11	11.06	1.58	21.46	34.10	43.50	-9.40	Vertical	
4	197.20	11.51	2.18	18.70	32.39	43.50	-11.11	Vertical	
5	338.40	14.52	2.64	17.89	35.05	46.00	-10.95	Vertical	
6 pp	504.71	18.42	3.14	20.81	42.37	46.00	-3.63	Vertical	

**Transmitter Emission above 1GHz**

Test mode:		802.11b(11Mbps)	Test channel:		Lowest				
Frequency (MHz)	Antenna Factor (dB/m)	Preamplifier Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1329.894	30.52	38.24	2.66	49.56	44.50	74	-29.50	Pass	H
1659.574	31.16	37.73	2.97	55.54	51.94	74	-22.06	Pass	H
2995.538	33.59	37.10	5.61	50.51	52.61	74	-21.39	Pass	H
4824.000	34.73	36.82	5.1	49.18	52.19	74	-21.81	Pass	H
7236.000	36.42	37.45	6.69	47.40	53.06	74	-20.94	Pass	H
9648.000	37.93	37.83	7.70	44.91	52.71	74	-21.29	Pass	H
1135.731	30.07	38.61	2.44	52.19	46.09	74	-27.91	Pass	V
1889.633	31.54	37.43	3.15	48.63	45.89	74	-28.11	Pass	V
3003.173	33.60	37.10	5.62	48.22	50.34	74	-23.66	Pass	V
4824.000	34.73	36.82	5.10	56.52	59.53	74	-14.47	Pass	V
4824.000	34.73	36.82	5.10	49.24	52.25	54	-1.75	Pass	V-AV
7236.000	36.42	37.45	6.69	51.89	57.55	74	-16.45	Pass	V
7236.000	36.42	37.45	6.69	40.67	46.33	54	-7.67	Pass	V-AV
9648.000	37.93	37.83	7.70	43.35	51.15	74	-22.85	Pass	V

Test mode:		802.11b(11Mbps)	Test channel:		Middle				
Frequency (MHz)	Antenna Factor (dB/m)	Preamplifier Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1367.659	30.60	38.18	2.70	49.06	44.18	74	-29.82	Pass	H
1659.574	31.16	37.73	2.97	48.21	44.61	74	-29.39	Pass	H
2995.538	33.59	37.10	5.61	49.47	51.57	74	-22.43	Pass	H
4874.000	34.84	36.81	5.09	43.30	46.42	74	-27.58	Pass	H
7311.000	36.43	37.43	6.76	43.53	49.29	74	-24.71	Pass	H
9748.000	38.03	37.85	7.61	43.95	51.74	74	-22.26	Pass	H
1659.574	31.16	37.73	2.97	47.56	43.96	74	-30.04	Pass	V
1884.829	31.53	37.44	3.15	46.79	44.03	74	-29.97	Pass	V
2995.538	33.59	37.1	5.61	48.11	50.21	74	-23.79	Pass	V
4874.000	34.84	36.81	5.09	57.68	60.80	74	-13.20	Pass	V
4874.000	34.84	36.81	5.09	46.55	49.67	54	-4.33	Pass	V-AV
7311.000	36.43	37.43	6.76	50.78	56.54	74	-17.46	Pass	V
7311.000	36.43	37.43	6.76	43.56	49.32	54	-4.68	Pass	V-AV
9748.000	38.03	37.85	7.61	43.62	51.41	74	-22.59	Pass	V



Test mode:		802.11b(11Mbps)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1296.469	30.45	38.30	2.62	48.04	42.81	74	-31.19	Pass	H
1651.146	31.15	37.74	2.96	47.92	44.29	74	-29.71	Pass	H
2995.538	33.59	37.10	5.61	49.77	51.87	74	-22.13	Pass	H
4924.000	34.94	36.81	5.07	42.46	45.66	74	-28.34	Pass	H
7386.000	36.44	37.42	6.83	42.70	48.55	74	-25.45	Pass	H
9848.000	38.14	37.87	7.53	43.05	50.85	74	-23.15	Pass	H
1659.574	31.16	37.73	2.97	47.56	43.96	74	-30.04	Pass	V
1953.211	31.63	37.35	3.20	45.97	43.45	74	-30.55	Pass	V
3104.217	33.51	37.08	5.60	46.61	48.64	74	-25.36	Pass	V
4924.000	34.94	36.81	5.07	56.10	59.30	74	-14.70	Pass	V
4924.000	34.94	36.81	5.07	47.89	51.09	54	-2.91	Pass	V-AV
7386.000	36.44	37.42	6.83	47.12	52.97	74	-21.03	Pass	V
9848.000	38.14	37.87	7.53	43.29	51.09	74	-22.91	Pass	V

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1326.513	30.52	38.25	2.66	48.61	43.54	74	-30.46	Pass	H
1533.648	30.93	37.91	2.86	48.80	44.68	74	-29.32	Pass	H
2995.538	33.59	37.10	5.61	50.52	52.62	74	-21.38	Pass	H
4824.000	34.73	36.82	5.10	43.61	46.62	74	-27.38	Pass	H
7236.000	36.42	37.45	6.69	42.47	48.13	74	-25.87	Pass	H
9648.000	37.93	37.83	7.70	43.91	51.71	74	-22.29	Pass	H
1740.250	31.30	37.62	3.04	44.36	41.08	74	-32.92	Pass	V
3197.250	33.42	37.06	5.58	45.36	47.30	74	-26.70	Pass	V
4360.500	33.69	36.86	5.29	44.83	46.95	74	-27.05	Pass	V
4824.000	34.73	36.82	5.10	41.26	44.27	74	-29.73	Pass	V
7236.000	36.42	37.45	6.69	42.73	48.39	74	-25.61	Pass	V
9648.000	37.93	37.83	7.70	42.80	50.60	74	-23.40	Pass	V

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1663.803	31.17	37.72	2.97	46.55	42.97	74	-31.03	Pass	H
1832.785	31.45	37.50	3.11	45.85	42.91	74	-31.09	Pass	H
3003.173	33.60	37.10	5.62	50.35	52.47	74	-21.53	Pass	H
4874.000	34.84	36.81	5.09	42.26	45.38	74	-28.62	Pass	H
7311.000	36.43	37.43	6.76	43.49	49.25	74	-24.75	Pass	H
9748.000	38.03	37.85	7.61	43.59	51.38	74	-22.62	Pass	H
1663.803	31.17	37.72	2.97	52.18	48.60	74	-25.40	Pass	V
2995.538	33.59	37.10	5.61	47.20	49.30	74	-24.70	Pass	V
4399.537	33.78	36.86	5.27	45.01	47.20	74	-26.80	Pass	V
4874.000	34.84	36.81	5.09	45.36	48.48	74	-25.52	Pass	V
7311.000	36.43	37.43	6.76	43.25	49.01	74	-24.99	Pass	V
9748.000	38.03	37.85	7.61	44.12	51.91	74	-22.09	Pass	V

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1333.284	30.53	38.24	2.66	47.91	42.86	74	-31.14	Pass	H
1663.803	31.17	37.72	2.97	51.65	48.07	74	-25.93	Pass	H
2995.538	33.59	37.10	5.61	50.11	52.21	74	-21.79	Pass	H
4924.000	34.94	36.81	5.07	42.12	45.32	74	-28.68	Pass	H
7386.000	36.44	37.42	6.83	43.14	48.99	74	-25.01	Pass	H
9848.000	38.14	37.87	7.53	43.06	50.86	74	-23.14	Pass	H
1541.476	30.95	37.90	2.87	45.69	41.61	74	-32.39	Pass	V
1668.044	31.18	37.72	2.98	47.89	44.33	74	-29.67	Pass	V
3316.617	33.32	37.03	5.56	44.93	46.78	74	-27.22	Pass	V
4924.000	34.94	36.81	5.07	43.01	46.21	74	-27.79	Pass	V
7386.000	36.44	37.42	6.83	42.75	48.60	74	-25.40	Pass	V
9848.000	38.14	37.87	7.53	43.35	51.15	74	-22.85	Pass	V

Test mode:		802.11n(HT20)(6.5Mbps)			Test channel:		Lowest		
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1280.072	30.41	38.33	2.61	47.57	42.26	74	-31.74	Pass	H
1993.395	31.69	37.31	3.23	45.01	42.62	74	-31.38	Pass	H
2995.538	33.59	37.10	5.61	50.37	52.47	74	-21.53	Pass	H
4824.000	34.73	36.82	5.10	42.45	45.46	74	-28.54	Pass	H
7236.000	36.42	37.45	6.69	42.74	48.40	74	-25.60	Pass	H
9648.000	37.93	37.83	7.70	44.48	52.28	74	-21.72	Pass	H
1244.726	30.33	38.39	2.57	47.96	42.47	74	-31.53	Pass	V
1668.044	31.18	37.72	2.98	46.22	42.66	74	-31.34	Pass	V
3291.385	33.34	37.04	5.56	46.54	48.40	74	-25.60	Pass	V
4824.000	34.73	36.82	5.10	45.32	48.33	74	-25.67	Pass	V
7236.000	36.42	37.45	6.69	43.52	49.18	74	-24.82	Pass	V
9648.000	37.93	37.83	7.70	44.81	52.61	74	-21.39	Pass	V

Test mode:		802.11n(HT20)(6.5Mbps)			Test channel:		Middle		
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1329.894	30.52	38.24	2.66	49.02	43.96	74	-30.04	Pass	H
1851.542	31.48	37.48	3.12	46.01	43.13	74	-30.87	Pass	H
2995.538	33.59	37.10	5.61	50.93	53.03	74	-20.97	Pass	H
4874.000	34.84	36.81	5.09	41.73	44.85	74	-29.15	Pass	H
7311.000	36.43	37.43	6.76	44.03	49.79	74	-24.21	Pass	H
9748.000	38.03	37.85	7.61	43.43	51.22	74	-22.78	Pass	H
1518.111	30.90	37.94	2.84	46.99	42.79	74	-31.21	Pass	V
1668.044	31.18	37.72	2.98	46.83	43.27	74	-30.73	Pass	V
3225.037	33.40	37.05	5.57	46.06	47.98	74	-26.02	Pass	V
4874.000	34.84	36.81	5.09	43.46	46.58	74	-27.42	Pass	V
7311.000	36.43	37.43	6.76	44.22	49.98	74	-24.02	Pass	V
9748.000	38.03	37.85	7.61	44.33	52.12	74	-21.88	Pass	V



Test mode:		802.11n(HT20)(6.5Mbps)			Test channel:		Highest		
Frequency (MHz)	Antenna Factor (dB/m)	Preamp Gain (dB)	Cable Loss (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1280.072	30.41	38.33	2.61	48.43	43.12	74	-30.88	Pass	H
1597.401	31.05	37.82	2.92	47.64	43.79	74	-30.21	Pass	H
3003.173	33.60	37.10	5.62	50.73	52.85	74	-21.15	Pass	H
4924.000	34.94	36.81	5.07	41.97	45.17	74	-28.83	Pass	H
7386.000	36.44	37.42	6.83	44.12	49.97	74	-24.03	Pass	H
9848.000	38.14	37.87	7.53	44.42	52.22	74	-21.78	Pass	H
1381.656	30.63	38.15	2.71	47.1	42.29	74	-31.71	Pass	V
1889.633	31.54	37.43	3.15	45.43	42.69	74	-31.31	Pass	V
3088.453	33.52	37.08	5.6	46.58	48.62	74	-25.38	Pass	V
4924.000	34.94	36.81	5.07	42.90	46.10	74	-27.90	Pass	V
7386.000	36.44	37.42	6.83	43.42	49.27	74	-24.73	Pass	V
9848.000	38.14	37.87	7.53	45.21	53.01	74	-20.99	Pass	V

Note:

1) Through Pre-scan transmitting mode and charge+transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor- Antenna Factor-Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Test Model No.: SPL06-07A1W4-BKT



**Radiated spurious emission Test Setup-1 (Below 1GHz)**



**Radiated spurious emission Test Setup-2 (Above 1GHz)**



**Conducted Emissions Test Setup**



## APPENDIX 2 PHOTOGRAPHS OF EUT

Test mode No.: SPL06-07A1W4-BKT



View of Product-1



View of Product-2




View of Product-3




View of Product-4



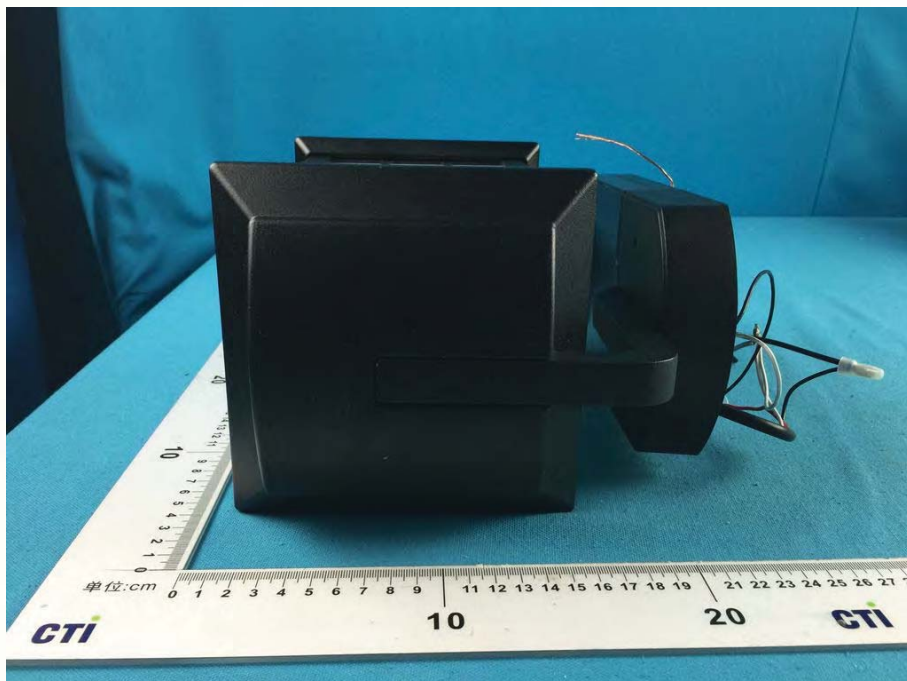

View of Product-5

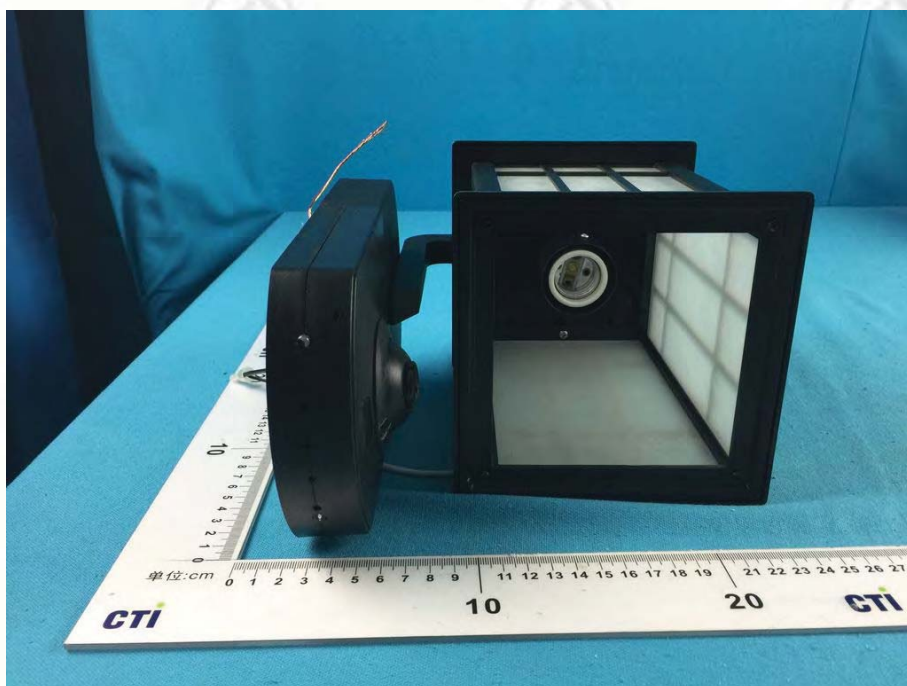


View of Product-6







View of Product-7

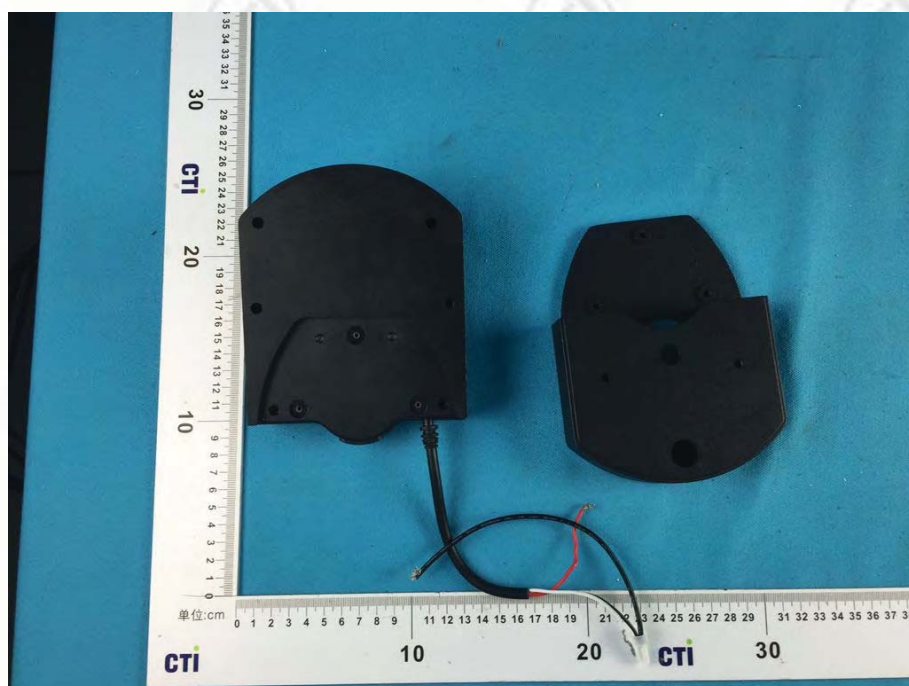

View of Product-8

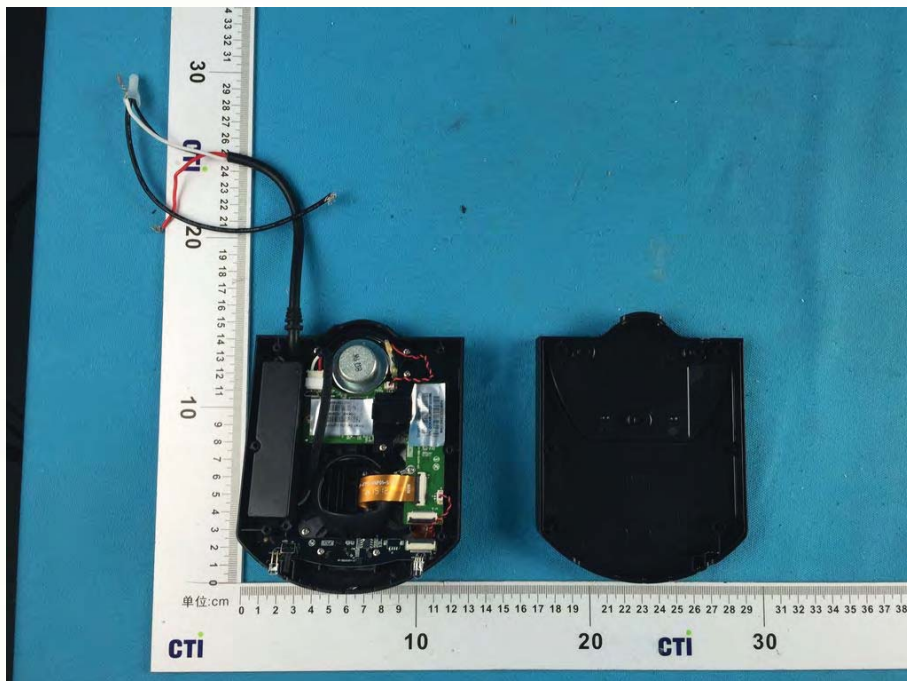


View of Product-9

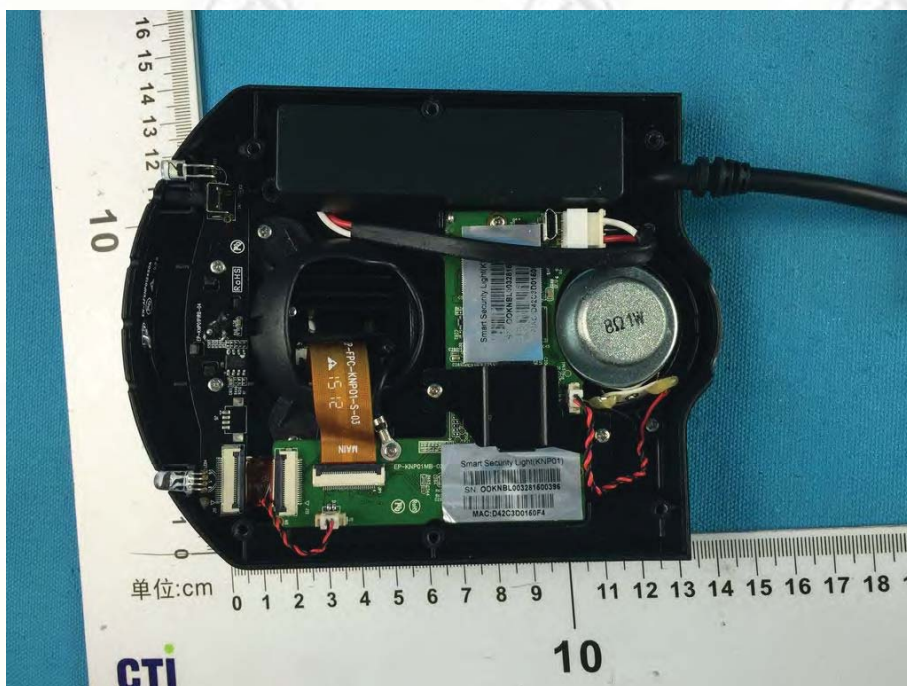

View of Product-10



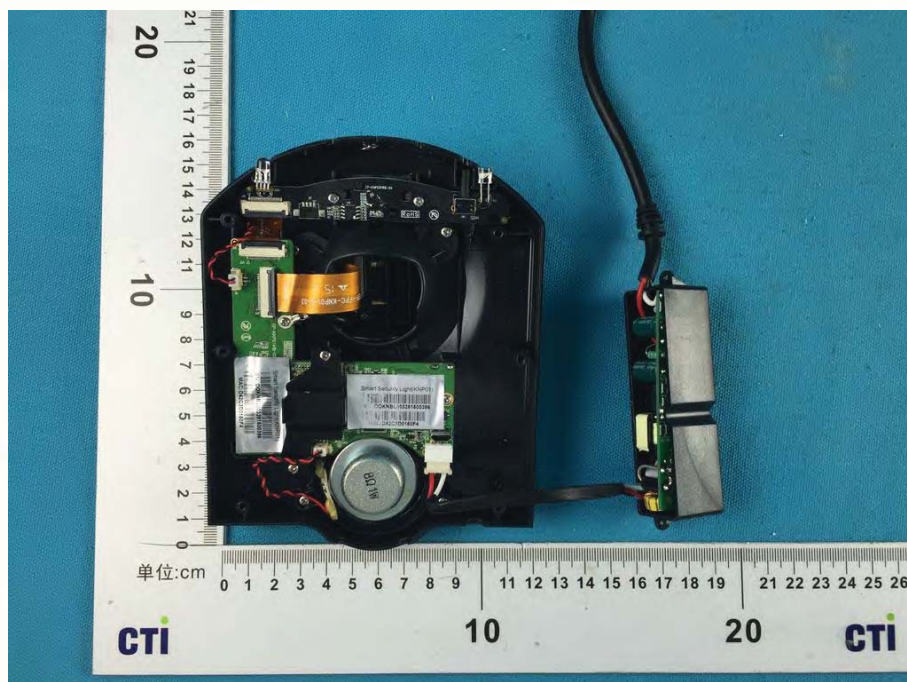


View of Product-11




View of Product-12



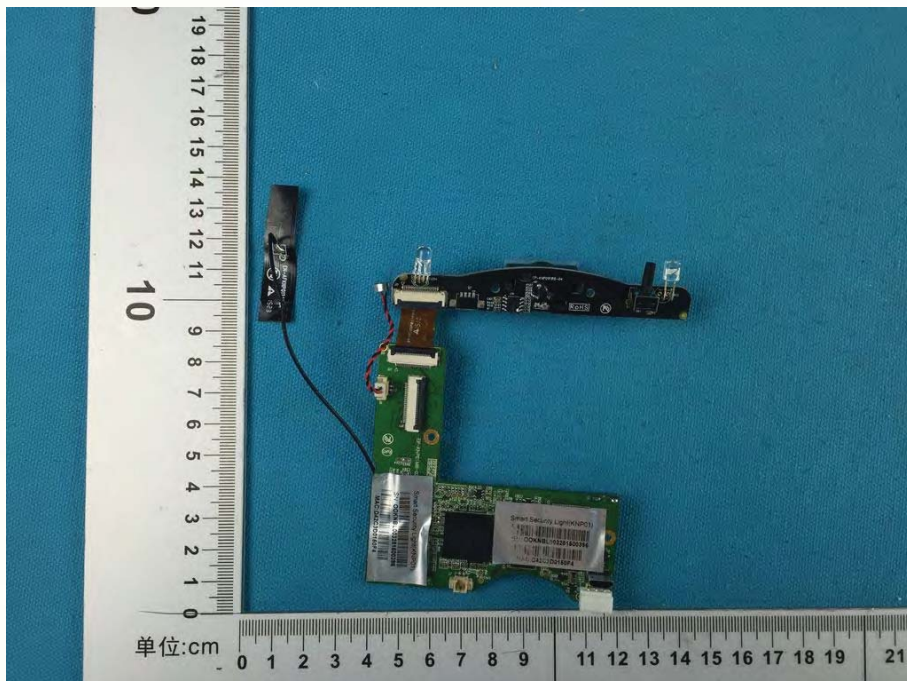


View of Product-13

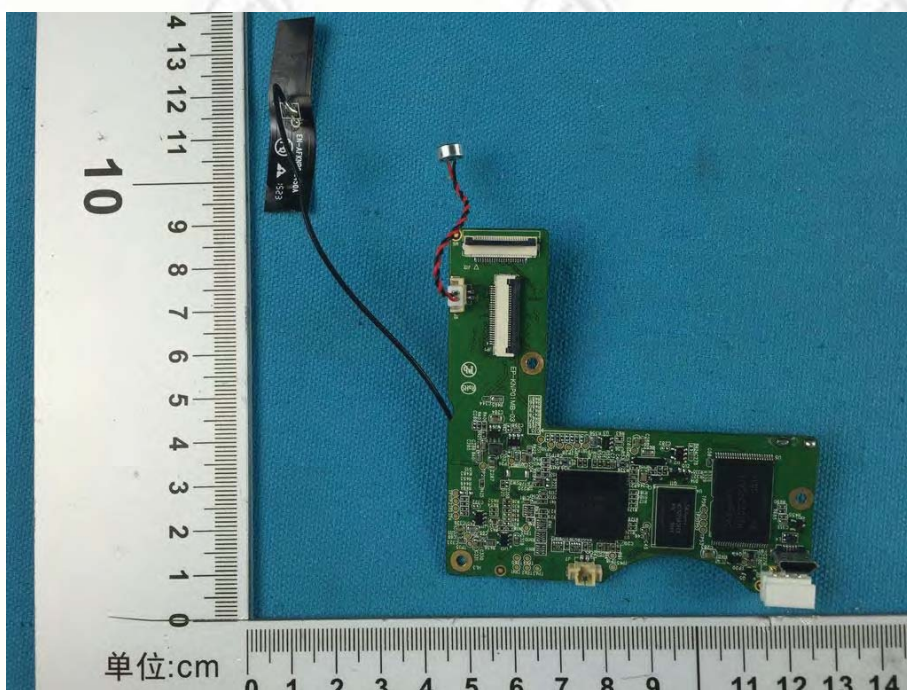


View of Product-14



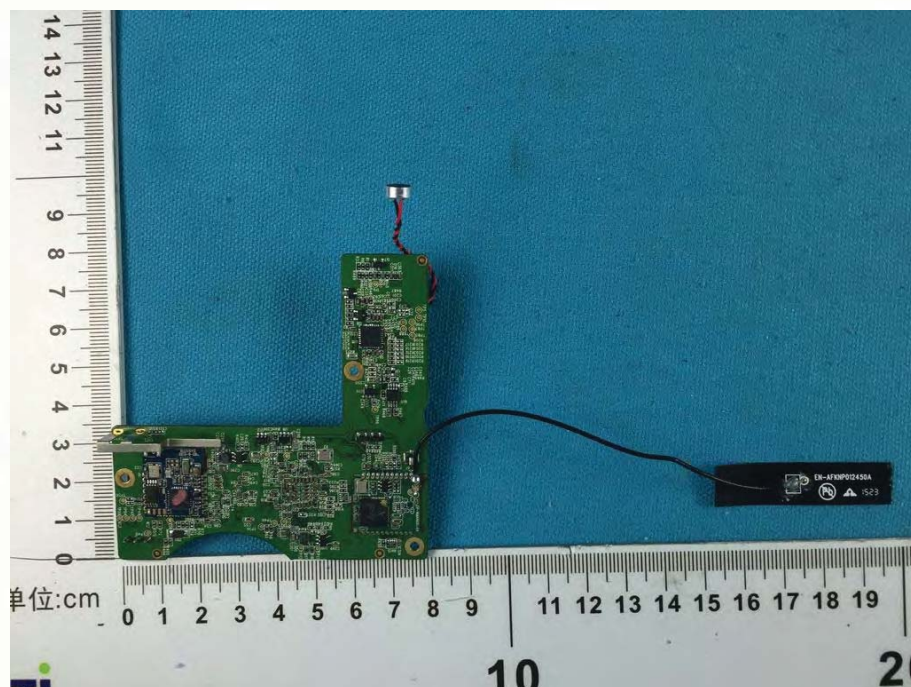


View of Product-15

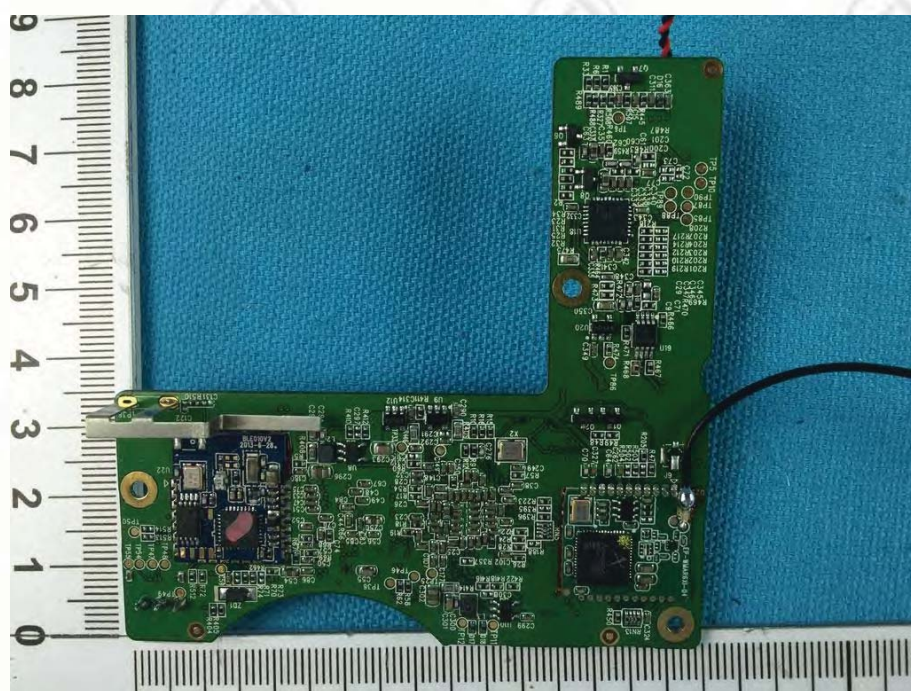


View of Product-16



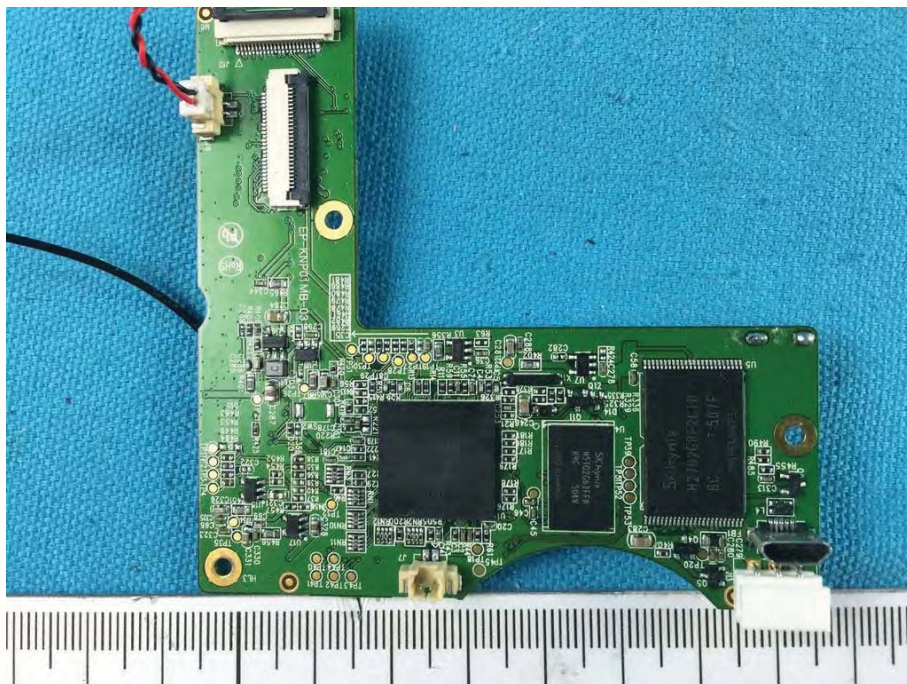


View of Product-17

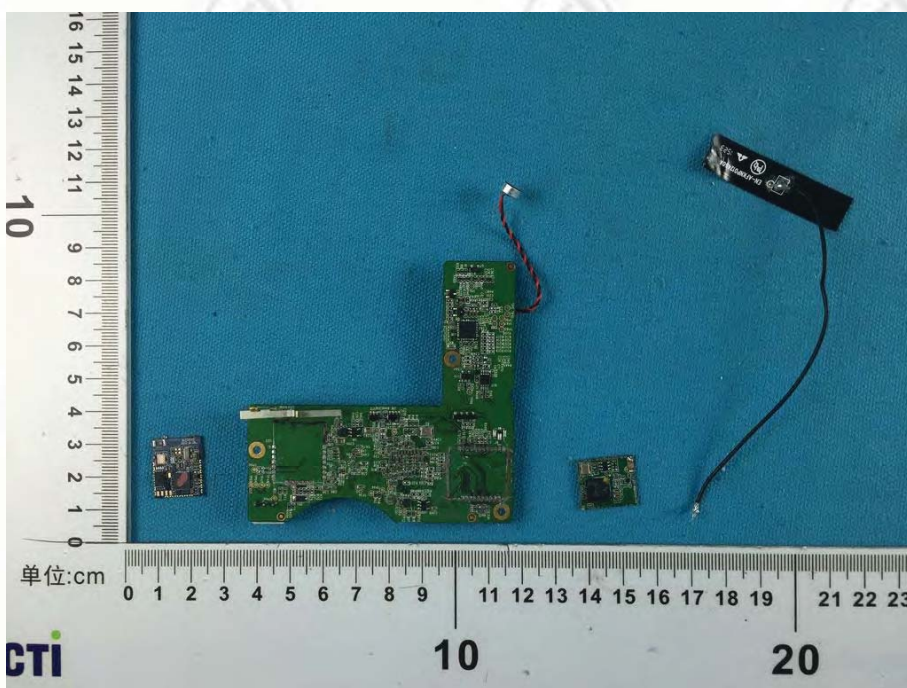


View of Product-18




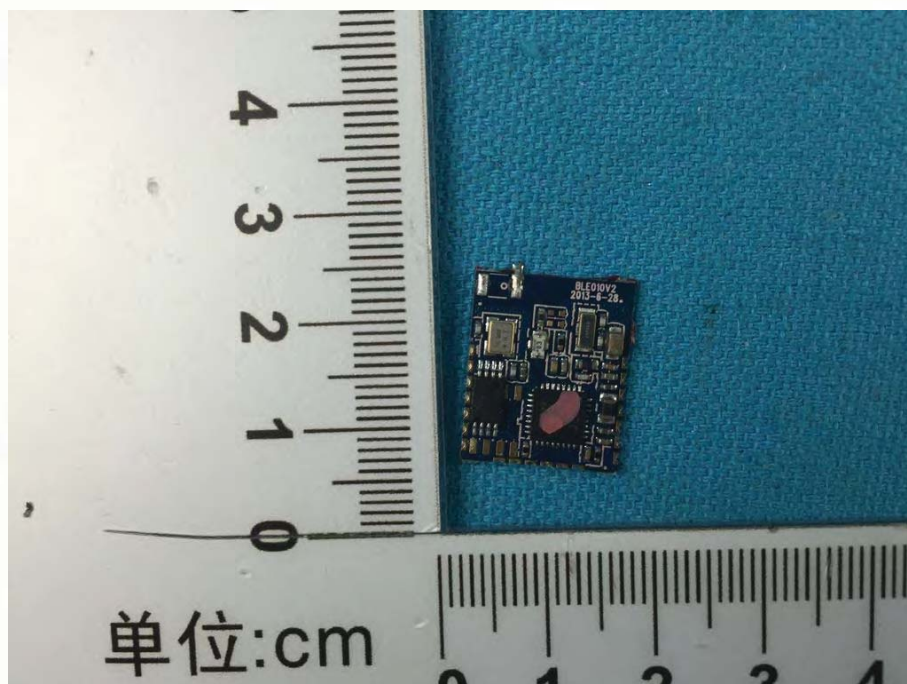


View of Product-19

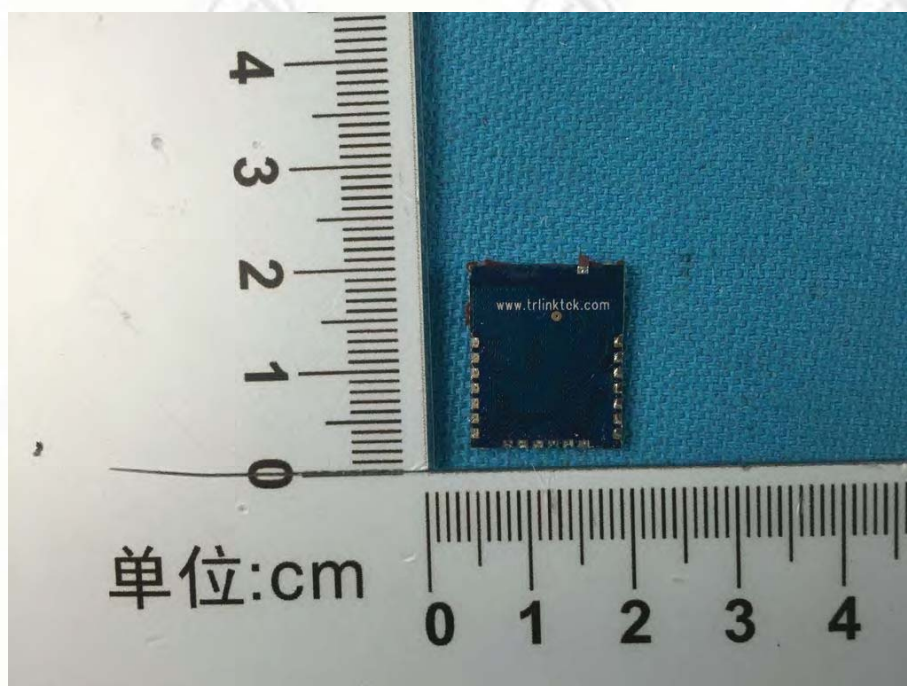

View of Product-20

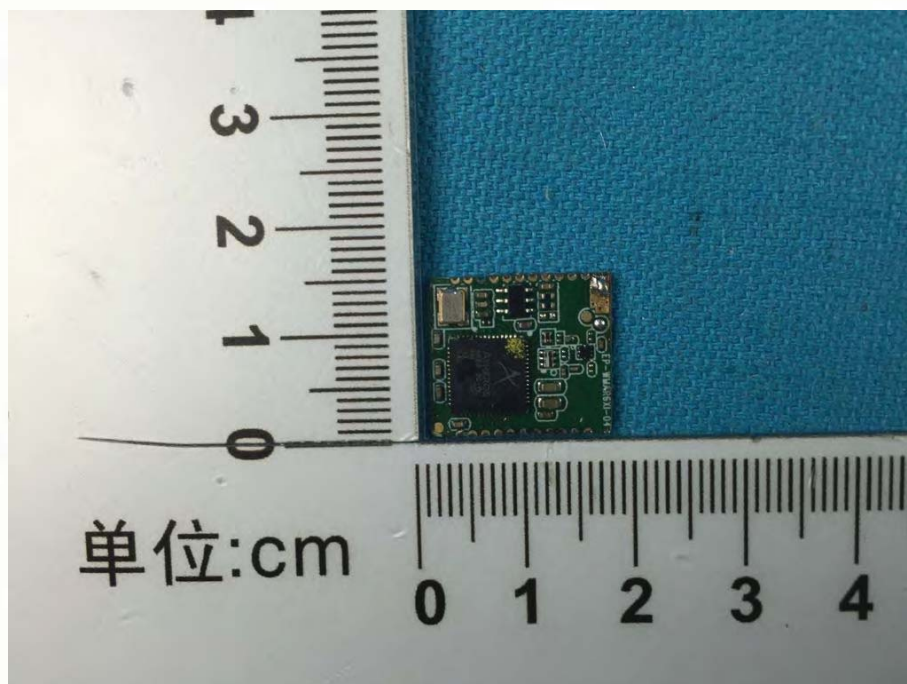


View of Product-21

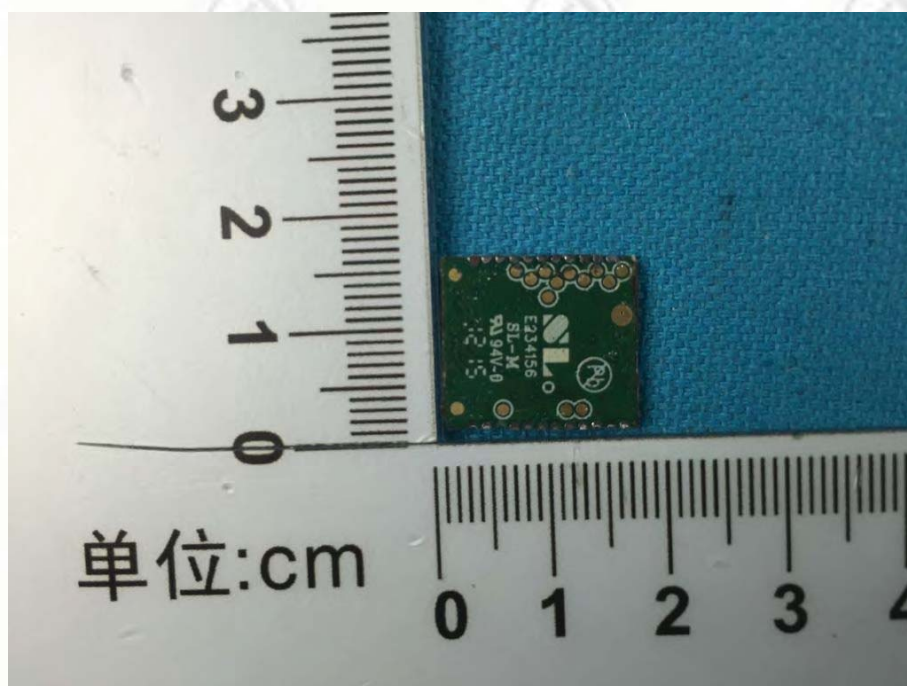


View of Product-22



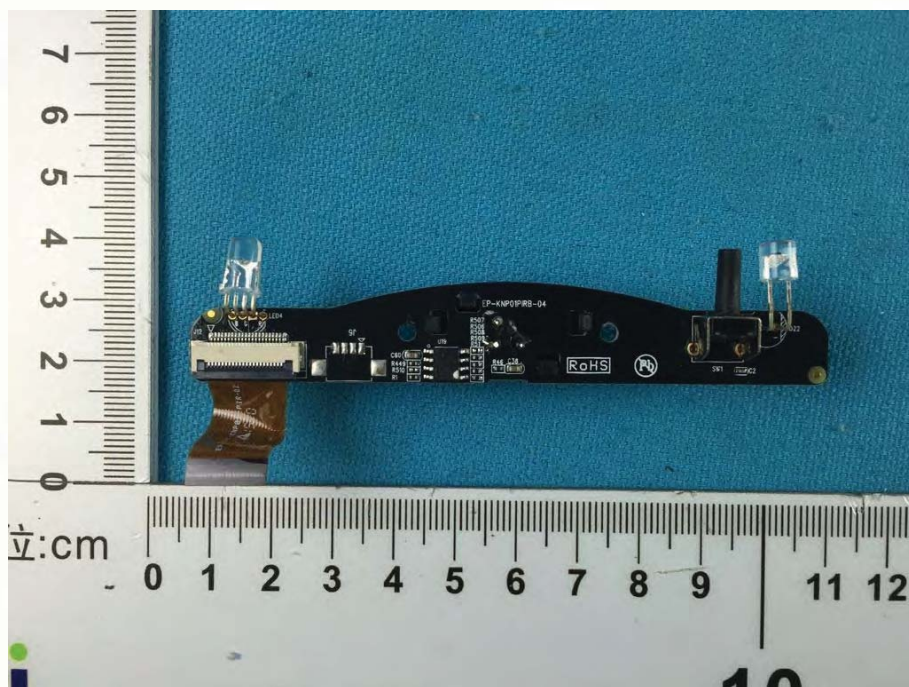

View of Product-23

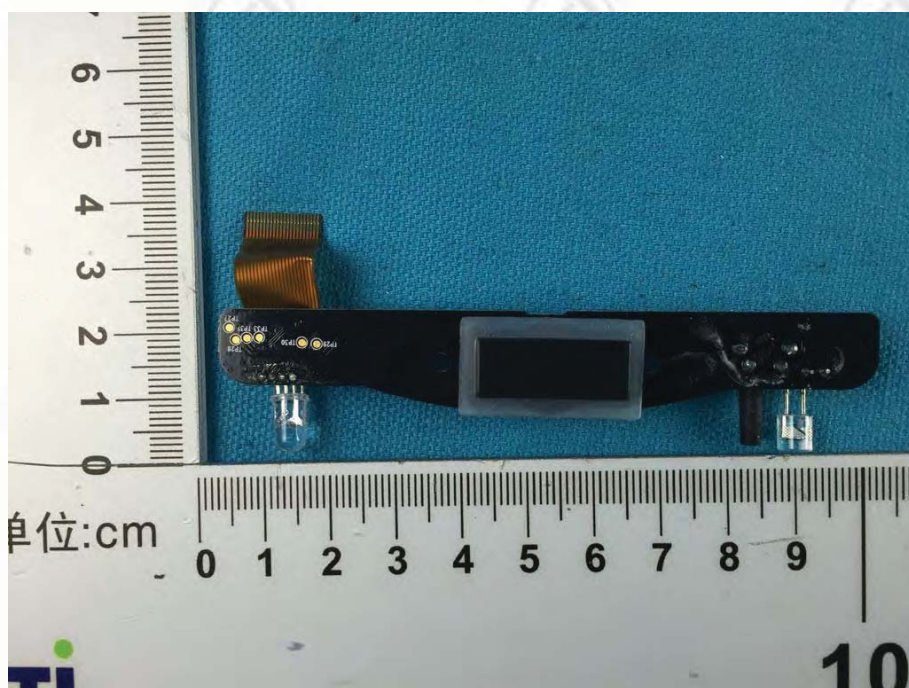


View of Product-24






View of Product-25

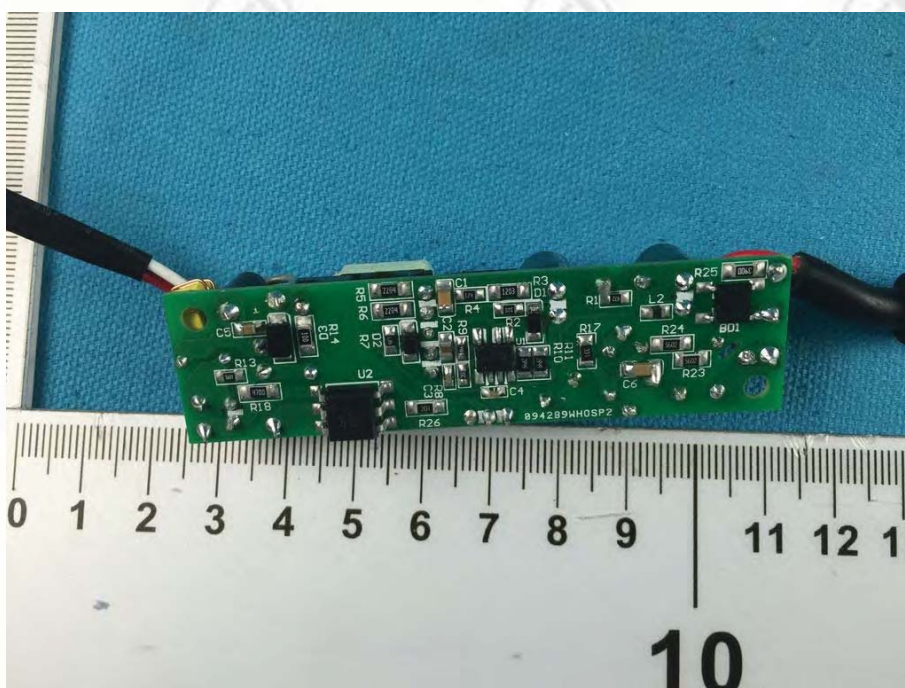

View of Product-26

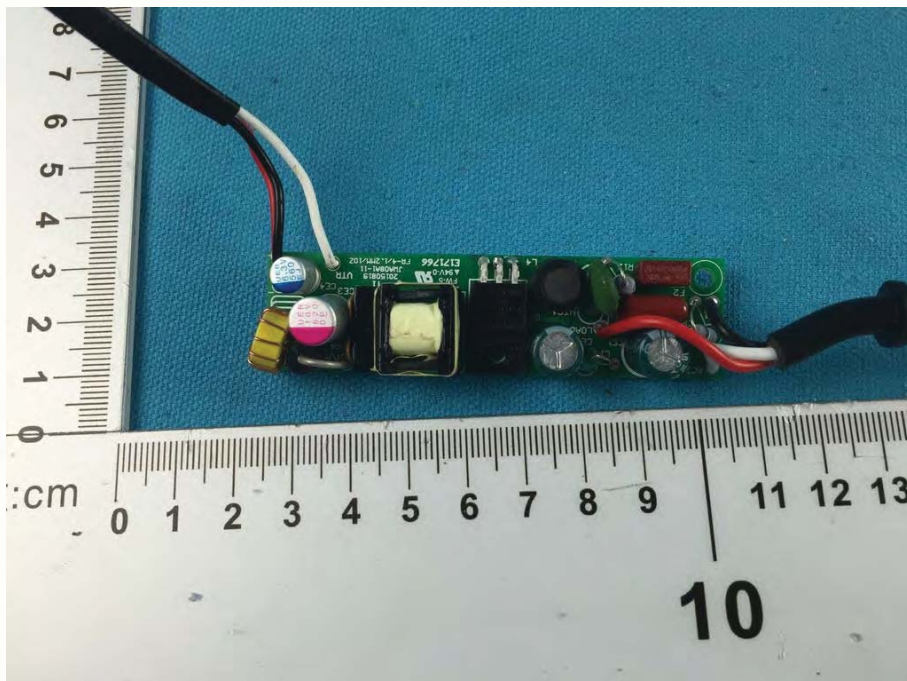

View of Product-27




View of Product-28






View of Product-29

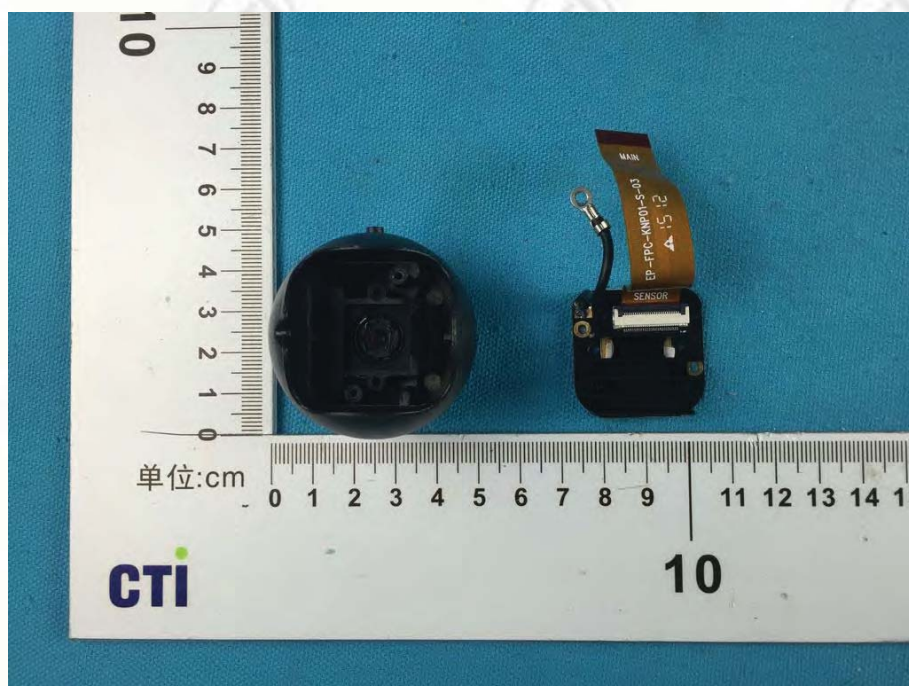


View of Product-30




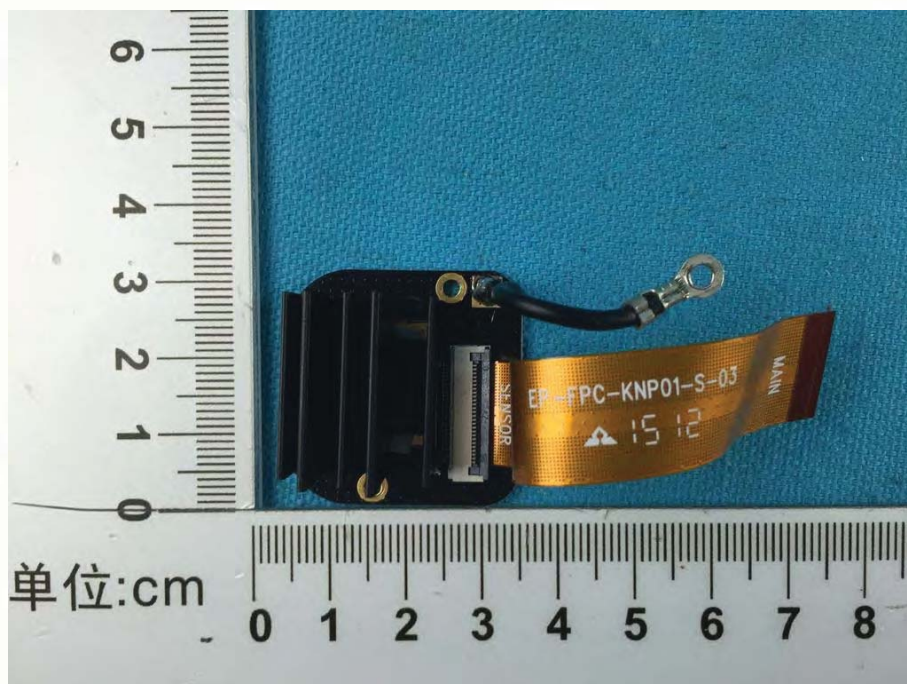

View of Product-31

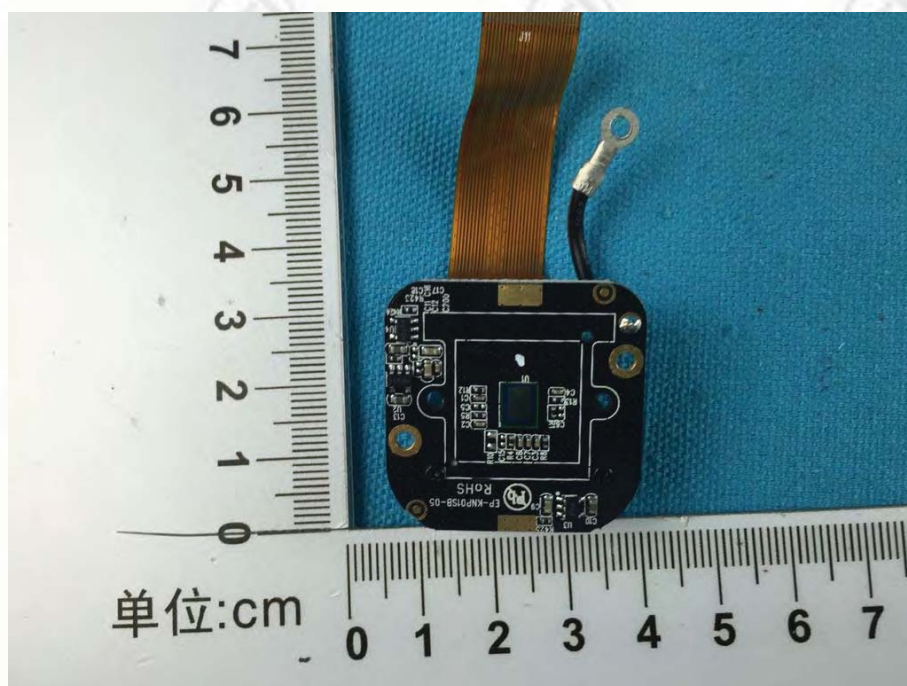

View of Product-32

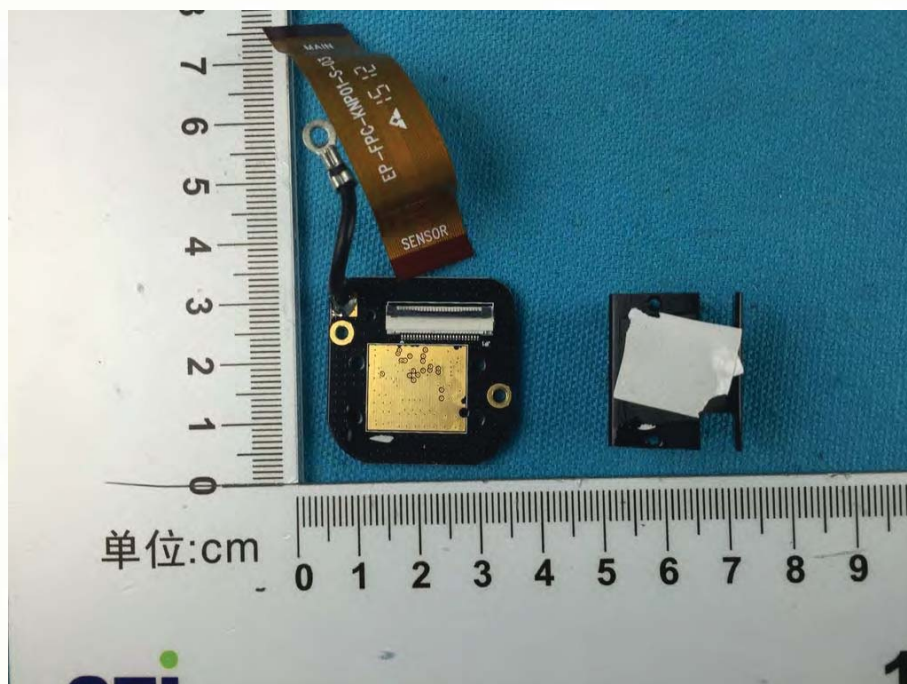

View of Product-33

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.