

# FCC TEST REPORT

## FCC ID: 2AD99D21XA

Product Name:	<b>IP Video Door Station</b>
Trademark:	<b>DoorBird</b>
Model Number:	<b>D21x</b>
Prepared For :	<b>Bird Home Automation GmbH</b>
Address :	Joachimsthaler Str. 12, 10719 Berlin, Germany
Prepared By :	<b>Shenzhen BCTC Testing Co., Ltd.</b>
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	<b>Dec. 17, 2018 - Jan. 16, 2019</b>
Date of Report :	<b>Jan. 16, 2019</b>
Report No.:	<b>BCTC-FY180905696E</b>

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION .....</b>	<b>3</b>
<b>1.GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Report information .....	4
1.2. Measurement Uncertainty.....	4
1.3. Test Facility.....	4
1.4. Test Uncertainty .....	4
<b>2.PRODUCT DESCRIPTION .....</b>	<b>5</b>
2.1. EUT Description .....	5
2.2. Block Diagram of EUT Configuration.....	5
2.3. Test Conditions.....	5
2.4. Description Of Support Units (Conducted Mode).....	6
<b>3.TEST RESULTS SUMMARY .....</b>	<b>6</b>
<b>4.TEST EQUIPMENT USED .....</b>	<b>7</b>
4.1. For Conducted Emission Test.....	7
4.2. For Radiated Emission Measurement .....	7
<b>5.CONDUCTED EMISSION TEST.....</b>	<b>8</b>
5.1. Block Diagram of Test Setup.....	8
5.2. Test Standard .....	8
5.3. Conducted Emission Limit .....	8
5.4. EUT Configuration on Test.....	8
5.5. Operating Condition of EUT .....	9
5.6. Test Procedure .....	9
5.7. Test Result.....	9
<b>6.RADIATED EMISSION MEASUREMENT .....</b>	<b>12</b>
6.1. Block Diagram of Test Setup.....	12
6.2. Test Standard .....	13
6.3. EMI Test Receiver Setup .....	13
6.4. Test Procedure .....	14
6.5. Test Result.....	14
<b>7.EUT TEST PHOTOS.....</b>	<b>18</b>
<b>8.EUT PHOTOS .....</b>	<b>20</b>

## TEST REPORT DECLARATION

Applicant : **Bird Home Automation GmbH**  
Address : Joachimsthaler Str. 12, 10719 Berlin, Germany  
EUT Description : **IP Video Door Station**  
Model Number : **D21x**

Test Standards:

**FCC Part 15 C**

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer):

Cai Fang Zhong

*Cai Fang Zhong*

Reviewer(Supervisor):

Eric Yang

*Eric Yang*

Approved(Manager):

Zero Zhou



## 1. GENERAL INFORMATION

### 1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

### 1.2. Measurement Uncertainty

Available upon request.

### 1.3. Test Facility

Site Description  
Name of Firm : Shenzhen BCTC Testing Co., Ltd.

Site Location : BCTC Building & 1-2F, East of B Building,  
Pengzhou Industrial, Fuyuan 1st Road, Qiaotou  
Community, Fuyong Street, Bao'an District,  
Shenzhen, China

### 1.4. Test Uncertainty

Conducted Emission =  $\pm 2.66$ dB  
Uncertainty  
Radiated Emission Uncertainty =  $\pm 4.15$ dB

## 2. PRODUCT DESCRIPTION

### 2.1.EUT Description

Description : **IP Video Door Station**

Applicant : **Bird Home Automation GmbH**  
Joachimsthaler Str. 12, 10719 Berlin, Germany

Manufacturer : **Bird Home Automation GmbH**  
Joachimsthaler Str. 12, 10719 Berlin, Germany

Model Number : D21x


  

Power Supply : DC 15V 1.0A

Adapter : Input: 100-240V~50/60Hz, 0.4A  
Output : DC 15V 1.0A  
Model No.: UT20-150100W

Work Frequency : 125KHz

### 2.2.Block Diagram of EUT Configuration

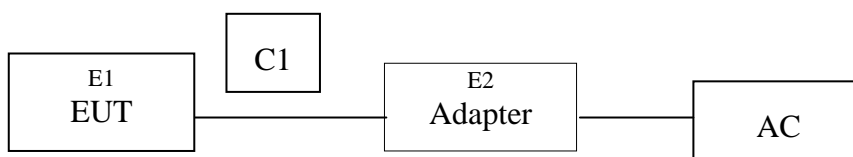

### 2.3.Test Conditions

Temperature: 23~25°C

Relative Humidity: 55~63 %

## 2.4. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	IP Video Door Station	DoorBird	D21x	N/A	EUT
E2	Adapter	N/A	UT20-150100W	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	2.5M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 3. TEST RESULTS SUMMARY

**Table 1 Test Results Summary**

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

Remark: “N/A” means “Not applicable.”

## 4. TEST EQUIPMENT USED

### 4.1. For Conducted Emission Test


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2018.02.12	2019.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

### 4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	2018.06.23	2019.06.22
5	Amplifier (9kHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2018.06.20	2019.06.20
6	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2018.06.20	2019.06.20
7	Loop Antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519B	014	2018.06.23	2019.06.23
8	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2018.02.12	2019.02.12
9	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	2018.03.27	2019.03.27
10	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	2018.06.19	2019.06.19
11	Power Metter	Keysight	E4419	\	2018.04.15	2019.04.15
12	Power Sensor (AV)	Keysight	E9300A	\	2018.04.15	2019.04.15
13	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.07.11	2019.07.11
14	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
15	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

## 5. CONDUCTED EMISSION TEST

### 5.1. Block Diagram of Test Setup

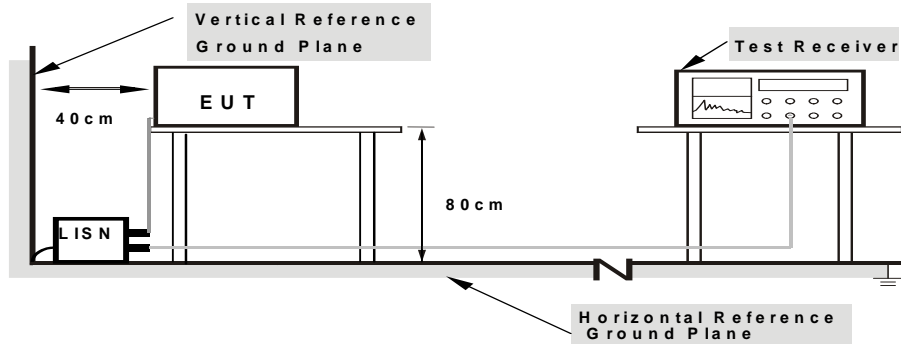

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

(EUT: IP Video Door Station )

### 5.2. Test Standard

FCC§15.207

### 5.3. Conducted Emission Limit

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

### 5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### 5.4.1. milestone dual

Model Number: **D21x**



## 5.5. Operating Condition of EUT

- 5.5.1. Setup the EUT and simulators as shown in Section 5.1.
- 5.5.2. Turn on the power of all equipments.
- 5.5.3. Let the EUT work in test modes (EUT Working) and test it.

## 5.6. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

The bandwidth of the test receiver (R&S Test Receiver ) is set at 10KHz.


We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

## 5.7. Test Result

**PASS**

Please refer to the following pages.


EUT:	IP Video Door Station	Model Name :	D21x
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	101kPa	Phase :	L
<b>Test Voltage :</b>	DC 15V (form adapter) (adapter input:AC120V/60Hz)	Test Mode:	Normal Link

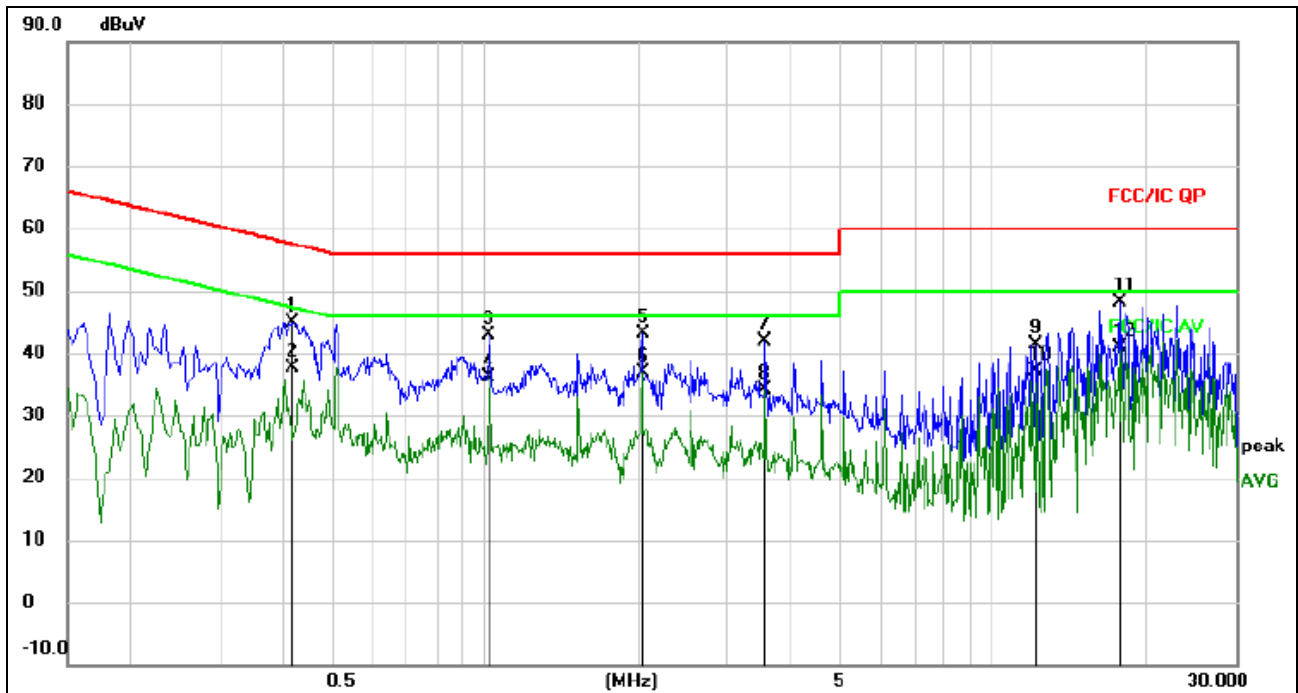
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.4180	35.42	9.52	44.94	57.49	-12.55	QP	
2	0.4180	28.14	9.52	37.66	47.49	-9.83	AVG	
3	1.0180	33.29	9.57	42.86	56.00	-13.14	QP	
4	1.0180	26.50	9.57	36.07	46.00	-9.93	AVG	
5	2.0340	33.52	9.59	43.11	56.00	-12.89	QP	
6	2.0340	27.24	9.59	36.83	46.00	-9.17	AVG	
7	3.5620	32.08	9.70	41.78	56.00	-14.22	QP	
8	3.5620	24.34	9.70	34.04	46.00	-11.96	AVG	
9	12.1380	31.70	9.69	41.39	60.00	-18.61	QP	
10	12.1380	27.56	9.69	37.25	50.00	-12.75	AVG	
11	17.6940	38.32	9.75	48.07	60.00	-11.93	QP	
12 *	17.6940	31.23	9.75	40.98	50.00	-9.02	AVG	

EUT:	IP Video Door Station	Model Name. :	D21x
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	101kPa	Phase :	N
<b>Test Voltage</b> :	DC 15V (form adapter) (adapter input:AC120V/60Hz)	Test Mode:	Normal Link

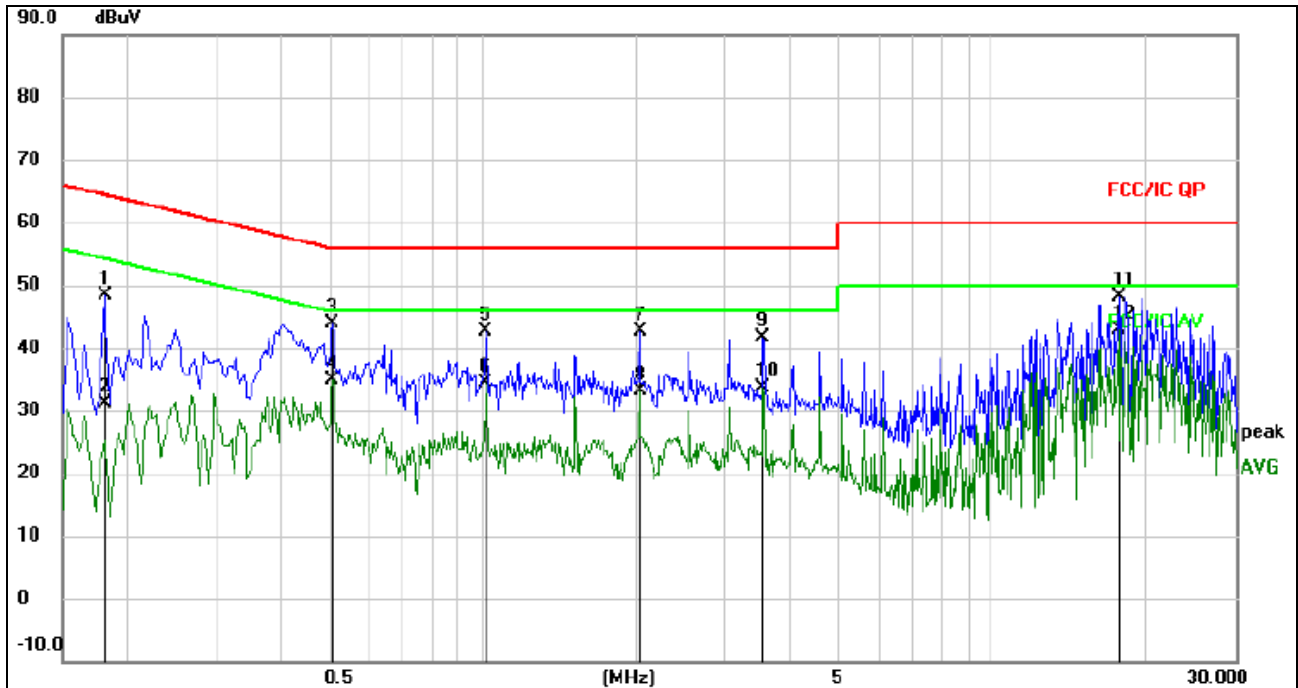
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1819	38.86	9.48	48.34	64.40	-16.06	QP	
2		0.1819	21.63	9.48	31.11	54.40	-23.29	AVG	
3		0.5100	34.37	9.63	44.00	56.00	-12.00	QP	
4		0.5100	25.32	9.63	34.95	46.00	-11.05	AVG	
5		1.0180	33.12	9.57	42.69	56.00	-13.31	QP	
6		1.0180	24.90	9.57	34.47	46.00	-11.53	AVG	
7		2.0380	33.05	9.59	42.64	56.00	-13.36	QP	
8		2.0380	23.55	9.59	33.14	46.00	-12.86	AVG	
9		3.5620	31.94	9.70	41.64	56.00	-14.36	QP	
10		3.5620	23.81	9.70	33.51	46.00	-12.49	AVG	
11		17.6940	38.41	9.75	48.16	60.00	-11.84	QP	
12	*	17.6940	33.13	9.75	42.88	50.00	-7.12	AVG	

## 6. RADIATED EMISSION MEASUREMENT

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of connection between the EUT and the simulators

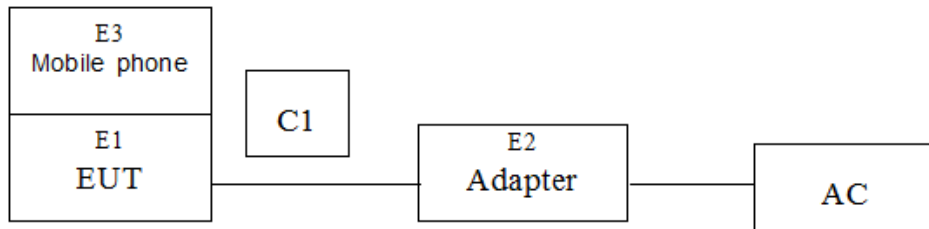


(EUT: IP Video Door Station )

#### 6.1.2. Anechoic Chamber Test Setup Diagram

##### (A) Radiated Emission Test-Up Frequency Below 30MHz

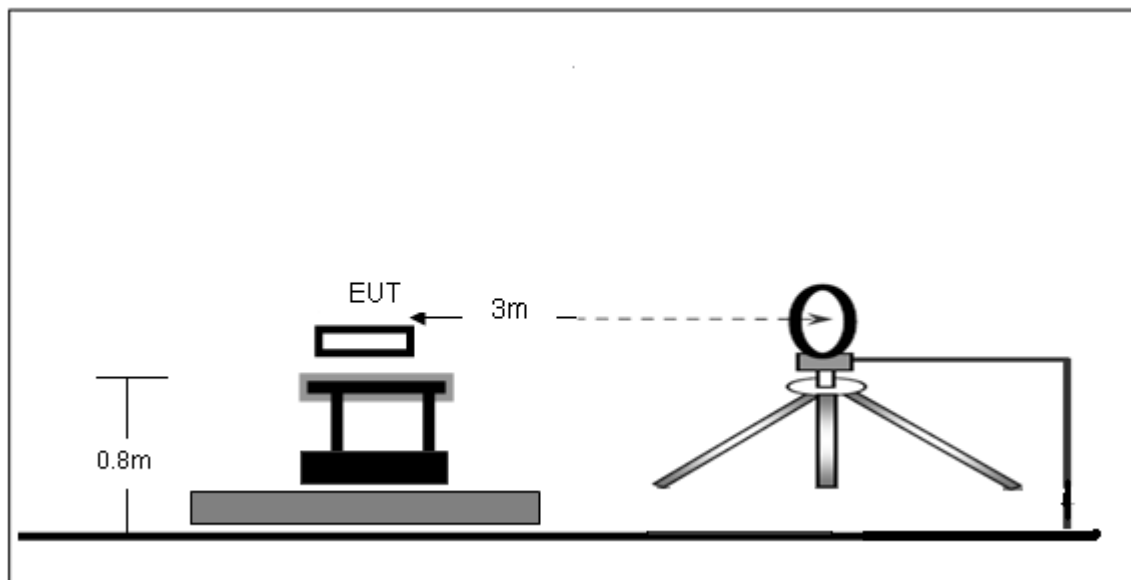

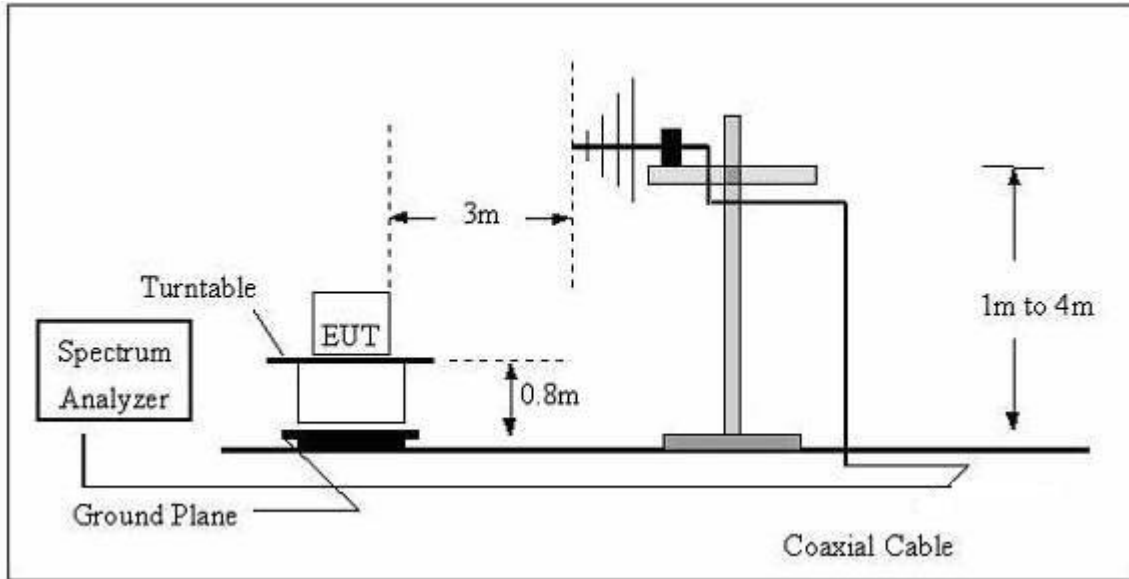**(B) Radiated Emission Test-Up Frequency 30MHz~1GHz**


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

## 6.2. Test Standard

FCC §15.209; §15.205

Test Standard	FCC Part15 C Section 15.209 and 15.205					
	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)	
Test Limit	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30	
	1.705MHz-30MHz	30	-	-	30	
	30MHz~88MHz	100	40.0	Quasi-peak	3	
	88MHz~216MHz	150	43.5	Quasi-peak	3	
	216MHz~960MHz	200	46.0	Quasi-peak	3	
	Above 1000MHz		500	54.0	Average	3
			-	74.0	Peak	3

## 6.3. EMI Test Receiver Setup

The system was investigated from 9kHz to1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 kHz	1 kHz	QP
150 kHz – 30MHz	9kHz	30kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

## 6.4. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

## 6.5. Test Result

**PASS**

Please refer to the following pages.

## 9kHz-30MHz

EUT:	Wireless Charger	Model Name :	KW-008
Temperature:	25°C	Relative Humidity:	55%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 15V from Adapter (adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

Frequency (kHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
26.4500	37.29	20.16	57.45	139.16	-81.71	PK
26.4500	33.63	20.16	53.79	119.16	-66.62	AV
47.6200	51.63	20.28	71.91	134.05	-59.02	PK
47.6200	46.38	20.28	66.66	114.05	-44.18	AV
125.0000	68.22	20.46	88.68	125.67	-44.72	PK
125.0000	63.68	20.46	84.14	105.67	-29.61	AV
502.3500	31.17	20.65	51.82	73.58	-21.03	QP
625.6300	32.81	20.79	53.60	71.68	-16.58	QP

**Note:**


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

### 30MHz-1GHz

EUT:	IP Video Door Station	Model Name :	D21x
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	101kPa	Polarization :	Horizontal
<b>Test Voltage :</b>	DC 15V Form Adapter (adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

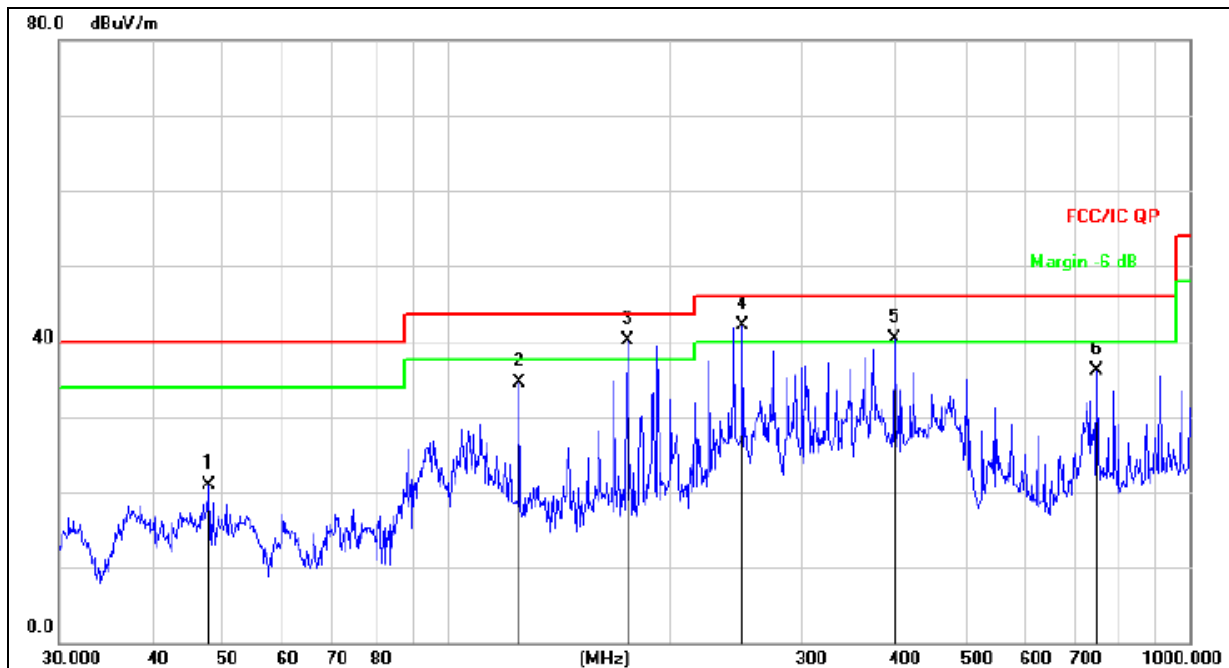


Remark:  
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		47.8260	35.86	-14.97	20.89	40.00	-19.11	QP
2		125.0066	52.38	-17.89	34.49	43.50	-9.01	QP
3	*	175.0368	58.00	-17.90	40.10	43.50	-3.40	QP
4	!	250.3011	57.28	-15.14	42.14	46.00	-3.86	QP
5	!	400.4319	51.29	-11.08	40.21	46.00	-5.79	QP
6		750.1083	40.42	-4.34	36.08	46.00	-9.92	QP



EUT:	IP Video Door Station	Model Name :	D21x
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
<b>Test Voltage :</b>	DC 15V Form Adapter (adapter input:AC120V/60Hz)		
Test Mode :	Normal Link		

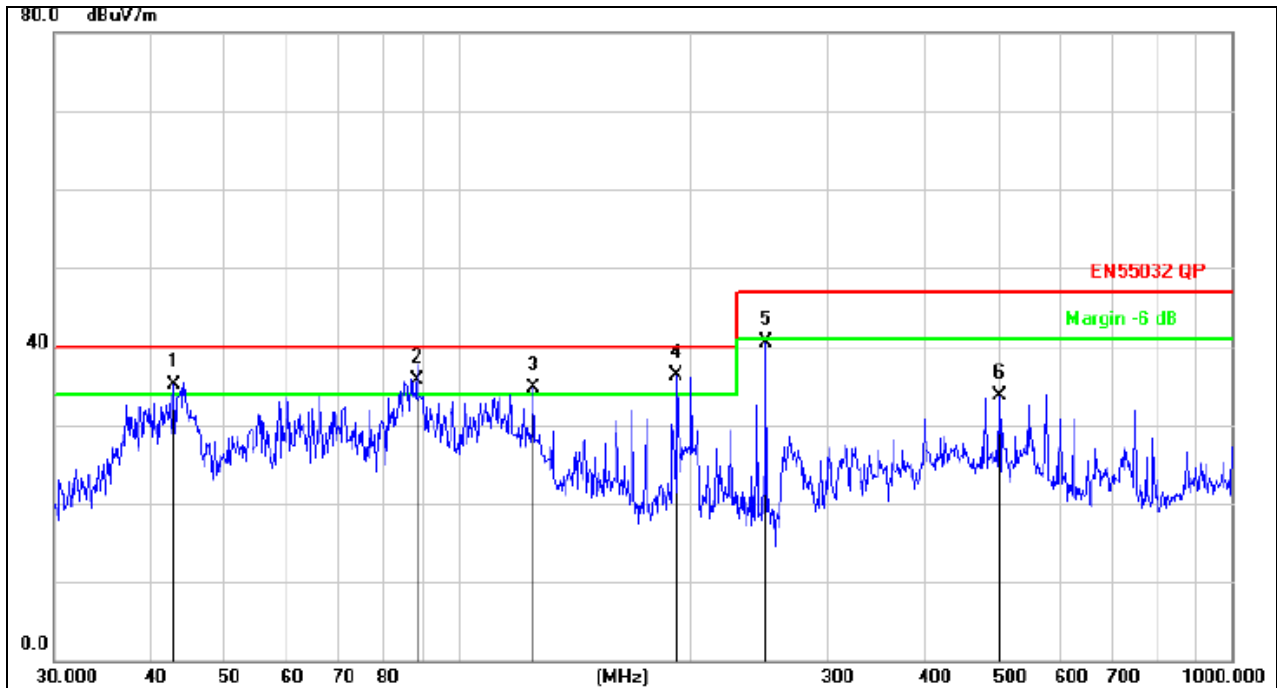

Remark:  
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	42.8998	50.29	-15.25	35.04	40.00	-4.96	QP
2	!	88.3421	54.18	-18.48	35.70	40.00	-4.30	QP
3	!	125.0066	52.58	-17.89	34.69	40.00	-5.31	QP
4	*	191.7450	53.04	-16.83	36.21	40.00	-3.79	QP
5		250.3012	55.69	-15.14	40.55	47.00	-6.45	QP
6		501.1790	42.67	-8.91	33.76	47.00	-13.24	QP

## 7. EUT TEST PHOTOS

### Conducted Measurement Photos




**Radiated Measurement Photos**

9KHz-30MHz



30MHz-1GHz

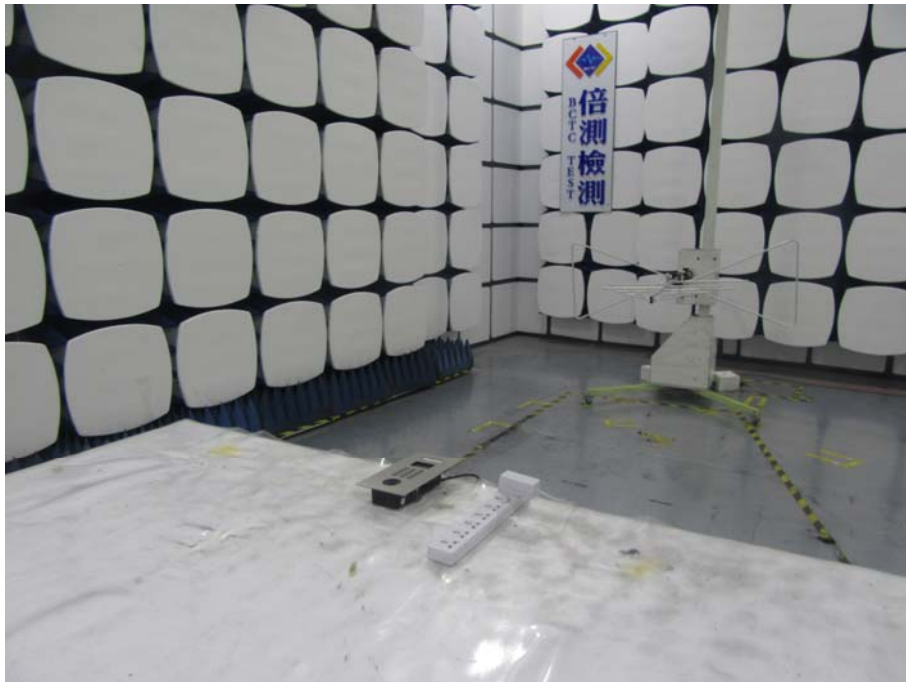

## 8. EUT PHOTOS





\*\*\*\*\* END OF REPORT \*\*\*\*\*