

FCC TEST REPORT
FOR
MINIX TECHNOLOGY LIMITED
2.4G Wireless Keyboard And Touchpad
Test Model: NEO K1

Prepared for : MINIX TECHNOLOGY LIMITED
Address : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road,
Kowloon Bay, Kowloon, Hong Kong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : February 15, 2017
Number of tested samples : 1
Sample number : 17020921
Date of Test : February 15, 2017- March 22, 2017
Date of Report : March 22, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.249)

Report Reference No. : LCS1702160963E

Date of Issue : March 22, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards [checked]
Partial application of Harmonised standards []
Other standard testing method []

Applicant's Name : MINIX TECHNOLOGY LIMITED

Address : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : 2.4G Wireless Keyboard And Touchpad

Trade Mark : MINIX

Test Model : NEO K1

Ratings : DC 3.7V by battery(400mAh)
Recharge Voltage: DC 5V/300mA

Result : Positive

Compiled by:

Dick Su

Dick Su / File administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1702160963E	<u>March 22, 2017</u> Date of issue
---	--

Test Model..... : NEO K1 EUT..... : 2.4G Wireless Keyboard And Touchpad
Applicant..... : MINIX TECHNOLOGY LIMITED Address..... : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong, China Telephone..... : / Fax..... : /
Manufacturer..... : MINIX TECHNOLOGY LIMITED Address..... : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong, China Telephone..... : / Fax..... : /
Factory..... : MINIX TECHNOLOGY LIMITED Address..... : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong, China Telephone..... : / Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	March 22, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. Description of Device (EUT)	6
1.2. Support Equipment List.....	6
1.3. External I/O	6
1.4. Description of Test Facility	7
1.5. List Of Measuring Equipments	7
1.6. Statement of the measurement uncertainty.....	8
1.7. Measurement Uncertainty	8
1.8. Description Of Test Modes	9
2. TEST METHODOLOGY	10
2.1. EUT Configuration	10
2.2. EUT Exercise.....	10
2.3. General Test Procedures.....	10
3. CONNECTION DIAGRAM OF TEST SYSTEM.....	11
3.1. Justification	11
3.2. EUT Exercise Software	11
3.3. Special Accessories	11
3.4. Block Diagram/Schematics	11
3.5. Equipment Modifications	11
3.6. Test Setup	11
4. SUMMARY OF TEST RESULTS	12
5. ANTENNA REQUIREMENT	13
5.1. Standard Applicable	13
5.2. Antenna Connected Construction.....	13
6. LINE CONDUCTED EMISSIONS.....	14
6.1 Standard Applicable	14
6.2 Block Diagram of Test Setup	14
6.3 Test Results	14
7. RADIATED EMISSION MEASUREMENT	17
7.1. Standard Applicable	17
7.2. Instruments Setting.....	17
7.3. Test Procedure.....	18
7.4. Block Diagram of Test Setup	22
7.5. Test Results	23
7.6. Results for Radiated Emissions (Above 1GHz)	25
7.7. Results for Band edge Testing (Radiated).....	31
8. 20 DB BANDWIDTH MEASUREMENT	32
8.1. Standard Applicable	32
8.2. Block Diagram of Test Setup	32
8.3. Test Procedure.....	32
8.4. Test Results	33

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : 2.4G Wireless Keyboard And Touchpad

Test Model : NEO K1

Hardware Version : K08_Main_PCB_V1.0

Software Version : Riida_i8+_BK2535_Pwm_20161216

Power Supply : DC 3.7V by battery(400mAh)
Recharge Voltage: DC 5V/300mA

Frequency Range : 2407MHz, 2408MHz, 2410MHz, 2414MHz, 2421MHz,
2428MHz, 2435MHz, 2437MHz, 2440MHz, 2441MHz,
2442MHz, 2455MHz, 2467MHz, 2468MHz, 2469MHz,
2477MHz

Channel Number : 16 Channels

Modulation Type : GFSK

Antenna Description : PCB Antenna, 2.0dBi(Max.)

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	WB05067151	DOC
Lenovo	AC/DC ADAPTER	ADP-90DD B	36001941	VOC

1.3. External I/O

I/O Port Description	Quantity	Cable
USB Port	1	N/A

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5. List Of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2016	June 17,2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2016	July 15,2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2016	June 17,2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2016	June 17,2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2016	June 17,2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2016	June 17,2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2016	June 17,2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2016	June 17,2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2016	July 15,2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2016	July 15,2017
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2016	July 15,2017
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2016	Oct. 26, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2016	June 17,2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2016	June 09,2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2016	June 09,2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2016	June 09,2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2016	June 17,2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2016	June 17,2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2016	June 17,2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2016	June 17,2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2016	June 17,2017

Note: All equipment through GRGT EST calibration

1.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	4.00dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

- (1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.8. Description Of Test Modes

The EUT operates in the unlicensed ISM band at 2.4GHz. The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report. The EUT is considered a portable unit and was set to transmit at 100% duty cycle. It was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane.

Mode of Operations	Transmitting Frequency (MHz)
GFSK	2407
	2440
	2477
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX-High Channel(2477MHz).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX-High Channel(2477MHz).

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. CONNECTION DIAGRAM OF TEST SYSTEM

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249	Band Edges Measurement	Compliant
§15.249, §15.215	20 dB Bandwidth	Compliant

5. ANTENNA REQUIREMENT

5.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

Result: Compliance.


6. LINE CONDUCTED EMISSIONS

6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range(MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

6.2 Block Diagram of Test Setup

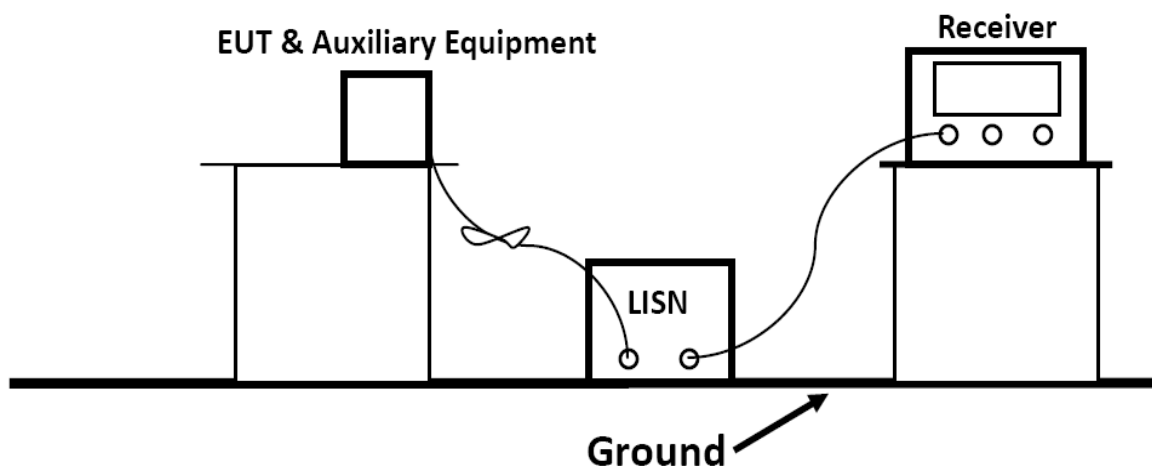


6.3 Test Results

PASS.

The test data please refer to following page.


Test Result For Line Power Input AC 120V/60Hz

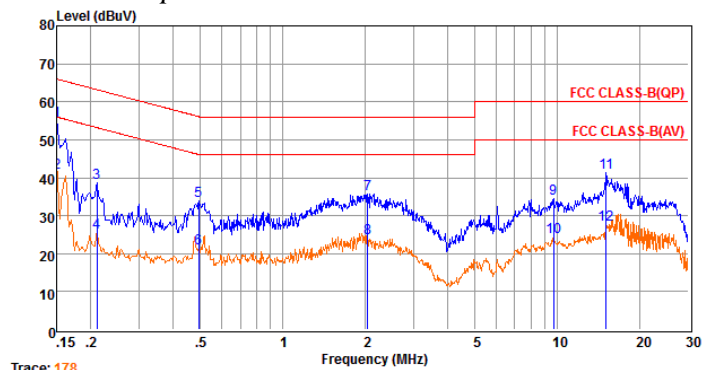

Trace: 178
 Env. Ins: 24*/56%
 Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	35.26	9.70	0.02	10.00	54.98	66.00	-11.02	QP
2	0.15	21.75	9.70	0.02	10.00	41.47	55.99	-14.52	Average
3	0.21	18.94	9.59	0.03	10.00	38.56	63.18	-24.62	QP
4	0.21	5.89	9.59	0.03	10.00	25.51	53.18	-27.67	Average
5	0.49	14.22	9.62	0.04	10.00	33.88	56.10	-22.22	QP
6	0.49	1.62	9.62	0.04	10.00	21.28	46.10	-24.82	Average
7	2.03	16.02	9.63	0.05	10.00	35.70	56.00	-20.30	QP
8	2.03	4.34	9.63	0.05	10.00	24.02	46.00	-21.98	Average
9	9.71	14.57	9.72	0.08	10.00	34.37	60.00	-25.63	QP
10	9.71	4.55	9.72	0.08	10.00	24.35	50.00	-25.65	Average
11	15.07	21.47	9.74	0.10	10.00	41.31	60.00	-18.69	QP
12	15.07	7.75	9.74	0.10	10.00	27.59	50.00	-22.41	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

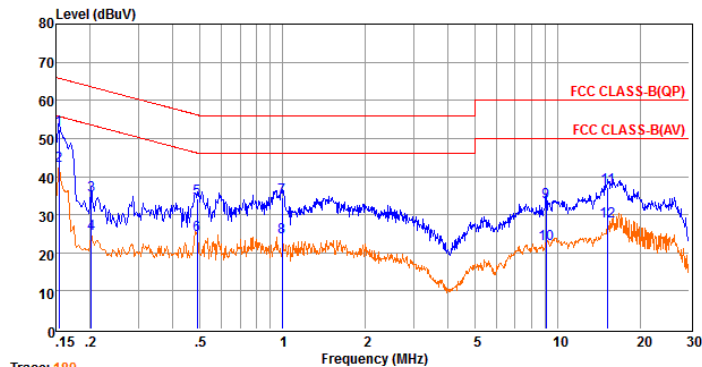


Trace: 180
 Env. Ins: 24*/56%
 Pol: LINE

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	32.72	9.58	0.02	10.00	52.32	65.78	-13.46	QP
2	0.15	23.09	9.58	0.02	10.00	42.69	55.77	-13.08	Average
3	0.20	15.46	9.63	0.02	10.00	35.11	63.54	-28.43	QP
4	0.20	5.40	9.63	0.02	10.00	25.05	53.53	-28.48	Average
5	0.49	14.43	9.62	0.04	10.00	34.09	56.19	-22.10	QP
6	0.49	5.16	9.62	0.04	10.00	24.82	46.18	-21.36	Average
7	0.99	14.86	9.63	0.05	10.00	34.54	56.00	-21.46	QP
8	0.99	4.46	9.63	0.05	10.00	24.14	46.00	-21.86	Average
9	9.06	13.52	9.69	0.08	10.00	33.29	60.00	-26.71	QP
10	9.06	2.50	9.69	0.08	10.00	22.27	50.00	-27.73	Average
11	15.23	17.30	9.71	0.10	10.00	37.11	60.00	-22.89	QP
12	15.23	8.44	9.71	0.10	10.00	28.25	50.00	-21.75	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


Test Result For Line Power Input AC 240V/60Hz

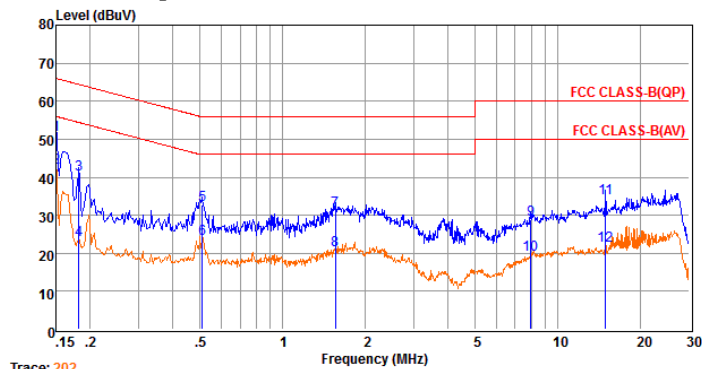

Trace: 202
 Env. Ins: 24*/56%
 Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	31.55	9.70	0.02	10.00	51.27	66.00	-14.73	QP
2	0.15	22.79	9.70	0.02	10.00	42.51	55.99	-13.48	Average
3	0.18	20.96	9.63	0.02	10.00	40.61	64.42	-23.81	QP
4	0.18	3.73	9.63	0.02	10.00	23.38	54.41	-31.03	Average
5	0.51	13.06	9.62	0.04	10.00	32.72	56.00	-23.28	QP
6	0.51	4.00	9.62	0.04	10.00	23.66	46.00	-22.34	Average
7	1.55	11.58	9.63	0.05	10.00	31.26	56.00	-24.74	QP
8	1.55	1.20	9.63	0.05	10.00	20.88	46.00	-25.12	Average
9	7.98	8.99	9.70	0.07	10.00	28.76	60.00	-31.24	QP
10	7.98	-0.13	9.70	0.07	10.00	19.64	50.00	-30.36	Average
11	14.91	14.64	9.74	0.10	10.00	34.48	60.00	-25.52	QP
12	14.91	2.28	9.74	0.10	10.00	22.12	50.00	-27.88	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

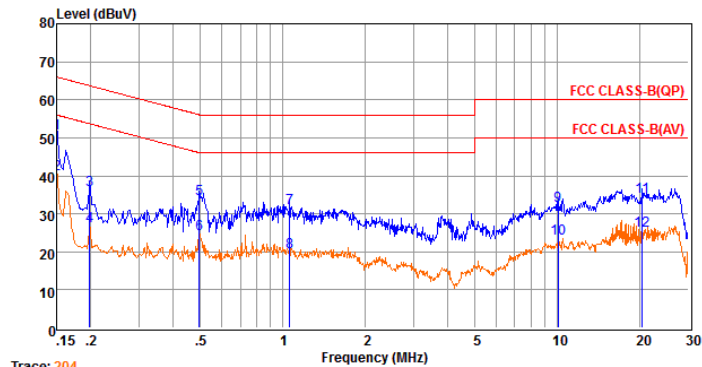

Trace: 204
 Env. Ins: 24*/56%
 Pol: LINE

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	31.42	9.57	0.02	10.00	51.01	66.00	-14.99	QP
2	0.15	20.91	9.57	0.02	10.00	40.50	55.99	-15.49	Average
3	0.20	16.71	9.63	0.02	10.00	36.36	63.71	-27.35	QP
4	0.20	7.00	9.63	0.02	10.00	26.65	53.71	-27.06	Average
5	0.50	14.25	9.62	0.04	10.00	33.91	56.05	-22.14	QP
6	0.50	5.03	9.62	0.04	10.00	24.69	46.05	-21.36	Average
7	1.06	11.87	9.63	0.05	10.00	31.55	56.00	-24.45	QP
8	1.06	0.37	9.63	0.05	10.00	20.05	46.00	-25.95	Average
9	10.07	12.26	9.69	0.08	10.00	32.03	60.00	-27.97	QP
10	10.07	3.59	9.69	0.08	10.00	23.36	50.00	-26.64	Average
11	20.38	14.70	9.75	0.12	10.00	34.57	60.00	-25.43	QP
12	20.38	5.83	9.75	0.12	10.00	25.70	50.00	-24.30	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

7. RADIATED EMISSION MEASUREMENT

7.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) and 15.249 limit in the table below has to be followed.

Fundamental Frequency	Field Strength of fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

7.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 12.75 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum found antenna polarisation and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0 ° to 360 °). This measurement is repeated for different EUT-table positions (0 ° to 150 ° in 30 °-steps). This procedure is repeated for both antenna polarisations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 12.75 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


7.4. Block Diagram of Test Setup

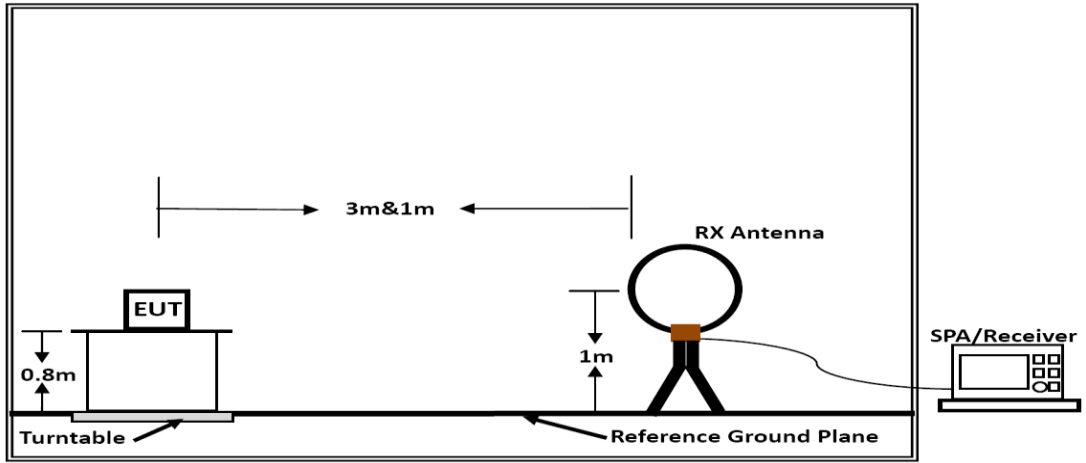

Below 30MHz

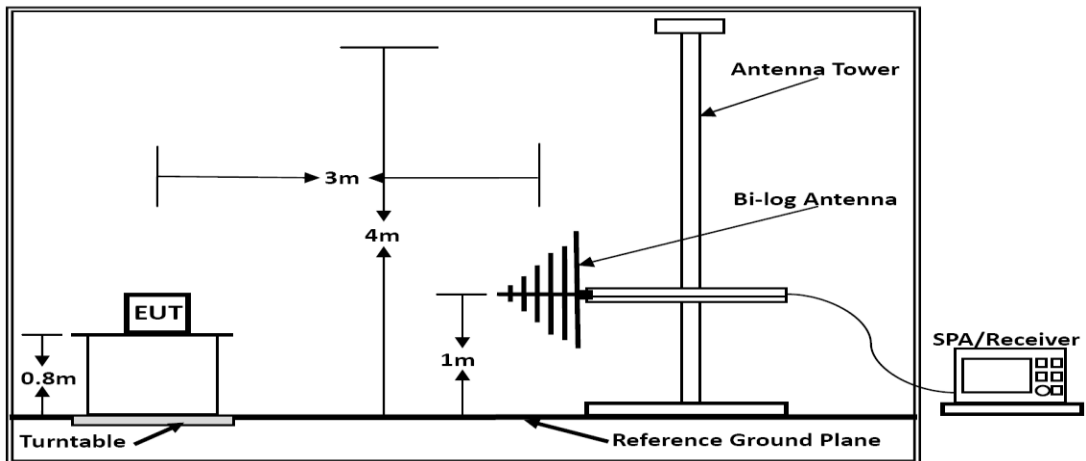

Below 1GHz

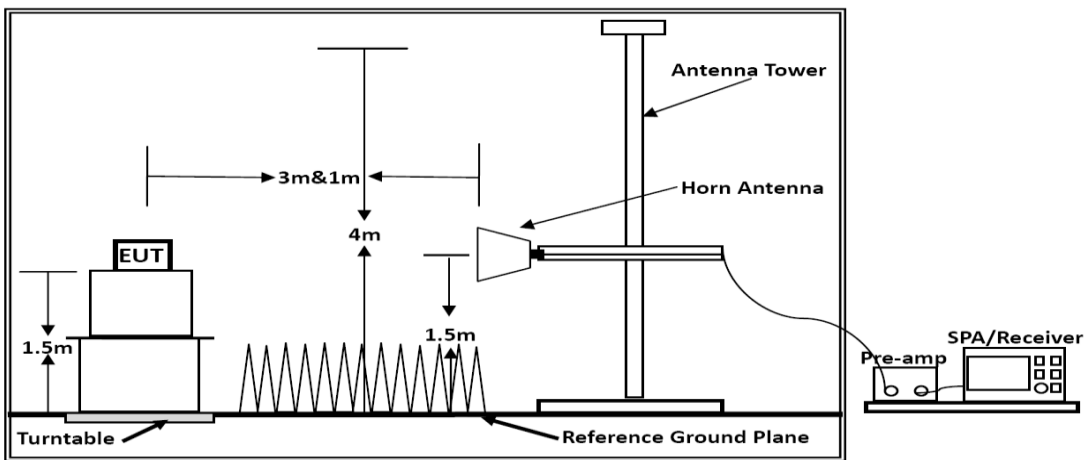

Above 1GHz

7.5. Test Results

Results of Radiated Emissions (9kHz~30MHz)

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note


Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


Results of Radiated Emissions (30MHz~1000MHz)

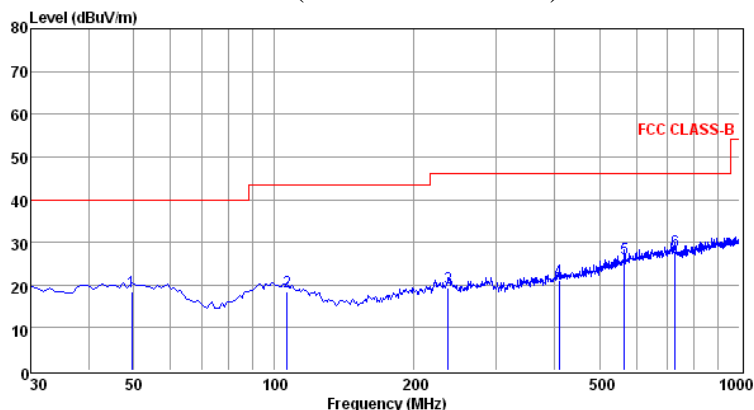

Env./Ins: 24°C/56%
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	49.40	4.56	0.54	13.29	18.39	40.00	-21.61	QP
2	106.63	5.30	0.68	12.56	18.54	43.50	-24.96	QP
3	236.61	6.56	0.96	11.94	19.46	46.00	-26.54	QP
4	410.24	4.55	1.28	15.27	21.10	46.00	-24.90	QP
5	566.41	6.92	1.48	17.82	26.22	46.00	-19.78	QP
6	727.43	7.05	1.70	19.15	27.90	46.00	-18.10	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

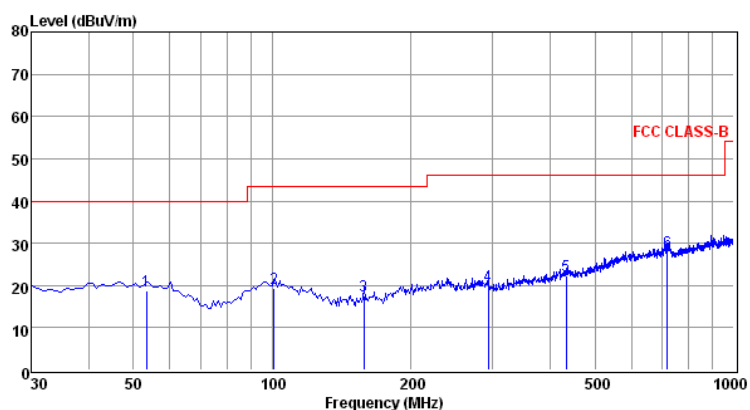


Env./Ins: 24°C/56%
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	53.28	5.27	0.46	13.10	18.83	40.00	-21.17	QP
2	100.81	5.77	0.60	13.09	19.46	43.50	-24.04	QP
3	158.04	8.27	0.83	8.59	17.69	43.50	-25.81	QP
4	293.84	6.00	1.08	12.94	20.02	46.00	-25.98	QP
5	433.52	5.47	1.18	15.53	22.18	46.00	-23.82	QP
6	718.70	7.29	1.75	19.04	28.08	46.00	-17.92	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

***Note: Pre-scan all mode and recorded the worst case results in this report (TX- 2477MHz).

7.6. Results for Radiated Emissions (Above 1GHz)

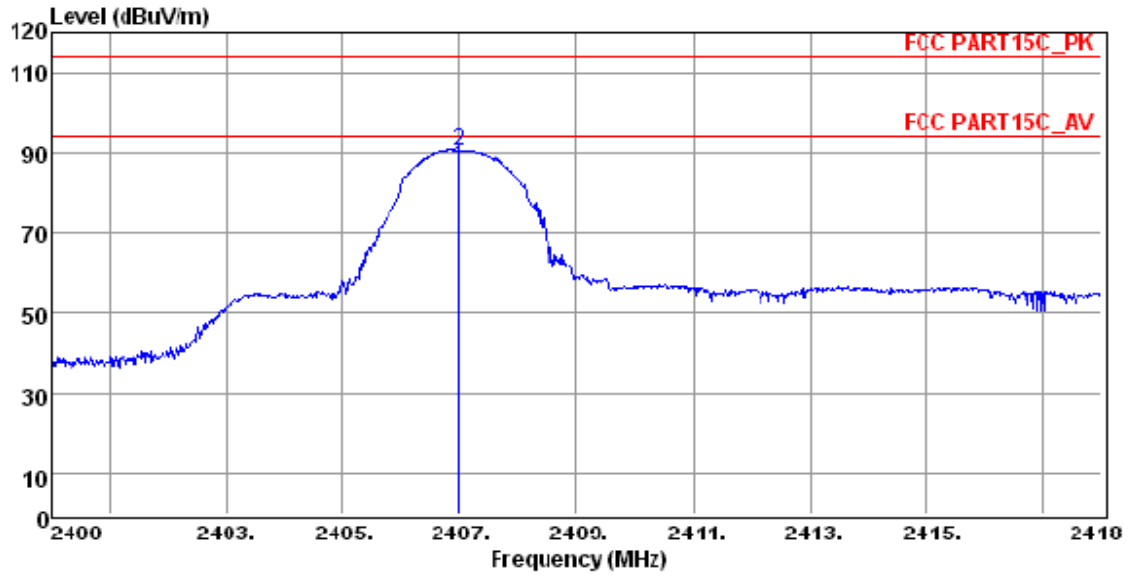


Env./Ins: 24°C/56%
 Test Mode: TX-2407
 pol: VERTICAL

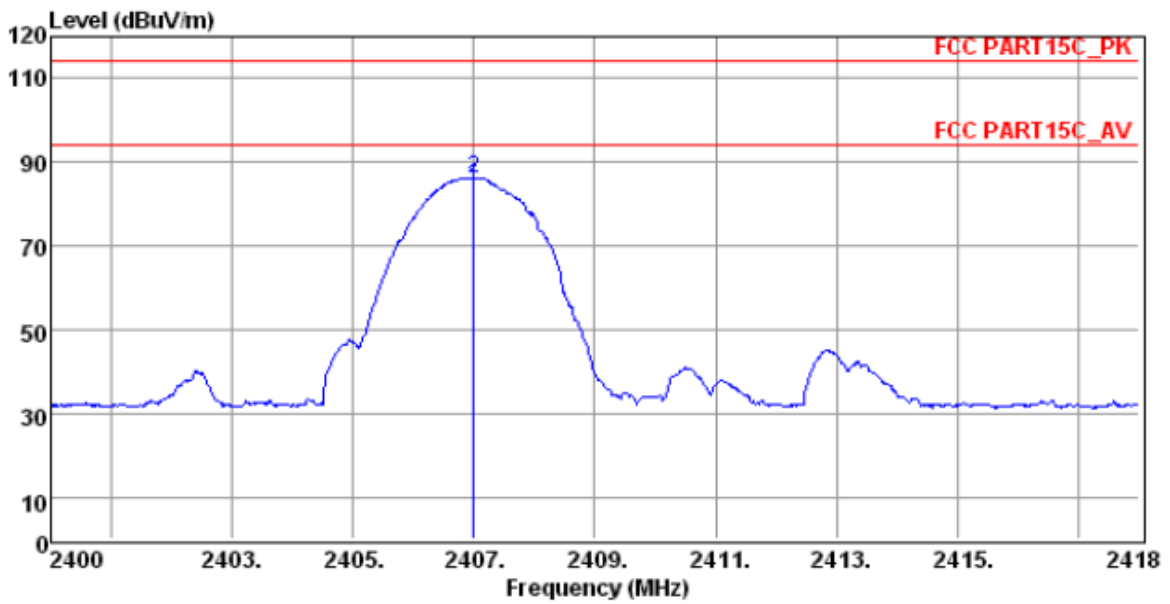


Env./Ins: 24°C/56%
 Test Mode: TX-2407
 pol: HORIZONTAL

Field Strength Of Fundamental (TX-2407MHz)						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2407	H	86.16	84.64	114	94	Pass
2407	V	89.43	86.71	114	94	Pass

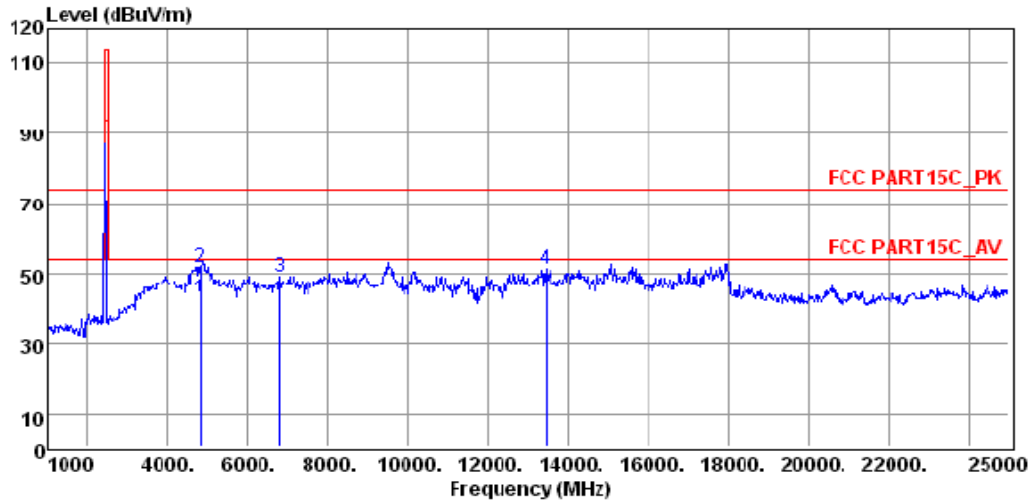


Env./Ins: 24 °C / 56%
 Test Mode: TX-2407
 pol: VERTICAL

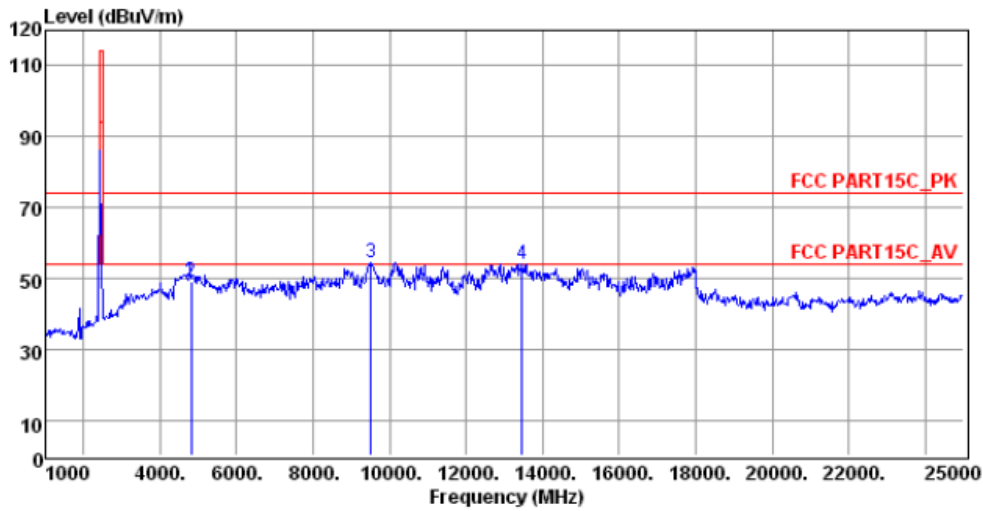


Env./Ins: 24 °C / 56%
 Test Mode: TX-2407
 pol: HORIZONTAL

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4814.13	44.37	33.06	35.04	3.94	46.33	74	-27.67	Peak	Horizontal
4814.16	35.64	33.06	35.04	3.94	37.60	54	-16.40	Average	Horizontal
4814.13	47.51	33.06	35.04	3.94	49.47	74	-24.53	Peak	Vertical
4814.16	38.12	33.06	35.04	3.94	40.08	54	-13.92	Average	Vertical

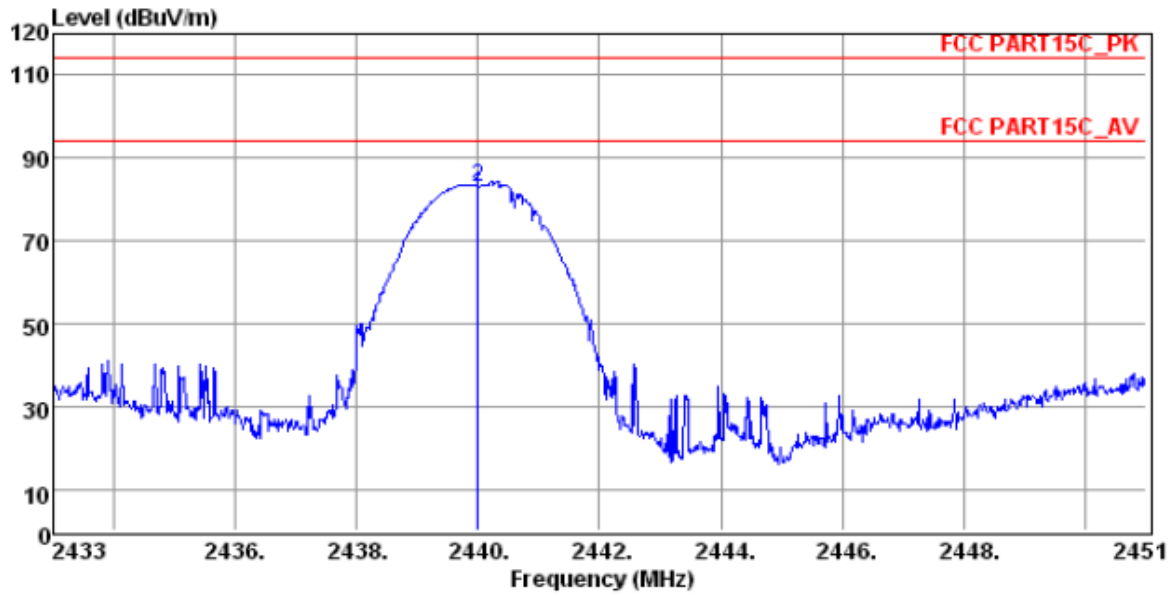


Env./Ins: 24 °C / 568
 Test Mode: TX-2440
 pol: HORIZONTAL

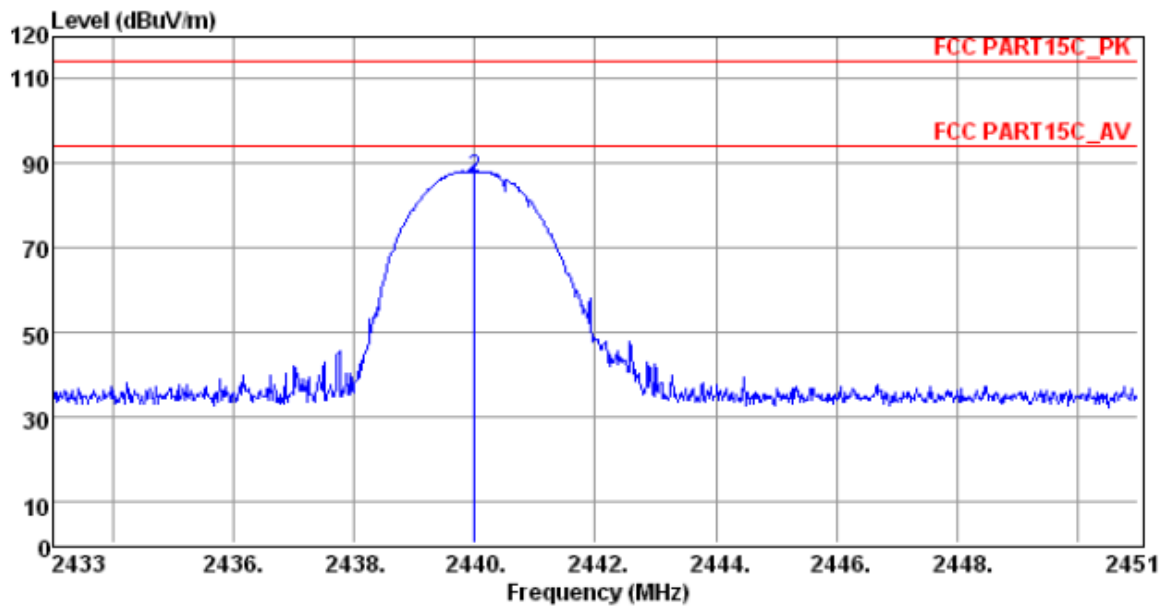


Env./Ins: 24 °C / 568
 Test Mode: TX-2440
 pol: VERTICAL

Field Strength Of Fundamental (TX-2440MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2440	H	83.67	81.94	114	94	Pass
2440	V	86.31	84.53	114	94	Pass

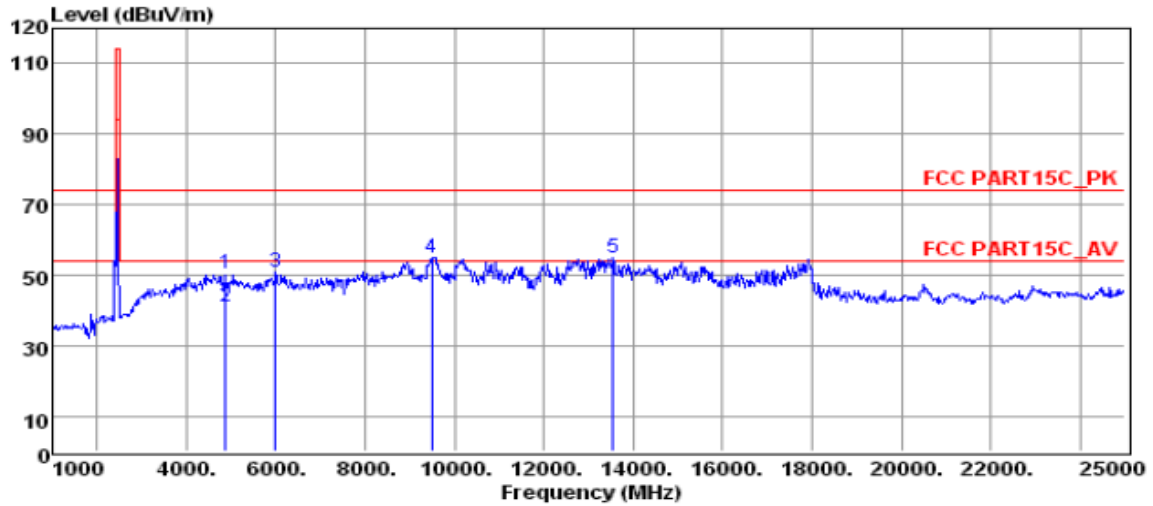


Env./Ins: 24°C/56%
 Test Mode: TX-2440
 pol: HORIZONTAL

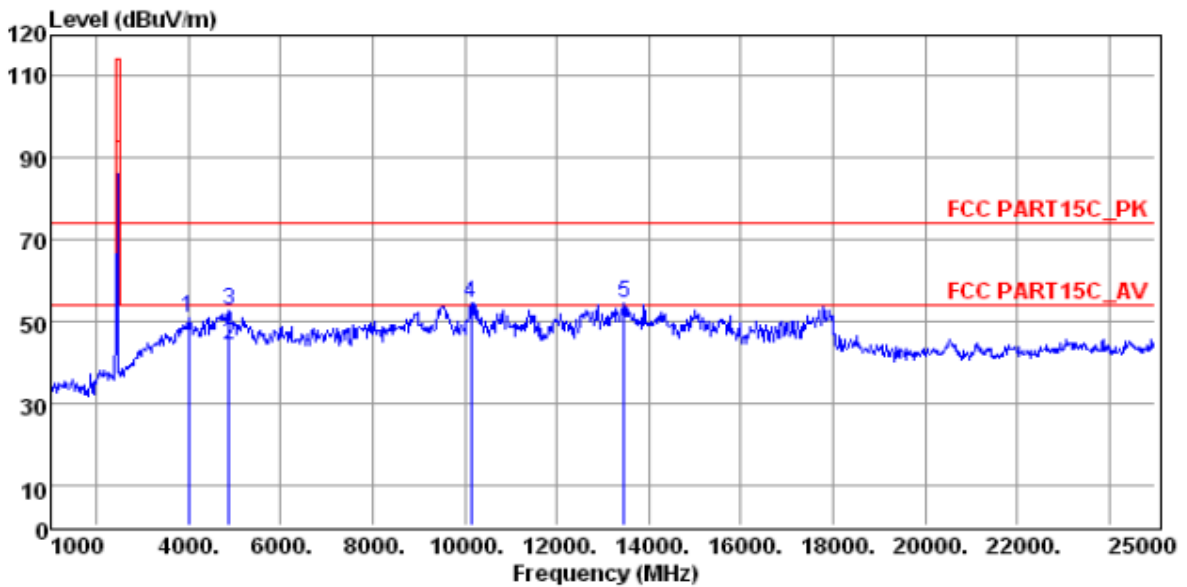


Env./Ins: 24°C/56%
 Test Mode: TX-2440
 pol: VERTICAL

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.21	45.83	33.16	35.15	3.96	47.80	74	-26.20	Peak	Horizontal
4880.23	36.19	33.16	35.15	3.96	38.16	54	-15.84	Average	Horizontal
4880.21	48.11	33.16	35.15	3.96	50.08	74	-23.92	Peak	Vertical
4880.23	39.63	33.16	35.15	3.96	41.60	54	-12.40	Average	Vertical

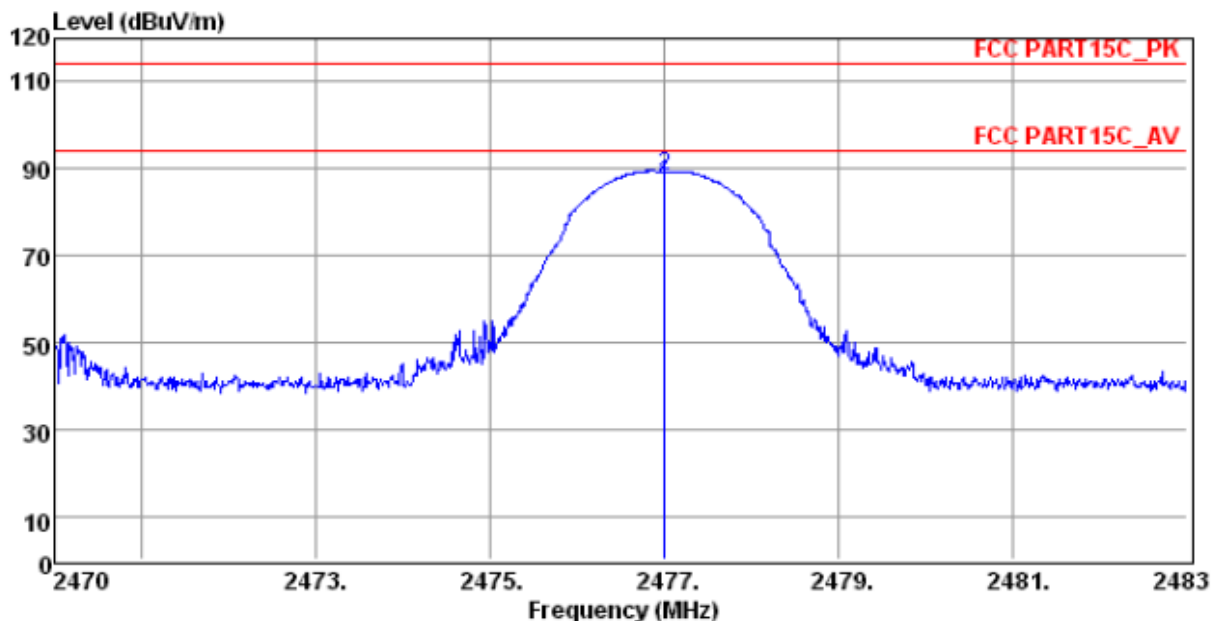


Env./Ins: 24°C / 56%
 Test Mode: TX-2477
 pol: HORIZONTAL

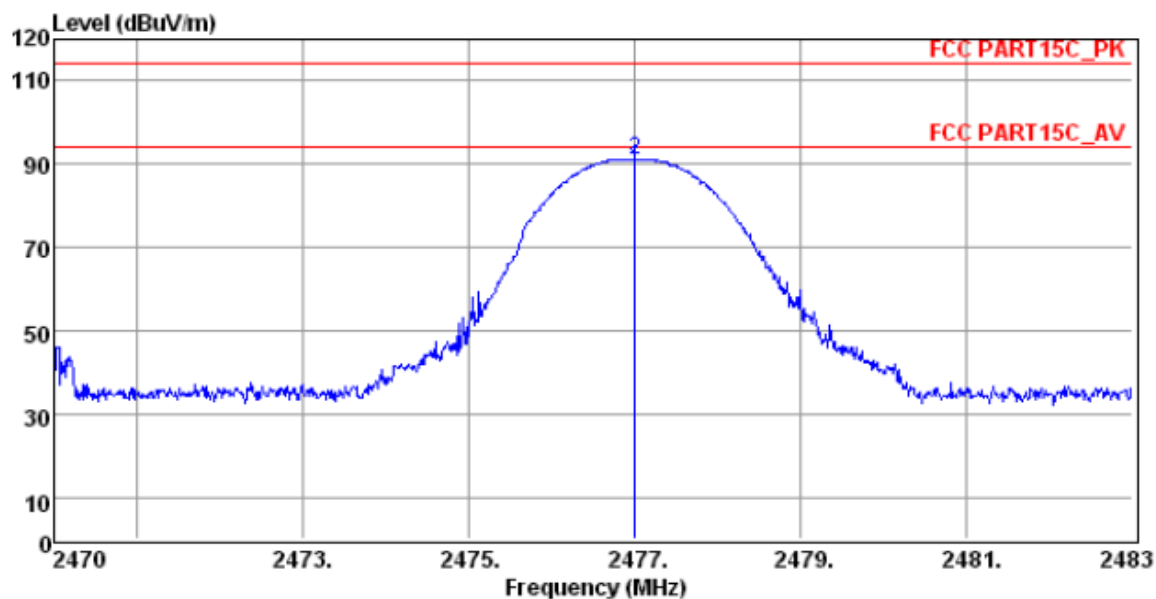


Env./Ins: 24°C / 56%
 Test Mode: TX-2477
 pol: VERTICAL

Field Strength Of Fundamental (TX-2477MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2477	H	88.11	86.45	114	94	Pass
2477	V	91.37	89.69	114	94	Pass

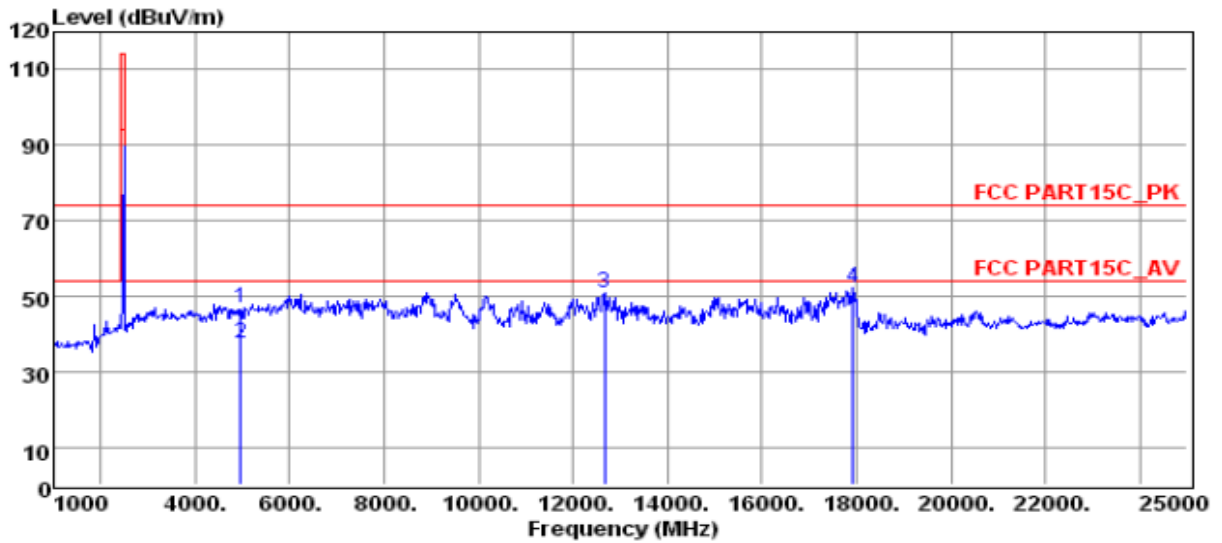

Env./Ins: 24°C/56%
 Test Mode: TX-2477
 pol: HORIZONTAL

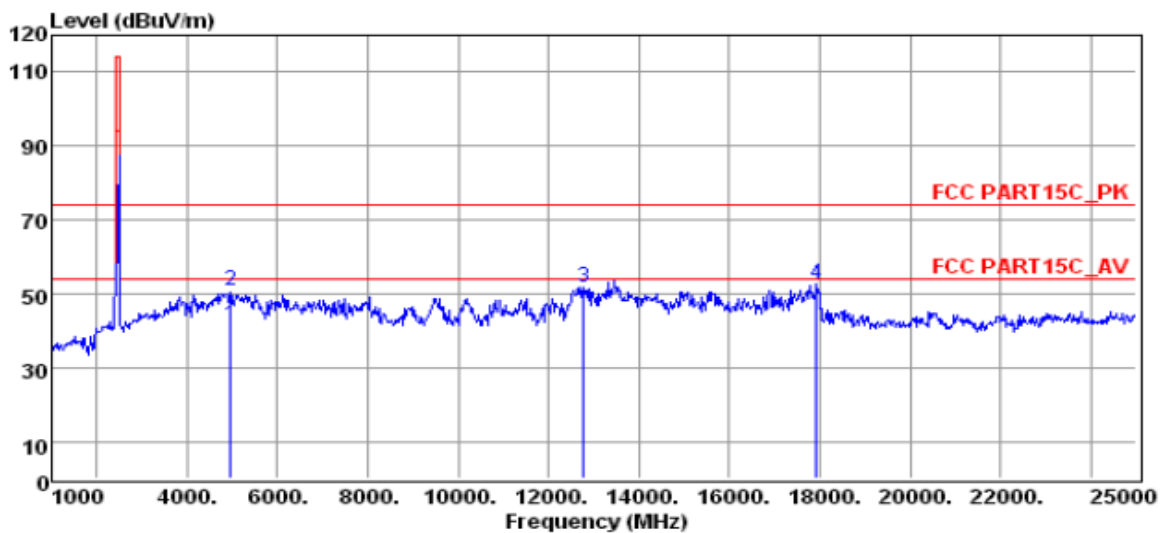

Env./Ins: 24°C/56%
 Test Mode: TX-2477
 pol: VERTICAL

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4954.33	46.67	33.26	35.14	3.98	48.77	74	-25.23	Peak	Horizontal
4954.35	37.06	33.26	35.14	3.98	39.16	54	-14.84	Average	Horizontal
4954.33	50.11	33.26	35.14	3.98	52.21	74	-21.79	Peak	Vertical
4954.35	41.32	33.26	35.14	3.98	43.42	54	-10.58	Average	Vertical

Notes:


1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

7.7. Results for Band edge Testing (Radiated)

Only record the worst test case as following:



GFSK							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-64.577	2.0	0.0	32.683	Peak	74.00	PASS
2310.000	-77.411	2.0	0.0	19.849	AV	54.00	PASS
2390.000	-48.822	2.0	0.0	48.438	Peak	74.00	PASS
2390.000	-75.906	2.0	0.0	21.354	AV	54.00	PASS
2483.500	-36.591	2.0	0.0	60.669	Peak	74.00	PASS
2483.500	-74.492	2.0	0.0	22.768	AV	54.00	PASS
2500.000	-47.752	2.0	0.0	49.508	Peak	74.00	PASS
2500.000	-75.828	2.0	0.0	21.432	AV	54.00	PASS

Test plot of Band Edge (Radiated)

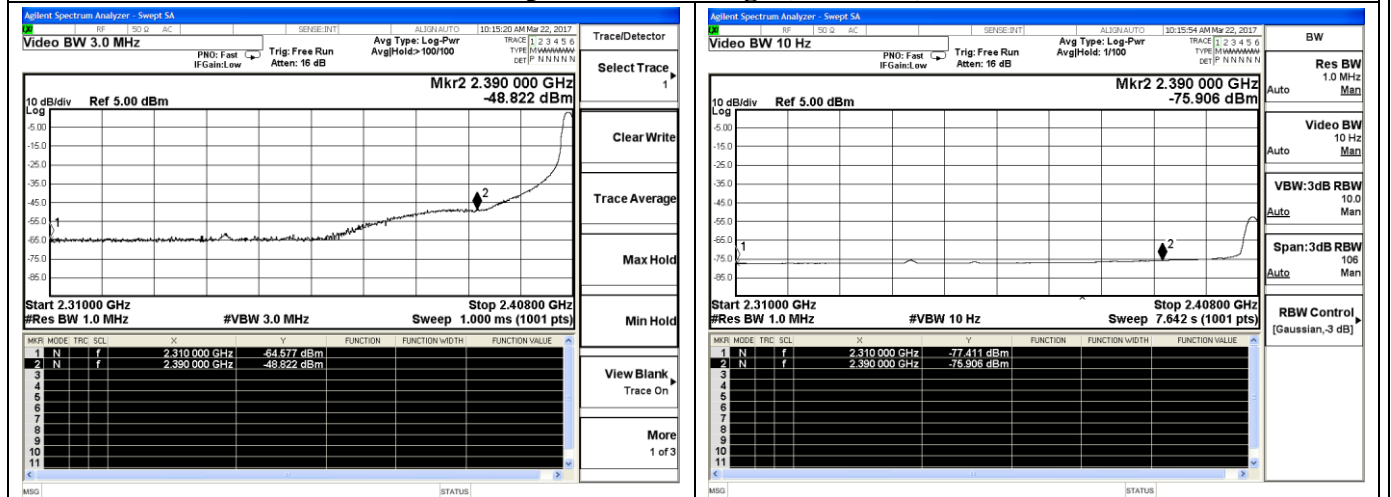

Low Channel / 2407MHz - Peak

Low Channel / 2407MHz – Average

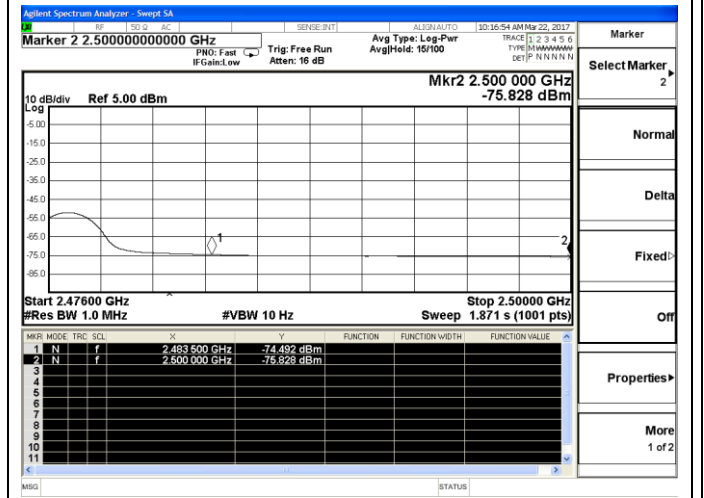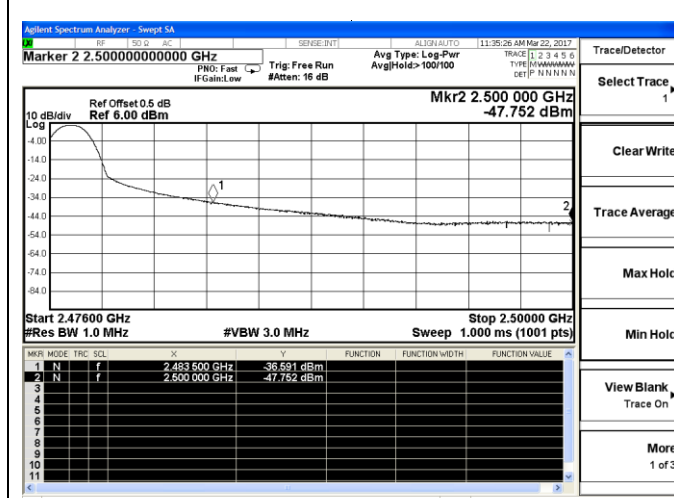

High Channel / 2477MHz - Peak


High Channel / 2477MHz – Average

8. 20 DB BANDWIDTH MEASUREMENT

8.1. Standard Applicable

According to §15.215

8.2. Block Diagram of Test Setup

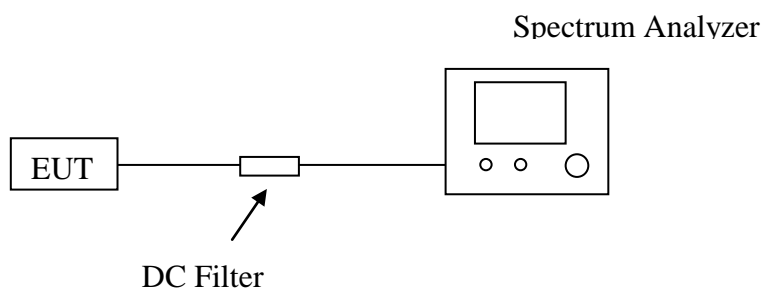

8.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 3MHz

RBW = 30KHz

VBW = 100KHz

Sweep = auto


Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

8.4. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
2407	0.7416	Non-Specified
2440	0.8145	
2477	0.8236	

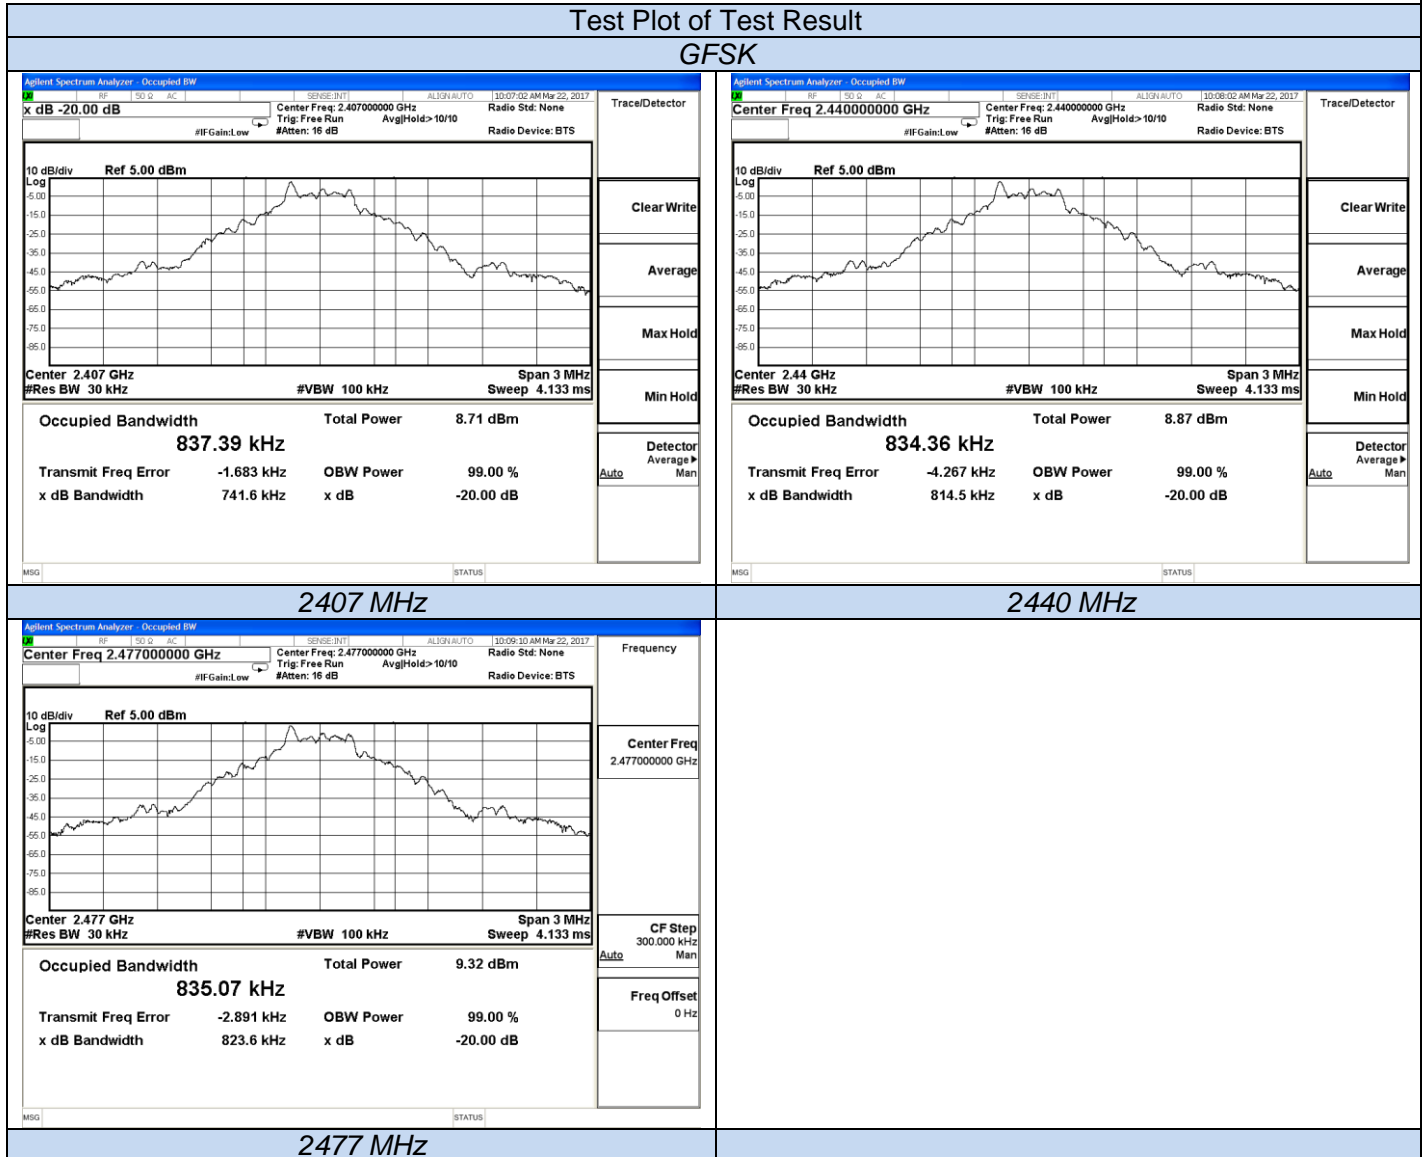

-----THE END OF TEST REPORT-----