




802.11ac(HT40) U-NII-1 High channel

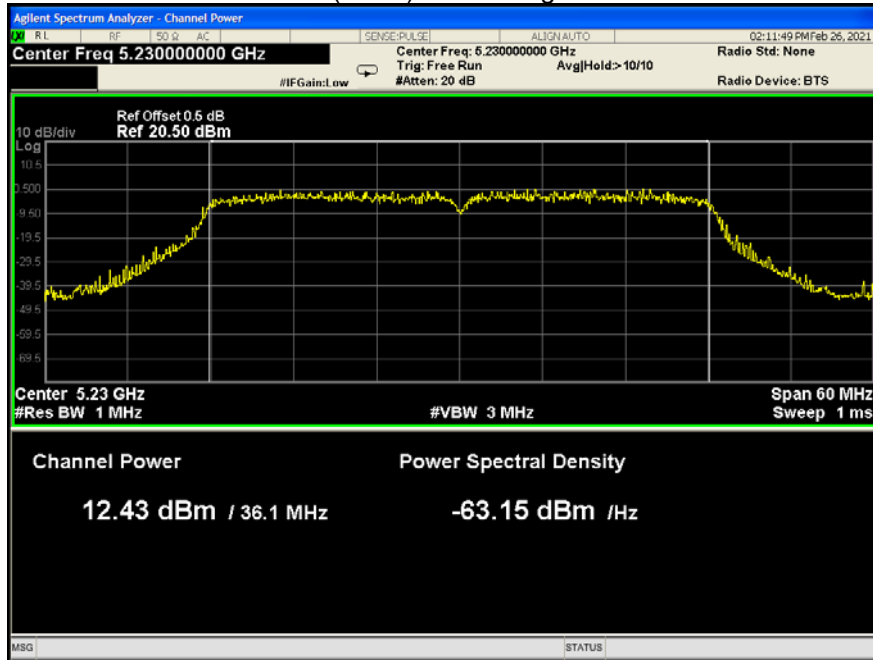


802.11n(HT40) U-NII-1 Low channel

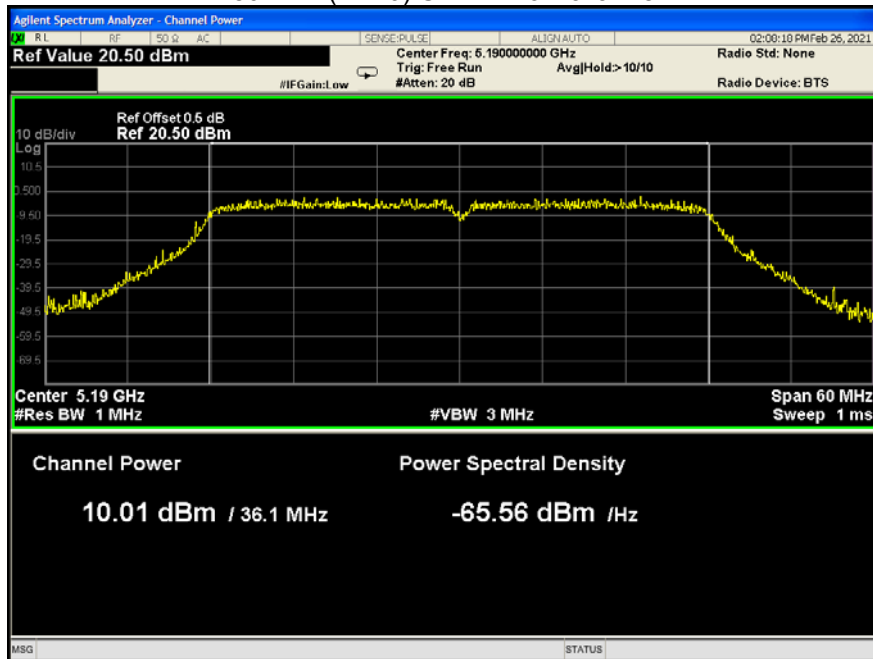


802.11n(HT40) U-NII-1 High channel

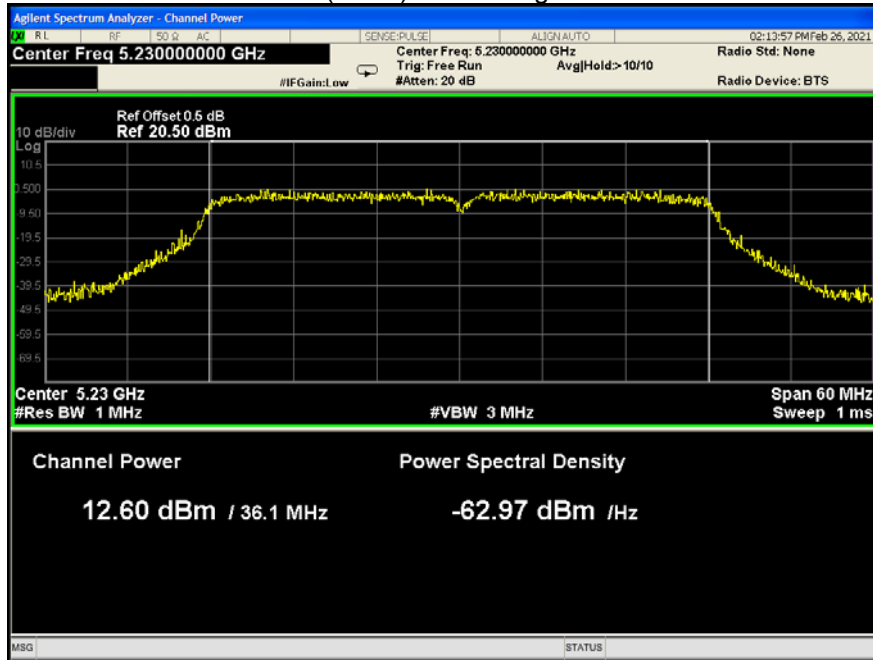


802.11ac(HT80) U-NII-1 Low channel

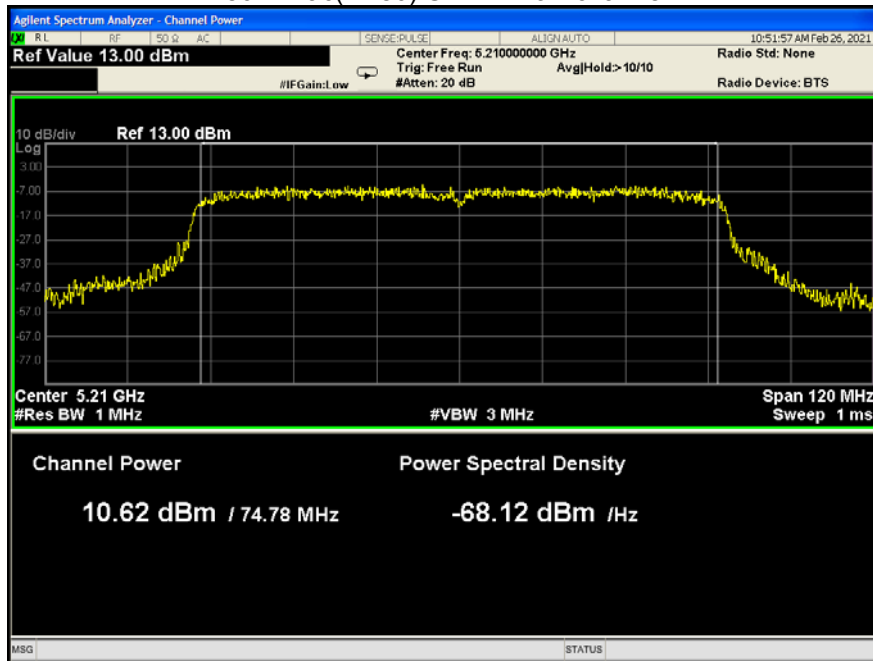


802.11a U-NII-2A Low channel

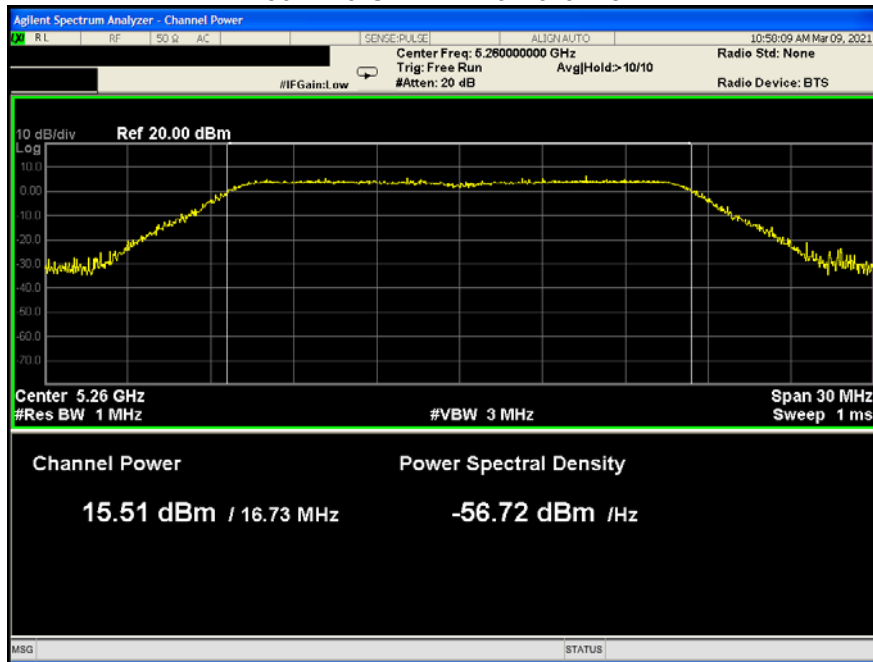


802.11a U-NII-2A Middle channel

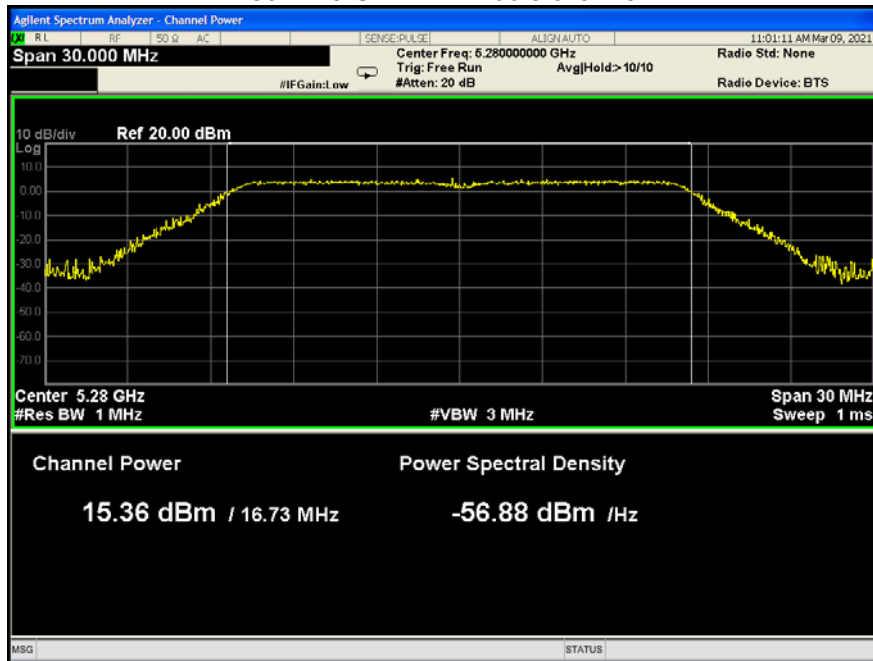


802.11a U-NII-2A High channel

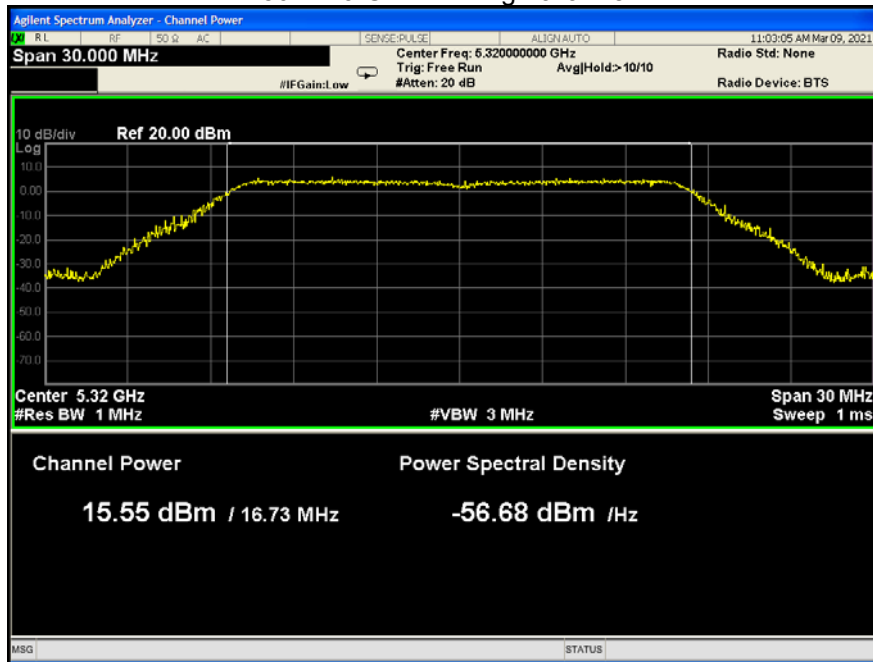


802.11n(HT20) U-NII-2A Low channel

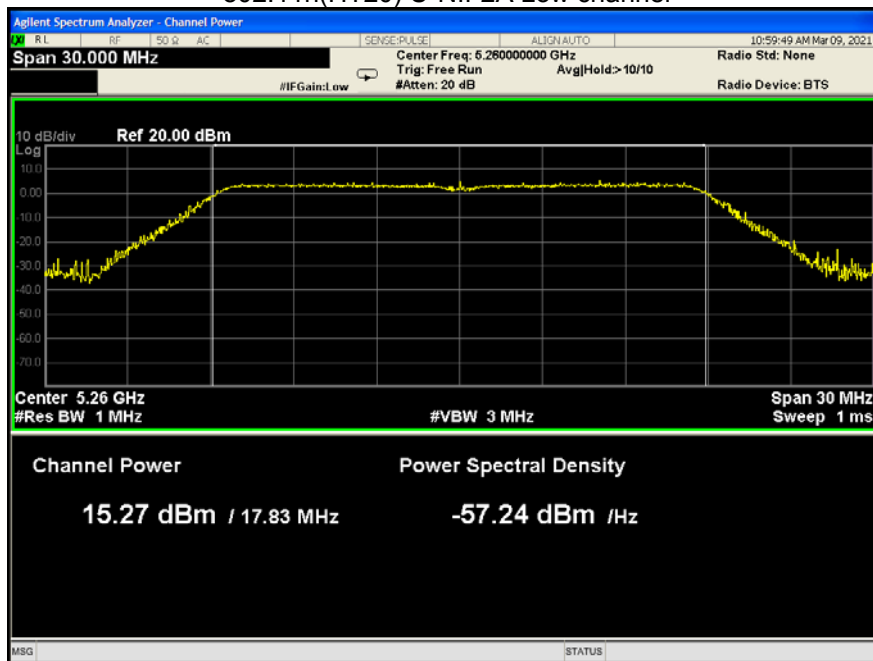


802.11n(HT20) U-NII-2A Middle channel

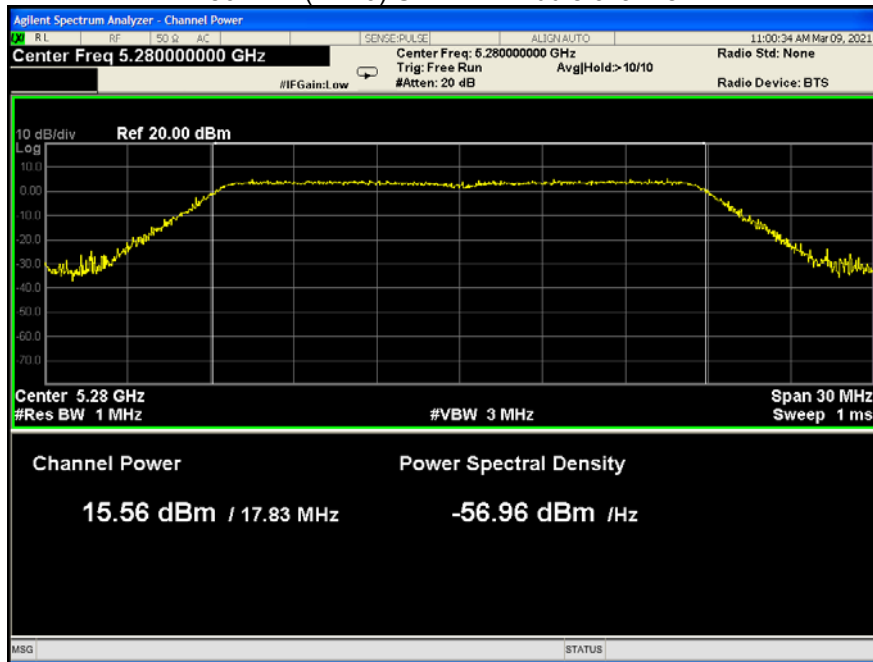


802.11n(HT20) U-NII-2A High channel

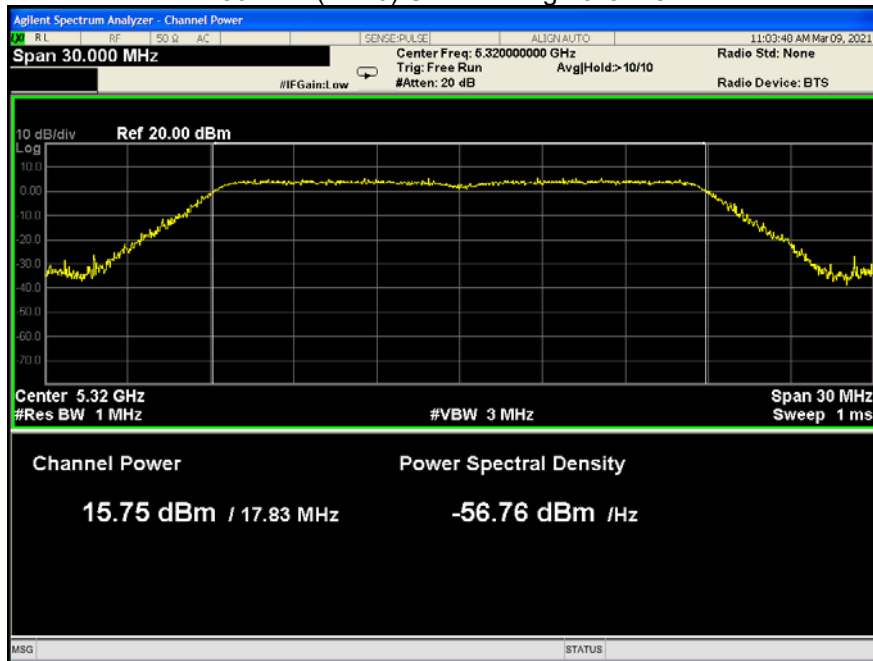


802.11ac(HT20) U-NII-2A Low channel

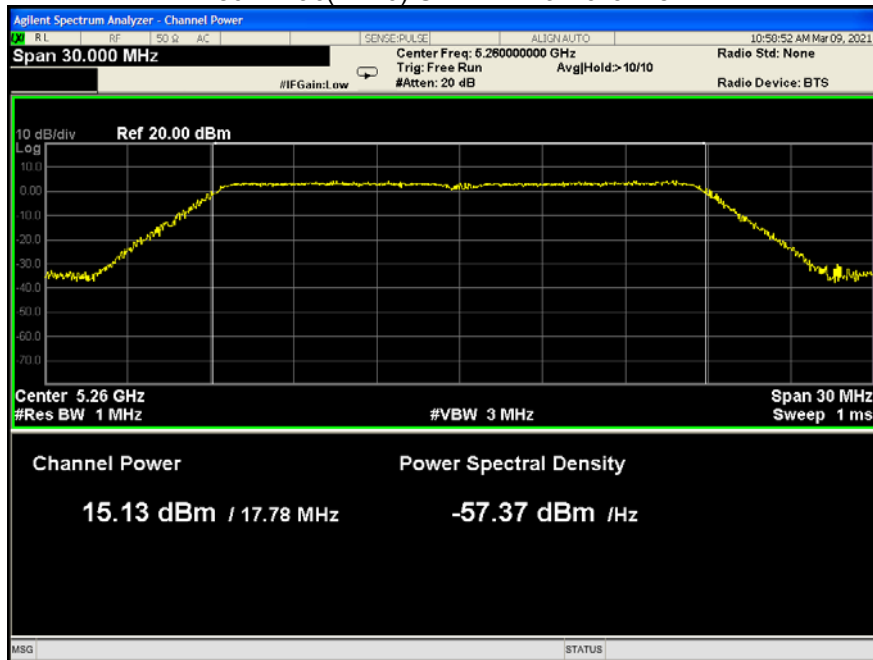


802.11ac(HT20) U-NII-2A Middle channel

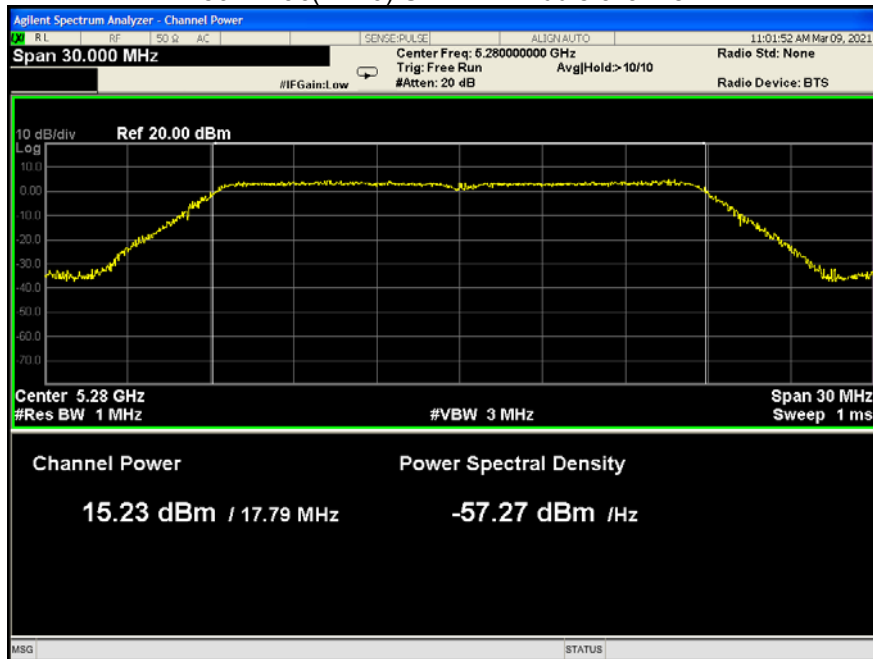


802.11ac(HT20) U-NII-2A High channel

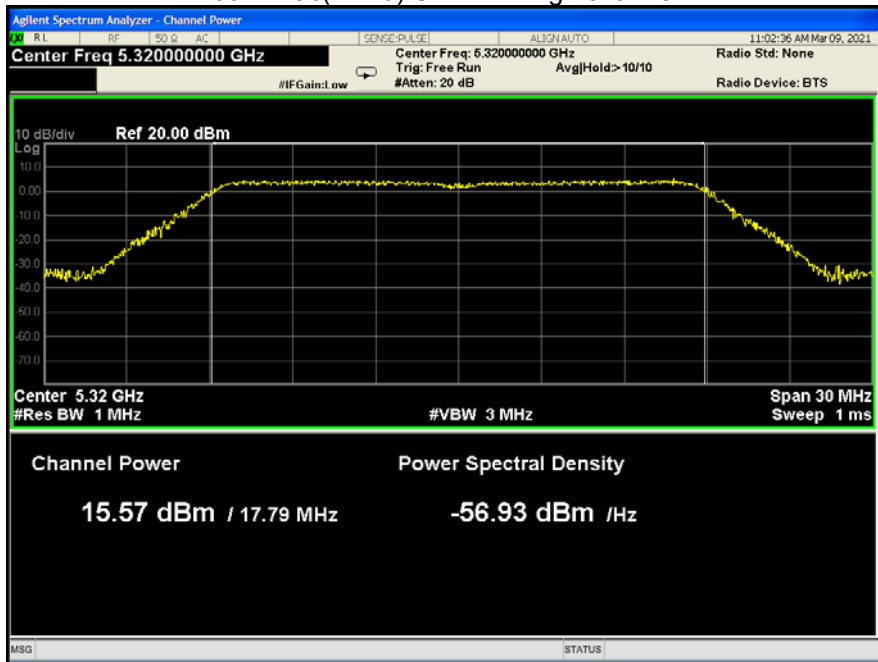


802.11ac(HT40) U-NII-2A Low channel

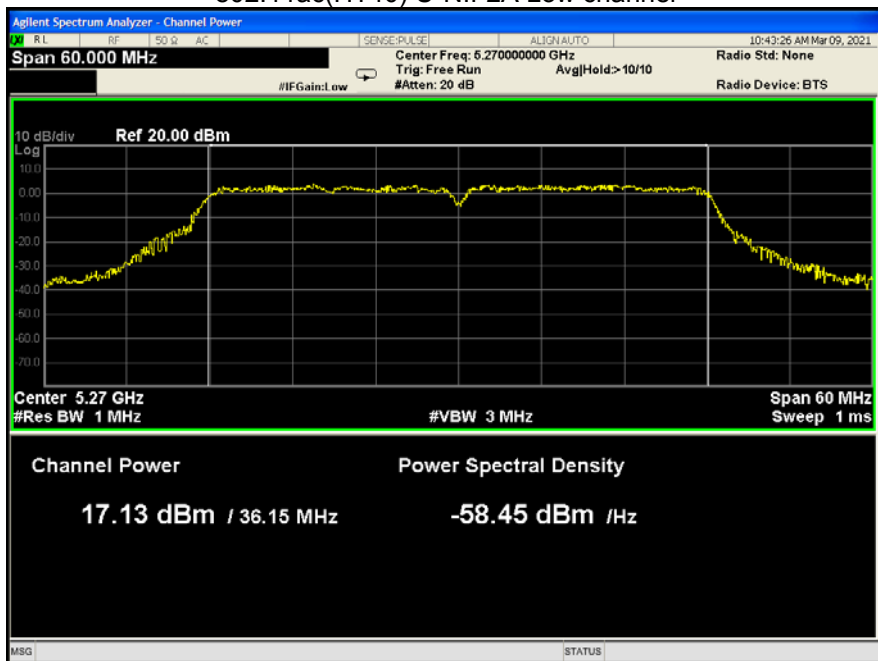


802.11ac(HT40) U-NII-2A High channel

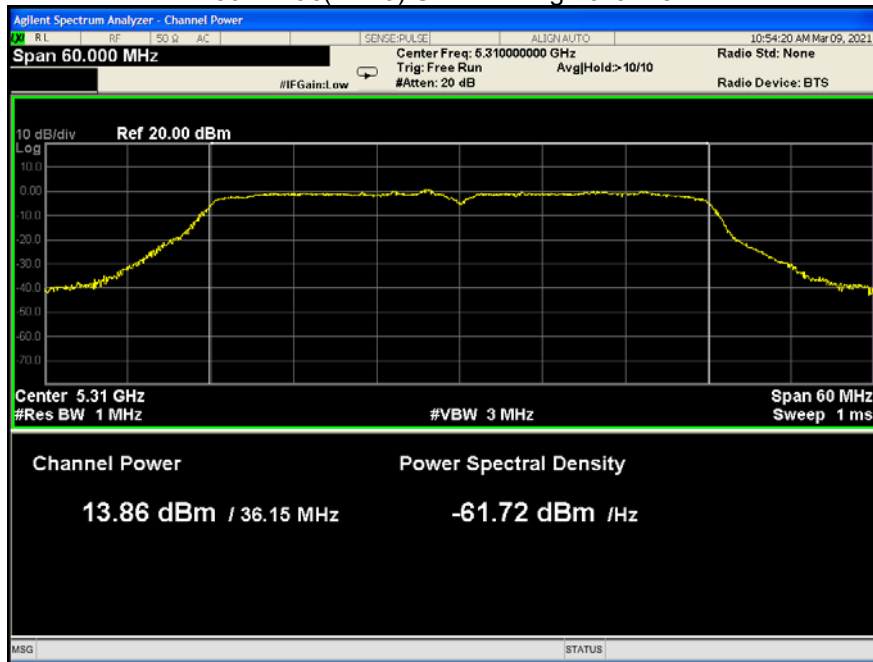


802.11n(HT40) U-NII-2A Low channel

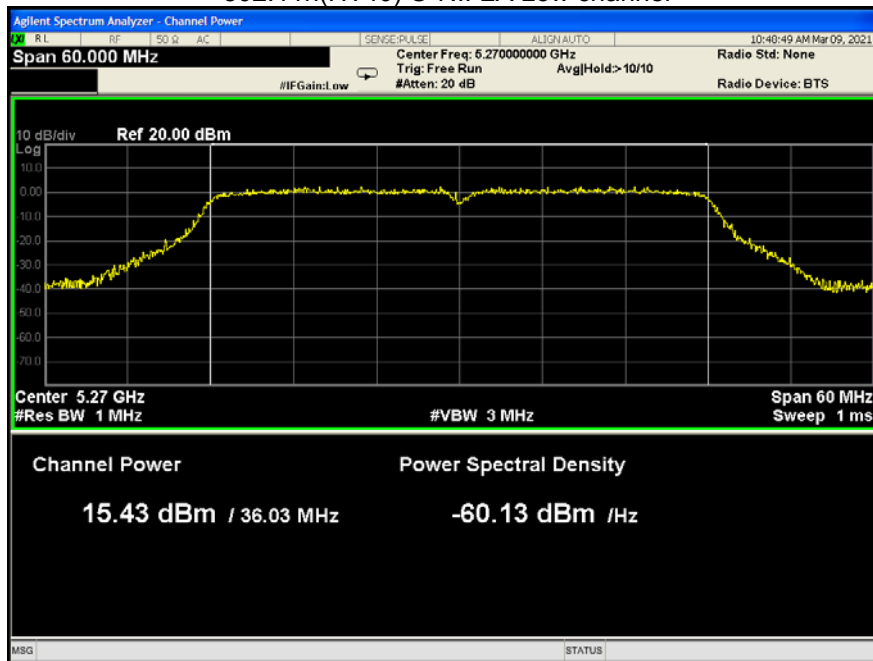


802.11n(HT40) U-NII-2A High channel

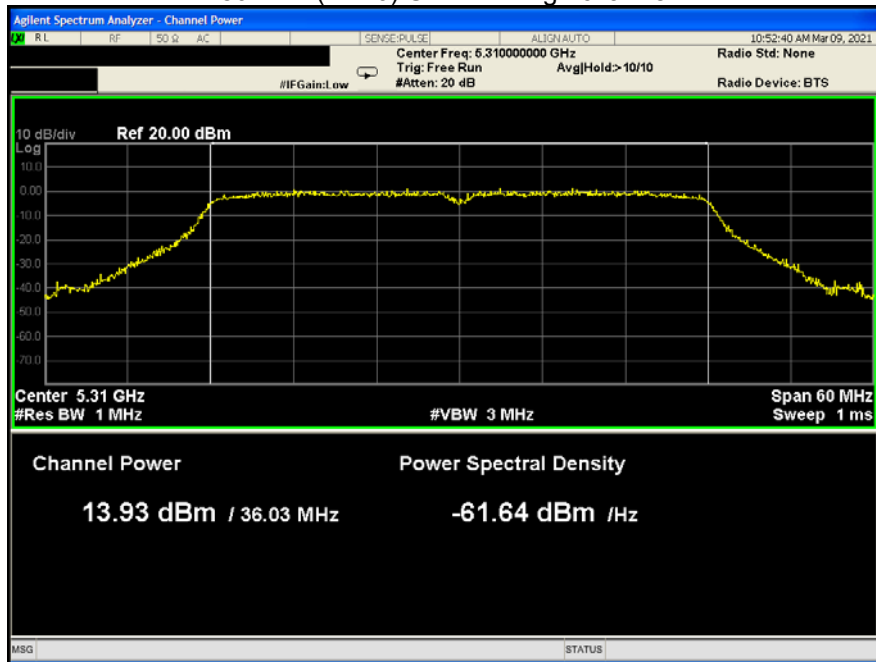


802.11ac(HT80) U-NII-2A Low channel

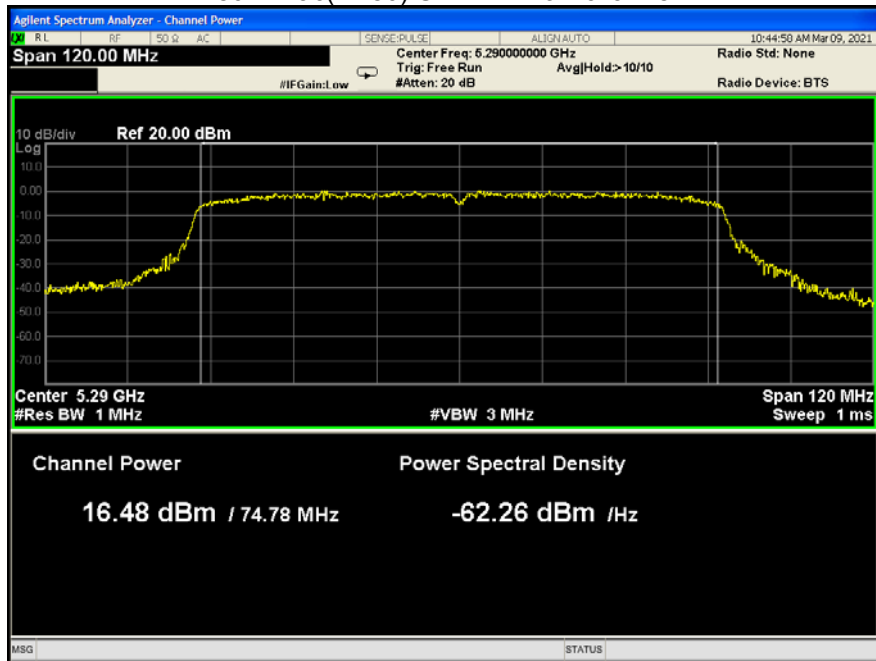


802.11a U-NII-2C Low channel

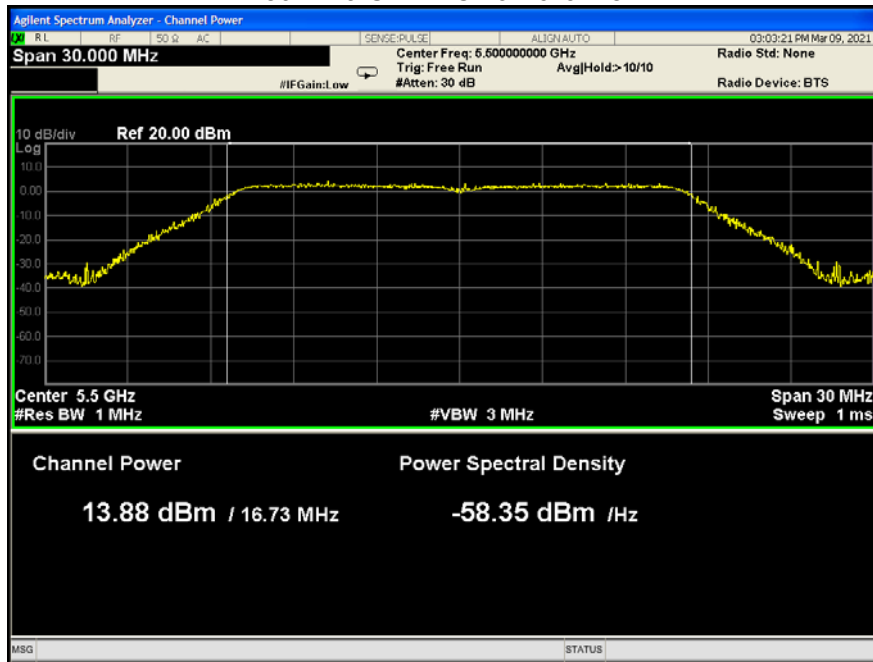


802.11a U-NII-2C Middle channel

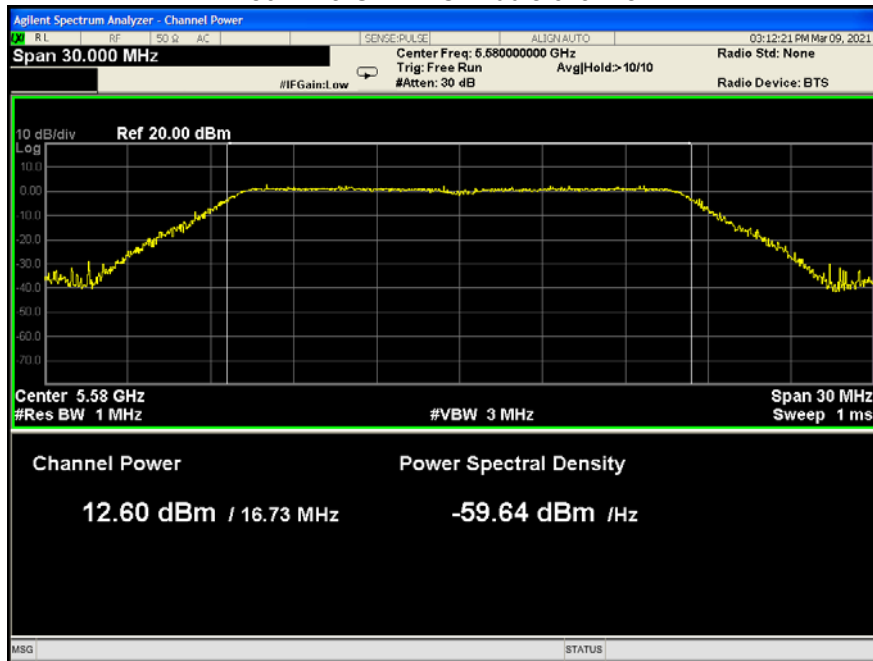


802.11a U-NII-2C High channel

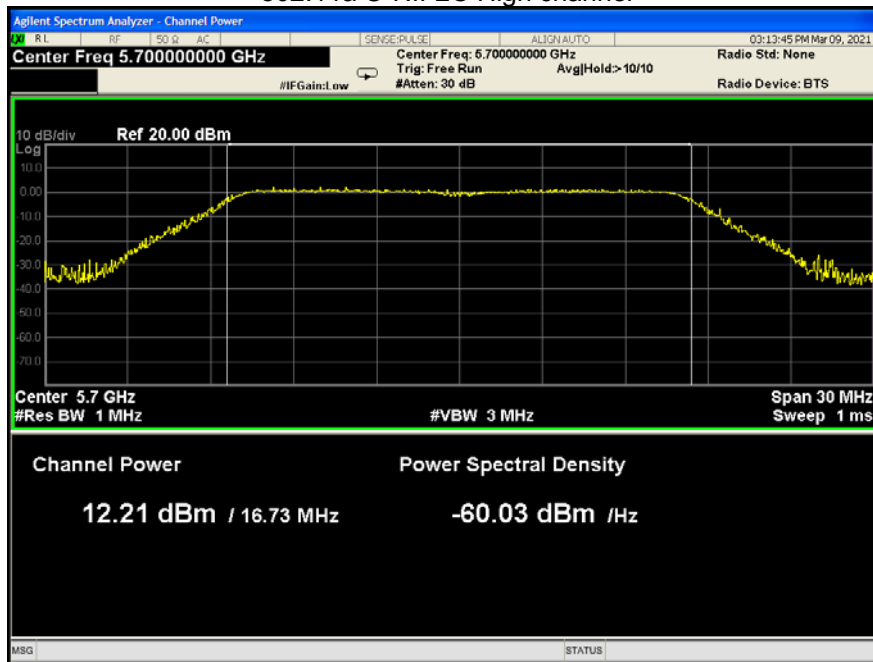


802.11n(HT20) U-NII-2C Low channel

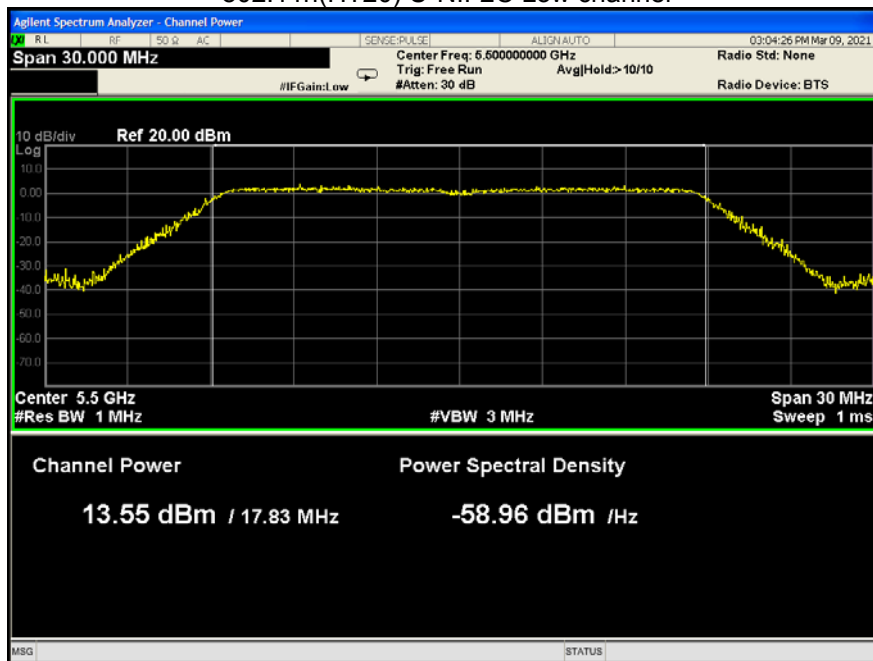


802.11n(HT20) U-NII-2C Middle channel

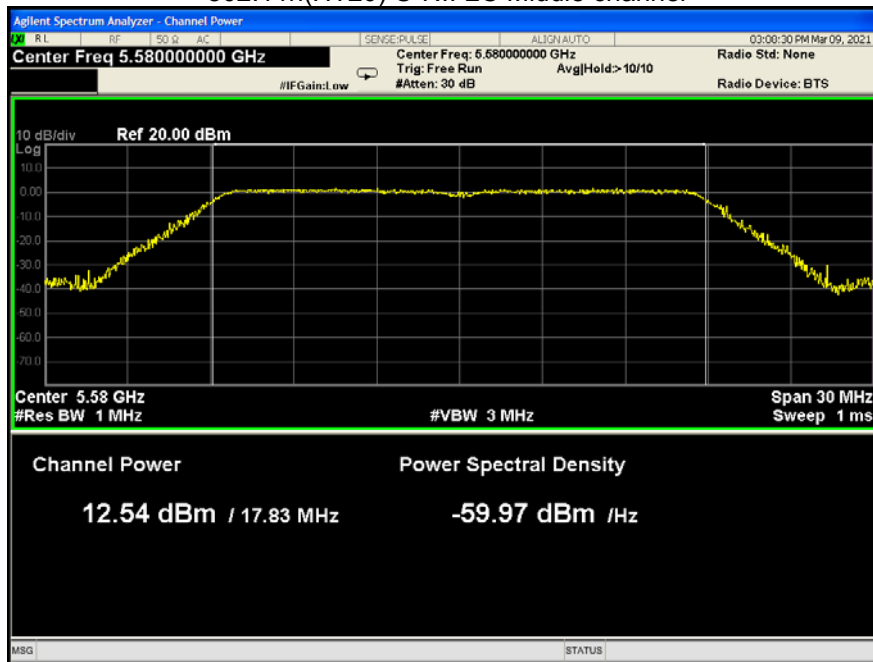


802.11n(HT20) U-NII-2C High channel

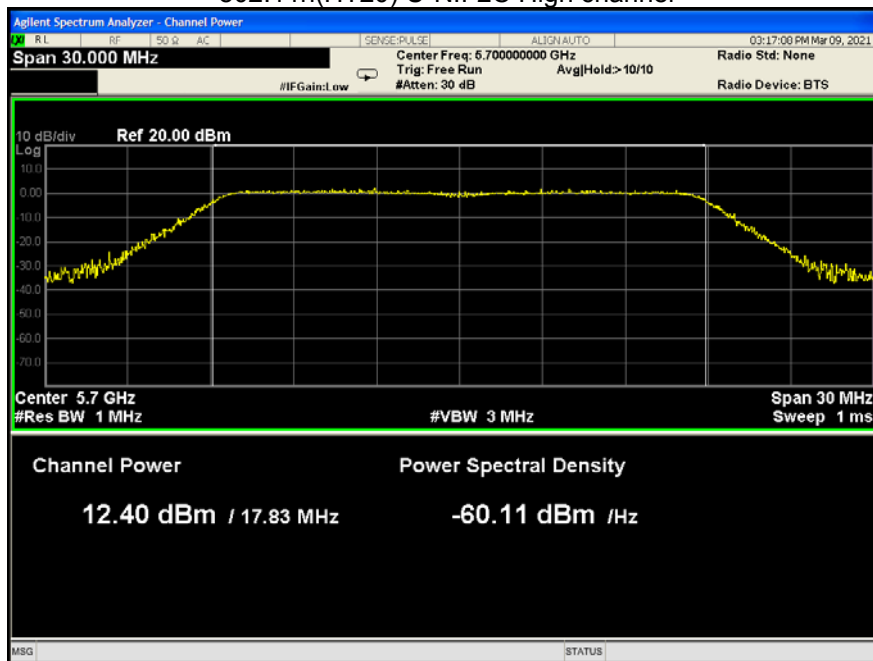


802.11ac(HT20) U-NII-2C Low channel

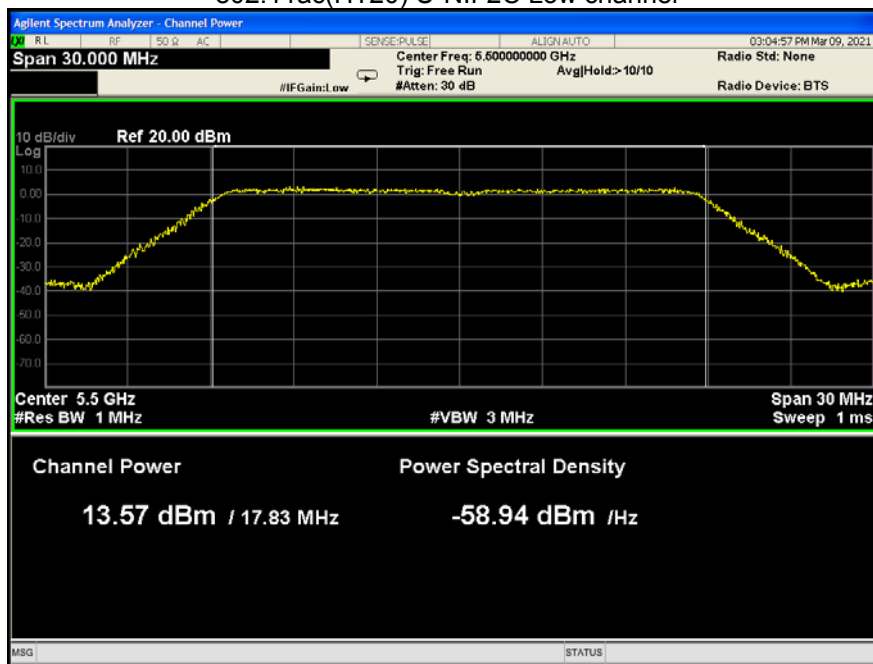


802.11ac(HT20) U-NII-2C Middle channel

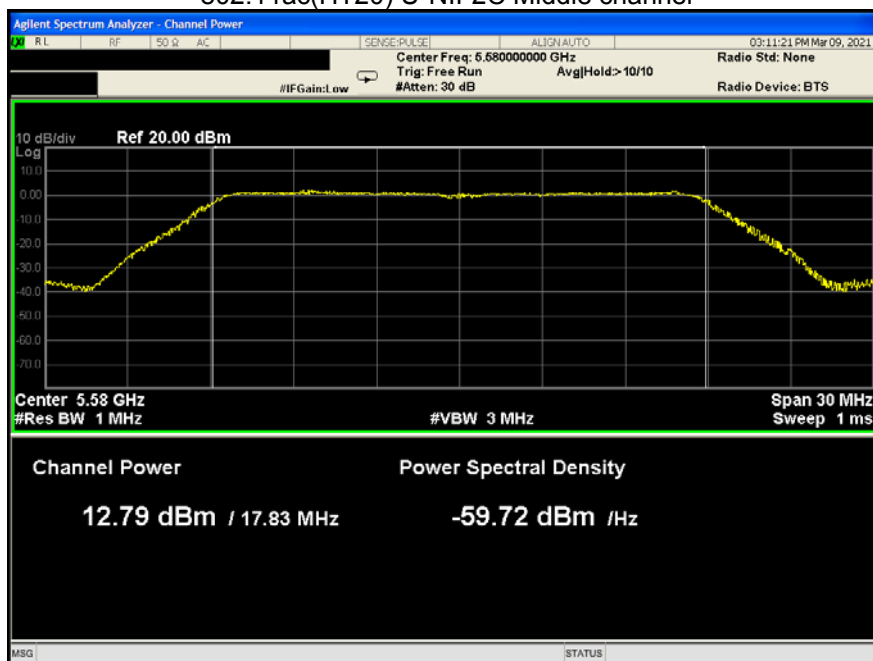


802.11ac(HT20) U-NII-2C High channel

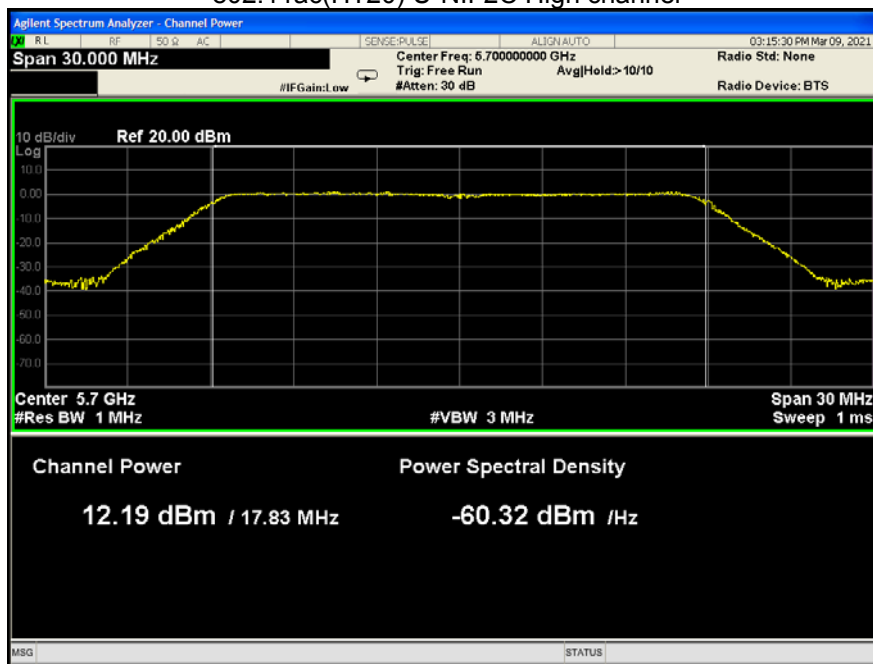


802.11ac(HT40) U-NII-2C Low channel

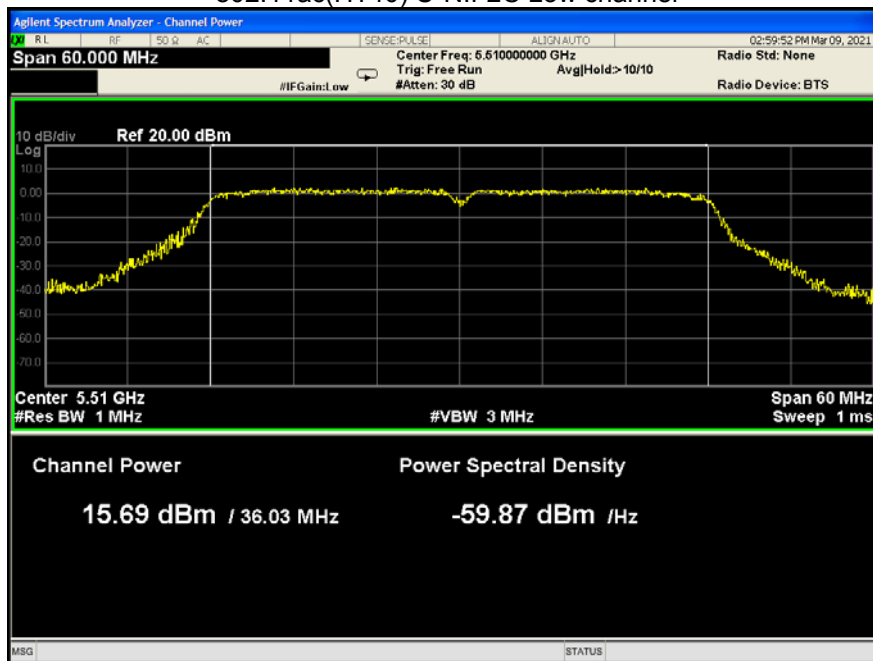


802.11ac(HT40) U-NII-2C Middle channel

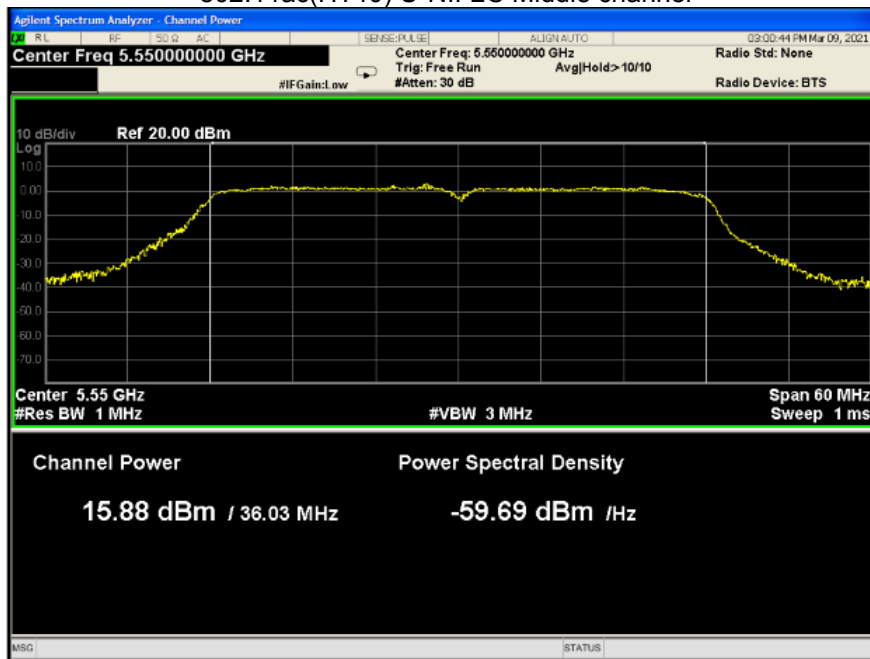


802.11ac(HT40) U-NII-2C High channel

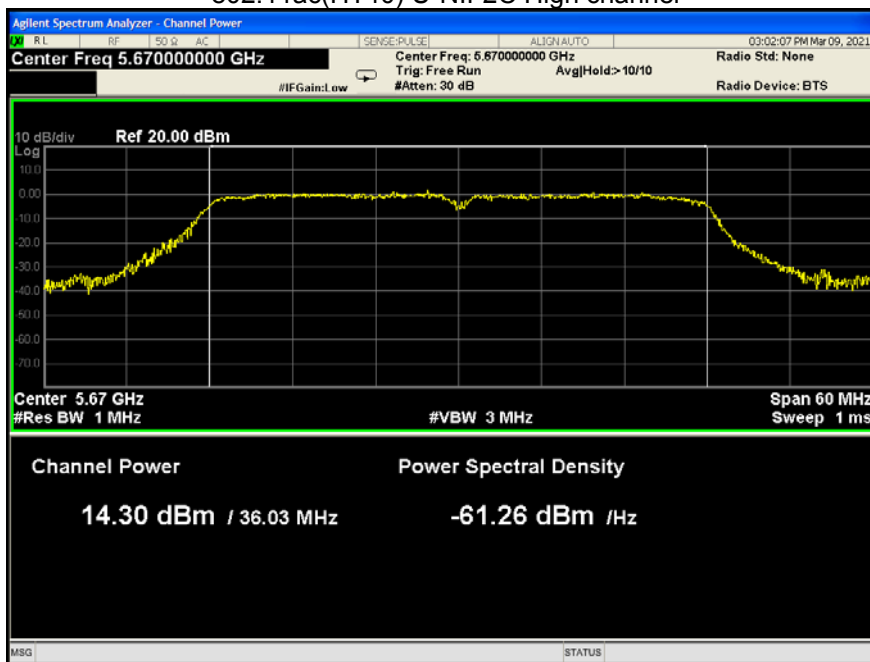


802.11n(HT40) U-NII-2C Low channel

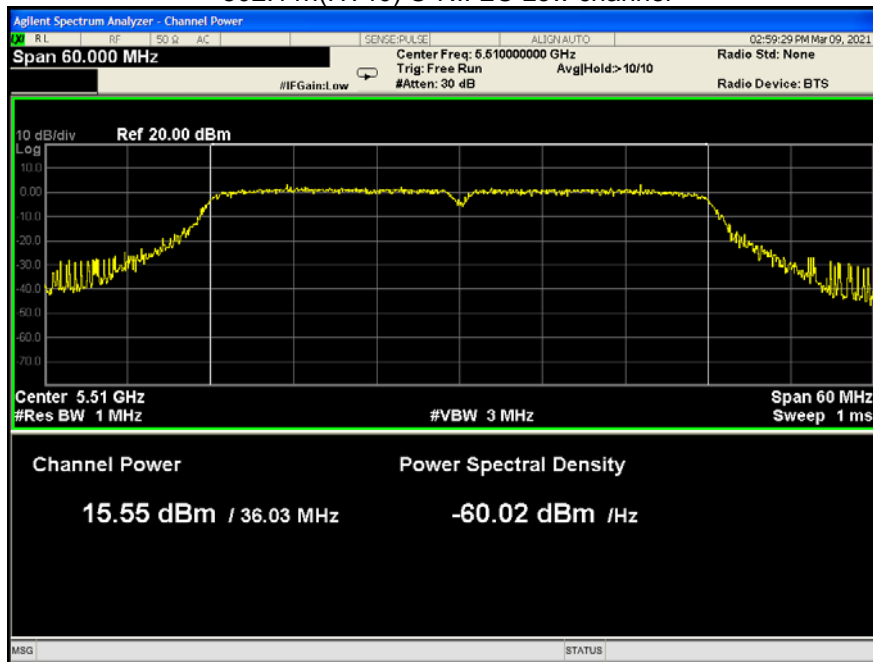


802.11n(HT40) U-NII-2C Middle channel

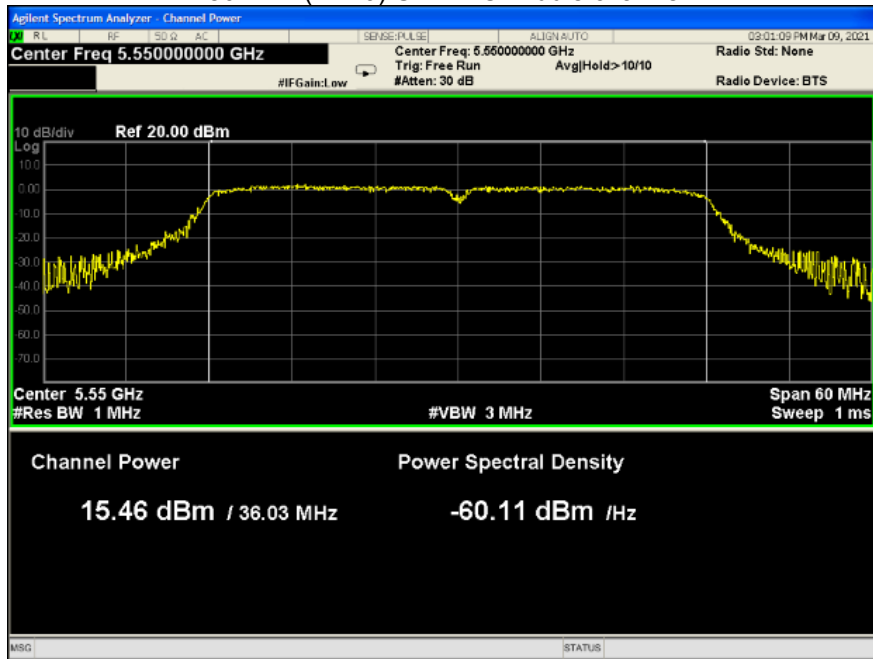


802.11n(HT40) U-NII-2C High channel

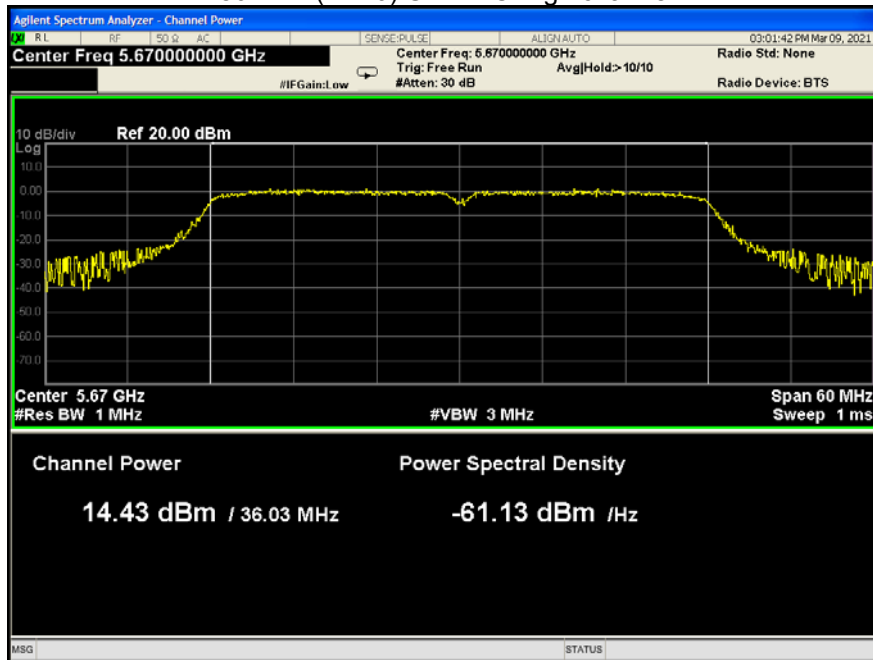


802.11ac(HT80) U-NII-2C Low channel

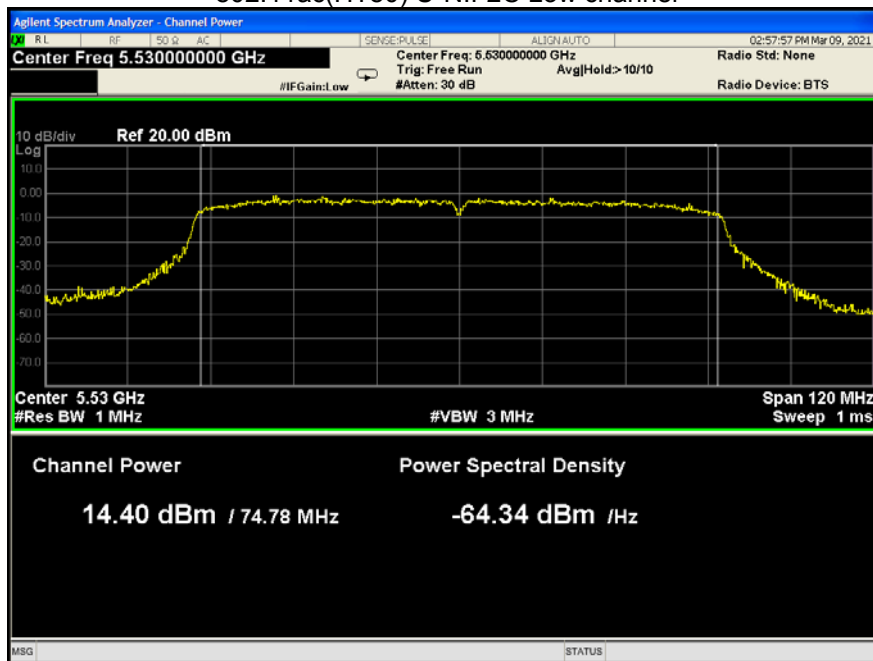


802.11ac(HT80) U-NII-2C High channel

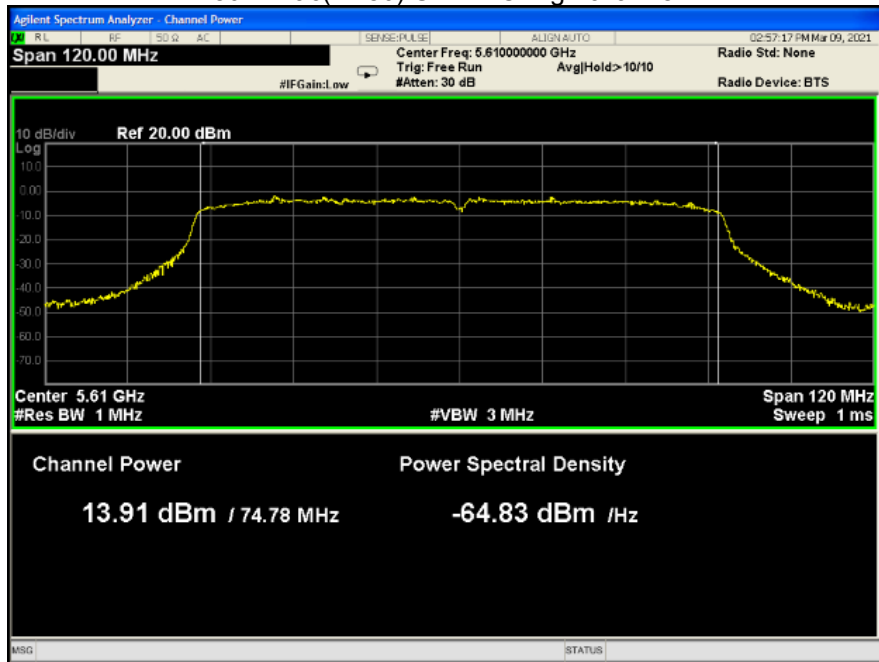


802.11a U-NII-3 Low channel

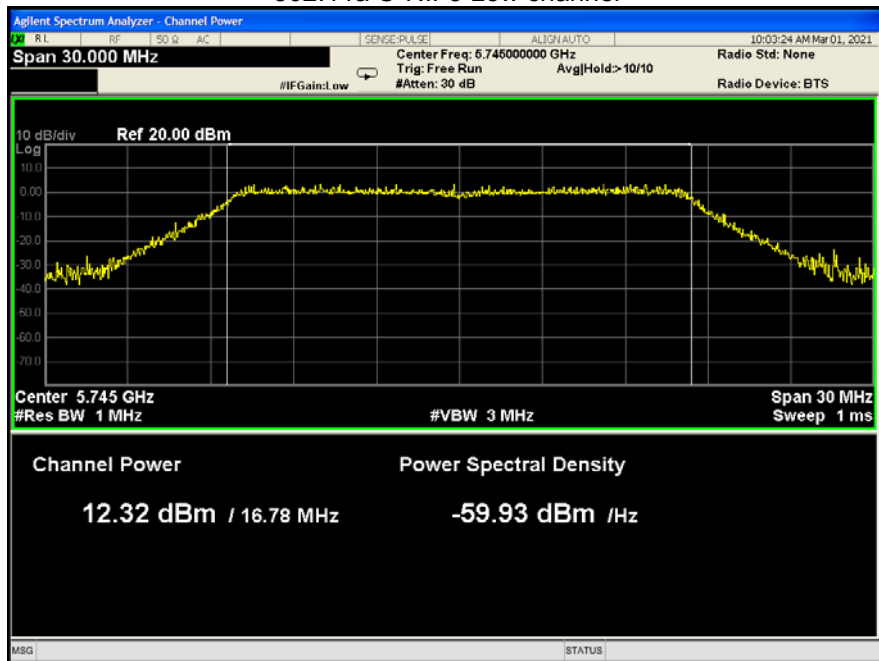


802.11a U-NII-3 Middle channel

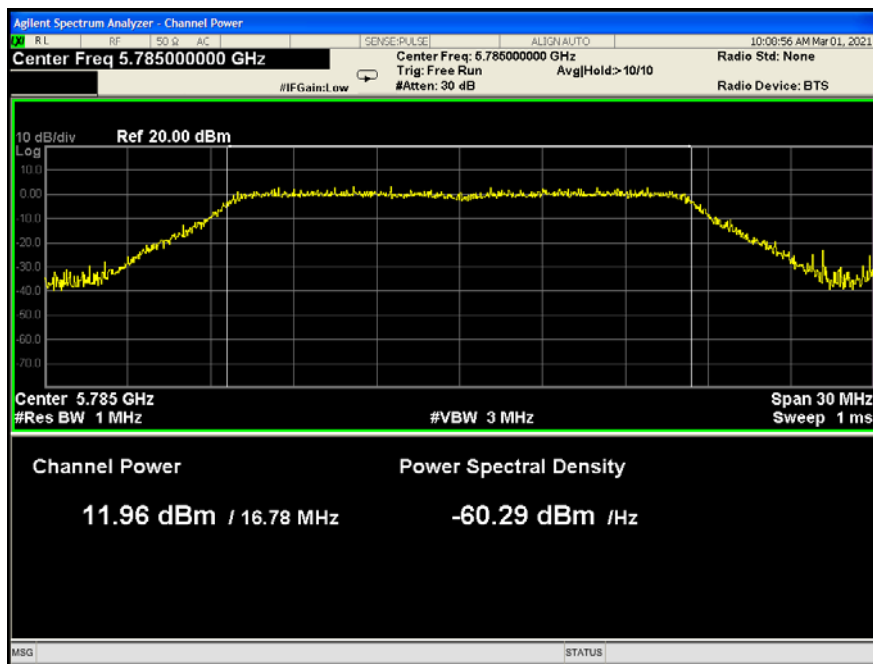


802.11a U-NII-3 High channel

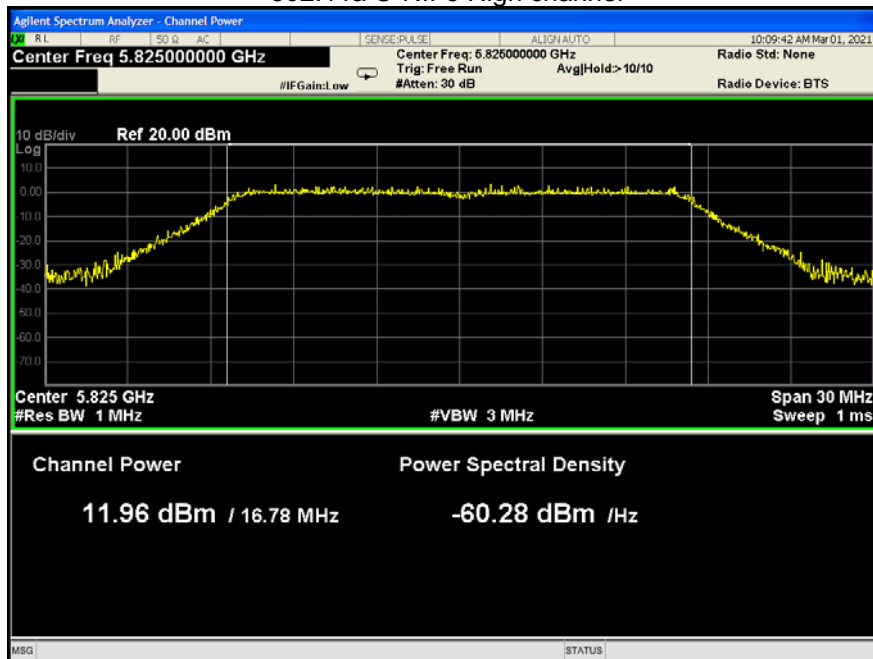


802.11n(HT20) U-NII-3 Low channel

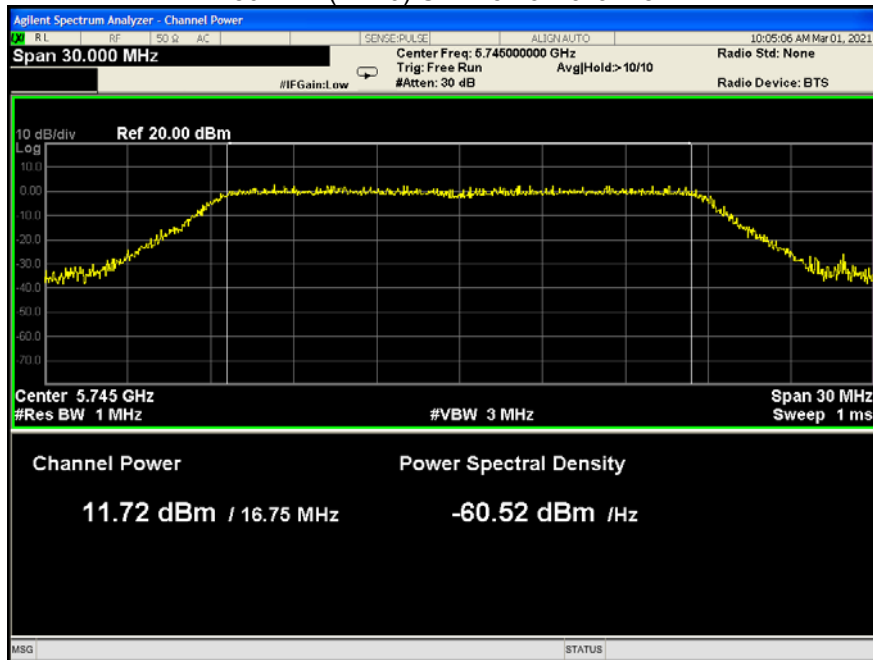


802.11n(HT20) U-NII-3 Middle channel

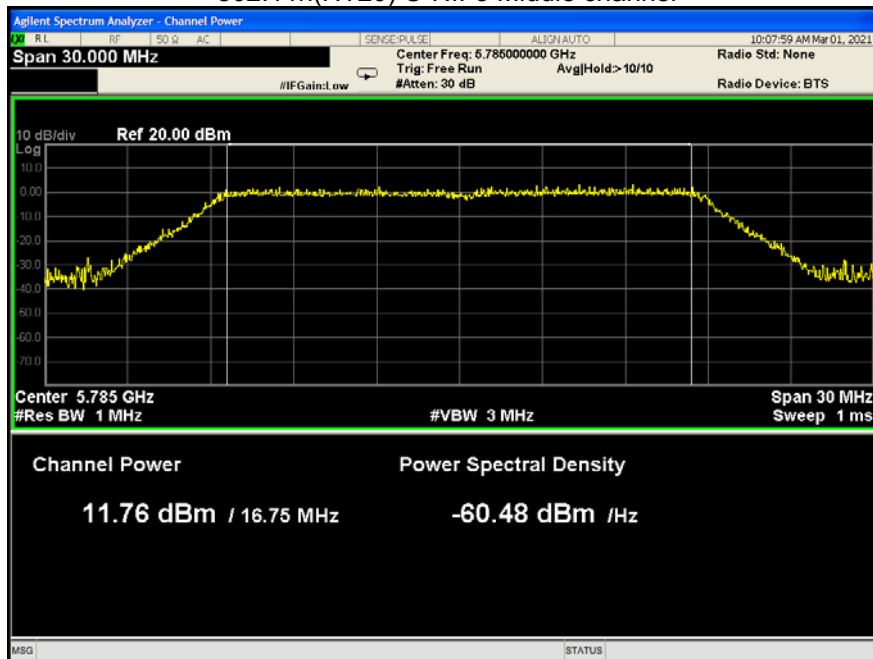


802.11n(HT20) U-NII-3 High channel

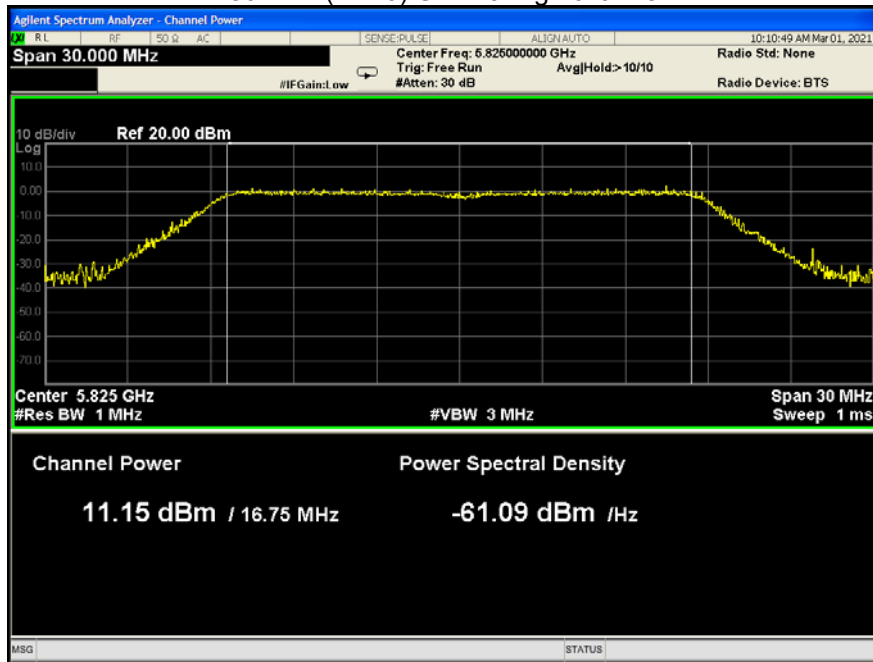


802.11ac(HT20) U-NII-3 Low channel

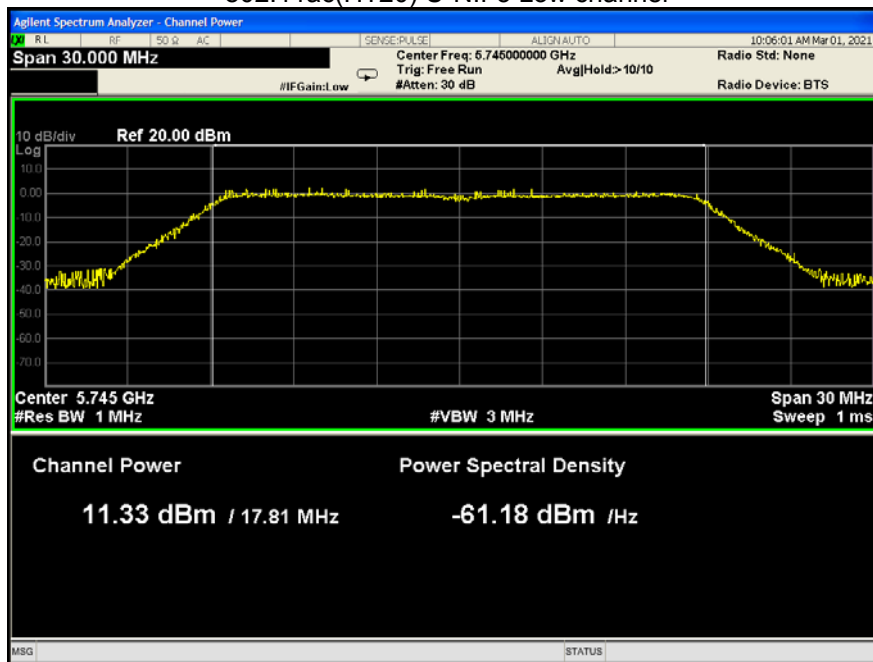


802.11ac(HT20) U-NII-3 Middle channel

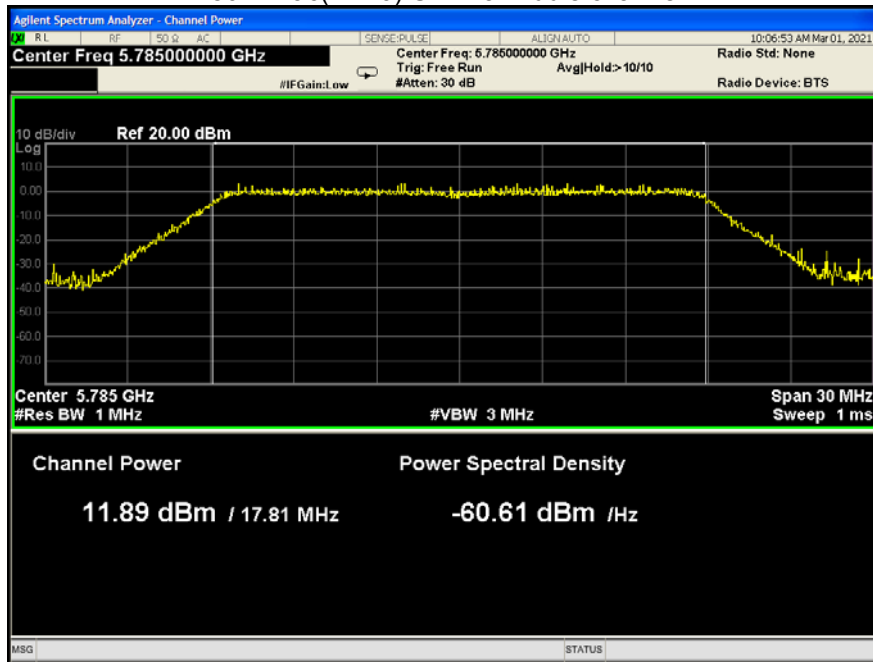


802.11ac(HT20) U-NII-3 High channel

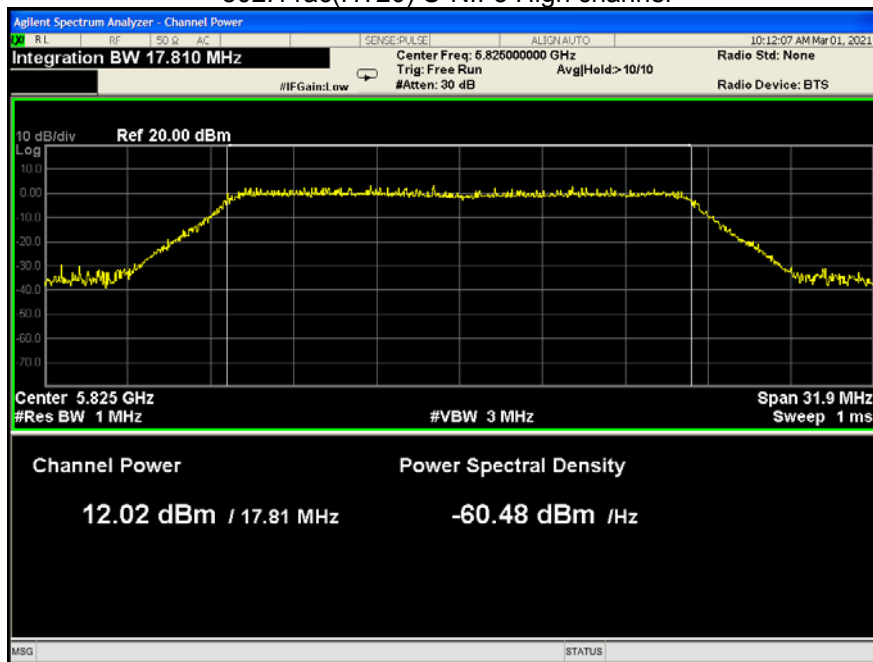


802.11ac(HT40) U-NII-3 Low channel

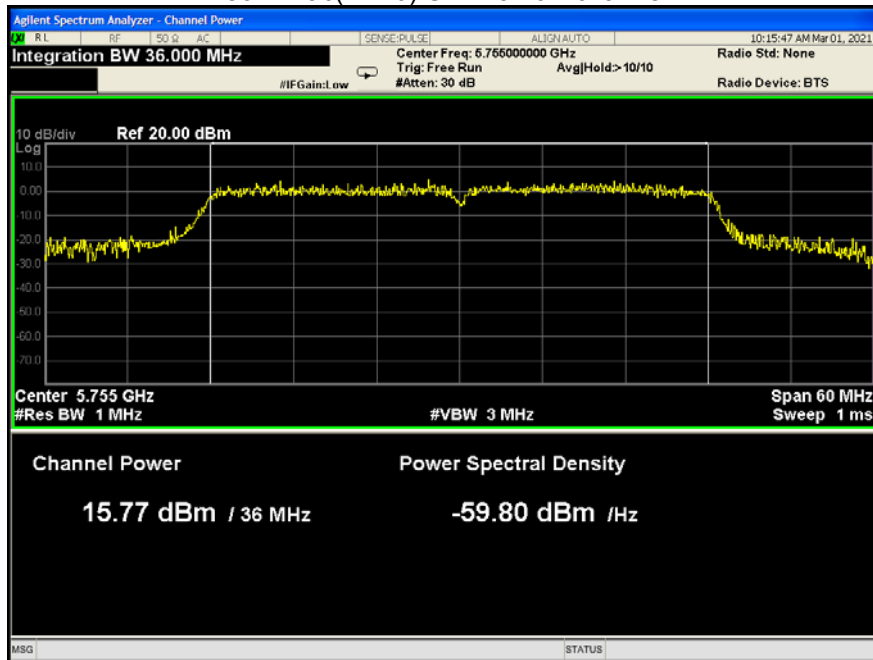


802.11ac(HT40) U-NII-3 High channel

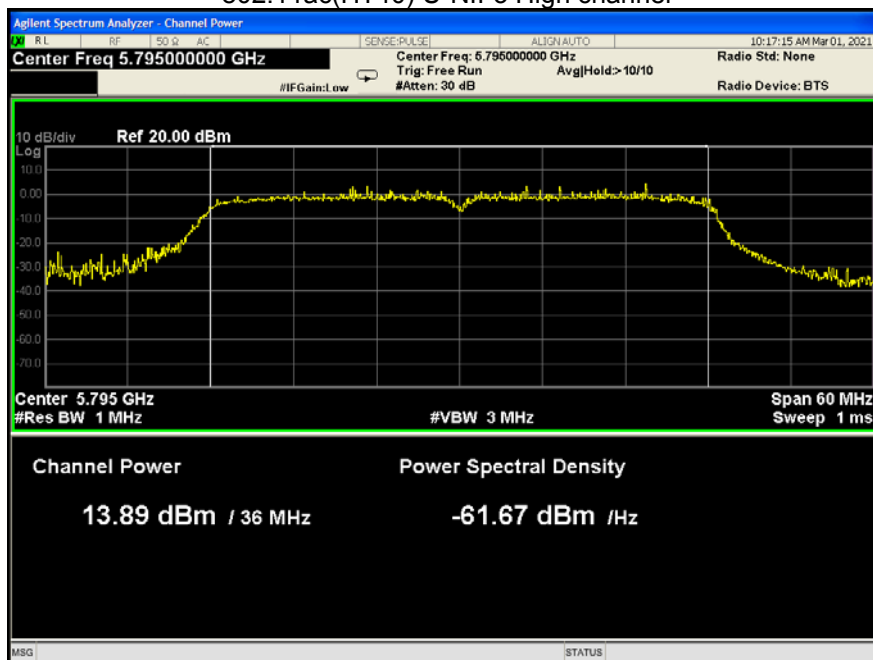


802.11n(HT40) U-NII-3 Low channel

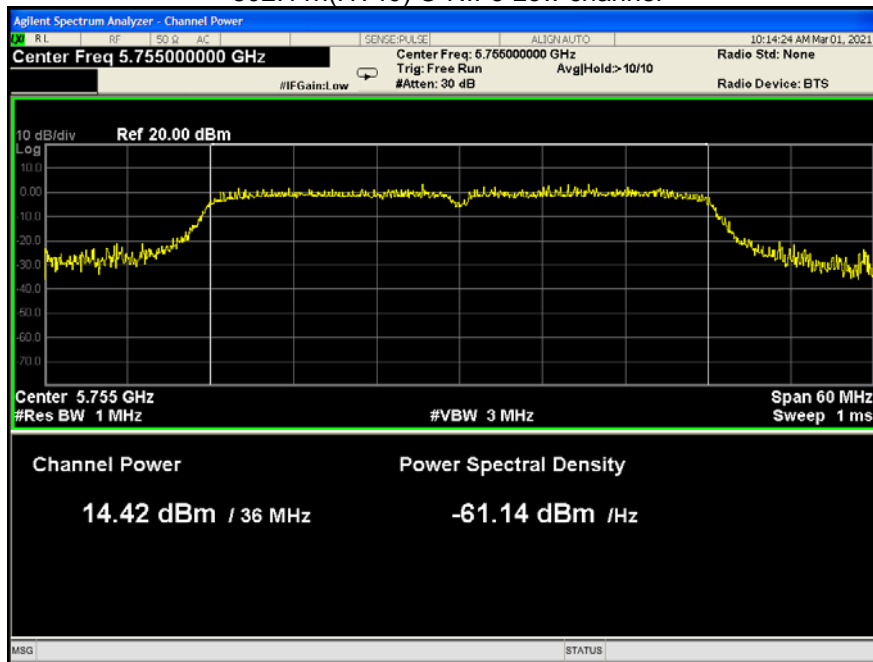

802.11n(HT40) U-NII-3 High channel

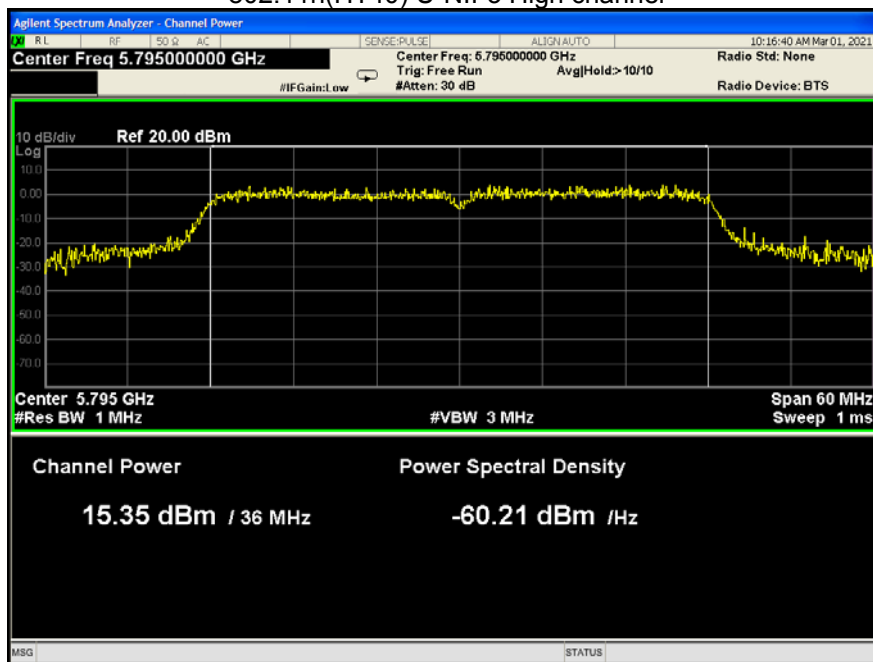

802.11ac(HT80) U-NII-3 Low channel

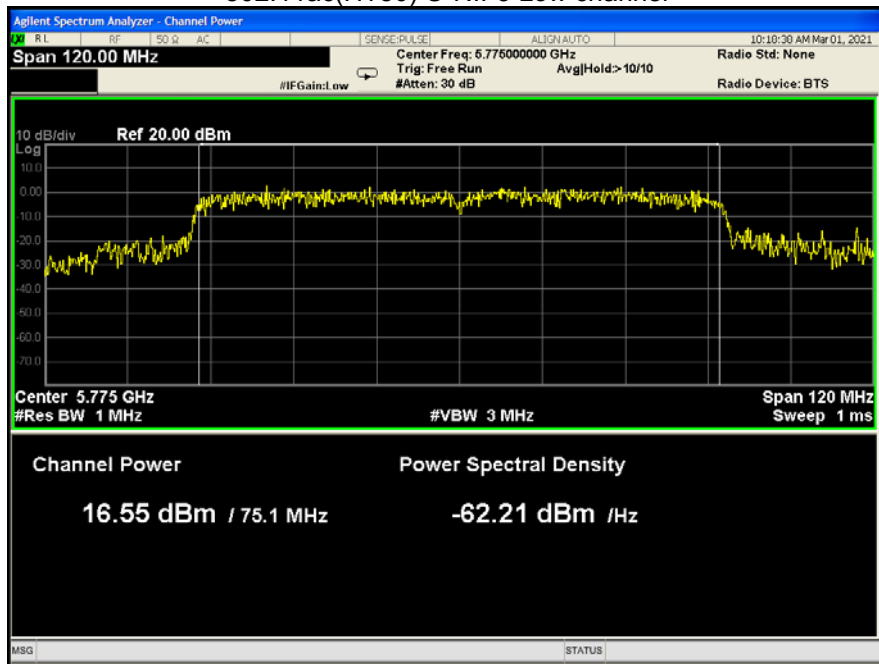

13 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a)
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section F
Test Limit:	$\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-1(5150MHz-5250MHz)of mobile device $\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-2A(5250 MHz - 5350MHz)of mobile device $\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-2C(5470 MHz - 5725MHz)of mobile device $\leq 30.00\text{dBm/500KHz}$ for Operation in the U-NII-3(5725MHz-5850MHz)of device
Test Result:	PASS

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
U-NII-1
RBW = 1MHz, VBW $\geq 3^*$ RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
U-NII-3
RBW = 510KHz, VBW $\geq 3^*$ RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

13.2 Test Result:

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	4.450	3.540	4.013
	802.11n(HT20)	3.944	3.748	3.504
	802.11n(HT40)	3.386	/	3.139
	802.11ac(HT20)	3.817	3.277	3.416
	802.11ac(HT40)	3.284	/	3.082
	802.11ac(HT80)	-0.585	/	/
	Limit	≤11.00dBm/MHz		


Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-2A	802.11a	-3.994	-2.444	-2.770
	802.11n(HT20)	-4.595	-4.520	-3.495
	802.11n(HT40)	-6.229	/	-5.694
	802.11ac(HT20)	-3.704	-4.069	-3.870
	802.11ac(HT40)	-5.780	/	-5.039
	802.11ac(HT80)	-8.146	/	/
	Limit	≤11.00dBm/MHz		

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low channel	Middle	High
U-NII-2C	802.11a	4.860	3.291	2.392
	802.11n(HT20)	4.578	2.995	1.492
	802.11ac(HT20)	4.686	2.659	1.647
	802.11ac(HT40)	3.726	/	2.217
	802.11n(HT40)	4.724	/	1.713
	802.11ac(HT80)	-0.028	/	-0.019
	Limit	≤11dBm/MHz		


Band	Operation mode	Power Spectral Density (dBm/0.5MHz)		
		Low	Middle	High
U-NII-3	802.11a	-1.673	-1.494	-1.239
	802.11n(HT20)	-1.176	-2.189	-1.736
	802.11n(HT40)	-2.970	/	-3.095
	802.11ac(HT20)	-1.441	-2.165	-1.310
	802.11ac(HT40)	-2.360	/	-2.241
	802.11ac(HT80)	-7.115	/	/
	Limit	≤30.00dBm/0.5MHz		

Test result plots shown as follows:


802.11a U-NII-1 Low channel

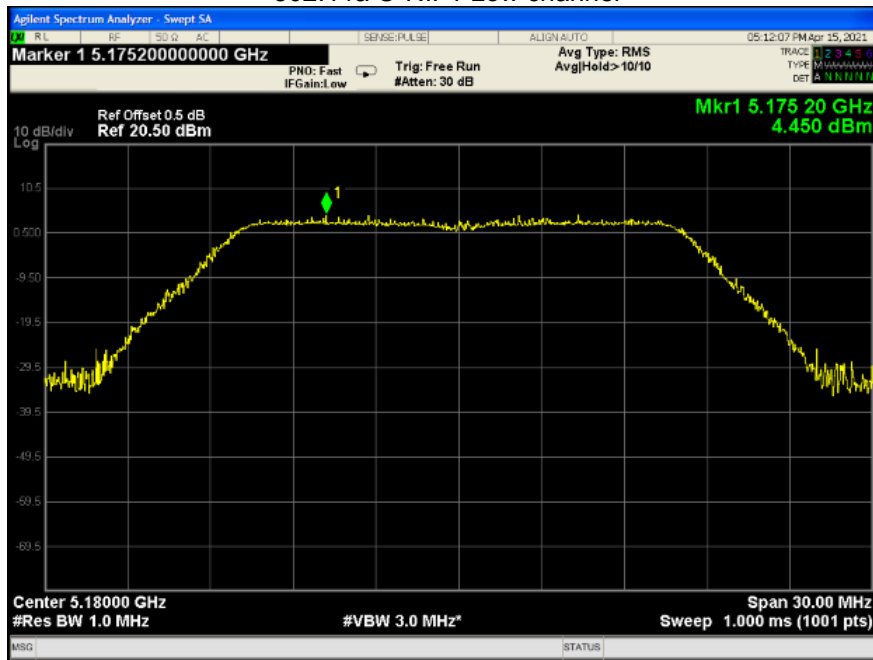


802.11a U-NII-1 Middle channel

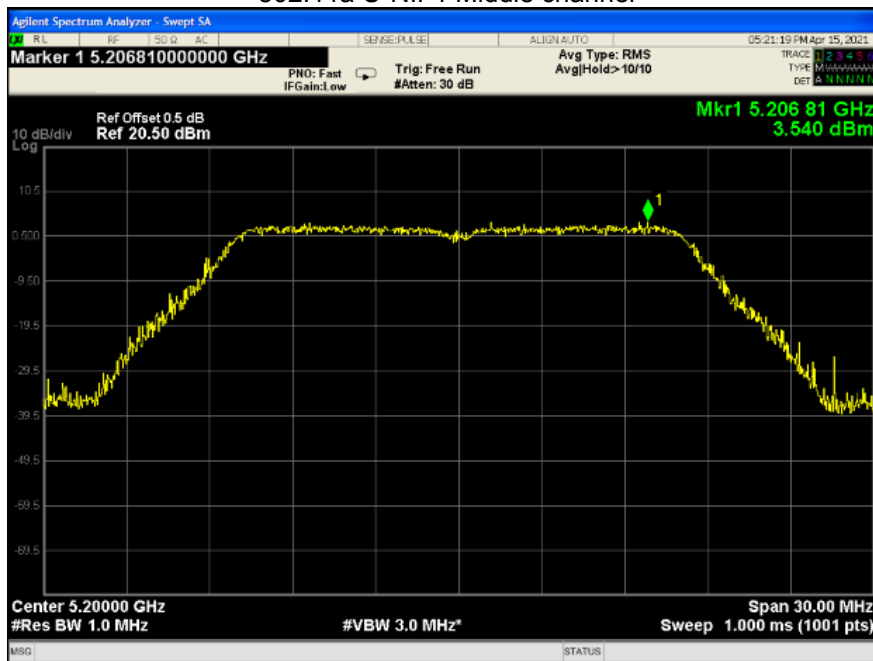


802.11a U-NII-1 High channel

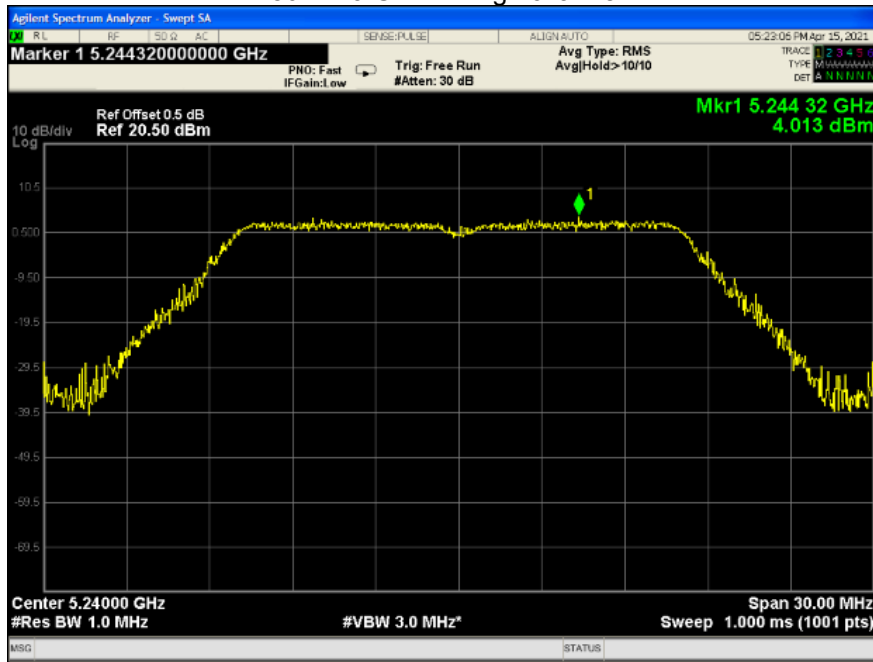


802.11n(HT20) U-NII-1 Low channel

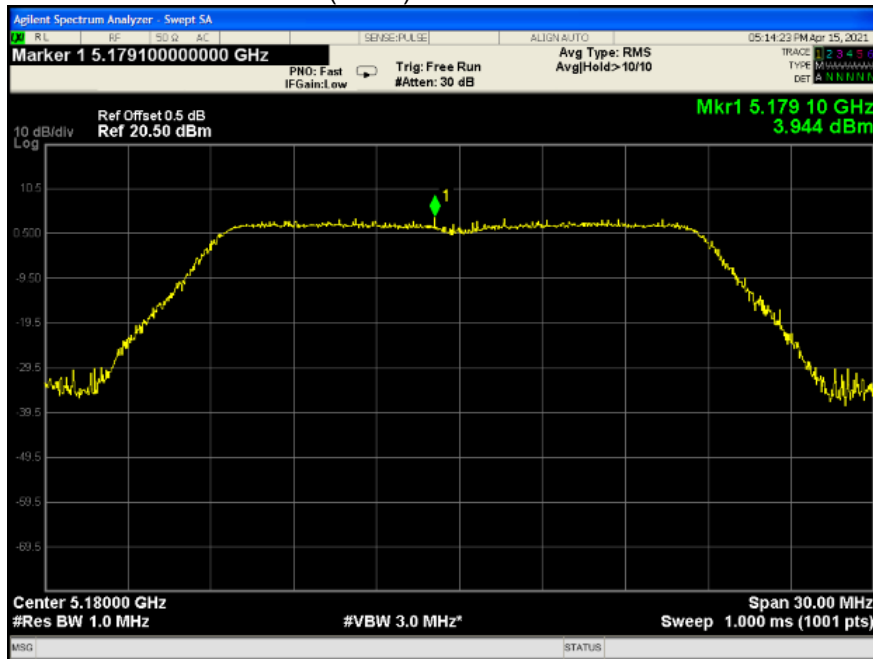


802.11n(HT20) U-NII-1 Middle channel

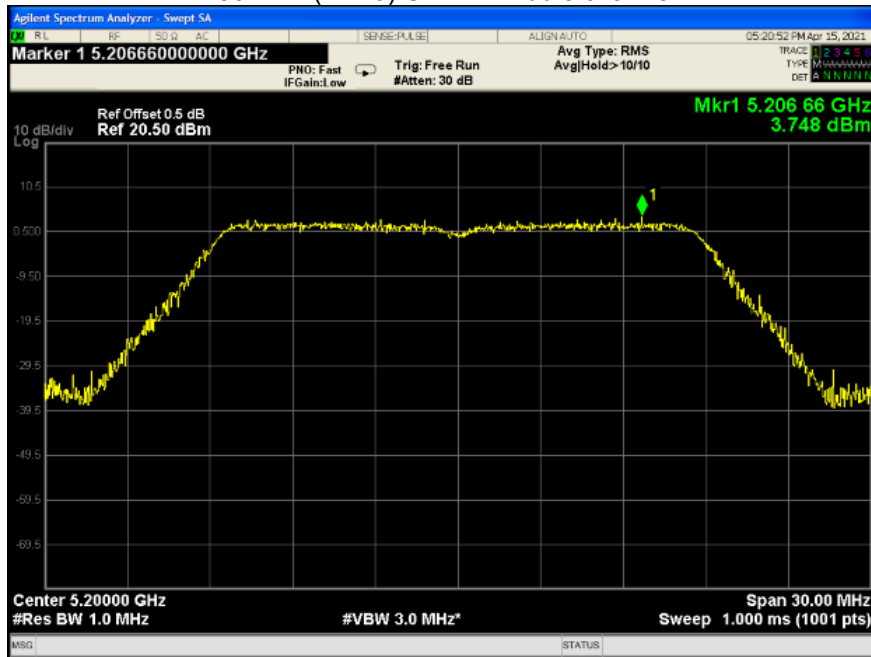


802.11n(HT20) U-NII-1 High channel

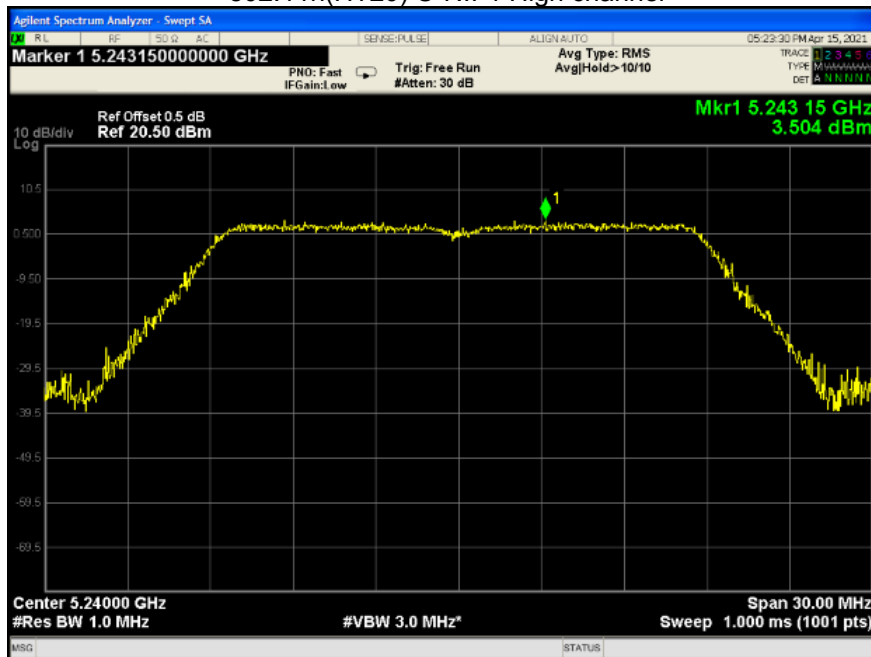


802.11ac(HT20) U-NII-1 Low channel

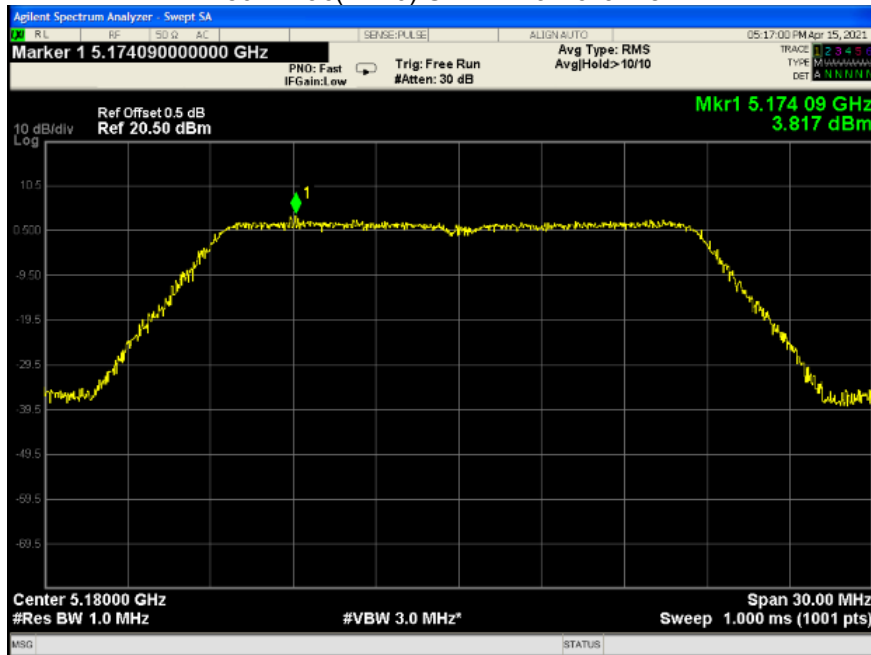


802.11ac(HT20) U-NII-1 Middle channel

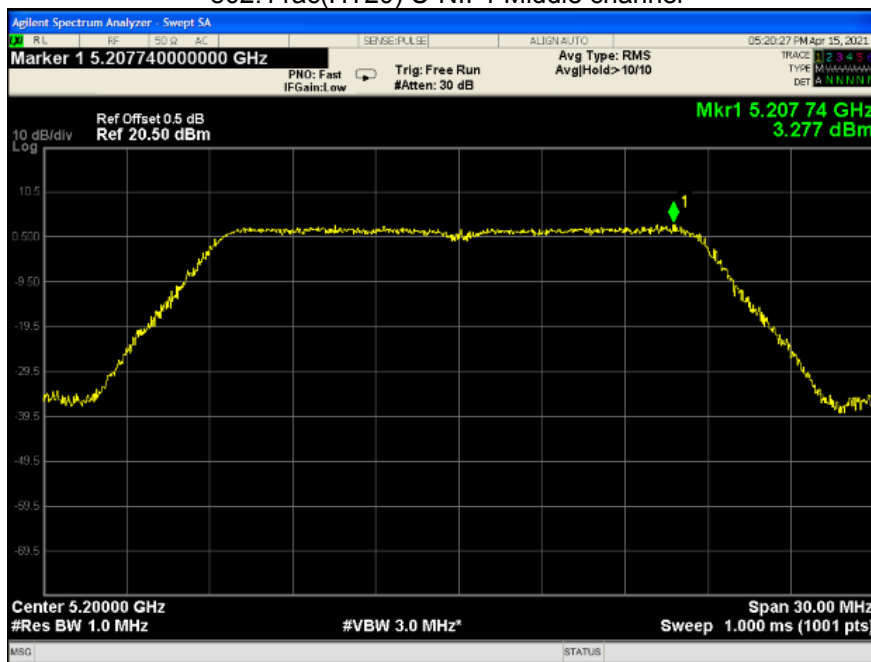


802.11ac(HT20) U-NII-1 High channel

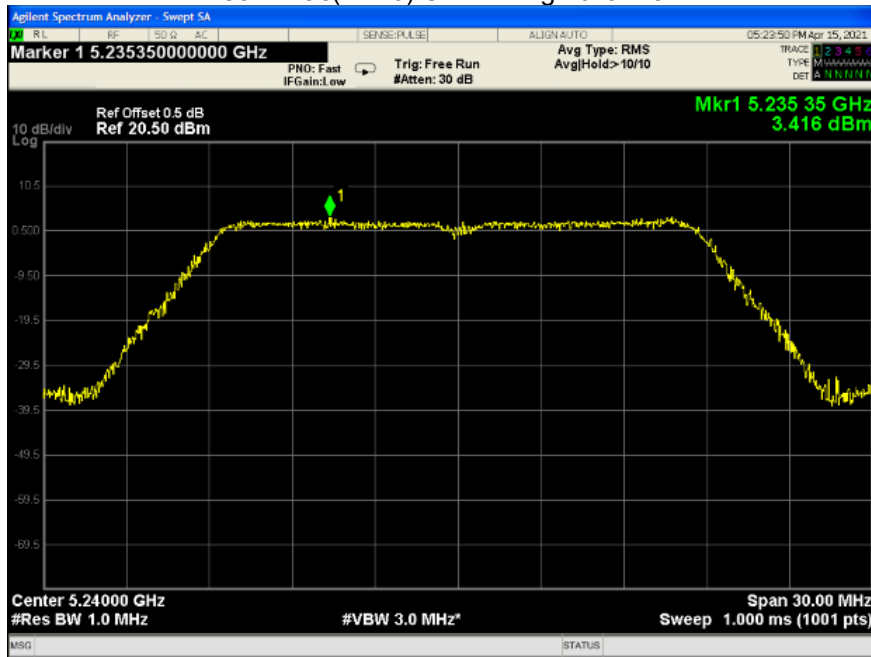


802.11ac(HT40) U-NII-1 Low channel

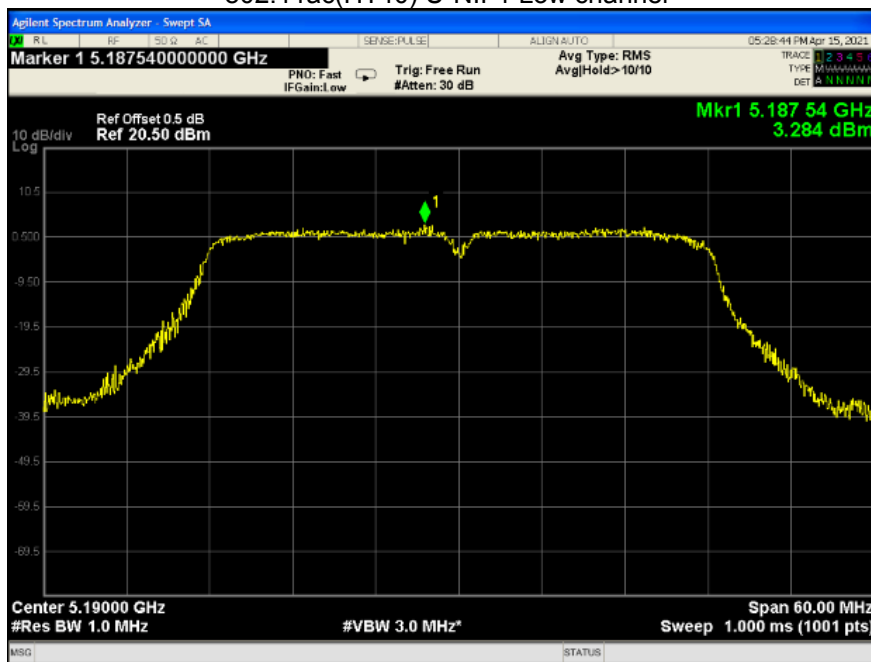


802.11ac(HT40) U-NII-1 High channel

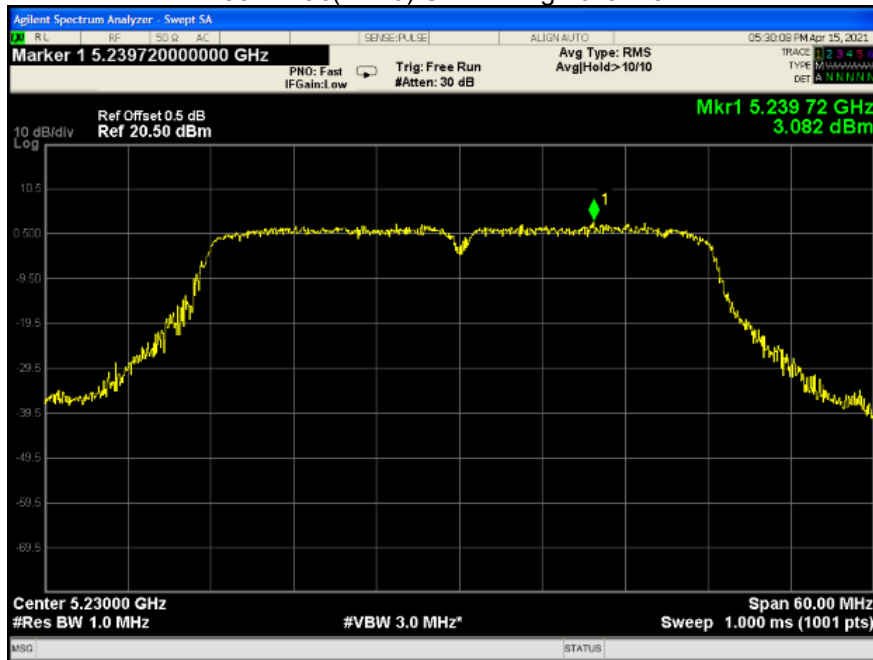


802.11n(HT40) U-NII-1 Low channel

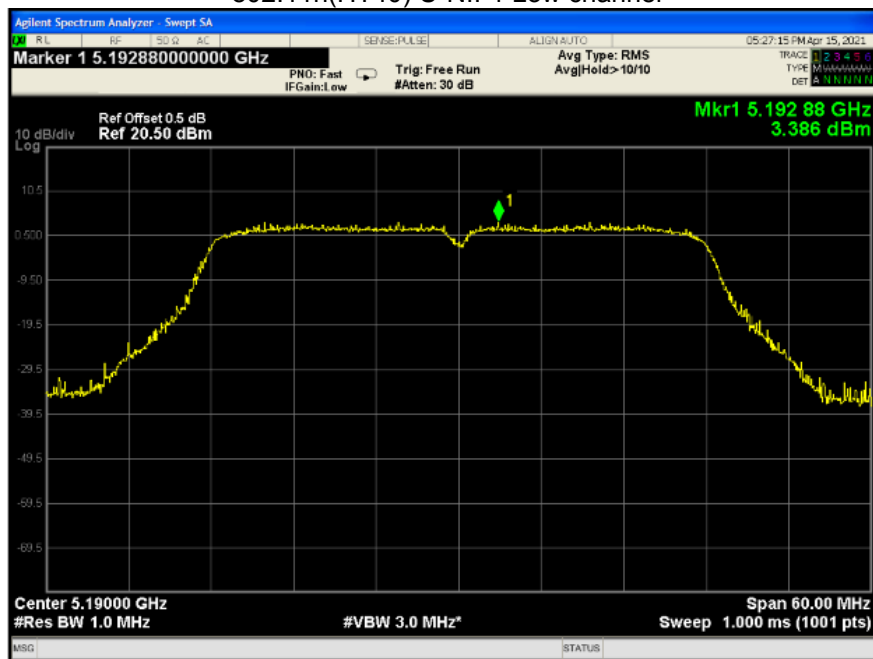


802.11n(HT40) U-NII-1 High channel

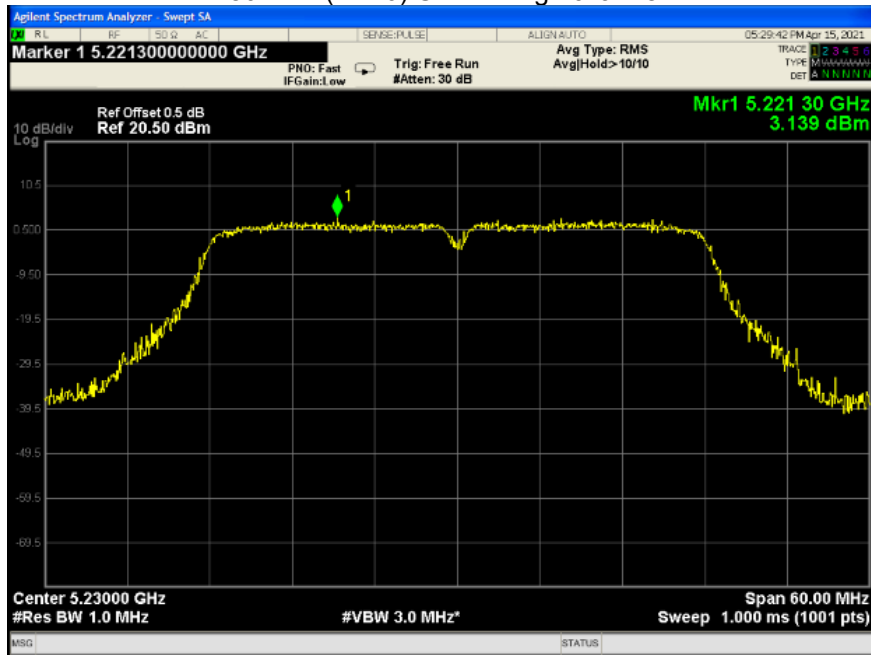


802.11ac(HT80) U-NII-1 Low channel

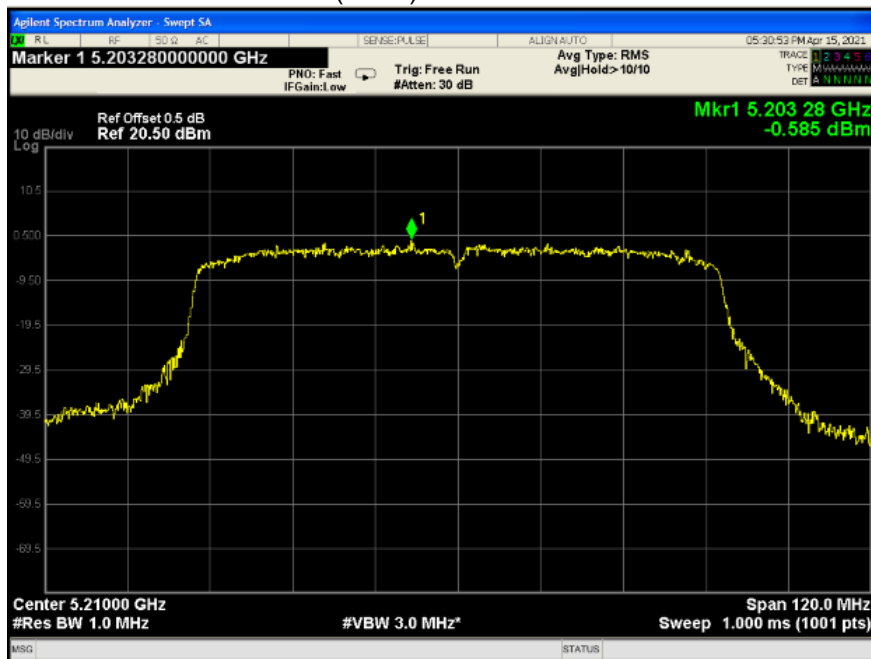


802.11a(HT20) U-NII-2A Low channel

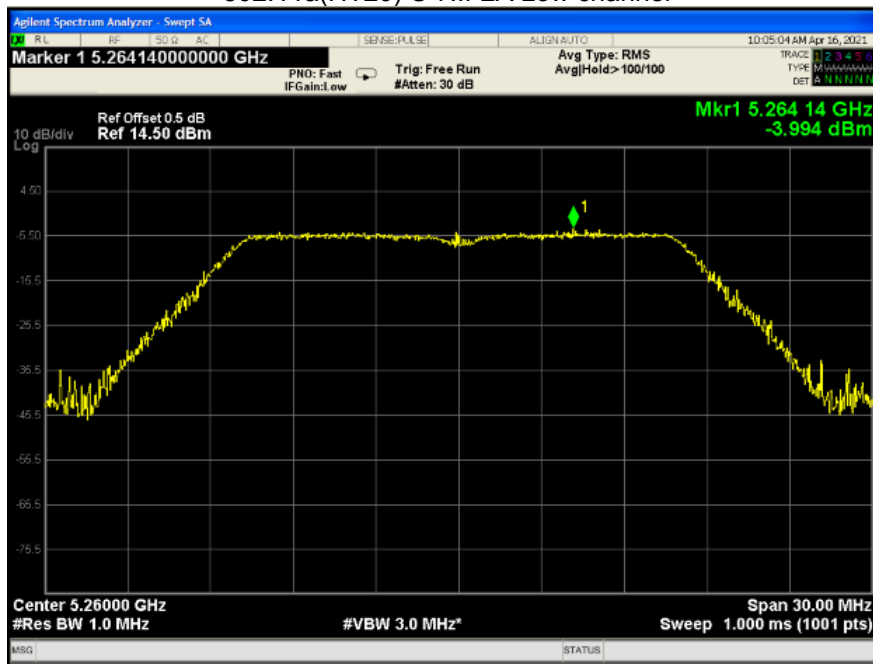


802.11a(HT20) U-NII-2A Middle channel

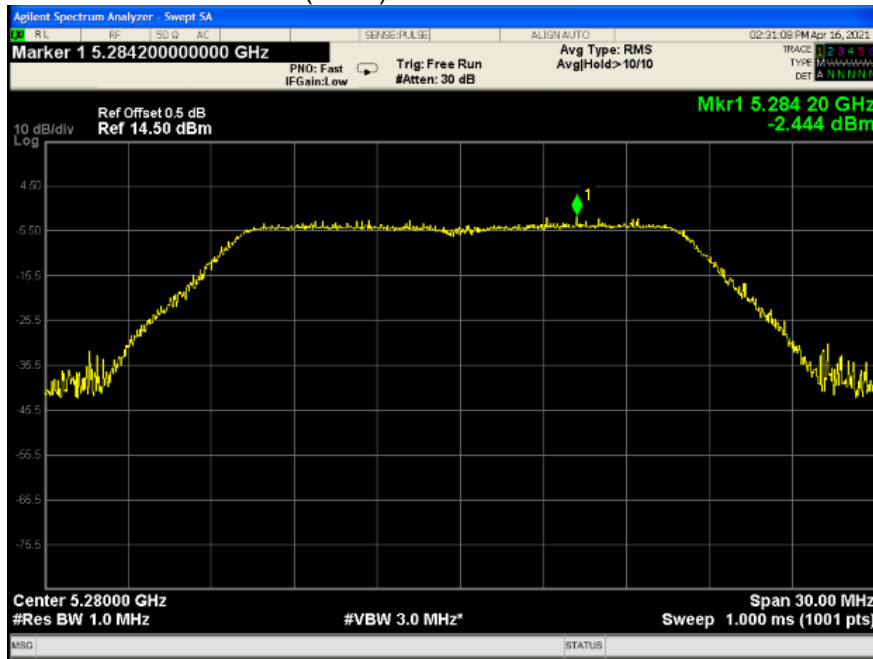


802.11a(HT20) U-NII-2A High channel

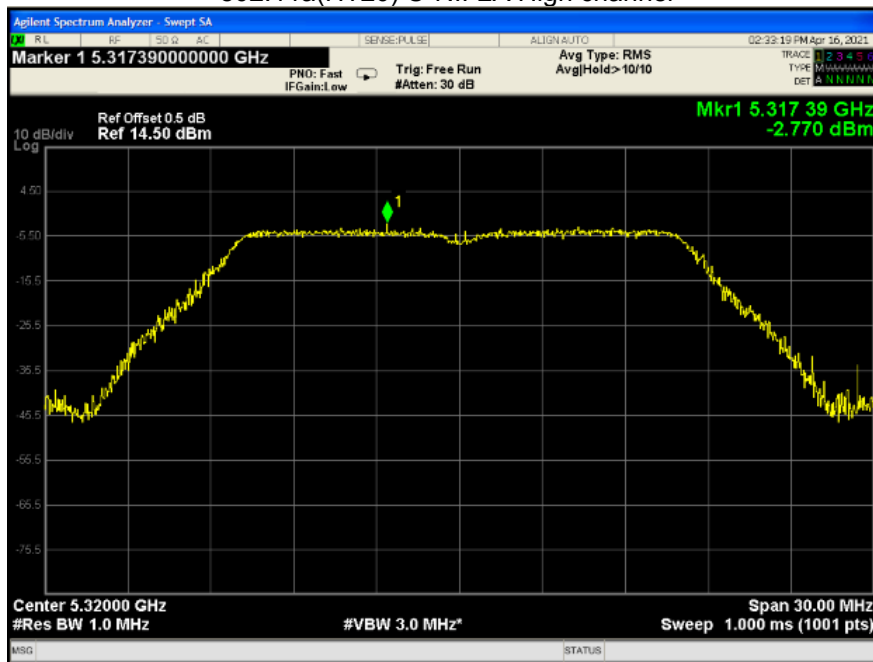


802.11n(HT20) U-NII-2A Low channel

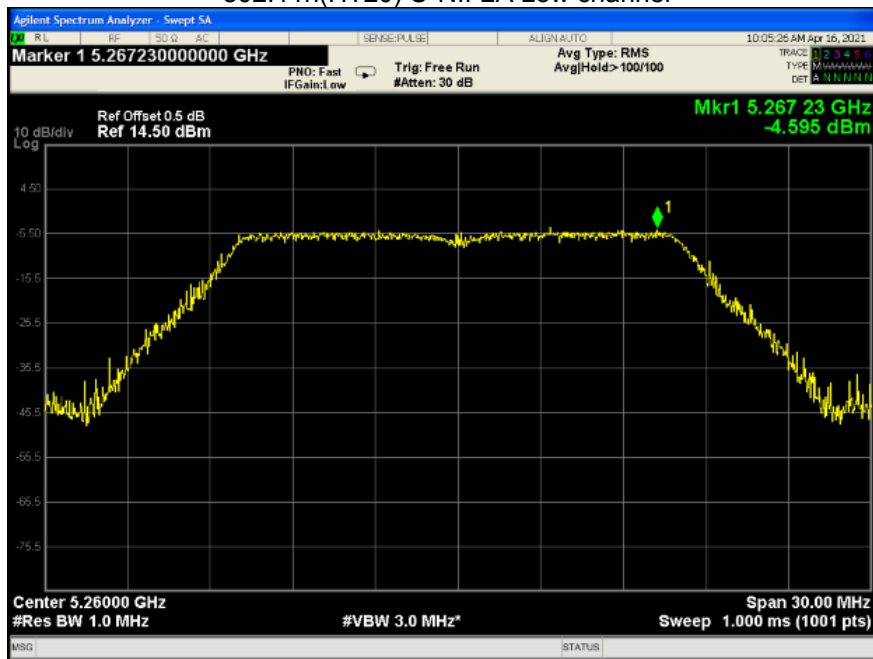


802.11n(HT20) U-NII-2A Middle channel

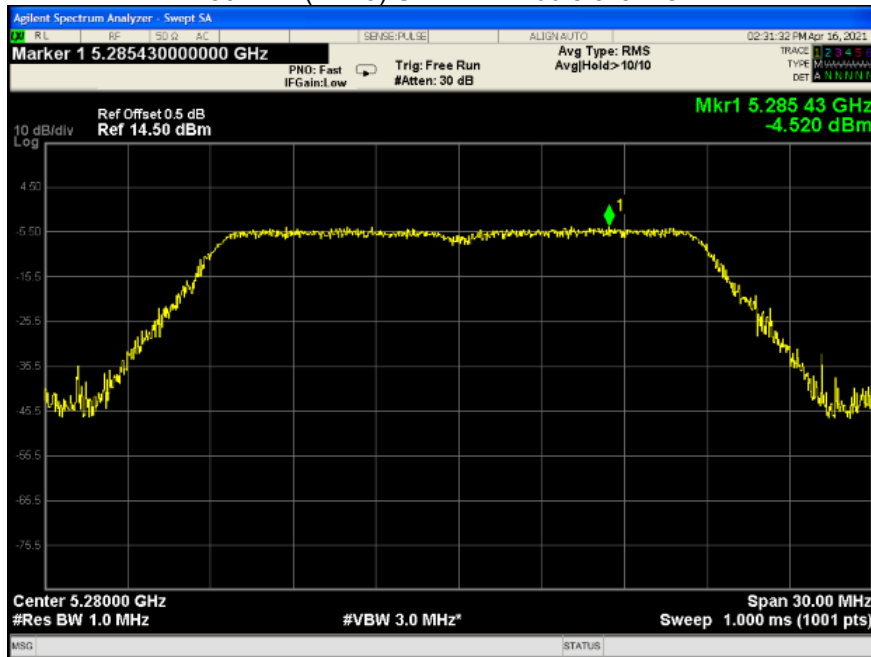


802.11n(HT20) U-NII-2A High channel

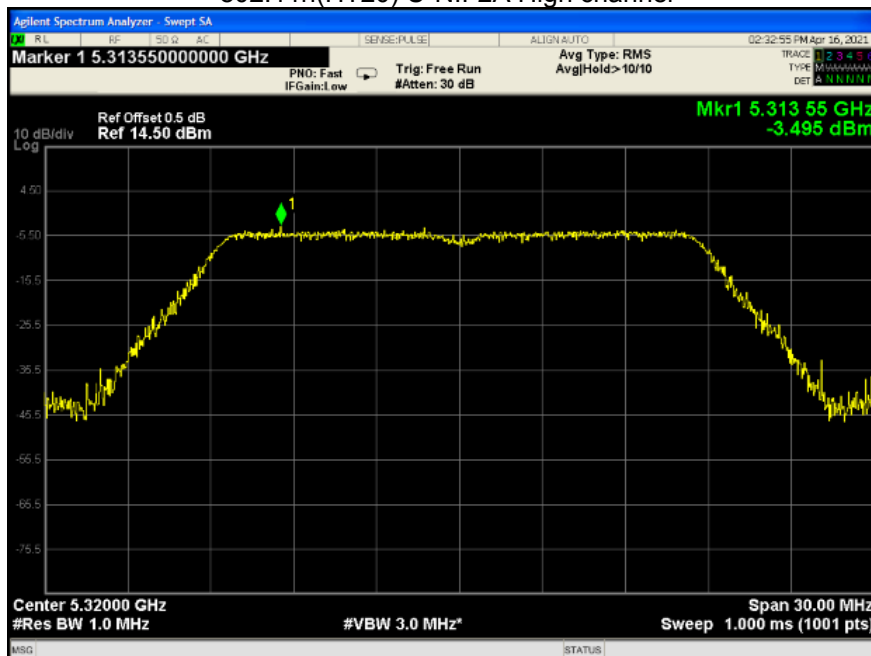


802.11ac(HT20) U-NII-2A Low channel

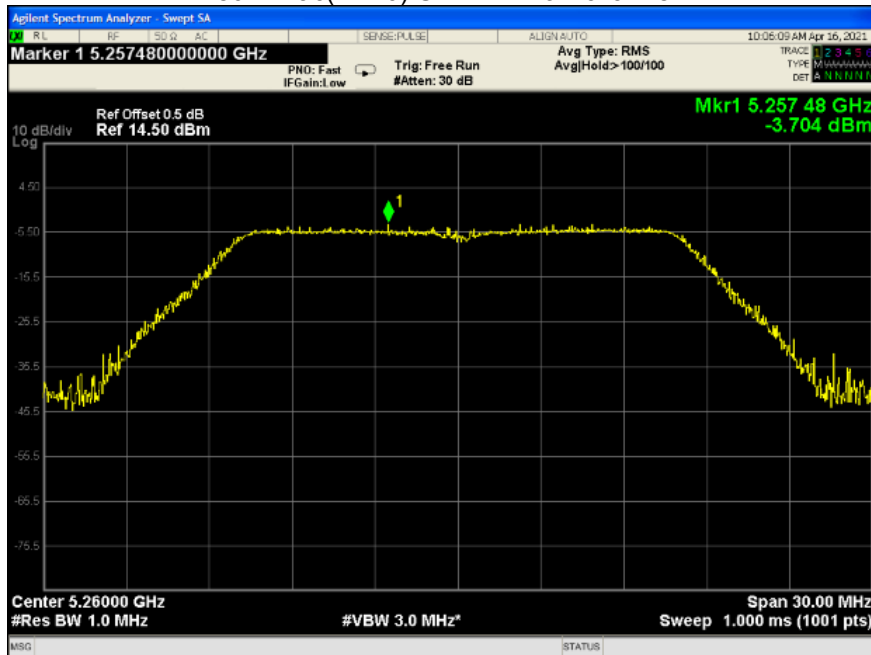


802.11ac(HT20) U-NII-2A Middle channel

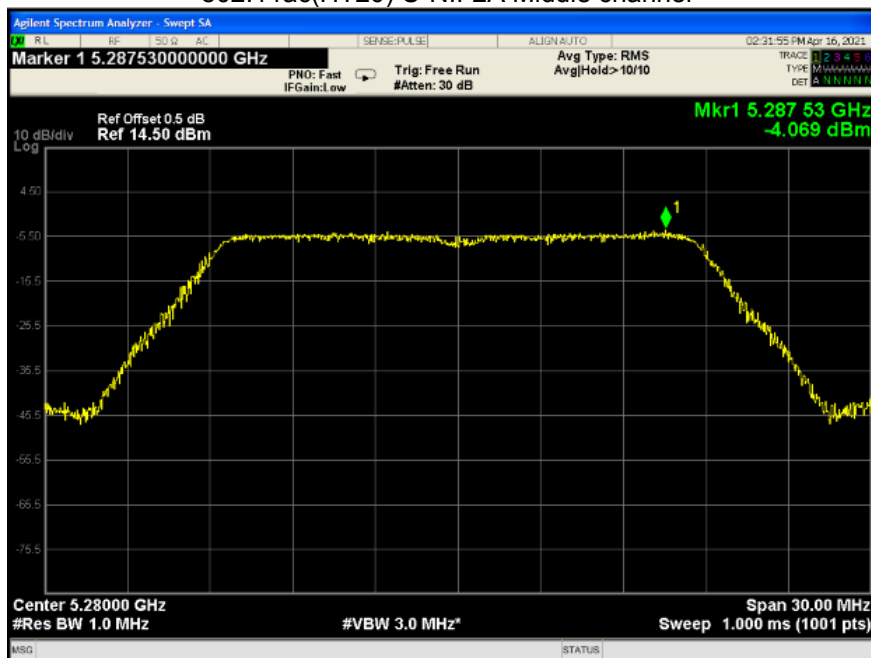


802.11ac(HT20) U-NII-2A High channel

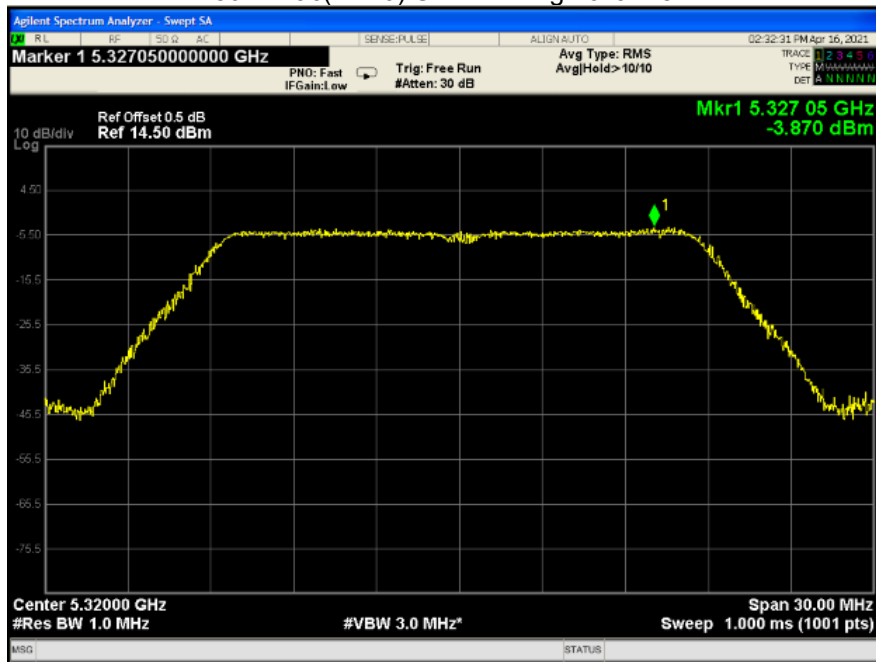


802.11ac(HT40) U-NII-2A Low channel

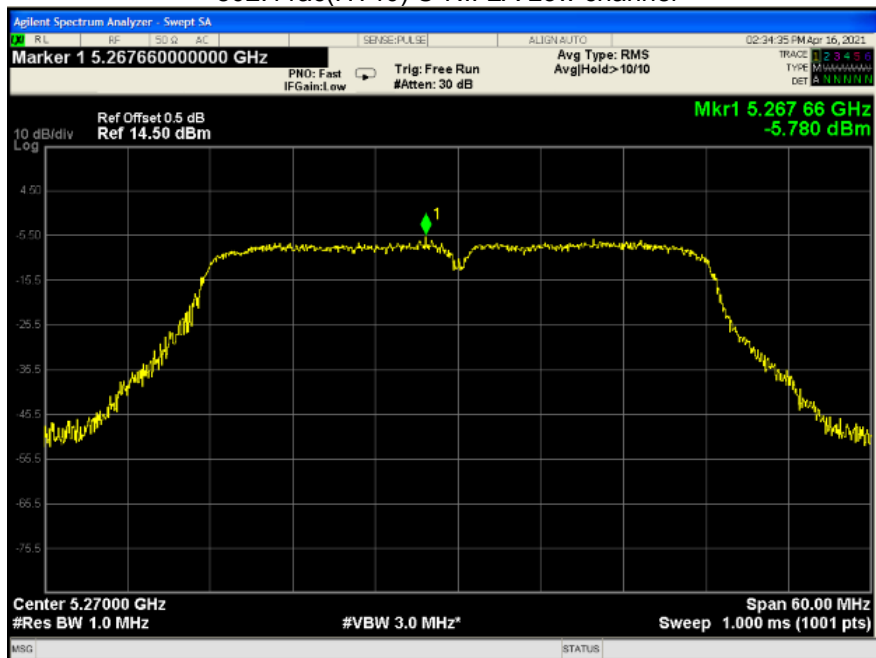


802.11ac(HT40) U-NII-2A High channel

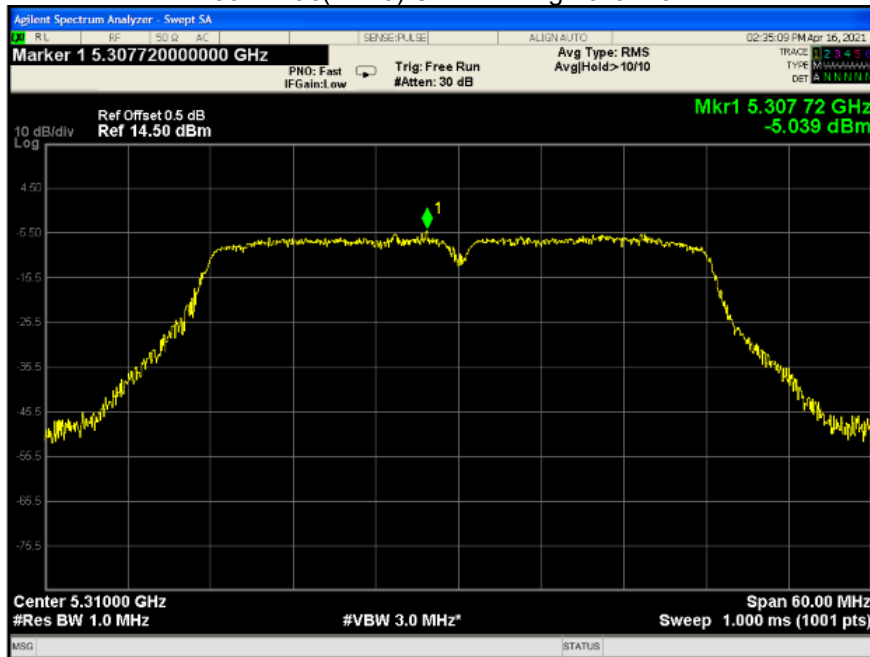


802.11n(HT40) U-NII-2A Low channel

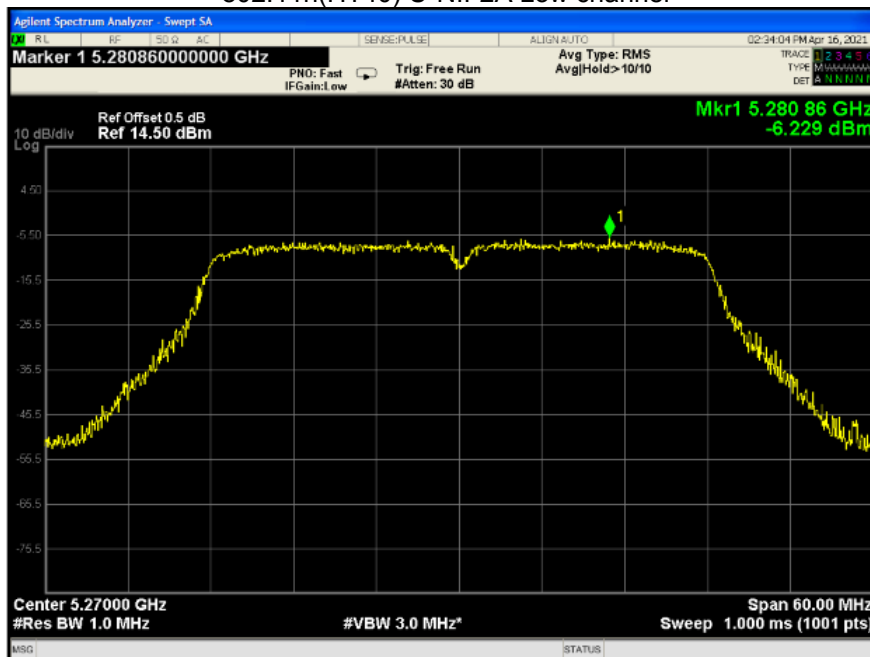


802.11n(HT40) U-NII-2A High channel

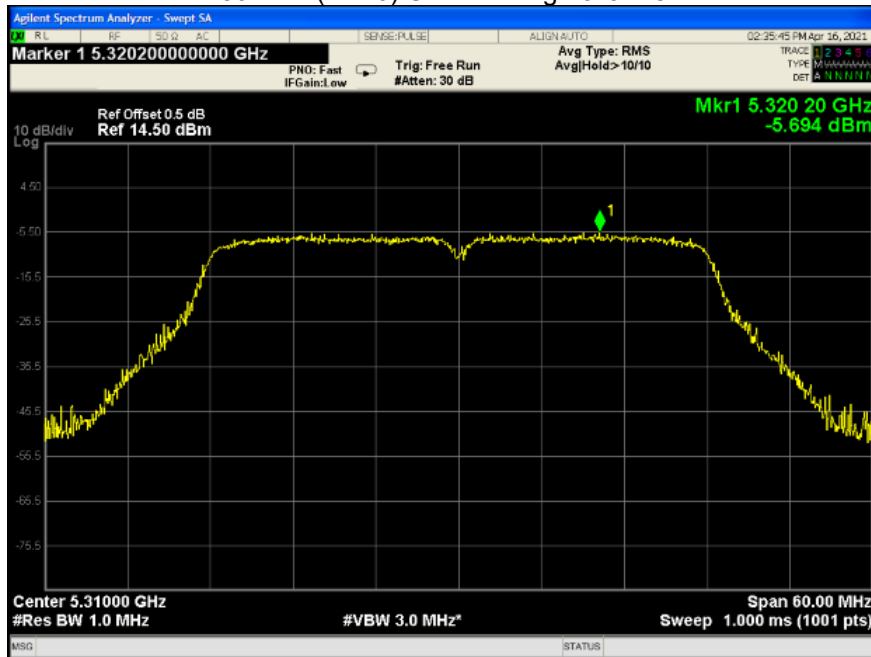


802.11ac(HT80) U-NII-2A Low channel

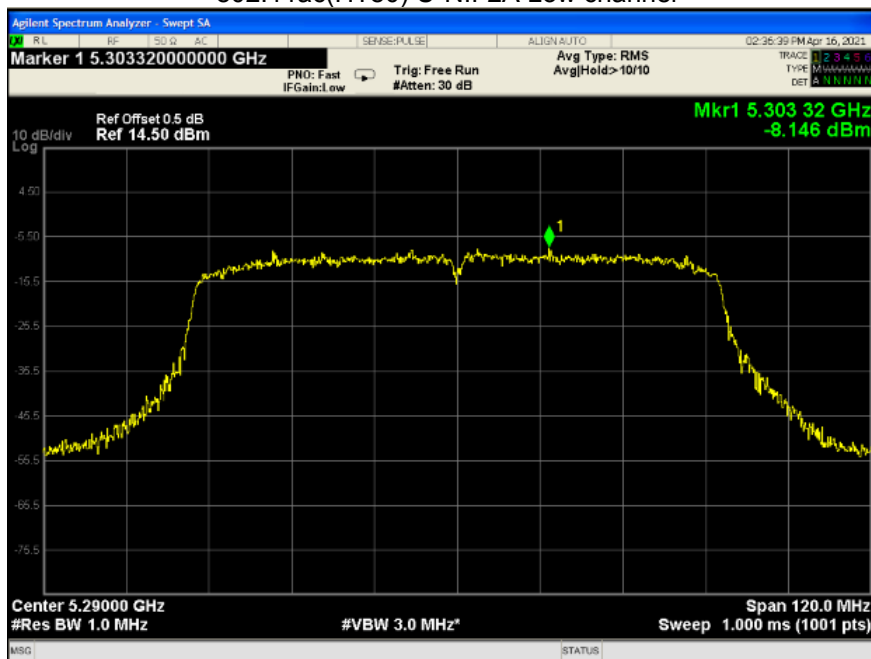


802.11a U-NII-2C Low channel

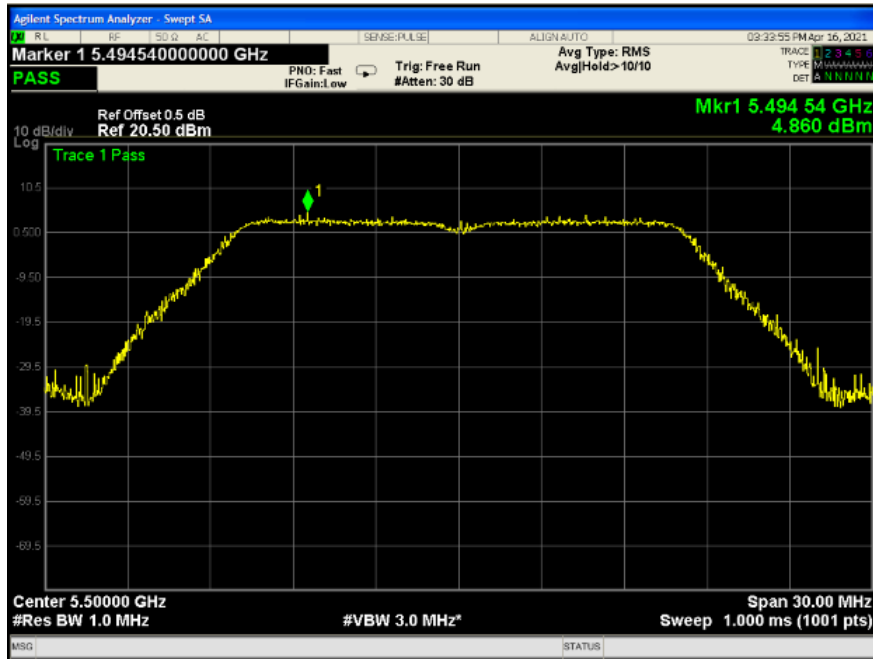


802.11a U-NII-2C Middle channel

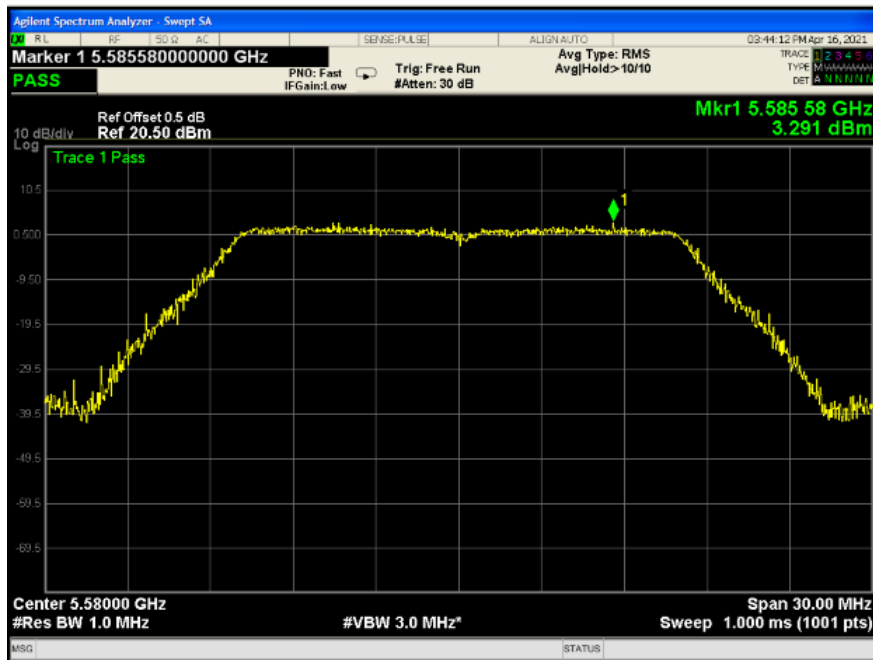


802.11a U-NII-2C High channel

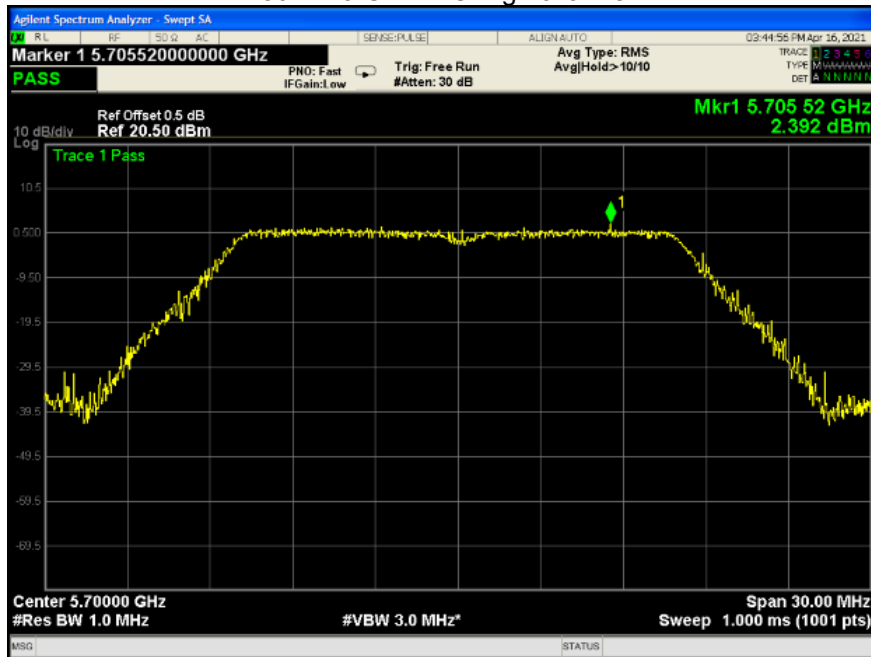


802.11n(HT20) U-NII-2C Low channel

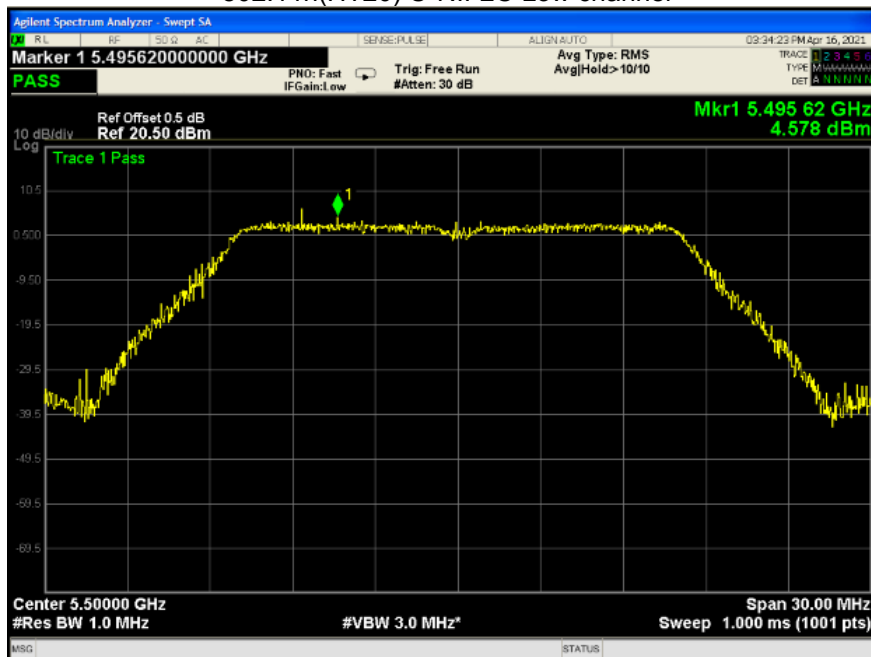


802.11n(HT20) U-NII-2C Middle channel

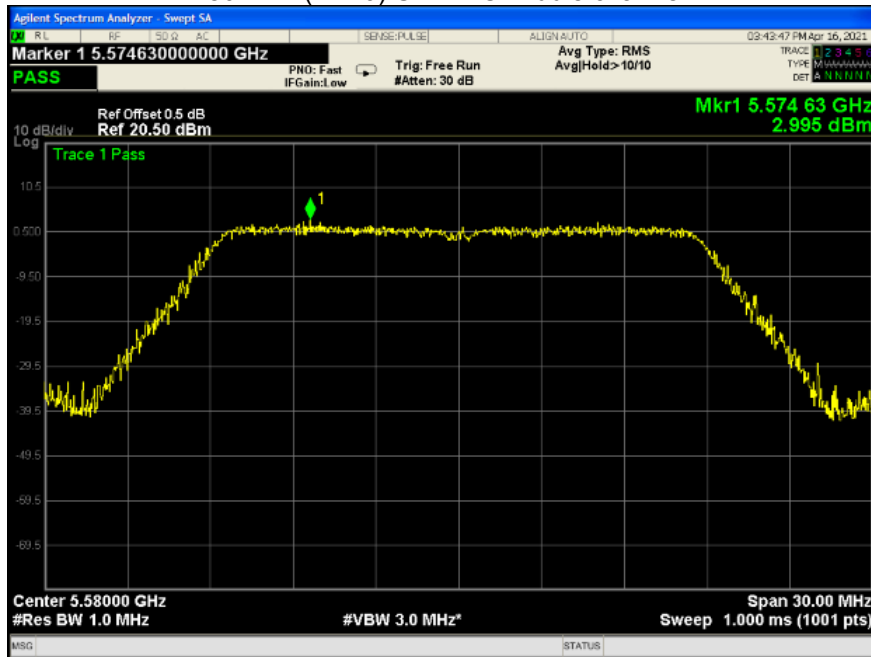


802.11n(HT20) U-NII-2C High channel

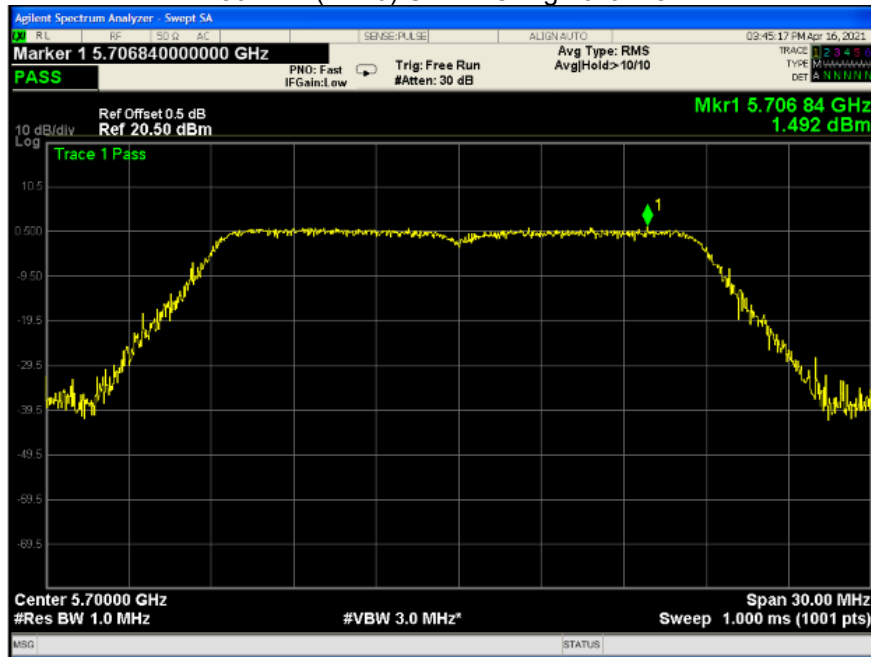


802.11ac(HT20) U-NII-2C Low channel

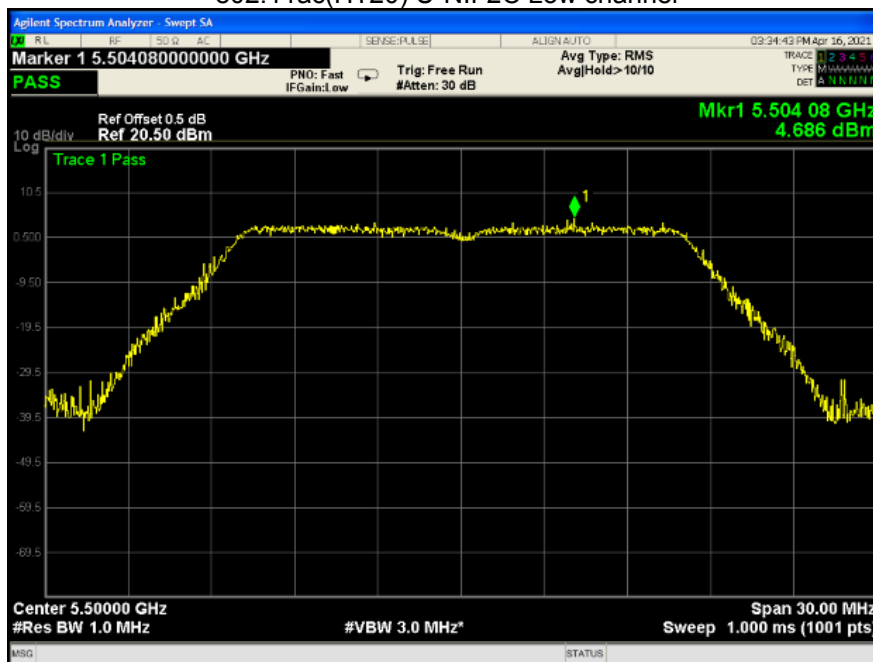


802.11ac(HT20) U-NII-2C Middle channel

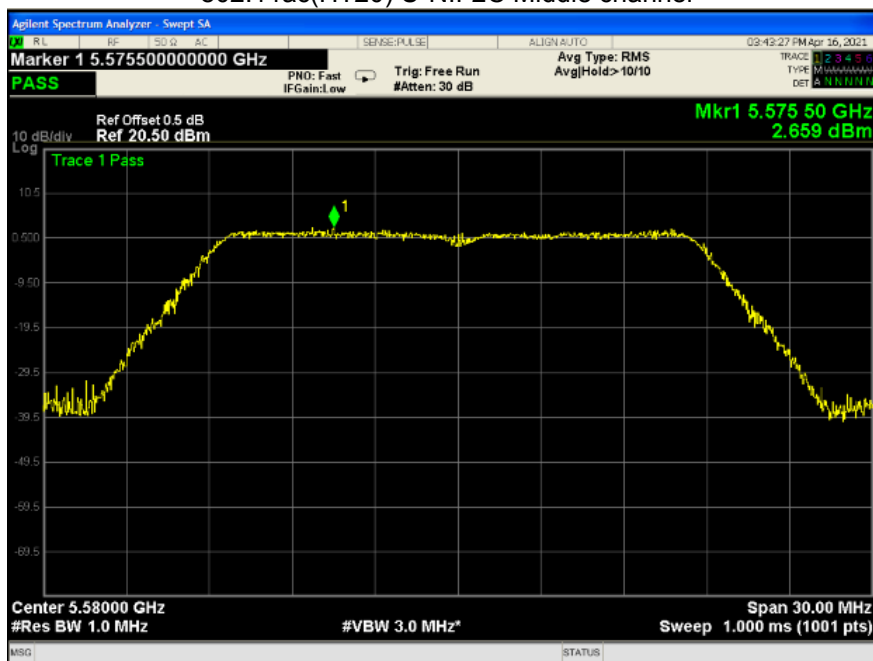


802.11ac(HT20) U-NII-2C High channel

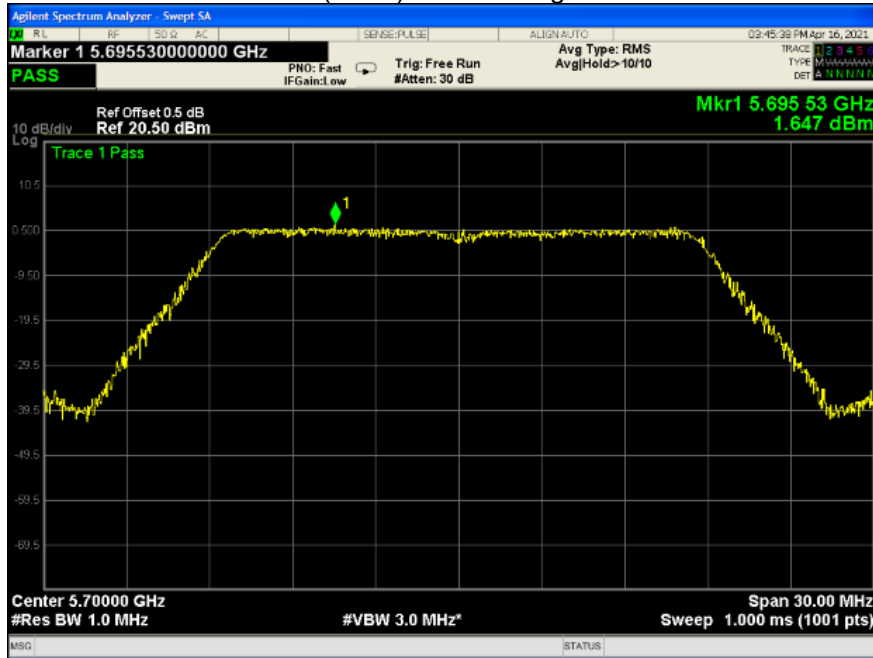


802.11ac(HT40) U-NII-2C Low channel

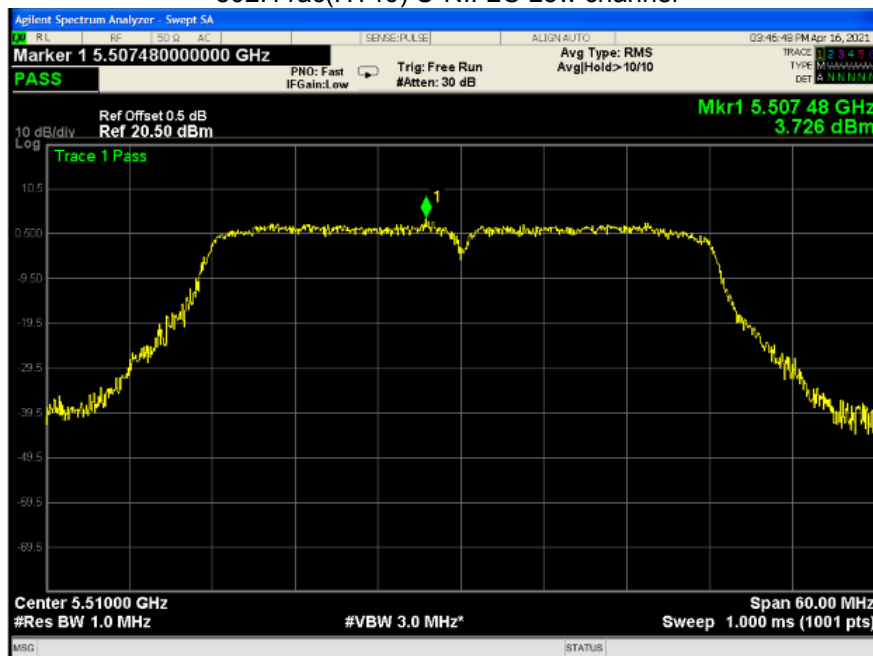


802.11n(HT40) U-NII-2C High channel

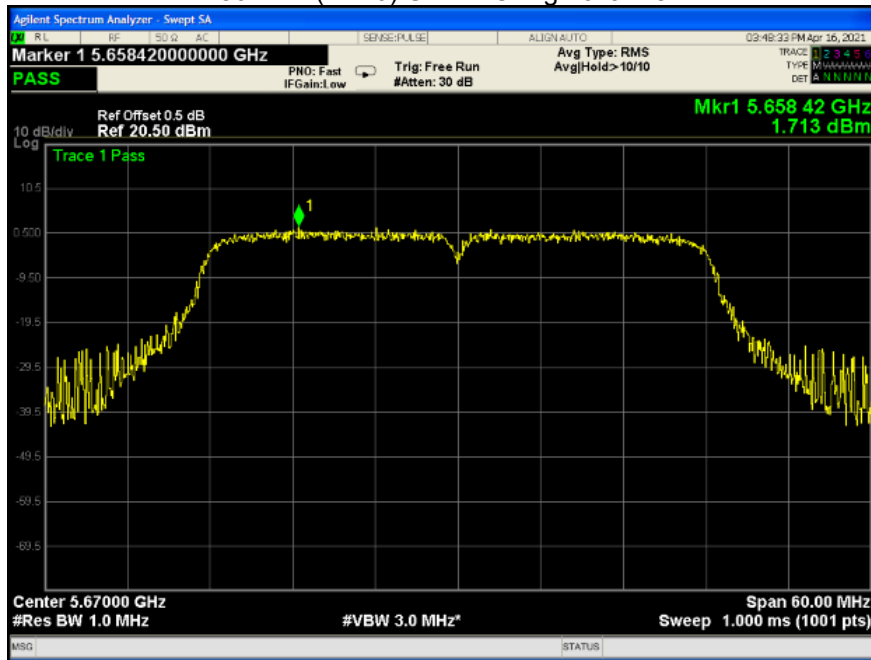


802.11ac(HT80) U-NII-2C Low channel

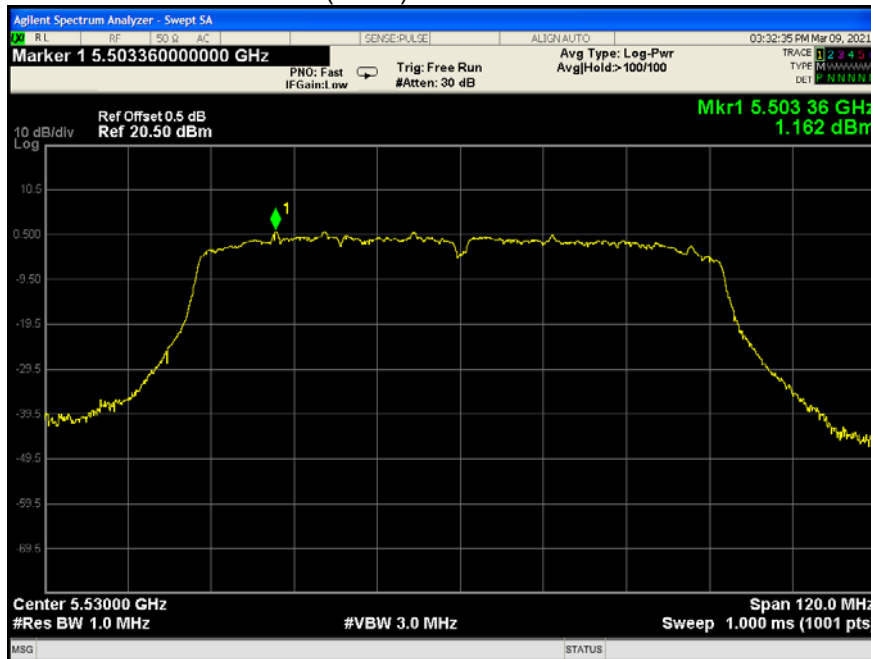


802.11ac(HT80) U-NII-2C High channel

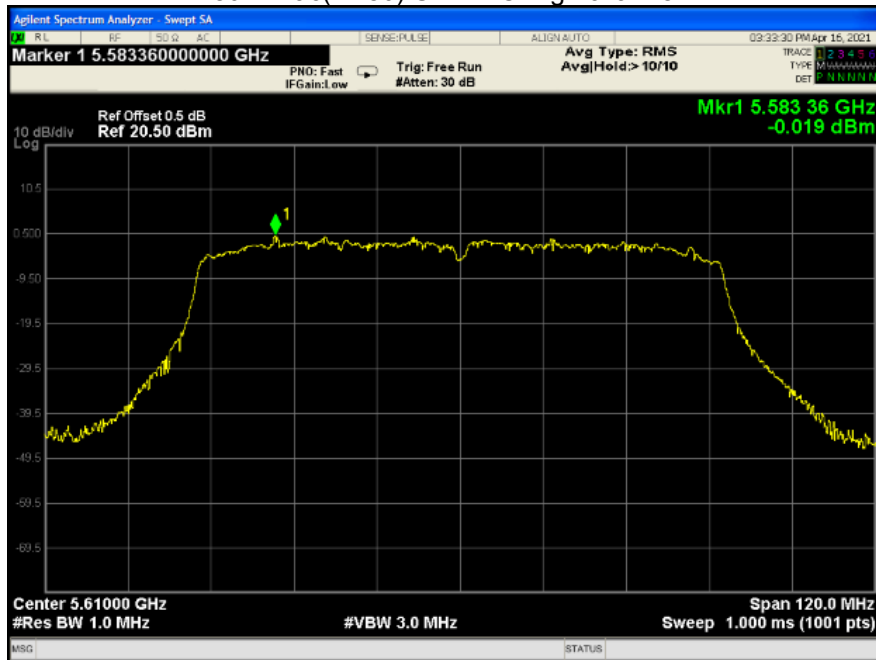


802.11a U-NII-3 Low channel

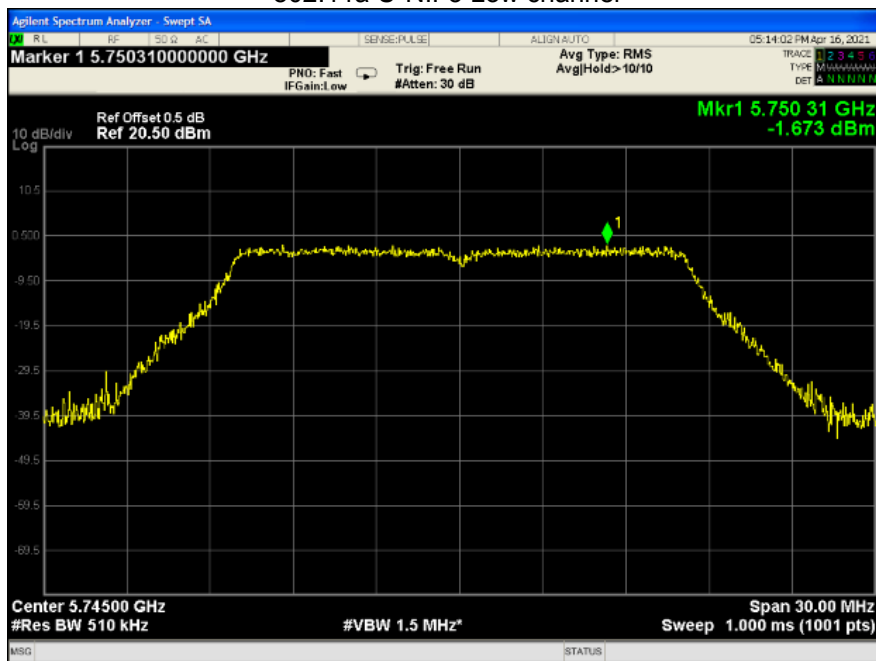


802.11a U-NII-3 Middle channel

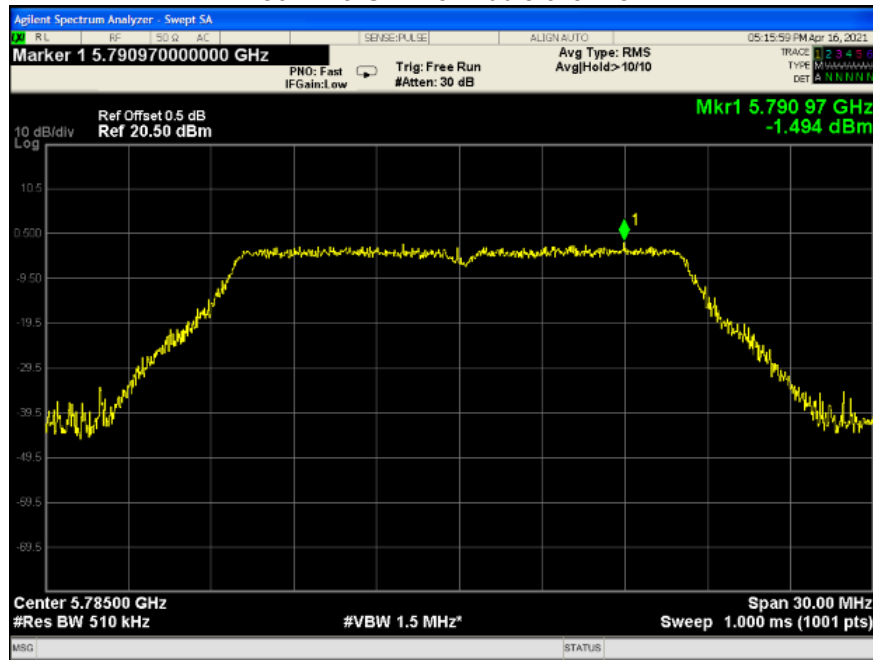


802.11a U-NII-3 High channel

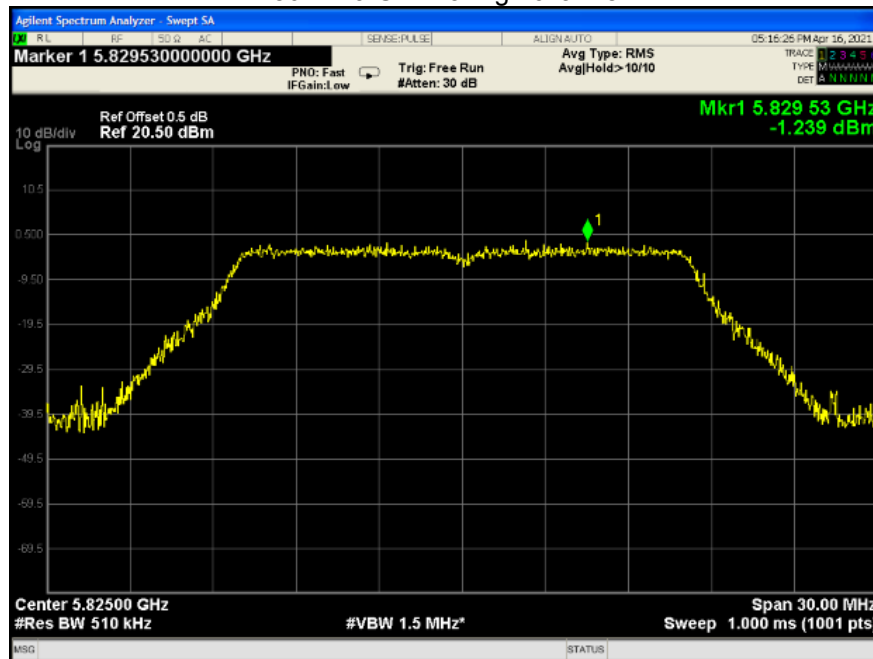


802.11n(HT20) U-NII-3 Low channel

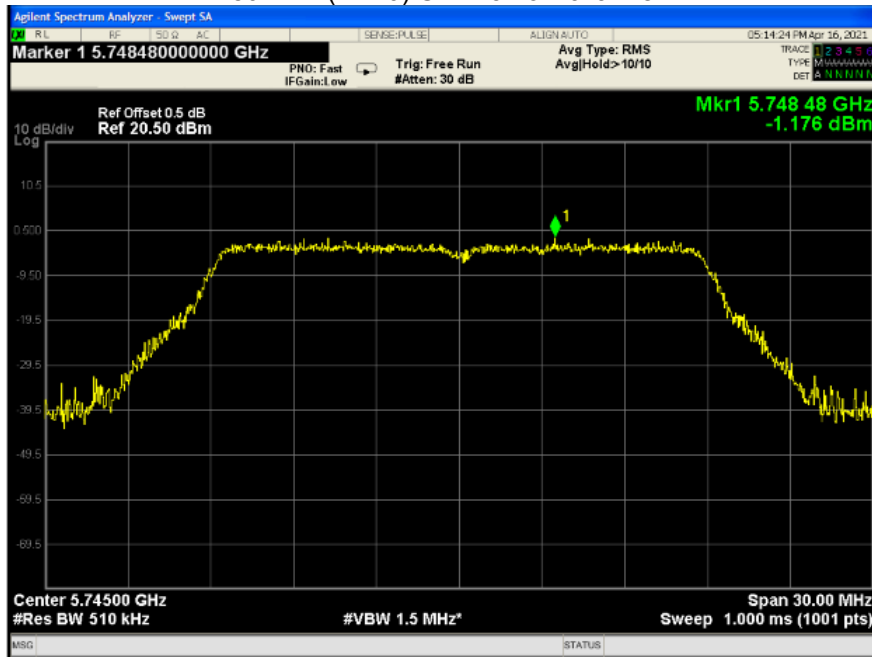


802.11n(HT20) U-NII-3 Middle channel

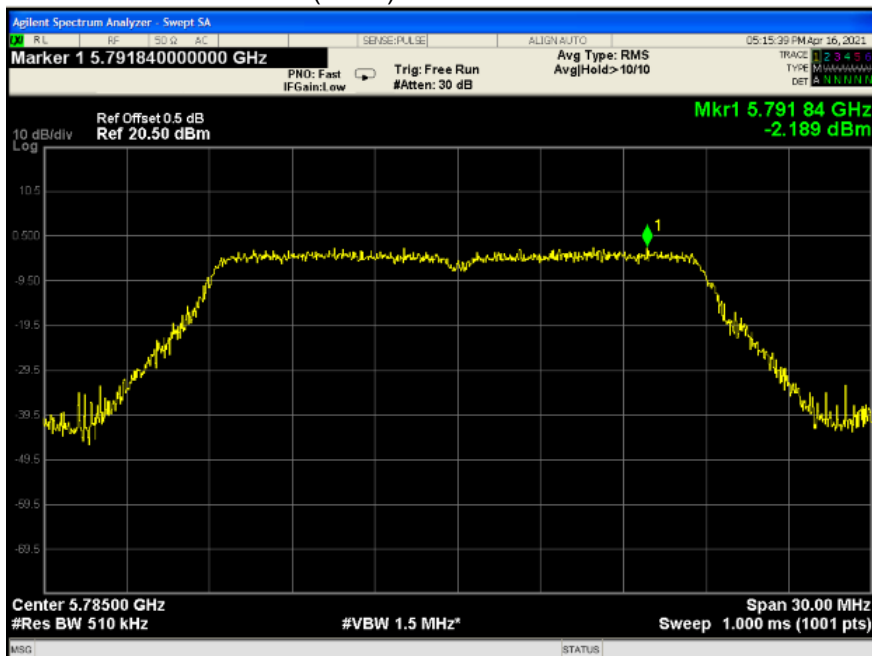


802.11n(HT20) U-NII-3 High channel

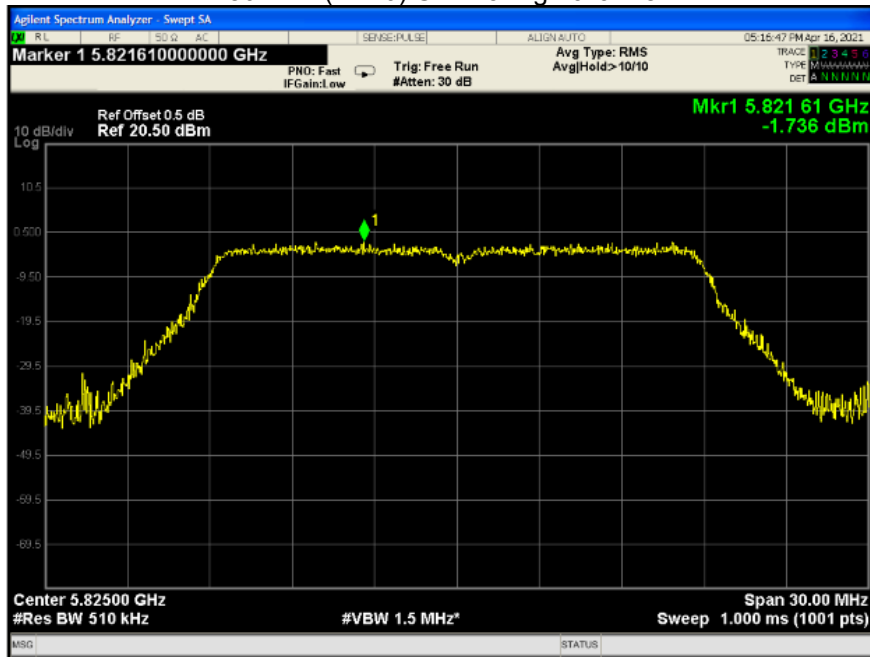


802.11ac(HT20) U-NII-3 Low channel

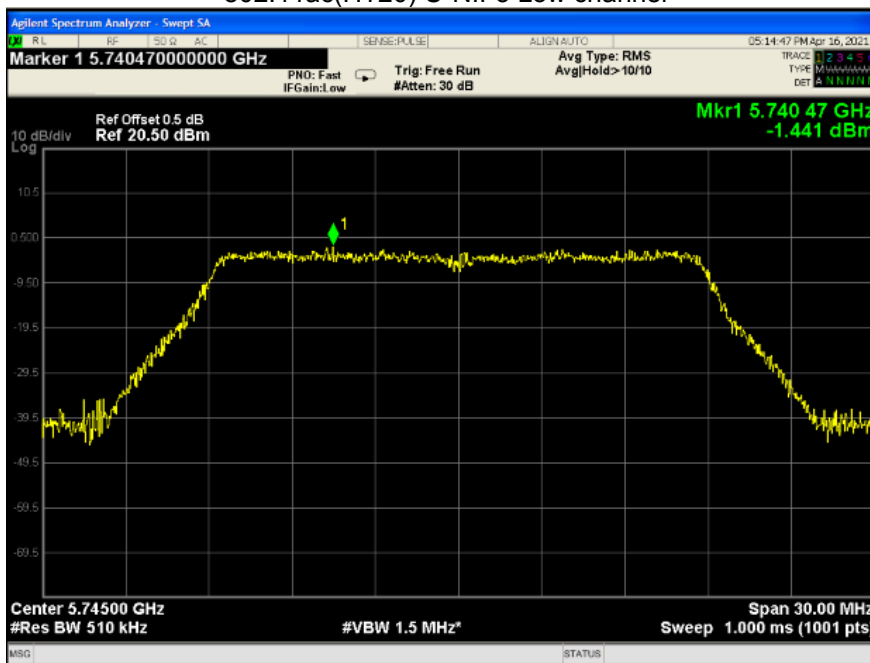


802.11ac(HT20) U-NII-3 Middle channel

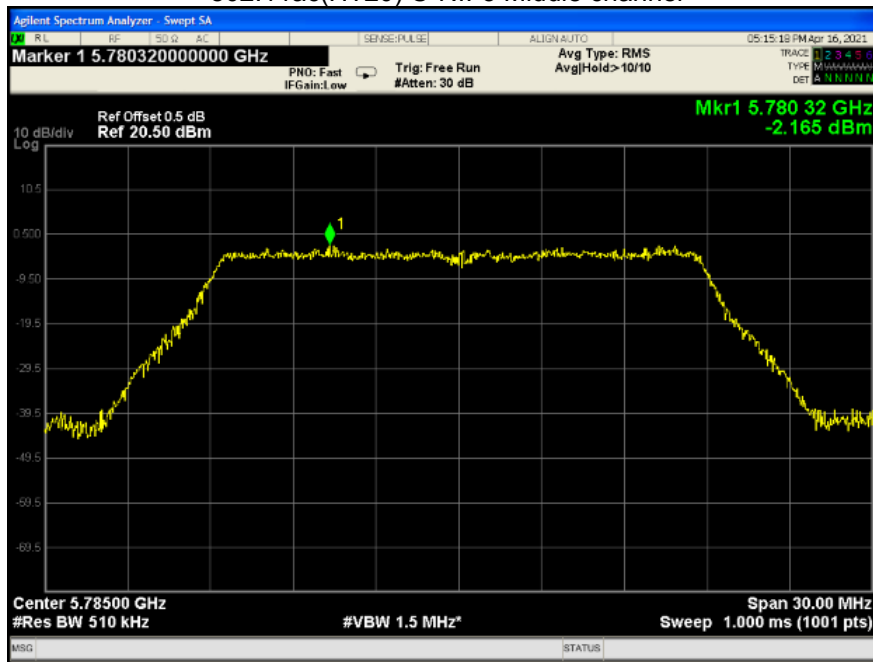


802.11ac(HT20) U-NII-3 High channel

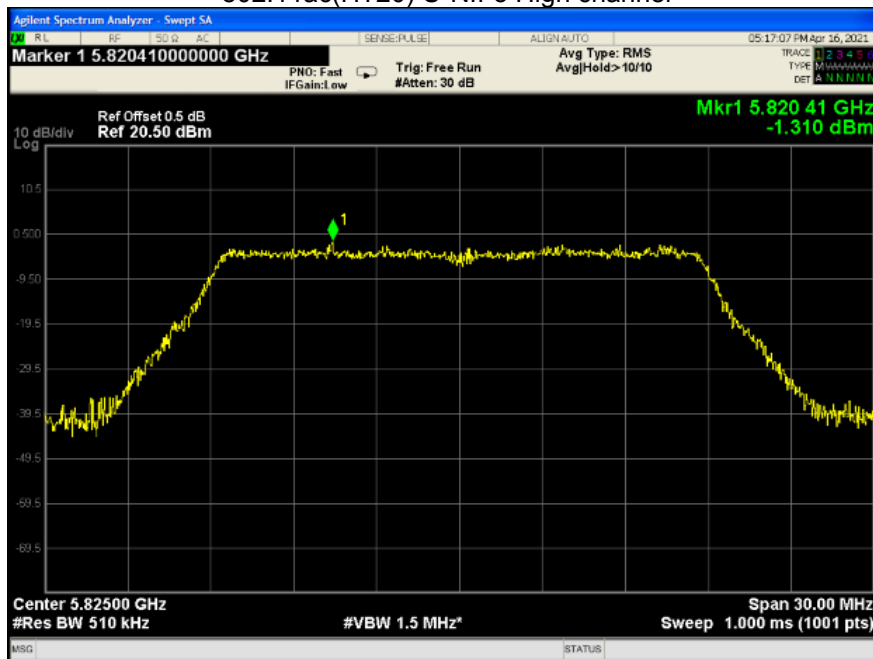


802.11ac(HT40) U-NII-3 Low channel

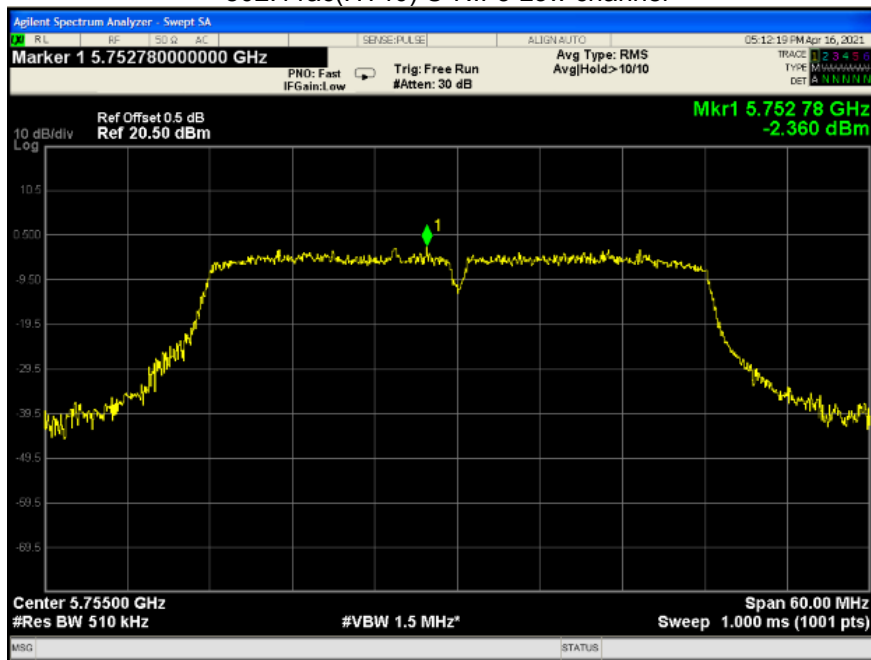


802.11ac(HT40) U-NII-3 High channel

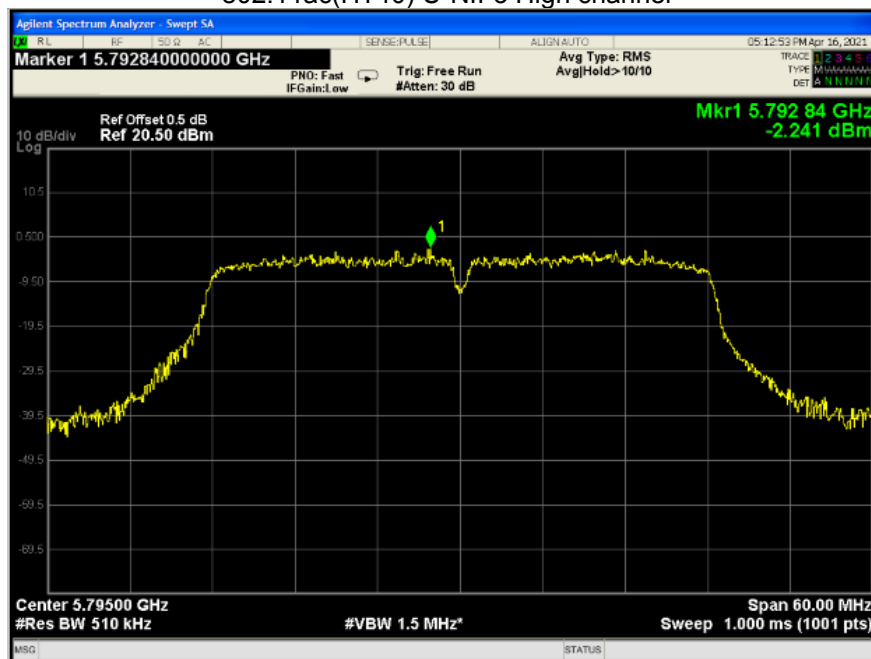


802.11n(HT40) U-NII-3 Low channel

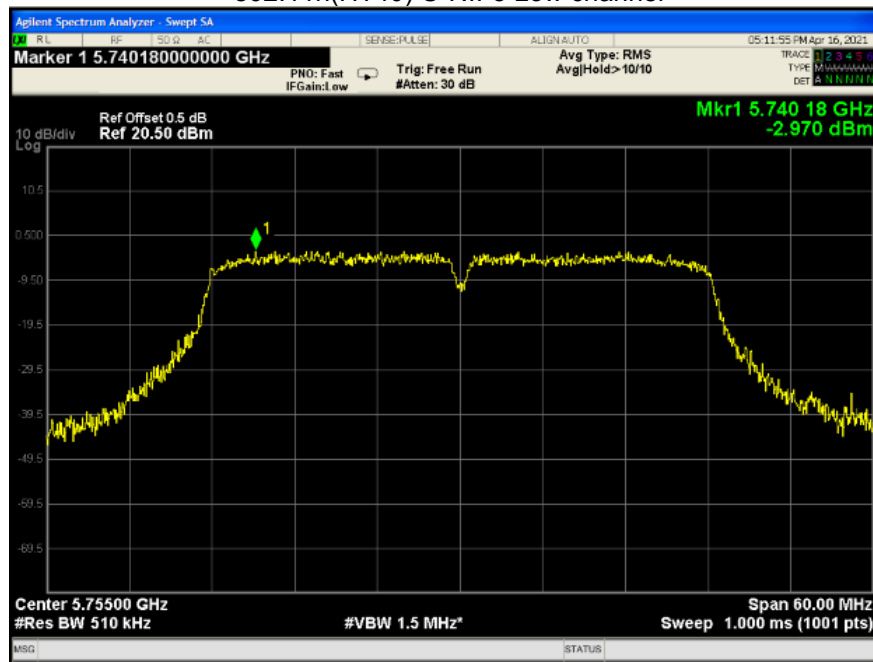

802.11n(HT40) U-NII-3 High channel

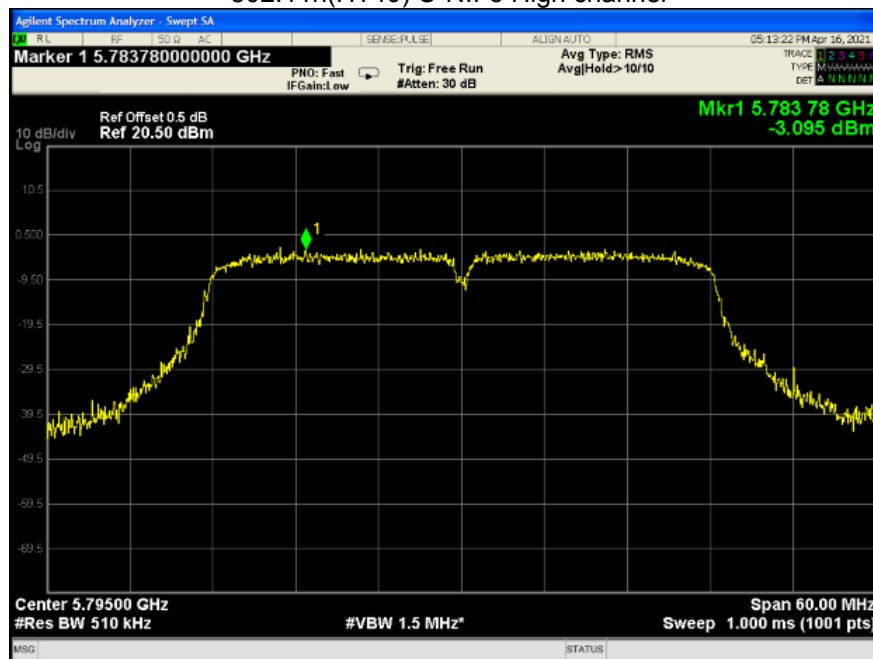

802.11ac(HT80) U-NII-3 Low channel

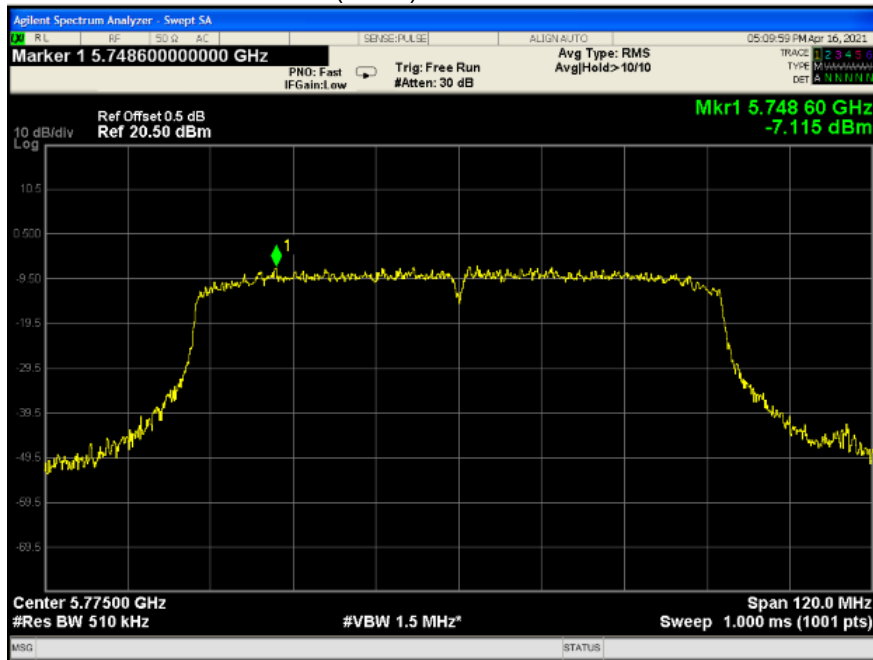

14 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of one antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-6310-Photos.

=====**End of Report**=====