

FCC Test Report

FCC ID:2ADH6-2041001

Product: Magnetic Wireless Charging Vent Mount

Trade Name: N/A

Model Number: 204 1001

204 1001 UT4, 204 1001 FB1, 204 1001 FB2,

Family Model: 204 1001 TG3, 204 1001 EF, 204 1001 XXX,
5061445

Report No.: S22060904205001

Prepared for

E-filliate Incorporated

11321 White Rock Rd. Rancho Cordova, CA. 95742, USA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: E-filliate Incorporated
Address.....: 11321 White Rock Rd. Rancho Cordova, CA. 95742, USA
Manufacturer's Name.....: PYS VIETNAM TECHNOLOGY COMPANY LIMITED
Address.....: CN-06, ThuanThanh II industrial zone, Mao Dien commune, ThuanThanh district, BacNinh, Vietnam
Factory's Name: PYS VIETNAM TECHNOLOGY COMPANY LIMITED
Address.....: CN-06, ThuanThanh II industrial zone, Mao Dien commune, ThuanThanh district, BacNinh, Vietnam

Product description

Product name.....: Magnetic Wireless Charging Vent Mount
Model and/or type reference : 204 1001, 204 1001 UT4, 204 1001 FB1, 204 1001 FB2, 204 1001 TG3, 204 1001 EF, 204 1001 XXX, 5061445
FCC part 15C

Standards.....: ANSI C63.10:2013
KDB 680106 D01 RF Exposure Wireless Charging App v03r01

This device described above has been tested by ShenzhenNTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ShenzhenNTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test.....:
Date (s) of performance of tests.....: May. 20, 2022~ Jun. 20, 2022
Date of Issue.....: Jun. 21, 2022
Test Result.....: Pass

Testing Engineer : Susan Li
(Susan Li)

Authorized Signatory : Alex Li
(Alex Li)

Table of Contents

Page

1. TEST SUMMARY	4
1.1 FACILITIES AND ACCREDITATIONS	5
1.2 LABORATORY ACCREDITATIONS AND LISTINGS	5
1.3 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION	12
3.1.2 TEST PROCEDURE	13
3.1.3 TEST SETUP	13
3.1.4 EUT OPERATING CONDITIONS	13
3.1.5 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
3.2.2 TEST PROCEDURE	17
3.2.3 TEST SETUP	18
3.2.4 TEST RESULTS	19
4. BANDWIDTH TEST	24
4.1 TEST PROCEDURE	24
4.2 TEST SETUP	24
4.3 TEST RESULT	25
5. ANTENNA APPLICATION	26
5.1 Antenna Requirement	26
5.2 Result	26

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission					
Standard	Test Item	FCC Rules	Limit	Judgment	Remark
FCC part 15C:2018 ANSI C63.10:2013	Conducted Emission	§15.207	Class B	PASS	
	Radiated Emission	§15.209	Class B	PASS	
	20dB BANDWIDTH	§15.215	Class B	PASS	
	ANTENNA APPLICATION	§15.203	/	PASS	

NOTE:

- (1)'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 FACILITIES AND ACCREDITATIONS

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

1.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- CNAS-Lab. : The Certificate Registration Number is L5516.
- IC-Registration : The Certificate Registration Number is 9270A-1.
- FCC- Accredited : Test Firm Registration Number:463705.
Designation Number: CN1184
- A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
- Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.
- Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 2.80 dB
2	RF power, conducted	± 0.16 dB
3	Spurious emissions, conducted	± 0.21 dB
4	All emissions, radiated(30MHz~1GHz)	± 2.64 dB
5	All emissions, radiated(1GHz~6GHz)	± 2.40 dB
6	All emissions, radiated(> 6GHz)	± 2.52 dB
7	Temperature	± 0.5 °C
8	Humidity	± 2 %
9	All emissions, radiated(9KHz~30MHz)	± 6 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Magnetic Wireless Charging Vent Mount
Trade Name	N/A
FCC ID	2ADH6-2041001
Model No.	204 1001
Family Model	204 1001 UT4, 204 1001 FB1, 204 1001 FB2, 204 1001 TG3, 204 1001 EF, 204 1001 XXX, 5061445
Model Difference	All models are identical except model name.
Operating Frequency	110.5kHz~205kHz
Modulation Technique	ASK
Antenna Type	Induction coil
Power Rating	Input:5V/3A;9V/2.22A;12V/1.67A Wireless Output:5W/7.5W/10W/15W
Battery	N/A
HW Version	N/A
SW Version	N/A

2.2 DESCRIPTION OF TEST MODES

EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Test Cases	
Test Item	Data Rate/ Modulation
AC Conducted Emission	Mode 1: Max load
Radiated Test Cases	Mode 1: Max load

Note: Wireless output 15W full load, half load and no load mode all has been tested, 15W full load was the worst case and only this mode was presented in this report.


(*)EUT can only access the specified load, can not adjust the size of the load

2.3 DESCRIPTION OF TEST SETUP

For AC Conducted Emission Mode

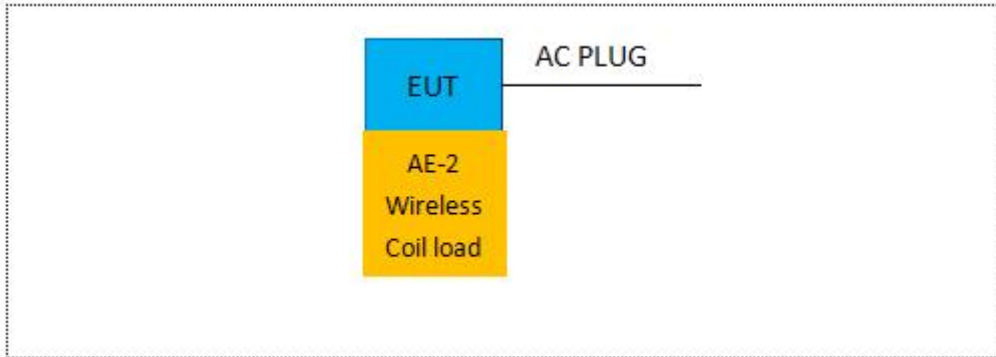

For Radiated Test Cases

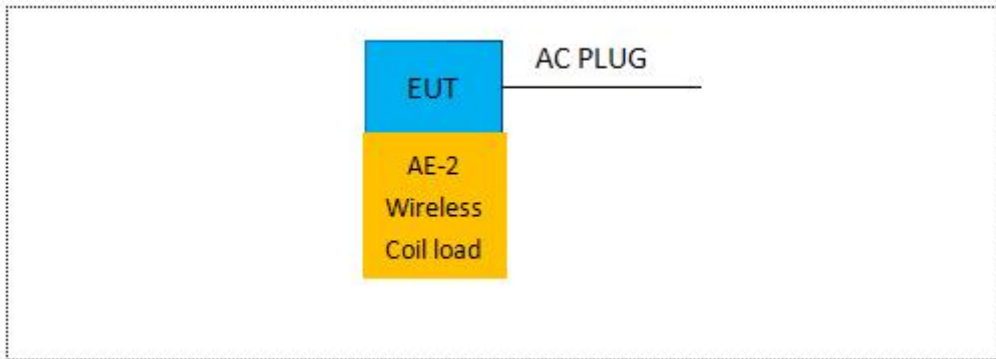

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals
AE-2	Adjustable wireless coil load	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded”“with core”; “NO” means “unshielded”“without core”.

2.5 MEASUREMENT INSTRUMENTS LIST

Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.27	2023.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.27	2023.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.29	2023.03.28	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Amplifier	EMC	EMC051835 SE	980246	2021.07.01	2022.06.30	1 year
8	Amplifier	MITEQ	TTA1840-35-HG	177156	2021.07.01	2022.06.30	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2021.06.22	2022.06.21	1 year
10	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.6	2022.08.05	3 year
11	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.6	2022.08.05	3 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2022.04.27	2023.04.26	1 year
2	LISN	R&S	ENV216	101313	2022.04.27	2023.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2022.04.27	2023.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	limit	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

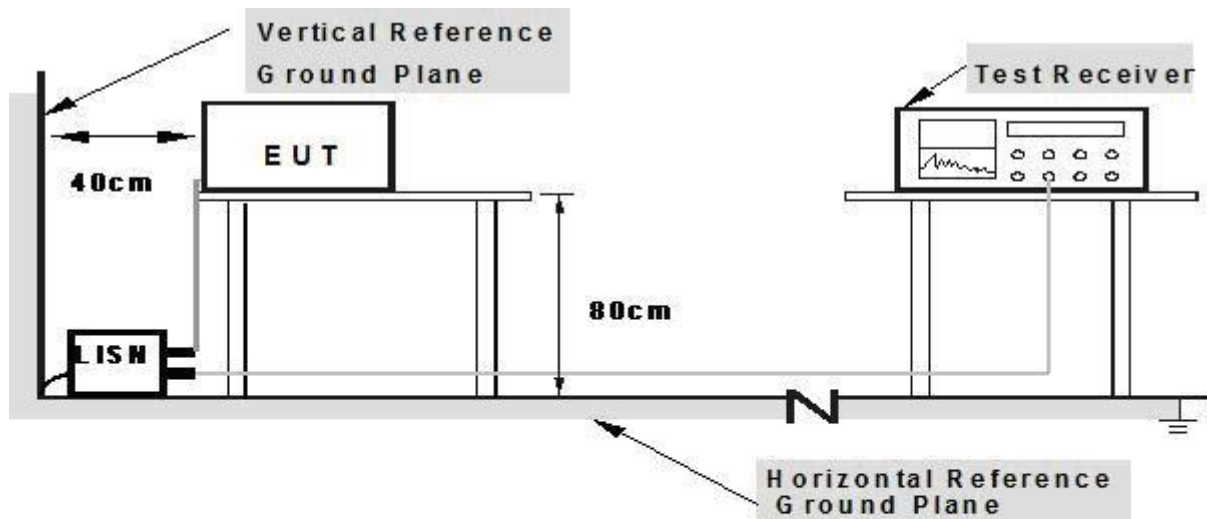

Note: 1.Support units were connected to second LISN.


2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.5 TEST RESULTS

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	26°C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	L
Test Mode:	Mode 1	Test Voltage:	DC 12V from adapter Input AC 120V/60Hz

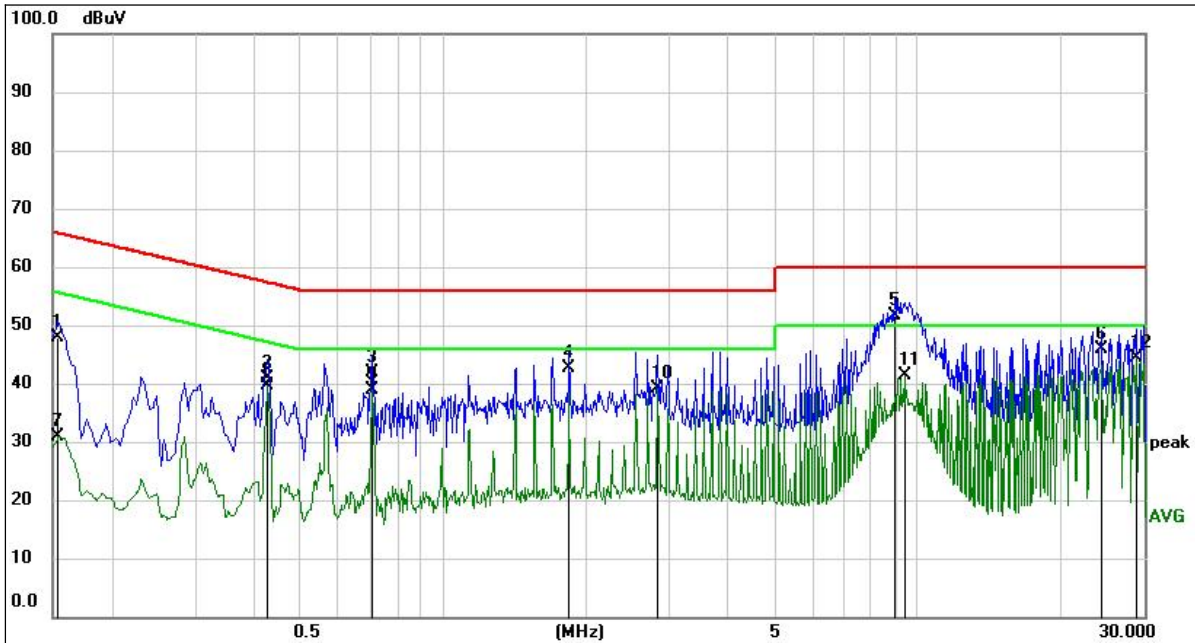


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1544	37.83	9.94	47.77	65.76	-17.99	QP	
2		0.4245	31.08	9.92	41.00	57.36	-16.36	QP	
3		0.7079	31.89	9.95	41.84	56.00	-14.16	QP	
4		1.8419	32.52	10.02	42.54	56.00	-13.46	QP	
5		8.9295	40.82	10.84	51.66	60.00	-8.34	QP	
6		24.5175	33.14	12.86	46.00	60.00	-14.00	QP	
7		0.1544	20.92	9.94	30.86	55.76	-24.90	AVG	
8		0.4245	29.78	9.92	39.70	47.36	-7.66	AVG	
9		0.7079	29.00	9.95	38.95	46.00	-7.05	AVG	
10		2.8365	28.93	10.10	39.03	46.00	-6.97	AVG	
11		9.3525	30.45	10.91	41.36	50.00	-8.64	AVG	
12	*	28.7700	31.83	12.50	44.33	50.00	-5.67	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	26°C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	N
Test Mode:	Mode 1	Test Voltage:	DC 12V from adapter Input AC 120V/60Hz

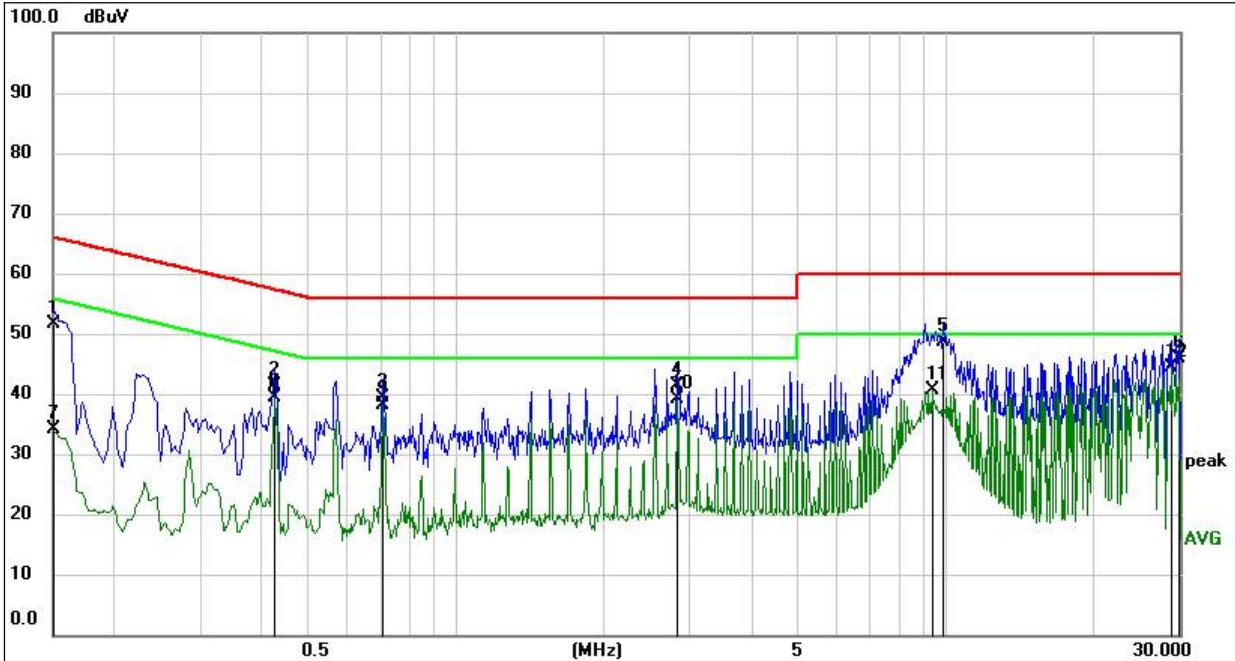

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	41.73	9.94	51.67	66.00	-14.33	QP	
2		0.4245	31.52	9.93	41.45	57.36	-15.91	QP	
3		0.7079	29.40	9.96	39.36	56.00	-16.64	QP	
4		2.8365	31.31	10.10	41.41	56.00	-14.59	QP	
5		9.8880	37.58	10.98	48.56	60.00	-11.44	QP	
6		29.9085	33.63	12.37	46.00	60.00	-14.00	QP	
7		0.1500	24.23	9.94	34.17	56.00	-21.83	AVG	
8		0.4245	29.36	9.93	39.29	47.36	-8.07	AVG	
9		0.7079	28.16	9.96	38.12	46.00	-7.88	AVG	
10		2.8365	28.95	10.10	39.05	46.00	-6.95	AVG	
11		9.3569	29.64	10.89	40.53	50.00	-9.47	AVG	
12	*	28.7790	31.99	12.34	44.33	50.00	-5.67	AVG	

Remark:

- All readings are Quasi-Peak and Average values.
- Factor = Insertion Loss + Cable Loss.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Notes

- (1) Measurement was performed at an antenna to the closed point of EUT distance of meters.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of 15.205, and the emissions located in restricted bands also comply with 15.209limit.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna (Blow 30M, use loop antenna), and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Use the following receiver/spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW=200Hz for 9KHz to 150KHz,

RBW=9kHz for 150KHz to 30MHz,

RBW=120KHz for 30MHz to 1GHz

VBW \geq 3*RBW


Sweep = auto

Detector function = QP


Trace = max hold

3.2.3 TEST SETUP

(a) For Radiated Emission Test Set-Up, Frequency Below 30MHz

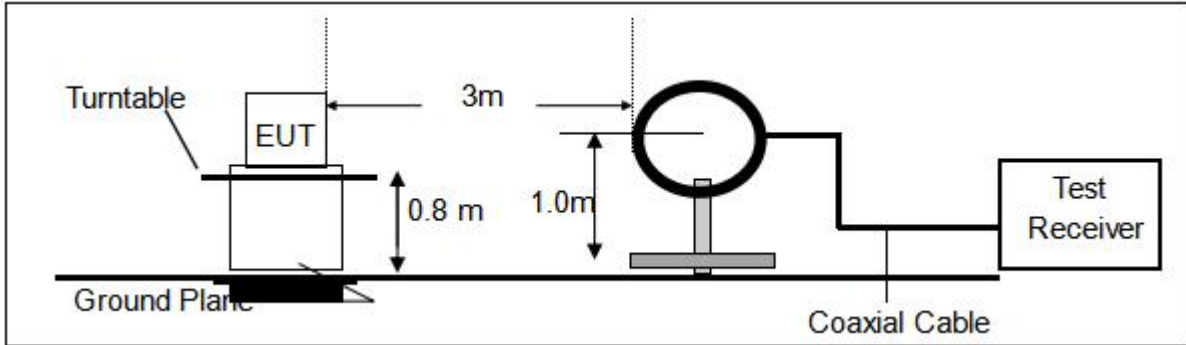

(b) For Radiated Emission 30~1000MHz

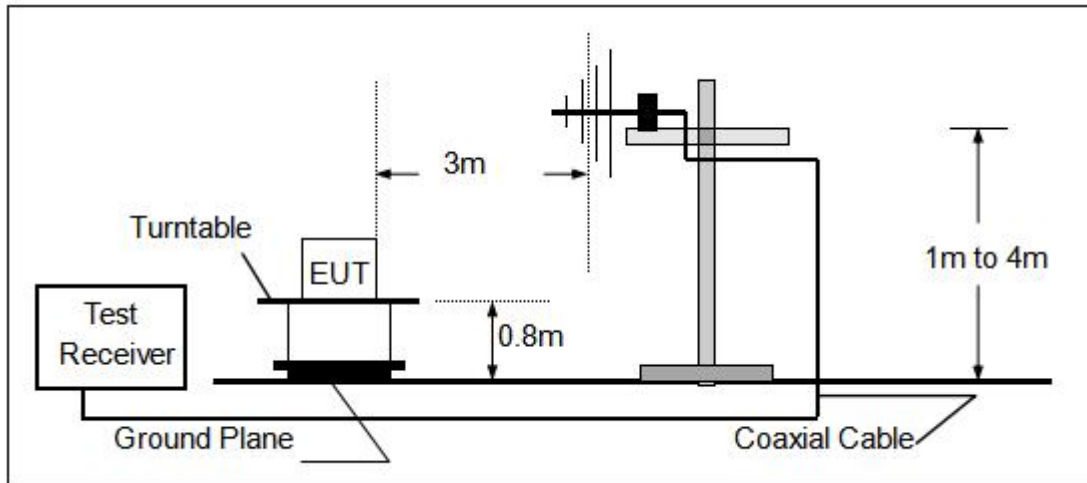

3.2.4 TEST RESULTS

TEST RESULTS(9KHz~30MHz)

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	25°C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Power :	DC 12V from adapter Input AC 120V/60Hz
Test Mode :	Low frequency/Mode 1	Polarization:	X

Frequency	Ant.Pol.	Emission Level	Limits	Margin	Remark
(MHz)		(dBuV/m)	(dBuV/m)	(dB)	
0.066	X	45.61	111.21	-65.60	Avg
0.121	X	56.83	105.95	-49.12	Avg(fundamental frequency)
0.577	X	37.66	72.38	-34.72	QP
0.607	X	46.71	71.94	-25.23	QP
1.199	X	36.30	66.03	-29.73	QP
14.450	X	36.34	69.54	-33.20	QP

Note:

Below 30MHz, Pre-test the X, Y, Z axis to find X axis is worst case, so only record X axis test data.

X: Field strength which this device generates since the position of the charging coil and loop antenna differ by 0 degrees.

Y: Field strength which this device generates since the position of the charging coil and loop antenna differ by 90 degrees.

Z: Field strength which this device generates since the position of the charging coil and loop antenna differ by 180 degrees.

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	25°C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Power :	DC 12V from adapter Input AC 120V/60Hz
Test Mode :	Mid frequency/Mode 1	Polarization:	X

Frequency (MHz)	Ant.Pol.	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
0.072	X	48.77	110.46	-61.69	Avg
0.140	X	57.59	104.68	-47.09	Avg(fundamental frequency)
0.547	X	45.67	72.84	-27.17	QP
0.658	X	39.87	71.24	-31.37	QP
1.165	X	36.31	66.28	-29.97	QP
16.160	X	48.40	69.54	-21.14	QP

Note:

Below 30MHz, Pre-test the X, Y, Z axis to find X axis is worst case, so only record X axis test data.

X: Field strength which this device generates since the position of the charging coil and loop antenna differ by 0 degrees.

Y: Field strength which this device generates since the position of the charging coil and loop antenna differ by 90 degrees.

Z: Field strength which this device generates since the position of the charging coil and loop antenna differ by 180 degrees.

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	25°C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Power :	DC 12V from adapter Input AC 120V/60Hz
Test Mode :	High frequency/Mode 1	Polarization:	X

Frequency (MHz)	Ant.Pol.	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
0.027	X	45.05	118.98	-73.93	Avg
0.195	X	53.18	101.80	-48.62	Avg(fundamental frequency)
0.556	X	42.45	72.70	-30.25	QP
0.807	X	43.16	69.47	-26.31	QP
1.438	X	37.15	64.45	-27.30	QP
28.729	X	41.34	69.54	-28.20	QP

Note:

Below 30MHz, Pre-test the X, Y, Z axis to find X axis is worst case, so only record X axis test data.


X: Field strength which this device generates since the position of the charging coil and loop antenna differ by 0 degrees.

Y: Field strength which this device generates since the position of the charging coil and loop antenna differ by 90 degrees.

Z: Field strength which this device generates since the position of the charging coil and loop antenna differ by 180 degrees.

TEST RESULTS(30MHz ~1000MHz)


EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	25°C	Relative Humidity:	57%
Pressure:	1010 hPa	Test Power :	DC 12V from adapter Input AC 120V/60Hz
Test Mode :	High frequency/Mode 1	Polarization:	Horizontal

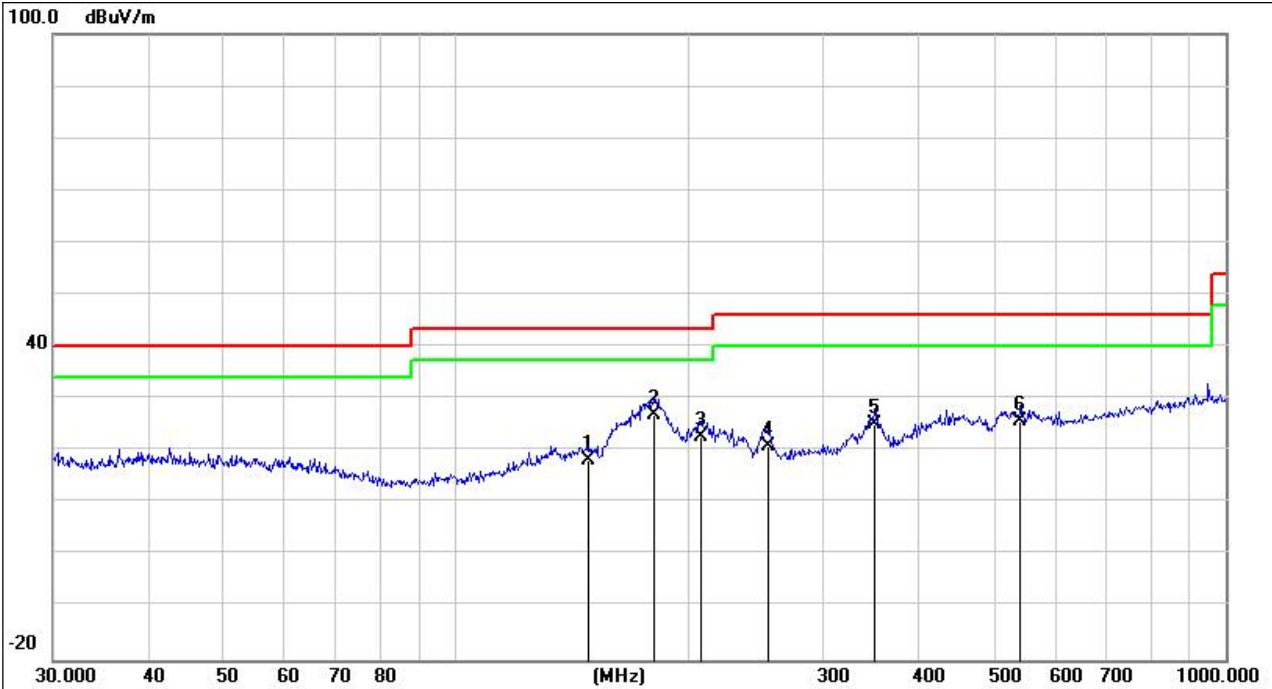

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	148.9625	25.36	-7.17	18.19	43.50	-25.31	QP
2 *	180.6487	36.60	-9.54	27.06	43.50	-16.44	QP
3	207.8500	33.74	-11.01	22.73	43.50	-20.77	QP
4	254.7283	30.30	-9.25	21.05	46.00	-24.95	QP
5	350.4768	32.05	-6.78	25.27	46.00	-20.73	QP
6	541.3724	28.47	-2.73	25.74	46.00	-20.26	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	25°C	Relative Humidity:	57%
Pressure:	1010 hPa	Test Power :	DC 12V from adapter Input AC 120V/60Hz
Test Mode :	High frequency/Mode 1	Polarization:	Vertical

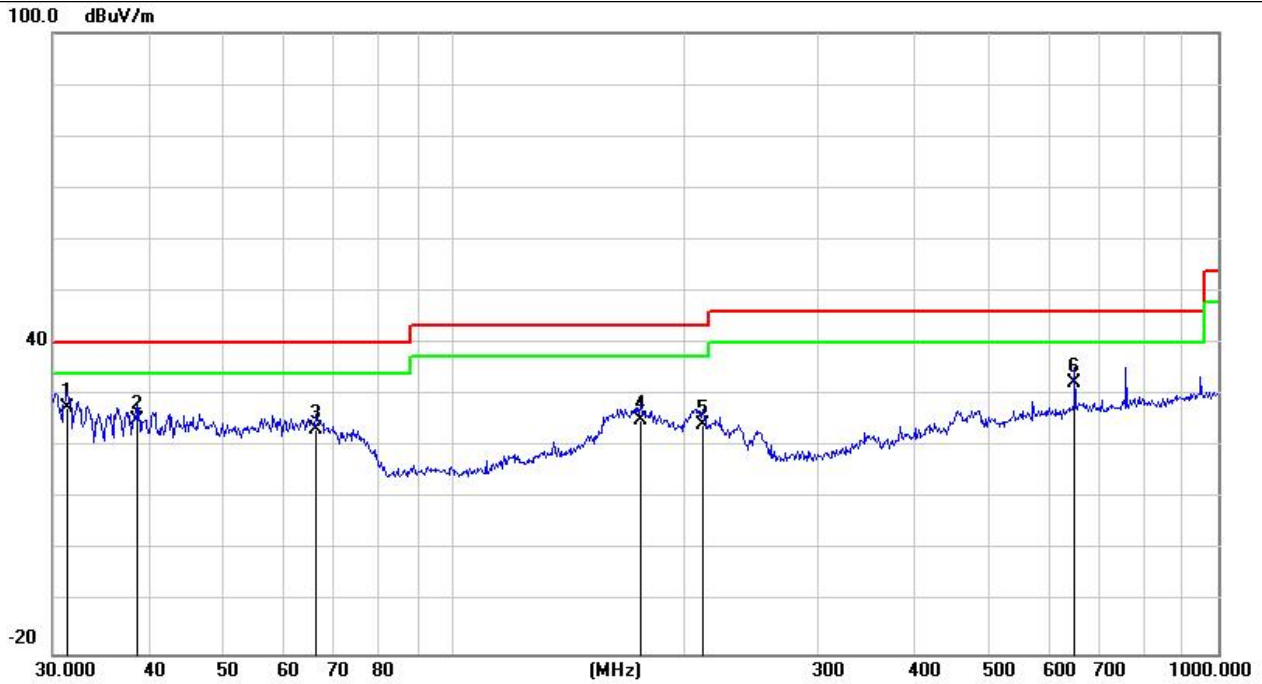

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	31.2893	35.80	-8.33	27.47	40.00	-12.53	QP
2		38.6160	33.06	-7.76	25.30	40.00	-14.70	QP
3		66.2661	33.40	-10.05	23.35	40.00	-16.65	QP
4		176.2685	34.09	-8.92	25.17	43.50	-18.33	QP
5		212.2694	35.14	-10.83	24.31	43.50	-19.19	QP
6		649.6597	32.86	-0.46	32.40	46.00	-13.60	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- 1). The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2). 20dB Bandwidth the resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 3). Measured the spectrum width with power higher than 20dB below carrier.

4.2 TEST SETUP




4.3 TEST RESULT

EUT:	Magnetic Wireless Charging Vent Mount	Model Name. :	204 1001
Temperature:	24°C	Relative Humidity:	56%
Pressure:	1010 hPa	Test Mode :	Mode 1
Test Power :	DC 12V from adapter Input AC 120V/60Hz		

-20dB Bandwidth-a single frequency(Hz)
800

a single frequency

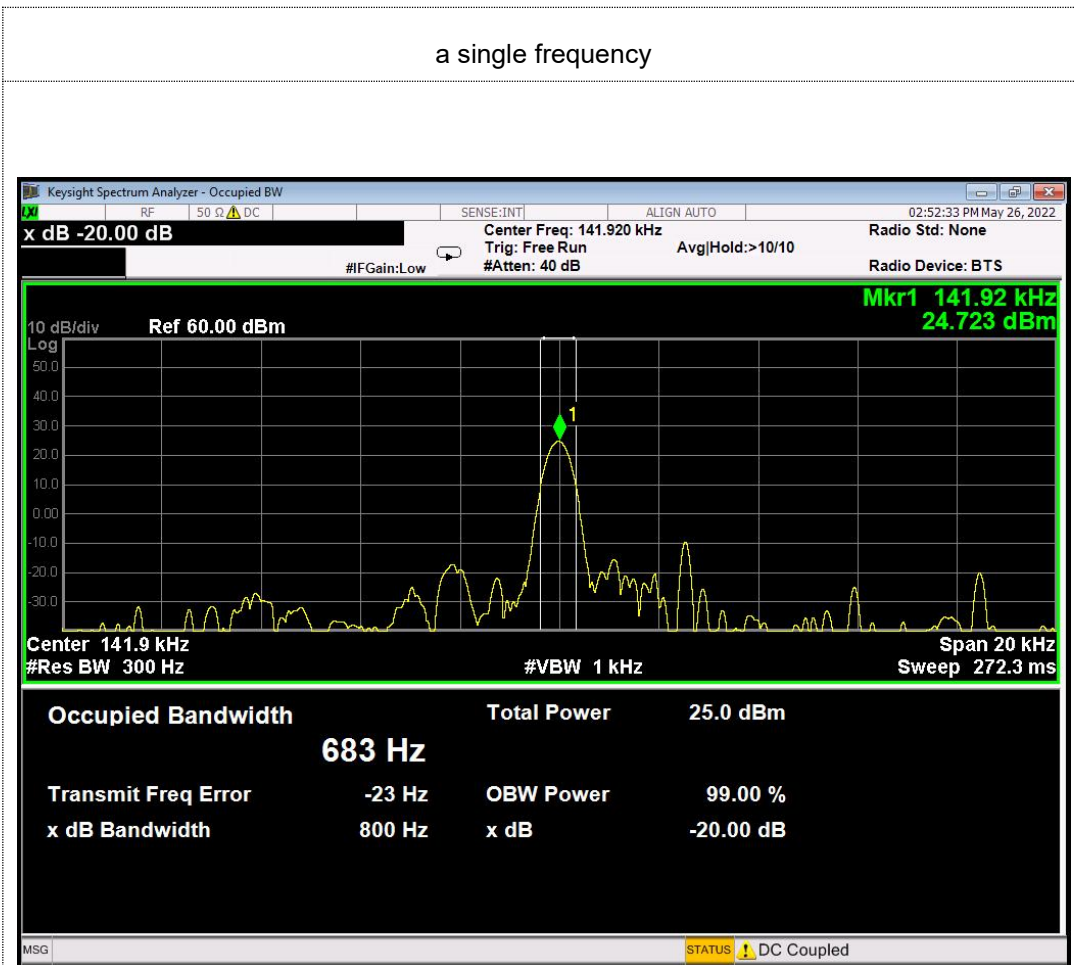

5. ANTENNA APPLICATION

5.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 Result

The EUT antenna is permanent attached antenna. It complies with the standard requirement.

END REPORT