

# RF EXPOSURE REPORT

Product Name: Wireless speaker with Wireless charger  
FCC ID: 2ADK3-XY-AU022  
Trademark: N/A  
Model Number: XY-AU022  
Prepared For: XING DA INTERNATIONAL ELECTRONICS LIMITED  
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China  
Manufacturer: Dongguan Xing Yue Electronic co., Ltd  
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Oct. 26, 2021  
Sample tested Date: Oct. 26, 2021 to Nov. 11, 2021  
Issue Date: Nov. 11, 2021  
Report No.: CTB211112002RF  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310  
47 CFR § 2.1091; 47 CFR § 2.1093  
Test Results: PASS  
Remark: This is wireless charger EMF report.

Compiled by:

He Xiaona

He Xiaona

Reviewed by:

Arron Liu

Arron Liu

Approved by:



The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table of Contents

	Page
1 . GENERAL INFORMATION	3
1.1 . Independent Operation Mode	3
1.2 . Test Supporting System	3
2 .LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2.1 . For conducted emission at the mains terminals test	4
3. METHOD OF MEASUREMENT	5
3. 1.Applicable Standard	5
4. TEST RESULT	5
4.1. Conducted Emission at the Mains Terminals Test	5
4.2. Equipment Approval Considerations:	6
4.3. E and H field Strength	6

# 1. GENERAL INFORMATION

## 1.1. Independent Operation Mode

The basic operation mode is:

1.1.1. wireless charger power: 5W

## 1.2. Test Supporting System

Adapter

Description : Adapter

Model No. : HKA03612030-7B

Power Input : AC100-240V~ 1.0A 50/60Hz

Output: 5V-2A, 9A-2A, 12V-1.5A

DC Line : Unshielded, Detachable 0.2m

Mobile phone

Description : I Phone

Model No: iPhone12 Pro

Series No. FCDF12341DFD

Battery : 2815mAh

## 2.LIST OF TEST AND MEASUREMENT INSTRUMENTS

### 2.1. For conducted emission at the mains terminals test

Item	Equipment	Brand	Model No.	Frequency Range	Last calibration	Calibrated until
1	Broadband Field Meter	NARDA	NBM-550	-	Nov. 02, 2021	Nov. 01, 2022
2	Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	Nov. 02, 2021	Nov. 01, 2022
3	Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Nov. 02, 2021	Nov. 01, 2022
4	Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Nov. 02, 2021	Nov. 01, 2022
5	Broadband Field Meter	NARDA	NBM-550	-	Nov. 02, 2021	Nov. 01, 2022
6	Electric Field Meter	COMBINOV A	EFM 200	5Hz – 400kHz	Nov. 02, 2021	Nov. 01, 2022
7	E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Nov. 02, 2021	Nov. 01, 2022
8	E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Nov. 02, 2021	Nov. 01, 2022


### 3. METHOD OF MEASUREMENT

#### 3. 1.Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

### 4. TEST RESULT

#### 4.1. Conducted Emission at the Mains Terminals Test

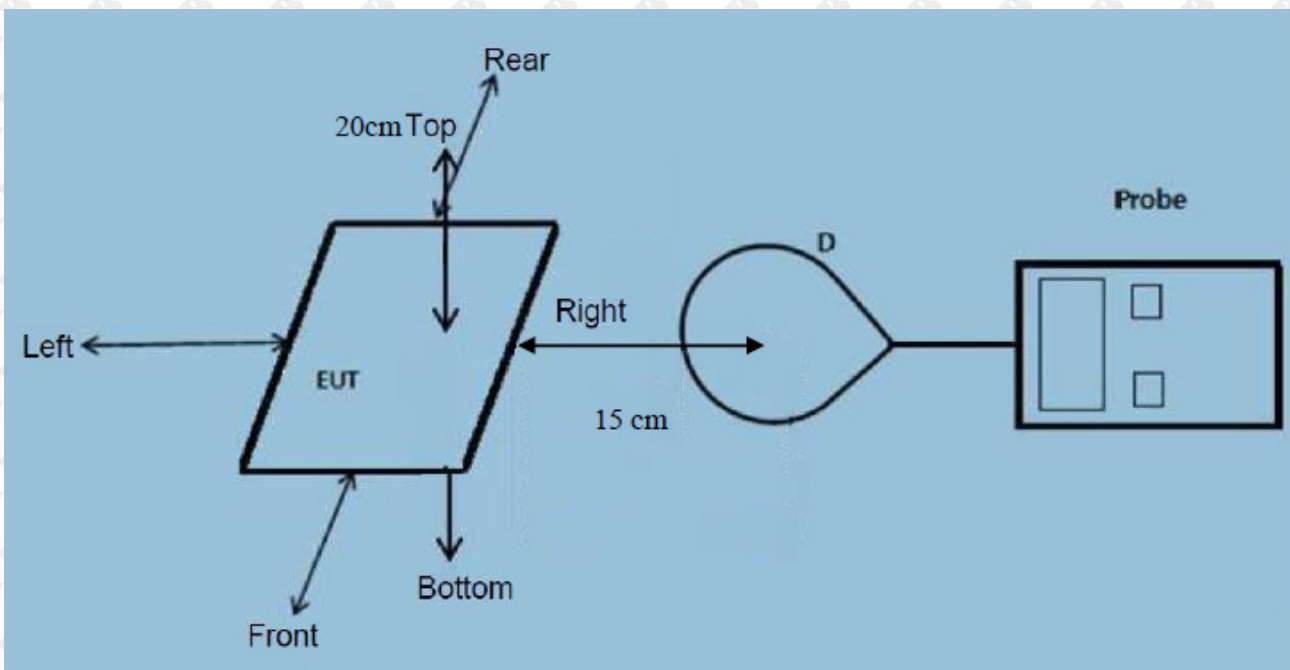

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device

#### Test Procedure:

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15cm surrounding the device and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- The EUT were measured according to the dictates of KDB 680106D03v01.

## 4.2. Equipment Approval Considerations:

The EUT does comply with item 5(b) of KDB 680106 D01v03

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115KHz to 205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 5000mW.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

Yes, the transfer system includes only single primary and secondary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, the EUT is a Mobile Wireless Charger

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 50% x MPE limit.

## 4.3. E and H field Strength

E-Field Strength

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (V/m)
1%	115	8.09	7.43	7.57	8.13	7.97	614
50%	115	7.78	7.45	7.35	7.92	7.69	614
99%	115	7.68	7.50	7.26	7.88	7.45	614

H-Field Strength

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (A/m)
1%	115	0.22	0.22	0.23	0.26	0.23	1.63
50%	115	0.15	0.14	0.13	0.24	0.27	1.63
99%	115	0.09	0.12	0.061	0.16	0.23	1.63

※※※※THE END※※※※