


TEST REPORT

Product Name: Wireless speaker
FCC ID: 2ADK3AU057
Trademark: Justice
Model Number: 2831012WM, XY-AU057
Prepared For: XING DA INTERNATIONAL ELECTRONICS LIMITED
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Manufacturer: DongGuan XingYue Electronic Co., LTD.
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Aug. 29, 2022
Sample tested Date: Aug. 29, 2022 to Sep. 05, 2022
Issue Date: Sep. 05, 2022
Report No.: CTB220905011RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Li, CEO Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47
13. DWELL TIME	49
13.1 Block Diagram Of Test Setup	49
13.2 Limit	49

13.3 Test procedure 49

13.4 Test Result 50

14. PSEUDORANDOM FREQUENCY 54

14.1 Limit 54

14.2 Test procedure 54

14.3 Test Result 55

15. ANTENNA REQUIREMENT 56

16. EUT TEST SETUP PHOTOGRAPHS 57

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220905011RFX	Sep,05, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): 2831012WM, XY-AU057

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: 2831012WM

Bluetooth Version: Bluetooth 5.0

Hardware Version: V2.0

Software Version: V2.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 0.034dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: PCB antenna

Antenna Gain: Bluetooth: -0.68dBi

Ratings: DC 5V by adapter

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

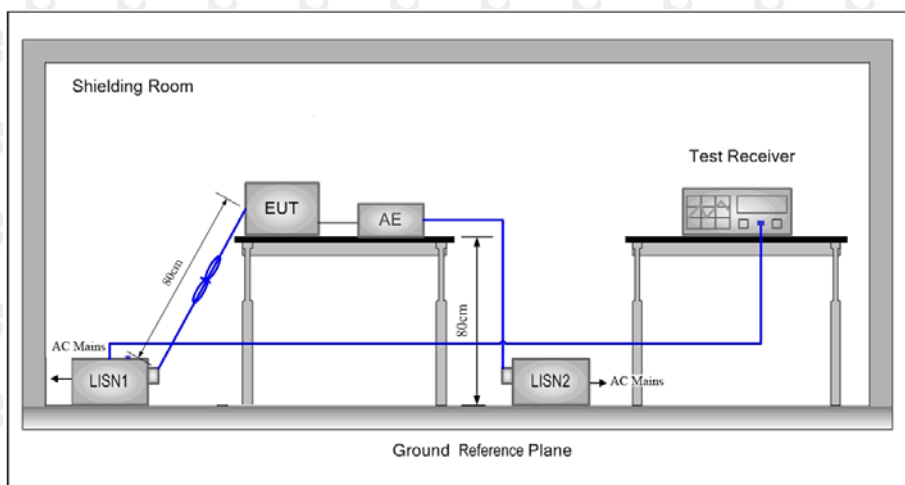

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

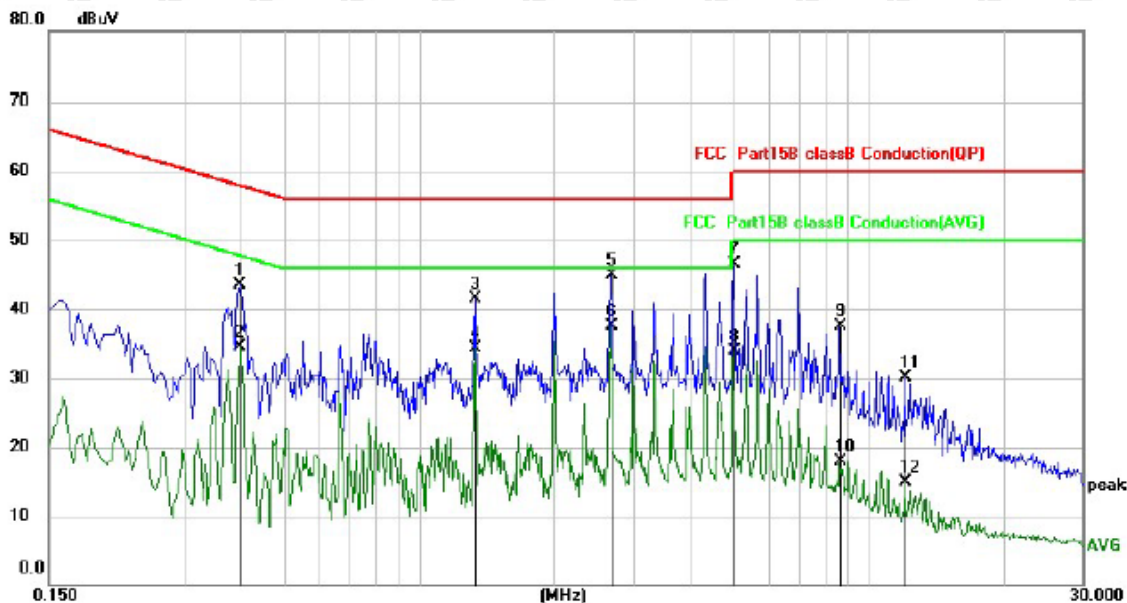


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.3980	33.43	9.98	43.41	57.90	-14.49	QP
2		0.3980	24.49	9.98	34.47	47.90	-13.43	AVG
3		1.3340	31.44	10.00	41.44	56.00	-14.56	QP
4		1.3340	24.28	10.00	34.28	46.00	-11.72	AVG
5		2.6660	34.81	10.06	44.87	56.00	-11.13	QP
6	*	2.6660	27.35	10.06	37.41	46.00	-8.59	AVG
7		5.0060	36.26	10.17	46.43	60.00	-13.57	QP
8		5.0060	23.68	10.17	33.85	50.00	-16.15	AVG
9		8.6740	27.14	10.30	37.44	60.00	-22.56	QP
10		8.6740	7.65	10.30	17.95	50.00	-32.05	AVG
11		12.0820	19.62	10.40	30.02	60.00	-29.98	QP
12		12.0820	4.48	10.40	14.88	50.00	-35.12	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

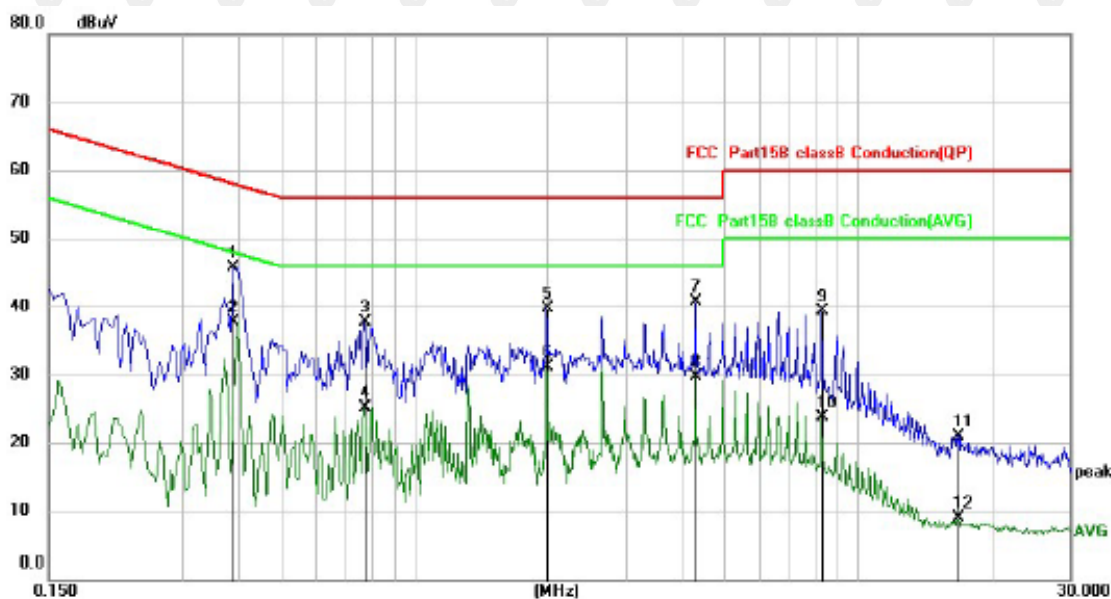

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3899	35.70	9.98	45.68	58.07	-12.39	QP
2	*	0.3899	27.73	9.98	37.71	48.07	-10.36	AVG
3		0.7740	27.82	9.98	37.80	56.00	-18.20	QP
4		0.7740	15.18	9.98	25.16	46.00	-20.84	AVG
5		1.9860	29.76	10.03	39.79	56.00	-16.21	QP
6		1.9860	21.04	10.03	31.07	46.00	-14.93	AVG
7		4.3060	30.66	10.14	40.80	56.00	-15.20	QP
8		4.3060	19.64	10.14	29.78	46.00	-16.22	AVG
9		8.2900	28.99	10.29	39.28	60.00	-20.72	QP
10		8.2900	13.40	10.29	23.69	50.00	-26.31	AVG
11		16.8060	10.48	10.50	20.98	60.00	-39.02	QP
12		16.8060	-1.59	10.50	8.91	50.00	-41.09	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

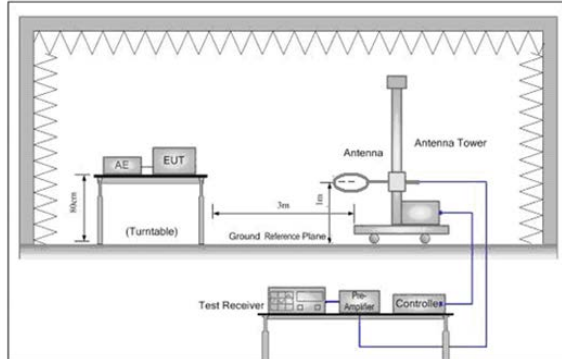


Figure 1. Below 30MHz

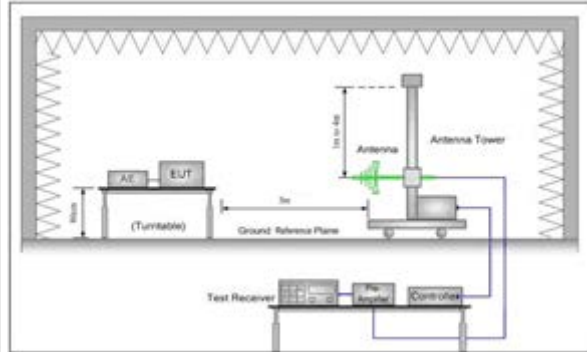


Figure 2. 30MHz to 1GHz

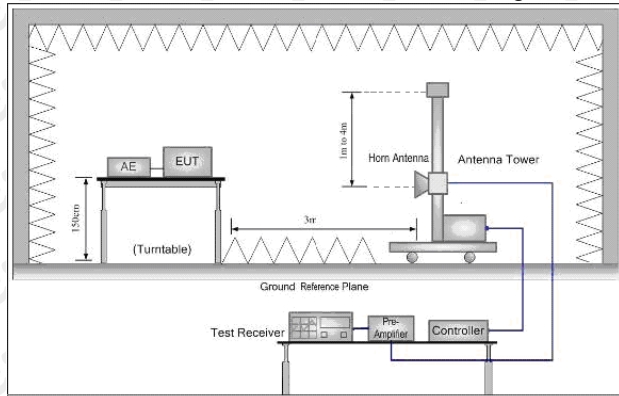


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

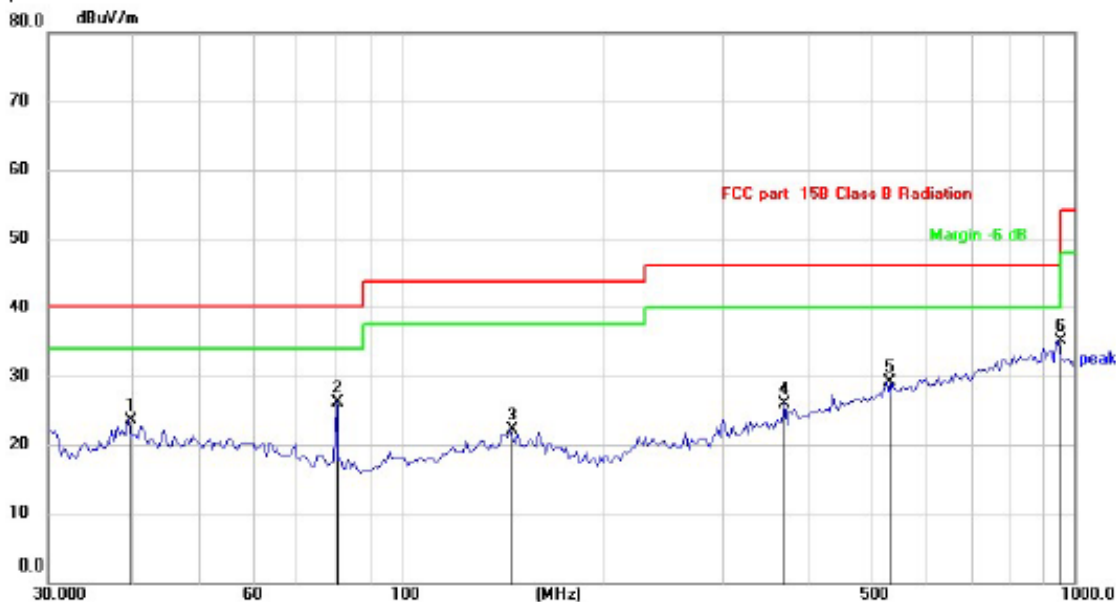

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	28.86	-5.42	23.44	40.00	-16.56	QP
2		80.0806	35.81	-9.76	26.05	40.00	-13.95	QP
3		145.3506	27.49	-5.47	22.02	43.50	-21.48	QP
4		371.3528	28.65	-2.69	25.96	46.00	-20.04	QP
5		527.3205	27.86	1.22	29.08	46.00	-16.92	QP
6	*	948.7610	29.12	5.91	35.03	46.00	-10.97	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

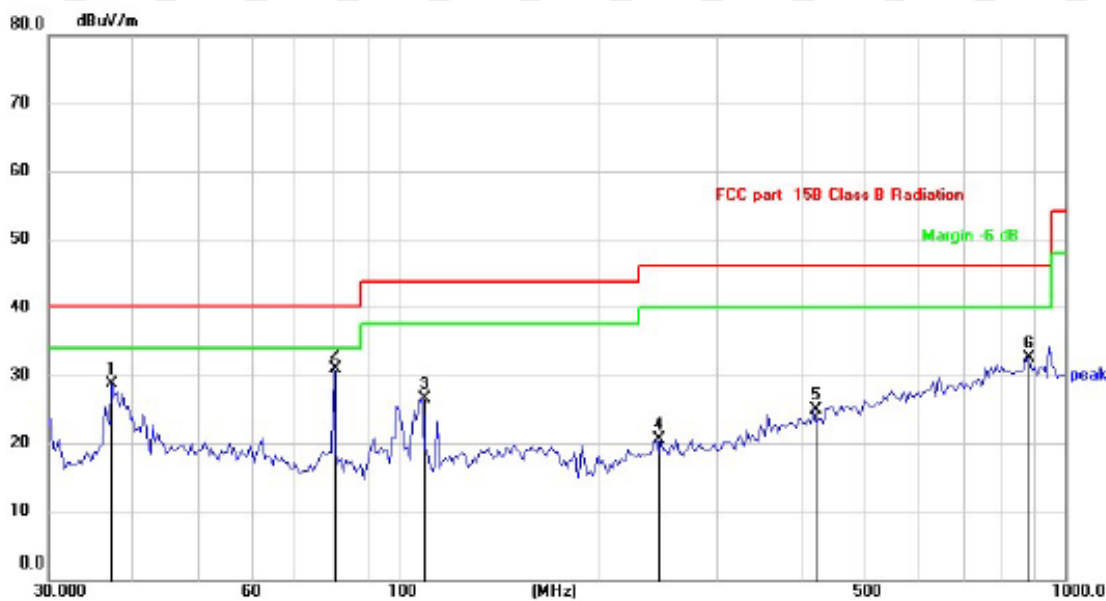

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.3509	34.61	-5.91	28.70	40.00	-11.30	QP
2	*	80.0806	40.58	-9.76	30.82	40.00	-9.18	QP
3		108.8377	34.58	-8.07	26.51	43.50	-16.99	QP
4		243.8043	26.21	-5.76	20.45	46.00	-25.55	QP
5		419.8436	26.13	-1.21	24.92	46.00	-21.08	QP
6		876.7829	26.39	6.17	32.56	46.00	-13.44	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	57.09	-3.65	53.44	74.00	-20.56	peak
4804	50.33	-3.65	46.68	54.00	-7.32	AVG
7206	59.44	-0.95	58.49	74.00	-15.51	peak
7206	42.41	-0.95	41.46	54.00	-12.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	58.44	-3.65	54.79	74.00	-19.21	peak
4804	48.75	-3.65	45.10	54.00	-8.90	AVG
7206	58.83	-0.95	57.88	74.00	-16.12	peak
7206	42.48	-0.95	41.53	54.00	-12.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	58.13	-3.54	54.59	74.00	-19.41	peak
4882.00	49.05	-3.54	45.51	54.00	-8.49	AVG
7323.00	57.17	-0.81	56.36	74.00	-17.64	peak
7323.00	43.99	-0.81	43.18	54.00	-10.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	58.35	-3.54	54.81	74.00	-19.19	peak
4882.00	49.23	-3.54	45.69	54.00	-8.31	AVG
7323.00	58.53	-0.81	57.72	74.00	-16.28	peak
7323.00	41.39	-0.81	40.58	54.00	-13.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.95	-3.43	55.52	74.00	-18.48	peak
4960	47.89	-3.44	44.45	54.00	-9.55	AVG
7440	60.30	-0.77	59.53	74.00	-14.47	peak
7440	40.55	-0.77	39.78	54.00	-14.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.40	-3.43	54.97	74.00	-19.03	peak
4960	49.21	-3.44	45.77	54.00	-8.23	AVG
7440	58.78	-0.77	58.01	74.00	-15.99	peak
7440	42.25	-0.77	41.48	54.00	-12.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.92	-5.81	52.11	74.00	-21.89	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.98	-5.84	49.14	74.00	-24.86	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.00	-5.81	50.19	74.00	-23.81	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.01	-5.84	50.17	74.00	-23.83	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.68	-5.81	49.87	74.00	-24.13	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.84	-6.06	48.78	74.00	-25.22	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.42	-5.81	50.61	74.00	-23.39	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.94	-6.06	47.88	74.00	-26.12	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.86	-5.81	51.05	74.00	-22.95	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.94	-5.84	49.10	74.00	-24.90	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.46	-5.81	50.65	74.00	-23.35	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.68	-5.84	49.84	74.00	-24.16	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.42	-5.81	50.61	74.00	-23.39	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.54	-6.06	50.48	74.00	-23.52	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.16	-5.81	50.35	74.00	-23.65	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.45	-6.06	48.39	74.00	-25.61	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

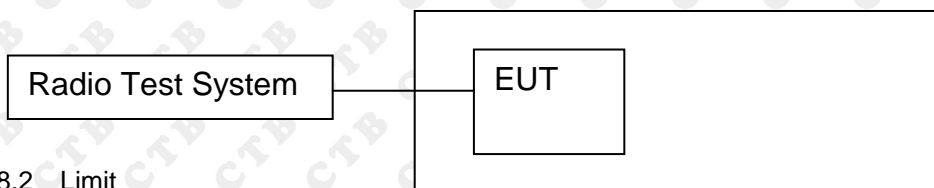

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:




RBW = 100KHz, VBW = 300KHz, Sweep = auto




Detector function = peak, Trace = max hold

8.4 Test Result

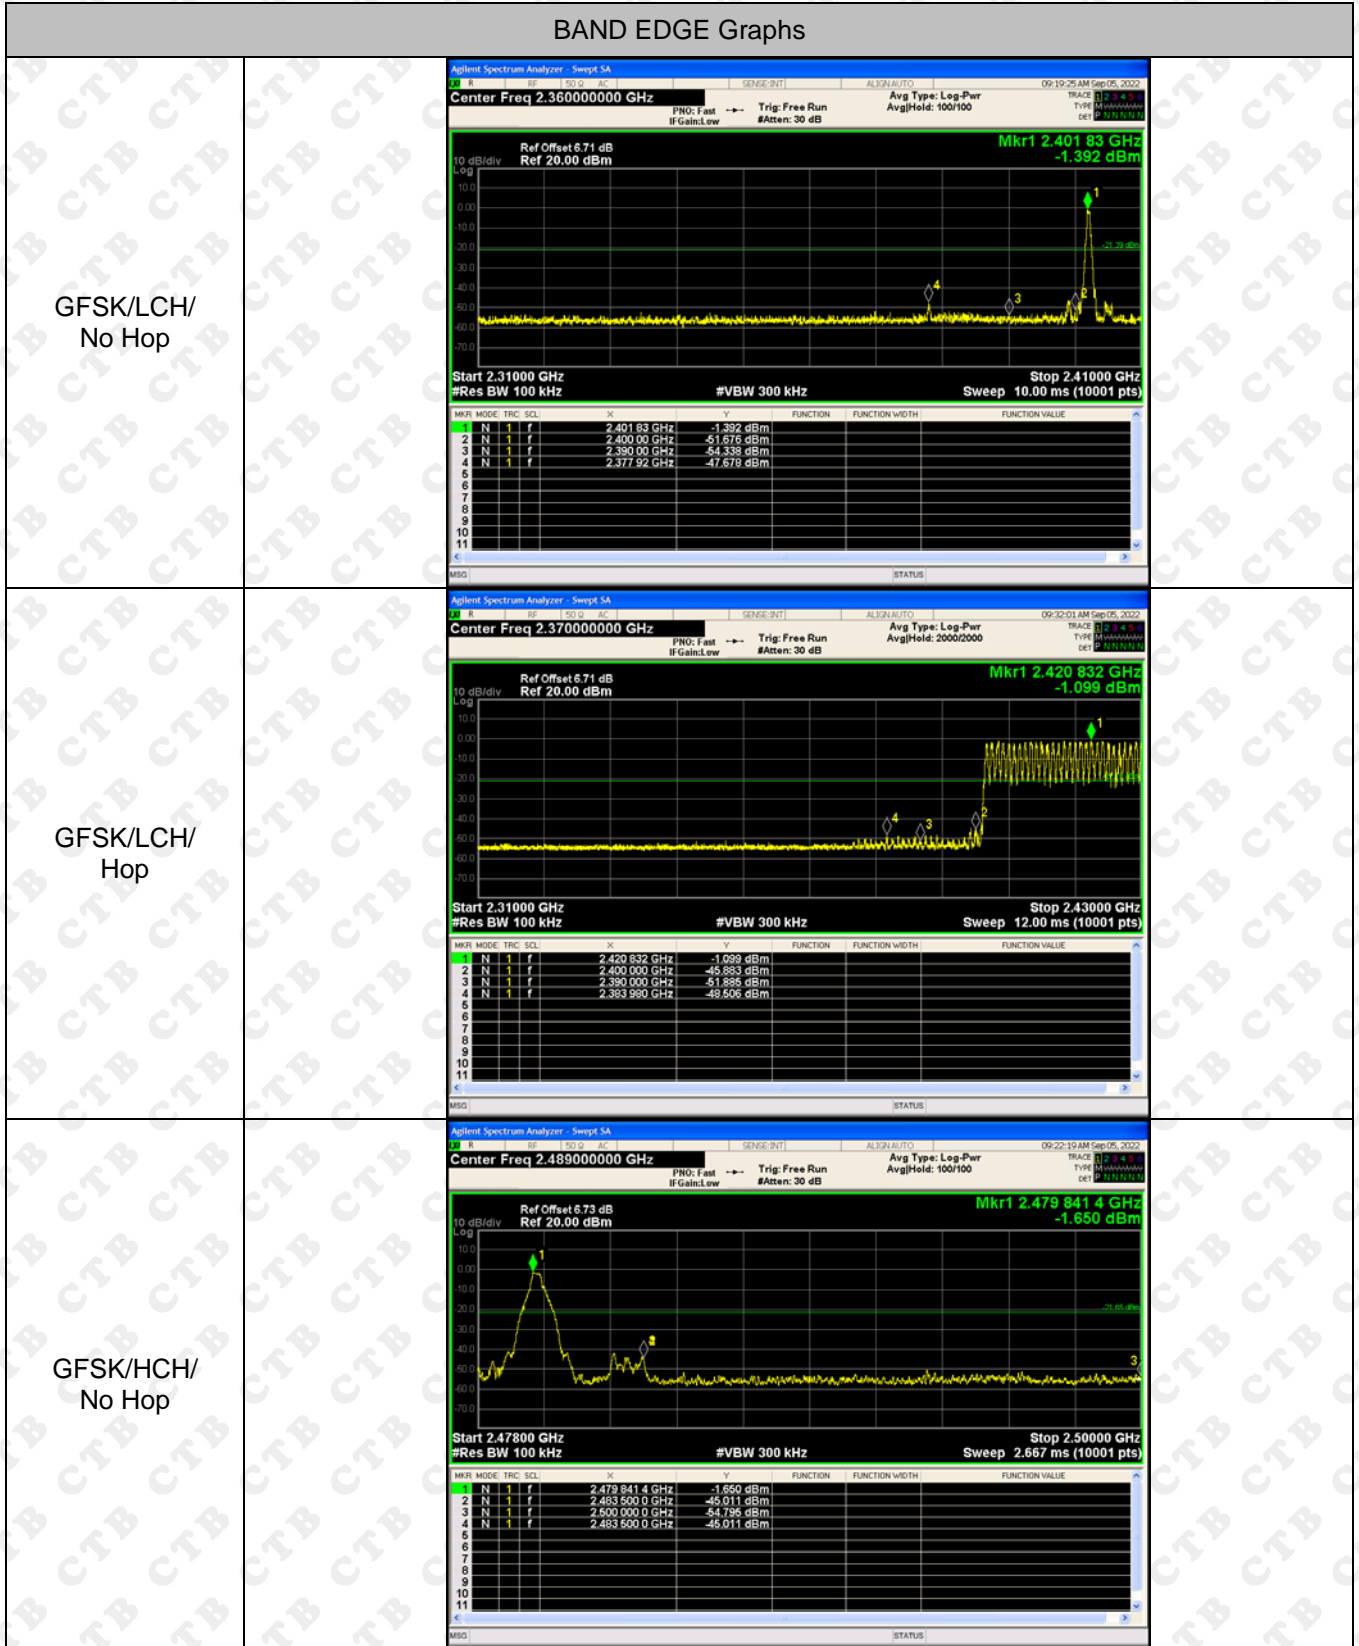

<p>GFSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.476 831 25 GHz</td> <td></td> <td></td> <td>-1.253 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td></td> <td></td> <td>-44.679 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td></td> <td></td> <td>-51.039 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td></td> <td></td> <td>-44.679 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 831 25 GHz			-1.253 dBm	2	N	1	f	2.483 500 00 GHz			-44.679 dBm	3	N	1	f	2.500 000 00 GHz			-51.039 dBm	4	N	1	f	2.483 500 00 GHz			-44.679 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.476 831 25 GHz			-1.253 dBm																																		
2	N	1	f	2.483 500 00 GHz			-44.679 dBm																																		
3	N	1	f	2.500 000 00 GHz			-51.039 dBm																																		
4	N	1	f	2.483 500 00 GHz			-44.679 dBm																																		
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 83 GHz</td> <td></td> <td></td> <td>-1.570 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-54.410 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td></td> <td></td> <td>-54.482 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.377 80 GHz</td> <td></td> <td></td> <td>-47.736 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 83 GHz			-1.570 dBm	2	N	1	f	2.400 00 GHz			-54.410 dBm	3	N	1	f	2.390 00 GHz			-54.482 dBm	4	N	1	f	2.377 80 GHz			-47.736 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.401 83 GHz			-1.570 dBm																																		
2	N	1	f	2.400 00 GHz			-54.410 dBm																																		
3	N	1	f	2.390 00 GHz			-54.482 dBm																																		
4	N	1	f	2.377 80 GHz			-47.736 dBm																																		
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.423 832 GHz</td> <td></td> <td></td> <td>-1.342 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td></td> <td></td> <td>-48.562 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td></td> <td></td> <td>-53.466 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.379 900 GHz</td> <td></td> <td></td> <td>-49.690 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.423 832 GHz			-1.342 dBm	2	N	1	f	2.400 000 GHz			-48.562 dBm	3	N	1	f	2.390 000 GHz			-53.466 dBm	4	N	1	f	2.379 900 GHz			-49.690 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.423 832 GHz			-1.342 dBm																																		
2	N	1	f	2.400 000 GHz			-48.562 dBm																																		
3	N	1	f	2.390 000 GHz			-53.466 dBm																																		
4	N	1	f	2.379 900 GHz			-49.690 dBm																																		
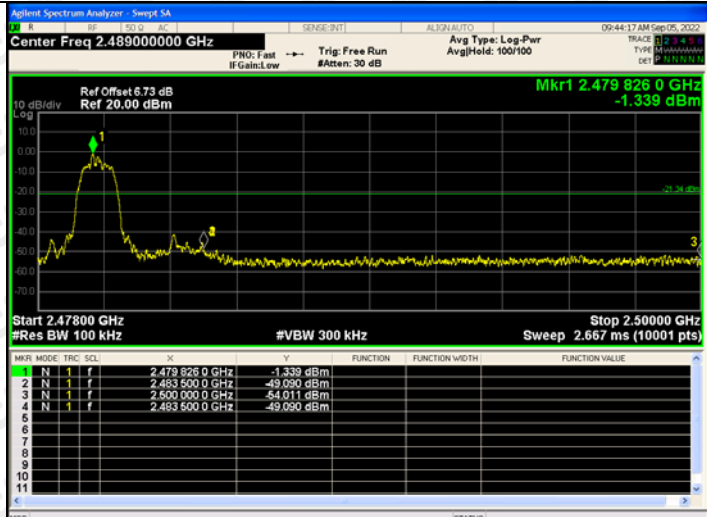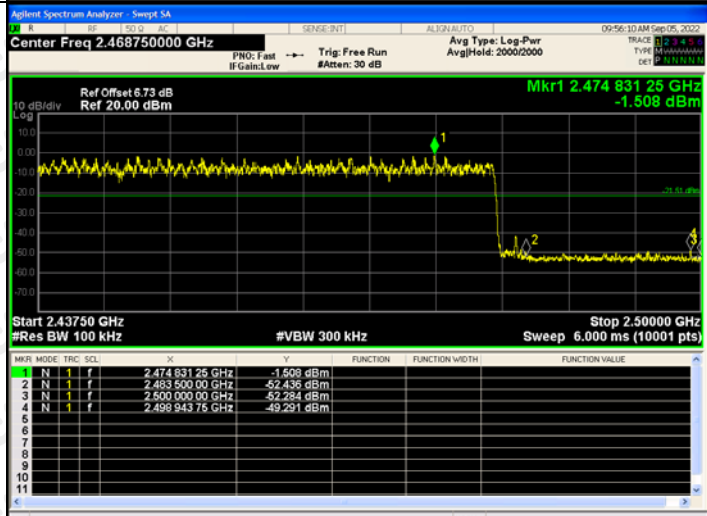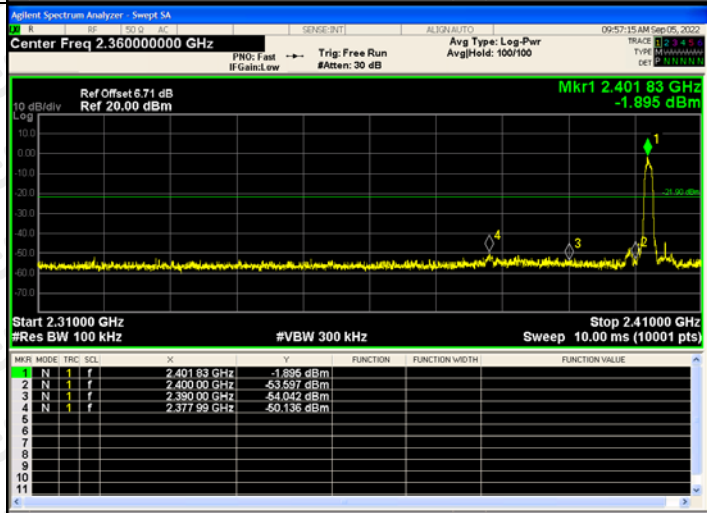
<p>$\pi/4$DQPSK/HCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.479 826 0 GHz -1.339 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 826 0 GHz</td> <td></td> <td></td> <td>-1.339 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td></td> <td></td> <td>-49.090 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td></td> <td></td> <td>-54.011 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 500 0 GHz</td> <td></td> <td></td> <td>-49.090 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 826 0 GHz			-1.339 dBm	2	N	1	f	2.483 500 0 GHz			-49.090 dBm	3	N	1	f	2.500 000 0 GHz			-54.011 dBm	4	N	1	f	2.493 500 0 GHz			-49.090 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.479 826 0 GHz			-1.339 dBm																																		
2	N	1	f	2.483 500 0 GHz			-49.090 dBm																																		
3	N	1	f	2.500 000 0 GHz			-54.011 dBm																																		
4	N	1	f	2.493 500 0 GHz			-49.090 dBm																																		
<p>$\pi/4$DQPSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.474 831 25 GHz -1.508 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.474 831 25 GHz</td> <td></td> <td></td> <td>-1.508 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td></td> <td></td> <td>-52.436 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td></td> <td></td> <td>-52.284 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 943 75 GHz</td> <td></td> <td></td> <td>-49.291 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.474 831 25 GHz			-1.508 dBm	2	N	1	f	2.483 500 00 GHz			-52.436 dBm	3	N	1	f	2.500 000 00 GHz			-52.284 dBm	4	N	1	f	2.499 943 75 GHz			-49.291 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.474 831 25 GHz			-1.508 dBm																																		
2	N	1	f	2.483 500 00 GHz			-52.436 dBm																																		
3	N	1	f	2.500 000 00 GHz			-52.284 dBm																																		
4	N	1	f	2.499 943 75 GHz			-49.291 dBm																																		
<p>8DPSK/LCH/No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.401 83 GHz -1.895 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 83 GHz</td> <td></td> <td></td> <td>-1.895 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-53.597 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td></td> <td></td> <td>-54.042 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.377 99 GHz</td> <td></td> <td></td> <td>-50.136 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 83 GHz			-1.895 dBm	2	N	1	f	2.400 00 GHz			-53.597 dBm	3	N	1	f	2.390 00 GHz			-54.042 dBm	4	N	1	f	2.377 99 GHz			-50.136 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.401 83 GHz			-1.895 dBm																																		
2	N	1	f	2.400 00 GHz			-53.597 dBm																																		
3	N	1	f	2.390 00 GHz			-54.042 dBm																																		
4	N	1	f	2.377 99 GHz			-50.136 dBm																																		
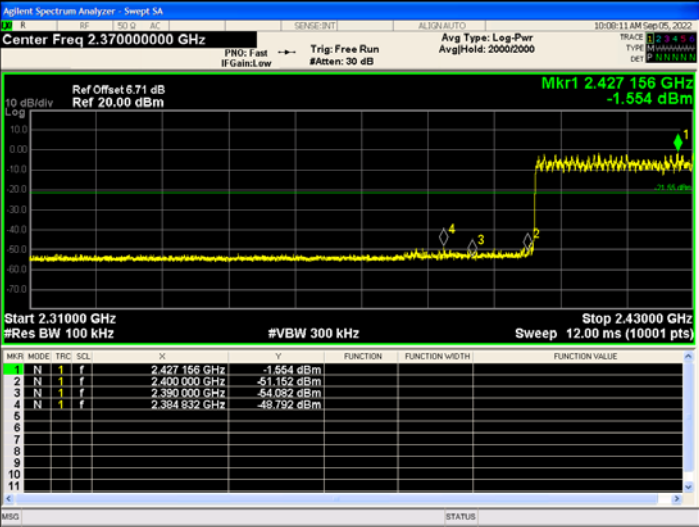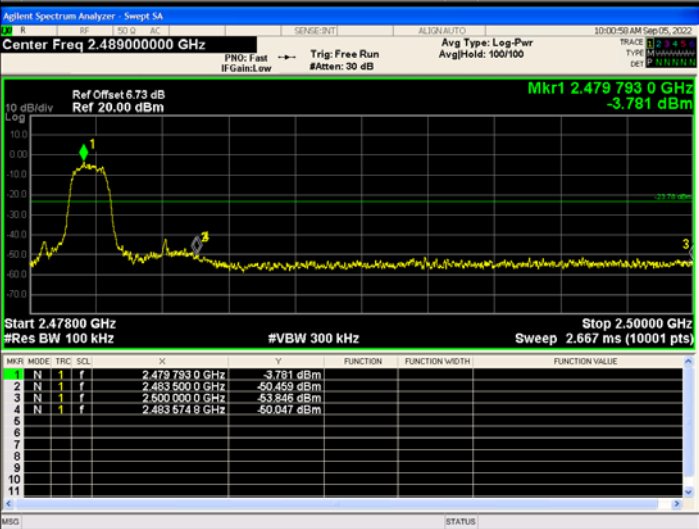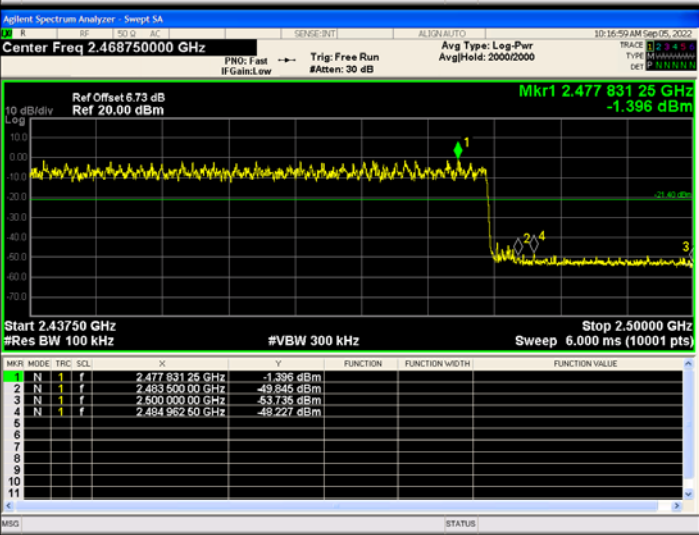
<p>8DPSK /LCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.37000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.427156 GHz -1.554 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.427156 GHz</td> <td></td> <td></td> <td>-1.554 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-51.152 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380000 GHz</td> <td></td> <td></td> <td>-54.082 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.354632 GHz</td> <td></td> <td></td> <td>-49.132 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427156 GHz			-1.554 dBm	2	N	1	f	2.400000 GHz			-51.152 dBm	3	N	1	f	2.380000 GHz			-54.082 dBm	4	N	1	f	2.354632 GHz			-49.132 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.427156 GHz			-1.554 dBm																																		
2	N	1	f	2.400000 GHz			-51.152 dBm																																		
3	N	1	f	2.380000 GHz			-54.082 dBm																																		
4	N	1	f	2.354632 GHz			-49.132 dBm																																		
<p>8DPSK /HCH/No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.479793 GHz -3.781 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479793 GHz</td> <td></td> <td></td> <td>-3.781 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-50.459 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td></td> <td></td> <td>-53.846 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493574 GHz</td> <td></td> <td></td> <td>-50.047 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479793 GHz			-3.781 dBm	2	N	1	f	2.483500 GHz			-50.459 dBm	3	N	1	f	2.500000 GHz			-53.846 dBm	4	N	1	f	2.493574 GHz			-50.047 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.479793 GHz			-3.781 dBm																																		
2	N	1	f	2.483500 GHz			-50.459 dBm																																		
3	N	1	f	2.500000 GHz			-53.846 dBm																																		
4	N	1	f	2.493574 GHz			-50.047 dBm																																		
<p>8DPSK /HCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46875000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.477831 GHz -1.396 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.477831 GHz</td> <td></td> <td></td> <td>-1.396 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-49.845 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td></td> <td></td> <td>-53.735 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484952 GHz</td> <td></td> <td></td> <td>-49.227 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477831 GHz			-1.396 dBm	2	N	1	f	2.483500 GHz			-49.845 dBm	3	N	1	f	2.500000 GHz			-53.735 dBm	4	N	1	f	2.484952 GHz			-49.227 dBm
MKR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.477831 GHz			-1.396 dBm																																		
2	N	1	f	2.483500 GHz			-49.845 dBm																																		
3	N	1	f	2.500000 GHz			-53.735 dBm																																		
4	N	1	f	2.484952 GHz			-49.227 dBm																																		