



RF Test Report

For

Applicant Name: Xwireless LLC
Address: 11565 Old Georgetown Road, Rockville, MD, USA
EUT Name: Mobile Phone
Brand Name: N/A
Model Number: HD60

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF230512R00204
Test Standards: 47 CFR Part 15E

Test Conclusion: Pass
FCC ID: 2ADLJ-HD60
Test Date: 2023-05-12 to 2023-05-26
Date of Issue: 2023-05-26

Prepared By:

Elma.Yang


Date:

Elma.Yang/ Project Engineer
2023-05-25

Approved By:

Ryan.CJ

Ryan.CJ / EMC Manager
2023-05-26



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-05-26	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1	INTRODUCTION	5
1.1	Identification of Testing Laboratory	5
1.2	Identification of the Responsible Testing Location.....	5
1.3	Announcement	5
2	PRODUCT INFORMATION	6
2.1	Application Information.....	6
2.2	Manufacturer Information.....	6
2.3	Factory Information	6
2.4	General Description of Equipment under Test (EUT).....	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards.....	7
3.2	Uncertainty of Test.....	7
3.3	Summary of Test Result	7
4	TEST CONFIGURATION	8
4.1	Test Equipment List	8
4.2	Test Auxiliary Equipment	14
4.3	Test Modes.....	14
5	EVALUATION RESULTS (EVALUATION)	15
5.1	Antenna requirement	15
5.1.1	Conclusion:.....	15
6	RADIO SPECTRUM MATTER TEST RESULTS (RF)	16
6.1	Conducted Emission at AC power line	16
6.1.1	E.U.T. Operation:.....	16
6.1.2	Test Setup Diagram:.....	16
6.1.3	Test Data:	17
6.2	Duty Cycle	19
6.2.1	E.U.T. Operation:.....	19
6.2.2	Test Data:	19
6.3	Maximum conducted output power	20
6.3.1	E.U.T. Operation:.....	21
6.3.2	Test Data:	21
6.4	Power spectral density	22
6.4.1	E.U.T. Operation:.....	23
6.4.2	Test Data:	23
6.5	Emission bandwidth and occupied bandwidth	24
6.5.1	E.U.T. Operation:.....	25
6.5.2	Test Data:	25
6.6	Band edge emissions (Radiated)	26
6.6.1	E.U.T. Operation:.....	27
6.6.2	Test Setup Diagram:.....	28
6.6.3	Test Data:	29
6.7	Undesirable emission limits (below 1GHz)	32
6.7.1	E.U.T. Operation:.....	33
6.7.2	Test Setup Diagram:.....	34
6.7.3	Test Data:	35
6.8	Undesirable emission limits (above 1GHz)	37



6.8.1	E.U.T. Operation:.....	38
6.8.2	Test Data:	39
7	TEST SETUP PHOTOS	44
8	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	46
	APPENDIX	47

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Xwireless LLC
Address:	11565 Old Georgetown Road, Rockville, MD, USA

2.2 Manufacturer Information

Company Name:	Xwireless LLC
Address:	11565 Old Georgetown Road, Rockville, MD, USA

2.3 Factory Information

Company Name:	ZTECH COMMUNICATION(SZ) CO LTD
Address:	FL 7 BLOCK D BAO'AN ZHIGU INNOVATION PARK YIN'TIAN ROAD NO.4 XI'XIANG STR' BAO'AN DISTRICT SZ CHINA

2.4 General Description of Equipment under Test (EUT)

EUT Name:	Mobile Phone
Test Model Number:	HD60

2.5 Technical Information

Power Supply:	DC 3.85V from Battery
Operation Frequency:	802.11a/n(HT20) : U-NII Band 1: 5180MHz to 5240MHz; U-NII Band 2A: 5260MHz to 5320MHz; U-NII Band 3: 5745MHz to 5825MHz; 802.11n(HT40) : U-NII Band 1: 5190MHz to 5230MHz; U-NII Band 2A: 5270MHz to 5310MHz; U-NII Band 3: 5755MHz to 5795MHz;
Number of Channels:	802.11a/n(HT20): U-NII Band 1: 4; U-NII Band 2A: 4; U-NII Band 3: 5; 802.11n(HT40): U-NII Band 1: 2; U-NII Band 2A: 2; U-NII Band 3: 2;
Modulation Type:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM);
Antenna Type:	PIFA Antenna
Antenna Gain:	2.41 dBi

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15E: Unlicensed National Information Infrastructure Devices

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	±2.64dB
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15E	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15E	47 CFR Part 15.207(a)	Pass
Maximum conducted output power	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
Power spectral density	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
Emission bandwidth and occupied bandwidth	47 CFR Part 15E	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. 47 CFR Part 15.407(e)	Pass
Channel Availability Check Time	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(ii)	Pass
U-NII Detection Bandwidth	47 CFR Part 15E	47 CFR Part 15.407(h)(2)	Pass
Statistical Performance Check	47 CFR Part 15E	KDB 935210 D02, Clause 5.1 Table 2	Pass
Channel Move Time, Channel Closing Transmission Time	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(iii)	Pass
Non-Occupancy Period Test	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(iv)	Pass
DFS Detection Thresholds	47 CFR Part 15E	KDB 905462 D02, Clause 5.2 Table 3	Pass
Band edge emissions (Radiated)	47 CFR Part 15E	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass
Undesirable emission limits (below 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(9)	Pass
Undesirable emission limits (above 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Duty Cycle					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Power spectral density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emission bandwidth and occupied bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Channel Availability Check Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23

MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23
---------------------	----------	--------	------------	------------	------------

U-NII Detection Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Statistical Performance Check					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Channel Move Time, Channel Closing Transmission Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23

WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Non-Occupancy Period Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

DFS Detection Thresholds					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23

RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamp	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Undesirable emission limits (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamp	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamp	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Undesirable emission limits (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCi7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

4.2 Test Auxiliary Equipment

The EUT was tested as an independent device.

4.3 Test Modes

No.	Test Modes	Description
TM1	802.11a mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.
TM2	802.11n mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM5	Normal Operating	Keep the EUT works in normal operating mode and connect to companion device

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

5.1.1 Conclusion:



6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	47 CFR Part 15.207(a)		
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Setup Diagram:

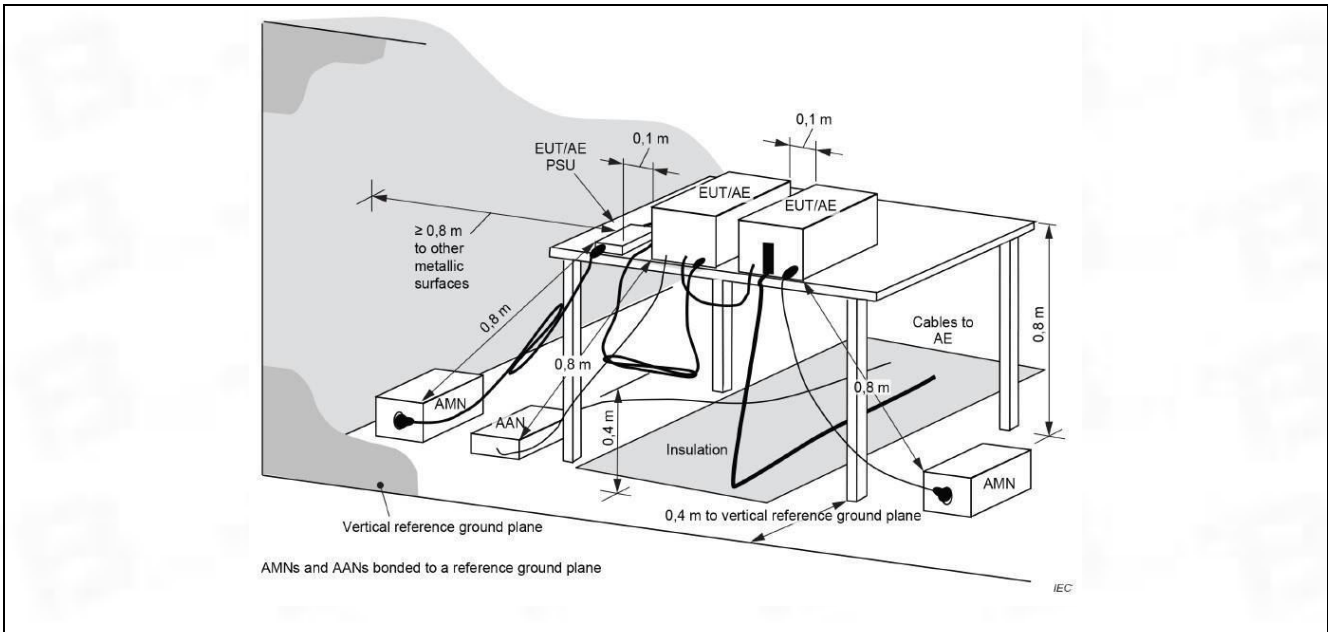


6.1.3 Test Data:

TM1 / Line: Line / Band: U-NII 1 / BW: 20 / CH: L

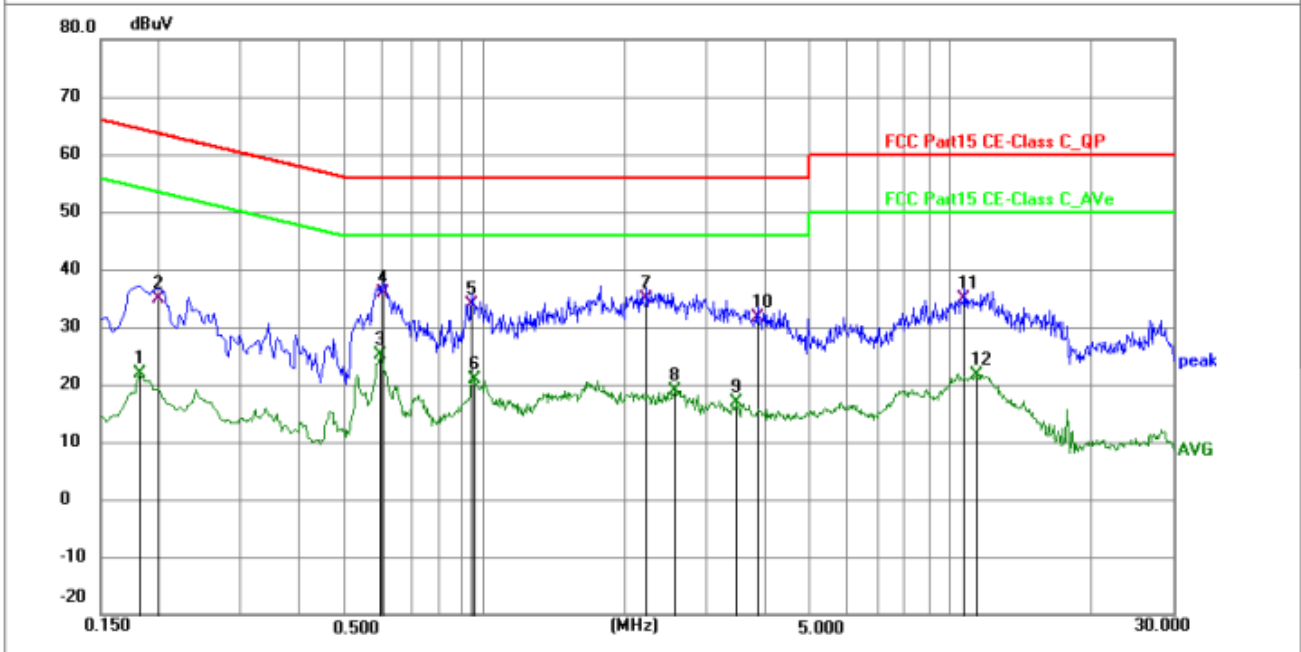

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1814	11.41	10.57	21.98	54.42	-32.44	AVG	P	
2	0.1995	24.17	10.59	34.76	63.63	-28.87	QP	P	
3	0.5955	14.47	10.67	25.14	46.00	-20.86	AVG	P	
4 *	0.6045	25.12	10.67	35.79	56.00	-20.21	QP	P	
5	0.9420	23.02	10.77	33.79	56.00	-22.21	QP	P	
6	0.9510	10.06	10.77	20.83	46.00	-25.17	AVG	P	
7	2.2334	24.08	10.69	34.77	56.00	-21.23	QP	P	
8	2.5665	8.17	10.70	18.87	46.00	-27.13	AVG	P	
9	3.4620	6.17	10.72	16.89	46.00	-29.11	AVG	P	
10	3.8490	20.85	10.73	31.58	56.00	-24.42	QP	P	
11	10.7025	23.94	10.94	34.88	60.00	-25.12	QP	P	
12	11.4360	10.76	10.94	21.70	50.00	-28.30	AVG	P	

TM1 / Line: Neutral / Band: U-NII 1 / BW: 20 / CH: L

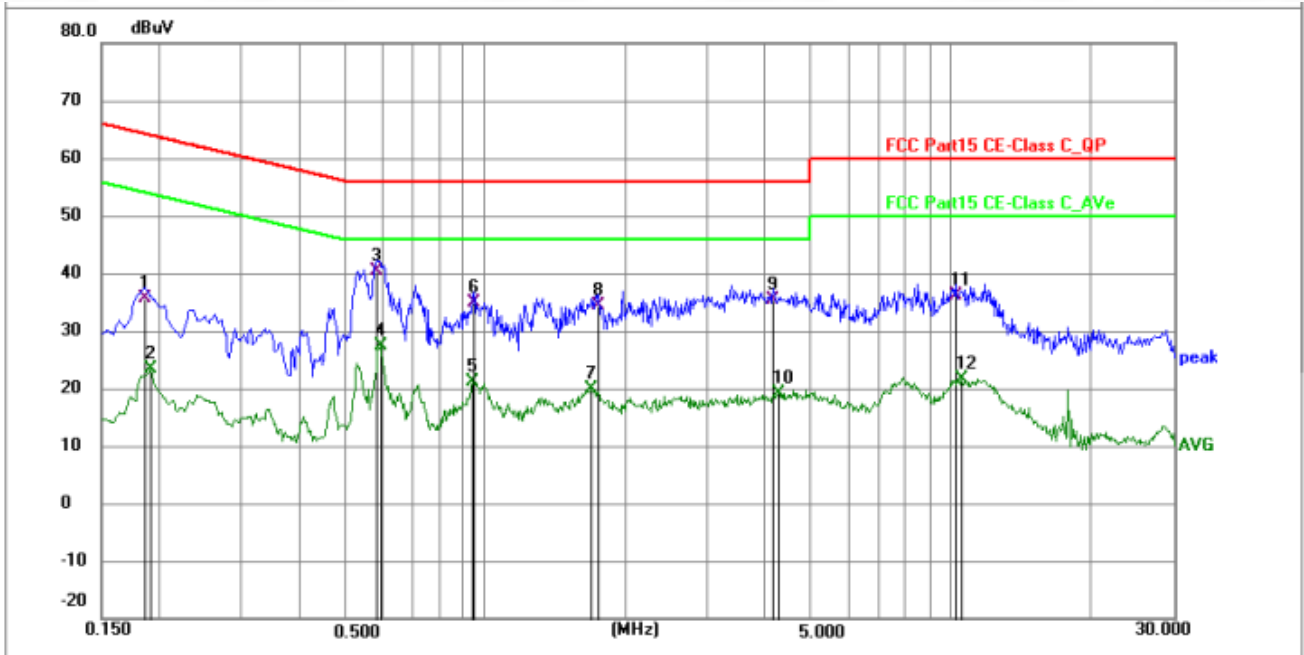

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	25.06	10.57	35.63	64.21	-28.58	QP	P	
2	0.1905	12.69	10.58	23.27	54.01	-30.74	AVG	P	
3 *	0.5820	29.76	10.66	40.42	56.00	-15.58	QP	P	
4	0.5955	16.59	10.67	27.26	46.00	-18.74	AVG	P	
5	0.9420	10.44	10.77	21.21	46.00	-24.79	AVG	P	
6	0.9465	24.03	10.77	34.80	56.00	-21.20	QP	P	
7	1.6980	9.16	10.72	19.88	46.00	-26.12	AVG	P	
8	1.7475	23.74	10.71	34.45	56.00	-21.55	QP	P	
9	4.1505	24.56	10.74	35.30	56.00	-20.70	QP	P	
10	4.2584	8.47	10.75	19.22	46.00	-26.78	AVG	P	
11	10.2255	25.30	10.94	36.24	60.00	-23.76	QP	P	
12	10.5135	10.57	10.94	21.51	50.00	-28.49	AVG	P	

6.2 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Method:	ANSI C63.10-2013 section 12.2 (b)
Test Limit:	No limits, only for report use.
Procedure:	<ul style="list-style-type: none"> i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW \geq RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Data:

Please Refer to Appendix for Details.

6.3 Maximum conducted output power

<p>Test Requirement:</p>	<p>47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)</p>
<p>Test Method:</p>	<p>ANSI C63.10-2013, section 12.3</p>
<p>Test Limit:</p>	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

	<p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
<p>Procedure:</p>	<p>Method SA-1 a) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal. b) Set RBW = 1 MHz. c) Set VBW >= 3 MHz. d) Number of points in sweep >= [2 x span / RBW]. (This gives bin-to-bin spacing <= RBW / 2, so that narrowband signals are not lost between frequency bins.) e) Sweep time = auto. f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. g) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle >= 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run." h) Trace average at least 100 traces in power averaging (rms) mode. i) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.</p>

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.3.2 Test Data:

Please Refer to Appendix for Details.

6.4 Power spectral density

<p>Test Requirement:</p>	<p>47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)</p>
<p>Test Method:</p>	<p>ANSI C63.10-2013, section 12.5</p>
<p>Test Limit:</p>	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter</p>

	<p>conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
<p>Procedure:</p>	<p>a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.) b) Use the peak search function on the instrument to find the peak of the spectrum. c) Make the following adjustments to the peak value of the spectrum, if applicable: 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum. 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. d) The result is the PPSD. e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply: 1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a). 2) Set $VBW \geq [3 \times RBW]$. 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.</p>

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Data:

Please Refer to Appendix for Details.

6.5 Emission bandwidth and occupied bandwidth

Test Requirement:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Method:	ANSI C63.10-2013, section 6.9.3 & 12.4 KDB 789033 D02, Clause C.2
Test Limit:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Procedure:	<p>Emission bandwidth:</p> <ul style="list-style-type: none"> a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. <p>Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</p> <p>Occupied bandwidth:</p> <ul style="list-style-type: none"> a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99%

	<p>power bandwidth is the difference between these two frequencies.</p> <p>h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p> <p>6 dB emission bandwidth:</p> <p>a) Set RBW = 100 kHz.</p> <p>b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.</p> <p>c) Detector = Peak.</p> <p>d) Trace mode = max hold.</p> <p>e) Sweep = auto couple.</p> <p>f) Allow the trace to stabilize.</p> <p>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>
--	--

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.5.2 Test Data:

Please Refer to Appendix for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)																																																																																				
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6																																																																																				
Test Limit:	<p>For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>MHz</th> <th>MHz</th> <th>GHz</th> </tr> </thead> <tbody> <tr> <td>0.090-0.110</td> <td>16.42-16.423</td> <td>399.9-410</td> <td>4.5-5.15</td> </tr> <tr> <td>¹0.495-0.505</td> <td>16.69475-16.69525</td> <td>608-614</td> <td>5.35-5.46</td> </tr> <tr> <td>2.1735-2.1905</td> <td>16.80425-16.80475</td> <td>960-1240</td> <td>7.25-7.75</td> </tr> <tr> <td>4.125-4.128</td> <td>25.5-25.67</td> <td>1300-1427</td> <td>8.025-8.5</td> </tr> <tr> <td>4.17725-4.17775</td> <td>37.5-38.25</td> <td>1435-1626.5</td> <td>9.0-9.2</td> </tr> <tr> <td>4.20725-4.20775</td> <td>73-74.6</td> <td>1645.5-1646.</td> <td>9.3-9.5</td> </tr> <tr> <td></td> <td></td> <td>5</td> <td></td> </tr> <tr> <td>6.215-6.218</td> <td>74.8-75.2</td> <td>1660-1710</td> <td>10.6-12.7</td> </tr> <tr> <td>6.26775-6.26825</td> <td>108-121.94</td> <td>1718.8-1722.</td> <td>13.25-13.4</td> </tr> <tr> <td></td> <td></td> <td>2</td> <td></td> </tr> <tr> <td>6.31175-6.31225</td> <td>123-138</td> <td>2200-2300</td> <td>14.47-14.5</td> </tr> <tr> <td>8.291-8.294</td> <td>149.9-150.05</td> <td>2310-2390</td> <td>15.35-16.2</td> </tr> <tr> <td>8.362-8.366</td> <td>156.52475-156.525</td> <td>2483.5-2500</td> <td>17.7-21.4</td> </tr> <tr> <td></td> <td>25</td> <td></td> <td></td> </tr> <tr> <td>8.37625-8.38675</td> <td>156.7-156.9</td> <td>2690-2900</td> <td>22.01-23.12</td> </tr> <tr> <td>8.41425-8.41475</td> <td>162.0125-167.17</td> <td>3260-3267</td> <td>23.6-24.0</td> </tr> <tr> <td>12.29-12.293</td> <td>167.72-173.2</td> <td>3332-3339</td> <td>31.2-31.8</td> </tr> <tr> <td>12.51975-12.52025</td> <td>240-285</td> <td>3345.8-3358</td> <td>36.43-36.5</td> </tr> <tr> <td>12.57675-12.57725</td> <td>322-335.4</td> <td>3600-4400</td> <td>(²)</td> </tr> <tr> <td>13.36-13.41</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.</p> <p>²Above 38.6</p> <p>The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional</p>	MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.	9.3-9.5			5		6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.	13.25-13.4			2		6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.525	2483.5-2500	17.7-21.4		25			8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	(²)	13.36-13.41			
MHz	MHz	MHz	GHz																																																																																		
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																																		
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																																		
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																																		
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																																		
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																																		
4.20725-4.20775	73-74.6	1645.5-1646.	9.3-9.5																																																																																		
		5																																																																																			
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																																		
6.26775-6.26825	108-121.94	1718.8-1722.	13.25-13.4																																																																																		
		2																																																																																			
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																																		
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																																		
8.362-8.366	156.52475-156.525	2483.5-2500	17.7-21.4																																																																																		
	25																																																																																				
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																																		
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																																		
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																																		
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																																		
12.57675-12.57725	322-335.4	3600-4400	(²)																																																																																		
13.36-13.41																																																																																					


	radiator shall not exceed the field strength levels specified in the following table:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
Procedure:	Above 1GHz:		
	a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.		
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.		
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.		
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.		
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.		
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.		
	g. Test the EUT in the lowest channel, the middle channel, the Highest channel.		
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.		
	i. Repeat above procedures until all frequencies measured was complete.		
	Remark:		
	1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor		
	2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.		
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.			
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.			

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %

Atmospheric Pressure:	1010 mbar
-----------------------	-----------

6.6.2 Test Setup Diagram:

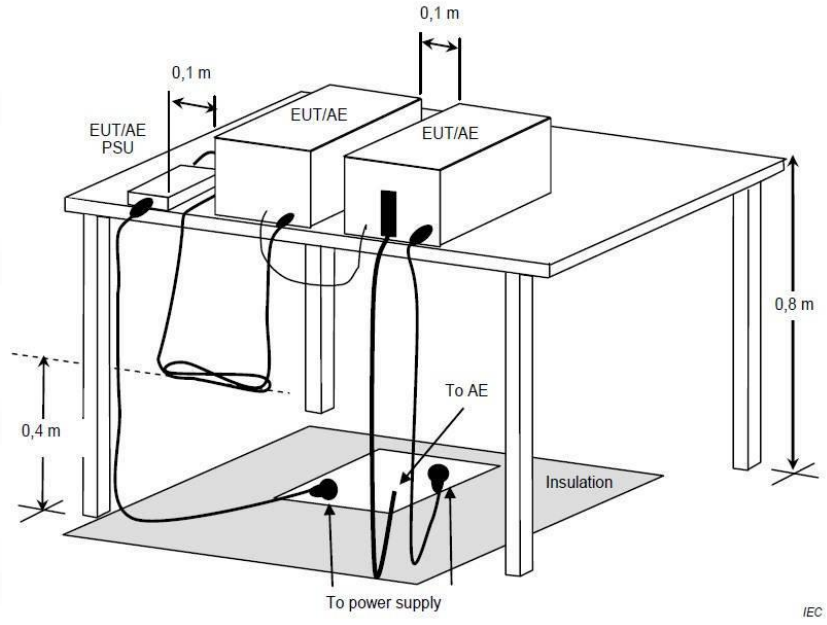

6.6.3 Test Data:

UNII-1 & 2A_20M_5180MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5134.530	84.99	-31.96	53.03	74.00	-20.97	peak	P
2	5150.000	85.59	-31.92	53.67	74.00	-20.33	peak	P

UNII-1 & 2A_20M_5180MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5136.460	82.17	-31.76	50.41	74.00	-23.59	peak	P
2	5150.000	82.77	-31.72	51.05	74.00	-22.95	peak	P

UNII-1 & 2A_20M_5320MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	85.76	-32.06	53.70	74.00	-20.30	peak	P
2	5460.000	85.13	-32.02	53.11	74.00	-20.89	peak	P

UNII-1 & 2A_20M_5320MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	83.89	-30.86	53.03	74.00	-20.97	peak	P
2	5460.000	84.26	-31.82	52.44	74.00	-21.56	peak	P

UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	86.57	-31.96	54.61	74.00	-19.39	peak	P
2	5700.000	93.51	-32.07	61.44	74.00	-12.56	peak	P
3	5720.000	94.41	-32.13	62.28	74.00	-11.72	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	87.57	-31.58	55.99	74.00	-18.01	peak	P
2	5700.000	94.51	-31.69	62.82	74.00	-11.18	peak	P
3	5720.000	95.41	-31.75	63.66	74.00	-10.34	peak	P

UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	87.57	-30.76	56.81	74.00	-17.19	peak	P
2	5875.000	94.51	-30.87	63.64	74.00	-10.36	peak	P
3	5925.000	95.41	-30.93	64.48	74.00	-9.52	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	88.57	-30.88	57.69	74.00	-16.31	peak	P
2	5875.000	95.51	-30.99	64.52	74.00	-9.48	peak	P
3	5925.000	96.41	-31.05	65.36	74.00	-8.64	peak	P

UNII-1 & 2A_40M_5190MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5132.848	82.97	-31.87	51.10	74.00	-22.90	peak	P
2	5150.000	83.57	-31.83	51.74	74.00	-22.26	peak	P

UNII-1 & 2A_40M_5190MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5131.890	83.04	-32.17	50.87	74.00	-23.13	peak	P
2	5150.000	83.64	-32.13	51.51	74.00	-22.49	peak	P

UNII-1 & 2A_40M_5310MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	85.46	-32.14	53.32	74.00	-20.68	peak	P
2	5460.000	84.83	-32.10	52.73	74.00	-21.27	peak	P

UNII-1 & 2A_40M_5310MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	83.46	-32.08	51.38	74.00	-22.62	peak	P
2	5460.000	85.83	-32.04	53.79	74.00	-20.21	peak	P

UNII-3_40M_5755MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	86.57	-31.88	54.69	74.00	-19.31	peak	P
2	5700.000	93.51	-31.99	61.52	74.00	-12.48	peak	P
3	5720.000	94.41	-32.05	62.36	74.00	-11.64	peak	P

UNII-3_40M_5755MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	87.50	-31.95	55.55	74.00	-18.45	peak	P
2	5700.000	94.44	-32.06	62.38	74.00	-11.62	peak	P
3	5720.000	95.34	-32.12	63.22	74.00	-10.78	peak	P

UNII-3_40M_5795MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	88.28	-30.05	58.23	74.00	-15.77	peak	P
2	5875.000	94.55	-31.28	63.27	74.00	-10.73	peak	P
3	5925.000	96.36	-30.97	65.39	74.00	-8.61	peak	P

UNII-3_40M_5795MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	87.31	-28.08	59.23	74.00	-14.77	peak	P
2	5875.000	93.58	-29.31	64.27	74.00	-9.73	peak	P
3	5925.000	95.39	-29.00	66.39	74.00	-7.61	peak	P

6.7 Undesirable emission limits (below 1GHz)


Test Requirement:	47 CFR Part 15.407(b)(9)																								
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6																								
Test Limit:	<p>Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100 **</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150 **</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200 **</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Procedure:	<p>Below 1GHz:</p> <ol style="list-style-type: none"> For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. Test the EUT in the lowest channel, the middle channel, the Highest channel. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. Repeat above procedures until all frequencies measured was complete. <p>Remark:</p> <ol style="list-style-type: none"> Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. <p>Above 1GHz:</p>																								

	<p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <ol style="list-style-type: none"> 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	--

6.7.1 E.U.T. Operation:


Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.7.2 Test Setup Diagram:

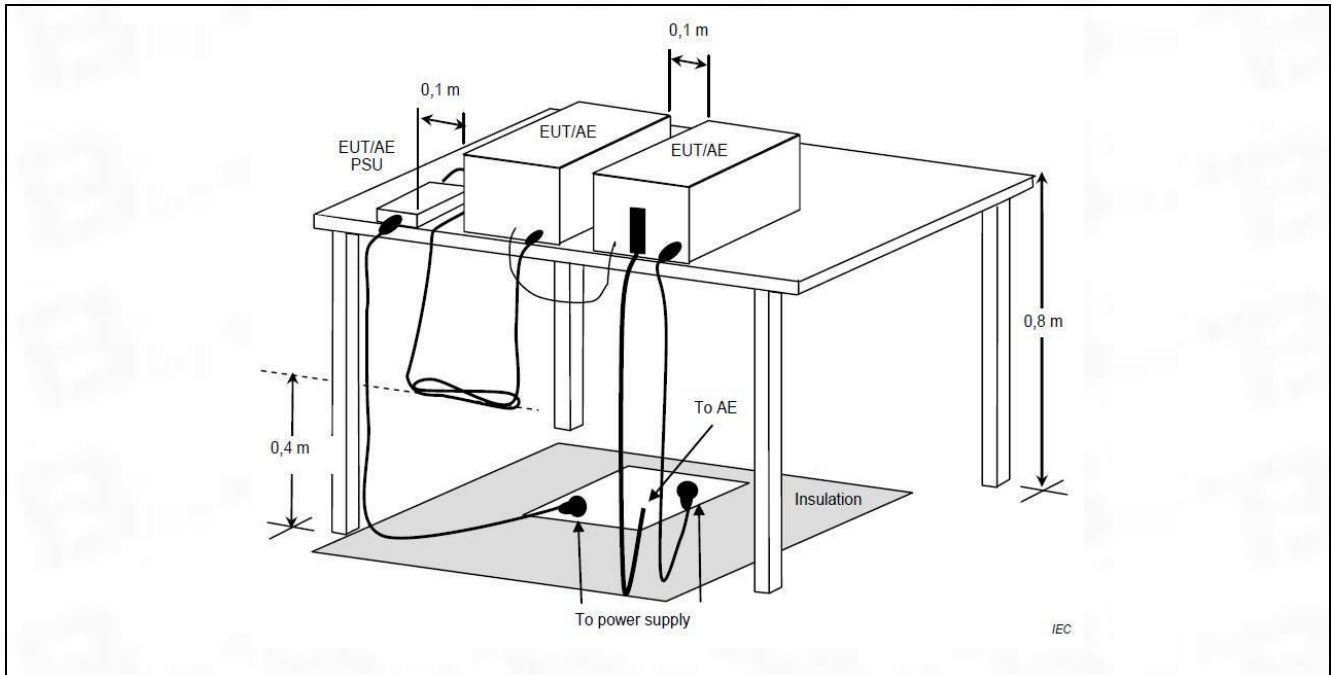


6.7.3 Test Data:

Note: All the mode have been tested, and only the worst case mode are in the report
 TM1 / Polarization: Horizontal / Band: U-NII 1 / BW: 20 / CH: L

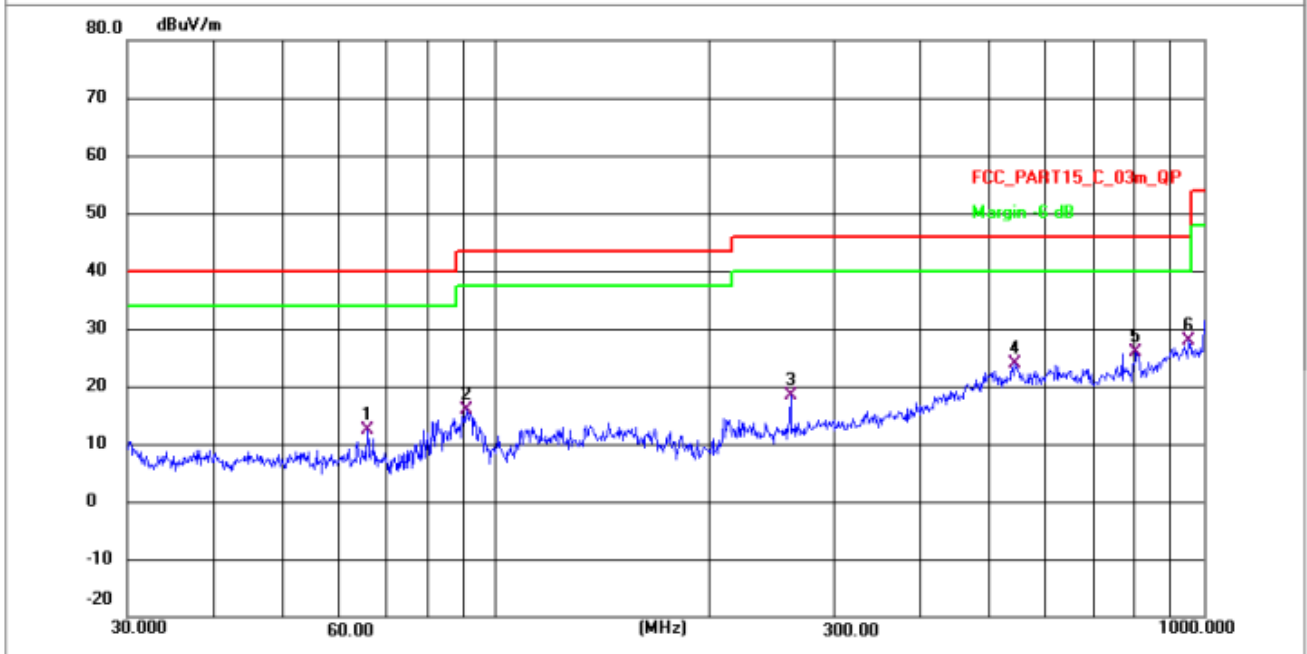

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	65.6878	30.52	-18.14	12.38	40.00	-27.62	QP	P
2	90.5374	45.75	-29.79	15.96	43.50	-27.54	QP	P
3	260.6010	44.17	-25.77	18.40	46.00	-27.60	QP	P
4	540.4242	45.43	-21.56	23.87	46.00	-22.13	QP	P
5	803.1933	49.54	-23.67	25.87	46.00	-20.13	QP	P
6 *	952.0937	49.71	-21.77	27.94	46.00	-18.06	QP	P

TM1 / Polarization: Vertical / Band: U-NII 1 / BW: 20 / CH: L

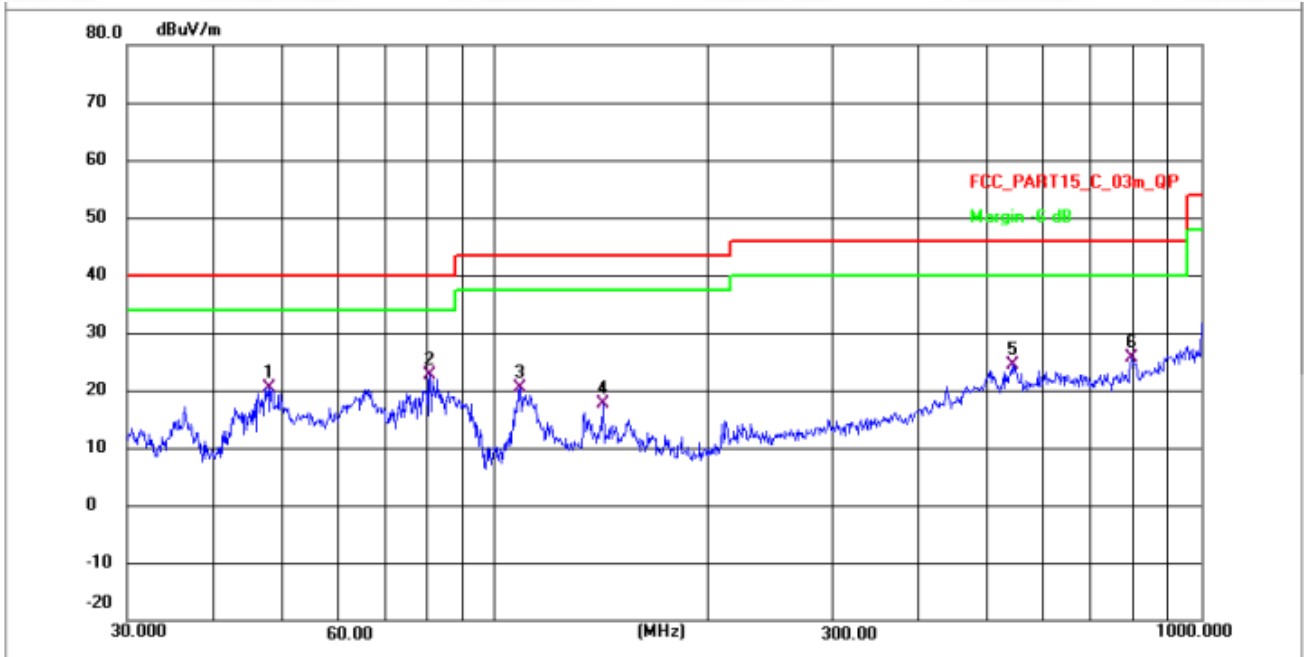

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	47.6586	40.78	-20.37	20.41	40.00	-19.59	QP	P
2 *	80.9275	42.20	-19.67	22.53	40.00	-17.47	QP	P
3	108.6470	48.65	-28.15	20.50	43.50	-23.00	QP	P
4	142.3243	45.45	-27.85	17.60	43.50	-25.90	QP	P
5	540.4242	45.83	-21.56	24.27	46.00	-21.73	QP	P
6	797.5801	49.45	-23.73	25.72	46.00	-20.28	QP	P

6.8 Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)																																																																																							
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6																																																																																							
Test Limit:	<p>For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>MHz</th> <th>MHz</th> <th>GHz</th> </tr> </thead> <tbody> <tr> <td>0.090-0.110</td> <td>16.42-16.423</td> <td>399.9-410</td> <td>4.5-5.15</td> </tr> <tr> <td>¹0.495-0.505</td> <td>16.69475-16.69525</td> <td>608-614</td> <td>5.35-5.46</td> </tr> <tr> <td>2.1735-2.1905</td> <td>16.80425-16.80475</td> <td>960-1240</td> <td>7.25-7.75</td> </tr> <tr> <td>4.125-4.128</td> <td>25.5-25.67</td> <td>1300-1427</td> <td>8.025-8.5</td> </tr> <tr> <td>4.17725-4.17775</td> <td>37.5-38.25</td> <td>1435-1626.5</td> <td>9.0-9.2</td> </tr> <tr> <td>4.20725-4.20775</td> <td>73-74.6</td> <td>1645.5-1646.</td> <td>9.3-9.5</td> </tr> <tr> <td></td> <td></td> <td>5</td> <td></td> </tr> <tr> <td>6.215-6.218</td> <td>74.8-75.2</td> <td>1660-1710</td> <td>10.6-12.7</td> </tr> <tr> <td>6.26775-6.26825</td> <td>108-121.94</td> <td>1718.8-1722.</td> <td>13.25-13.4</td> </tr> <tr> <td></td> <td></td> <td>2</td> <td></td> </tr> <tr> <td>6.31175-6.31225</td> <td>123-138</td> <td>2200-2300</td> <td>14.47-14.5</td> </tr> <tr> <td>8.291-8.294</td> <td>149.9-150.05</td> <td>2310-2390</td> <td>15.35-16.2</td> </tr> <tr> <td>8.362-8.366</td> <td>156.52475-156.525</td> <td>2483.5-2500</td> <td>17.7-21.4</td> </tr> <tr> <td></td> <td>25</td> <td></td> <td></td> </tr> <tr> <td>8.37625-8.38675</td> <td>156.7-156.9</td> <td>2690-2900</td> <td>22.01-23.12</td> </tr> <tr> <td>8.41425-8.41475</td> <td>162.0125-167.17</td> <td>3260-3267</td> <td>23.6-24.0</td> </tr> <tr> <td>12.29-12.293</td> <td>167.72-173.2</td> <td>3332-3339</td> <td>31.2-31.8</td> </tr> <tr> <td>12.51975-12.52025</td> <td>240-285</td> <td>3345.8-3358</td> <td>36.43-36.5</td> </tr> <tr> <td>12.57675-12.57725</td> <td>322-335.4</td> <td>3600-4400</td> <td>(²)</td> </tr> <tr> <td>13.36-13.41</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ²Above 38.6</p> <p>The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength</th> <th>Measurement</th> </tr> </thead> </table>	MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.	9.3-9.5			5		6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.	13.25-13.4			2		6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.525	2483.5-2500	17.7-21.4		25			8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	(²)	13.36-13.41				Frequency (MHz)	Field strength	Measurement
MHz	MHz	MHz	GHz																																																																																					
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																																					
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																																					
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																																					
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																																					
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																																					
4.20725-4.20775	73-74.6	1645.5-1646.	9.3-9.5																																																																																					
		5																																																																																						
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																																					
6.26775-6.26825	108-121.94	1718.8-1722.	13.25-13.4																																																																																					
		2																																																																																						
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																																					
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																																					
8.362-8.366	156.52475-156.525	2483.5-2500	17.7-21.4																																																																																					
	25																																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																																					
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																																					
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																																					
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																																					
12.57675-12.57725	322-335.4	3600-4400	(²)																																																																																					
13.36-13.41																																																																																								
Frequency (MHz)	Field strength	Measurement																																																																																						

	(microvolts/meter)	distance (meters)
	0.009-0.490	2400/F(kHz)
	0.490-1.705	24000/F(kHz)
	1.705-30.0	30
	30-88	100 **
	88-216	150 **
	216-960	200 **
	Above 960	500
Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.</p> <p>4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.</p>	

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Data:

UNII-1 & 2A_20M_5180MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1226.286	77.38	-28.90	48.48	68.20	-19.72	peak	P
2	2484.391	78.02	-28.94	49.08	68.20	-19.12	peak	P
3	3497.512	78.15	-29.01	49.14	68.20	-19.06	peak	P
4	4259.395	83.38	-29.45	53.93	68.20	-14.27	peak	P
5	5256.288	84.50	-30.90	53.60	68.20	-14.60	peak	P
6	6253.395	85.38	-32.30	53.08	68.20	-15.12	peak	P

UNII-1 & 2A_20M_5180MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1259.455	70.13	-28.26	41.87	68.20	-26.33	peak	P
2	2549.465	70.80	-29.29	41.51	68.20	-26.69	peak	P
3	3346.493	71.81	-29.36	42.45	68.20	-25.75	peak	P
4	4276.386	72.91	-29.99	42.92	68.20	-25.28	peak	P
5	5378.466	73.77	-30.99	42.78	68.20	-25.42	peak	P
6	6386.452	75.11	-32.02	43.09	68.20	-25.11	peak	P

UNII-1 & 2A_20M_5240MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1365.339	69.99	-27.73	42.26	68.20	-25.94	peak	P
2	2655.349	70.66	-28.76	41.90	68.20	-26.30	peak	P
3	3452.377	71.67	-28.83	42.84	68.20	-25.36	peak	P
4	4382.270	72.77	-29.46	43.31	68.20	-24.89	peak	P
5	5484.350	73.63	-30.46	43.17	68.20	-25.03	peak	P
6	6492.336	74.97	-31.49	43.48	68.20	-24.72	peak	P

UNII-1 & 2A_20M_5240MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1489.339	70.12	-27.64	42.48	68.20	-25.72	peak	P
2	2779.349	70.79	-28.67	42.12	68.20	-26.08	peak	P
3	3576.377	71.80	-28.74	43.06	68.20	-25.14	peak	P
4	4506.270	72.90	-29.37	43.53	68.20	-24.67	peak	P
5	5608.350	73.76	-30.37	43.39	68.20	-24.81	peak	P
6	6616.336	75.10	-31.40	43.70	68.20	-24.50	peak	P

UNII-1 & 2A_20M_5320MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1671.465	72.03	-25.17	46.86	68.20	-21.34	peak	P
2	2961.475	72.70	-26.20	46.50	68.20	-21.70	peak	P
3	3758.503	73.71	-26.27	47.44	68.20	-20.76	peak	P
4	4688.396	74.81	-26.90	47.91	68.20	-20.29	peak	P
5	5790.476	75.67	-27.90	47.77	68.20	-20.43	peak	P
6	6798.462	77.01	-28.93	48.08	68.20	-20.12	peak	P

UNII-1 & 2A_20M_5320MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1599.868	73.26	-24.17	49.09	68.20	-19.11	peak	P
2	2889.878	73.93	-25.20	48.73	68.20	-19.47	peak	P
3	3686.906	74.94	-25.27	49.67	68.20	-18.53	peak	P
4	4616.799	76.04	-25.90	50.14	68.20	-18.06	peak	P
5	5718.879	76.90	-26.90	50.00	68.20	-18.20	peak	P
6	6726.865	78.24	-27.93	50.31	68.20	-17.89	peak	P

UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1856.383	80.71	-24.90	55.81	68.20	-12.39	peak	P
2	3114.488	81.35	-24.94	56.41	68.20	-11.79	peak	P
3	4127.609	81.48	-25.01	56.47	68.20	-11.73	peak	P
4	4889.492	86.71	-25.45	61.26	68.20	-6.94	peak	P
5	5886.385	87.83	-26.90	60.93	68.20	-7.27	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1939.624	81.48	-20.61	60.87	68.20	-7.33	peak	P
2	3197.729	82.12	-20.65	61.47	68.20	-6.73	peak	P
3	4210.850	82.25	-20.72	61.53	68.20	-6.67	peak	P
4	4972.733	87.48	-21.16	66.32	68.20	-1.88	peak	P
5	5969.626	88.60	-22.61	65.99	68.20	-2.21	peak	P
6	6966.733	89.48	-24.01	65.47	68.20	-2.73	peak	P

UNII-3_20M_5785MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2038.386	80.48	-27.89	52.59	68.20	-15.61	peak	P
2	3296.491	81.12	-27.93	53.19	68.20	-15.01	peak	P
3	4309.612	81.25	-28.00	53.25	68.20	-14.95	peak	P
4	5071.495	86.48	-28.44	58.04	68.20	-10.16	peak	P
5	6068.388	87.60	-29.89	57.71	68.20	-10.49	peak	P
6	7065.495	88.48	-31.29	57.19	68.20	-11.01	peak	P

UNII-3_20M_5785MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1338.393	81.45	-26.90	54.55	68.20	-13.65	peak	P
2	2596.498	82.09	-26.94	55.15	68.20	-13.05	peak	P
3	3609.619	82.22	-27.01	55.21	68.20	-12.99	peak	P
4	4371.502	87.45	-27.45	60.00	68.20	-8.20	peak	P
5	5368.395	88.57	-28.90	59.67	68.20	-8.53	peak	P
6	6365.502	89.45	-30.30	59.15	68.20	-9.05	peak	P

UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1449.611	81.38	-26.11	55.27	68.20	-12.93	peak	P
2	2770.682	82.79	-27.00	55.79	68.20	-12.41	peak	P
3	3776.907	83.35	-28.41	54.94	68.20	-13.26	peak	P
4	4381.058	85.28	-29.30	55.98	68.20	-12.22	peak	P
5	5494.725	87.45	-31.00	56.45	68.20	-11.75	peak	P
6	7376.565	92.46	-32.01	60.45	68.20	-7.75	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1578.612	84.05	-25.11	58.94	68.20	-9.26	peak	P
2	2899.683	85.46	-26.00	59.46	68.20	-8.74	peak	P
3	3905.908	86.02	-27.41	58.61	68.20	-9.59	peak	P
4	4510.059	87.95	-28.30	59.65	68.20	-8.55	peak	P
5	5623.726	90.12	-30.00	60.12	68.20	-8.08	peak	P
6	7505.566	95.13	-31.01	64.12	68.20	-4.08	peak	P

UNII-1 & 2A_40M_5190MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1665.458	72.43	-23.64	48.79	68.20	-19.41	peak	P
2	2955.468	73.10	-24.67	48.43	68.20	-19.77	peak	P
3	3752.496	74.11	-24.74	49.37	68.20	-18.83	peak	P
4	4682.389	75.21	-25.37	49.84	68.20	-18.36	peak	P
5	5784.469	76.07	-26.37	49.70	68.20	-18.50	peak	P
6	6792.455	77.41	-27.40	50.01	68.20	-18.19	peak	P

UNII-1 & 2A_40M_5190MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1769.465	73.15	-25.13	48.02	68.20	-20.18	peak	P
2	3059.475	73.82	-26.16	47.66	68.20	-20.54	peak	P
3	3856.503	74.83	-26.23	48.60	68.20	-19.60	peak	P
4	4786.396	75.93	-26.86	49.07	68.20	-19.13	peak	P
5	5888.476	76.79	-27.86	48.93	68.20	-19.27	peak	P
6	6896.462	78.13	-28.89	49.24	68.20	-18.96	peak	P

UNII-1 & 2A_40M_5310MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1978.492	81.48	-30.10	51.38	68.20	-16.82	peak	P
2	3299.563	82.89	-30.99	51.90	68.20	-16.30	peak	P
3	4305.788	83.45	-32.40	51.05	68.20	-17.15	peak	P
4	4909.939	85.38	-33.29	52.09	68.20	-16.11	peak	P
5	6023.606	87.55	-34.99	52.56	68.20	-15.64	peak	P
6	7905.446	88.33	-35.00	53.33	68.20	-14.87	peak	P

UNII-1 & 2A_40M_5310MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1749.466	78.57	-29.78	48.79	68.20	-19.41	peak	P
2	3070.537	79.98	-30.67	49.31	68.20	-18.89	peak	P
3	4076.762	80.54	-32.08	48.46	68.20	-19.74	peak	P
4	4680.913	82.47	-32.97	49.50	68.20	-18.70	peak	P
5	5794.580	84.64	-34.67	49.97	68.20	-18.23	peak	P
6	7676.420	89.65	-35.68	53.97	68.20	-14.23	peak	P

UNII-3_40M_5755MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1848.613	79.49	-27.10	52.39	68.20	-15.81	peak	P
2	3169.684	80.90	-27.99	52.91	68.20	-15.29	peak	P
3	4175.909	81.46	-29.40	52.06	68.20	-16.14	peak	P
4	4780.060	83.39	-30.29	53.10	68.20	-15.10	peak	P
5	5893.727	85.56	-31.99	53.57	68.20	-14.63	peak	P
6	7775.567	90.57	-33.00	57.57	68.20	-10.63	peak	P

UNII-3_40M_5755MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1949.502	80.49	-26.13	54.36	68.20	-13.84	peak	P
2	3270.573	81.90	-27.02	54.88	68.20	-13.32	peak	P
3	4276.798	82.46	-28.43	54.03	68.20	-14.17	peak	P
4	4880.949	84.39	-29.32	55.07	68.20	-13.13	peak	P
5	5994.616	86.56	-31.02	55.54	68.20	-12.66	peak	P
6	7876.456	91.57	-32.03	59.54	68.20	-8.66	peak	P



UNII-3_40M_5795MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1878.461	81.48	-29.34	52.14	68.20	-16.06	peak	P
2	3199.532	82.89	-30.23	52.66	68.20	-15.54	peak	P
3	4205.757	83.45	-31.64	51.81	68.20	-16.39	peak	P
4	4809.908	85.38	-32.53	52.85	68.20	-15.35	peak	P
5	5923.575	87.55	-34.23	53.32	68.20	-14.88	peak	P
6	7805.415	92.56	-35.24	57.32	68.20	-10.88	peak	P


UNII-3_40M_5795MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1978.465	79.48	-26.11	53.37	68.20	-14.83	peak	P
2	3299.536	80.89	-27.00	53.89	68.20	-14.31	peak	P
3	4305.761	81.45	-28.41	53.04	68.20	-15.16	peak	P
4	4909.912	83.38	-29.30	54.08	68.20	-14.12	peak	P
5	6023.579	85.55	-31.00	54.55	68.20	-13.65	peak	P
6	7905.419	90.56	-32.01	58.55	68.20	-9.65	peak	P

7 Test Setup Photos

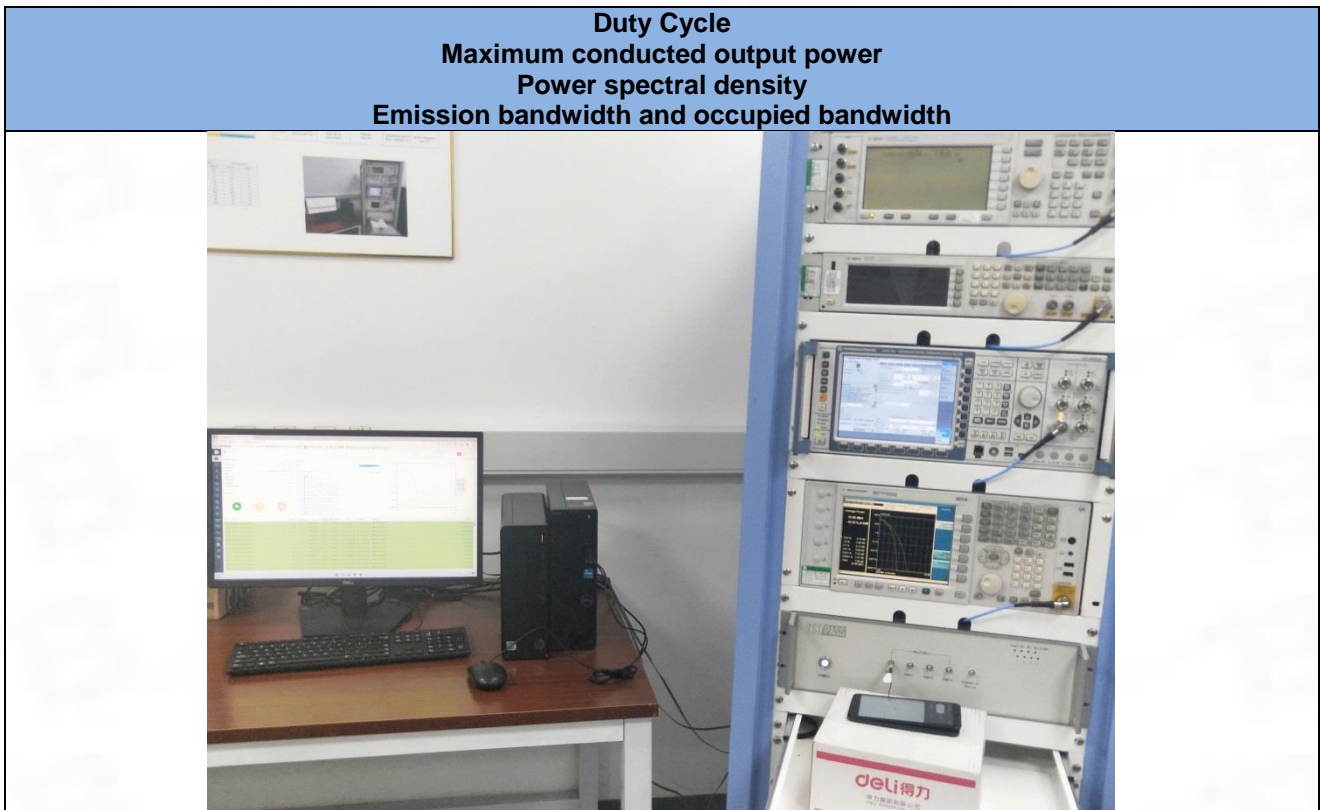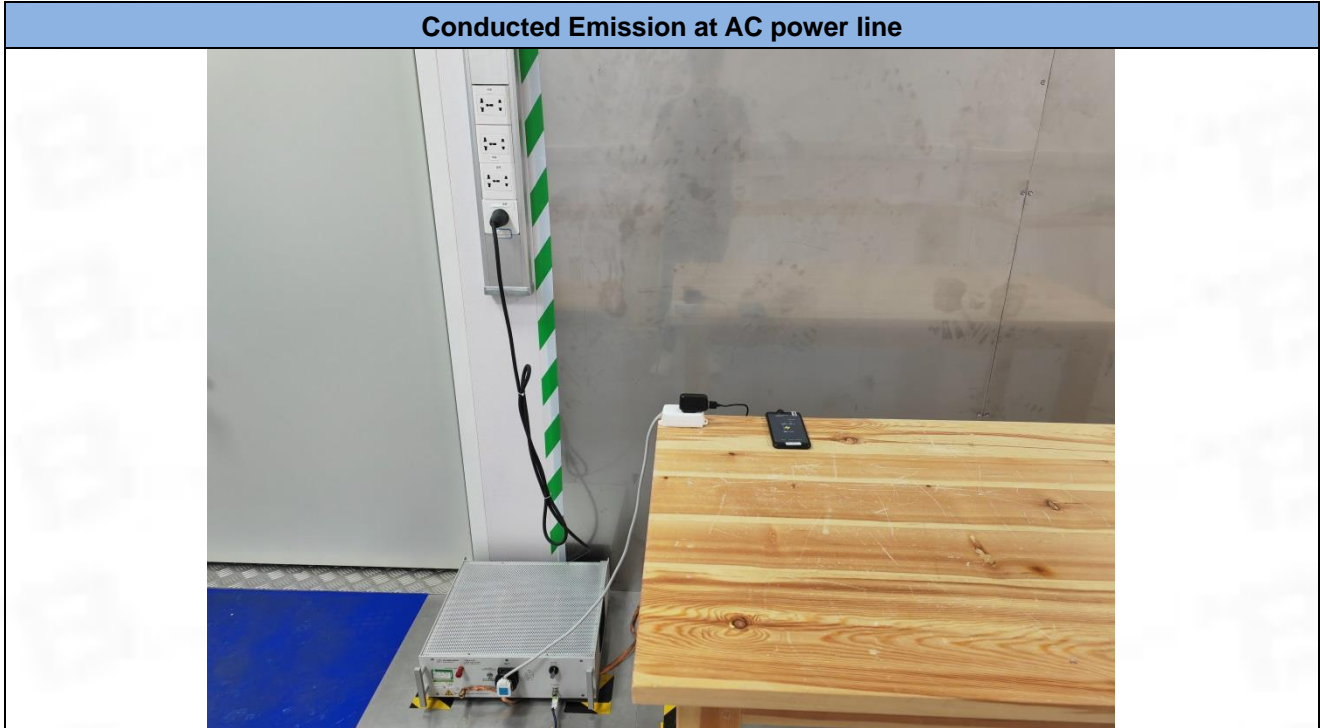

Band edge emissions (Radiated)
Undesirable emission limits (above 1GHz)

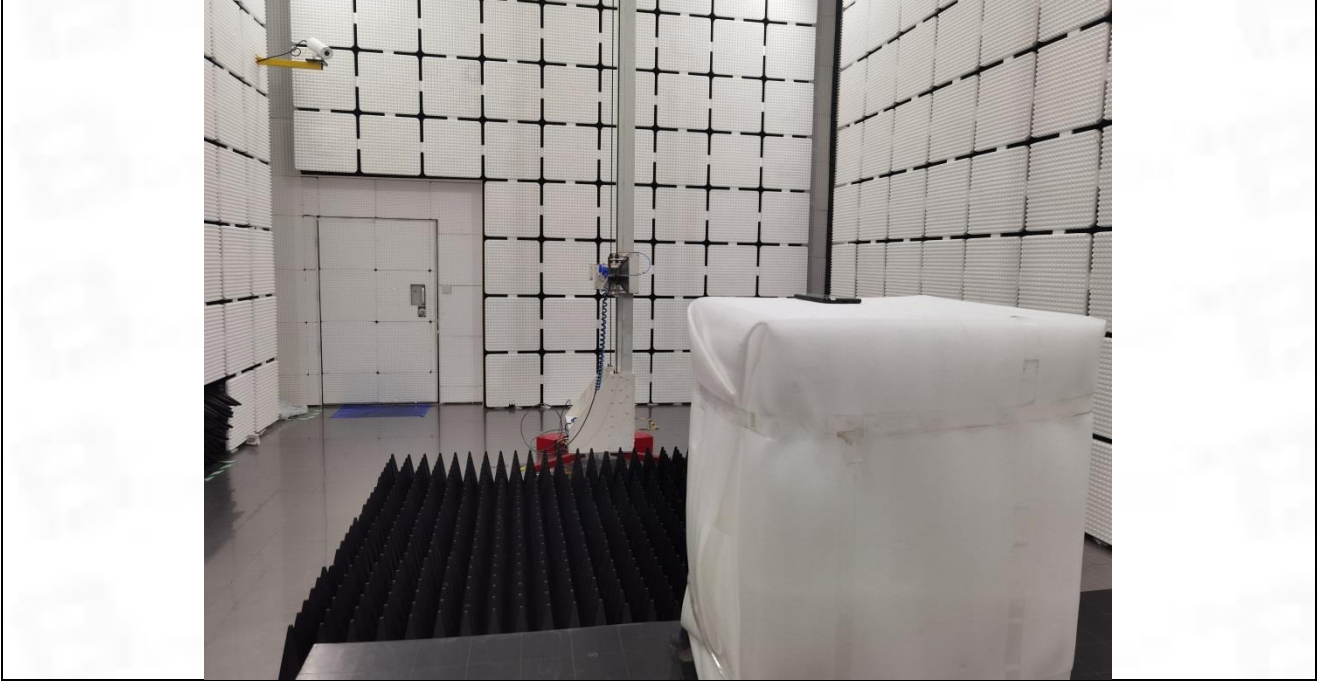

Undesirable emission limits (below 1GHz)



8 EUT Constructional Details (EUT Photos)

Please refer to the report No.BTF230512R00201

Appendix


1. Duty Cycle



1.1 Ant1



1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	1.393	1.428	97.55	0.11	0.06
		5200	1.392	1.428	97.48	0.11	0.06
		5240	1.392	1.428	97.48	0.11	0.03
		5260	1.393	1.428	97.55	0.11	0.03
		5300	1.393	1.428	97.55	0.11	0.03
		5320	1.392	1.427	97.55	0.11	0.03
		5745	1.393	1.428	97.55	0.11	0.06
		5785	1.393	1.428	97.55	0.11	0.03
802.11n (HT20)	SISO	5180	1.300	1.335	97.38	0.12	0.03
		5200	1.300	1.336	97.31	0.12	0.03
		5240	1.300	1.336	97.31	0.12	0.04
		5260	1.300	1.336	97.31	0.12	0.03
		5300	1.301	1.336	97.38	0.12	0.03
		5320	1.302	1.337	97.38	0.12	0.10
		5745	1.300	1.335	97.38	0.12	0.07
		5785	1.300	1.335	97.38	0.12	0.03
802.11n (HT40)	SISO	5190	0.648	0.683	94.88	0.23	0.03
		5230	0.648	0.683	94.88	0.23	0.00
		5270	0.649	0.683	95.02	0.22	0.07
		5310	0.648	0.683	94.88	0.23	0.07
		5755	0.648	0.683	94.88	0.23	0.03
		5795	0.648	0.683	94.88	0.23	0.03


1.1.2 Test Graph

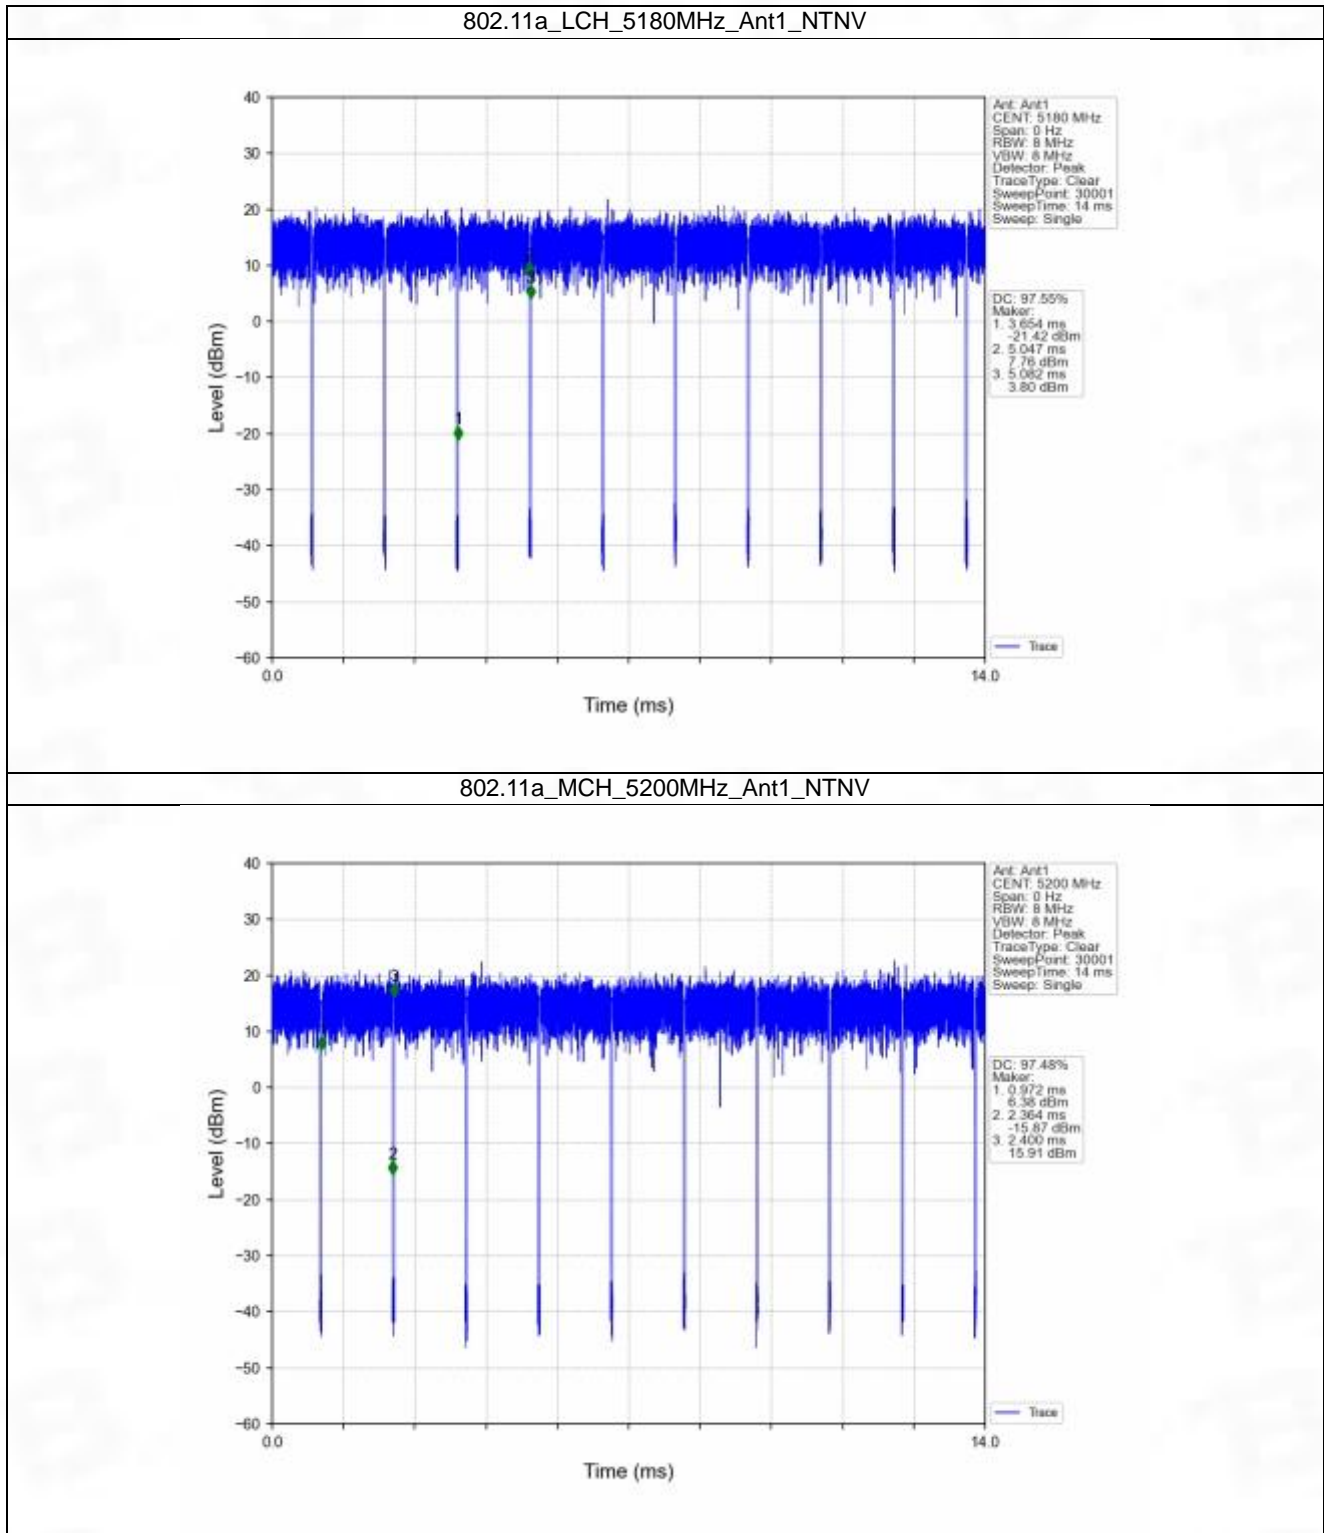

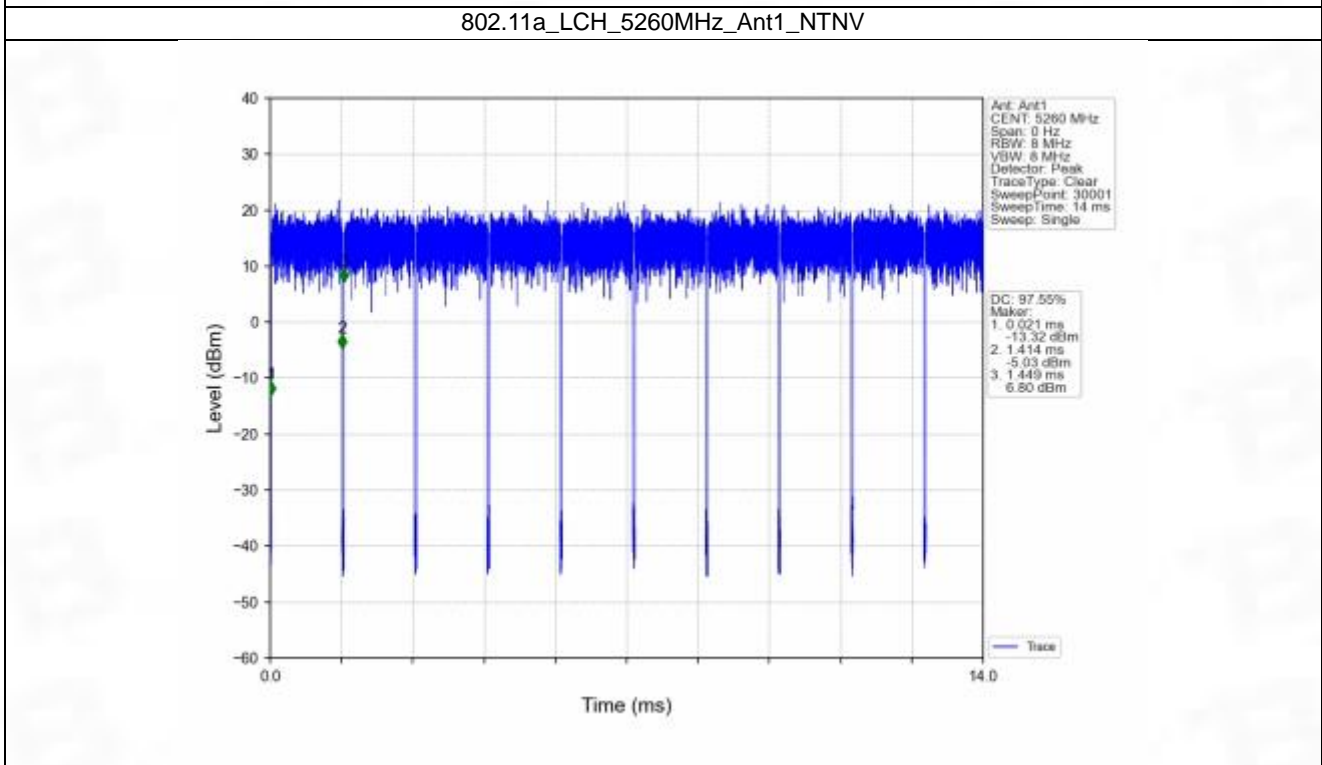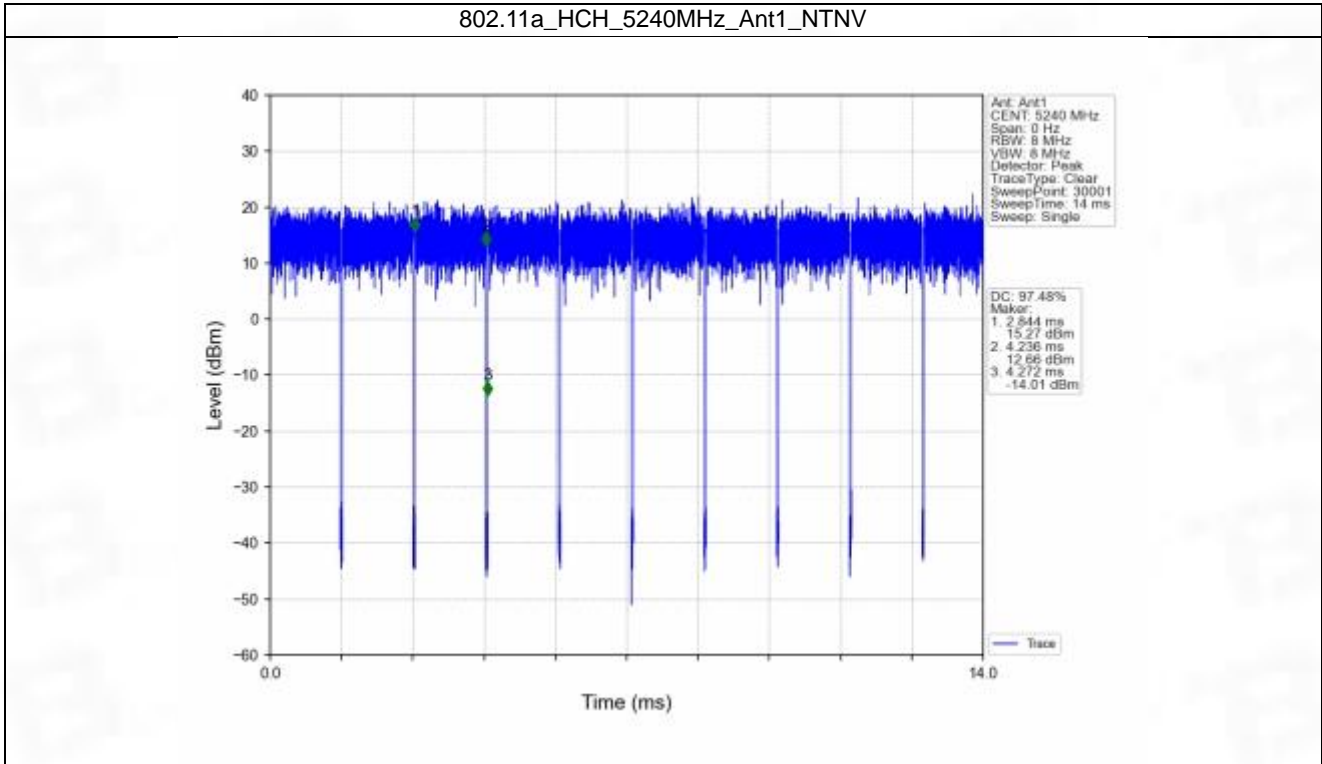


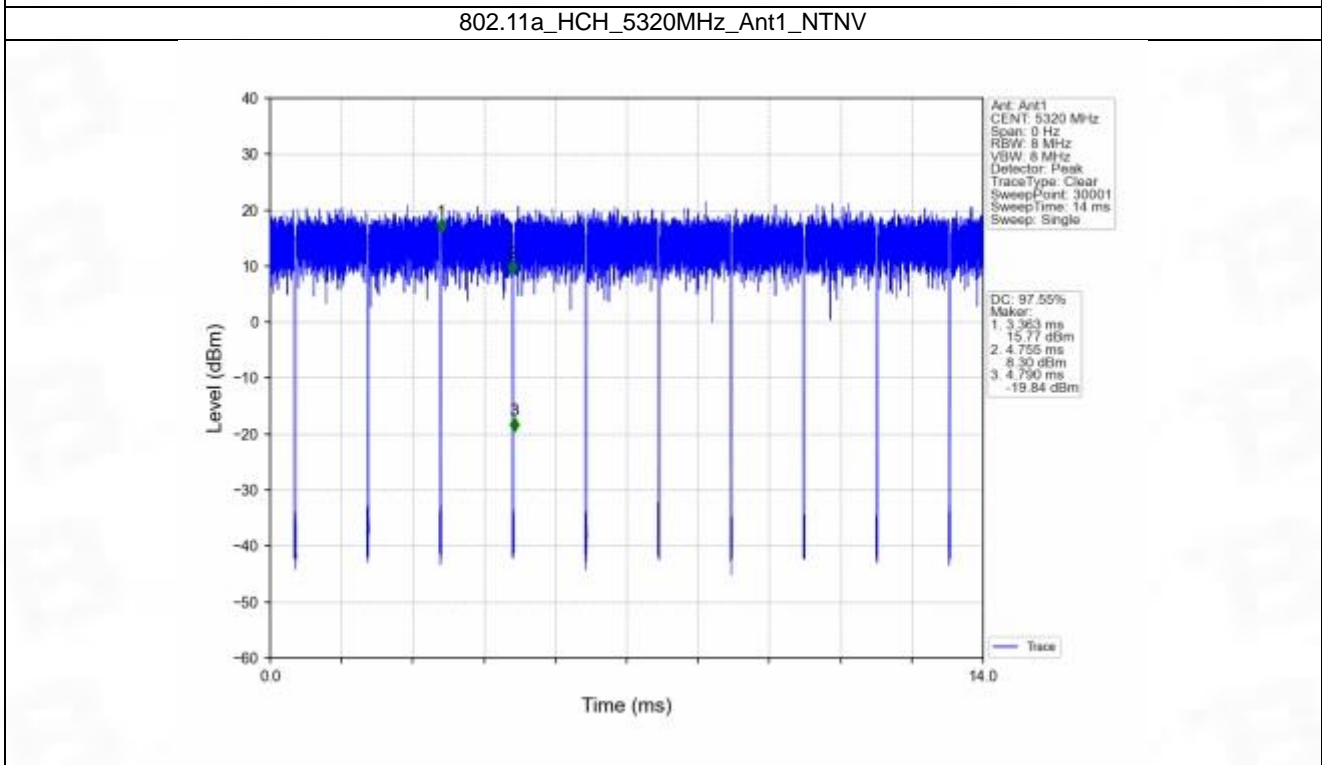
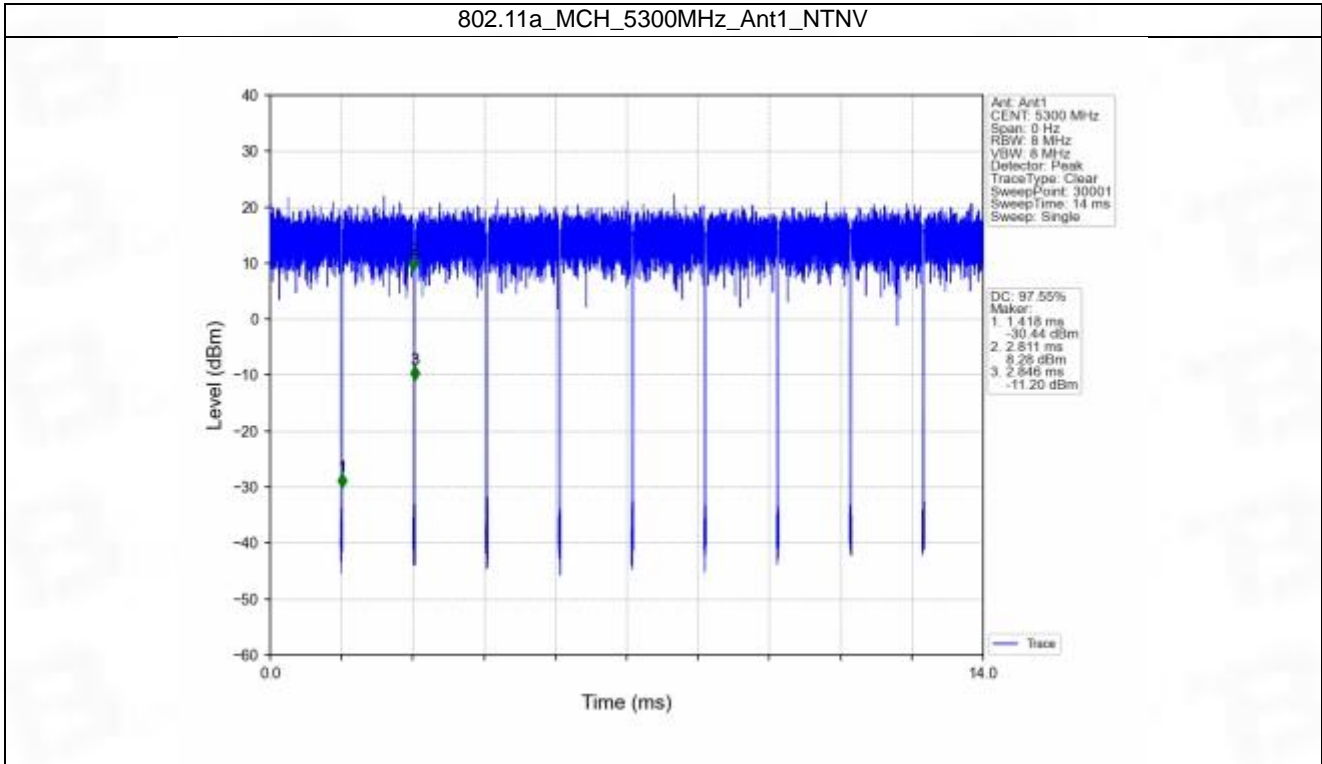




802.11a_LCH_5745MHz_Ant1_NTNV

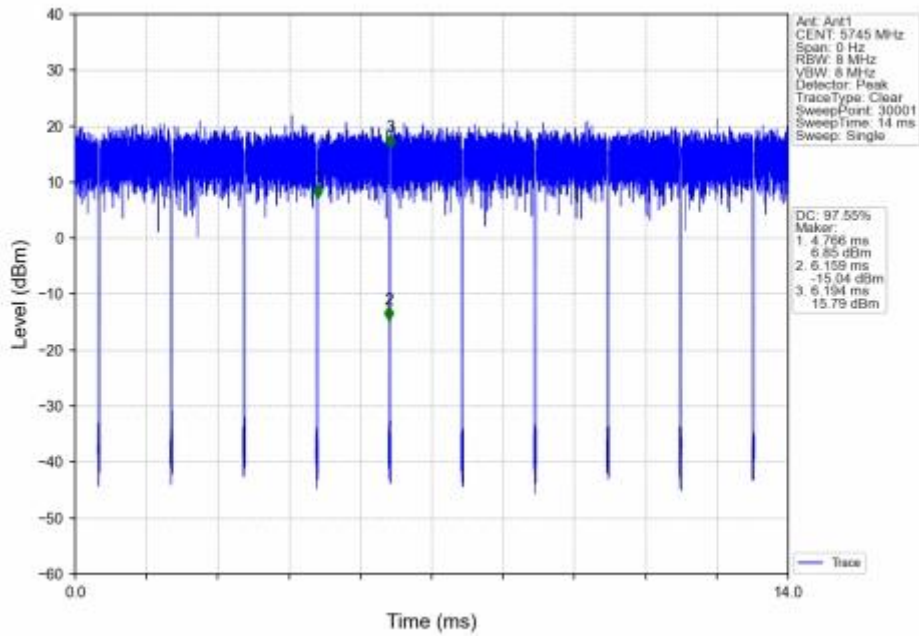


802.11a_MCH_5785MHz_Ant1_NTNV

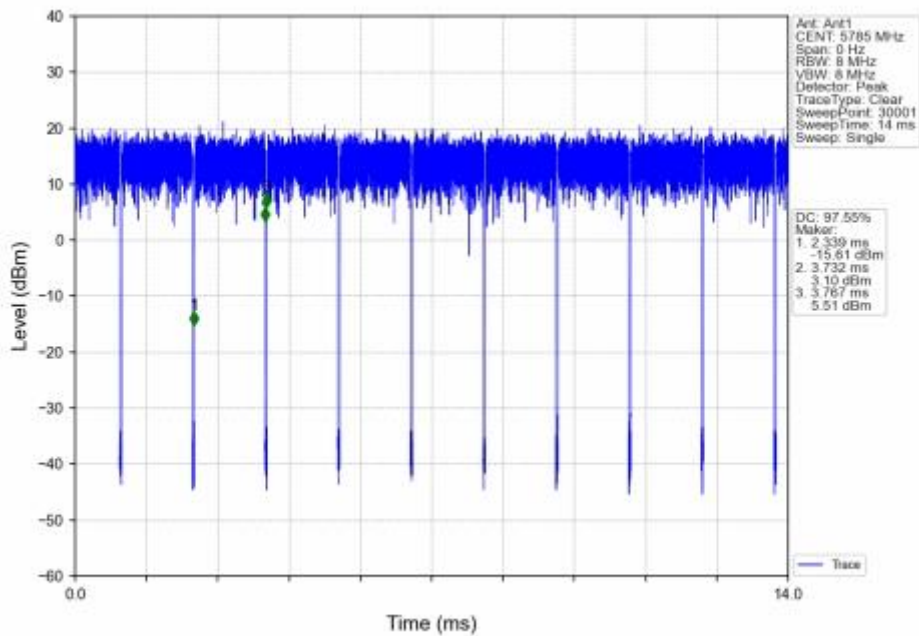

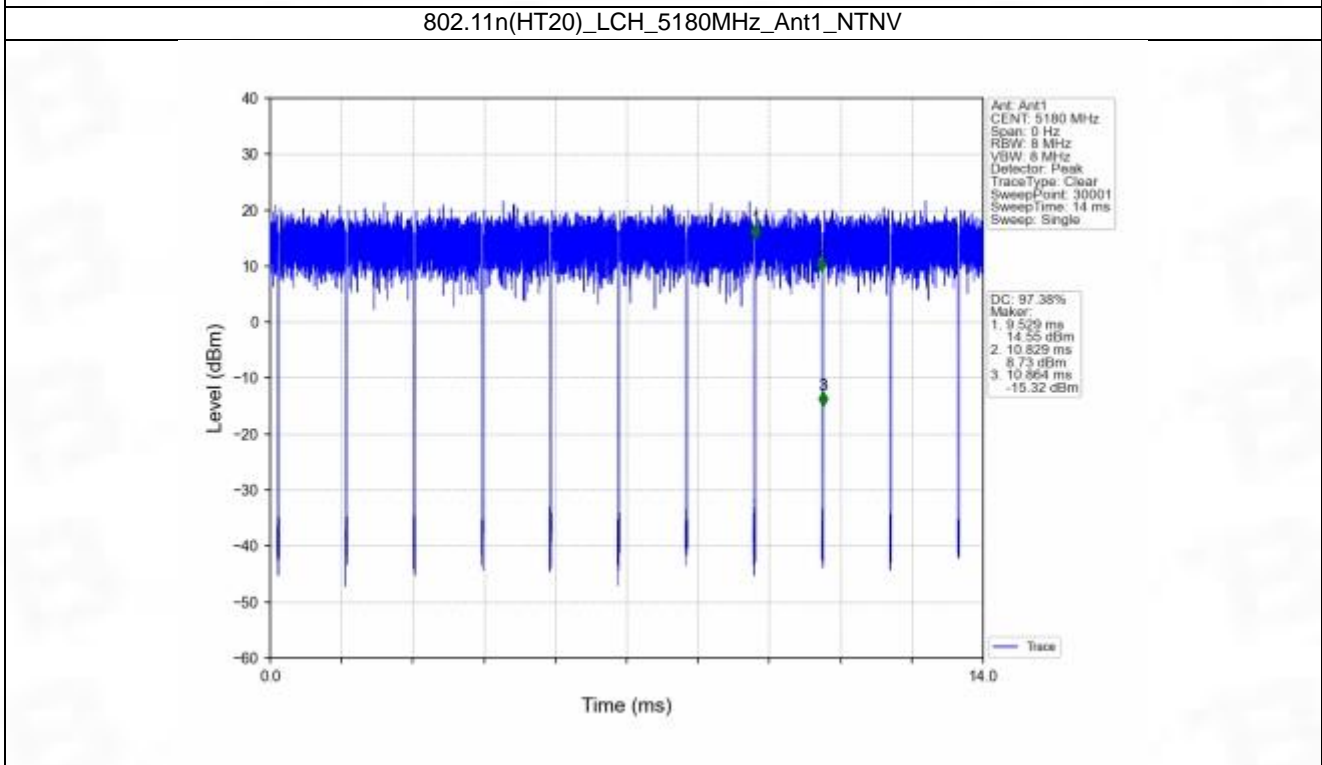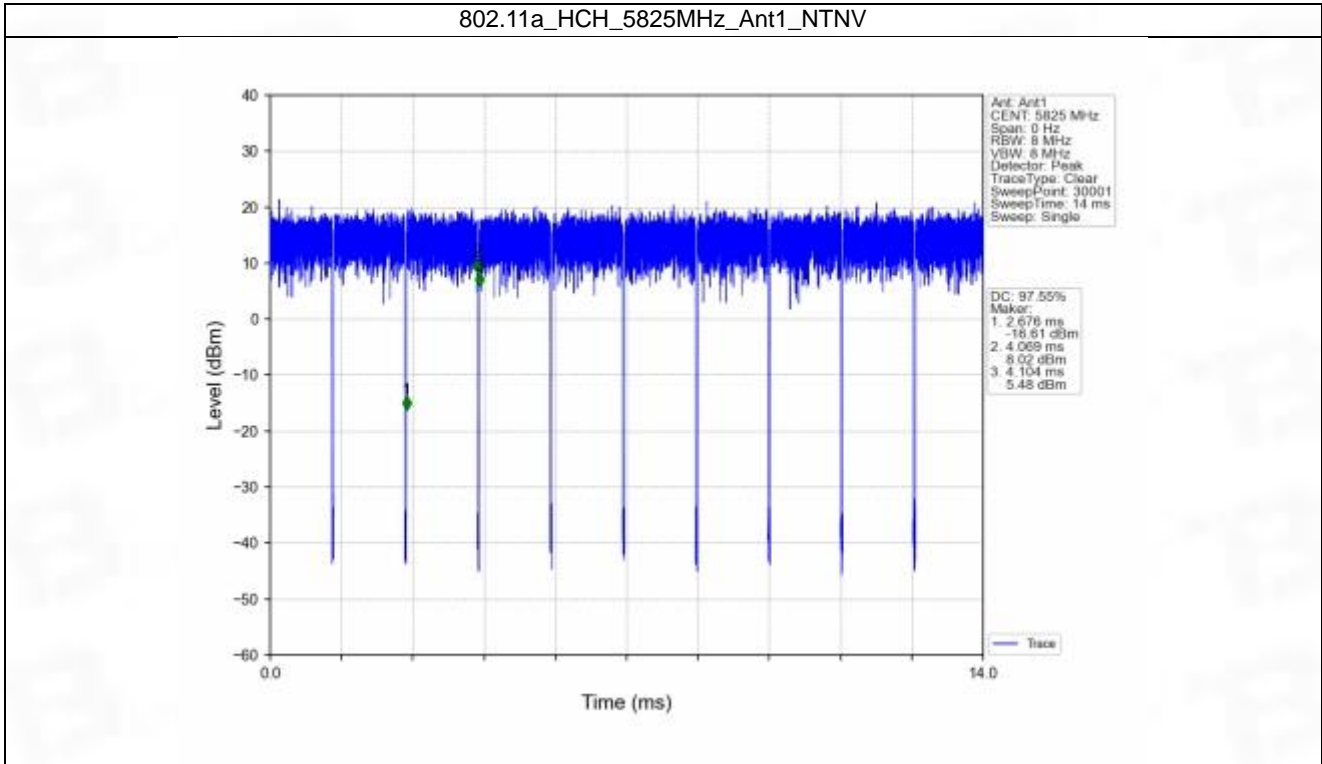


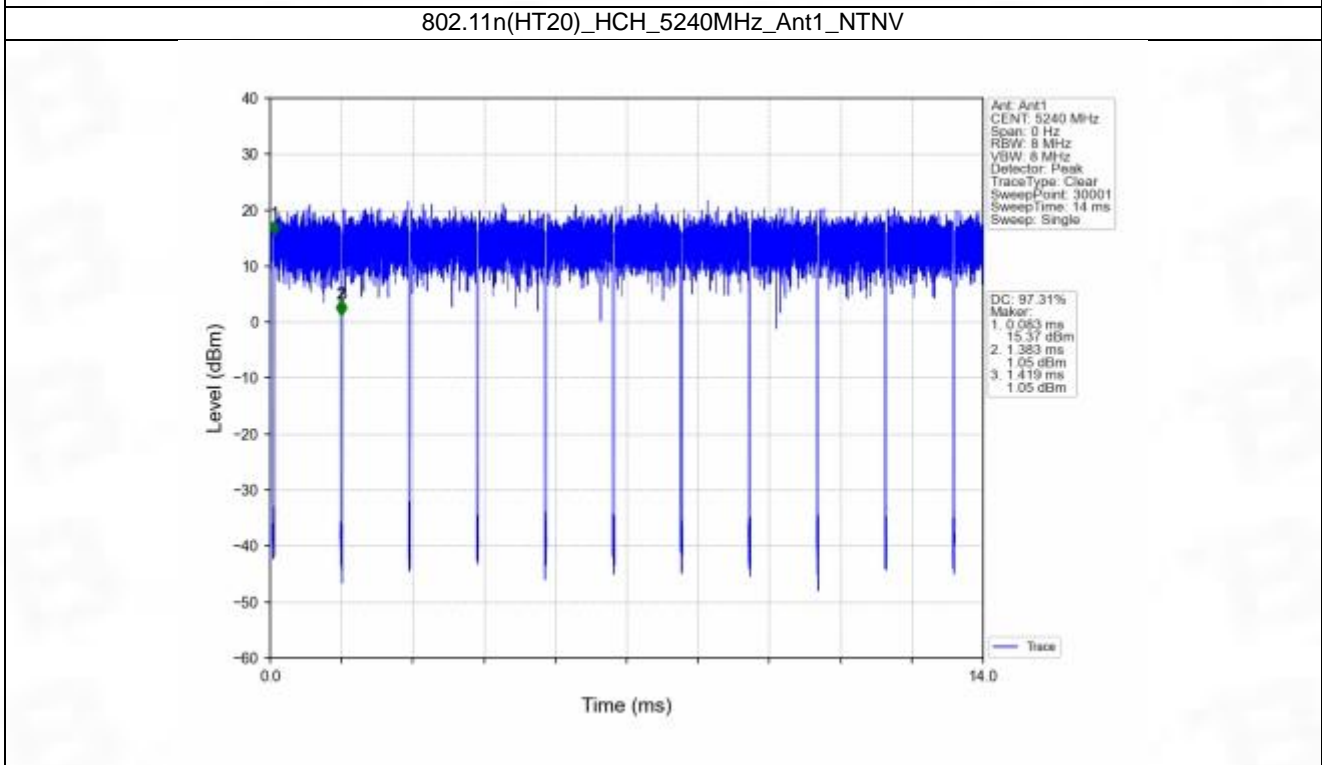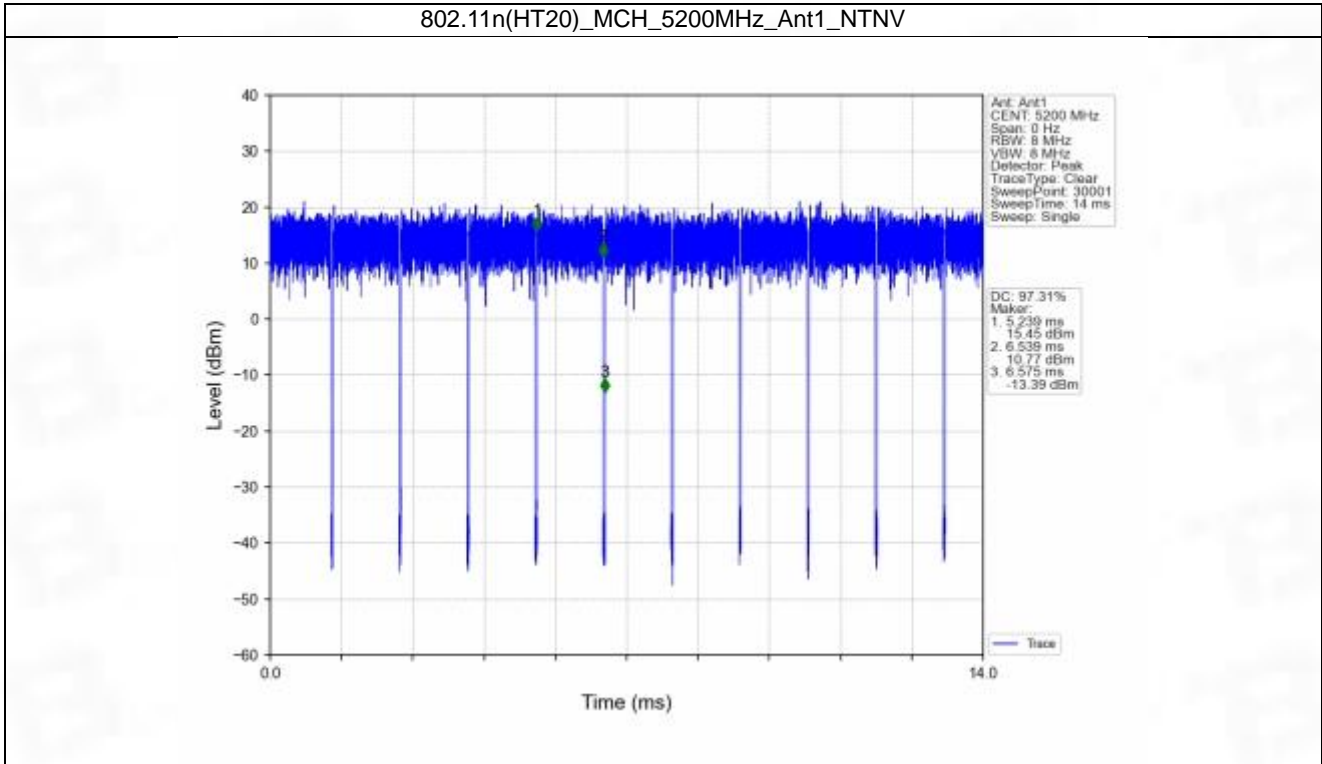


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

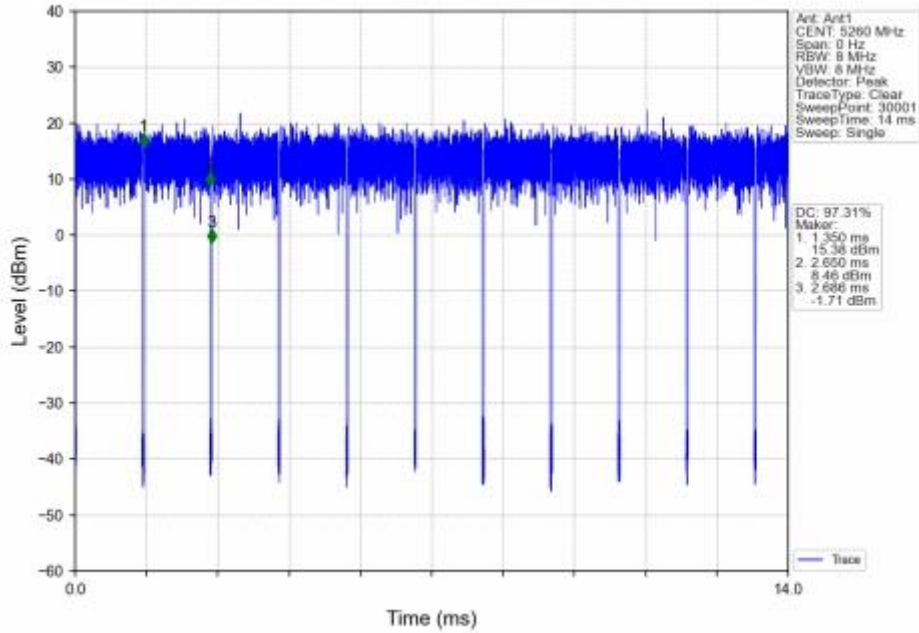


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV


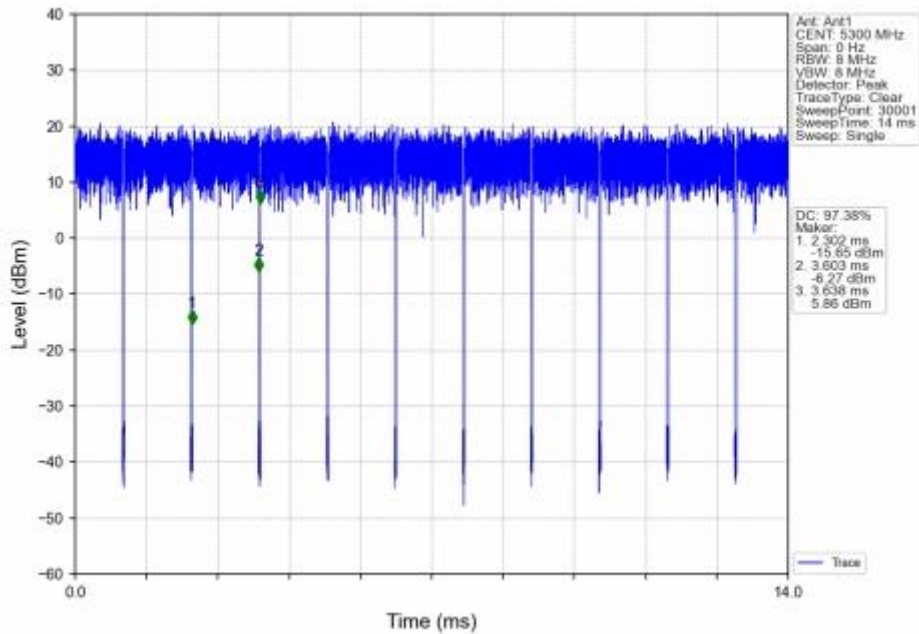


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

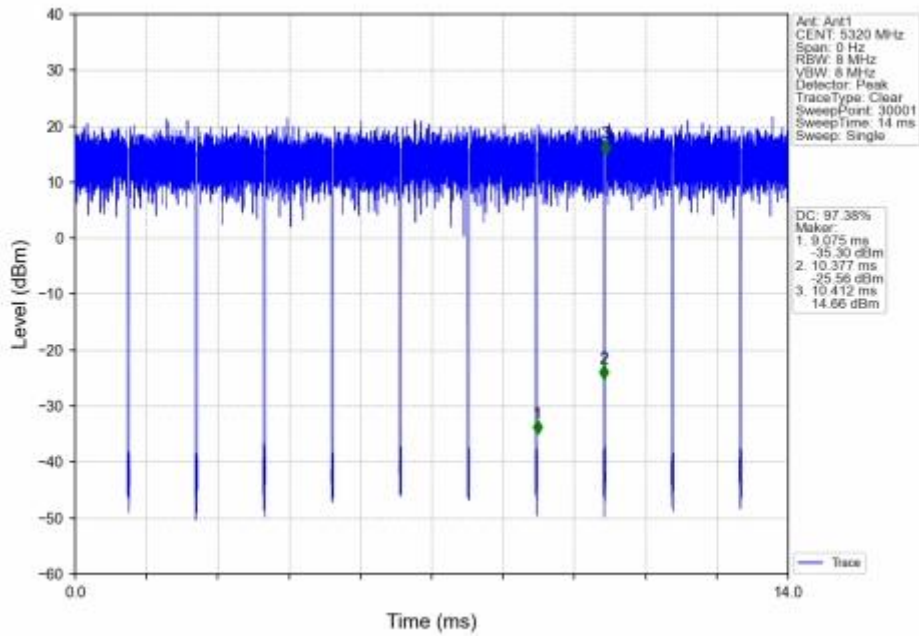


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

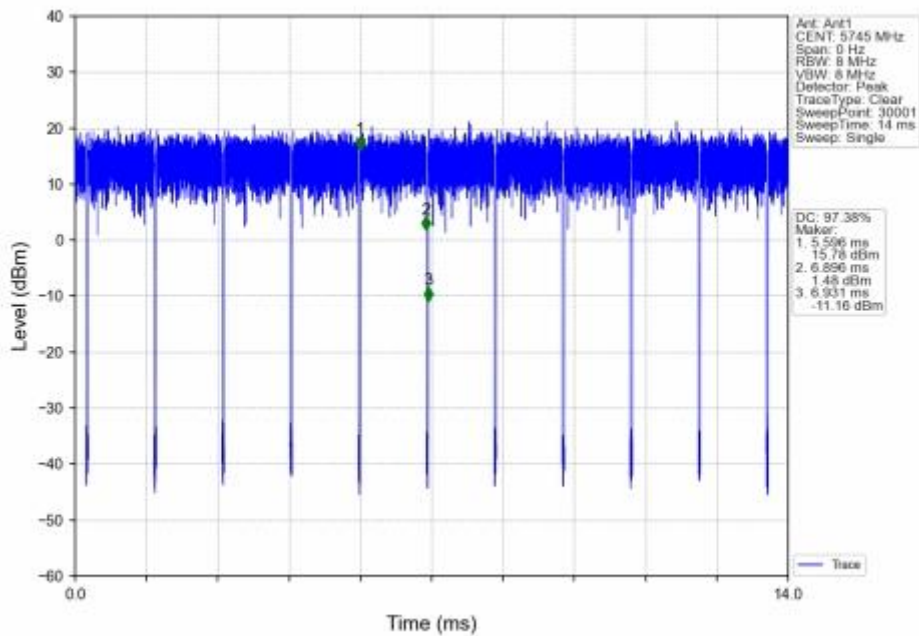


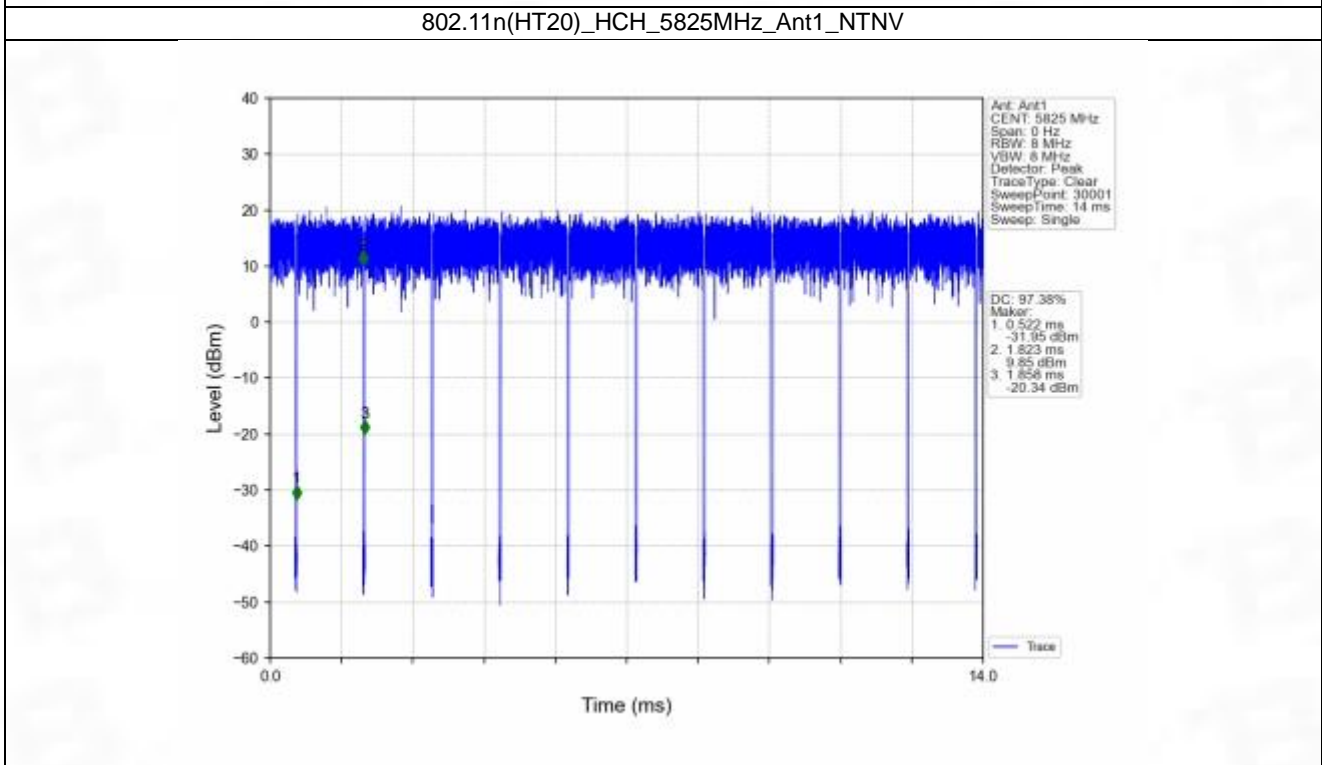
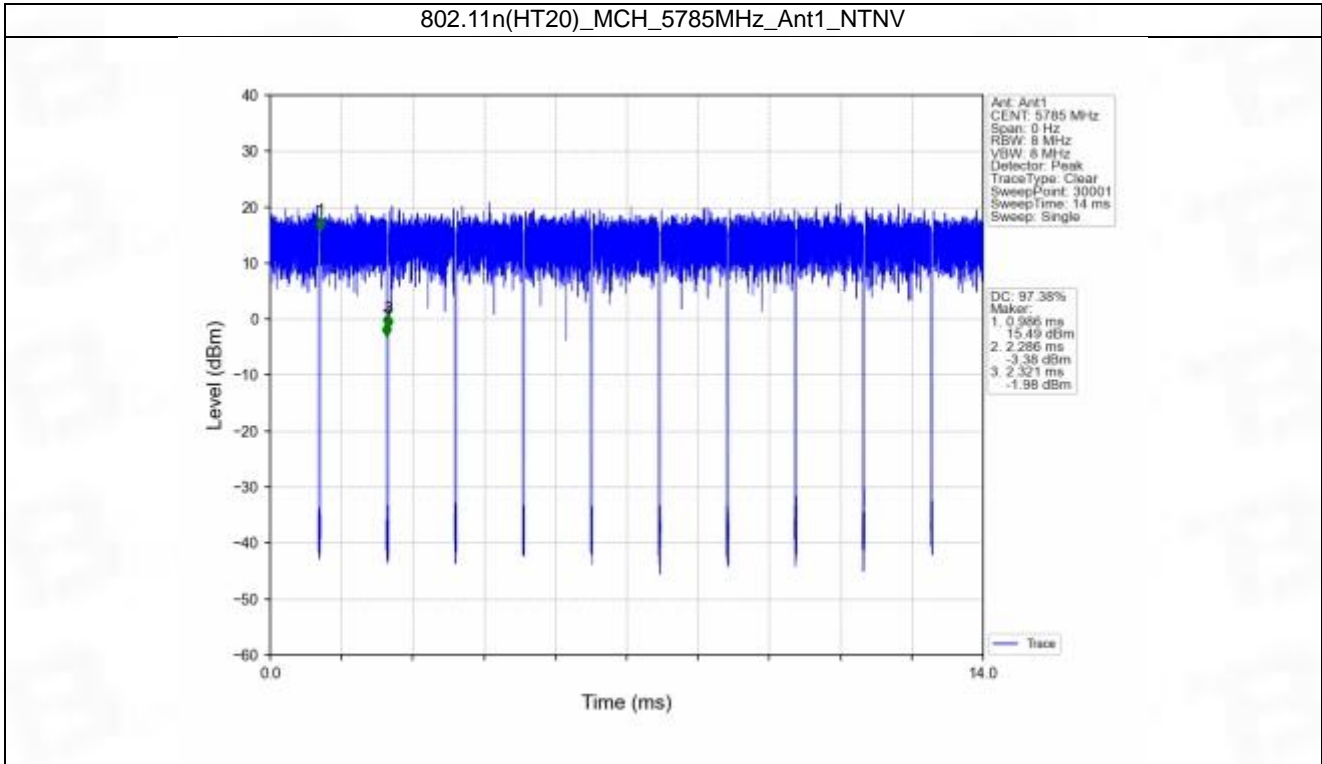


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

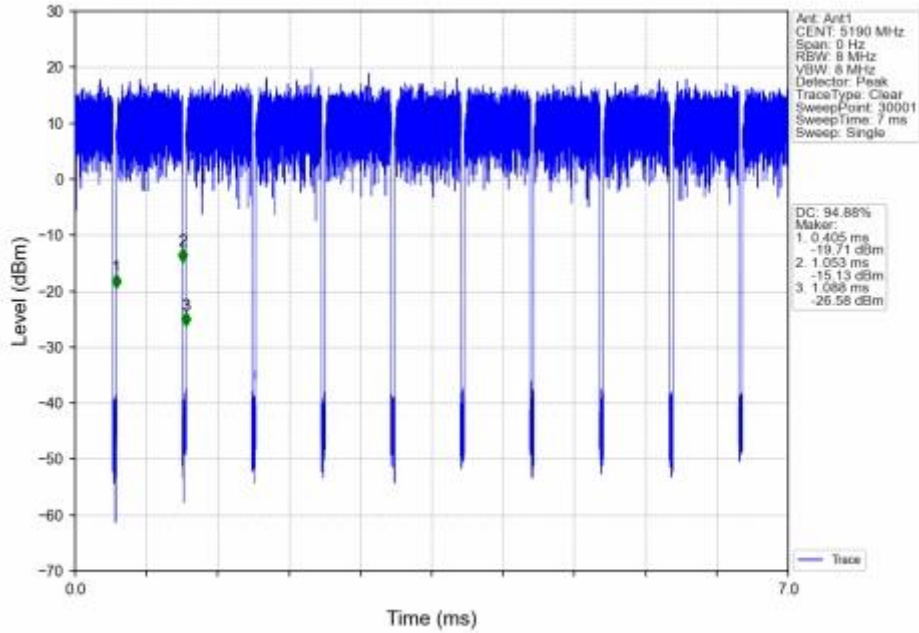


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

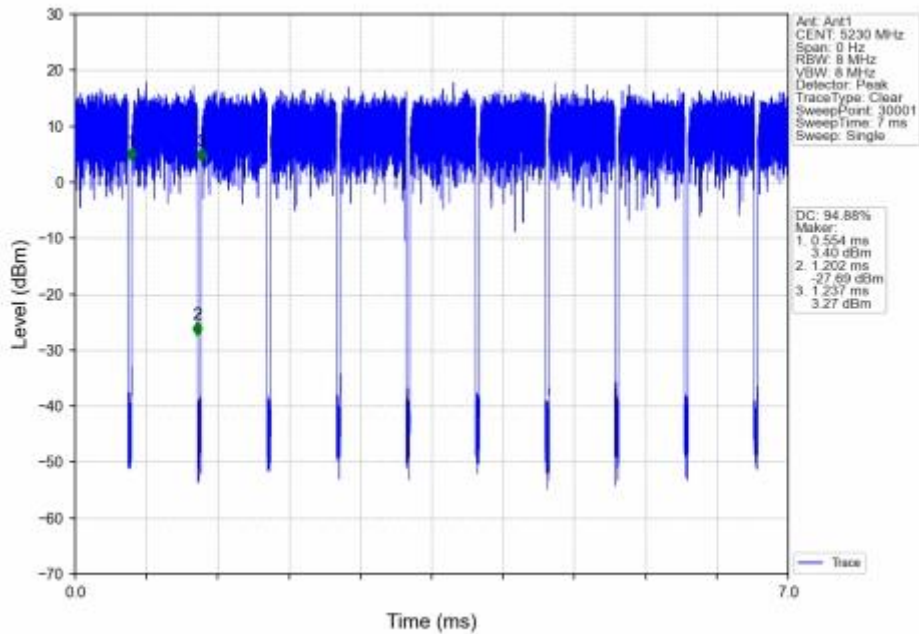


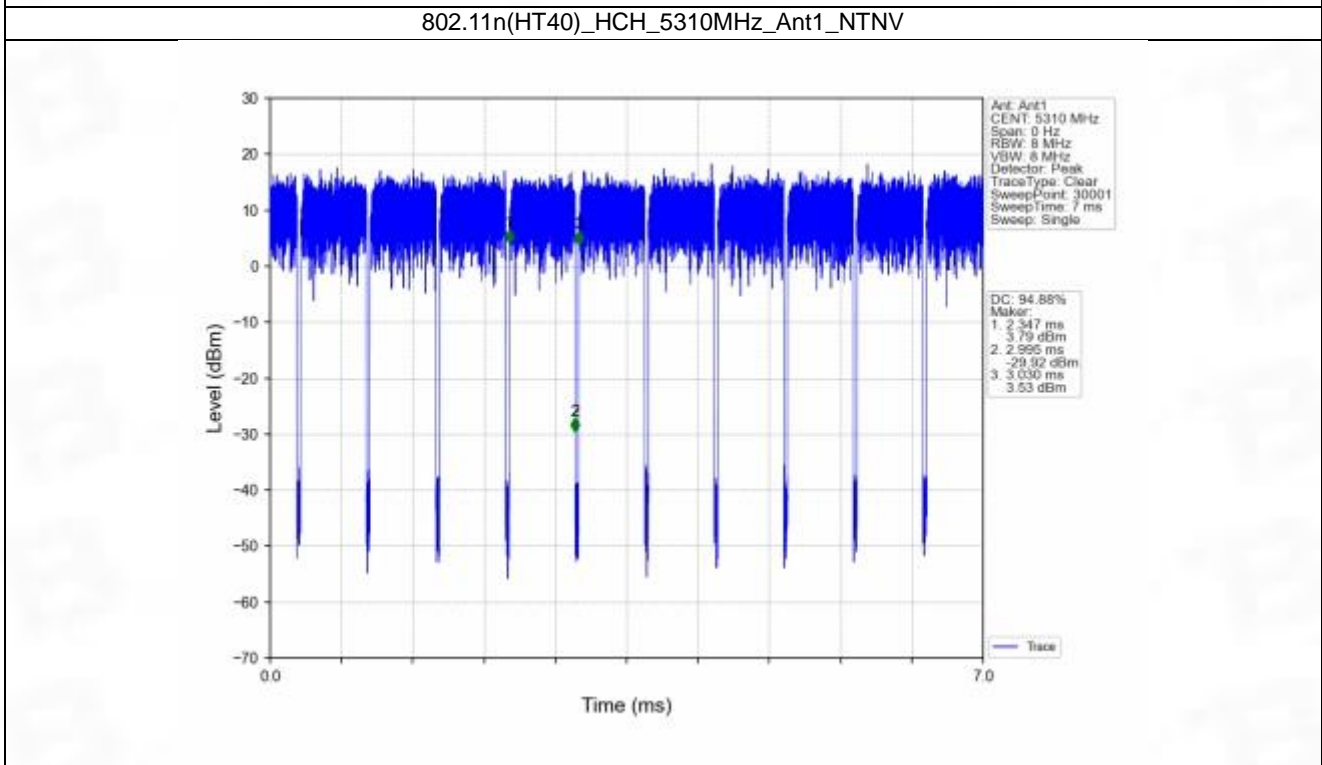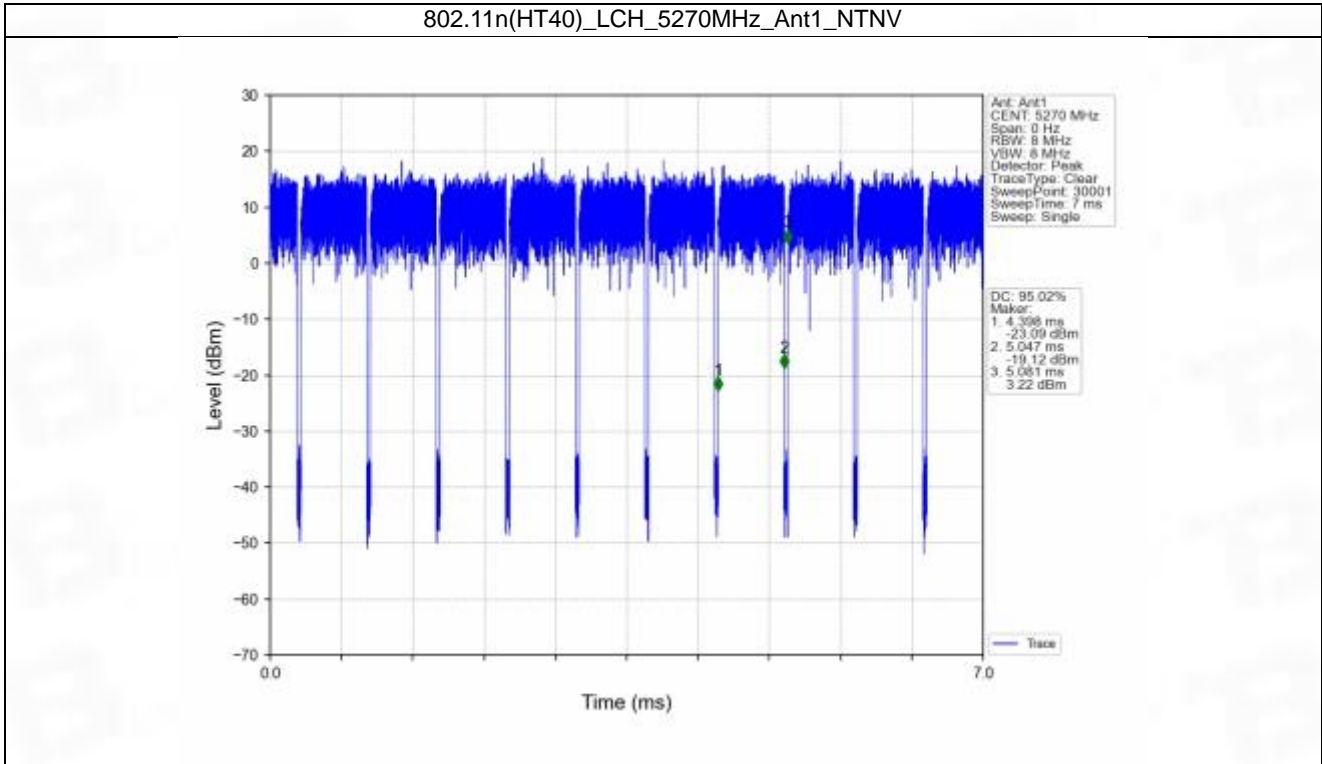

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

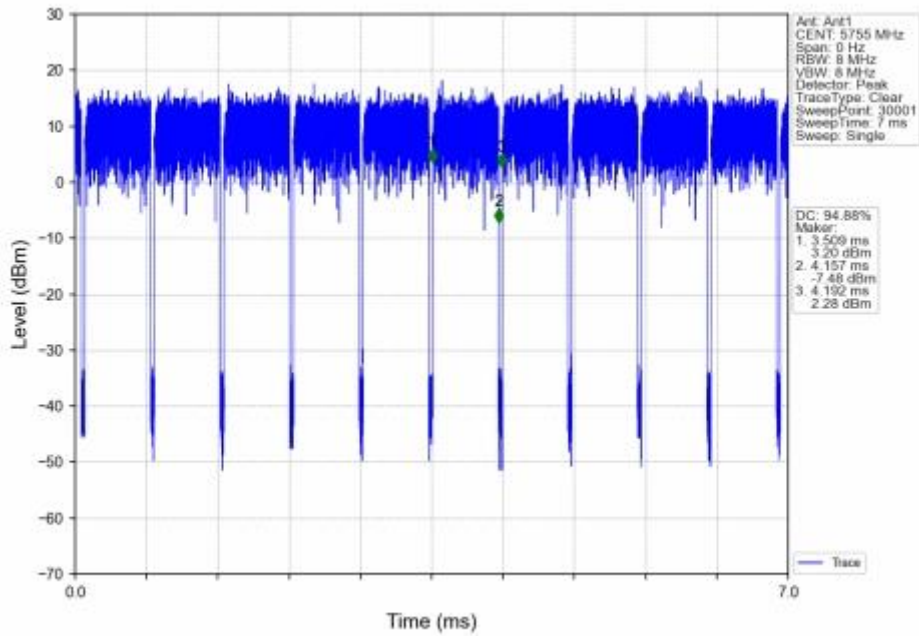

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

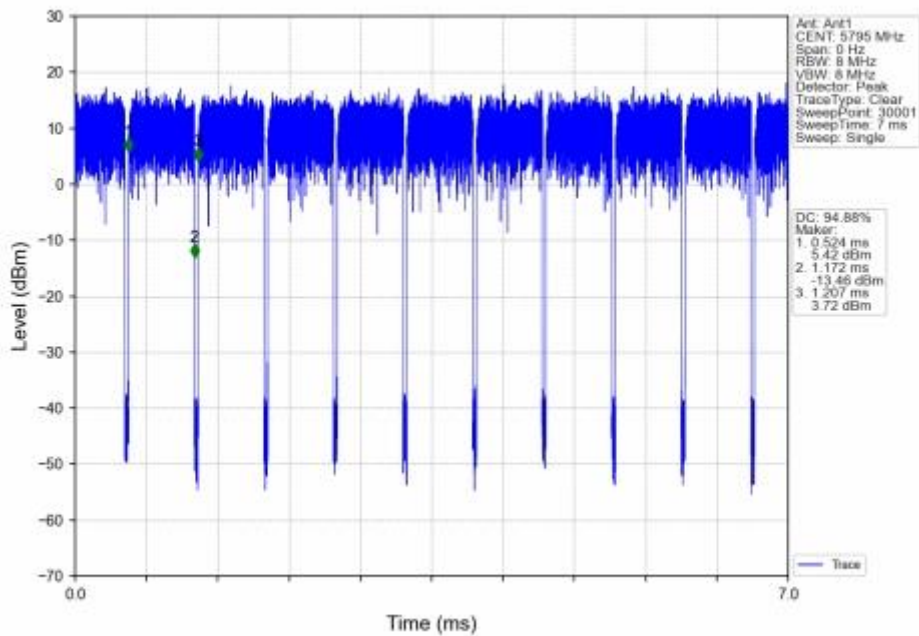


2. Bandwidth



2.1 OBW



2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
802.11a	SISO	5180	1	17.402	Pass
		5200	1	17.521	Pass
		5240	1	17.526	Pass
		5260	1	17.519	Pass
		5300	1	17.414	Pass
		5320	1	17.510	Pass
		5745	1	17.550	Pass
		5785	1	17.554	Pass
802.11n (HT20)	SISO	5825	1	17.566	Pass
		5180	1	18.442	Pass
		5200	1	18.437	Pass
		5240	1	18.487	Pass
		5260	1	18.402	Pass
		5300	1	18.463	Pass
		5320	1	18.468	Pass
		5745	1	18.532	Pass
802.11n (HT40)	SISO	5785	1	18.521	Pass
		5825	1	18.501	Pass
		5190	1	36.891	Pass
		5230	1	36.673	Pass
		5270	1	36.831	Pass
		5310	1	36.932	Pass
		5755	1	36.926	Pass
		5795	1	36.976	Pass


2.1.2 Test Graph

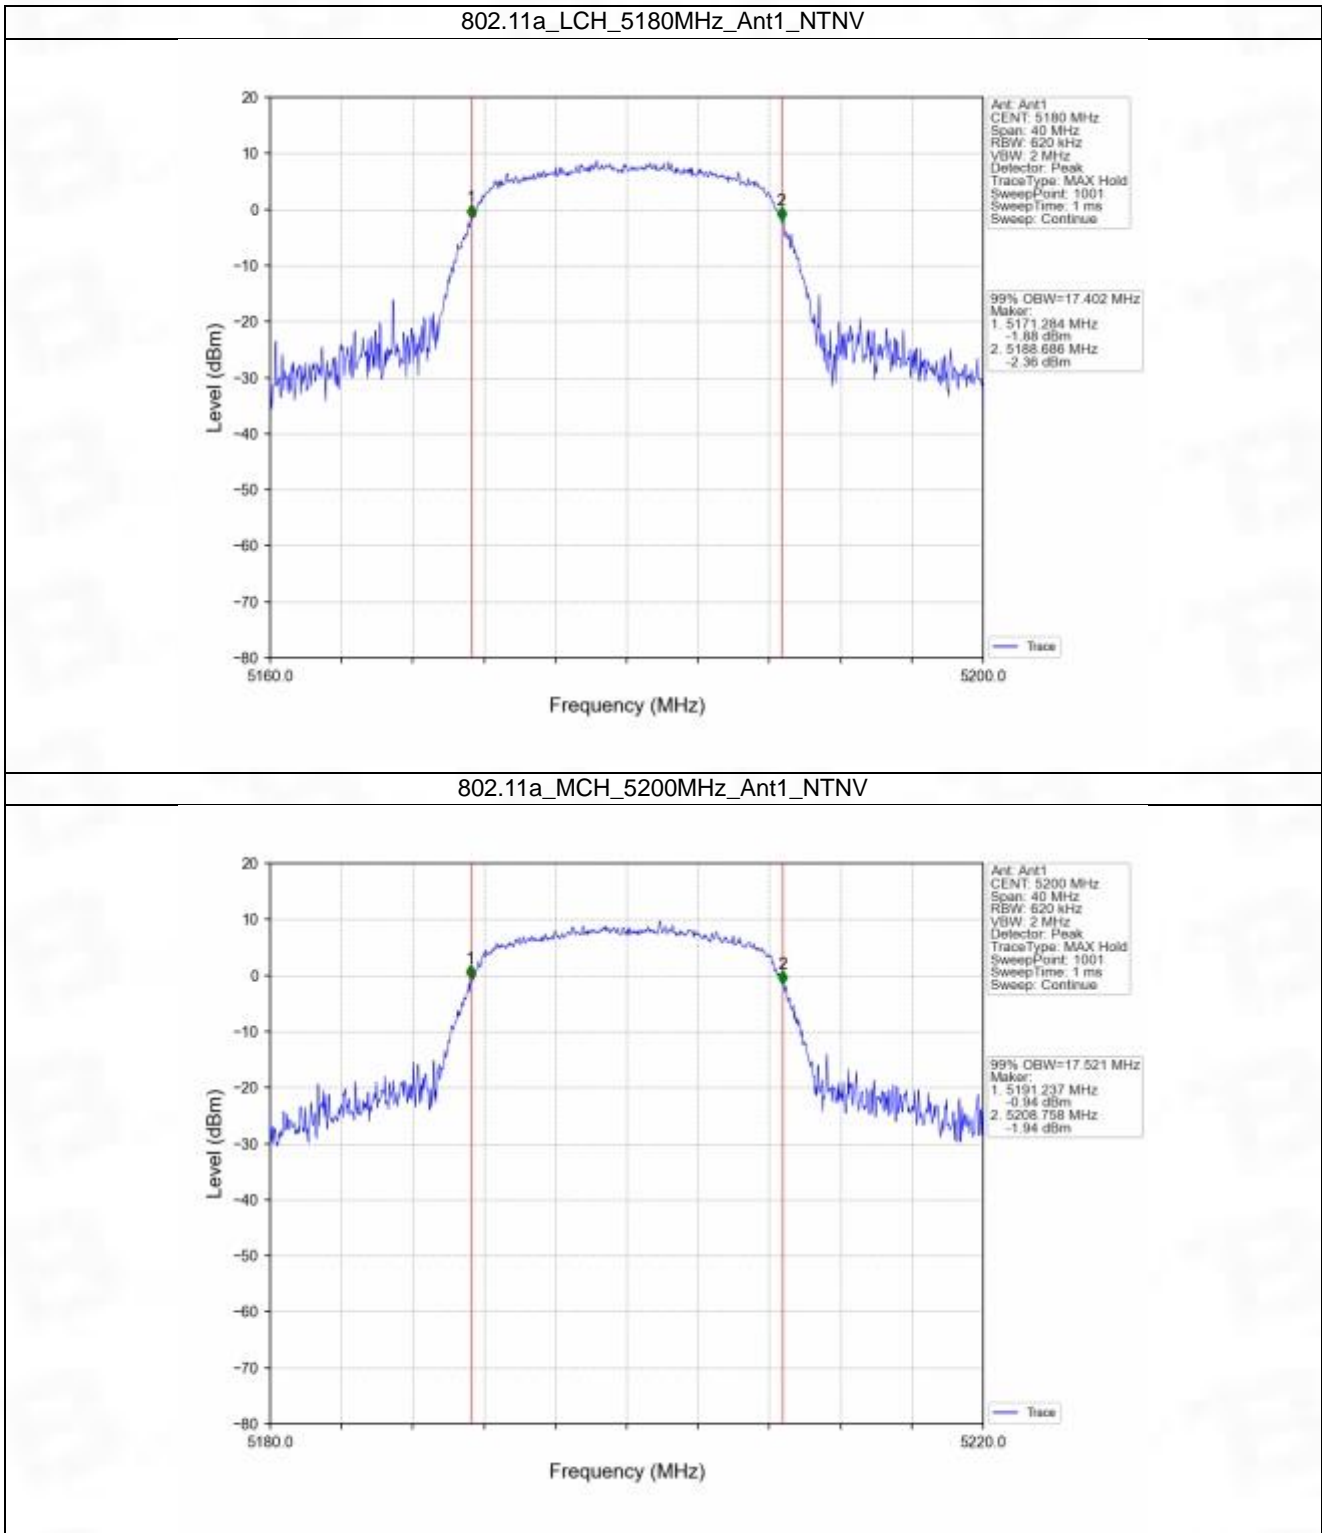

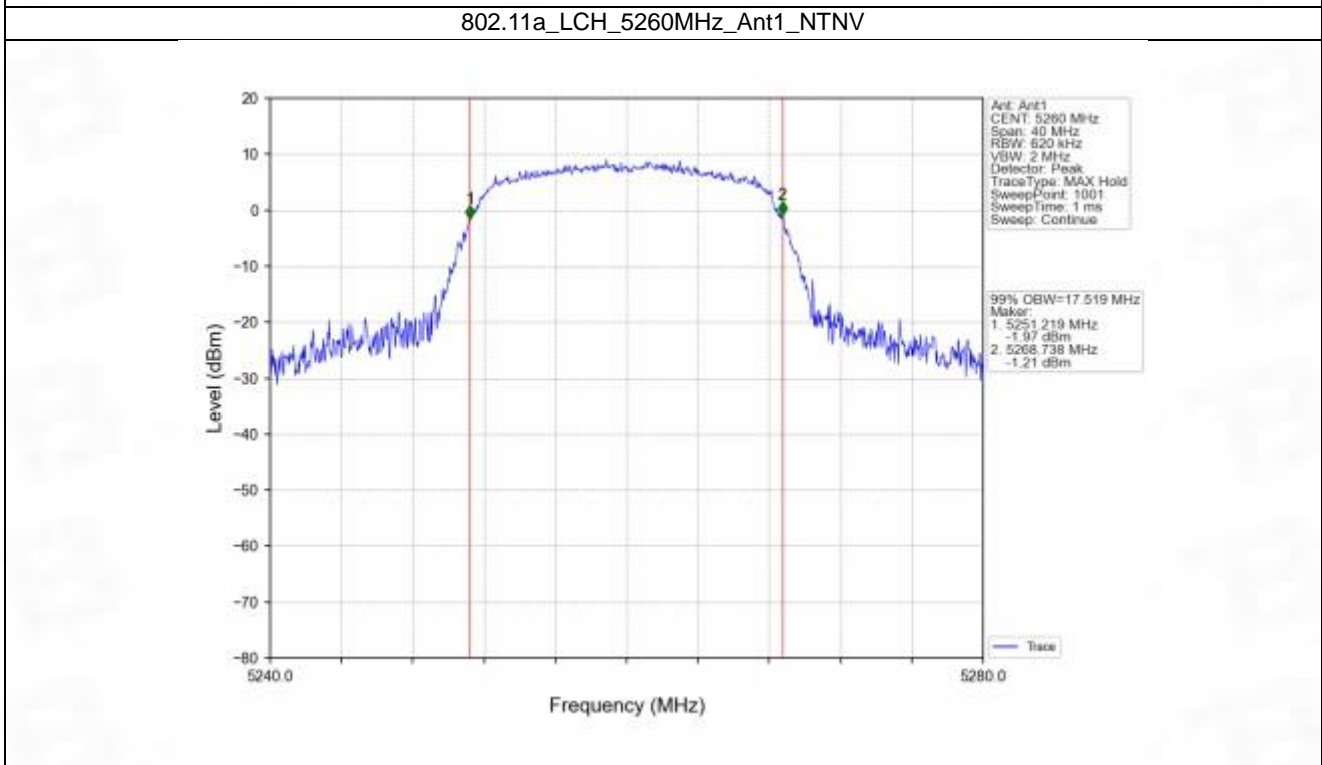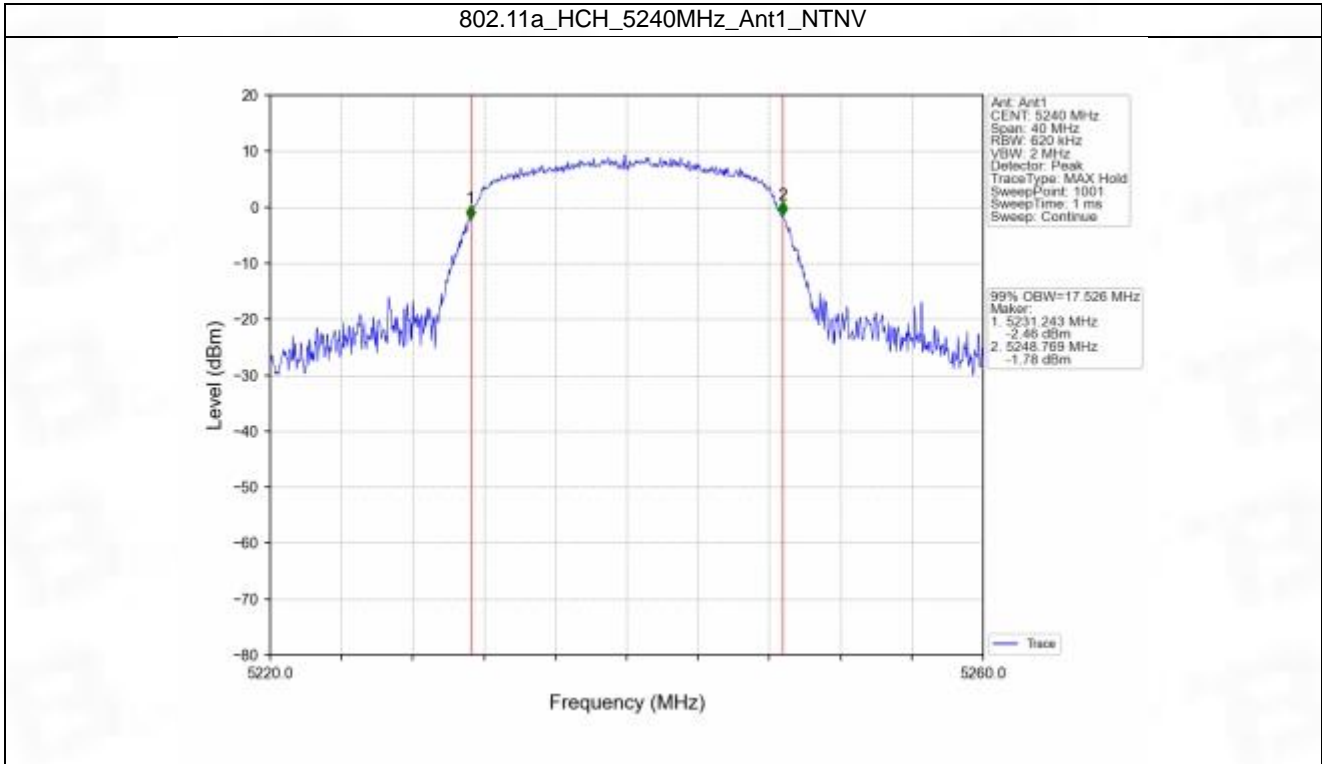


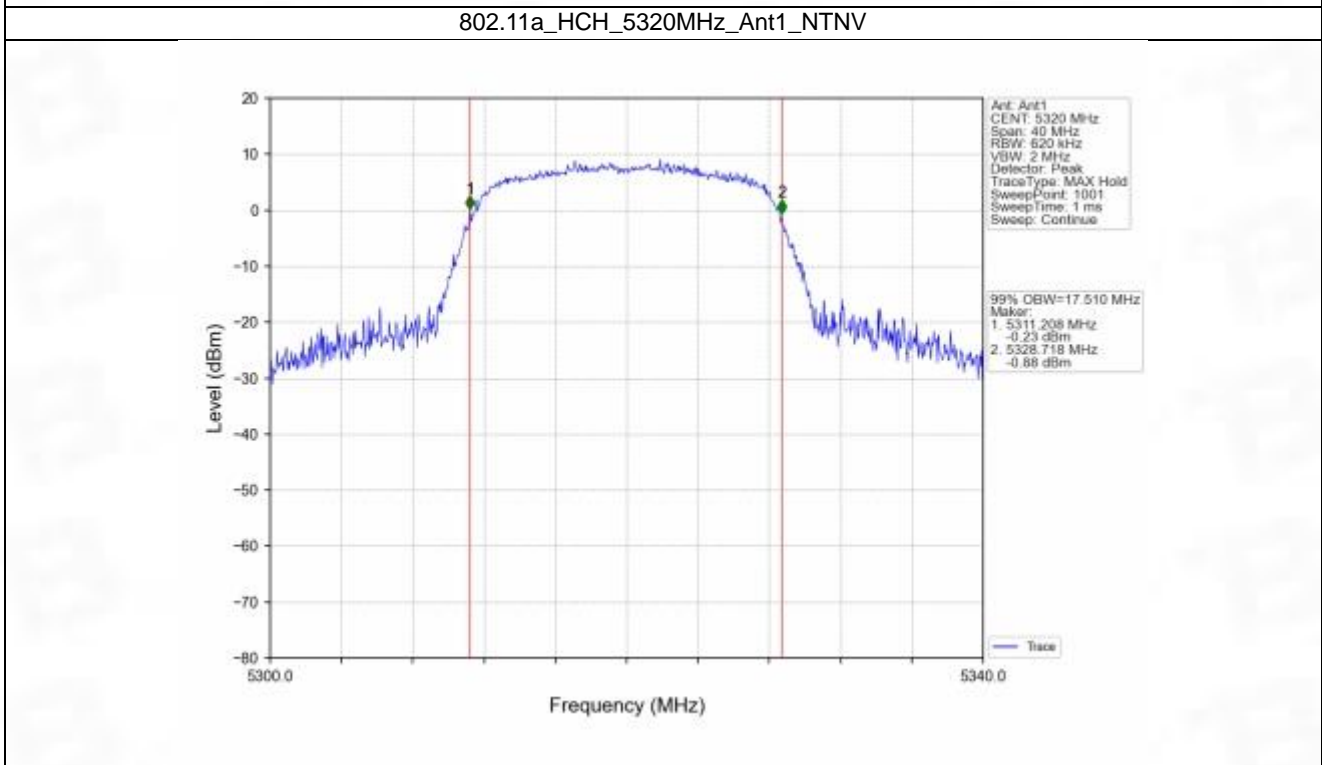
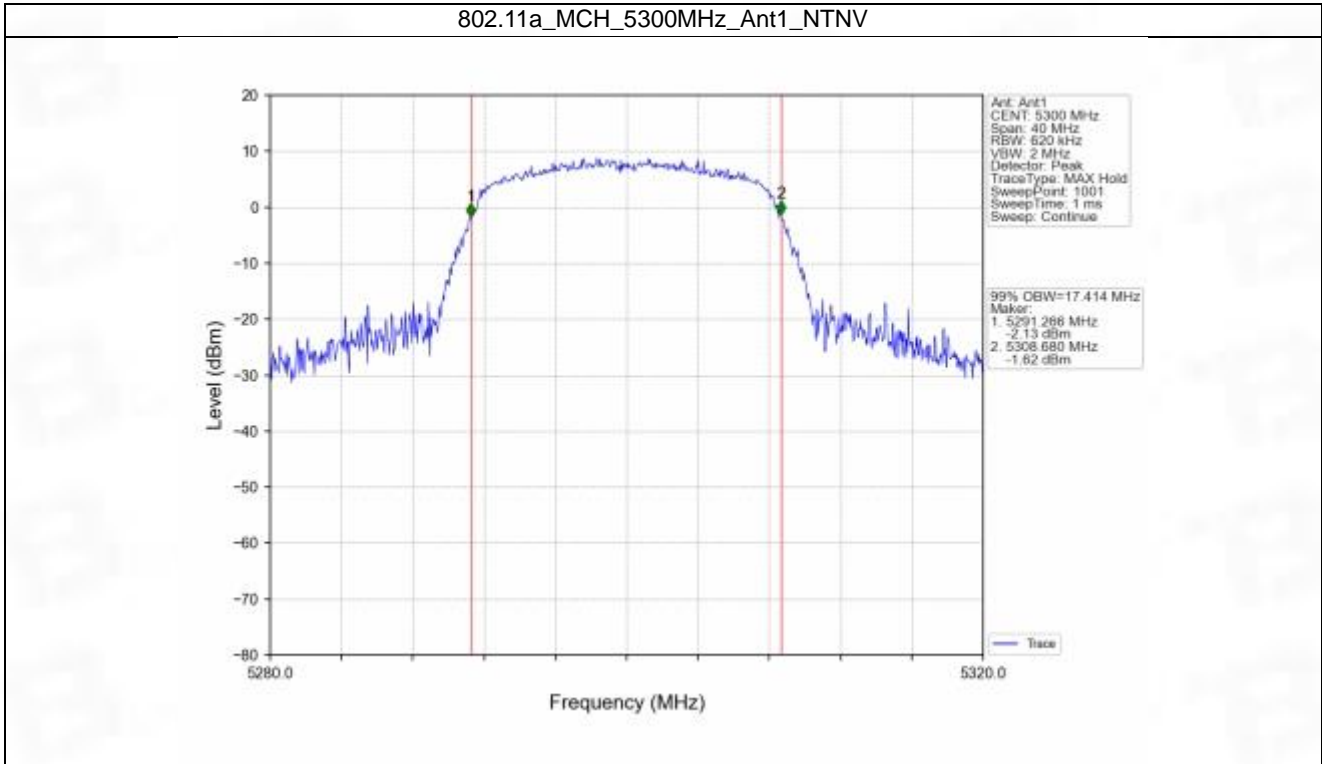


802.11a_LCH_5745MHz_Ant1_NTNV

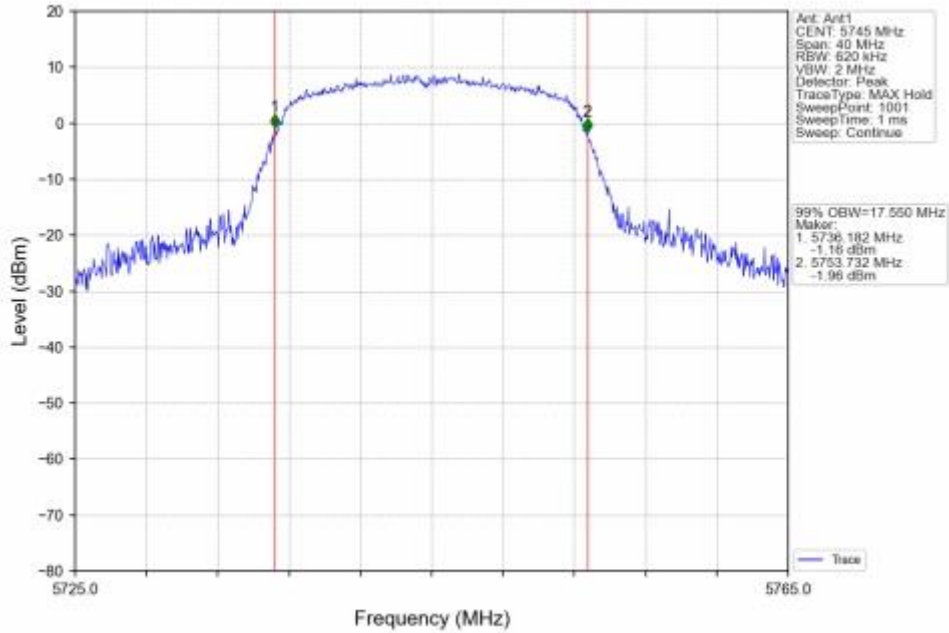


802.11a_MCH_5785MHz_Ant1_NTNV

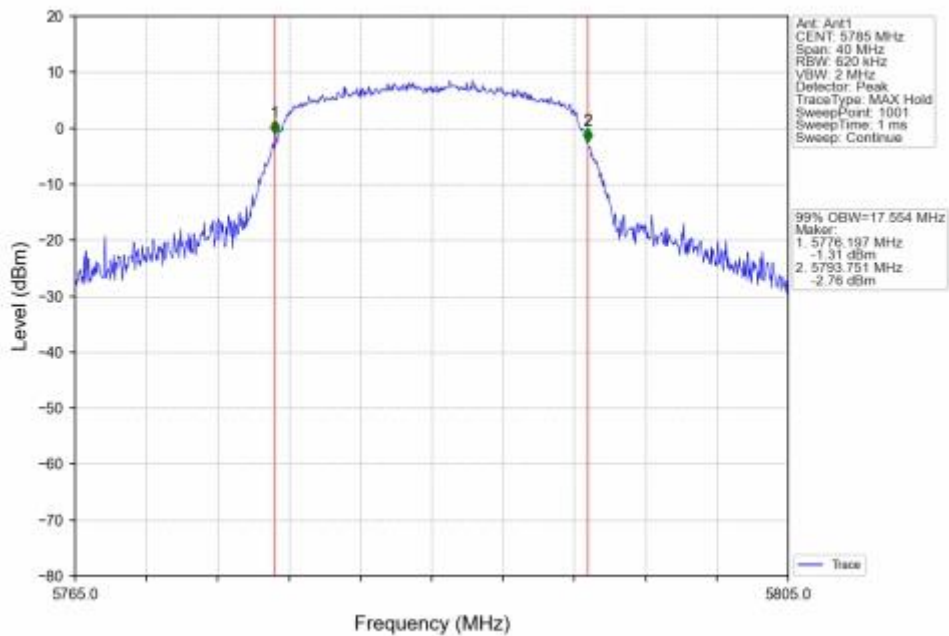


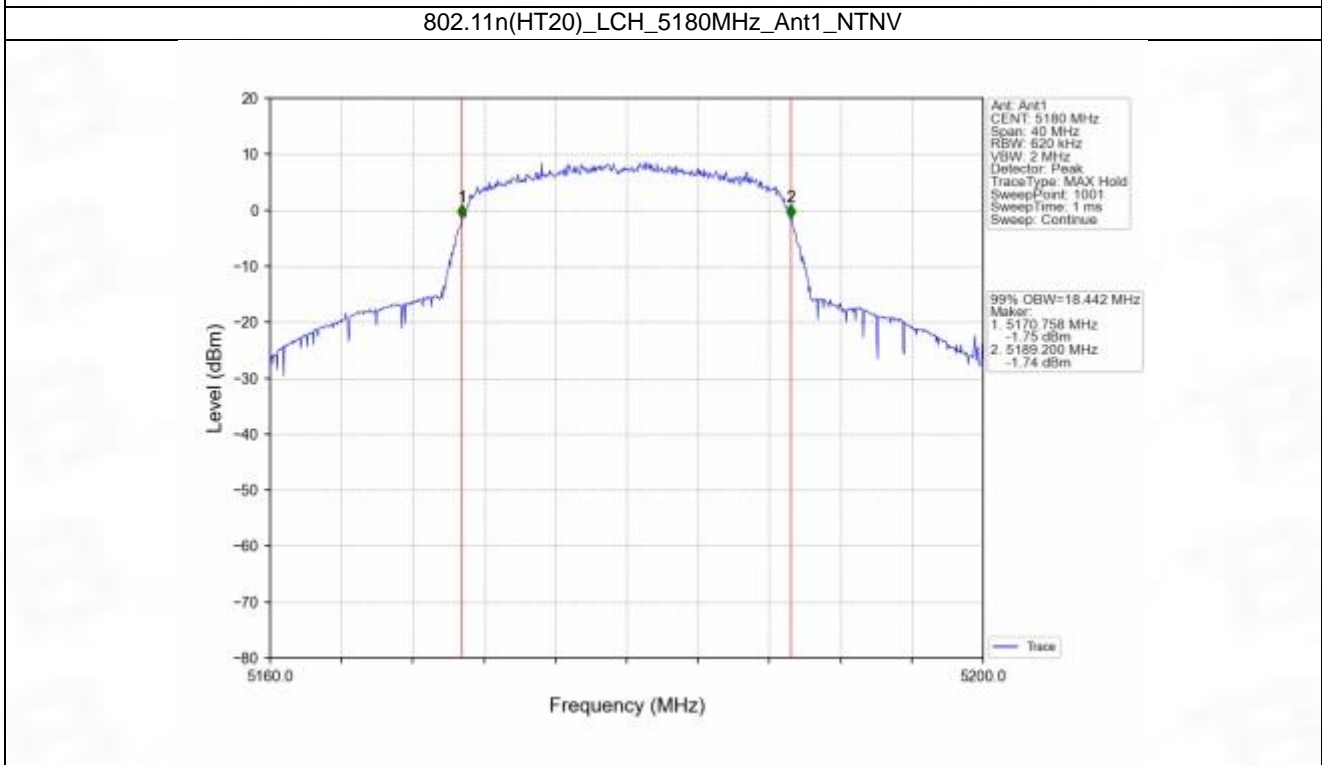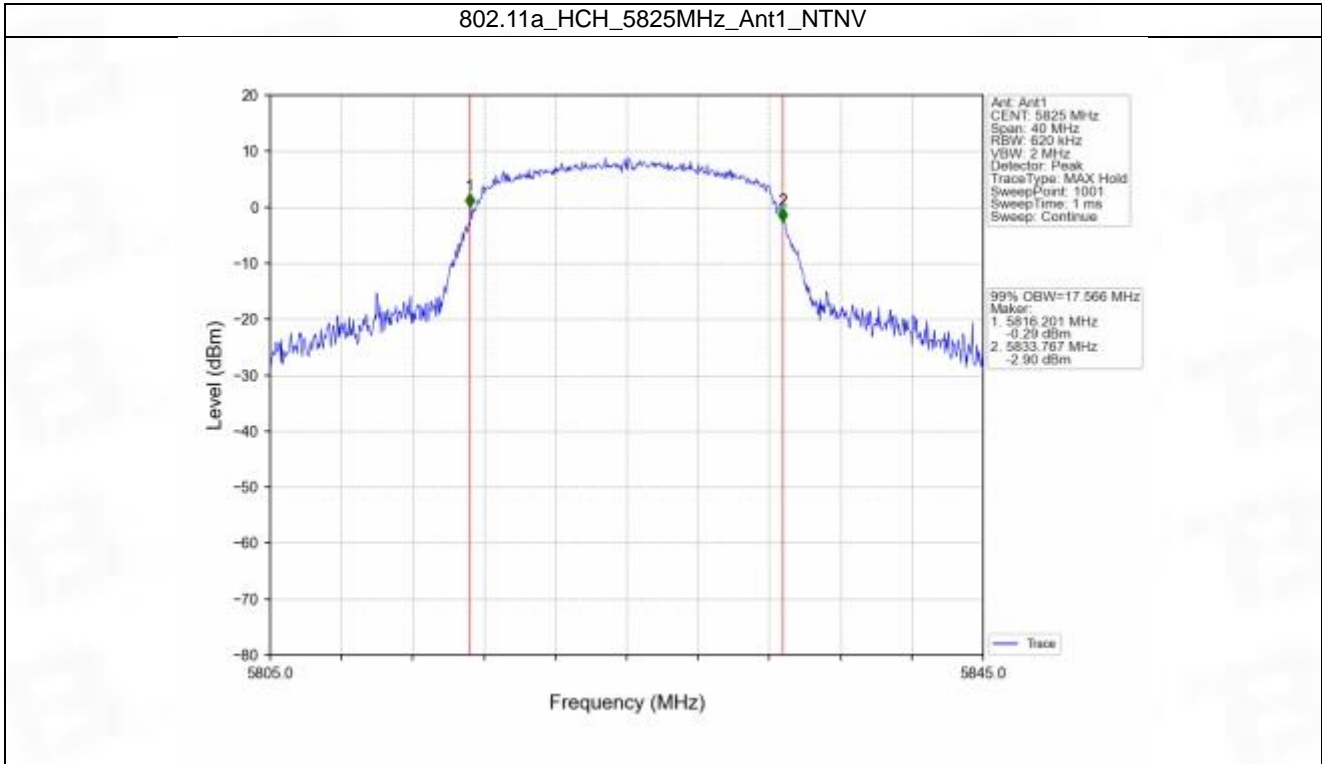


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

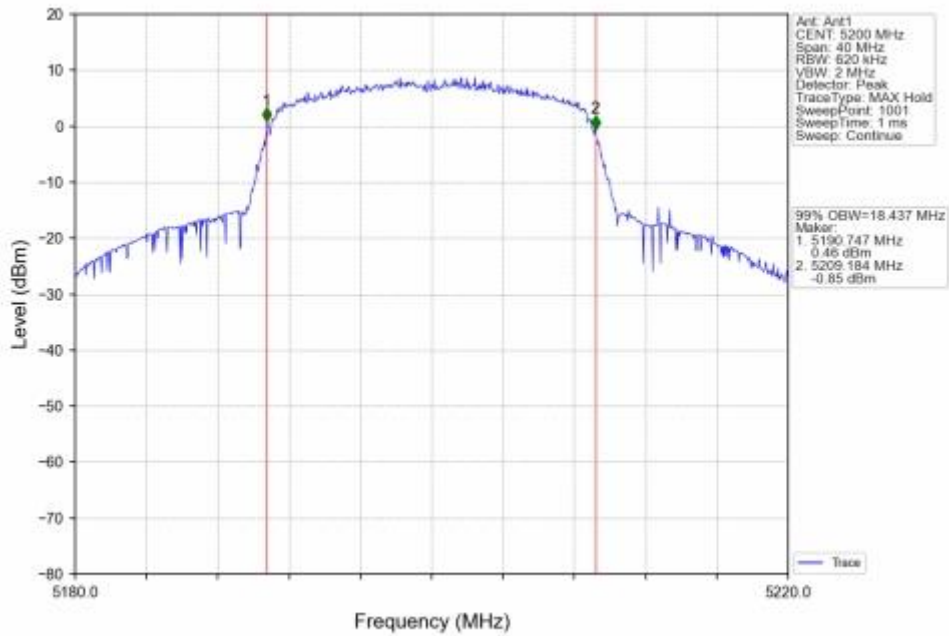


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

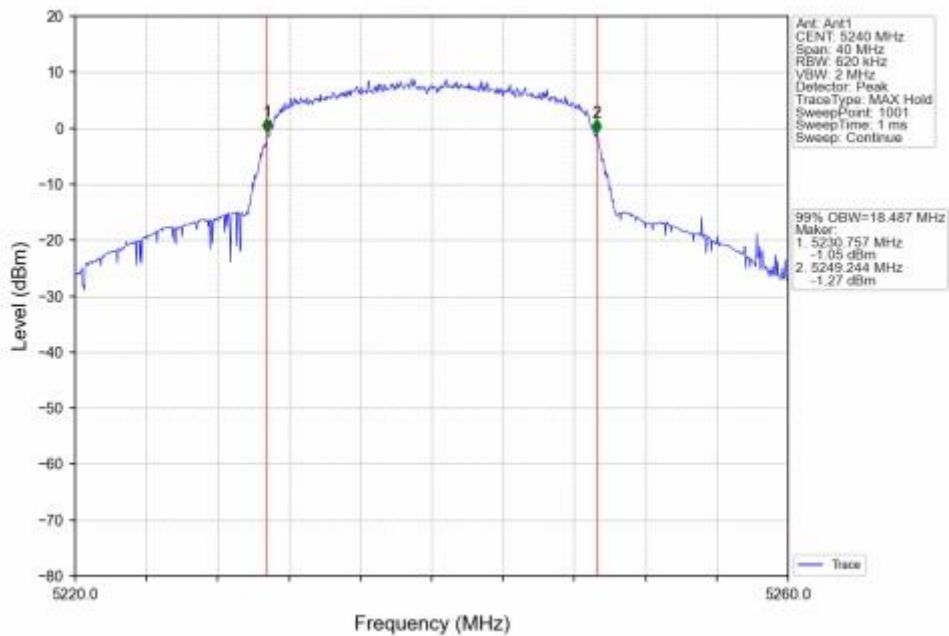


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

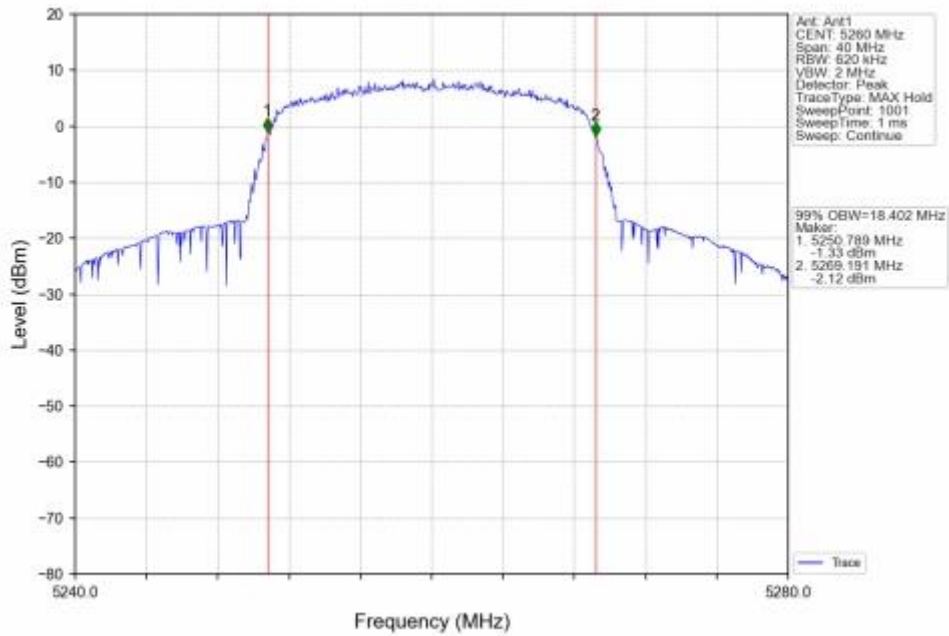


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

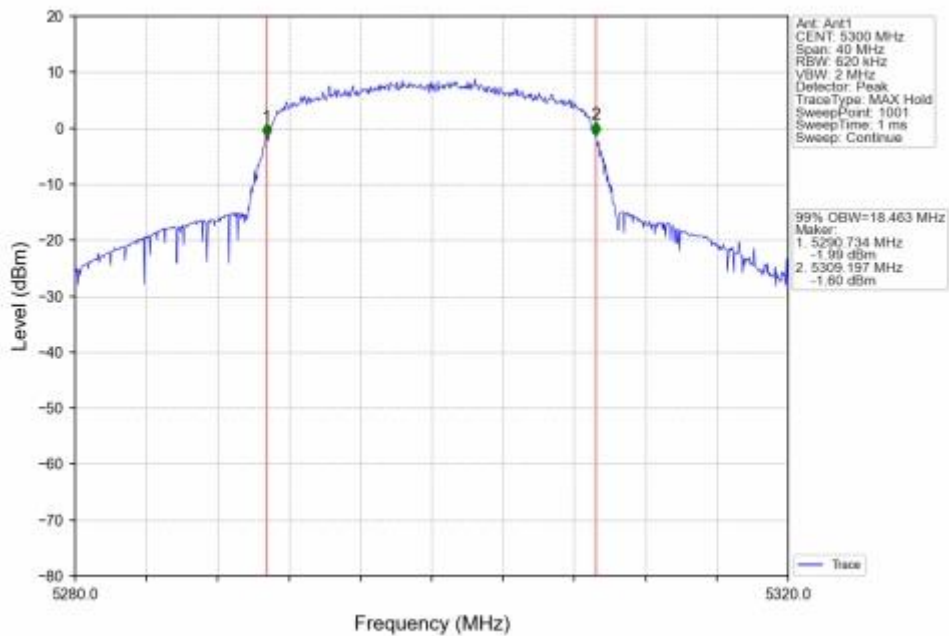


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

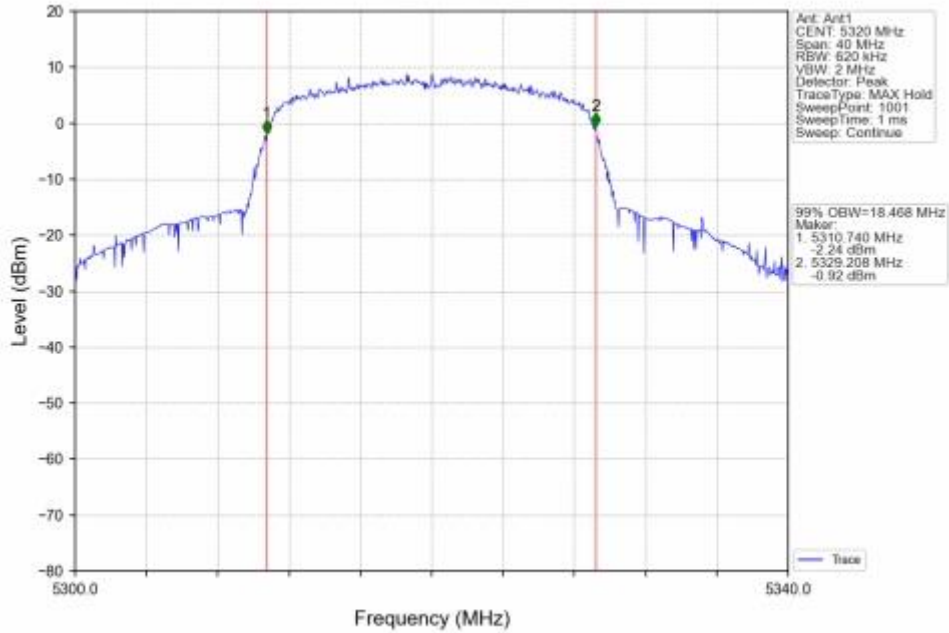


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

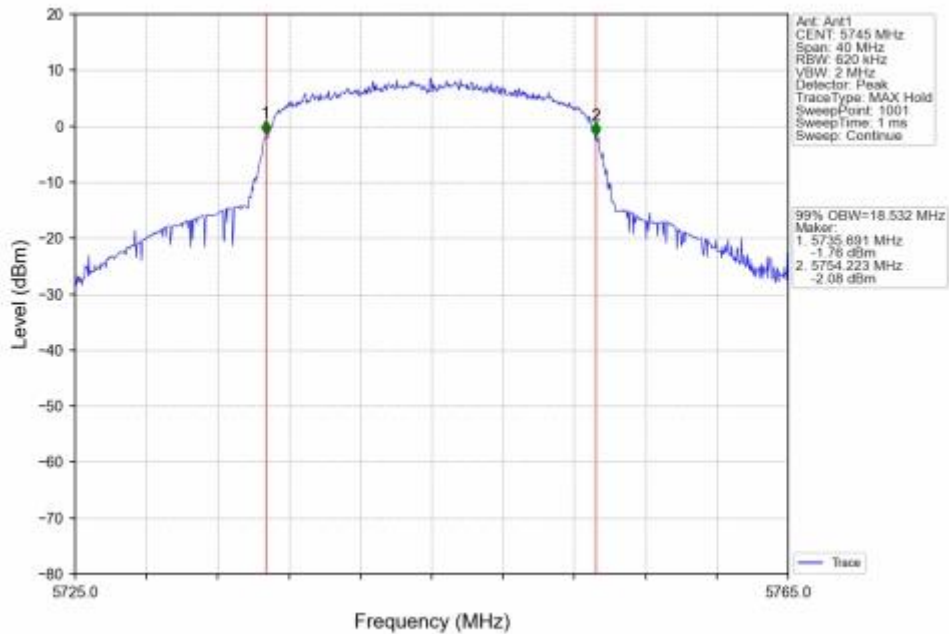


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

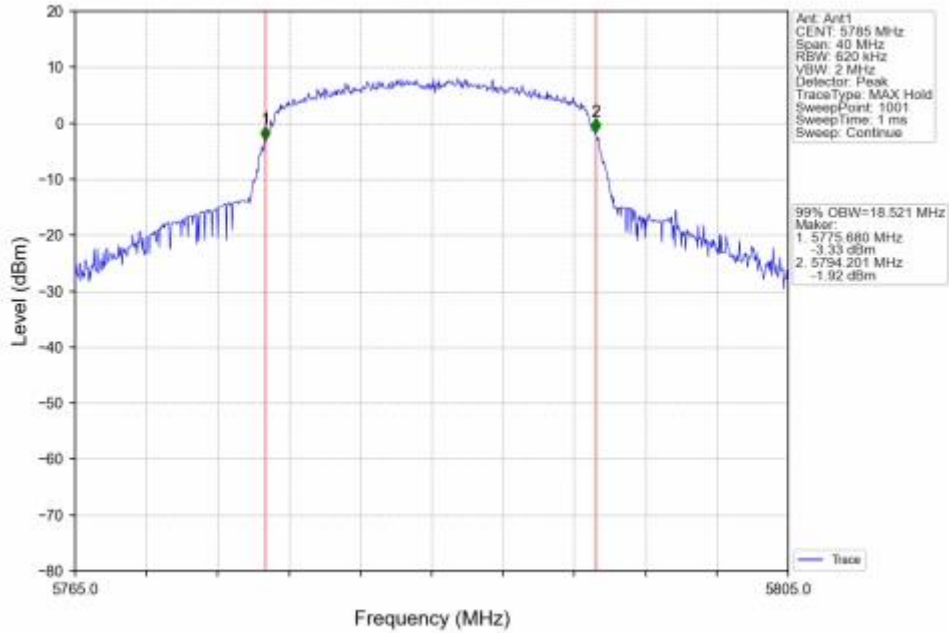


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

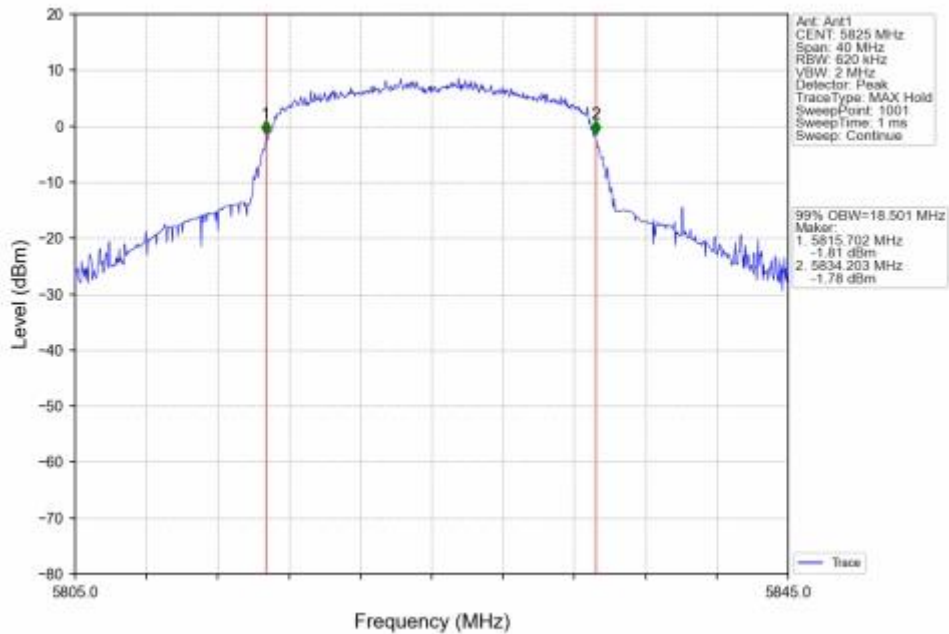


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

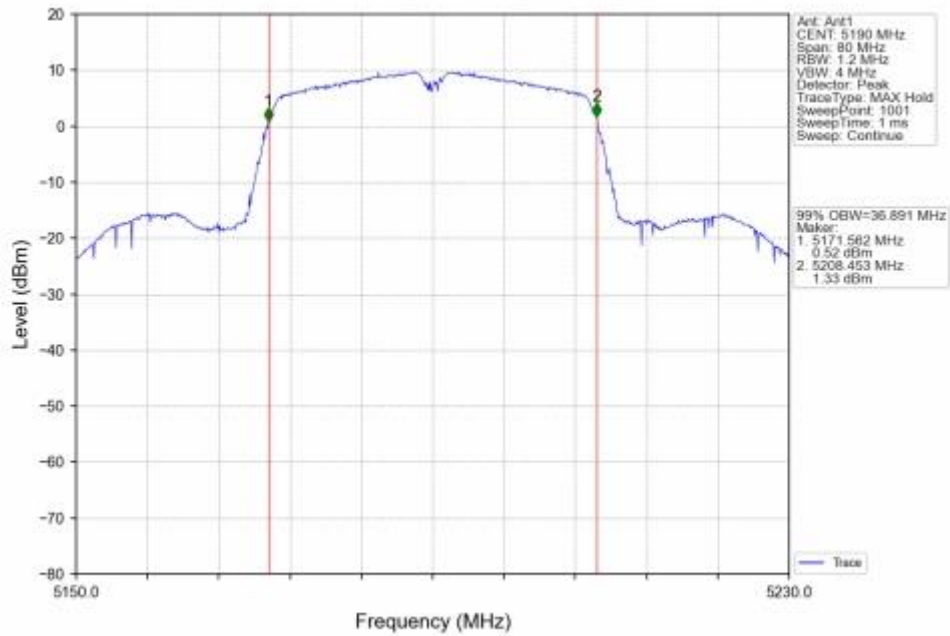


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

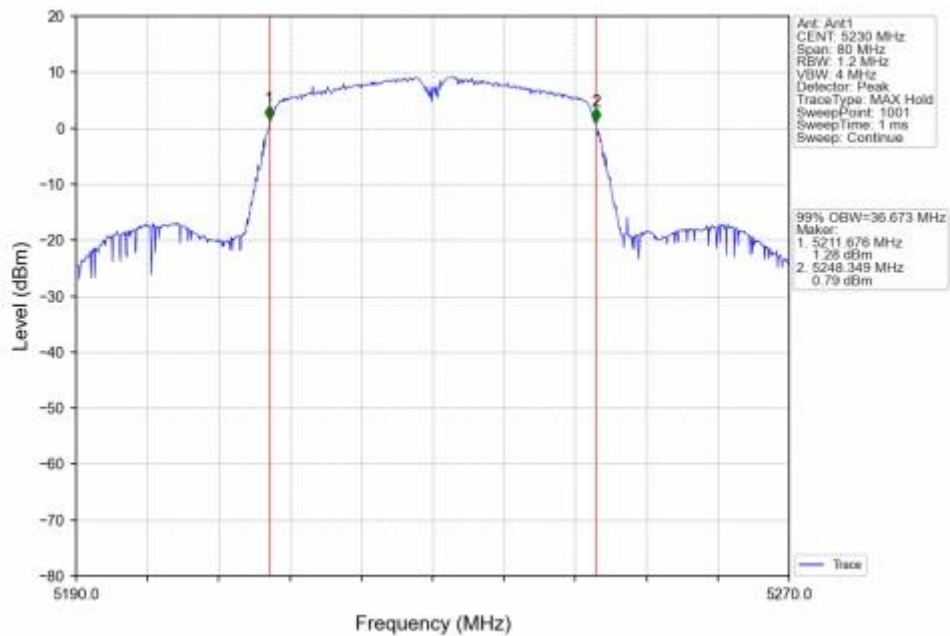


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

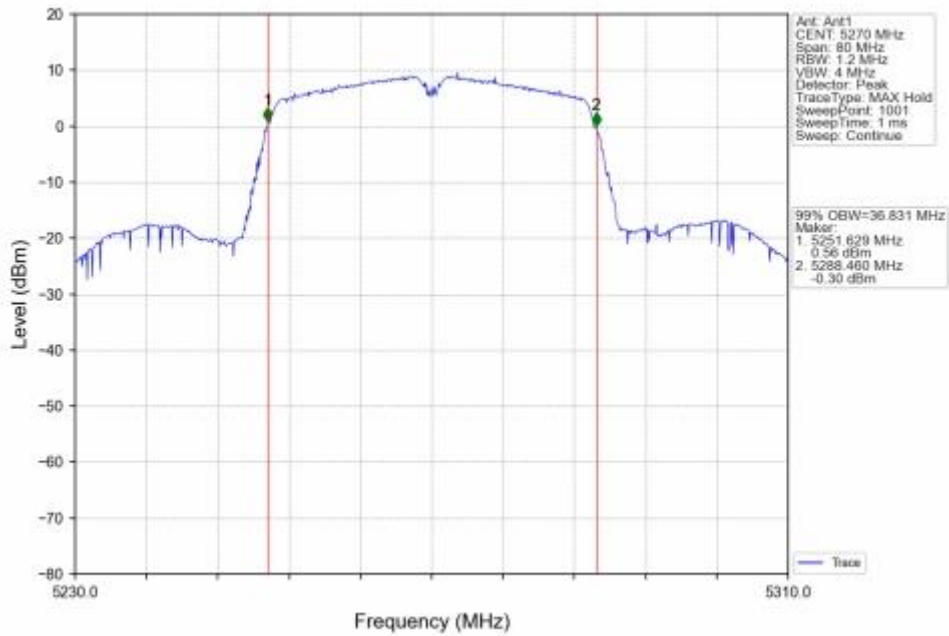


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

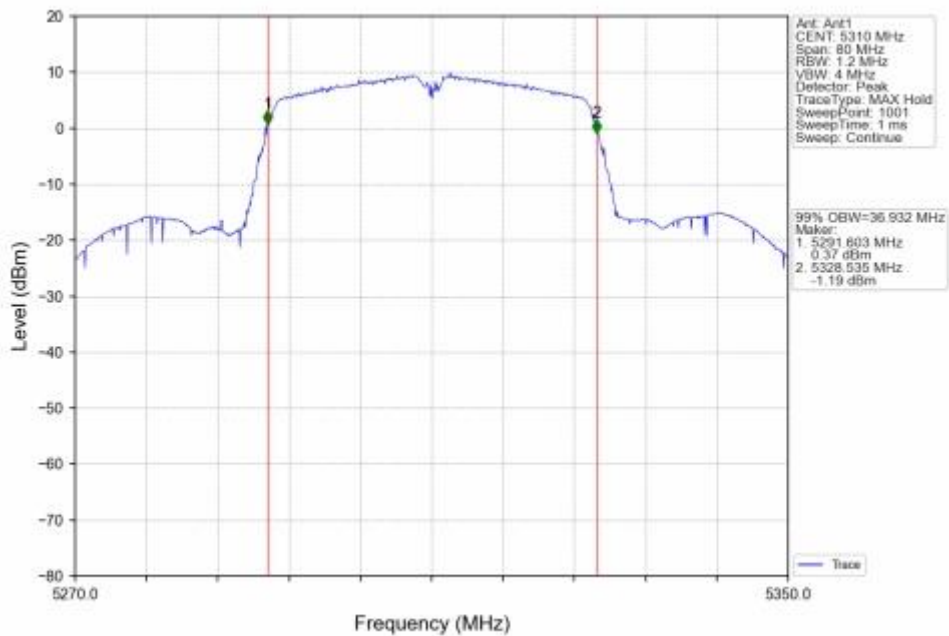

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

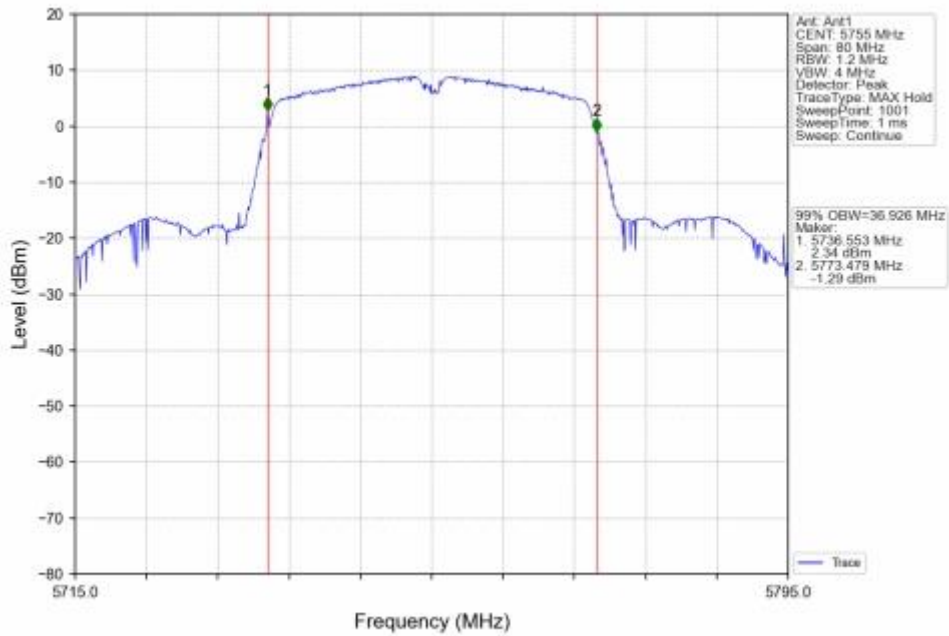

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

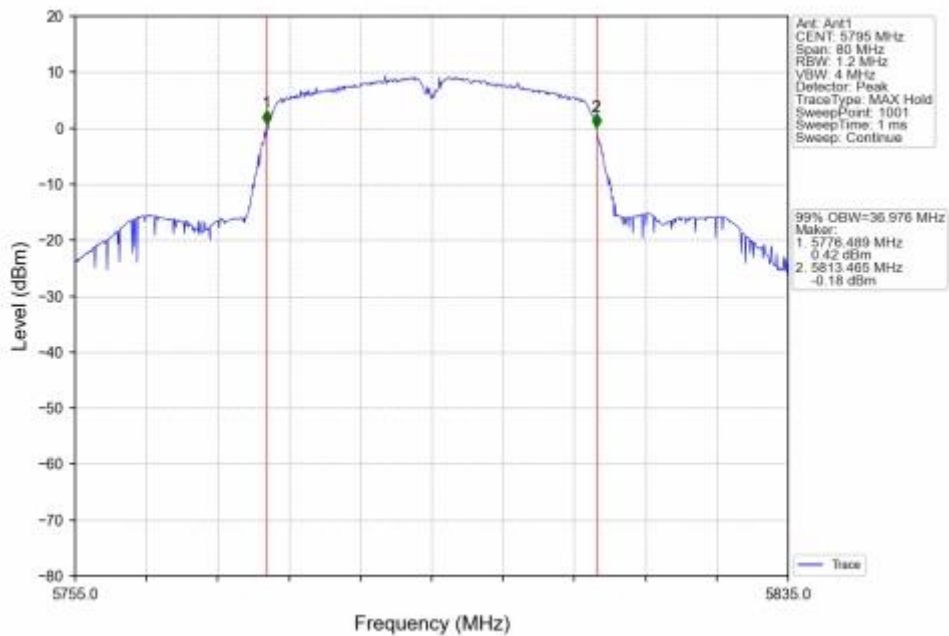


2.2 6dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	1	15.147	≥ 0.5	Pass
		5785	1	15.162	≥ 0.5	Pass
		5825	1	15.151	≥ 0.5	Pass
802.11n (HT20)	SISO	5745	1	15.148	≥ 0.5	Pass
		5785	1	15.156	≥ 0.5	Pass
		5825	1	15.148	≥ 0.5	Pass
802.11n (HT40)	SISO	5755	1	35.162	≥ 0.5	Pass
		5795	1	35.157	≥ 0.5	Pass


2.2.2 Test Graph

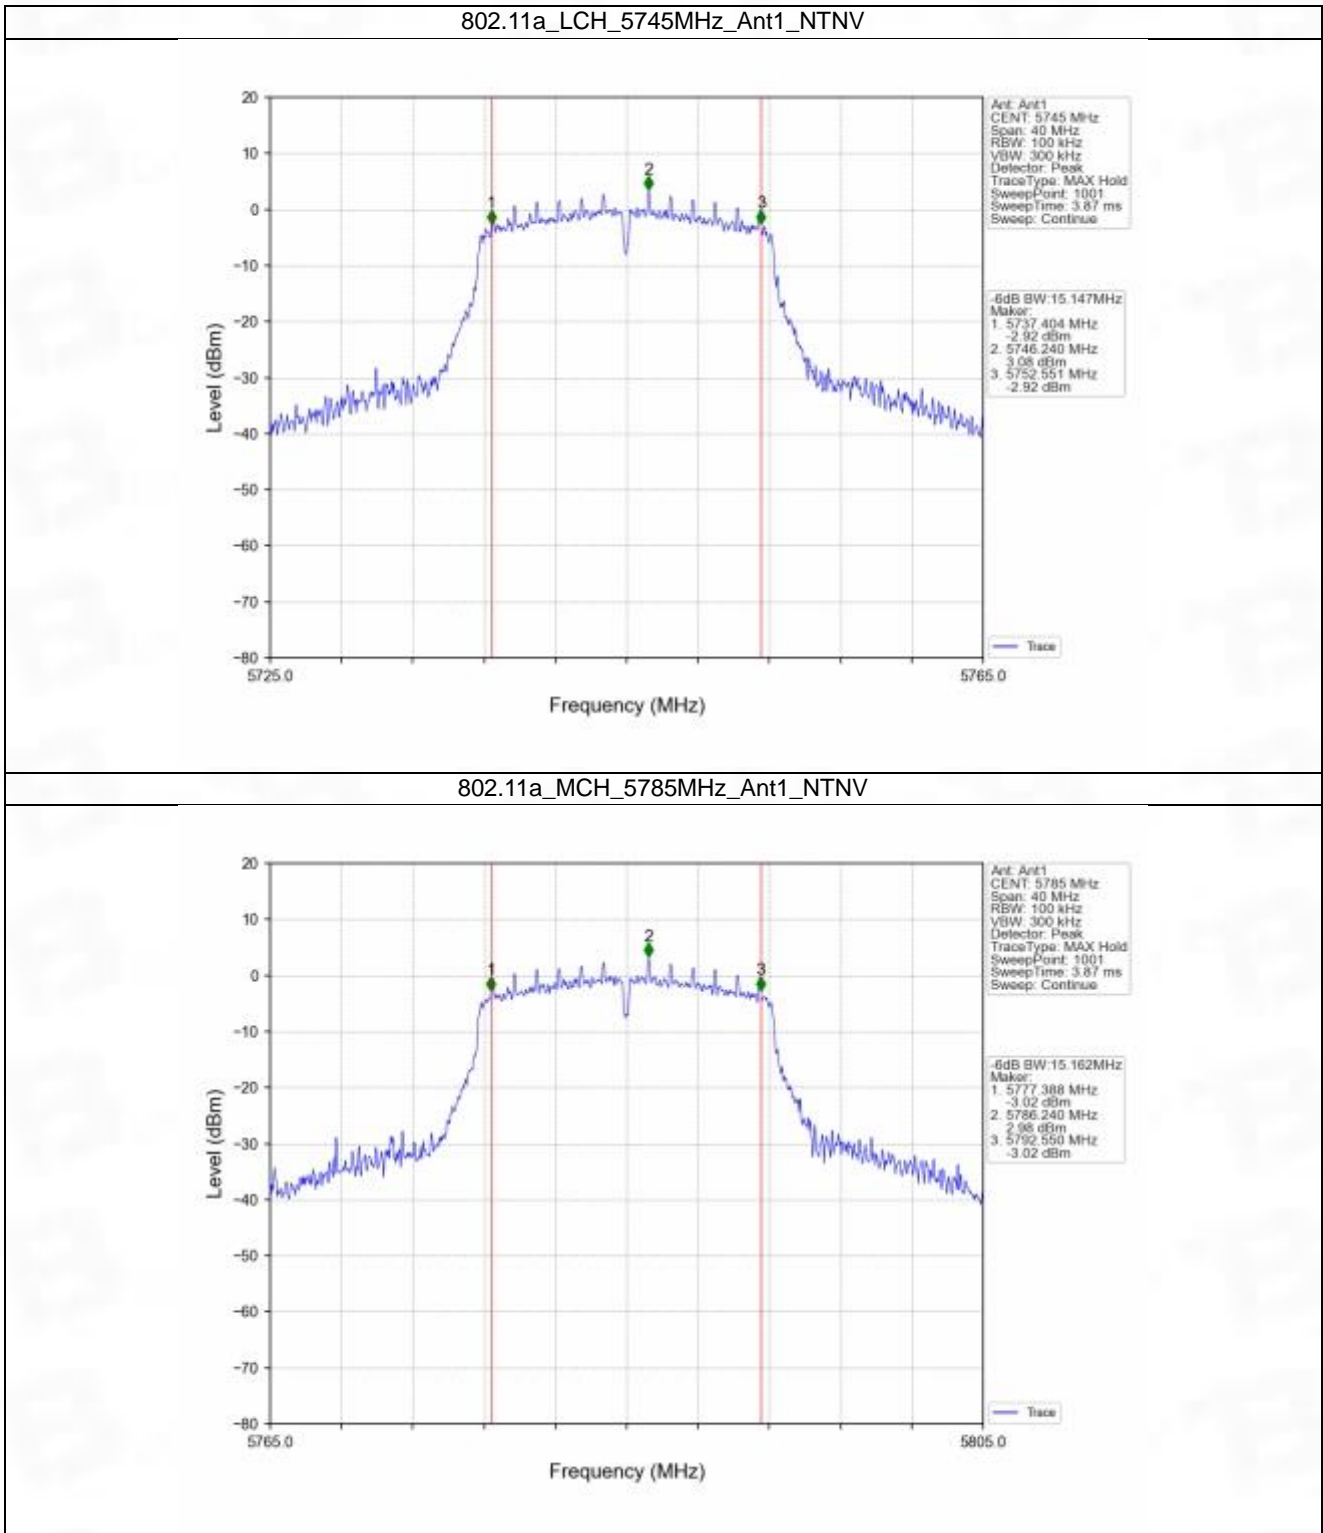


802.11a_HCH_5825MHz_Ant1_NTNV

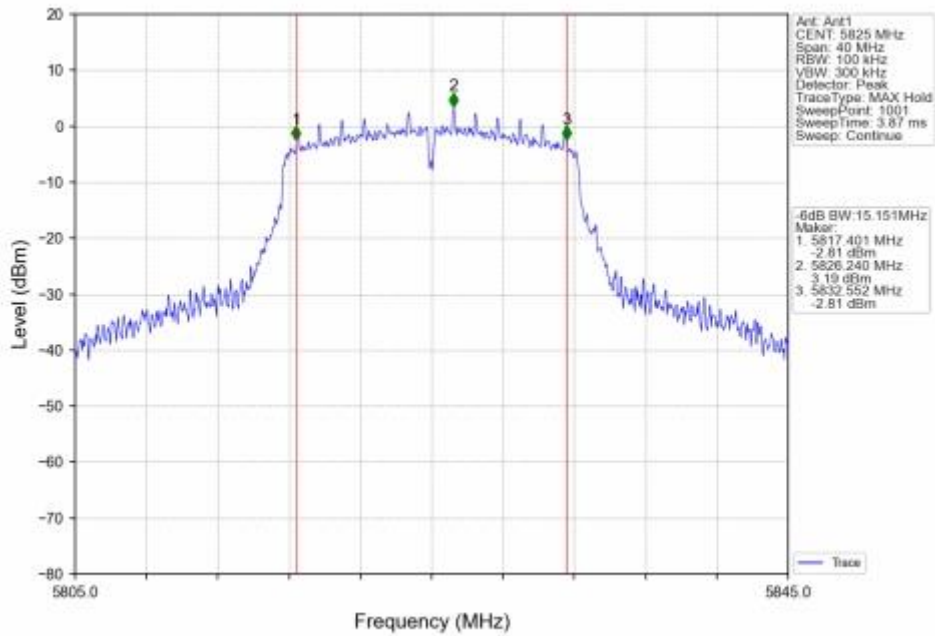


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

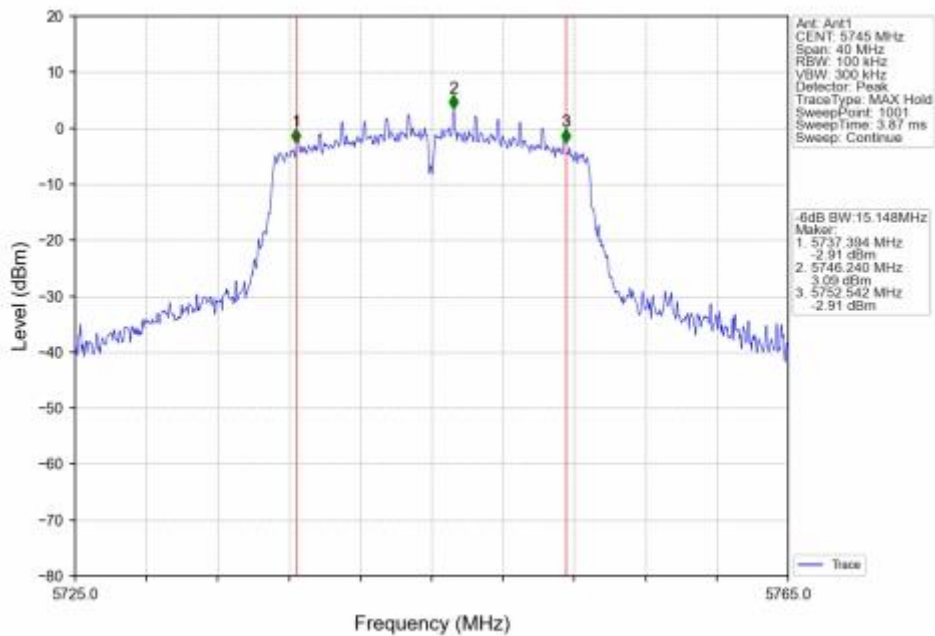


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

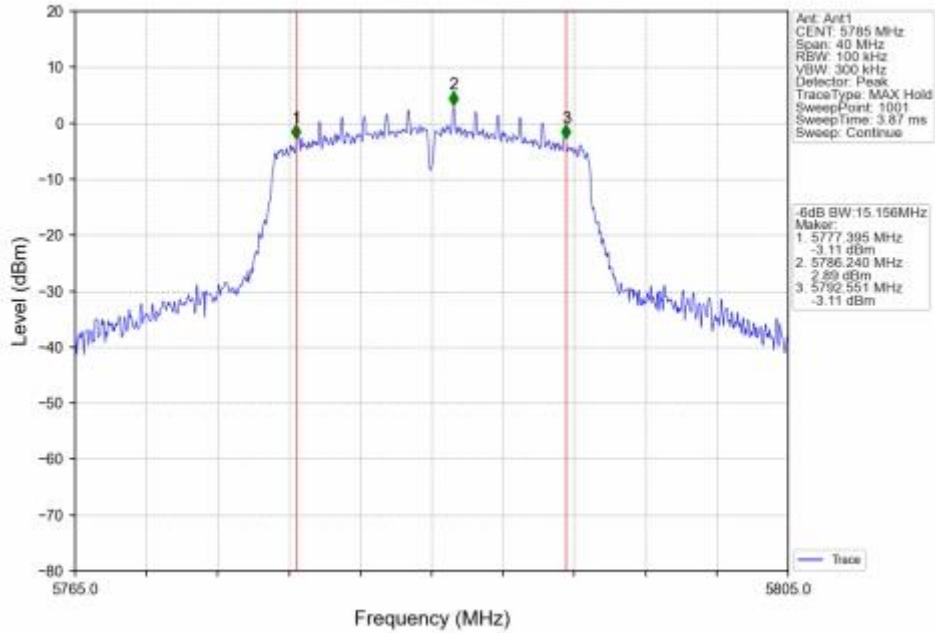


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

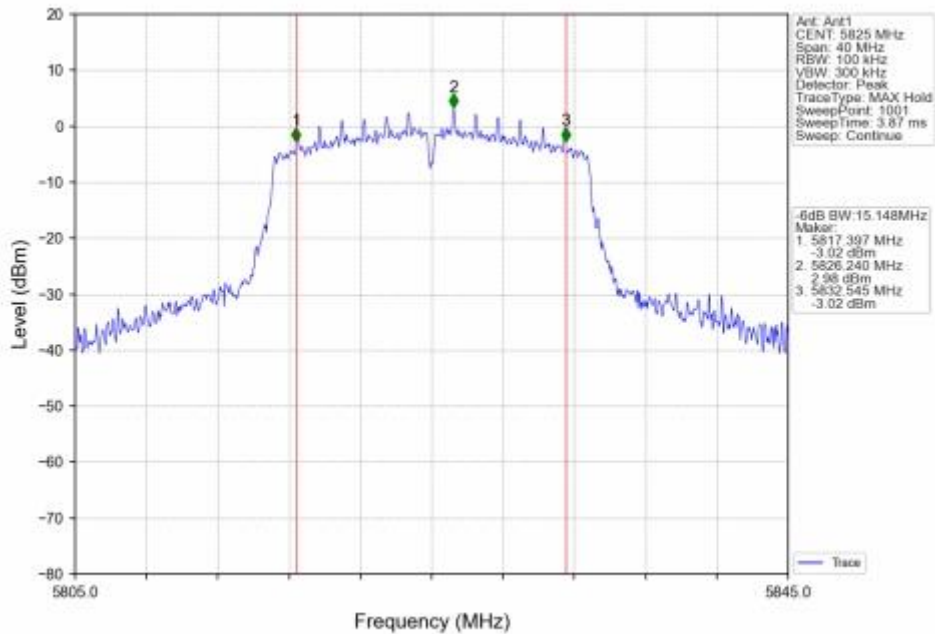

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

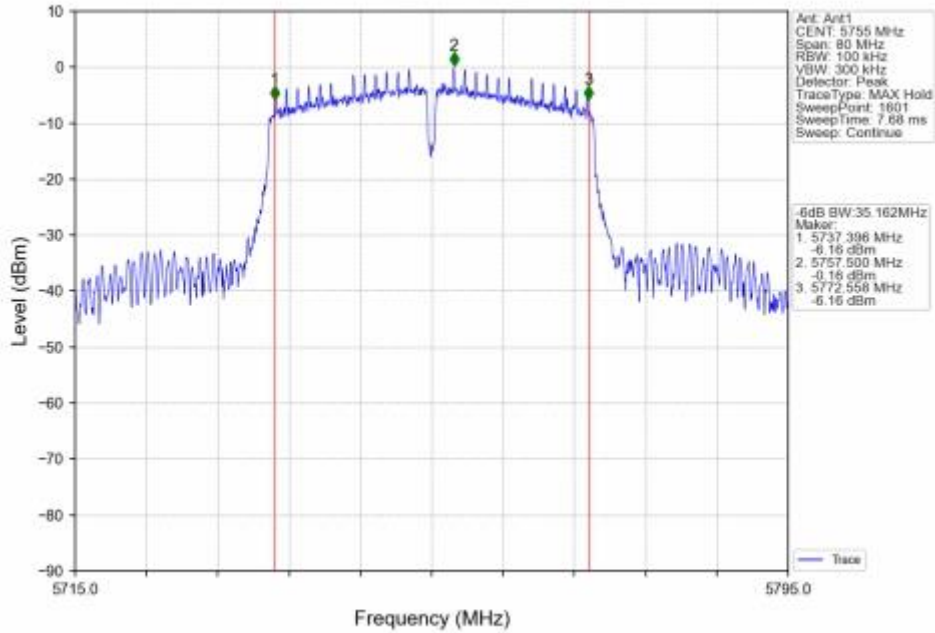

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

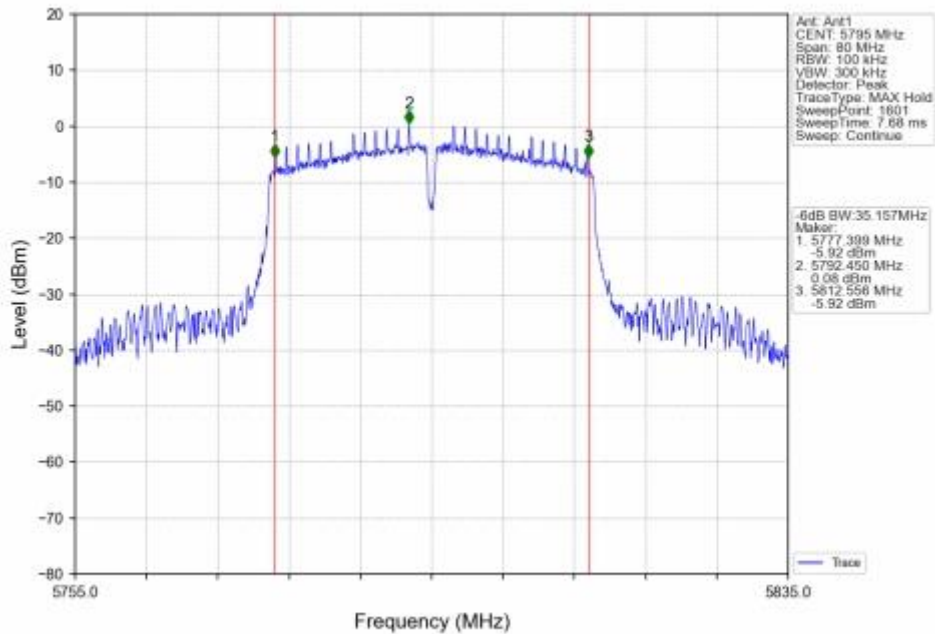


2.3 26dB BW


2.3.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)	Verdict
				Result	
802.11a	SISO	5180	1	20.029	Pass
		5200	1	19.972	Pass
		5240	1	19.971	Pass
		5260	1	20.698	Pass
		5300	1	20.083	Pass
		5320	1	19.899	Pass
802.11n (HT20)	SISO	5180	1	20.196	Pass
		5200	1	20.215	Pass
		5240	1	20.193	Pass
		5260	1	20.348	Pass
		5300	1	20.279	Pass
		5320	1	20.342	Pass
802.11n (HT40)	SISO	5190	1	41.038	Pass
		5230	1	40.829	Pass
		5270	1	40.483	Pass
		5310	1	40.604	Pass


2.3.2 Test Graph

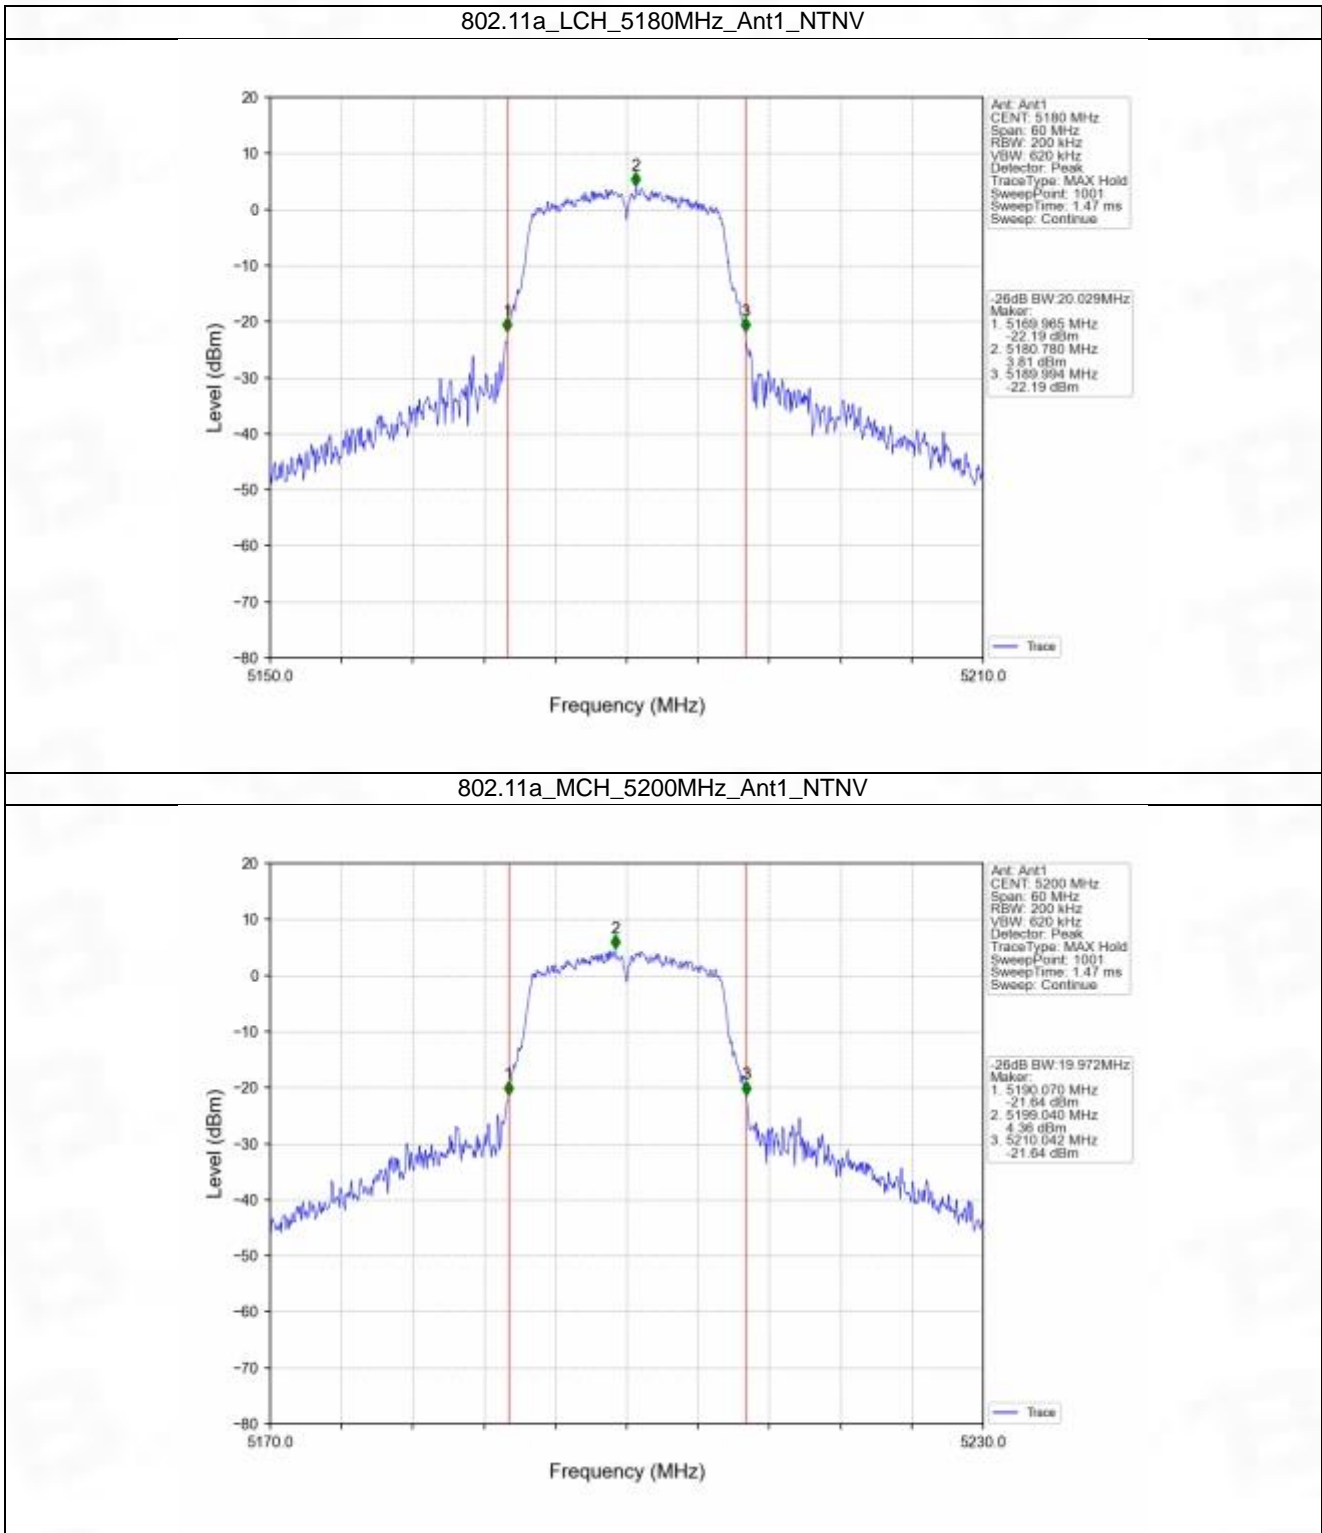


802.11a_HCH_5240MHz_Ant1_NTNV

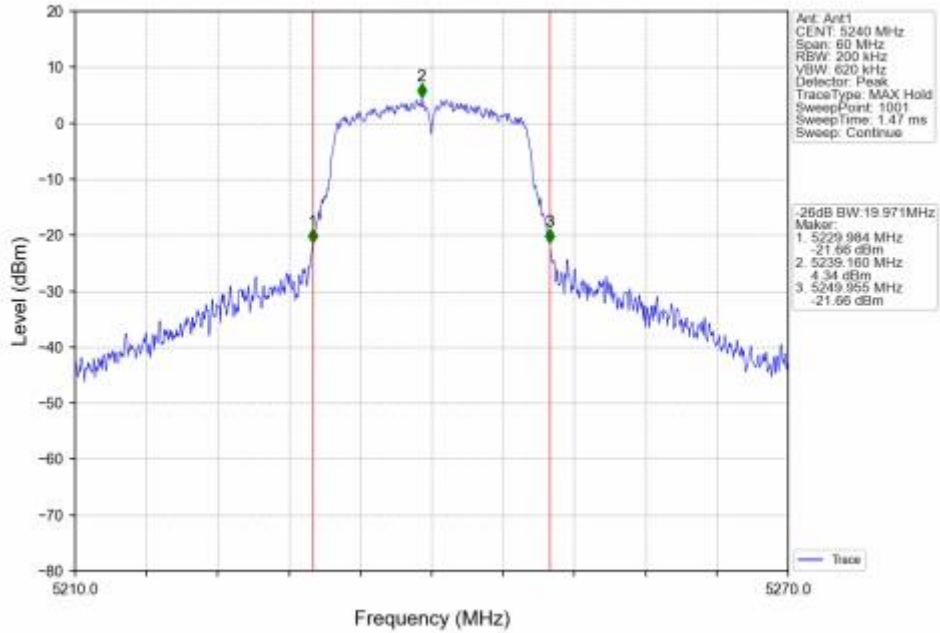


802.11a_LCH_5260MHz_Ant1_NTNV

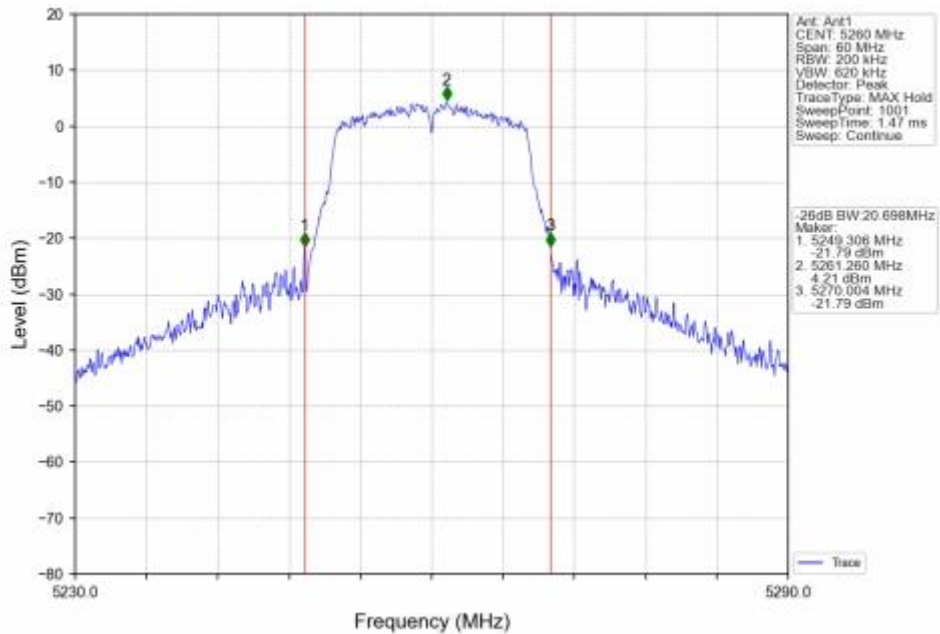


802.11a_MCH_5300MHz_Ant1_NTNV

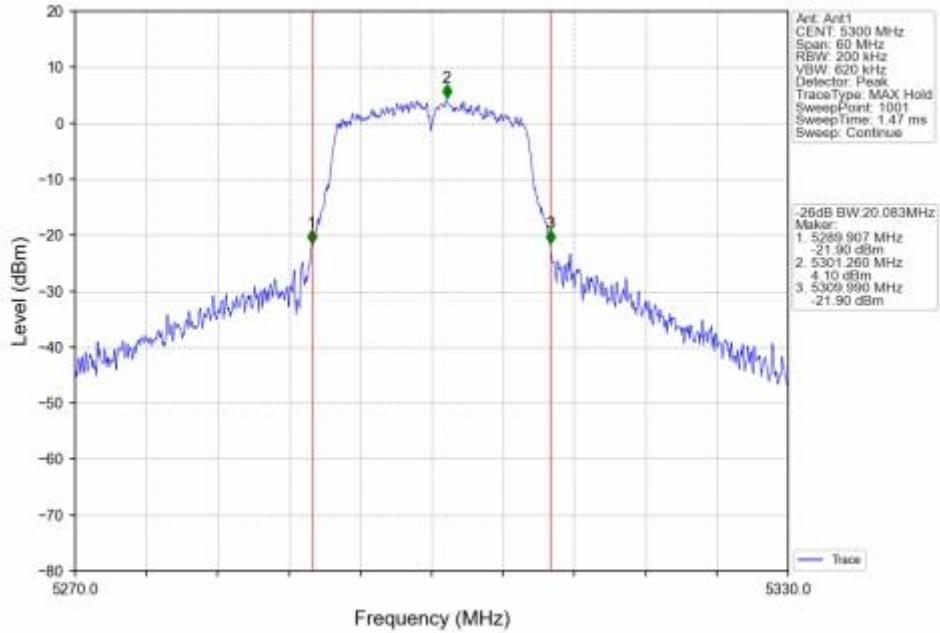


802.11a_HCH_5320MHz_Ant1_NTNV

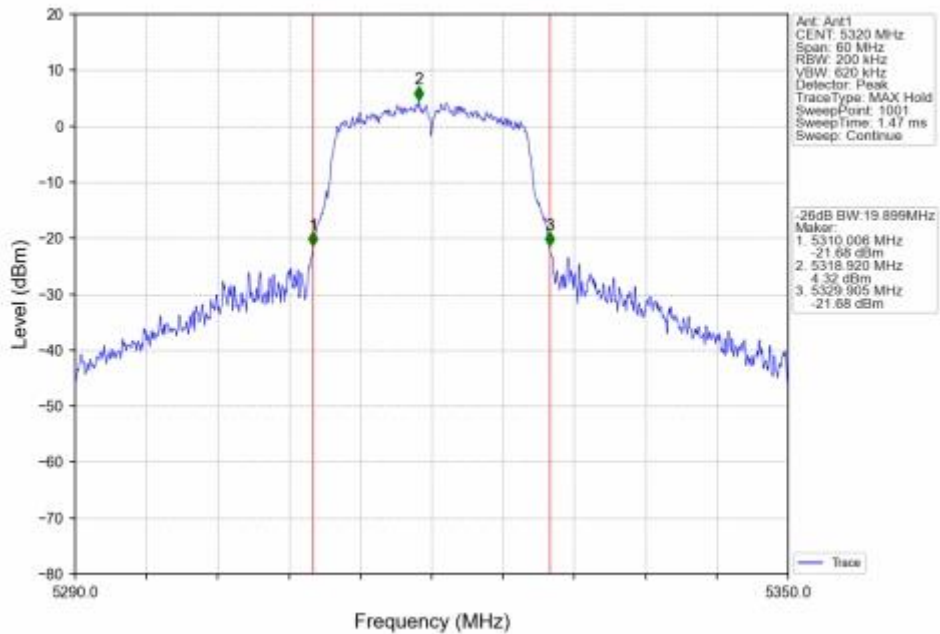


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

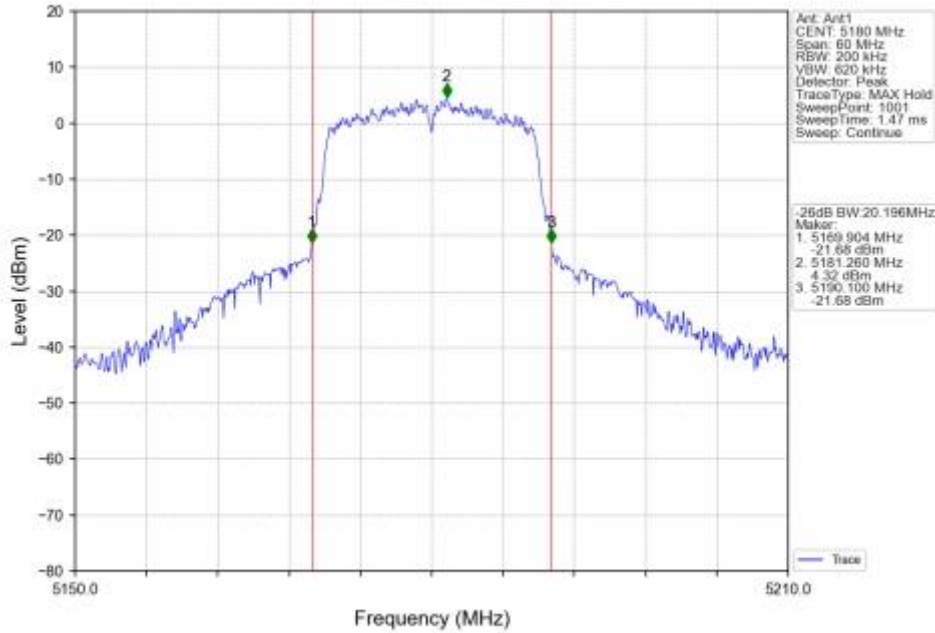


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

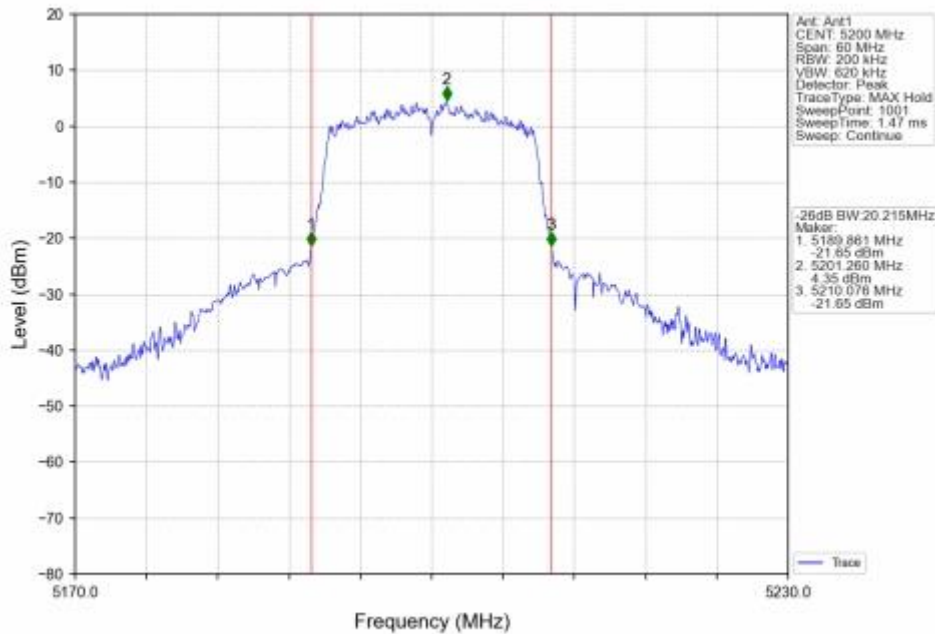


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

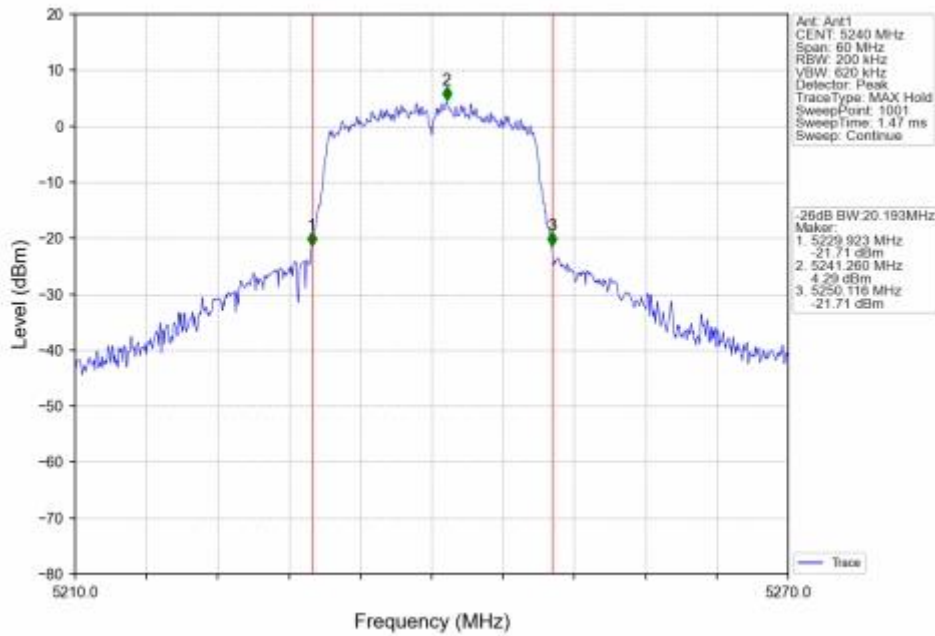


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

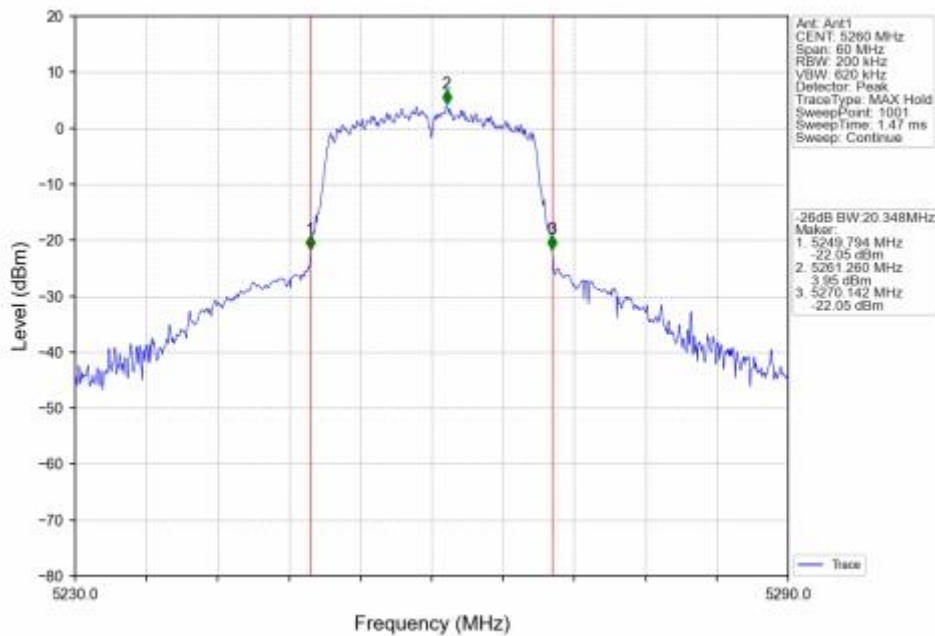


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

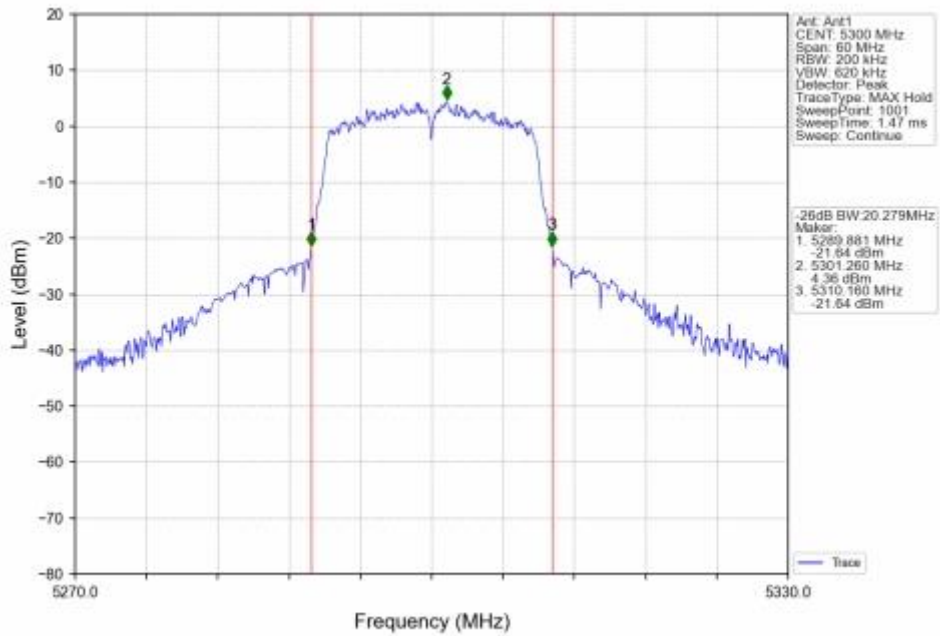


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

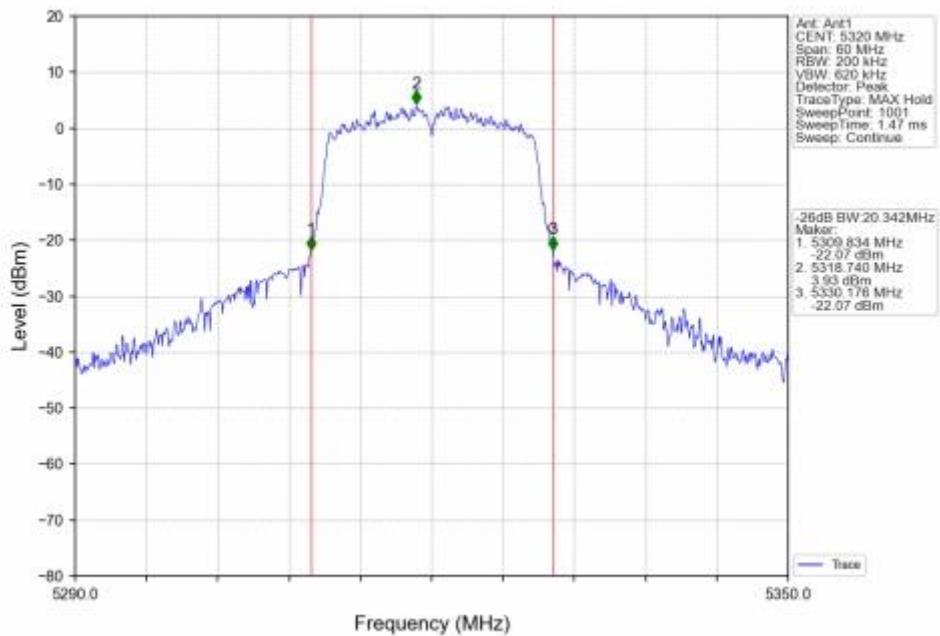


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

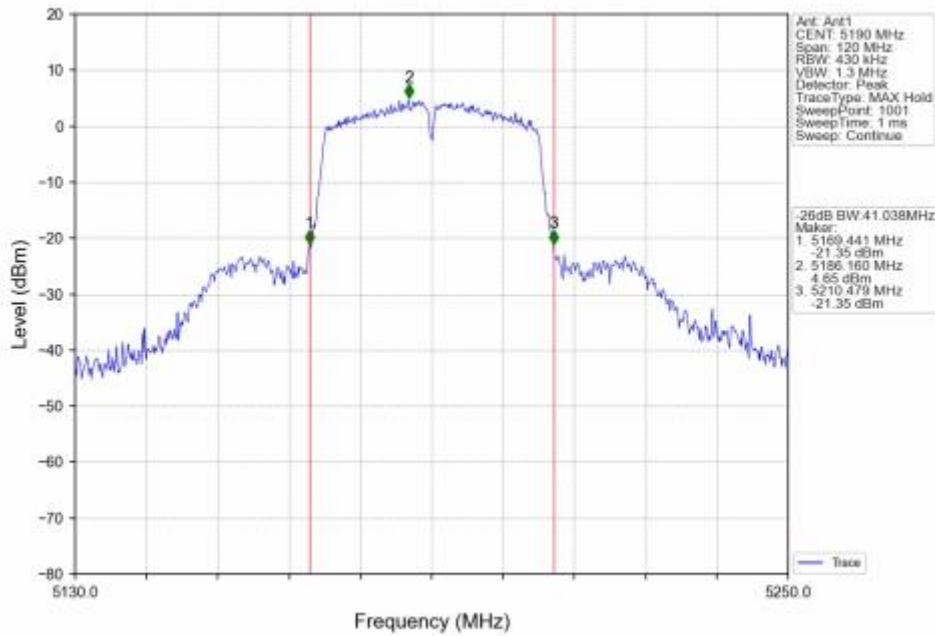


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

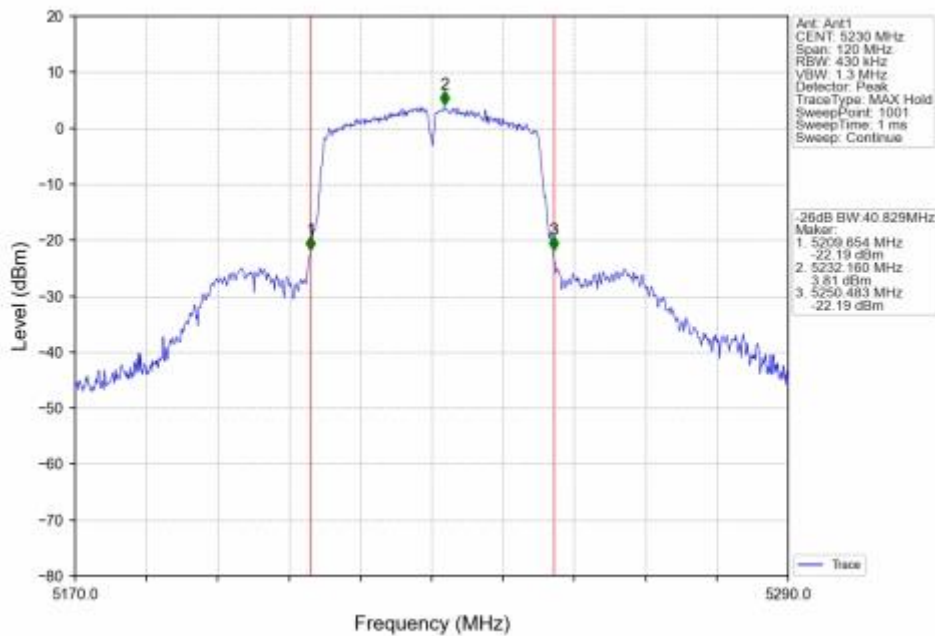

802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

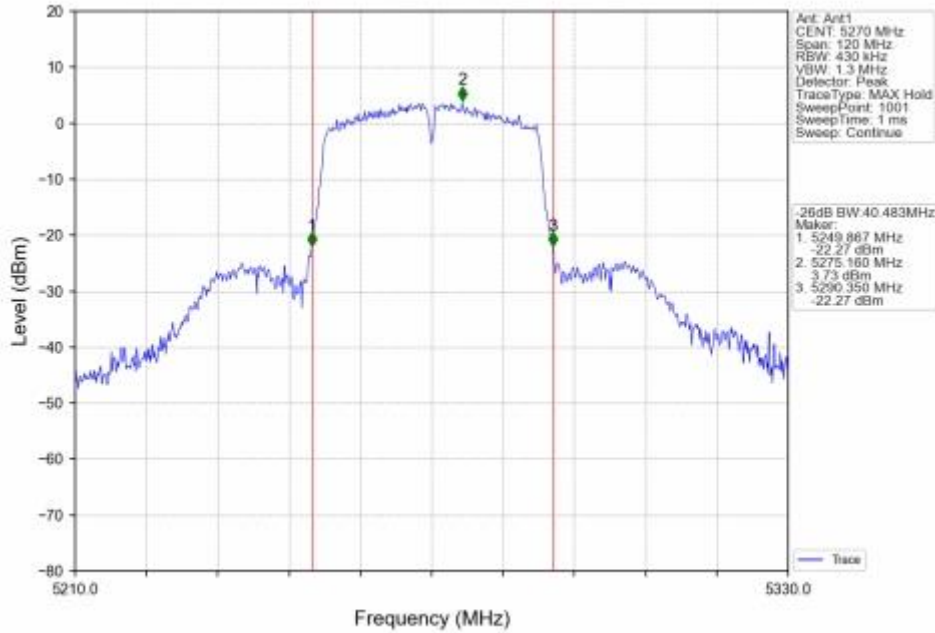

802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

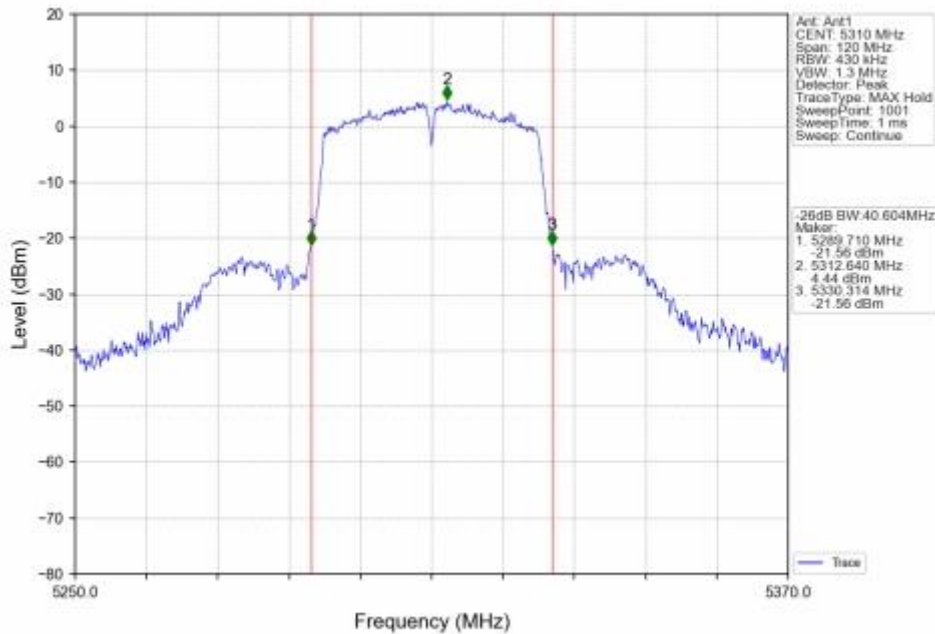


3. Maximum Conducted Output Power

3.1 Power


3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	12.71	<=30	Pass
		5200	13.44	<=30	Pass
		5240	13.35	<=30	Pass
		5260	13.26	<=23.98	Pass
		5300	13.23	<=23.98	Pass
		5320	13.19	<=23.98	Pass
		5745	13.27	<=30	Pass
		5785	12.97	<=30	Pass
		5825	13.09	<=30	Pass
802.11n (HT20)	SISO	5180	13.24	<=30	Pass
		5200	13.22	<=30	Pass
		5240	13.22	<=30	Pass
		5260	12.85	<=23.98	Pass
		5300	13.30	<=23.98	Pass
		5320	13.13	<=23.98	Pass
		5745	13.07	<=30	Pass
		5785	12.78	<=30	Pass
		5825	12.80	<=30	Pass
802.11n (HT40)	SISO	5190	13.70	<=30	Pass
		5230	13.10	<=30	Pass
		5270	12.85	<=23.98	Pass
		5310	13.33	<=23.98	Pass
		5755	12.97	<=30	Pass
		5795	13.20	<=30	Pass
Note1: Antenna Gain: Ant1: 2.41dBi;					


3.1.2 Test Graph


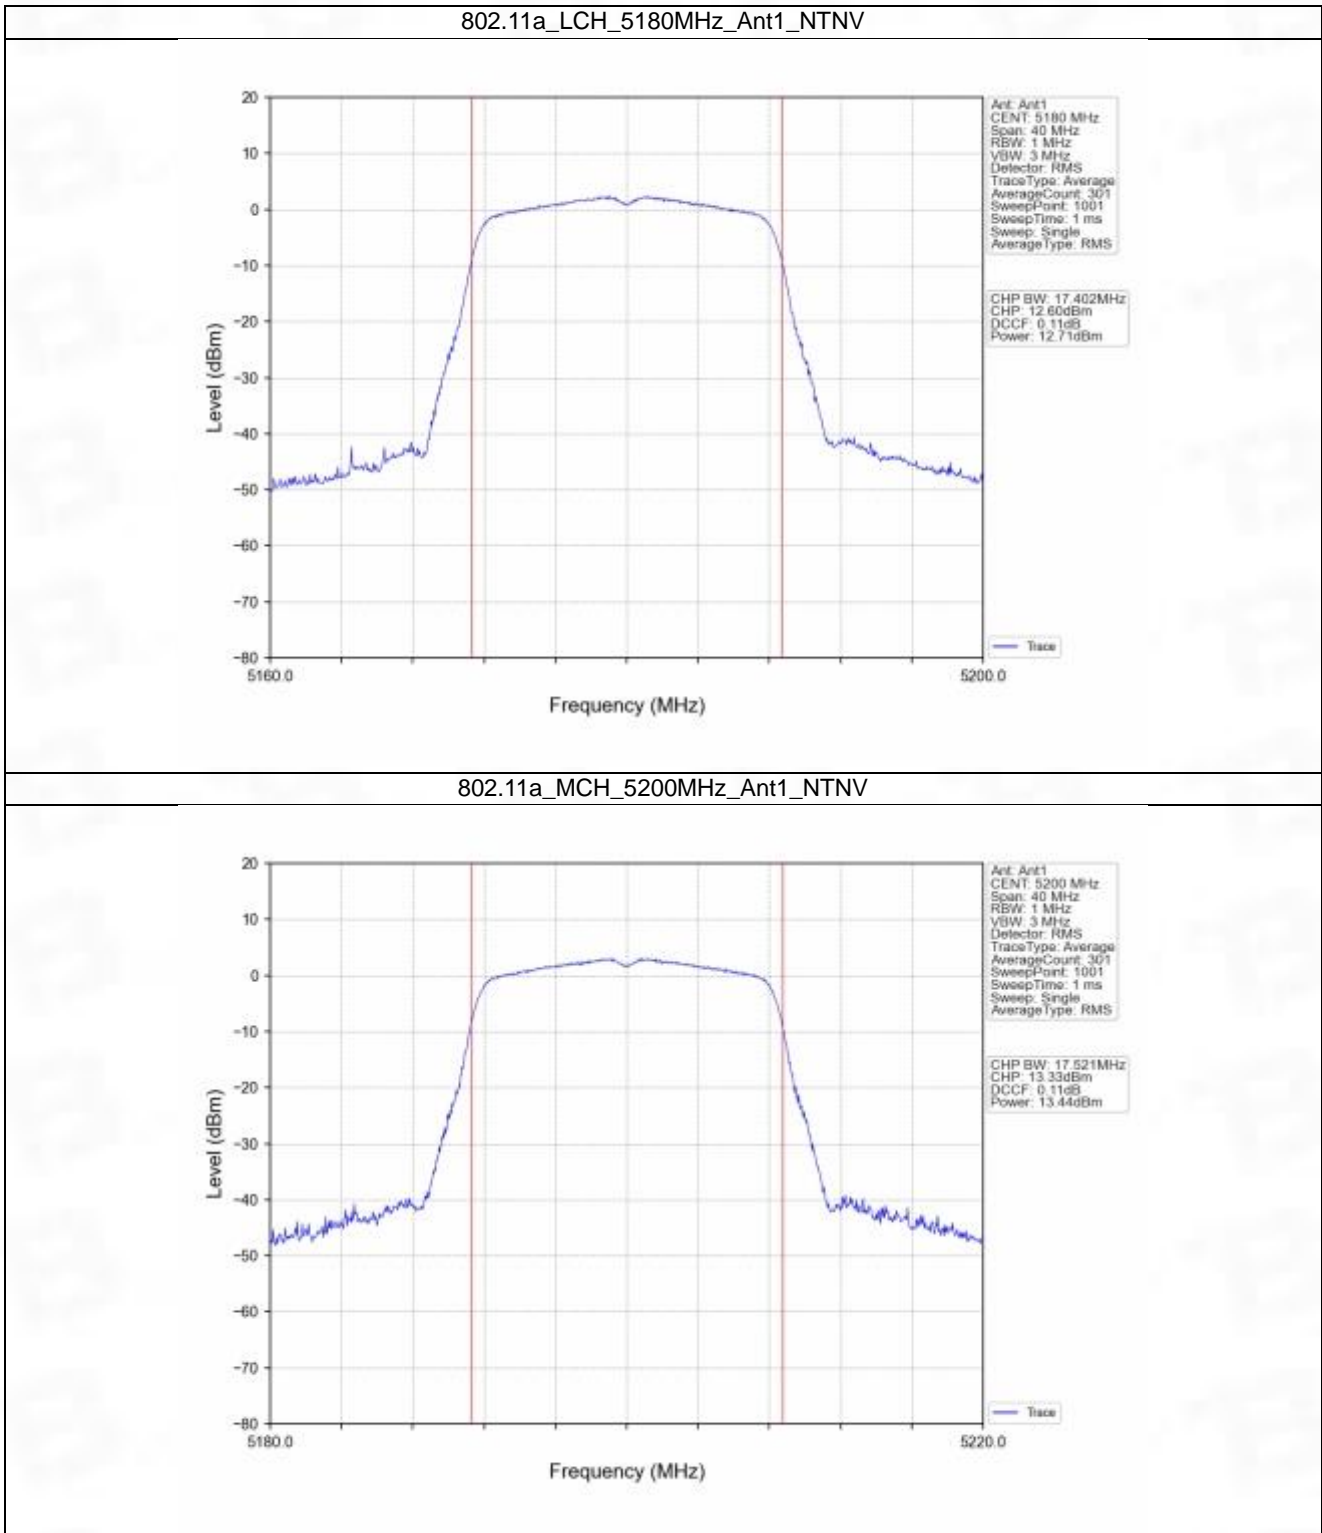


802.11a_HCH_5240MHz_Ant1_NTNV

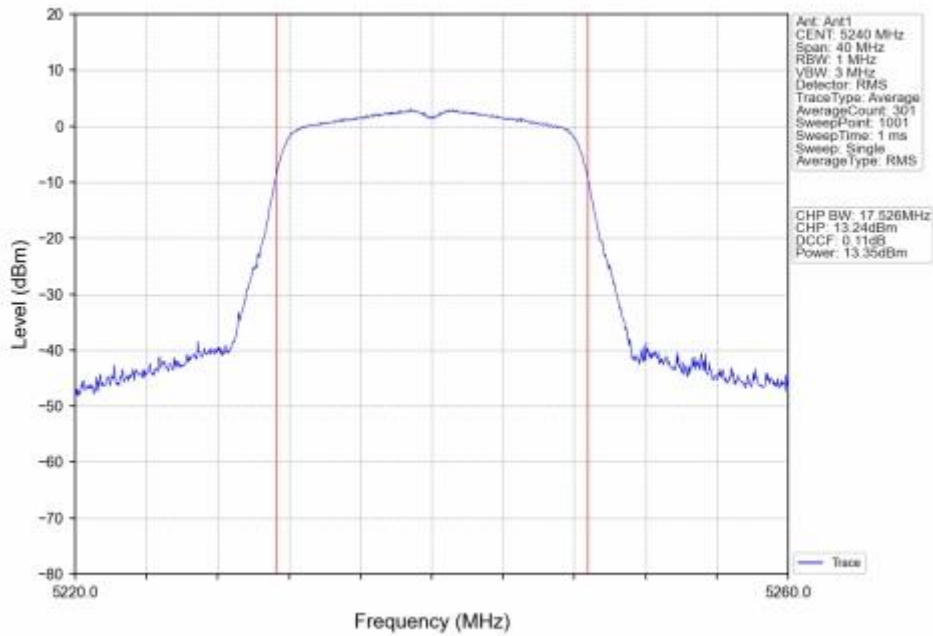


802.11a_LCH_5260MHz_Ant1_NTNV

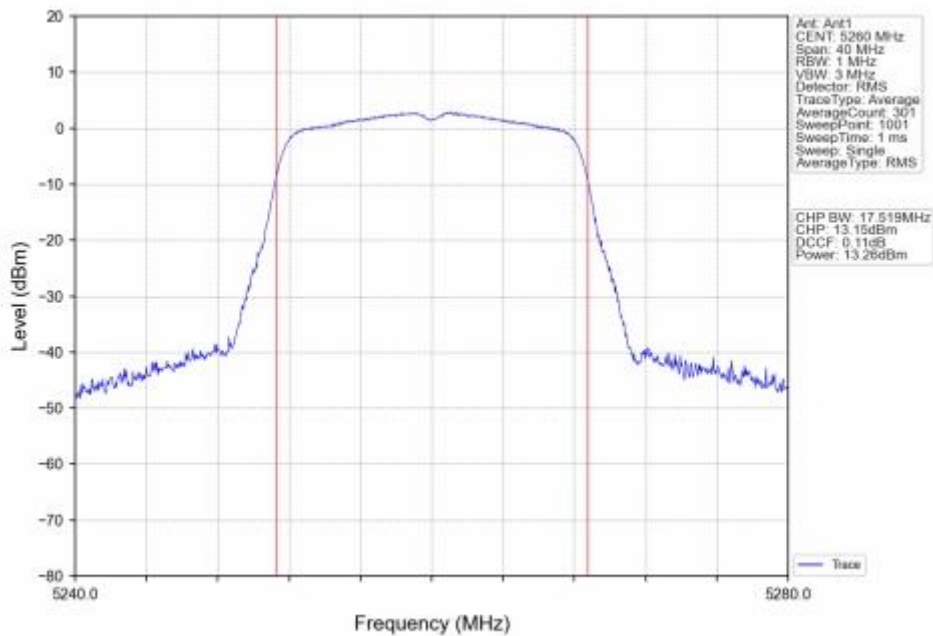


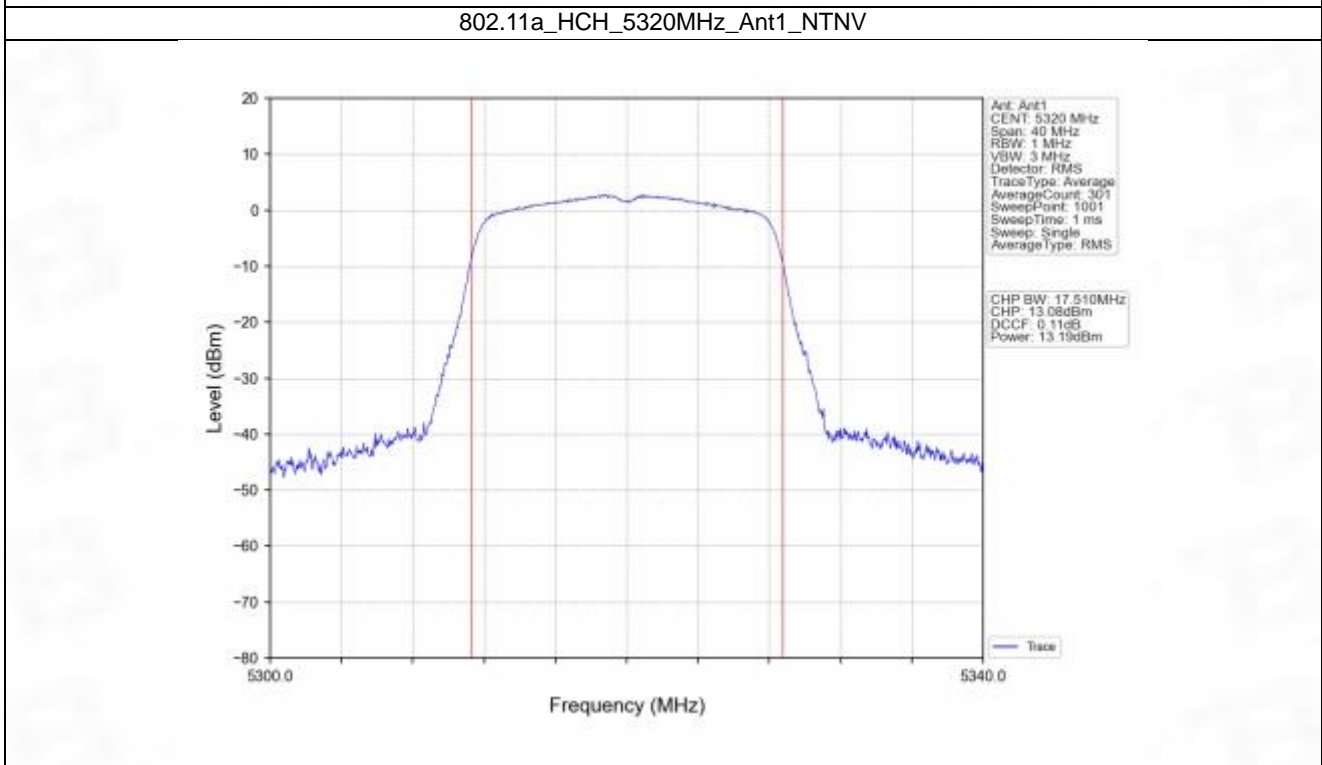
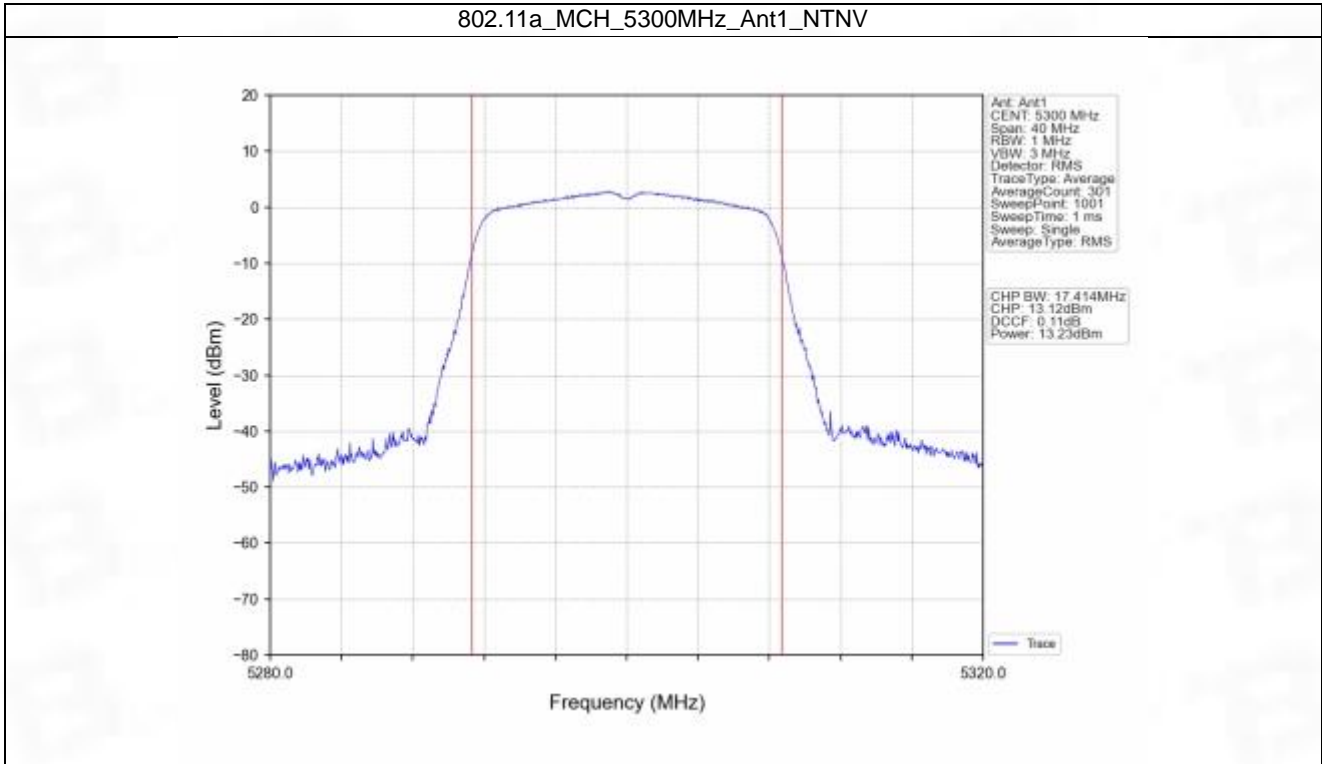




802.11a_LCH_5745MHz_Ant1_NTNV


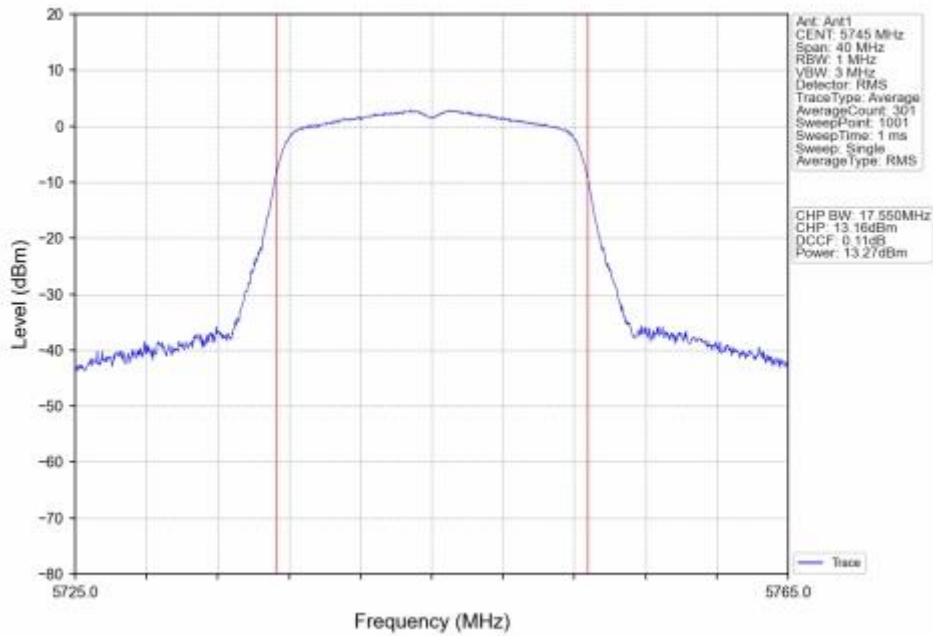




802.11a_MCH_5785MHz_Ant1_NTNV


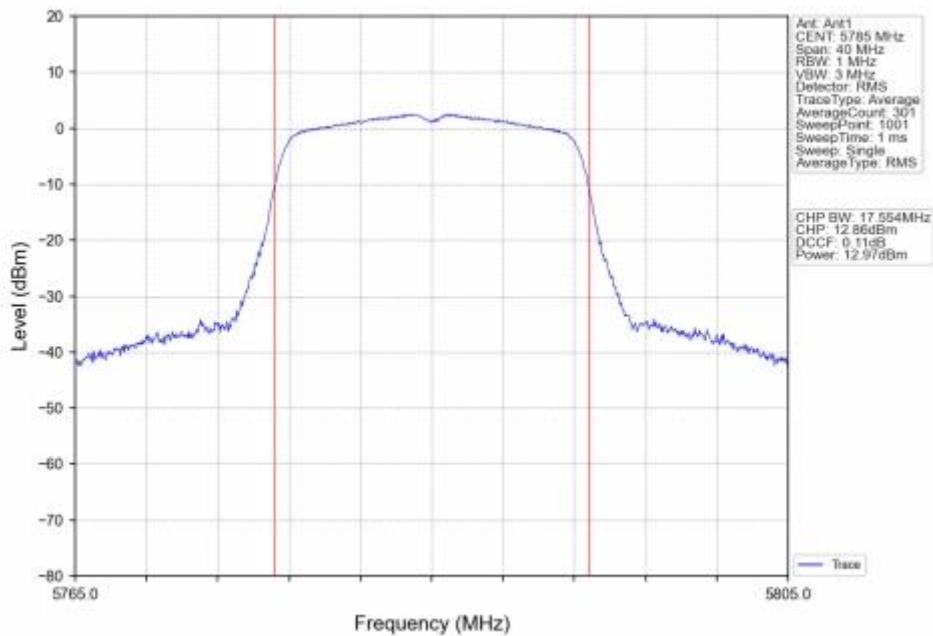


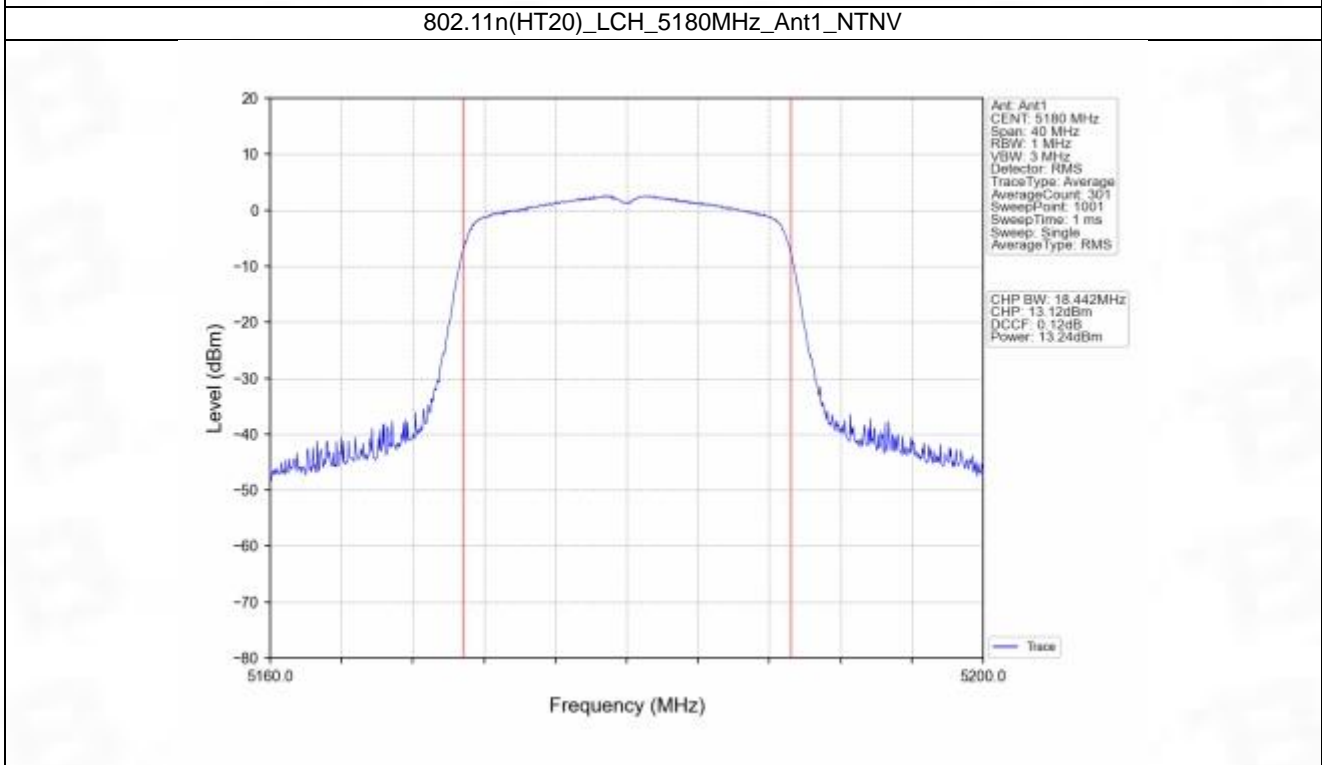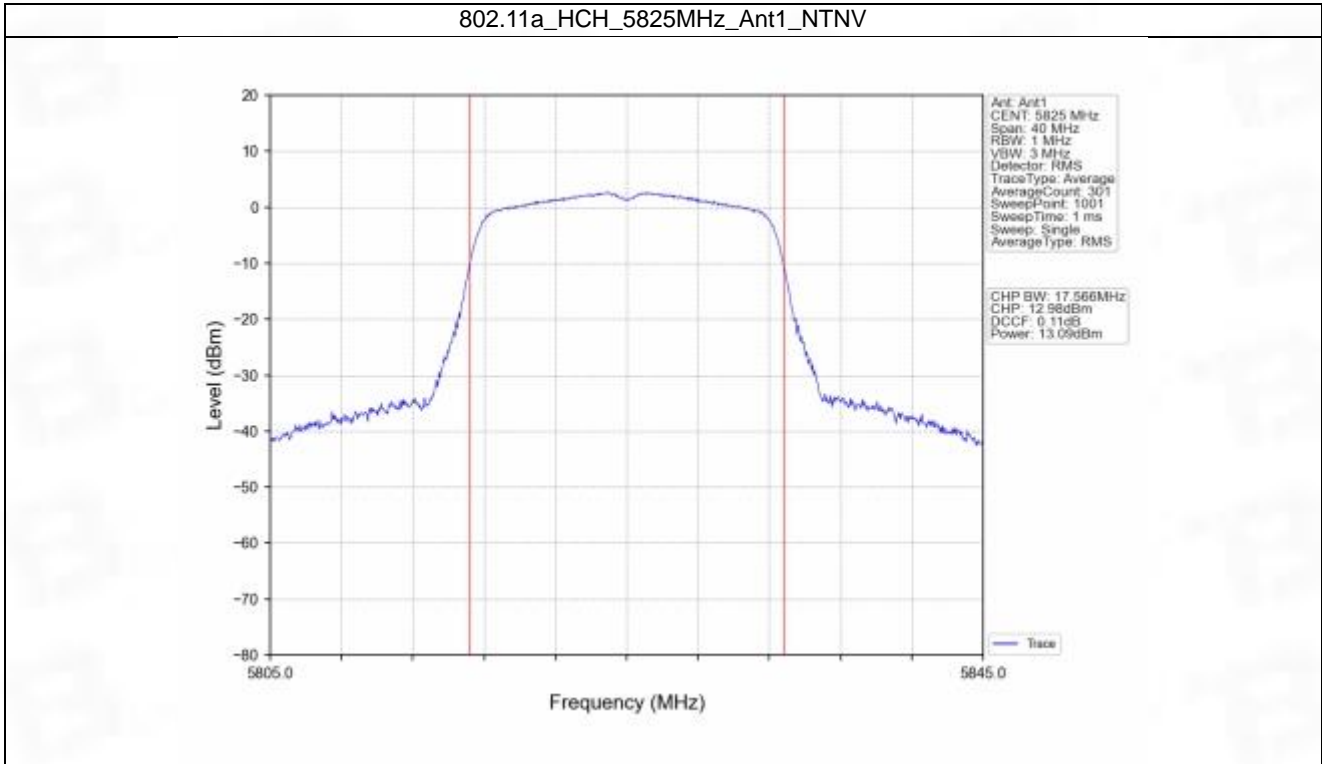

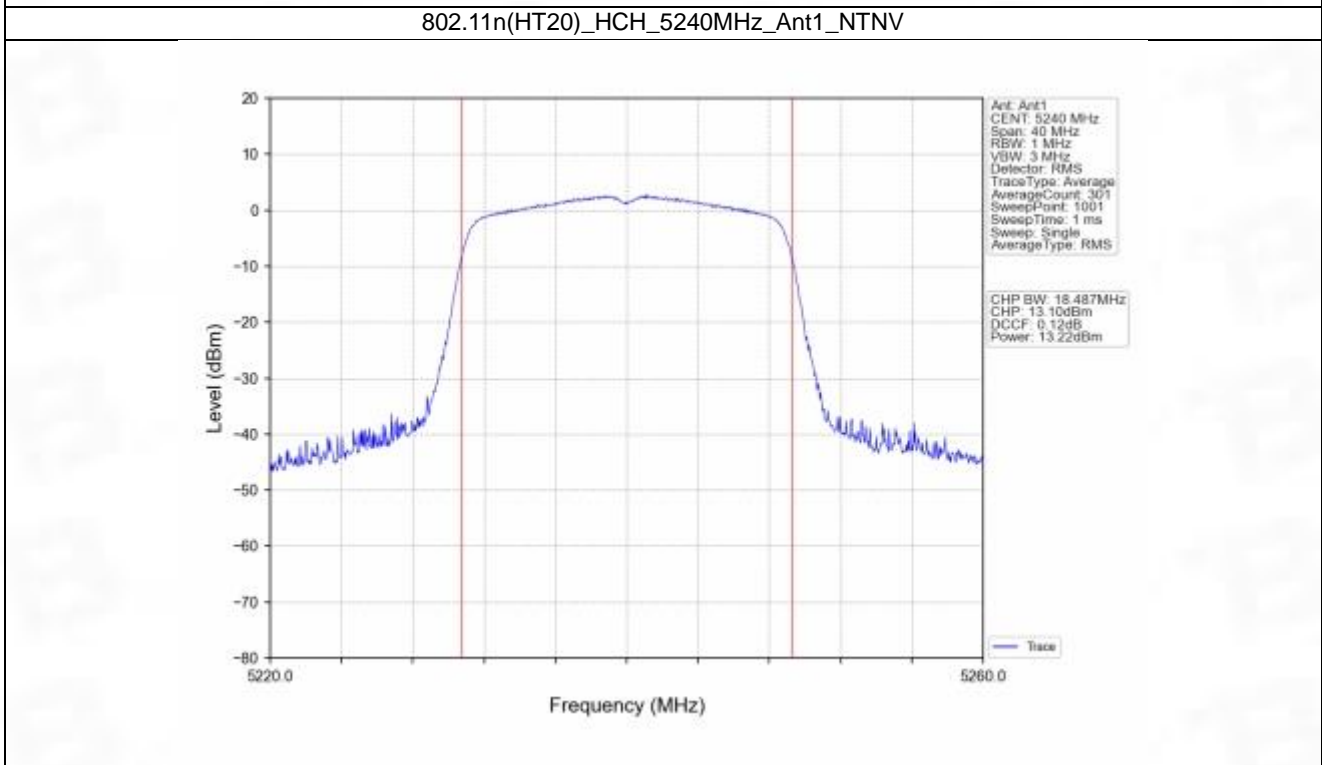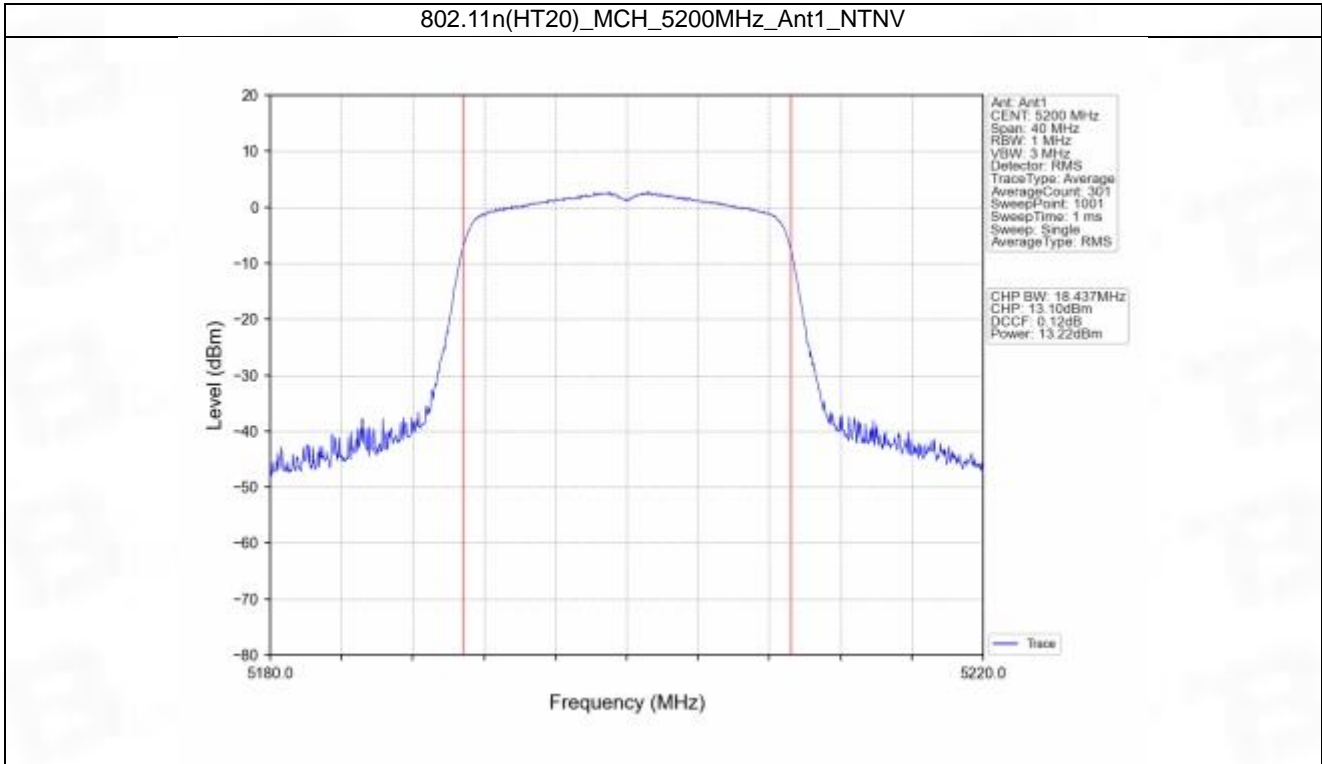


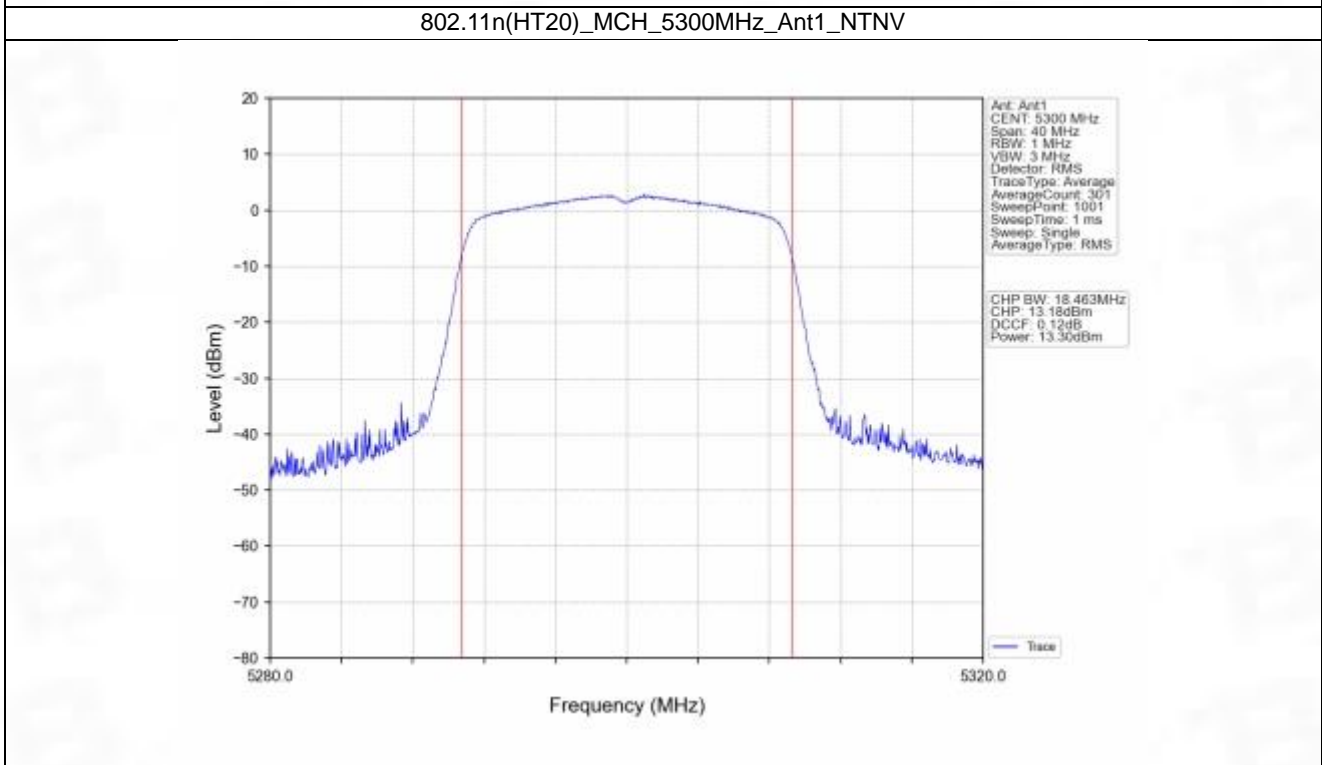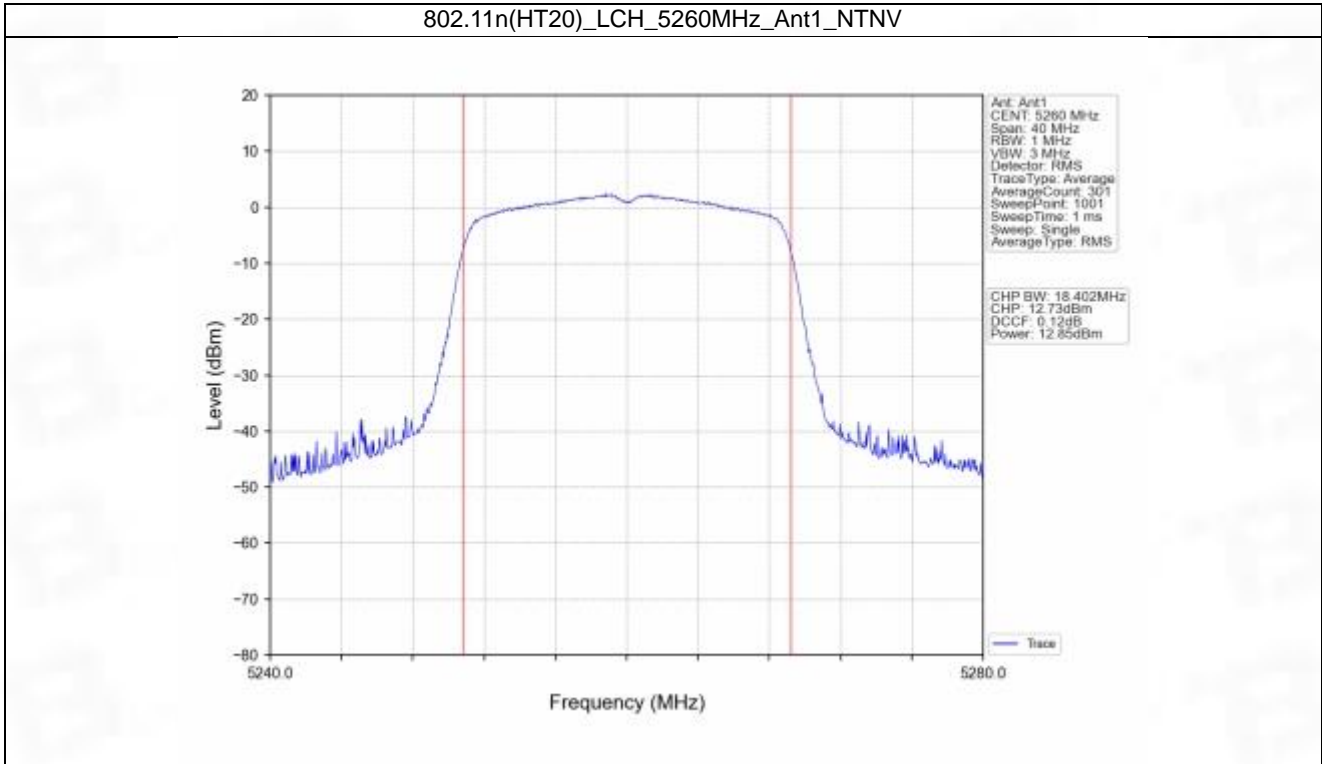

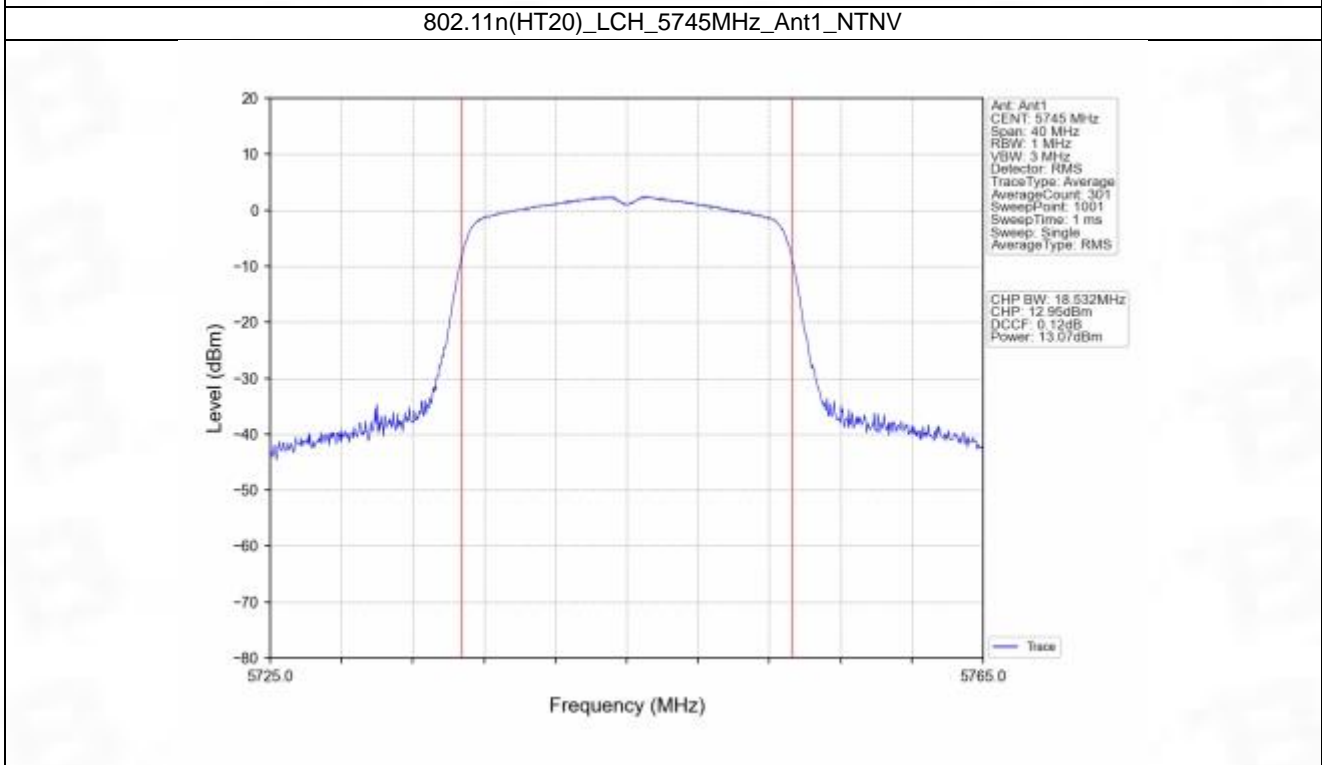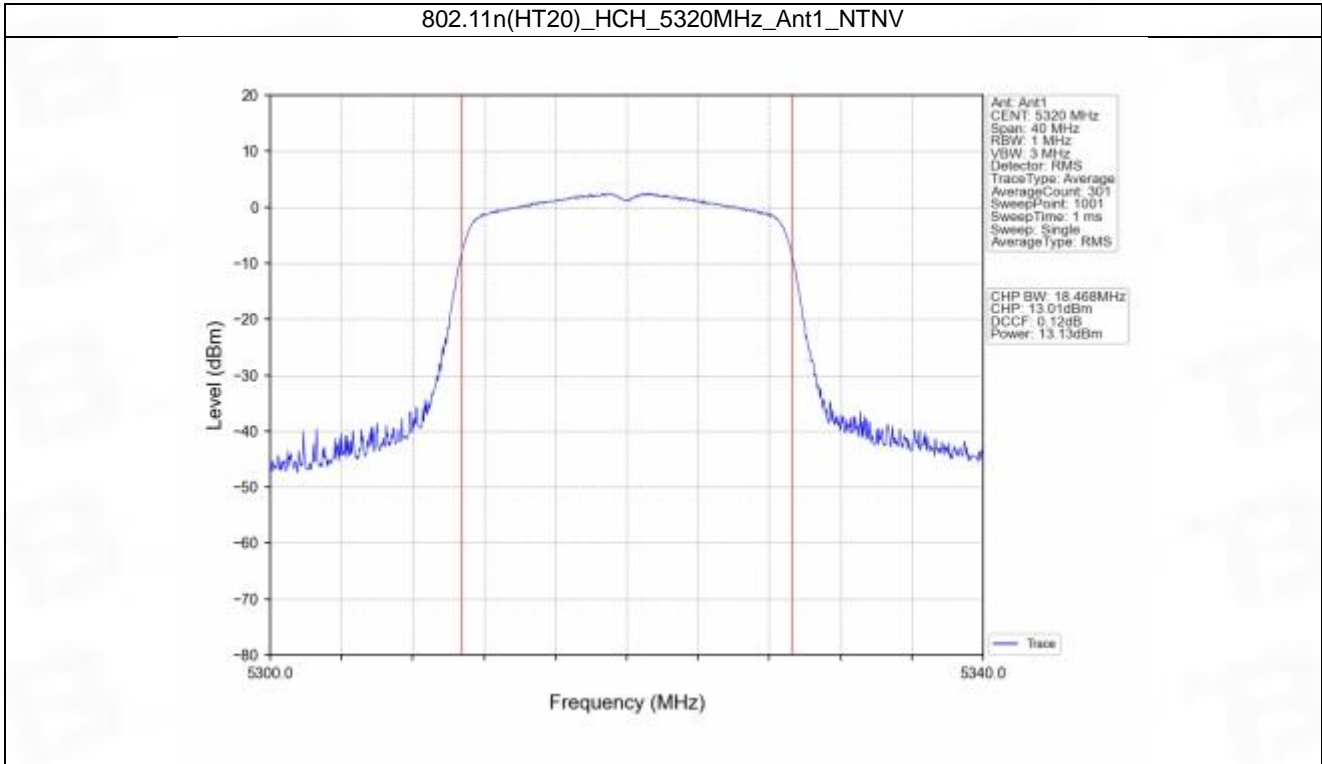


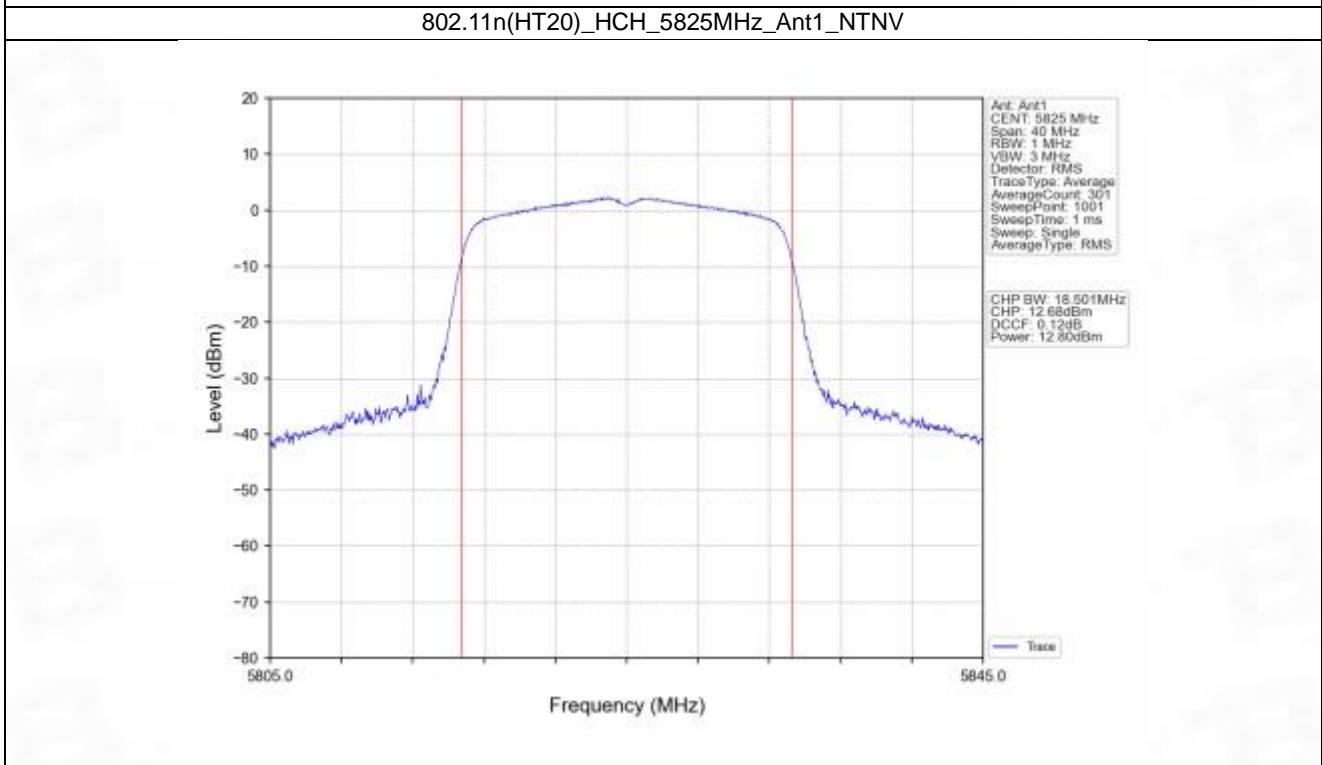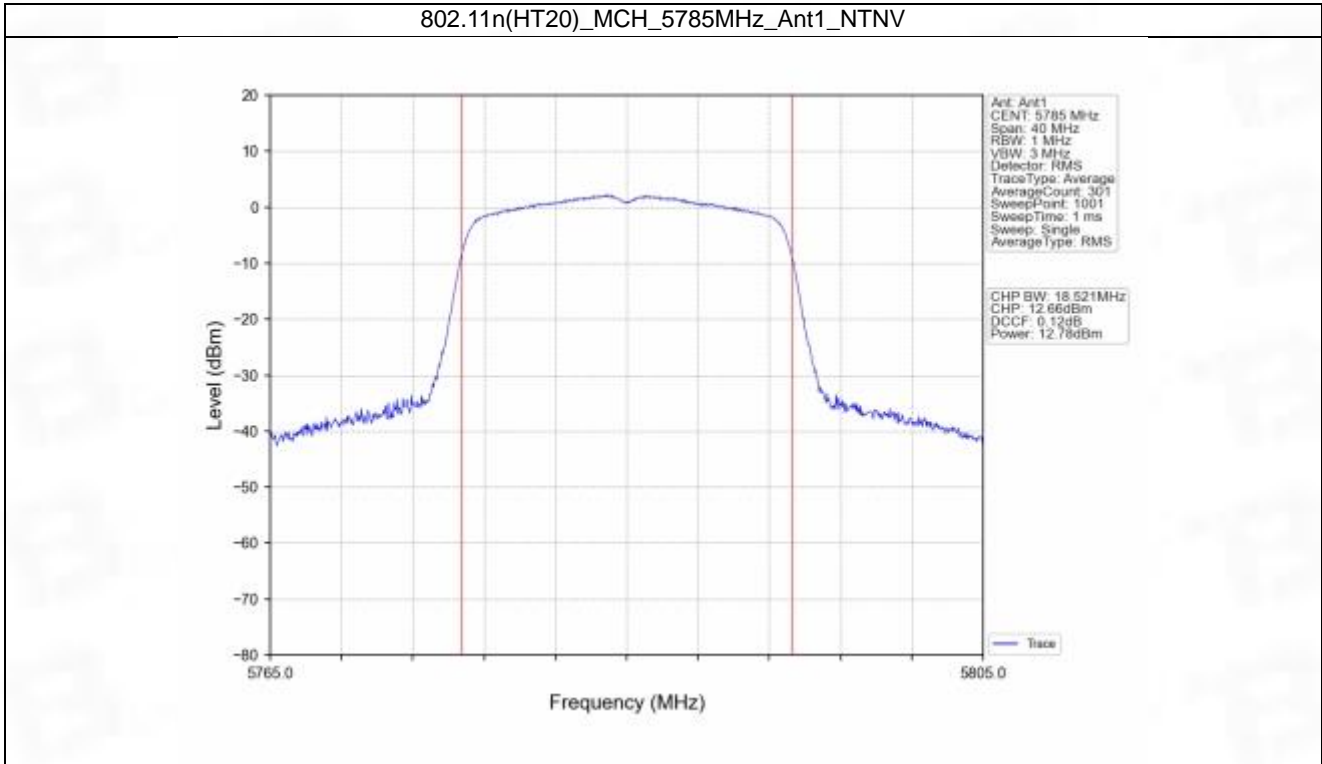


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

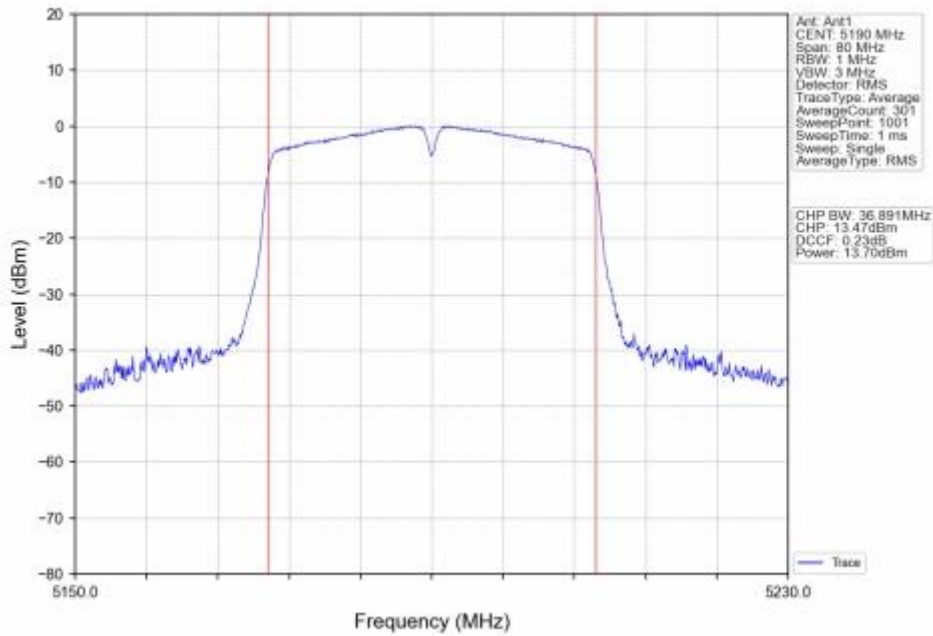


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

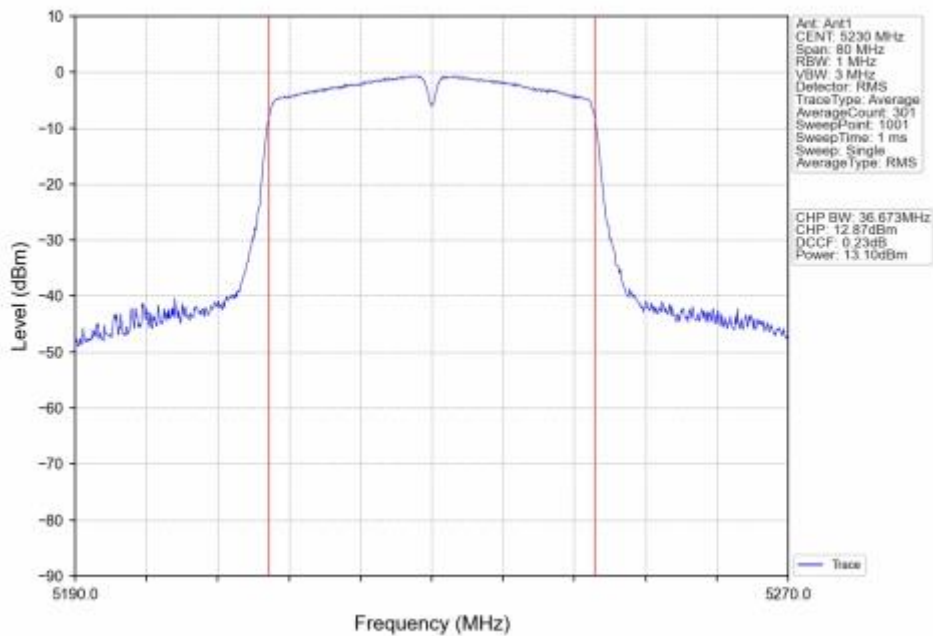


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

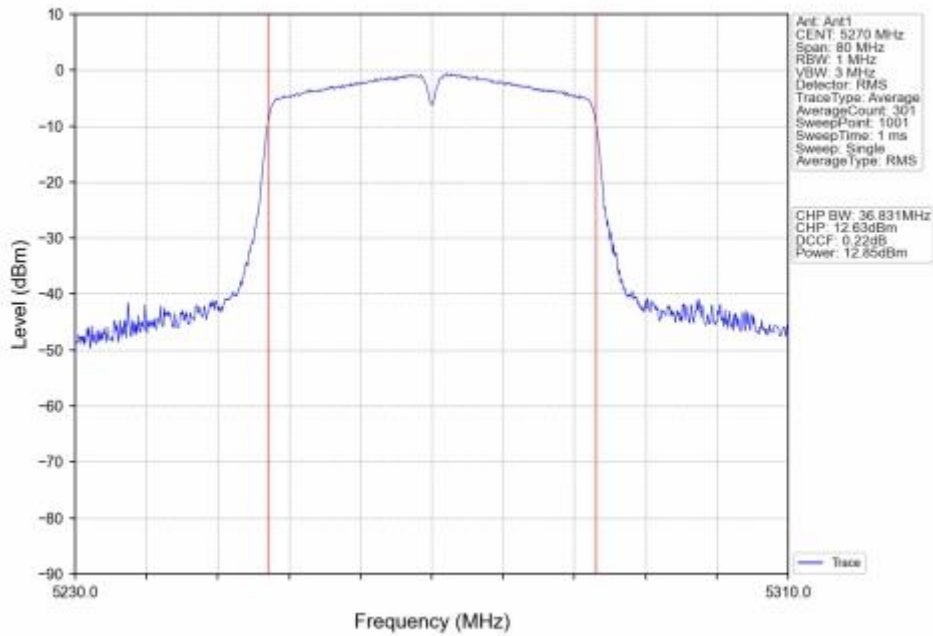


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

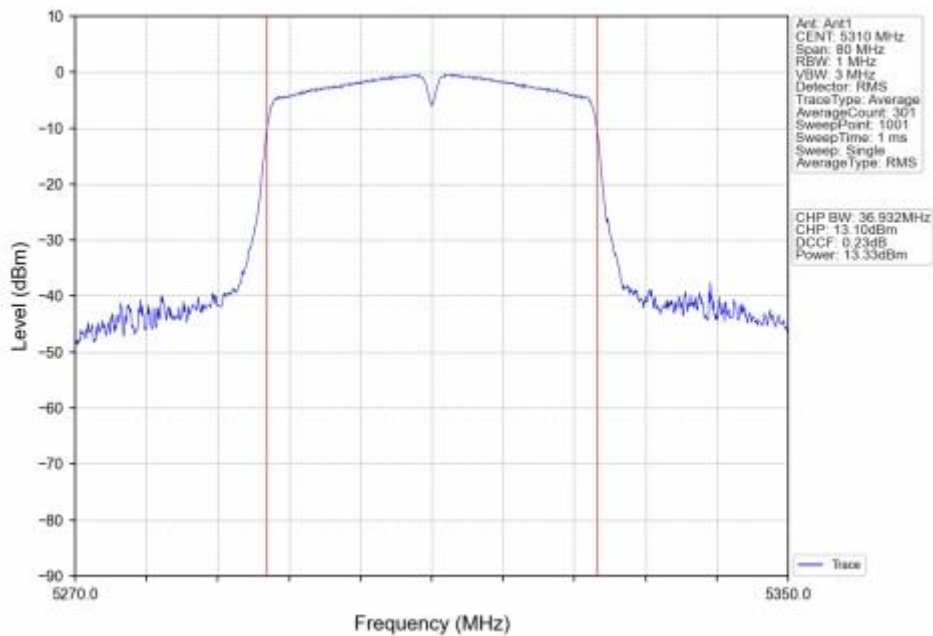

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

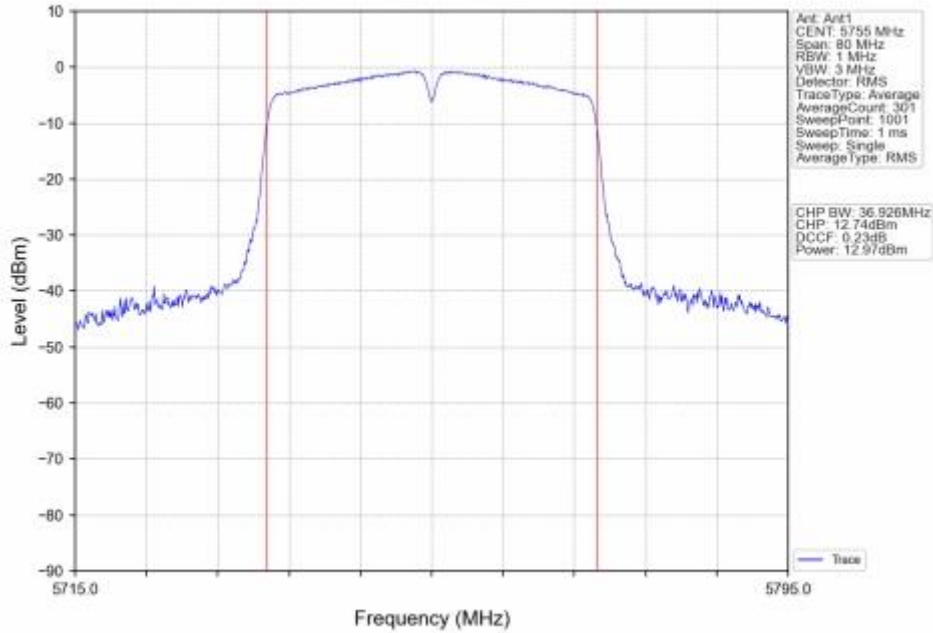

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

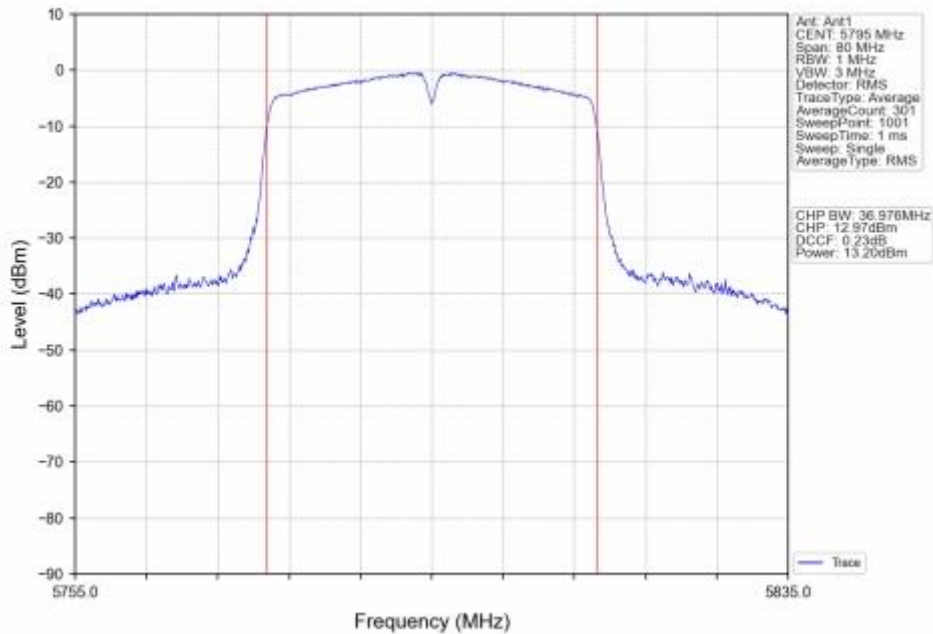


4. Maximum Power Spectral Density



4.1 PSD


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/MHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	2.44	<=11	Pass
		5200	3.25	<=11	Pass
		5240	3.11	<=11	Pass
		5260	3.01	<=11	Pass
		5300	3.00	<=11	Pass
		5320	3.04	<=11	Pass
802.11n (HT20)	SISO	5180	2.84	<=11	Pass
		5200	2.70	<=11	Pass
		5240	2.81	<=11	Pass
		5260	2.51	<=11	Pass
		5300	2.84	<=11	Pass
		5320	2.66	<=11	Pass
802.11n (HT40)	SISO	5190	0.37	<=11	Pass
		5230	-0.24	<=11	Pass
		5270	-0.46	<=11	Pass
		5310	-0.07	<=11	Pass
Note1: Antenna Gain: Ant1: 2.41dBi;					


4.1.2 Test Graph

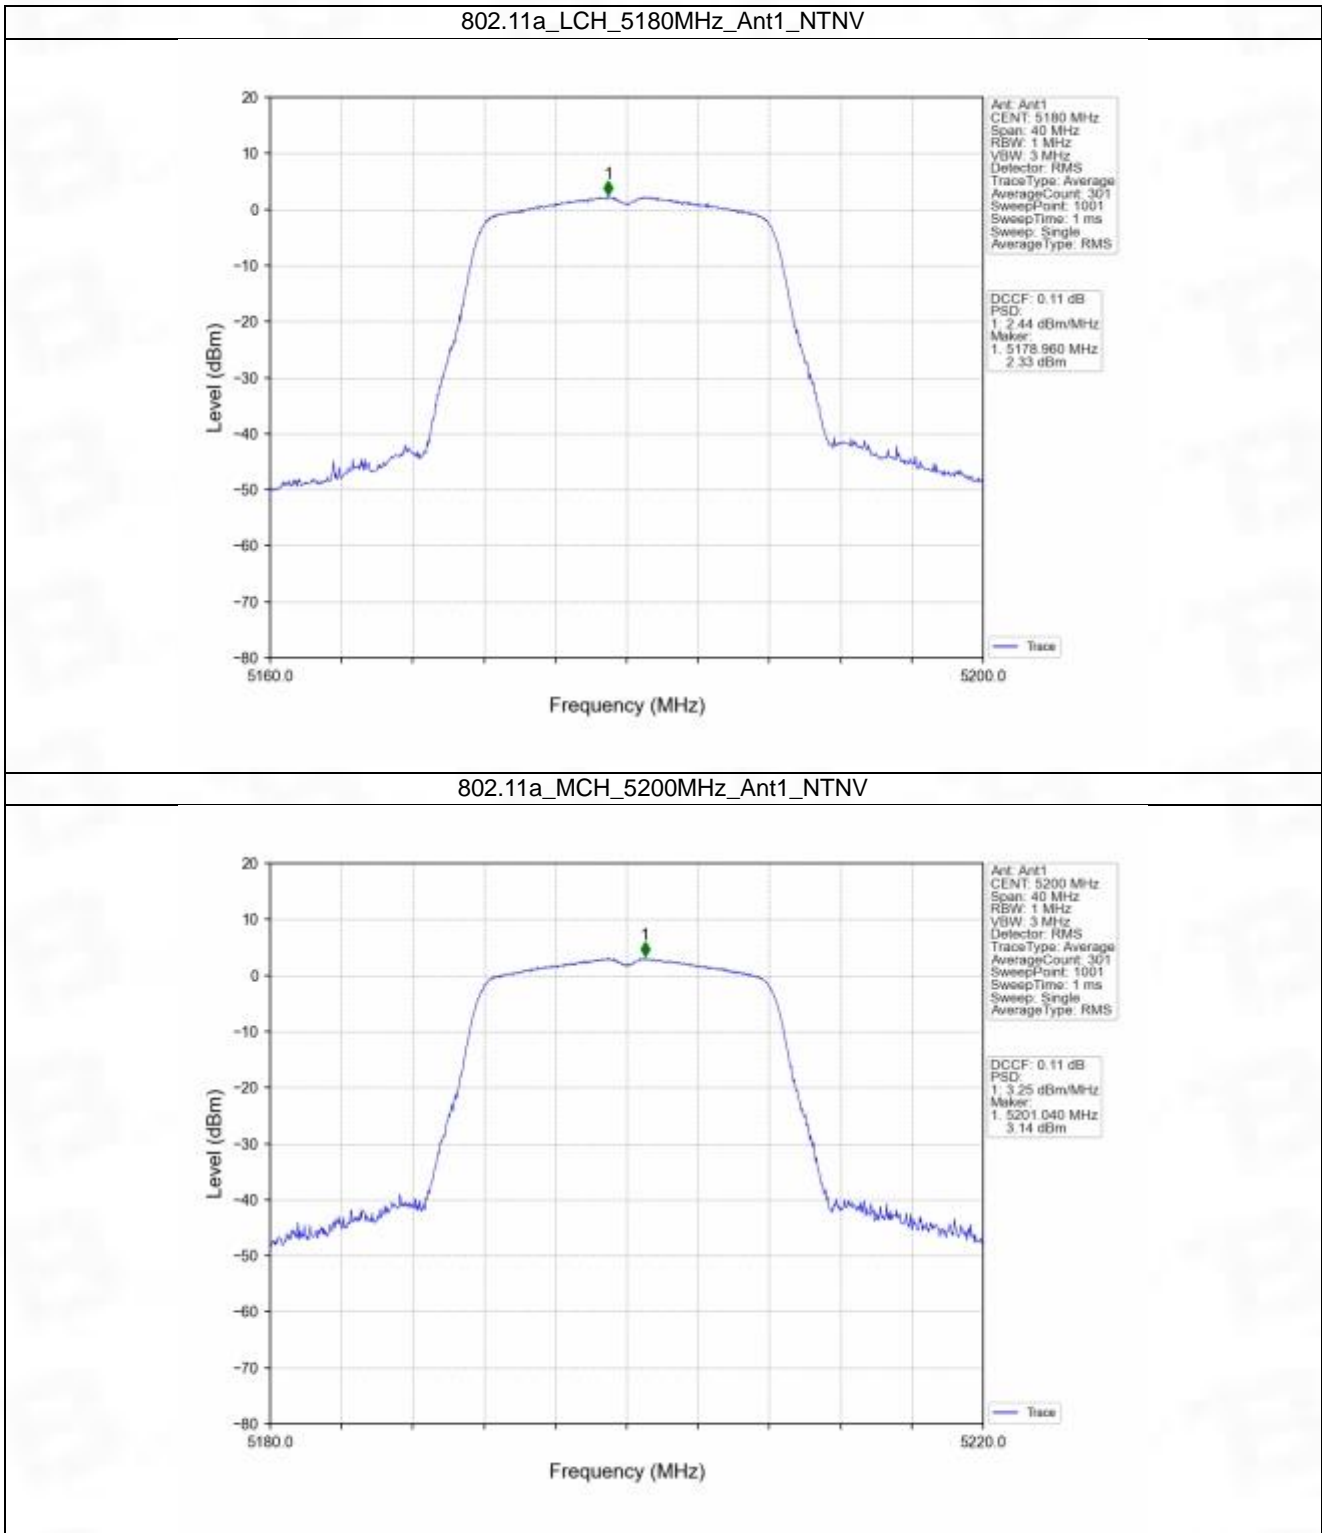

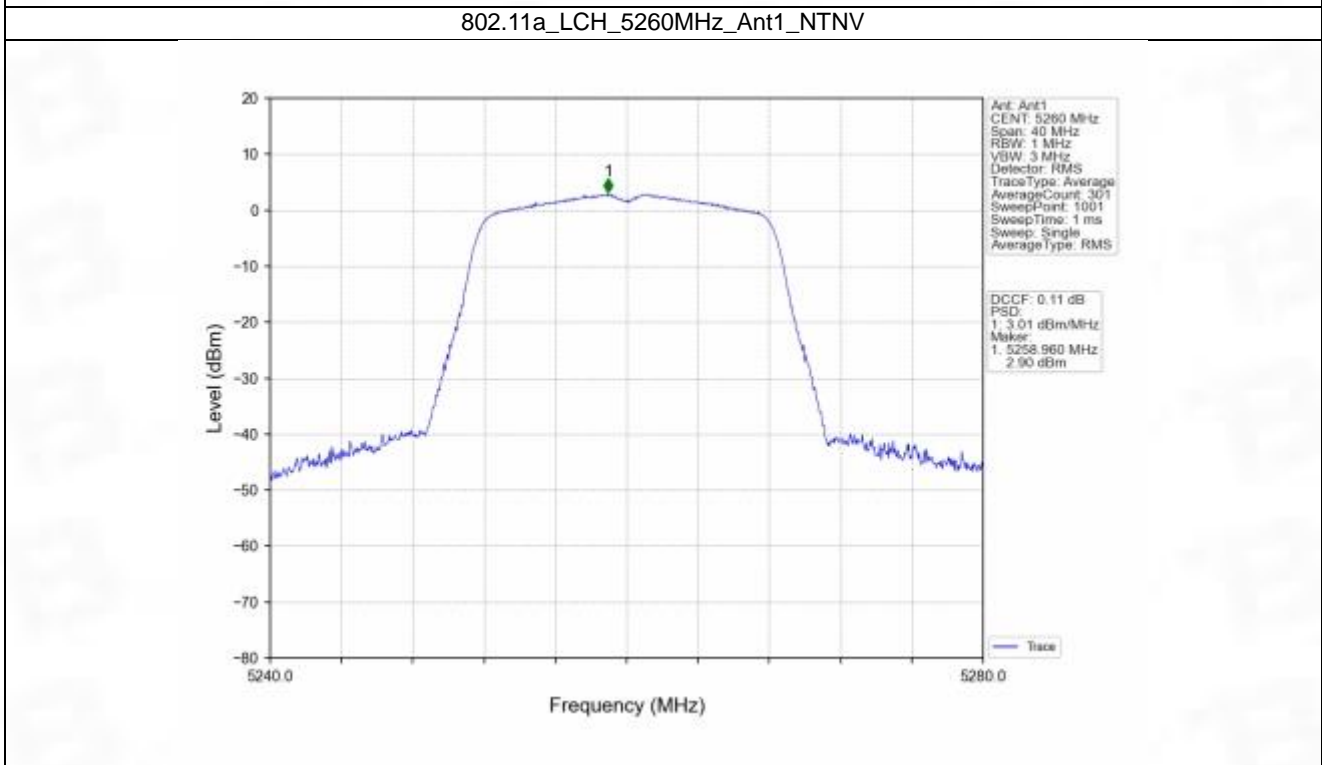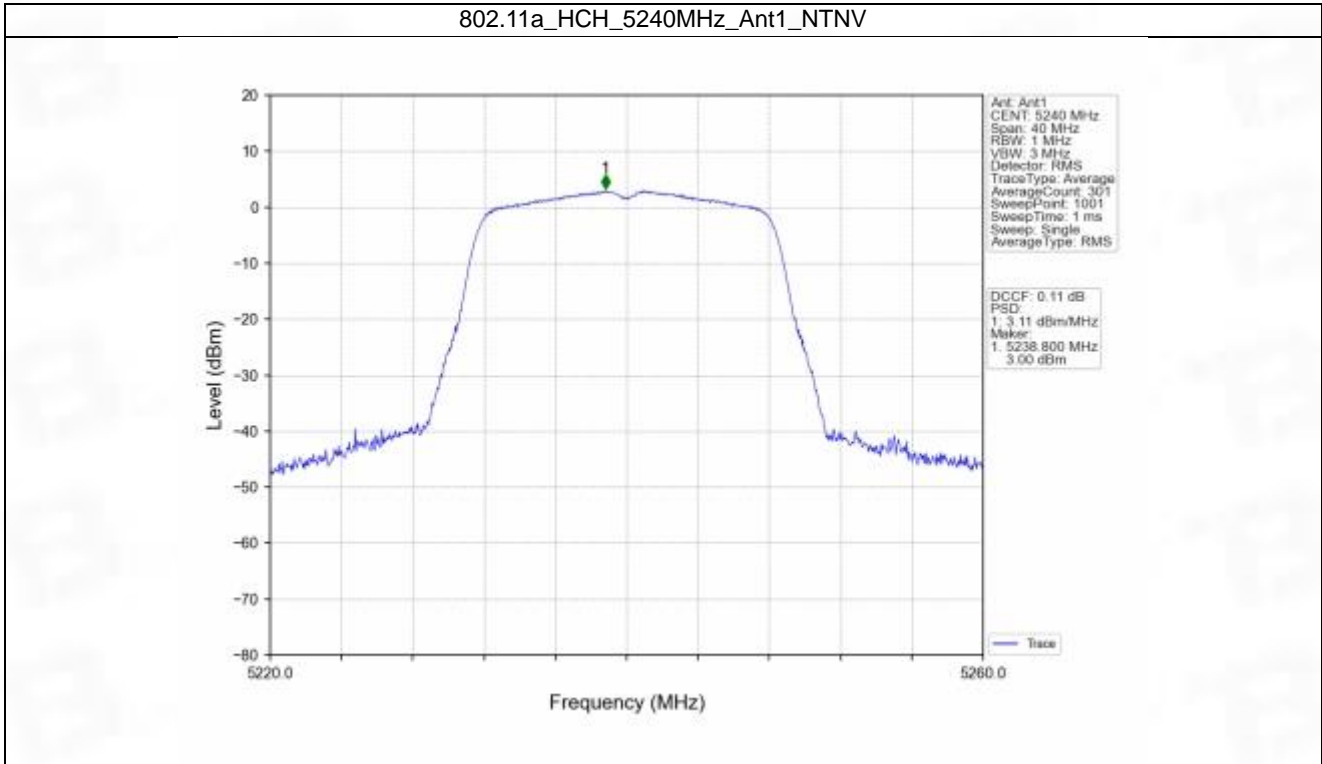


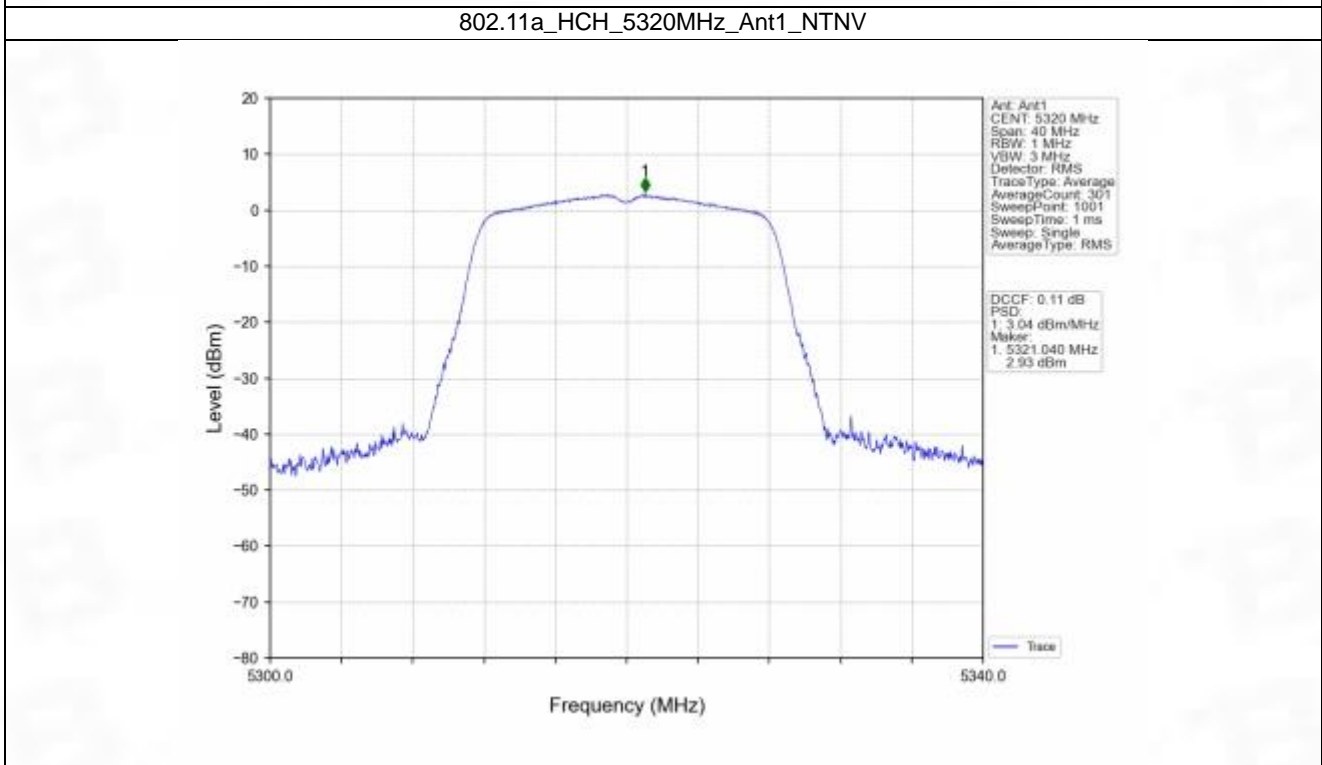


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

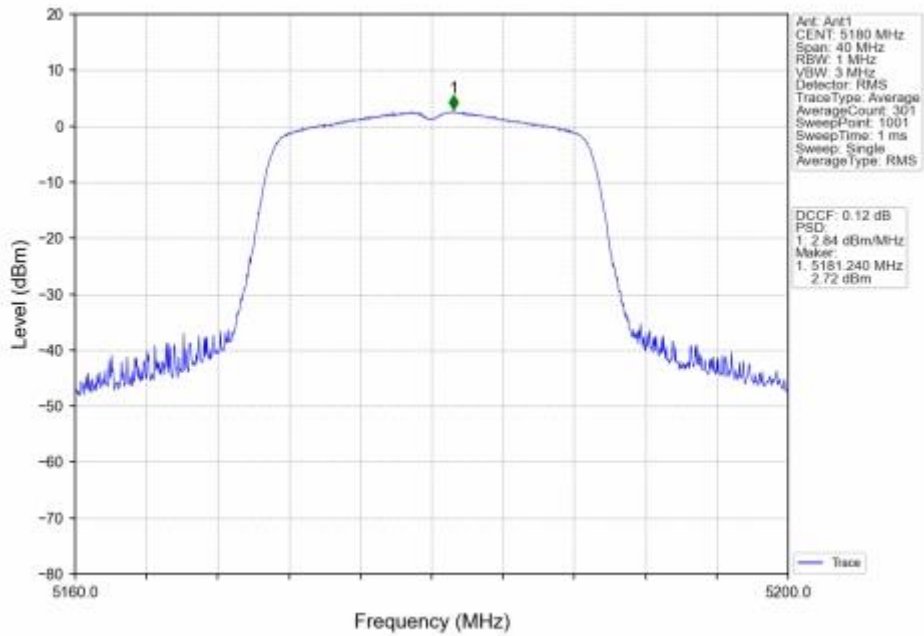


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

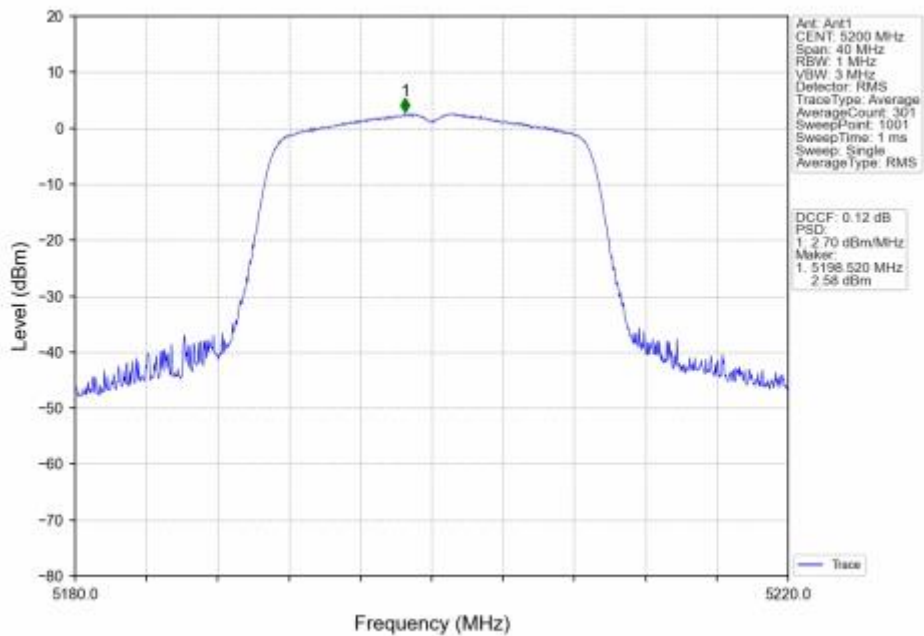


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

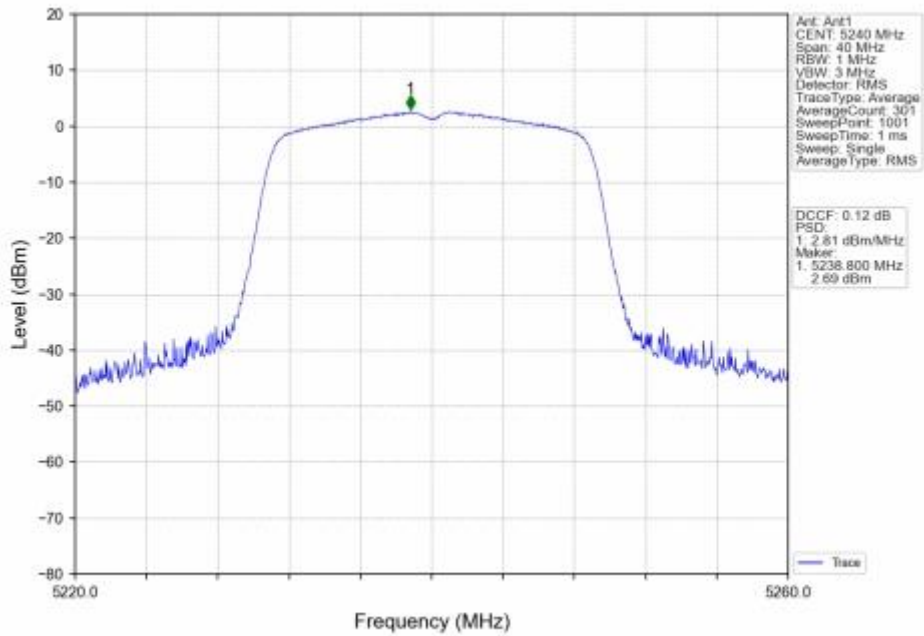


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

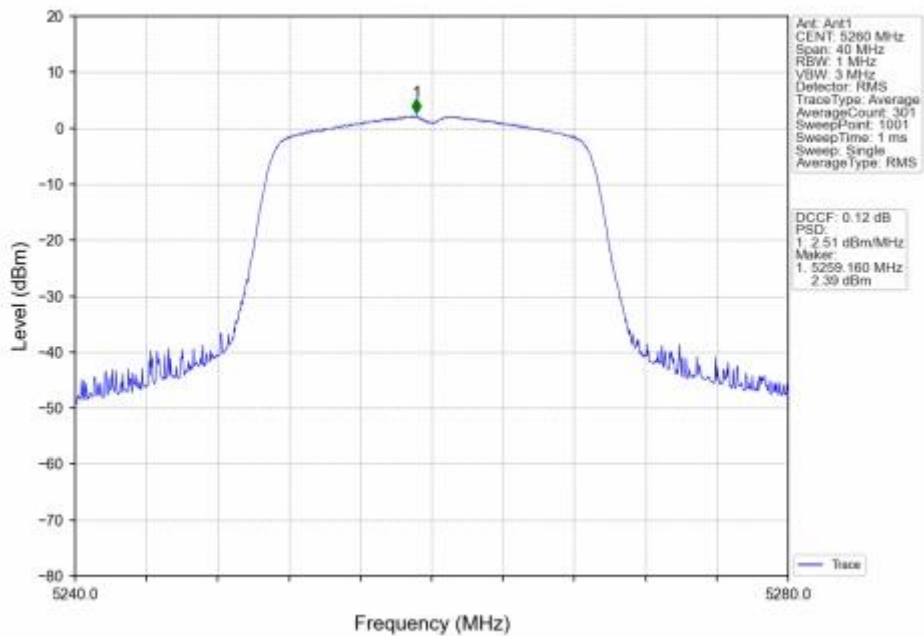


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

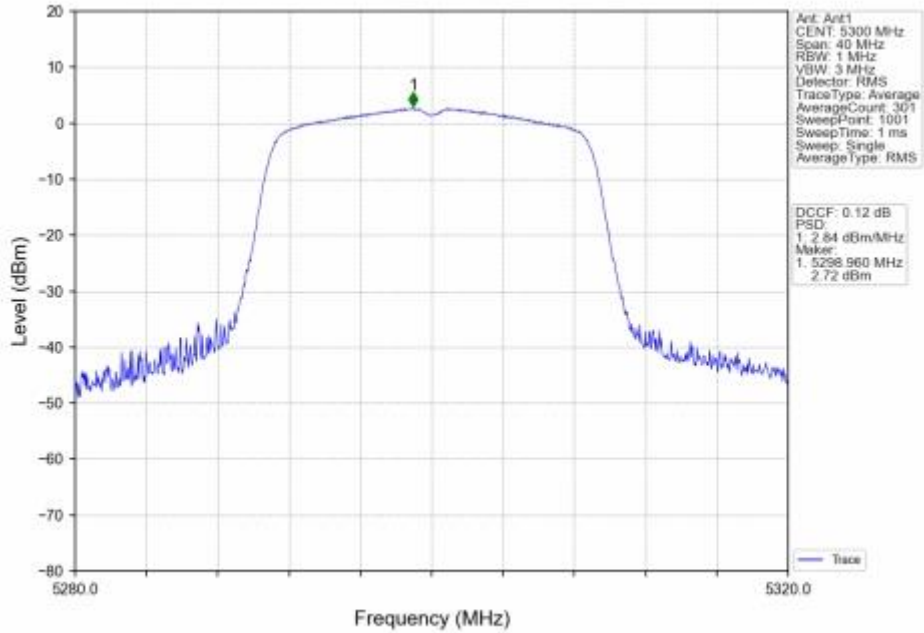


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

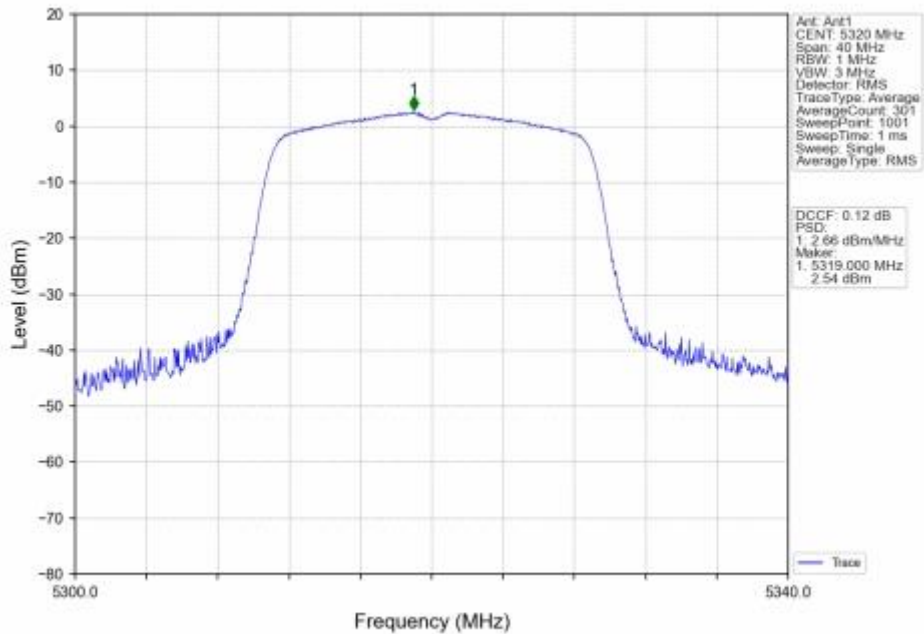


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

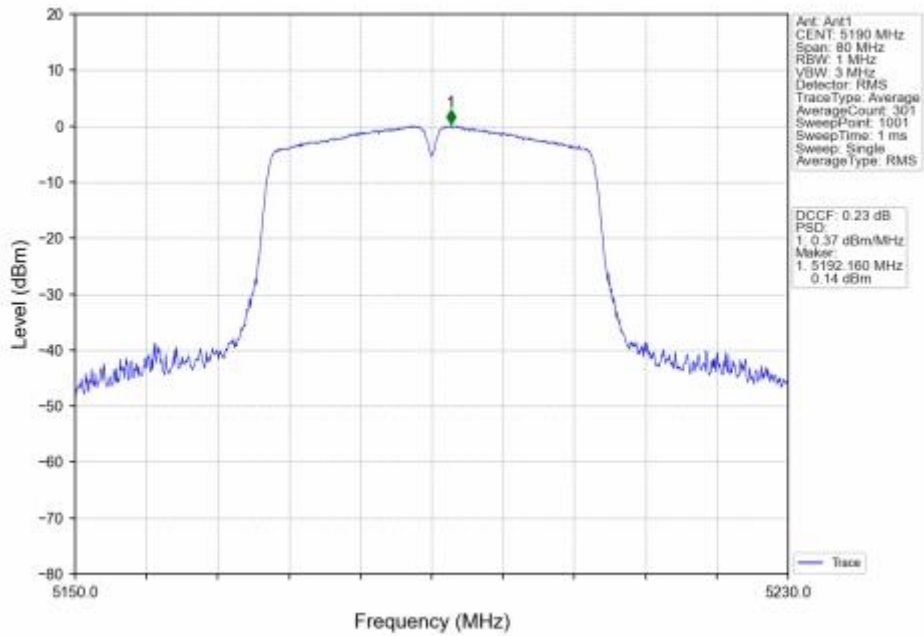


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

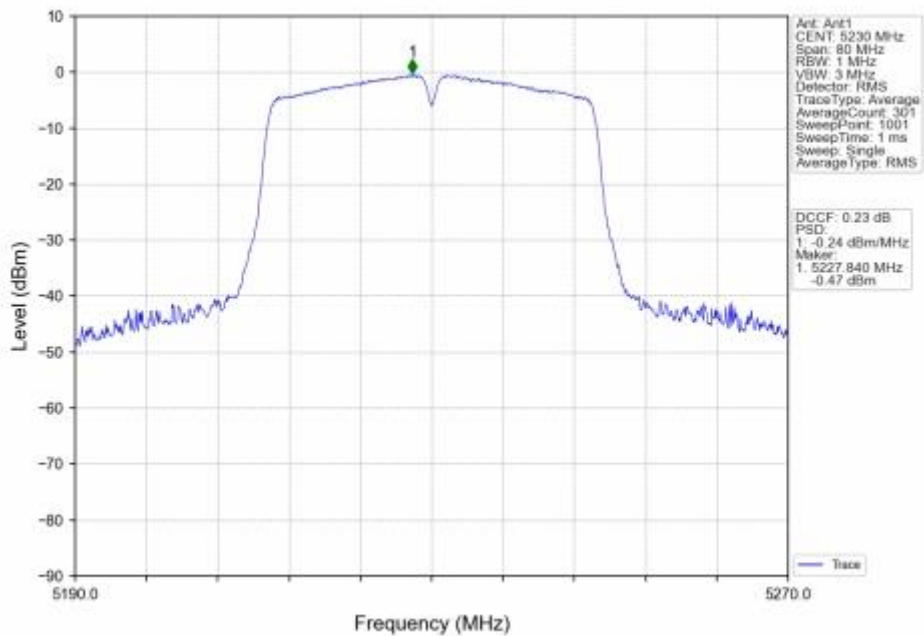

802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

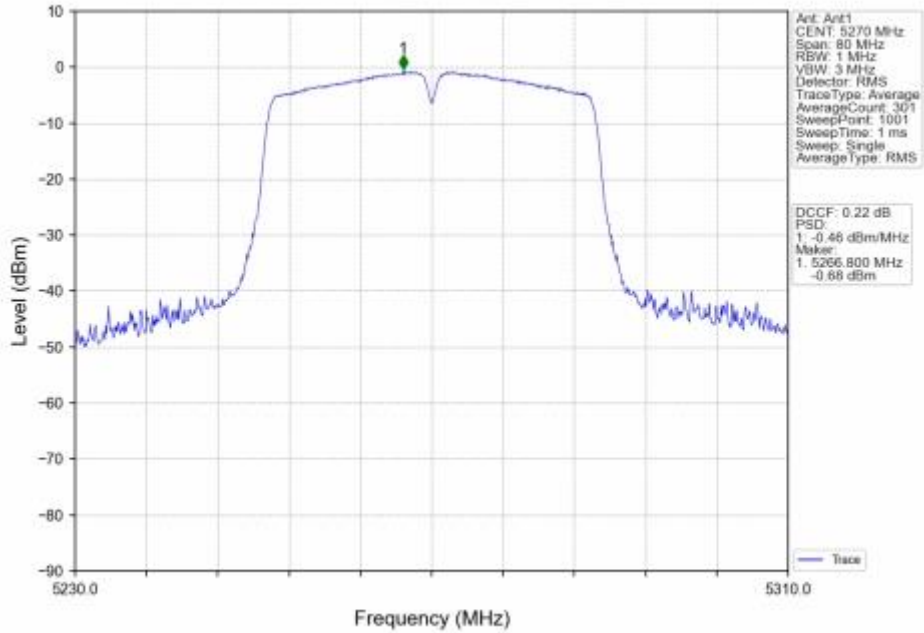

802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

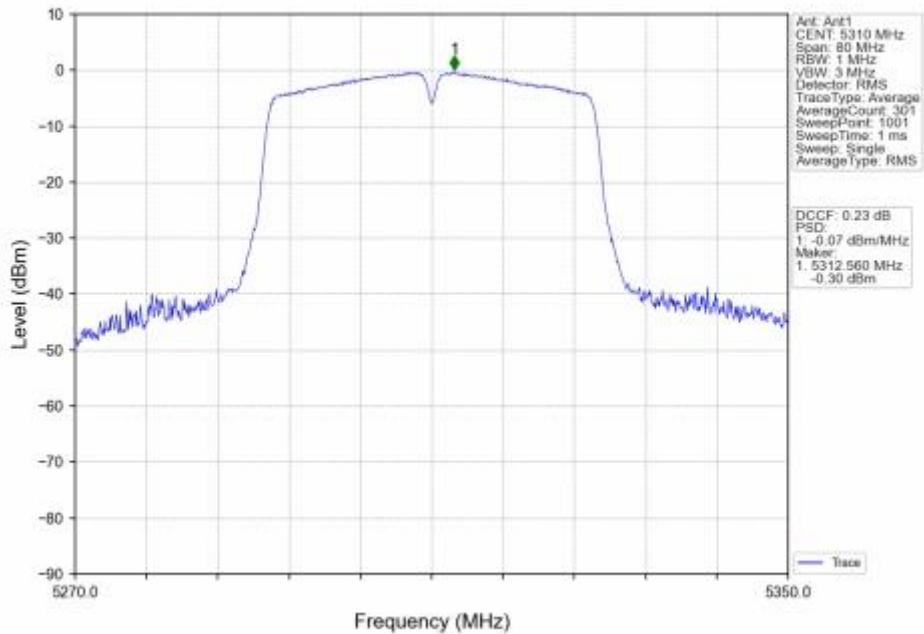


4.2 PSD-Band3

4.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/500kHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5745	0.40	<=30	Pass
		5785	-0.04	<=30	Pass
		5825	-0.03	<=30	Pass
802.11n (HT20)	SISO	5745	-0.04	<=30	Pass
		5785	-0.45	<=30	Pass
		5825	-0.35	<=30	Pass
802.11n (HT40)	SISO	5755	-3.29	<=30	Pass
		5795	-2.90	<=30	Pass

Note1: Antenna Gain: Ant1: 2.41dBi;


4.2.2 Test Graph

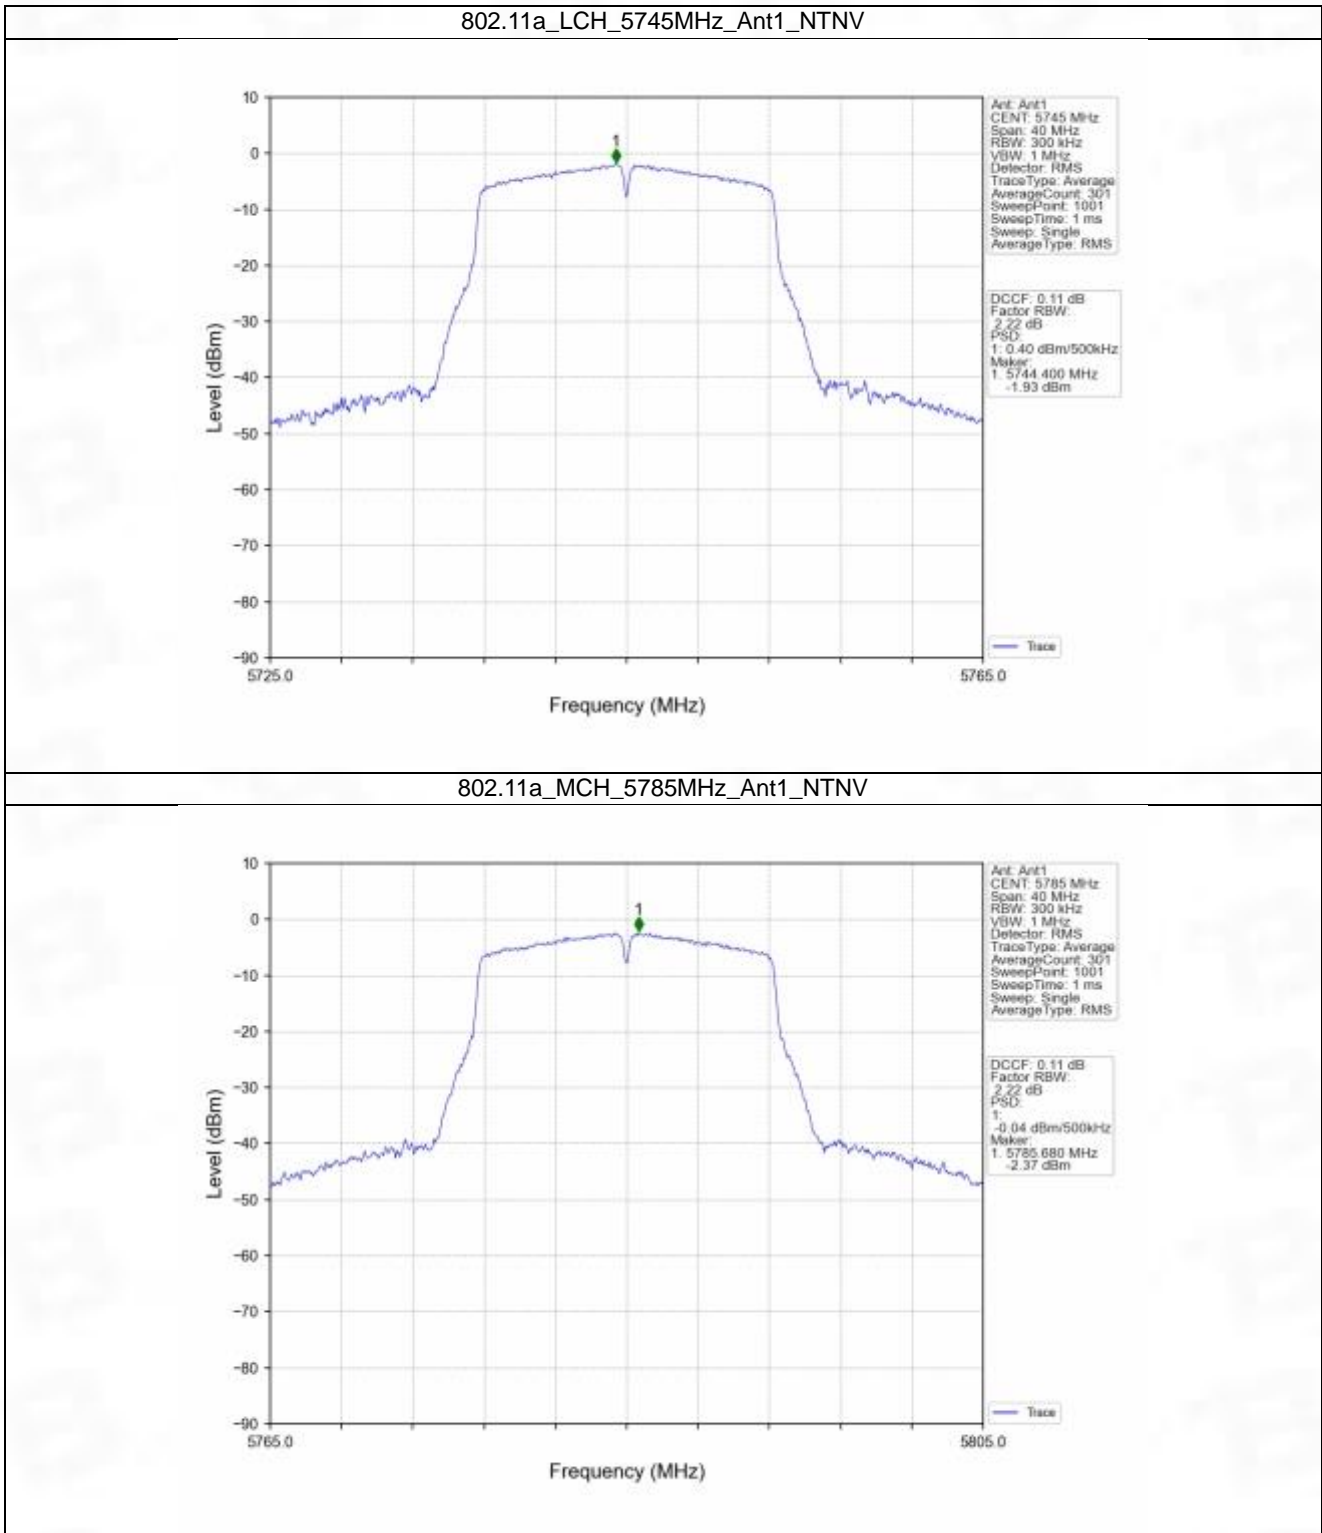


802.11a_HCH_5825MHz_Ant1_NTNV

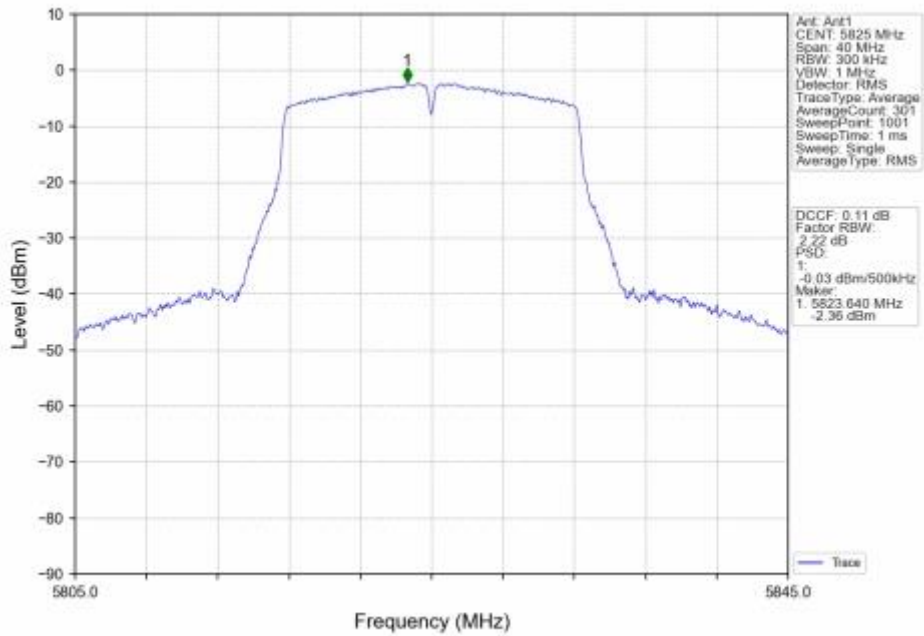


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

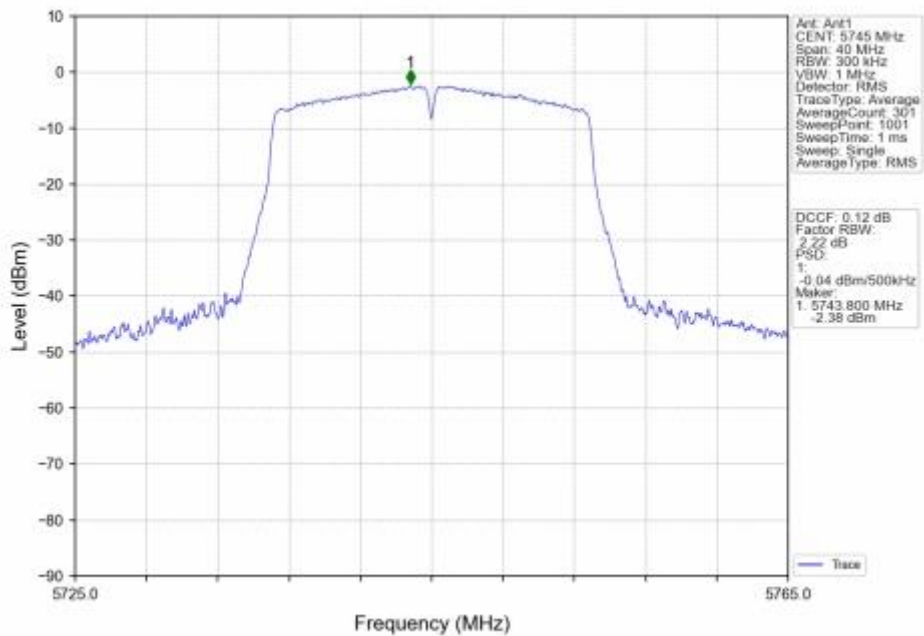


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

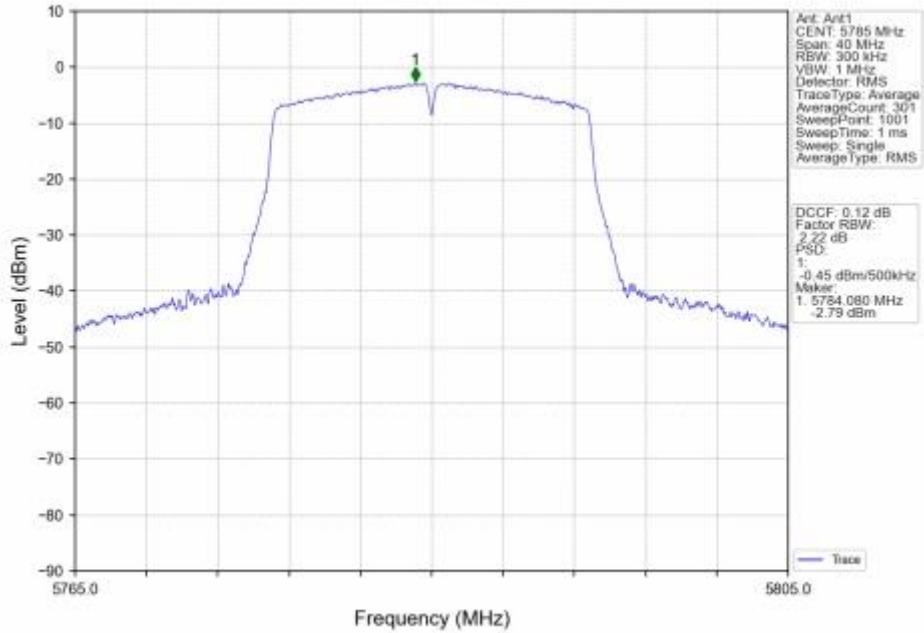


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

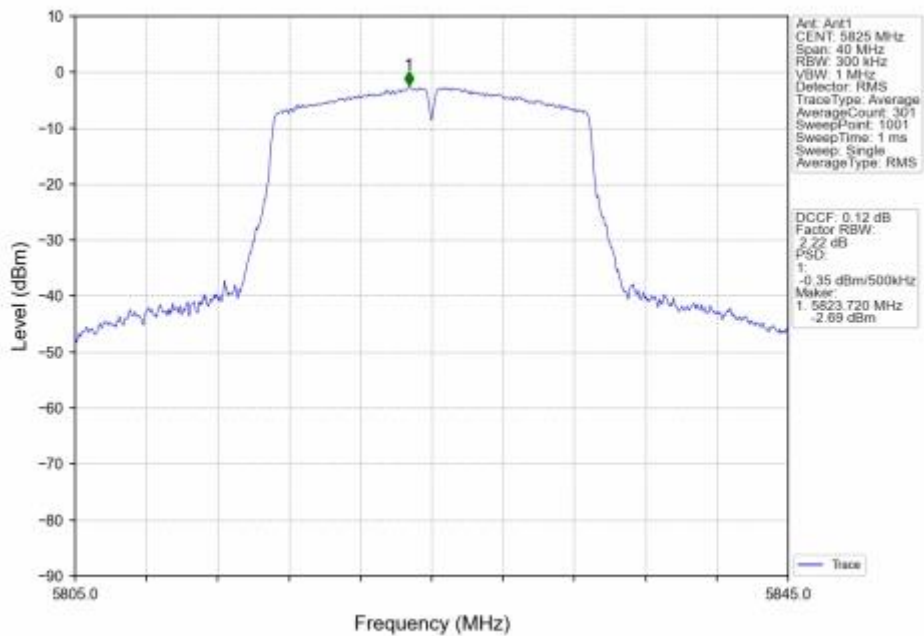

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

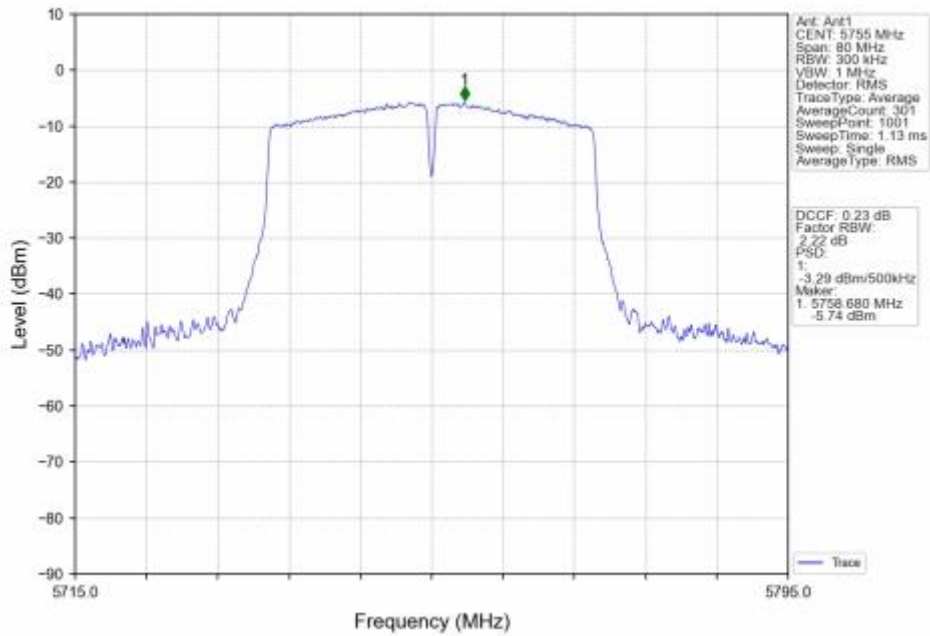

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

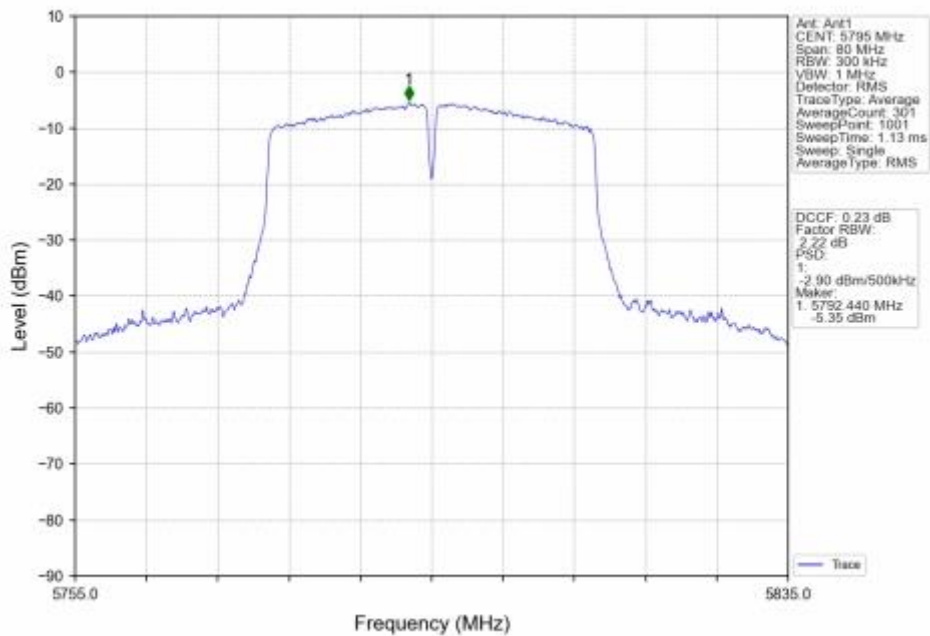

5. Frequency Stability

5.1 Ant1

5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict		
Carrier Wave	SISO	5180	20	102	5179.979	5150 to 5250	Pass		
				120	5179.979	5150 to 5250	Pass		
				138	5179.979	5150 to 5250	Pass		
			-30	120	5179.978	5150 to 5250	Pass		
				-20	120	5179.978	5150 to 5250	Pass	
					120	5179.978	5150 to 5250	Pass	
				-10	120	5179.978	5150 to 5250	Pass	
					0	120	5179.977	5150 to 5250	Pass
						120	5179.977	5150 to 5250	Pass
				10	120	5179.977	5150 to 5250	Pass	
		120	5179.977		5150 to 5250	Pass			
		30	120	5179.977	5150 to 5250	Pass			
			120	5179.977	5150 to 5250	Pass			
		40	120	5179.977	5150 to 5250	Pass			
			120	5179.977	5150 to 5250	Pass			
		50	120	5179.977	5150 to 5250	Pass			
			120	5179.977	5150 to 5250	Pass			
		5200	20	102	5199.976	5150 to 5250	Pass		
				120	5199.975	5150 to 5250	Pass		
				138	5199.975	5150 to 5250	Pass		
			-30	120	5199.975	5150 to 5250	Pass		
				-20	120	5199.975	5150 to 5250	Pass	
					120	5199.975	5150 to 5250	Pass	
				-10	120	5199.974	5150 to 5250	Pass	
					0	120	5199.974	5150 to 5250	Pass
						120	5199.974	5150 to 5250	Pass
				10	120	5199.974	5150 to 5250	Pass	
		120	5199.974		5150 to 5250	Pass			
		30	120	5199.974	5150 to 5250	Pass			
			120	5199.974	5150 to 5250	Pass			
		40	120	5199.974	5150 to 5250	Pass			
			120	5199.974	5150 to 5250	Pass			
		50	120	5199.974	5150 to 5250	Pass			
			120	5199.974	5150 to 5250	Pass			
		5240	20	102	5239.969	5150 to 5250	Pass		
				120	5239.969	5150 to 5250	Pass		
				138	5239.969	5150 to 5250	Pass		
			-30	120	5239.969	5150 to 5250	Pass		
				-20	120	5239.969	5150 to 5250	Pass	
					120	5239.969	5150 to 5250	Pass	
				-10	120	5239.969	5150 to 5250	Pass	
					0	120	5239.969	5150 to 5250	Pass
						120	5239.969	5150 to 5250	Pass
				10	120	5239.969	5150 to 5250	Pass	
		120	5239.969		5150 to 5250	Pass			
30	120	5239.969	5150 to 5250	Pass					
	120	5239.969	5150 to 5250	Pass					
40	120	5239.969	5150 to 5250	Pass					
	120	5239.969	5150 to 5250	Pass					
50	120	5239.968	5150 to 5250	Pass					
	120	5239.968	5150 to 5250	Pass					
5260	20	102	5259.968	5250 to 5350	Pass				
		120	5259.968	5250 to 5350	Pass				
		138	5259.968	5250 to 5350	Pass				
	-30	120	5259.968	5250 to 5350	Pass				
		120	5259.968	5250 to 5350	Pass				
	-10	120	5259.968	5250 to 5350	Pass				
120		5259.968	5250 to 5350	Pass					
0	120	5259.968	5250 to 5350	Pass					
	120	5259.968	5250 to 5350	Pass					

		10	120	5259.968	5250 to 5350	Pass	
		30	120	5259.968	5250 to 5350	Pass	
		40	120	5259.968	5250 to 5350	Pass	
		50	120	5259.968	5250 to 5350	Pass	
	5300	20	102	5299.969	5250 to 5350	Pass	
			120	5299.969	5250 to 5350	Pass	
			138	5299.969	5250 to 5350	Pass	
			-30	120	5299.969	5250 to 5350	Pass
			-20	120	5299.968	5250 to 5350	Pass
			-10	120	5299.968	5250 to 5350	Pass
			0	120	5299.968	5250 to 5350	Pass
			10	120	5299.968	5250 to 5350	Pass
			30	120	5299.968	5250 to 5350	Pass
			40	120	5299.968	5250 to 5350	Pass
			50	120	5299.968	5250 to 5350	Pass
		5320	20	102	5319.968	5250 to 5350	Pass
	120			5319.968	5250 to 5350	Pass	
	138			5319.968	5250 to 5350	Pass	
			-30	120	5319.968	5250 to 5350	Pass
			-20	120	5319.968	5250 to 5350	Pass
			-10	120	5319.968	5250 to 5350	Pass
			0	120	5319.969	5250 to 5350	Pass
			10	120	5319.968	5250 to 5350	Pass
			30	120	5319.968	5250 to 5350	Pass
			40	120	5319.969	5250 to 5350	Pass
			50	120	5319.968	5250 to 5350	Pass
	5745		20	102	5744.966	5725 to 5850	Pass
		120		5744.966	5725 to 5850	Pass	
		138		5744.966	5725 to 5850	Pass	
			-30	120	5744.966	5725 to 5850	Pass
			-20	120	5744.966	5725 to 5850	Pass
			-10	120	5744.966	5725 to 5850	Pass
			0	120	5744.966	5725 to 5850	Pass
			10	120	5744.966	5725 to 5850	Pass
			30	120	5744.966	5725 to 5850	Pass
			40	120	5744.966	5725 to 5850	Pass
		50	120	5744.966	5725 to 5850	Pass	
	5785	20	102	5784.966	5725 to 5850	Pass	
			120	5784.966	5725 to 5850	Pass	
			138	5784.966	5725 to 5850	Pass	
			-30	120	5784.966	5725 to 5850	Pass
			-20	120	5784.966	5725 to 5850	Pass
			-10	120	5784.966	5725 to 5850	Pass
			0	120	5784.966	5725 to 5850	Pass
			10	120	5784.966	5725 to 5850	Pass
			30	120	5784.966	5725 to 5850	Pass
			40	120	5784.966	5725 to 5850	Pass
		50	120	5784.966	5725 to 5850	Pass	
	5825	20	102	5824.966	5725 to 5850	Pass	
			120	5824.965	5725 to 5850	Pass	
			138	5824.966	5725 to 5850	Pass	
		-30	120	5824.966	5725 to 5850	Pass	

		-20	120	5824.966	5725 to 5850	Pass
		-10	120	5824.966	5725 to 5850	Pass
		0	120	5824.966	5725 to 5850	Pass
		10	120	5824.966	5725 to 5850	Pass
		30	120	5824.966	5725 to 5850	Pass
		40	120	5824.966	5725 to 5850	Pass
		50	120	5824.966	5725 to 5850	Pass
	5190	20	102	5189.969	5150 to 5250	Pass
			120	5189.969	5150 to 5250	Pass
			138	5189.969	5150 to 5250	Pass
		-30	120	5189.969	5150 to 5250	Pass
		-20	120	5189.969	5150 to 5250	Pass
		-10	120	5189.969	5150 to 5250	Pass
		0	120	5189.969	5150 to 5250	Pass
		10	120	5189.969	5150 to 5250	Pass
		30	120	5189.969	5150 to 5250	Pass
		40	120	5189.969	5150 to 5250	Pass
		50	120	5189.968	5150 to 5250	Pass
	5230	20	102	5229.968	5150 to 5250	Pass
			120	5229.968	5150 to 5250	Pass
			138	5229.968	5150 to 5250	Pass
		-30	120	5229.968	5150 to 5250	Pass
		-20	120	5229.968	5150 to 5250	Pass
		-10	120	5229.968	5150 to 5250	Pass
		0	120	5229.968	5150 to 5250	Pass
		10	120	5229.968	5150 to 5250	Pass
		30	120	5229.968	5150 to 5250	Pass
		40	120	5229.968	5150 to 5250	Pass
		50	120	5229.968	5150 to 5250	Pass
	5270	20	102	5269.968	5250 to 5350	Pass
			120	5269.968	5250 to 5350	Pass
			138	5269.968	5250 to 5350	Pass
		-30	120	5269.968	5250 to 5350	Pass
		-20	120	5269.968	5250 to 5350	Pass
		-10	120	5269.968	5250 to 5350	Pass
		0	120	5269.968	5250 to 5350	Pass
		10	120	5269.968	5250 to 5350	Pass
		30	120	5269.968	5250 to 5350	Pass
		40	120	5269.968	5250 to 5350	Pass
	50	120	5269.968	5250 to 5350	Pass	
	5310	20	102	5309.967	5250 to 5350	Pass
			120	5309.967	5250 to 5350	Pass
			138	5309.967	5250 to 5350	Pass
		-30	120	5309.967	5250 to 5350	Pass
		-20	120	5309.967	5250 to 5350	Pass
		-10	120	5309.967	5250 to 5350	Pass
		0	120	5309.967	5250 to 5350	Pass
		10	120	5309.967	5250 to 5350	Pass
		30	120	5309.967	5250 to 5350	Pass
		40	120	5309.967	5250 to 5350	Pass
	50	120	5309.967	5250 to 5350	Pass	
	5755	20	102	5754.965	5725 to 5850	Pass

			120	5754.965	5725 to 5850	Pass	
			138	5754.965	5725 to 5850	Pass	
		-30	120	5754.964	5725 to 5850	Pass	
		-20	120	5754.965	5725 to 5850	Pass	
		-10	120	5754.965	5725 to 5850	Pass	
		0	120	5754.965	5725 to 5850	Pass	
		10	120	5754.965	5725 to 5850	Pass	
		30	120	5754.965	5725 to 5850	Pass	
		40	120	5754.965	5725 to 5850	Pass	
		50	120	5754.965	5725 to 5850	Pass	
	5795	20		102	5794.965	5725 to 5850	Pass
				120	5794.965	5725 to 5850	Pass
				138	5794.965	5725 to 5850	Pass
		-30	120	5794.965	5725 to 5850	Pass	
		-20	120	5794.964	5725 to 5850	Pass	
		-10	120	5794.964	5725 to 5850	Pass	
		0	120	5794.964	5725 to 5850	Pass	
		10	120	5794.964	5725 to 5850	Pass	
		30	120	5794.964	5725 to 5850	Pass	
		40	120	5794.964	5725 to 5850	Pass	
50	120	5794.964	5725 to 5850	Pass			

6. Form731

6.1 Form731

6.1.1 Test Result

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
5180	5240	0.0221	13.44
5260	5320	0.0214	13.30
5745	5825	0.0212	13.27
5190	5230	0.0234	13.70
5270	5310	0.0215	13.33
5755	5795	0.0209	13.20



Test Report Number: BTF230512R00204



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --