

FCC Part 15B Measurement and Test Report

For

Xwireless LLC

11426 Rockville pike, Rockville Md

FCC ID: 2ADLJBEAT

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Mobile Phone</u>
Tested Model:	<u>Beat</u>
Report No.:	<u>STR15018110I-5</u>
Tested Date:	<u>2015-01-13 to 2015-01-27</u>
Issued Date:	<u>2015-01-27</u>
Tested By:	<u>Lebron Wang / Engineer</u> <i>Lebron Wang</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	Shenzhen SEM.Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY.....	7
3.2 TEST EQUIPMENT LIST AND DETAILS.....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS.....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
4. RADIATED EMISSIONS	11
4.1 MEASUREMENT UNCERTAINTY.....	11
4.2 TEST EQUIPMENT LIST AND DETAILS.....	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP.....	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS.....	12
4.7 SUMMARY OF TEST RESULTS/PLOTS.....	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Xwireless LLC
 Address of applicant: 11426 Rockville pike, Rockville Md

Manufacturer: Xwireless LLC
 Address of manufacturer: 11426 Rockville pike, Rockville Md

General Description of EUT	
Product Name:	Mobile Phone
Trade Name:	/
Model No.:	Beat
Adding Model(s):	/
<p><i>The EUT is GSM850/900/DCS1800/PCS1900, WCDMA Band II/V, Mobile Phone. the Mobile Phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, GPS and camera functions. For more information see the following datasheet</i></p> <p><i>Note: The test data is gathered from a production sample provided by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	5.0V
Rated Current:	500mA
Rated Power:	/
Power Adapter Model:	Beat
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	1.2GHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Xwireless LLC in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	Connect to Adapter
TM2	Downloading	Connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Shielded	Without Core
Earphone	1.2	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Note: Base on the calibrated result, for the impedance characteristic and insertion loss, the effect shall be ignored from the placed multiple outlet power strip between the device and LISN.

3.4 Basic Test Setup Block Diagram

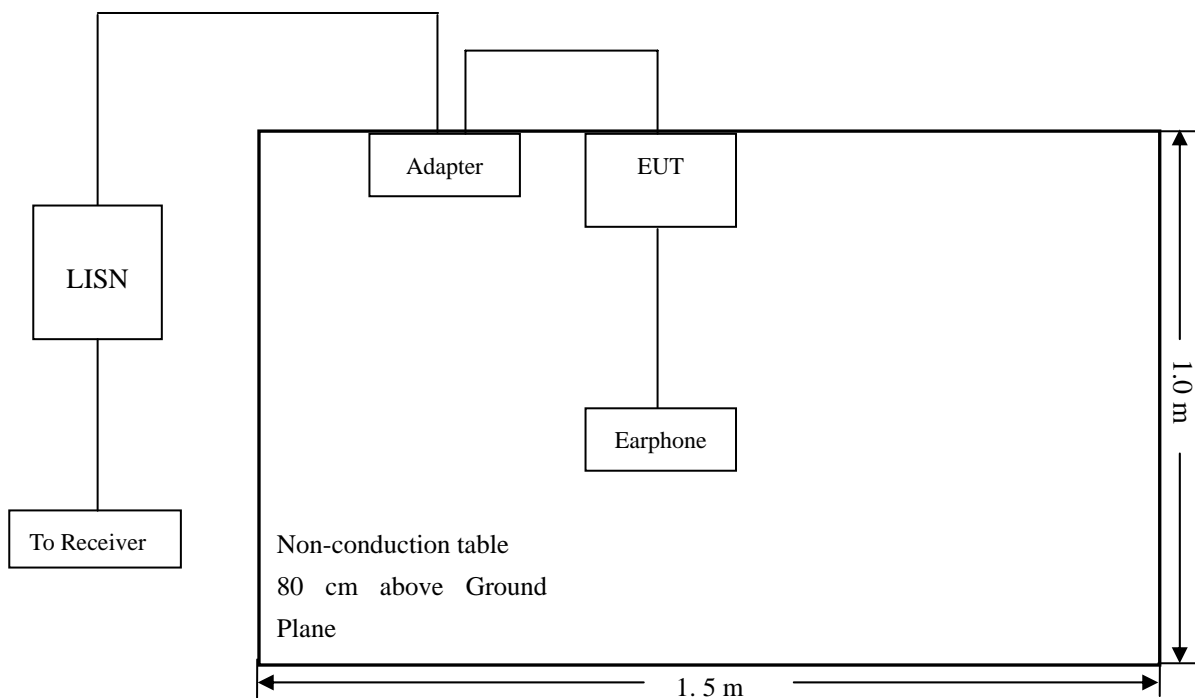

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-7.16 dB at 0.1940 MHz in the Line, Peak detector, 0.15-30MHz

3.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *Beat*
 Operating Condiation: *TMI*
 Comment: *AC 120V/60Hz,Adapter DC 5V/0.5A*

 Test Specification: *Neutral*

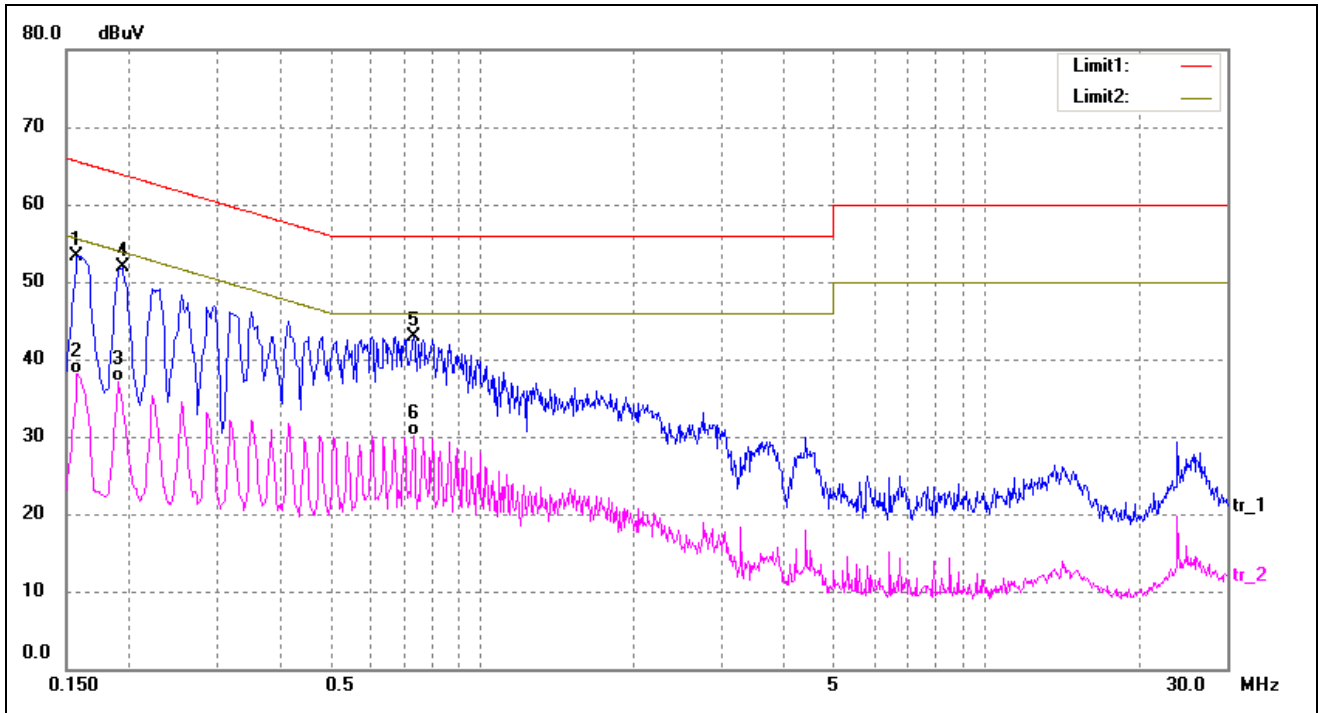

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	43.85	9.50	53.35	65.57	-12.22	peak
2	0.1580	28.70	9.50	38.20	55.57	-17.37	AVG
3	0.1900	27.70	9.50	37.20	54.04	-16.84	AVG
4	0.1940	42.37	9.50	51.87	63.86	-11.99	peak
5	0.7340	33.24	9.73	42.97	56.00	-13.03	peak
6	0.7340	20.30	9.73	30.03	46.00	-15.97	AVG

Test Specification: Line

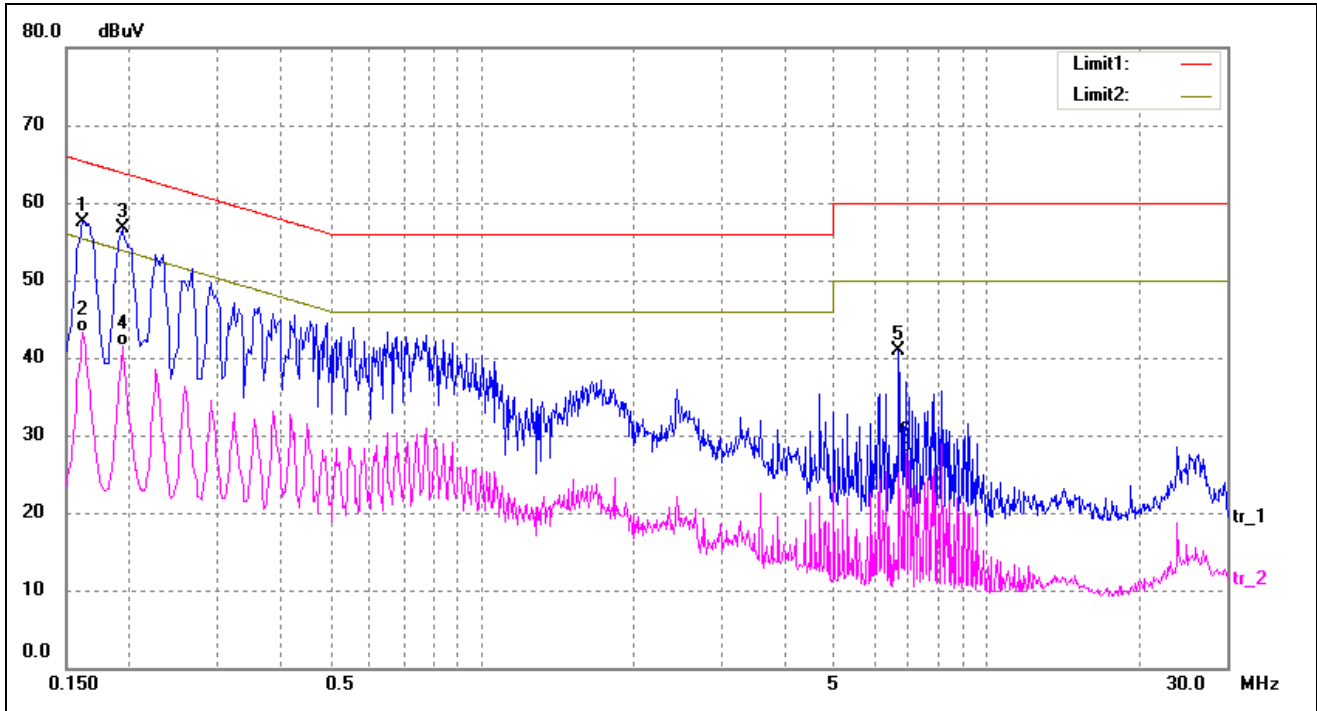

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	48.04	9.50	57.54	65.36	-7.82	peak
2	0.1620	33.72	9.50	43.22	55.36	-12.14	AVG
3	0.1940	47.20	9.50	56.70	63.86	-7.16	peak
4	0.1940	32.04	9.50	41.54	53.86	-12.32	AVG
5	6.7300	30.86	10.00	40.86	60.00	-19.14	peak
6	6.9380	17.80	10.00	27.80	50.00	-22.20	AVG

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-28	2015-05-27

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

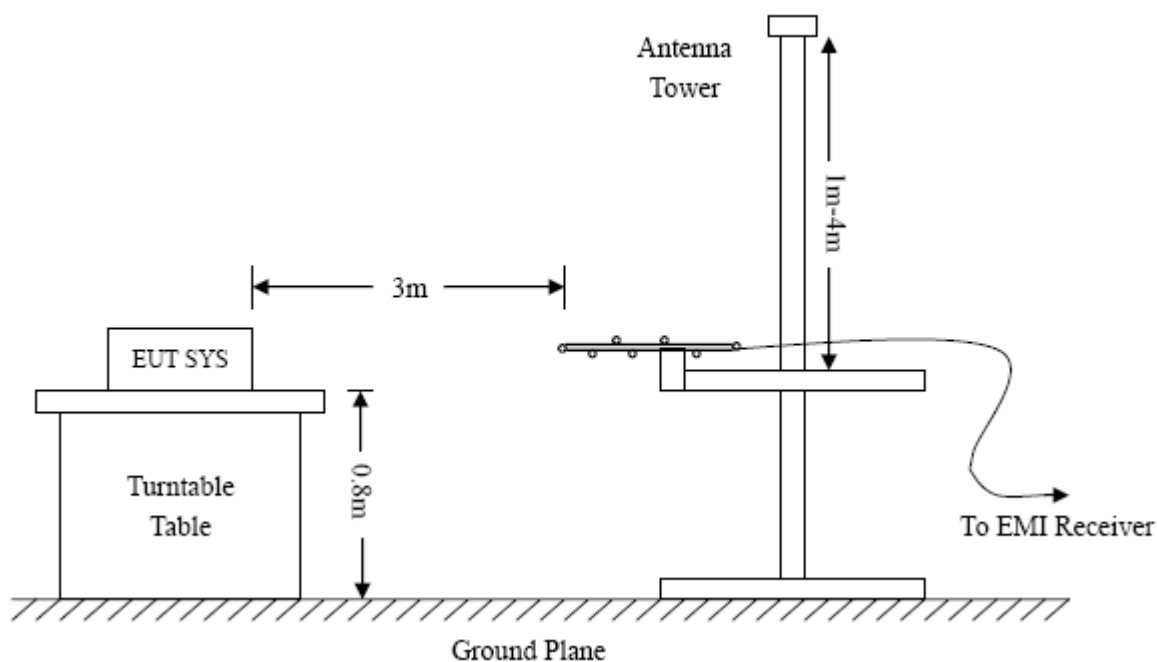

4.4 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-1.84 dB at 40.4172 MHz in the Vertical polarization, TM2 mode, 9 kHz to 6 GHz, 3Meters


Plot of Radiated Emissions Test Data

EUT: *Mobile Phone*
 Tested Model: *Beat*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz,Adapter DC 5V/0.5A*
 Test Specification: *Horizontal*

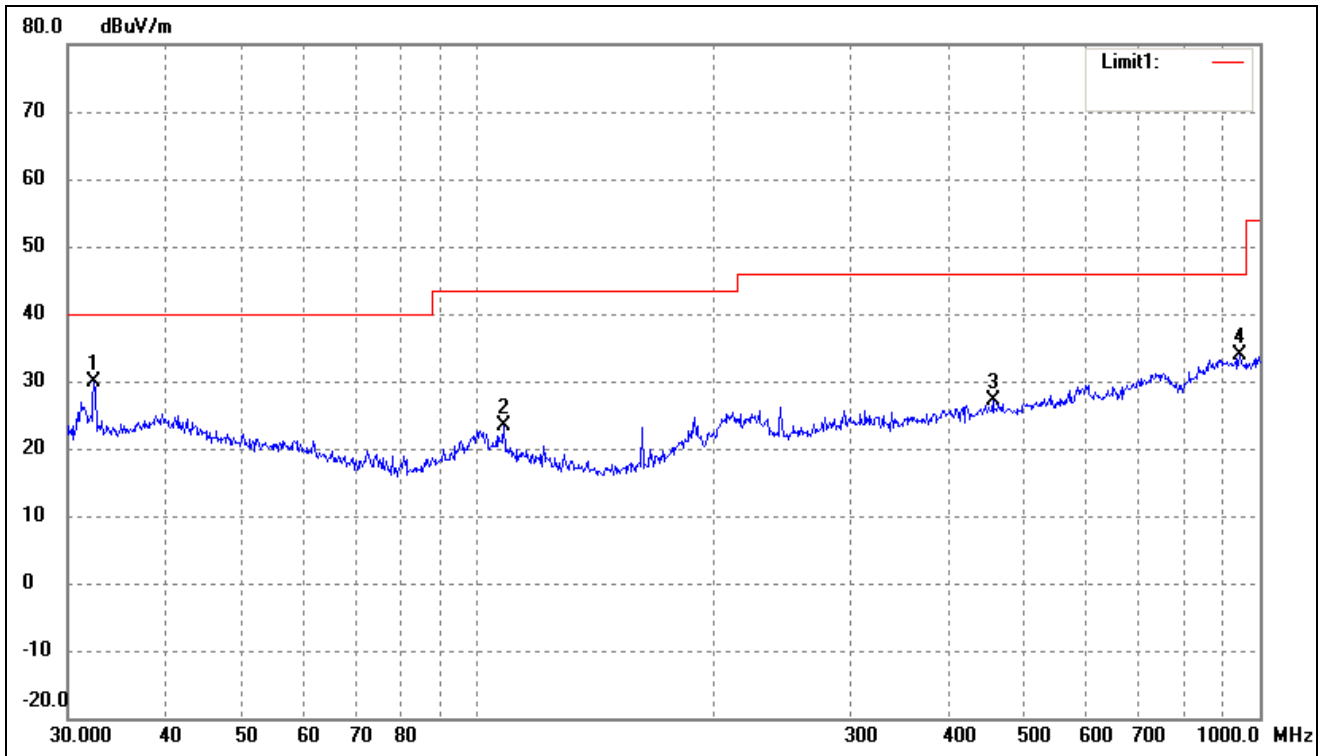

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	24.55	5.24	29.79	40.00	-10.21	108	150	peak
2	108.2667	18.00	5.26	23.26	43.50	-20.24	130	100	peak
3	455.9058	16.70	10.45	27.15	46.00	-18.85	229	150	peak
4	942.1305	17.61	16.23	33.84	46.00	-12.16	120	100	peak

Test Specification: Vertical

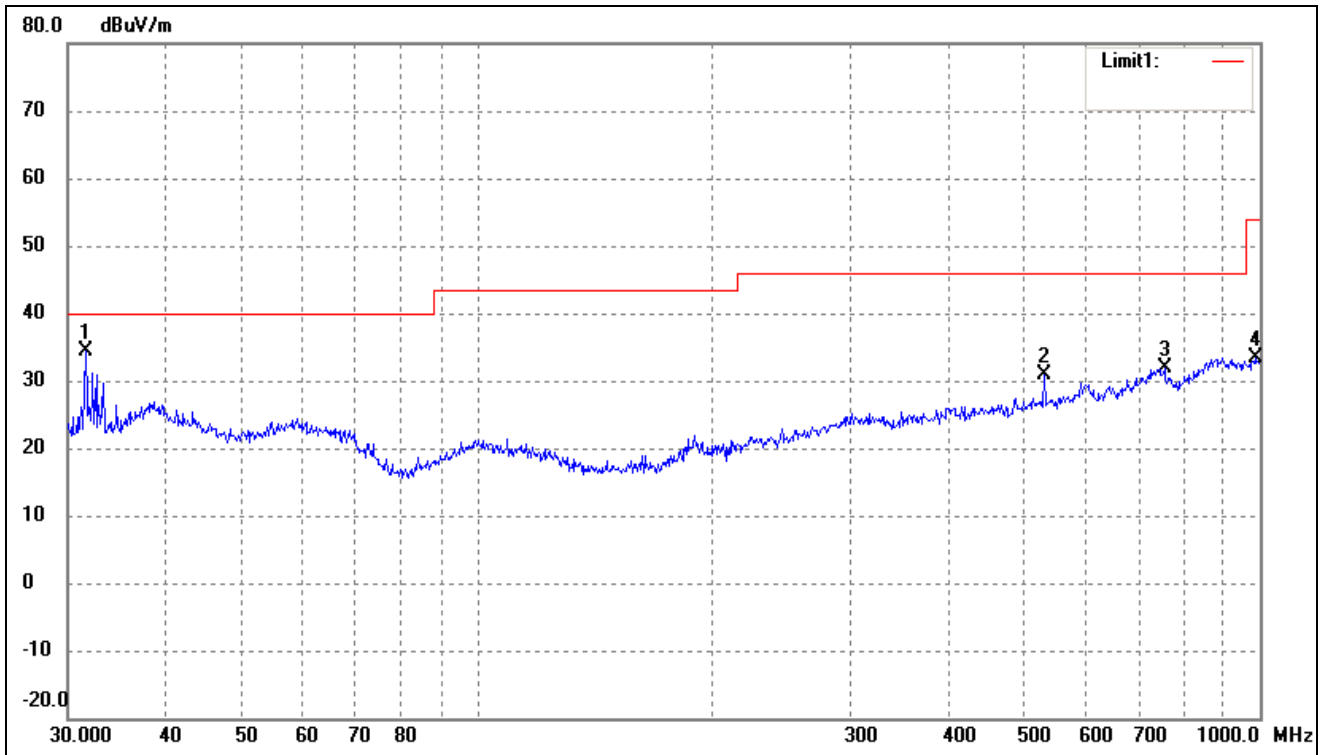


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.6202	26.51	7.88	34.39	40.00	-5.61	251	100	peak
2	530.1014	19.49	11.33	30.82	46.00	-15.18	308	100	peak
3	755.3873	17.05	14.86	31.91	46.00	-14.09	120	100	peak
4	986.0717	16.57	16.90	33.47	54.00	-20.53	359	100	peak

Plot of Radiated Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *Beat*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz, USB DC 5V*

Test Specification: *Horizontal*

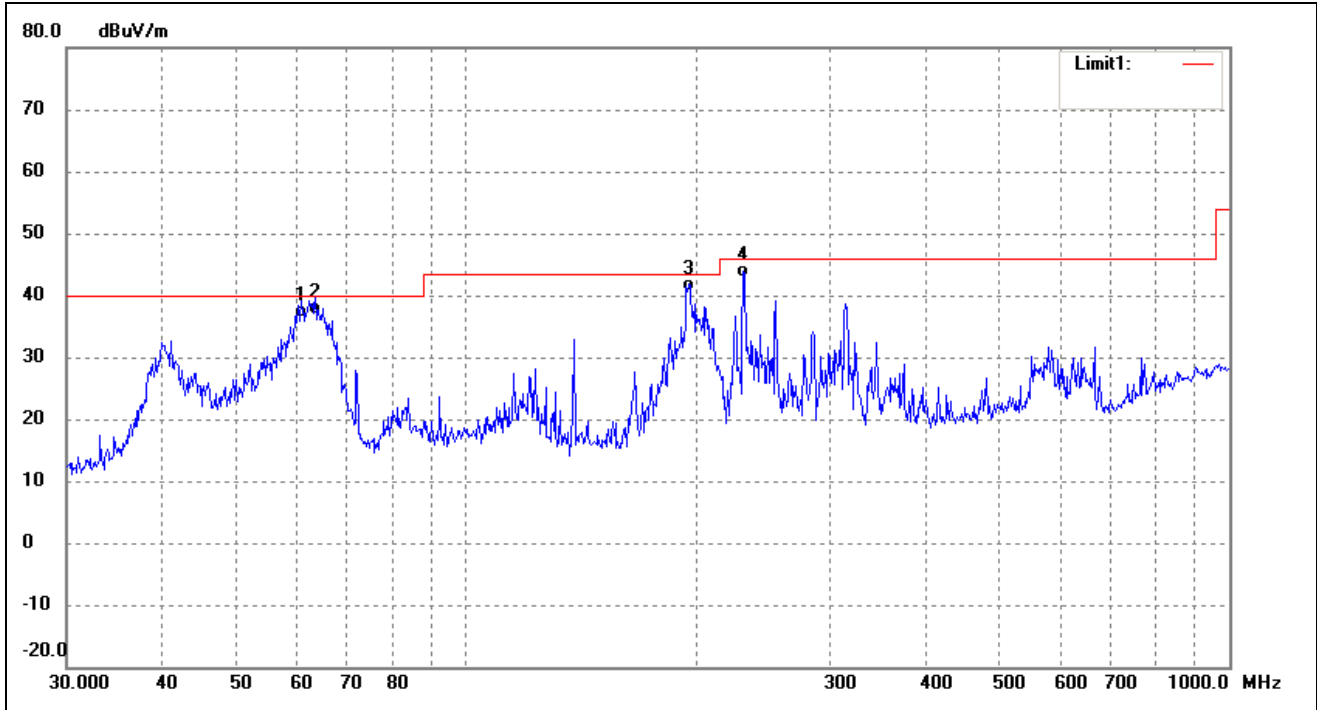

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.9176	45.57	-9.18	36.39	40.00	-3.61	158	100	QP
2	63.5356	46.59	-9.60	36.99	40.00	-3.01	226	100	QP
3	195.8220	50.01	-9.47	40.54	43.50	-2.96	129	150	QP
4	230.9068	51.26	-8.29	42.97	46.00	-3.03	109	100	QP

Test Specification: Vertical

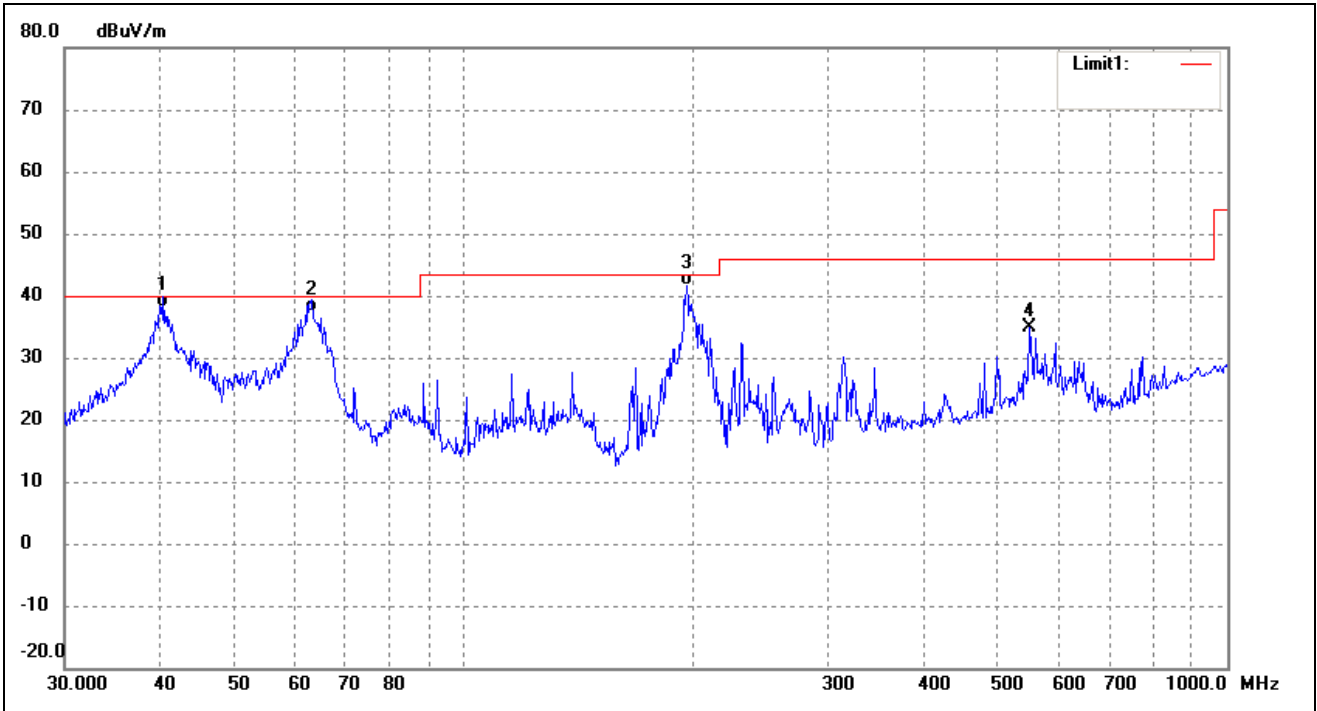

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.4172	46.52	-8.36	38.16	40.00	-1.84	51	100	QP
2	63.0915	47.02	-9.53	37.49	40.00	-2.51	308	100	QP
3	195.8220	51.11	-9.47	41.64	43.50	-1.86	120	100	QP
4	550.9479	34.78	0.16	34.94	46.00	-11.06	359	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

***** END OF REPORT *****