


Application Information	
Revision	E-245-351
TotalTime	4m 17s 934ms
AdditionalInfor	NULL
Model	E3216
Manufacturer	Shenzhen Blinntrum Technology Co., Ltd
Address	Building A, Wisdom Plaza, o. 4008 Qiaoxiang Road, Gaofa Community, Shahu Street, Nanshan District, Shenzhen, China
Antenna Max. Peak Gain	+0.05

ANT




Passive Test For BT												
Freq (MHz)	Eff1 (%)	Eff1 (dB)	Gain (dBi)	Gain (dBd)	RMSE (%)	RMSE (%)	Max (dB)	Min (dB)	Directivity (dBi)	Summit (3dB)	Att1 (dB)	Att2 (dB)
2400	31.41	-5.03	-0.05	-2.2	0	0	-0.05	-14.84	5.03	0	47.36	46.80
2410	29.14	-5.36	-0.34	-2.49	0	0	-0.34	-14.41	5.36	0	47.4	46.9
2420	25.66	-5.91	-0.89	-3.04	0	0	-0.89	-16.78	5.91	0	47.28	46.33
2430	28.02	-5.33	-0.57	-2.72	0	0	-0.57	-19.3	5.33	0	47.33	46.78
2440	24.53	-6.28	-1.35	-3.5	0	0	-1.35	-23.37	6.28	0	47.18	46.65
2450	25.01	-6.02	-1.09	-3.24	0	0	-1.09	-25.31	6.02	0	47.33	46.85
2460	26.28	-5.8	-0.89	-3.04	0	0	-0.89	-20.87	5.8	0	47.72	47.22
2470	18.57	-7.31	-2.25	-4.4	0	0	-2.25	-18.54	7.31	0	47.36	46.93
2480	21.2	-6.74	-1.49	-3.64	0	0	-1.49	-20.18	6.74	0	47.56	47.1
2490	17.74	-7.51	-2.17	-4.32	0	0	-2.17	-24.05	7.51	0	47.05	46.67
2500	17.73	-7.51	-2.15	-4.31	0	0	-2.15	-23.72	7.51	0	47.01	46.63


2400.00MHz - 2500.00MHz Gain

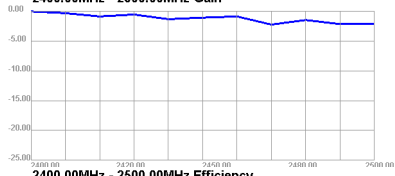


2400.00MHz - 2500.00MHz Efficiency

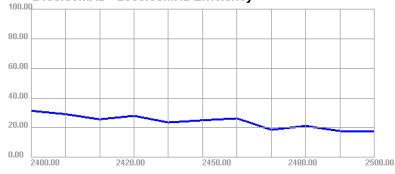


2400.000MHz




2400.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz




2450.000MHz H




2450.000MHz E1




2450.000MHz E2




2500.000MHz



2500.000MHz H



2500.000MHz E1



2500.000MHz E2

