



TESTING LABORATORY  
CERTIFICATE # 4821.01



## FCC PART 15.235


### TEST REPORT

For

### Zeeva International Limited

Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Hong Kong

**FCC ID: 2ADM5-ET-0040-49**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 1 24 CAR WHEEL ROMOTE-49MHz
<b>Report Number:</b> RSZ191216832-00	
<b>Report Date:</b> 2020-01-02	
<b>Reviewed By:</b> RF Engineer Kieron Luo 	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>7</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
ANTENNA CONNECTOR CONSTRUCTION .....	8
<b>FCC §15.235(A) &amp; 15.235 (B)&amp;15.209 - RADIATED EMISSIONS AND BAND EDGES.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
MEASUREMENT UNCERTAINTY.....	9
EUT SETUP.....	9
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE .....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10
<b>FCC§15.215(C) - 20DB EMISSION BANDWIDTH .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
TEST PROCEDURE .....	14
TEST DATA .....	14

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

Product	1 24 CAR WHEEL ROMOTE-49MHz
Tested Model	ET-0040-V1
Multiple Model	ET-0040-V2
UPC Number	192234049013
SKU Number	3274156
Voltage Range	DC 1.5V*2 V from battery
Date of Test	2019-12-24
Sample serial number	RSZ191216832-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2019-12-19
Sample/EUT Status	Good condition

*Notes: This series products model: ET-0040-V2 and ET-0040-V1 are identical schematics. Model ET-0040-V1 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.*

### Objective

This Type approval report is prepared on behalf of *Zeeva International Limited* in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, section 15.203, 15.205, 15.209, 15.215 and 15.235 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 4.75 dB for 30MHz-1GHz, and 4.88 dB for above 1GHz, 1.6dB for conducted measurement.

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).


### Special Accessories

No special accessories was used

### Equipment Modifications

No modification was made to the EUT.

### Block Diagram of Test Setup

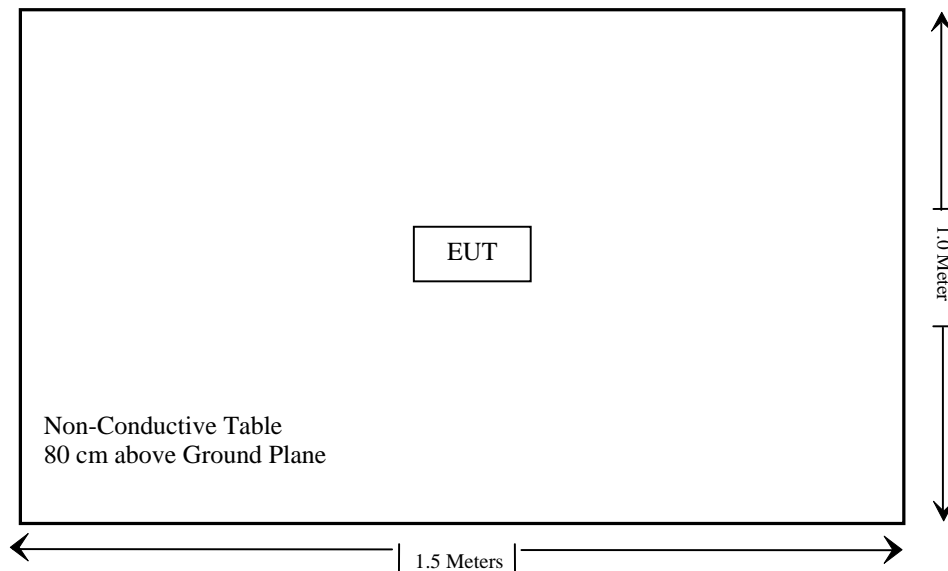

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.235(a)& 15.235(b)&15.209	Radiated Emissions and Band Edges	Compliance
§15.215	20 dB bandwidth	Compliance

Not Applicable: The EUT is powered by battery.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2019/4/20	2020/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	Unknown	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	Unknown	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has an integrated antenna arrangement, which was permanently attached and the antenna gain is 0 dBi; fulfill the requirement of this section. Please refer to EUT photos.

**Result:** Compliance.



## FCC §15.235(a) & 15.235 (b)&15.209 - RADIATED EMISSIONS AND BAND EDGES

### Applicable Standard

#### FCC 15.235(a)

The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

#### FCC 15.235(b)


The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report.

### EUT Setup

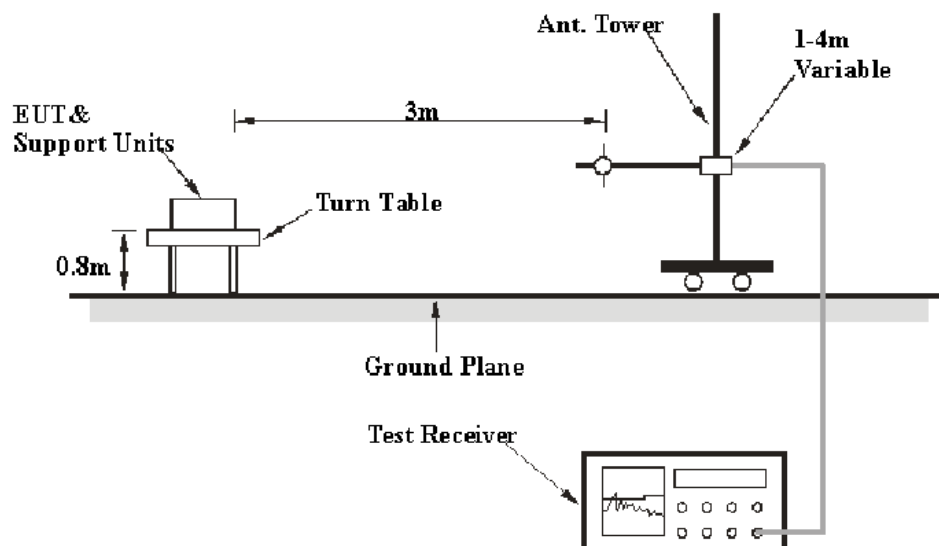

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.235(a) & 15.235 (b) & 15.209 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All radiated emission data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode for fundamental test.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the EUT complied with the FCC Part 15.235(a) & 15.235 (b) & 15.209

## Test Data


### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Zero Yan on 2019-12-24.*

*Test Mode: Transmitting (Scan with X-AXIS, Y-AXIS, Z-AXIS, the worst case was recorded)*

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	PK/QP/Ave.	Turntable Degree	Rx Antenna		Corrected Factor (dB)	FCC PART 15.235		Remark
				Height (m)	Polar (H / V)		Limit (dB $\mu$ V/m)	Margin (dB)	
49.86	68.31	PK	64	3.3	H	-10.9	100	31.69	Fundamental
49.86	64.22	Ave.	64	3.3	H	-10.9	80	15.78	
49.86	67.18	PK	95	3.4	V	-10.9	100	32.82	
49.86	63.62	Ave.	95	3.4	V	-10.9	80	16.38	

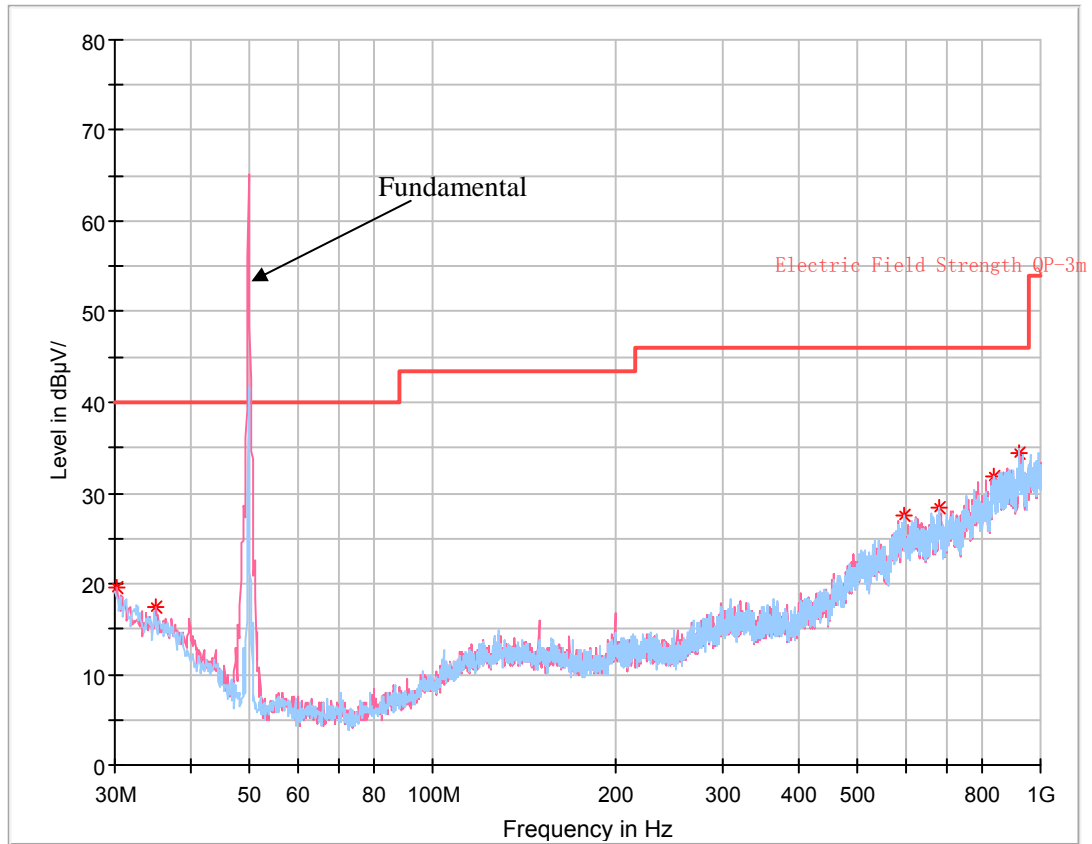**30 MHz~1 GHz**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.242500	19.62	105.0	V	126.0	-7.8	40.00	20.38
35.092500	17.38	205.0	V	320.0	-10.6	40.00	22.62
598.298750	27.46	305.0	H	155.0	-1.7	46.00	18.54
680.870000	28.33	305.0	H	274.0	-1.4	46.00	17.67
837.040000	31.89	390.0	H	334.0	2.7	46.00	14.11
923.248750	34.31	205.0	V	171.0	4.6	46.00	11.69

**Note:**


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) +cable loss - amplifier factor


Margin = Limit- Corr. Amplitude

**Result:** Compliance

## 26 dB Band Edge-Left

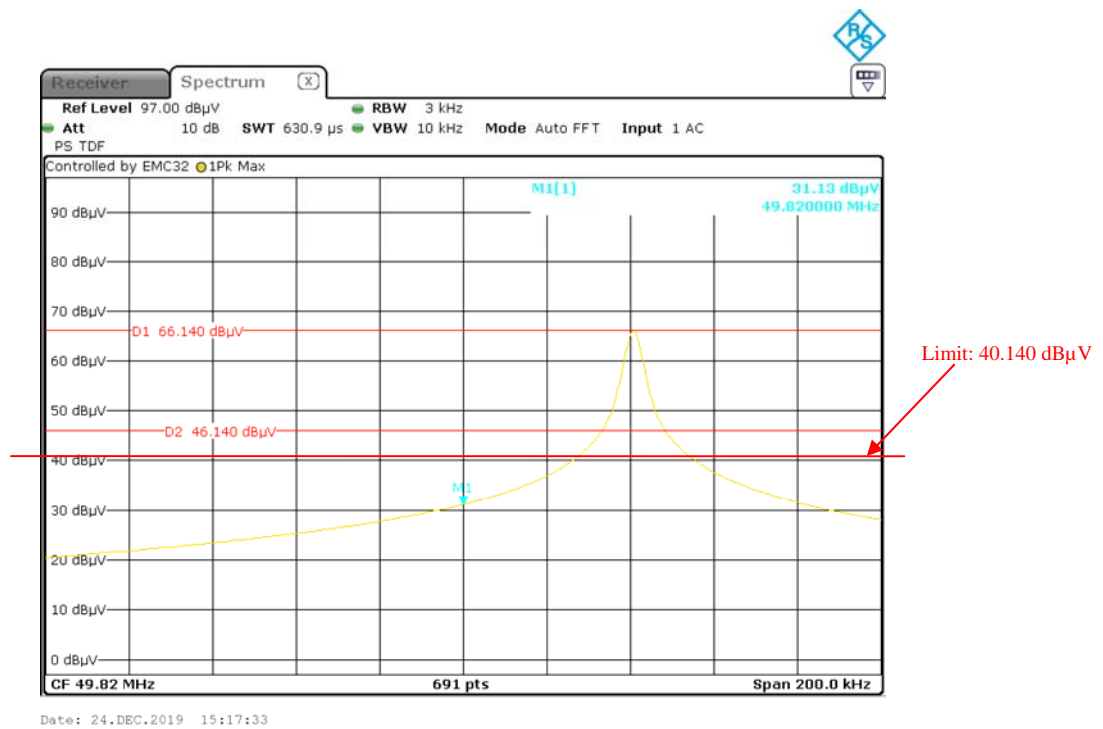

## 26 dB Band Edge-Right

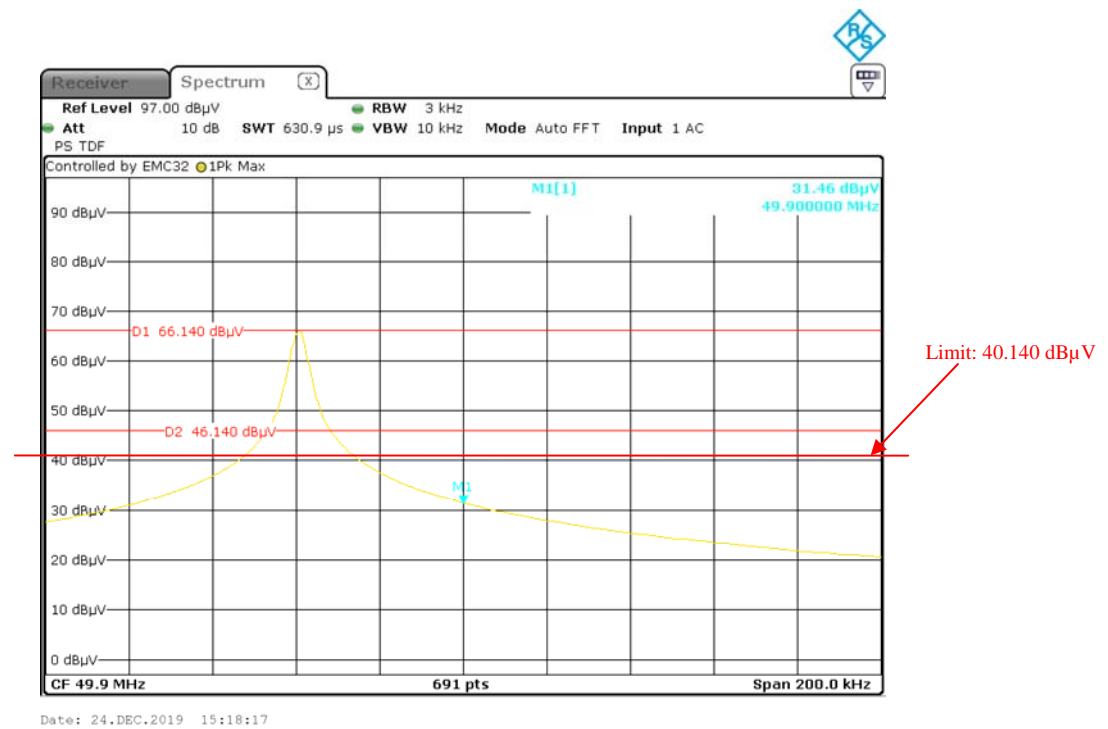

**FCC§15.215(c) - 20dB EMISSION BANDWIDTH****Applicable Standard**

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**


<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Zero Yan on 2019-12-24.*

*Test Mode: Transmitting*

Please refer to following plot and table.

### 20 dB Emission Bandwidth

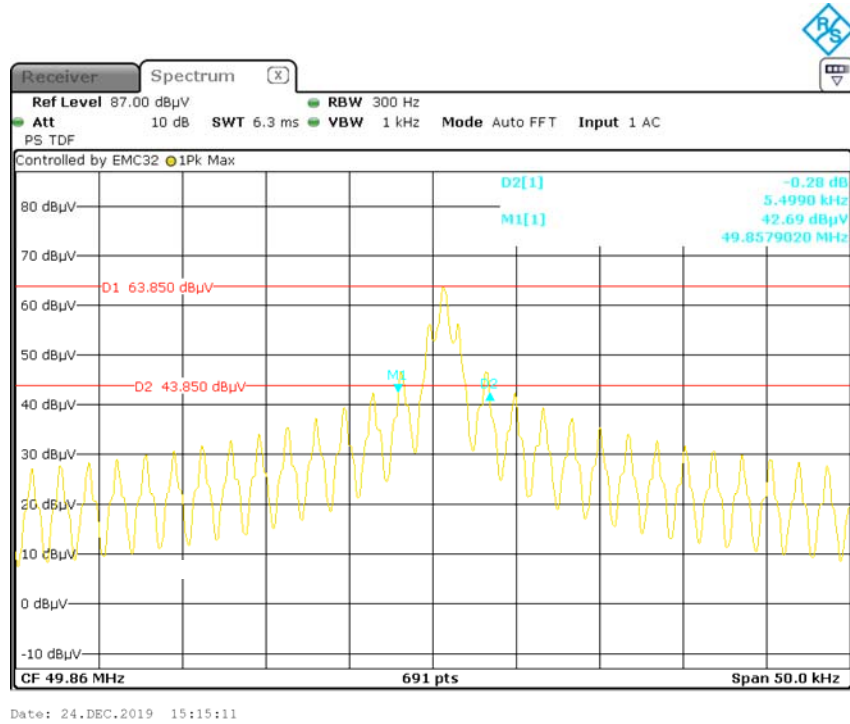

F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Permitted frequency range(MHz)	Result
49.8579020	49.8634010	49.82-49.90	Compliant

\*\*\*\*\* END OF REPORT \*\*\*\*\*