

TEST REPORT

Applicant Name : Zeeva International Limited
 Address : Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Hong Kong
 Report Number : RA221206-59499E-RF-00B
 FCC ID: 2ADM5-SP-0202

Test Standard (s)
 FCC PART 15.247

Sample Description

Product Type: BT LED TOWER SPEAKER
 Model No.: SP-0202
 Trade Mark:




Date Received: 2022-12-06
 Date of Test: 2022-12-15 to 2023-01-13
 Report Date: 2023-01-18

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Audy Yu
 EMC Engineer

Approved By:



Candy Li
 EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".
 Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.
 This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
TEST EQUIPMENT LIST	12
FCC §1.1307 (b) – RF EXPOSURE	13
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
FACTOR & MARGIN CALCULATION	16
TEST DATA	16
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP.....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	33
APPLICABLE STANDARD	33

TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(e) – POWER SPECTRAL DENSITY	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221206-59499E-RF-00B	Original Report	2023-01-18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	BT LED TOWER SPEAKER
Tested Model	SP-0202
SKU* (Barcode of product)	BLACK 7425225; PURPLE 7425226; RED 7425227; GREEN 7425228 (provided by the applicant)
UPC* (Product code of applicant's internal system)	BLACK 1922344000739; PURPLE 1922344000746; RED 1922344000753; GREEN 1922344000760 (provided by the applicant)
Frequency Range	BLE 1M: 2402~2480MHz
Maximum conducted Peak output power	0.3dBm
Modulation Technique	GFSK
Antenna Specification*	Internal Antenna: -0.68dBi(provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port
Sample number	RA221206-59499E-RF-S1 (CE&RE Test) RA221206-59499E-RF-S2 (RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Note: the EUT have four difference color appearance, detail please refer EUT photo.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

EUT Exercise Software

Software "FCC_assist_1.0.2.2"* was used during testing and the power level was default*.

Special Accessories

No special accessory.


Equipment Modifications

No modification was made to the EUT tested.

Duty Cycle


Test Mode	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	2402	0.09	0.62	13.88
	2440	0.09	0.62	13.97
	2480	0.09	0.62	13.88

BLE_1M_Ant1_2402

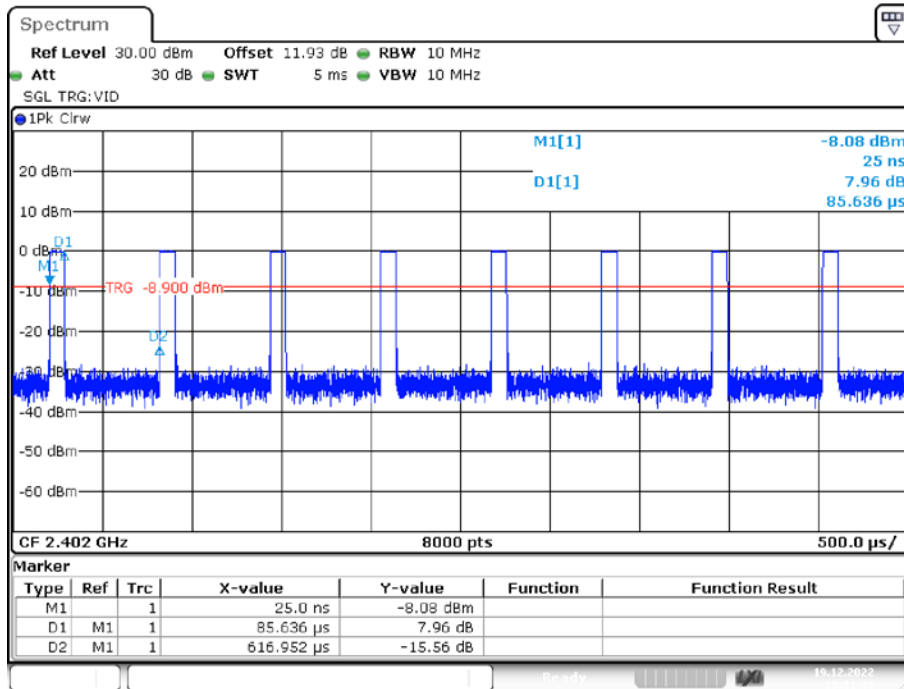


Date: 19.DEC.2022 15:31:40

BLE_1M_Ant1_2440

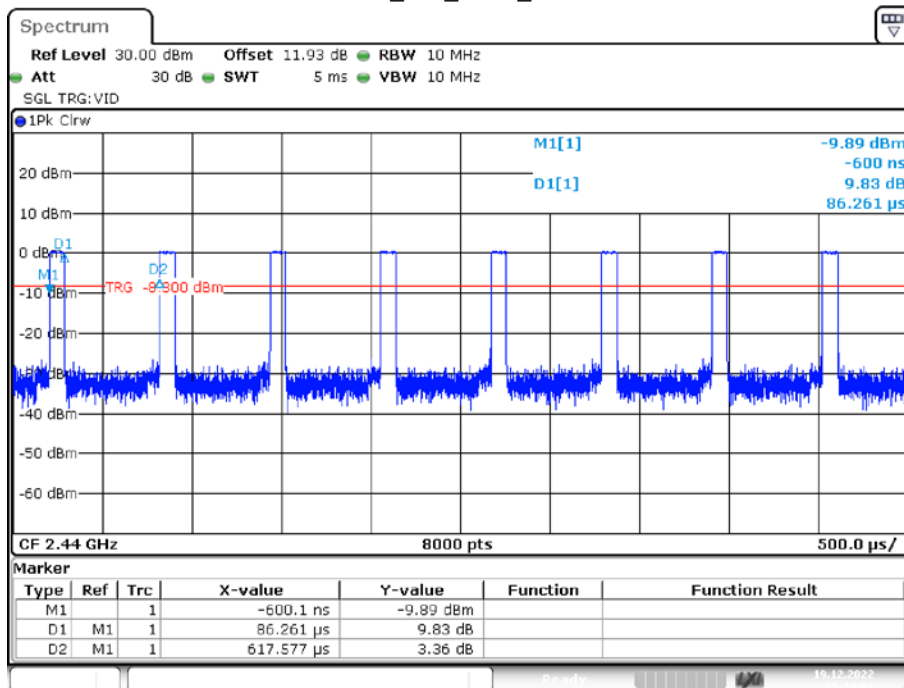

Date: 19.DEC.2022 15:34:06

BLE_1M_Ant1_2480

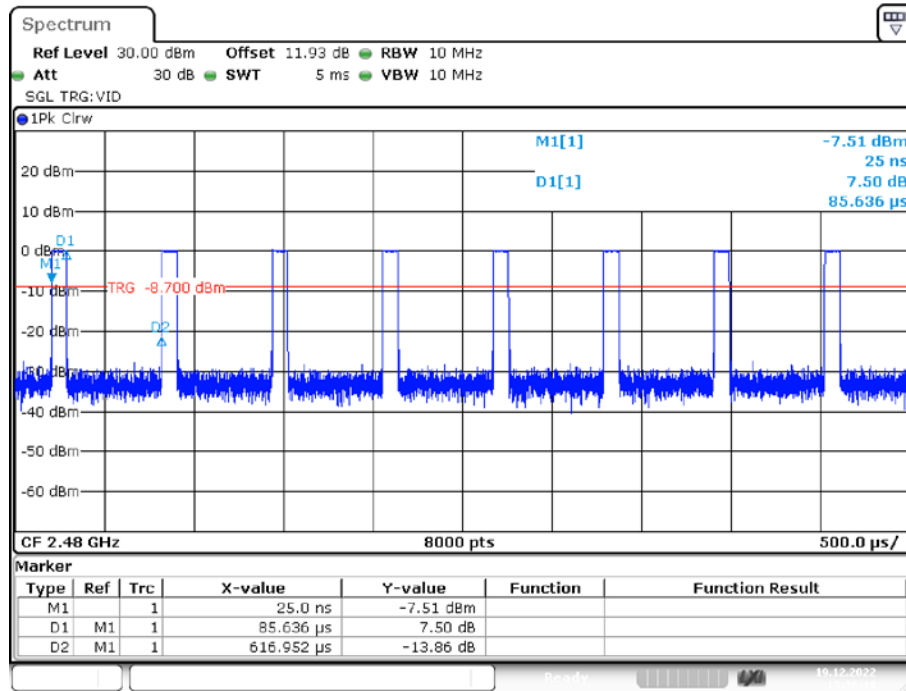

Date: 19.DEC.2022 15:36:20

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TECNO	Adapter	U050TSA	AH07015321906

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	0.5	EUT	Adapter
Unshielded Un-detachable AC cable	1.2	LISN	Receptacle

Block Diagram of Test Setup

For Conducted Emission:

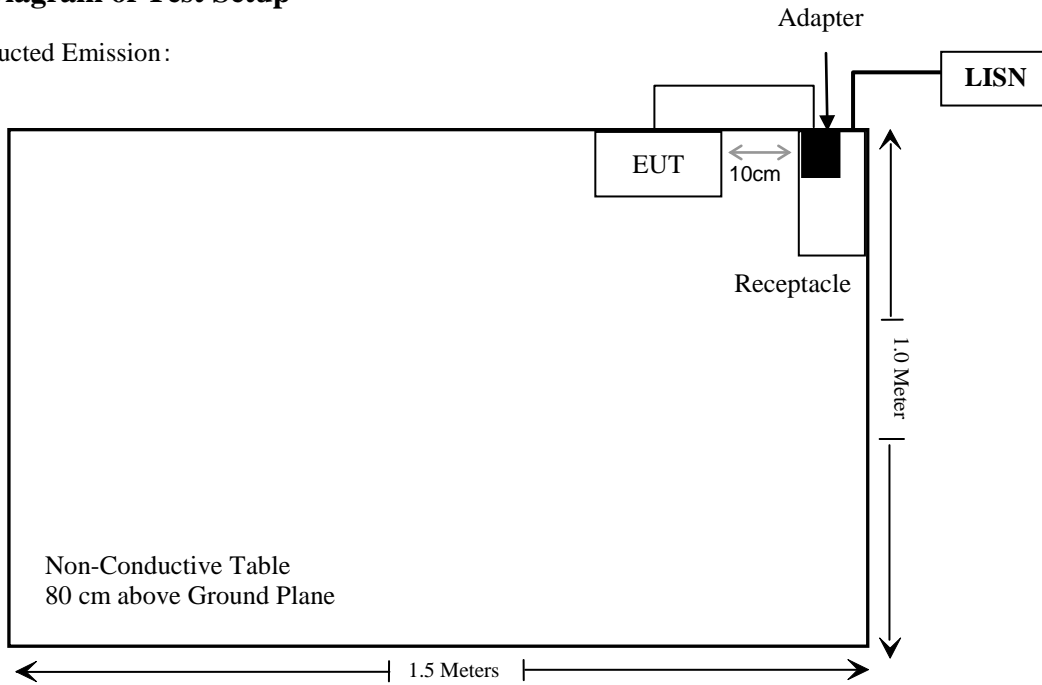

For Radiated Emission:

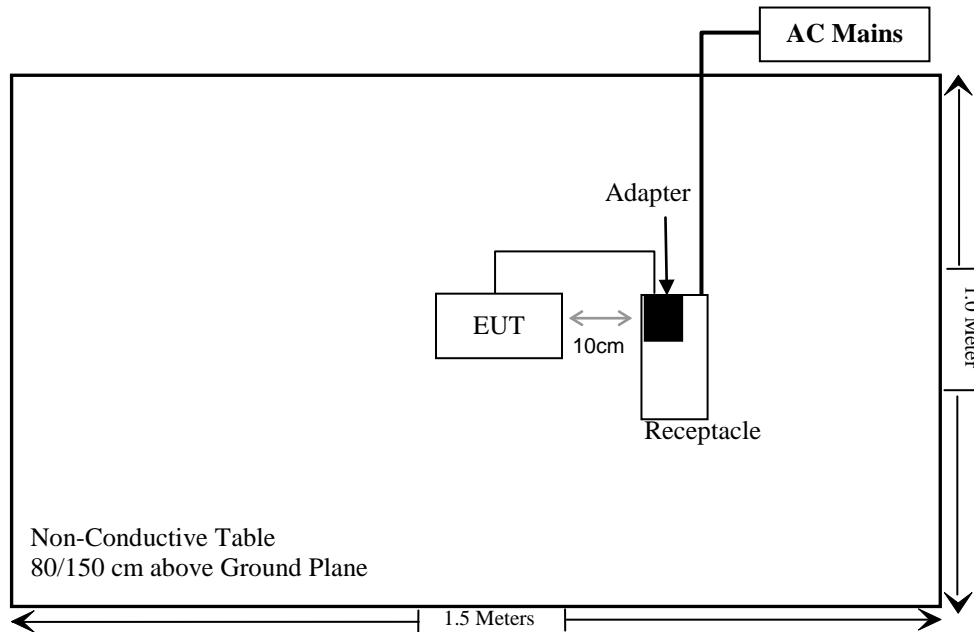

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) – RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

Test result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (W)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(mW)		
BLE	2402-2480	0.5	1.12	-0.68	-2.83	-2.33	0.58	20	0.768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -0.68dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

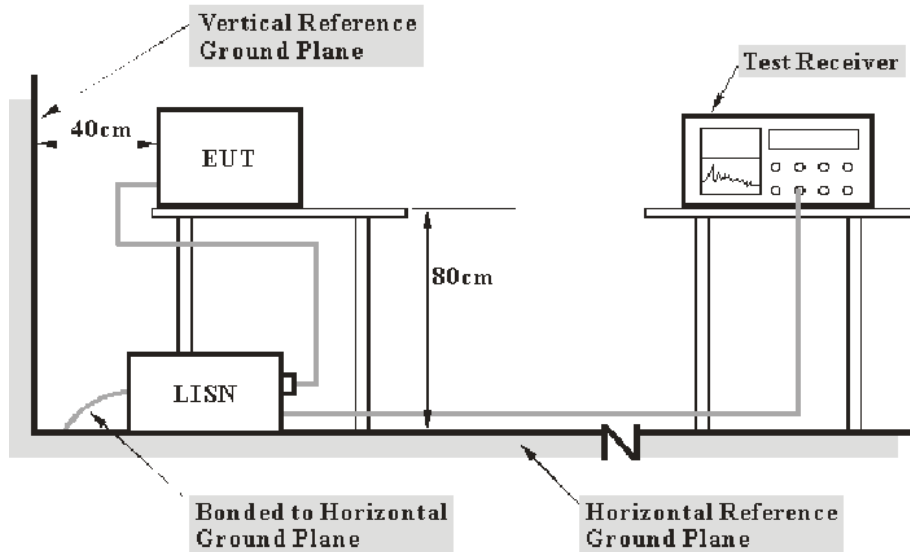

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	20 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Chen jie on 2022-12-15.

EUT operation mode: Charging + BLE Transmitting (worst case is high channel)


AC 120V/60 Hz, Line

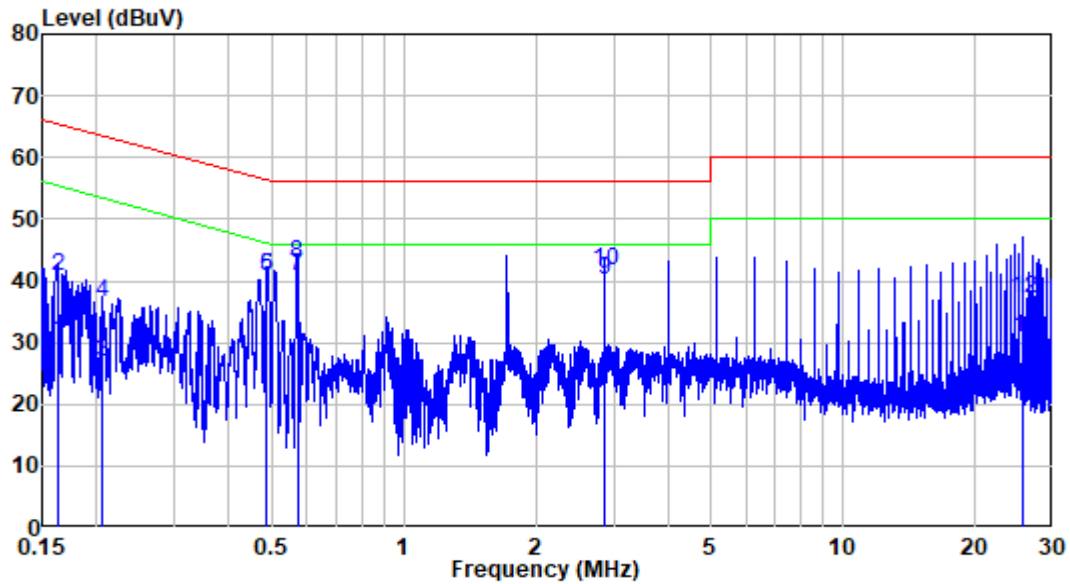

Site : Shielding Room
 Condition: Line
 Job No. : RA221206-59499E-RF
 Mode : Charging+BLE Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.163	9.80	20.42	30.22	55.31	-25.09	Average
2	0.163	9.80	30.93	40.73	65.31	-24.58	QP
3	0.205	9.80	17.01	26.81	53.41	-26.60	Average
4	0.205	9.80	26.77	36.57	63.41	-26.84	QP
5	0.488	9.80	31.08	40.88	46.20	-5.32	Average
6	0.488	9.80	30.97	40.77	56.20	-15.43	QP
7	0.572	9.81	31.06	40.87	46.00	-5.13	Average
8	0.572	9.81	32.94	42.75	56.00	-13.25	QP
9	2.858	9.83	30.36	40.19	46.00	-5.81	Average
10	2.858	9.83	31.69	41.52	56.00	-14.48	QP
11	25.744	10.06	20.72	30.78	50.00	-19.22	Average
12	25.744	10.06	26.98	37.04	60.00	-22.96	QP

AC 120V/60 Hz, Neutral

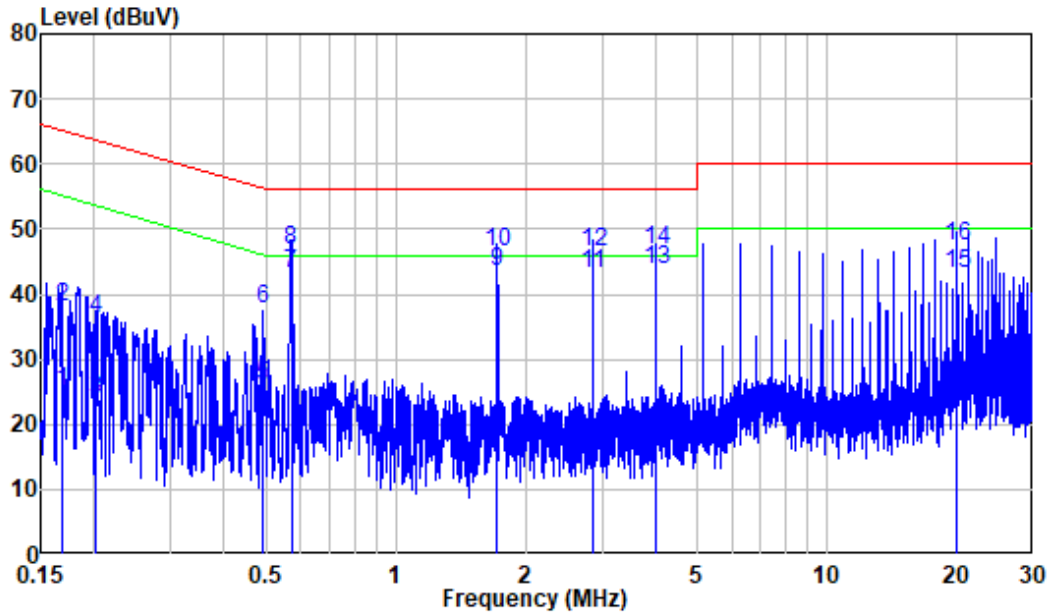

Site : Shielding Room
 Condition: Neutral
 Job No. : RA221206-59499E-RF
 Mode : Charging+BLE Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.169	9.80	15.37	25.17	55.03	-29.86	Average
2	0.169	9.80	28.16	37.96	65.03	-27.07	QP
3	0.202	9.80	14.19	23.99	53.52	-29.53	Average
4	0.202	9.80	26.39	36.19	63.52	-27.33	QP
5	0.492	9.80	16.10	25.90	46.13	-20.23	Average
6	0.492	9.80	27.79	37.59	56.13	-18.54	QP
7	0.572	9.81	33.44	43.25	46.00	-2.75	Average
8	0.572	9.81	36.91	46.72	56.00	-9.28	QP
9	1.715	9.82	33.71	43.53	46.00	-2.47	Average
10	1.715	9.82	36.62	46.44	56.00	-9.56	QP
11	2.860	9.83	33.44	43.27	46.00	-2.73	Average
12	2.860	9.83	36.75	46.58	56.00	-9.42	QP
13	4.004	9.84	34.07	43.91	46.00	-2.09	Average
14	4.004	9.84	36.89	46.73	56.00	-9.27	QP
15	20.016	10.10	33.18	43.28	50.00	-6.72	Average
16	20.016	10.10	37.23	47.33	60.00	-12.67	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

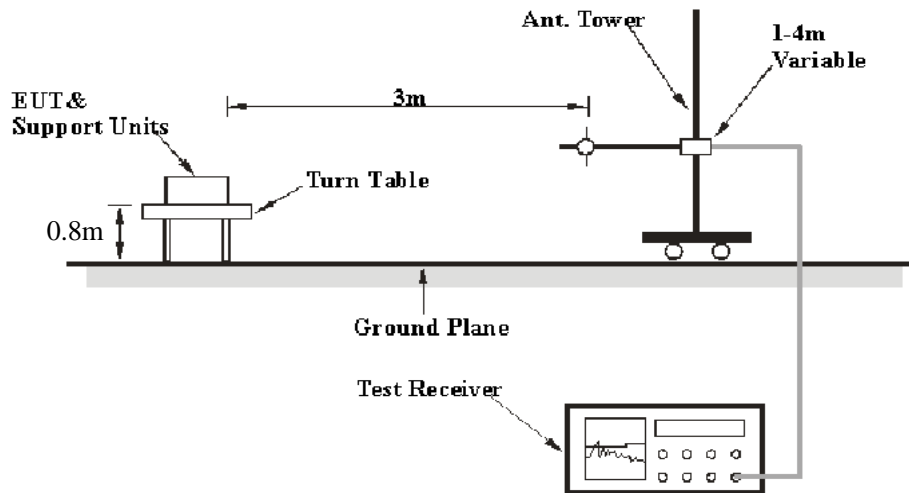

Above 1GHz:

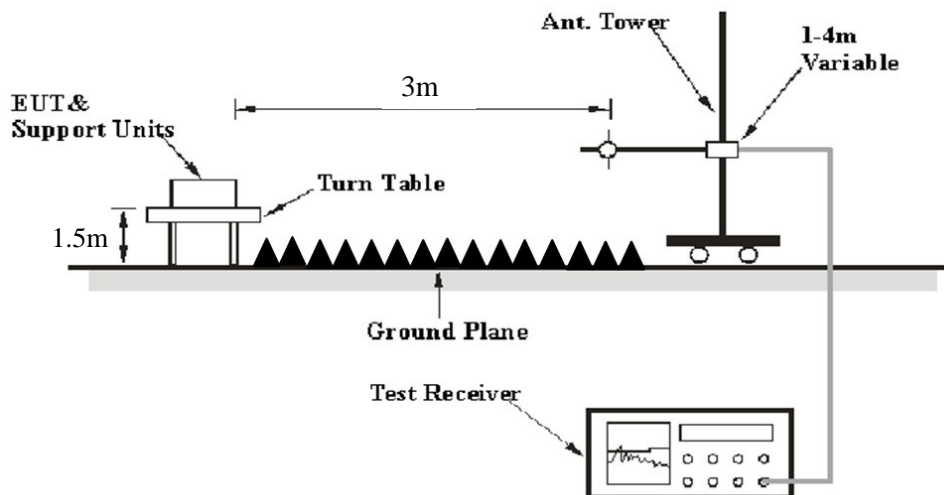

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	55-62 %
ATM Pressure:	101.0 kPa

The testing was performed by Jimi Zheng on 2023-01-13 for below 1GHz and on 2022-12-17 for above 1GHz.

EUT operation mode: BLE Transmitting (Scan with X axis, Y axis, Z axis, the worst case is at Y axis)

Below 1GHz: (worst case is High channel)


Horizontal

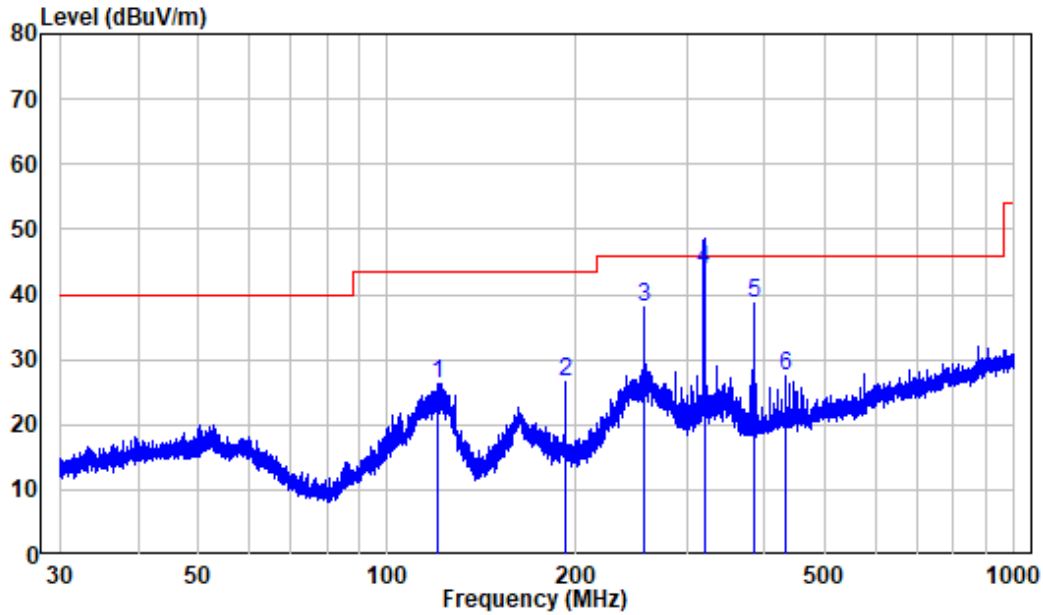

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA221206-59499E-RF
 Test Mode: BLE Transmitting

	Read	Limit	Over				
Freq	Factor	Level	Level	Line			
MHz	dB/m	dBuV	dBuV/m	dBuV/m			
1	120.541	-13.64	39.88	26.24	43.50	-17.26	Peak
2	191.997	-11.25	37.80	26.55	43.50	-16.95	Peak
3	255.960	-10.61	48.53	37.92	46.00	-8.08	Peak
4	320.077	-8.45	52.30	43.85	46.00	-2.15	QP
5	384.100	-7.08	45.76	38.68	46.00	-7.32	Peak
6	431.977	-5.75	33.14	27.39	46.00	-18.61	Peak

Vertical

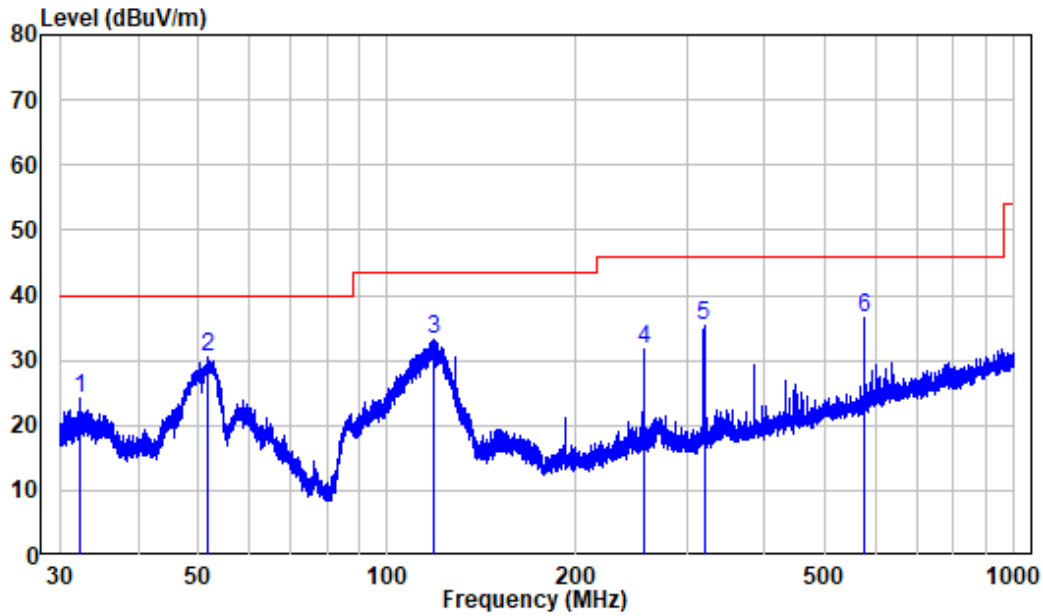

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA221206-59499E-RF
 Test Mode: BLE Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.349	-12.12	36.16	24.04	40.00	-15.96	Peak
2	51.503	-9.96	40.31	30.35	40.00	-9.65	Peak
3	118.290	-13.21	46.55	33.34	43.50	-10.16	Peak
4	256.072	-10.61	42.23	31.62	46.00	-14.38	Peak
5	320.077	-8.45	43.88	35.43	46.00	-10.57	Peak
6	576.139	-3.70	40.25	36.55	46.00	-9.45	Peak

Above 1GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
Low Channel									
2310	48.11	PK	51	1.8	H	-7.23	40.88	74	-33.12
2310	49.87	PK	15	2.2	V	-7.23	42.64	74	-31.36
2390	51.62	PK	201	1.0	H	-7.21	44.41	74	-29.59
2390	52.59	PK	282	1.0	V	-7.21	45.38	74	-28.62
4804	56.5	PK	252	1.4	H	-3.52	52.98	74	-21.02
4804	54	PK	185	1.7	V	-3.52	50.48	74	-23.52
Middle Channel									
4880	56.92	PK	51	1.1	H	-3.38	53.54	74	-20.46
4880	54.62	PK	168	1.0	V	-3.38	51.24	74	-22.76
High Channel									
2483.5	53.57	PK	328	1.2	H	-7.2	46.37	74	-27.63
2483.5	49.26	PK	129	1.7	V	-7.2	42.06	74	-31.94
2500	50.41	PK	163	1.0	H	-7.18	43.23	74	-30.77
2500	47.9	PK	117	2.2	V	-7.18	40.72	74	-33.28
4960	58.36	PK	163	1.0	H	-3.01	55.35	74	-18.65
4960	37.81	AV	163	1.0	H	-3.01	34.8	54	-19.2
4960	53.28	PK	272	1.5	V	-3.01	50.27	74	-23.73

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

High Channel (worst case)

Horizontal

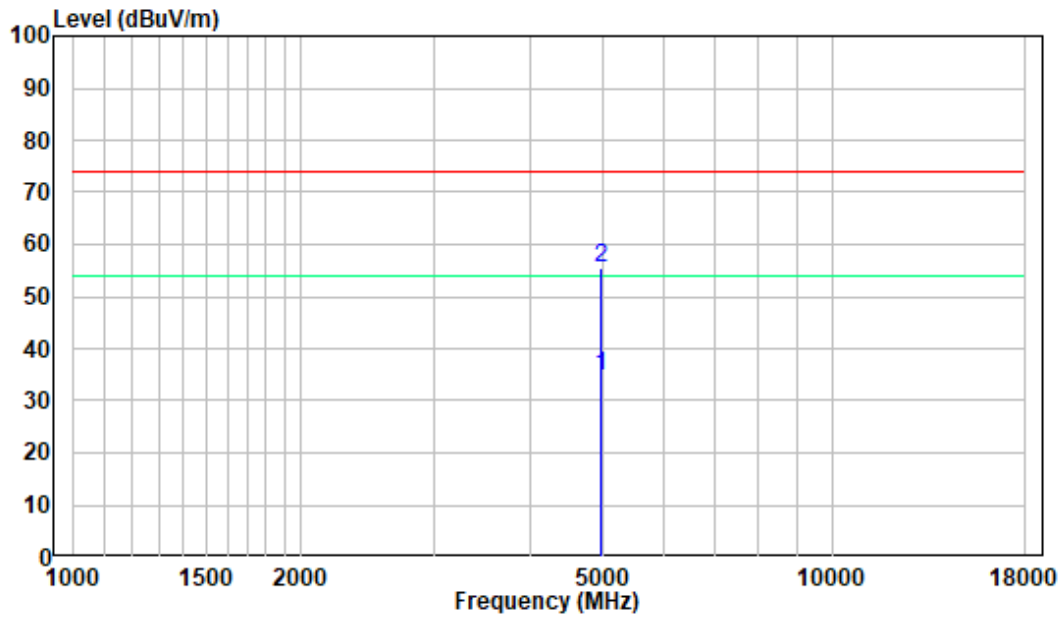


Vertical

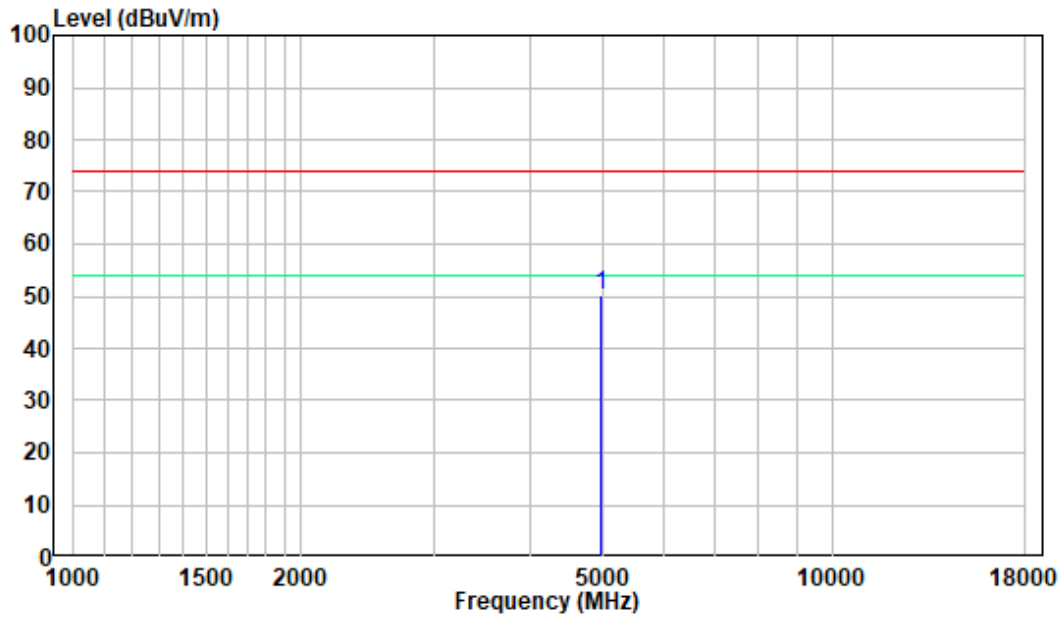


18-25GHz: (Pre-Scan plots)

High Channel (worst case)

Horizontal

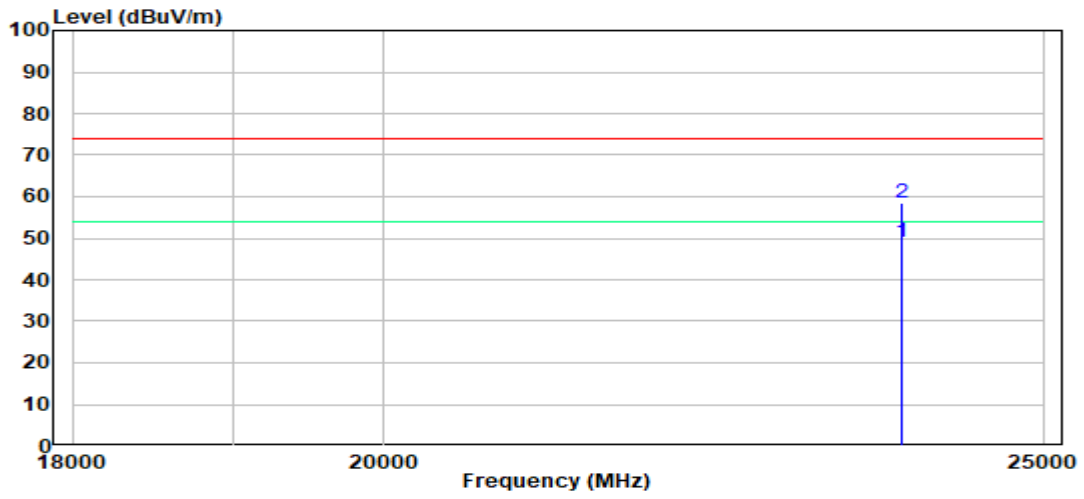

Vertical

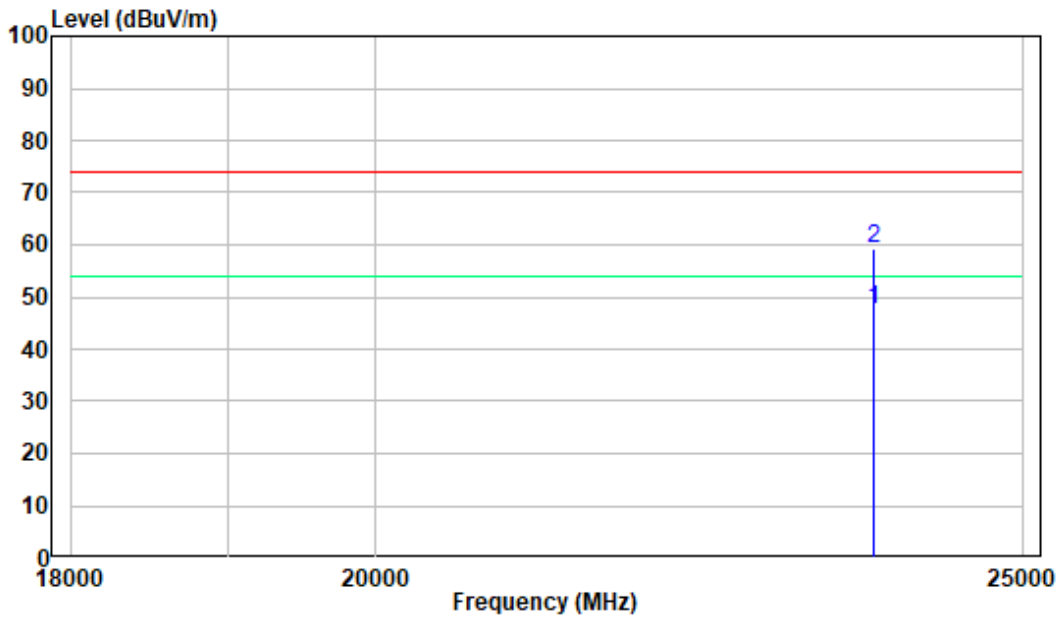

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-19.

EUT operation mode: Transmitting

Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.528	0.5	PASS
		2440	0.544	0.5	PASS
		2480	0.698	0.5	PASS

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.171	2401.405	2402.575	PASS
		2440	1.267	2439.317	2440.583	PASS
		2480	1.315	2479.297	2480.611	PASS


Please refer to the below plots:

6 dB EMISSION BANDWIDTH


BLE_1M_Ant1_2402

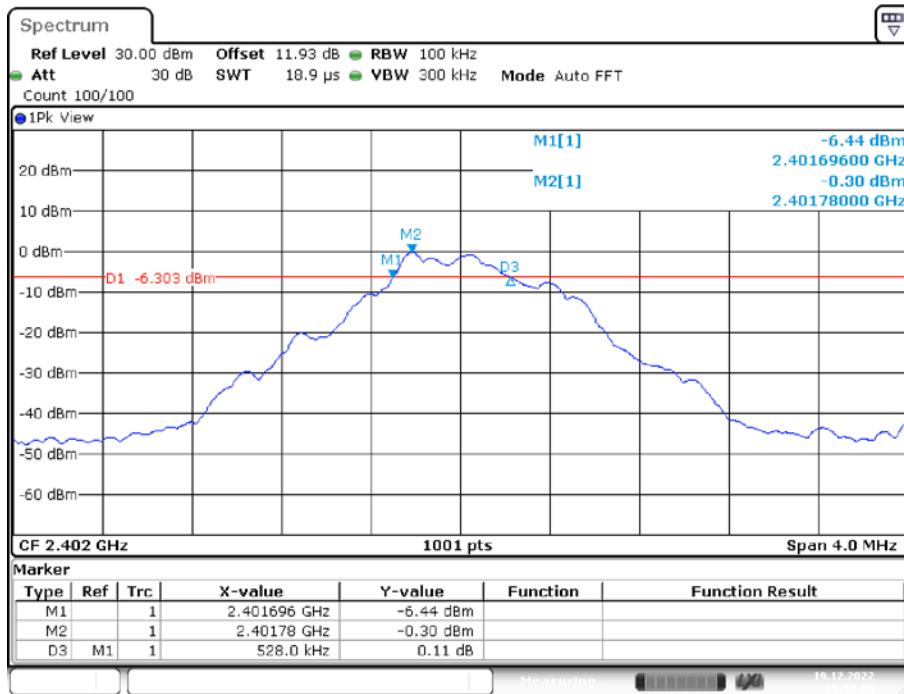

BLE_1M_Ant1_2440

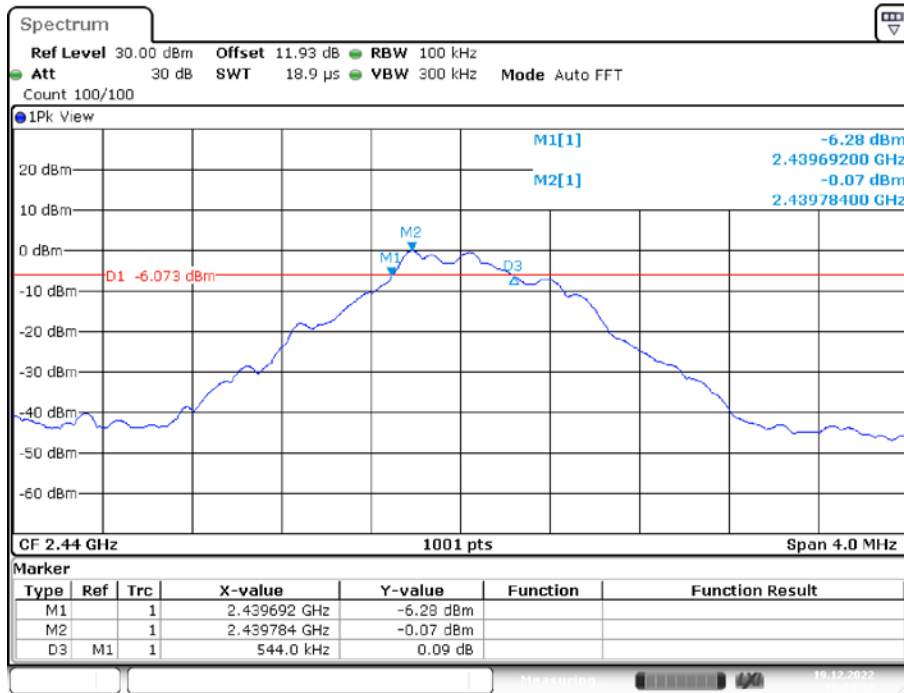


BLE_1M_Ant1_2480

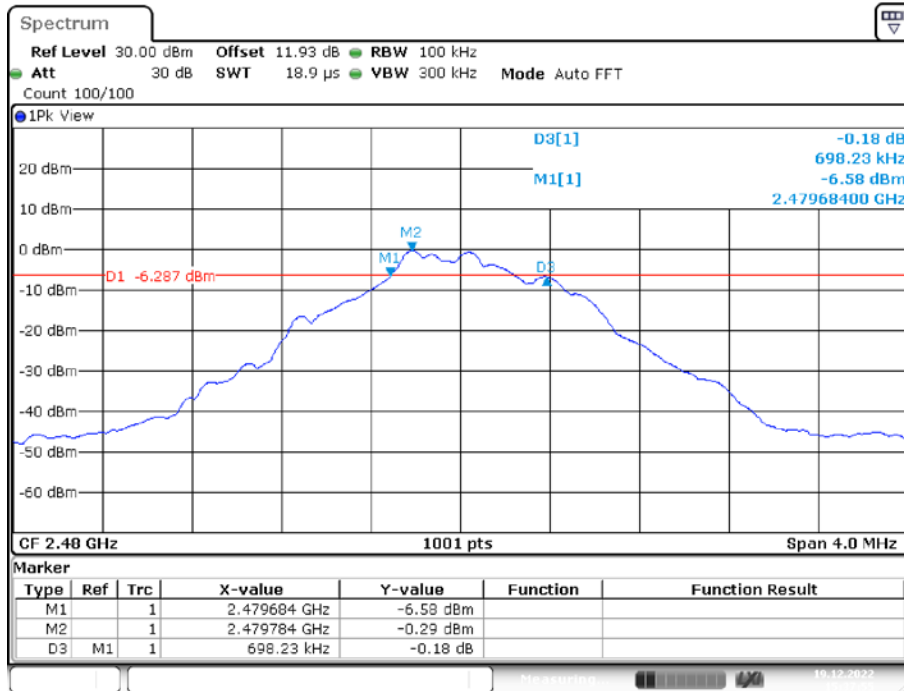

OCCUPIED BANDWIDTH


BLE_1M_Ant1_2402

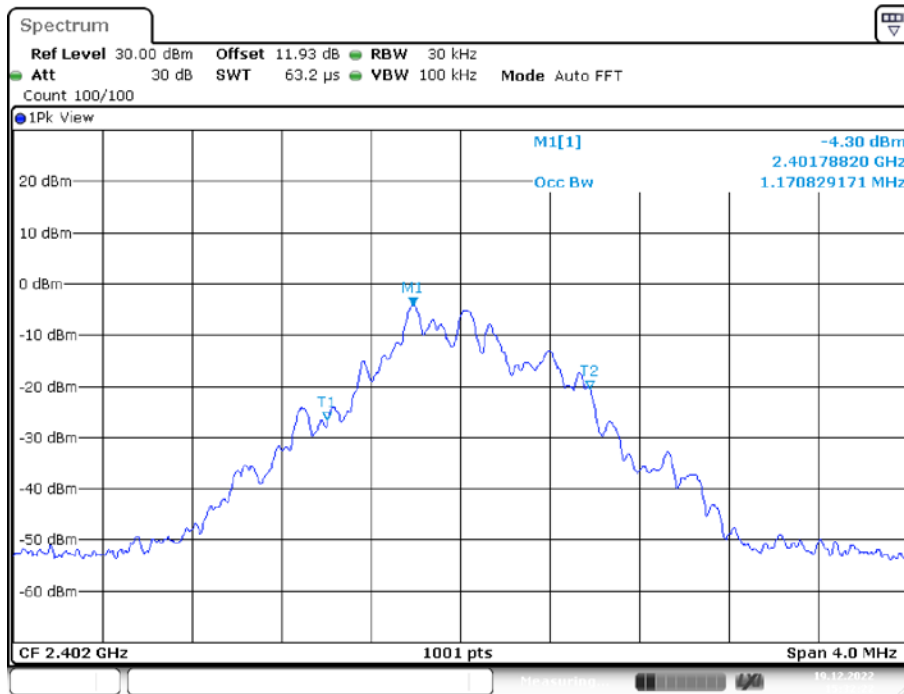

BLE_1M_Ant1_2440



BLE_1M_Ant1_2480

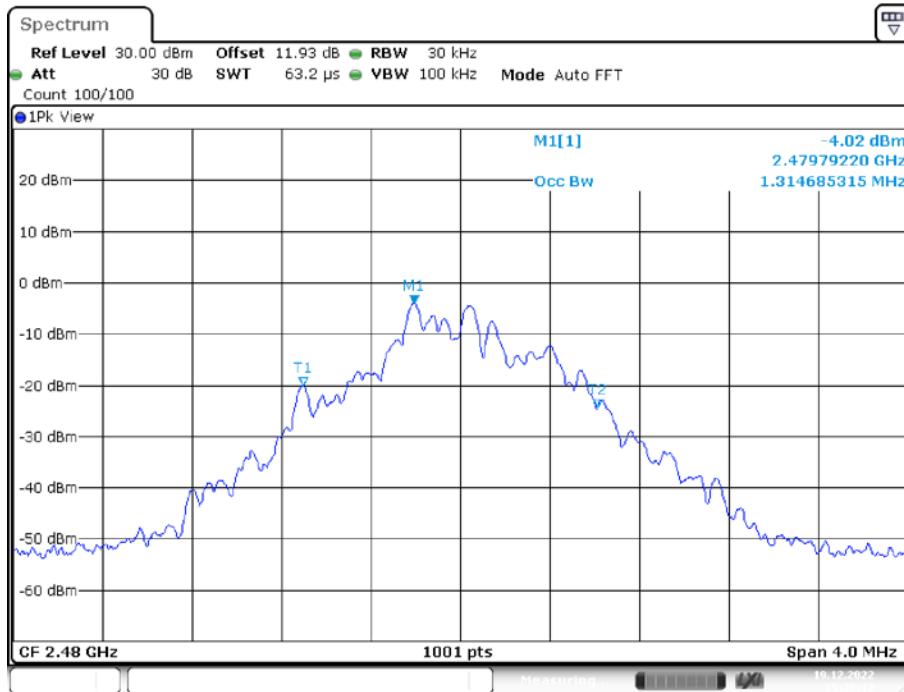

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013, section 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-19.


EUT operation mode: Transmitting

Test Result


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0	<=30	PASS
		2440	0.3	<=30	PASS
		2480	0.11	<=30	PASS

Please refer to the below plots:


BLE_1M_Ant1_2402

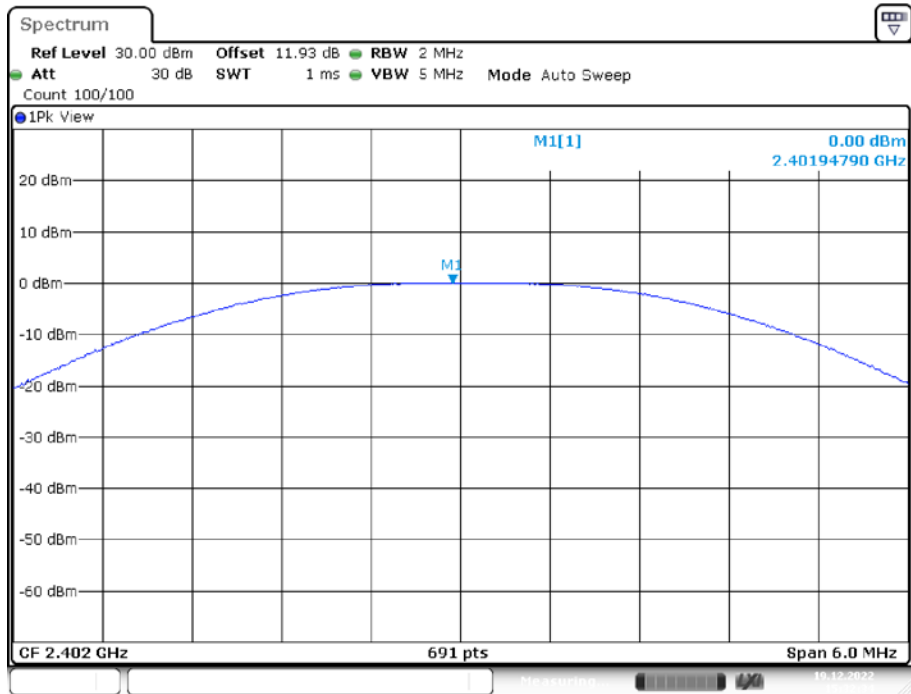

BLE_1M_Ant1_2440

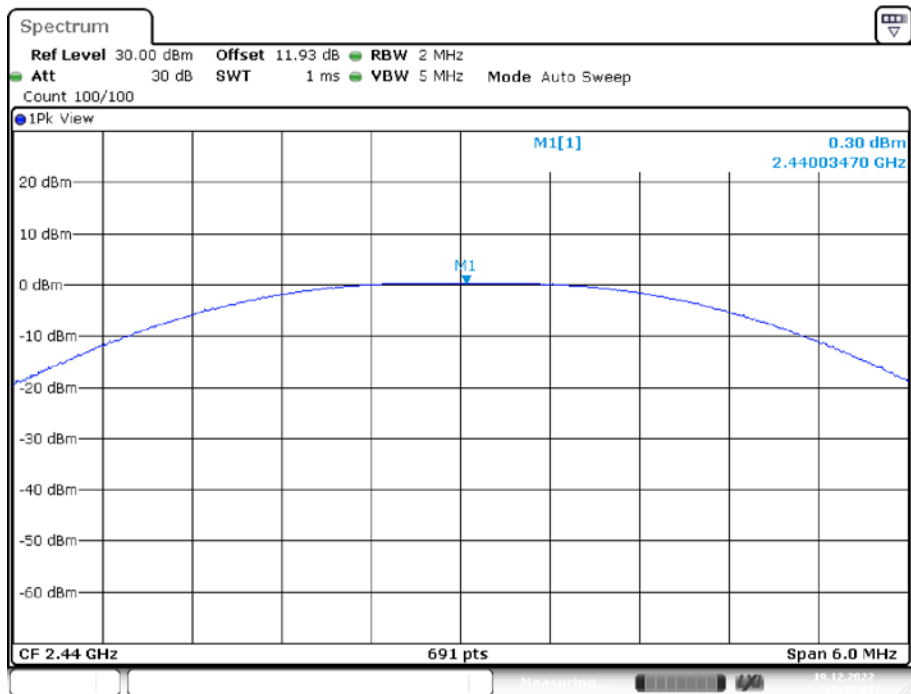

BLE_1M_Ant1_2480

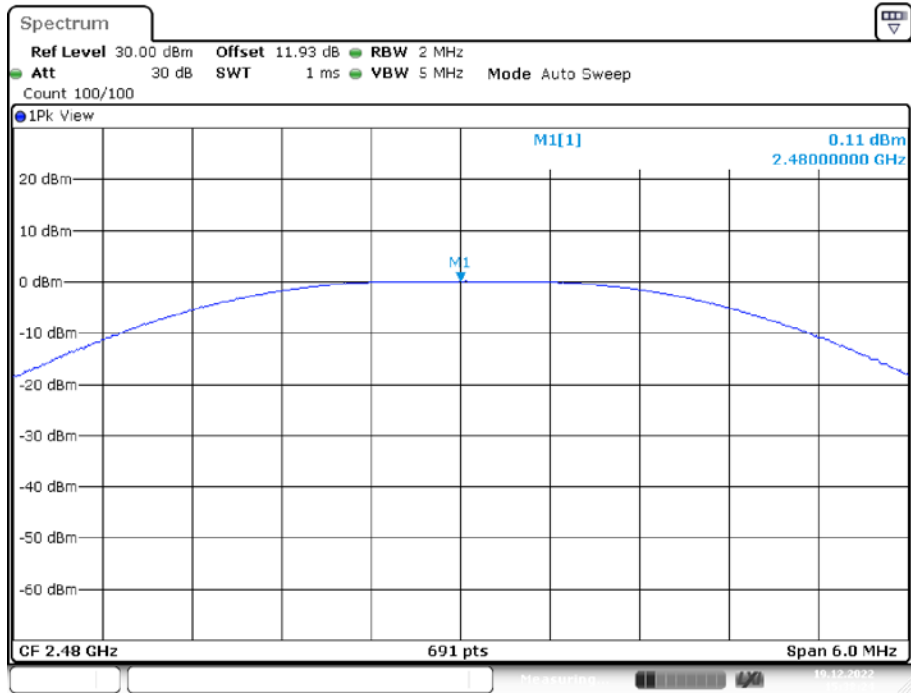

Date: 19.DEC.2022 15:38:24

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013, section 11.13.2

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Glenn Jiang on 2022-12-19.

EUT operation mode: Transmitting

Test Result: Compliant.


Please refer to the below plots:

BLE_1M_Ant1_Low_2402

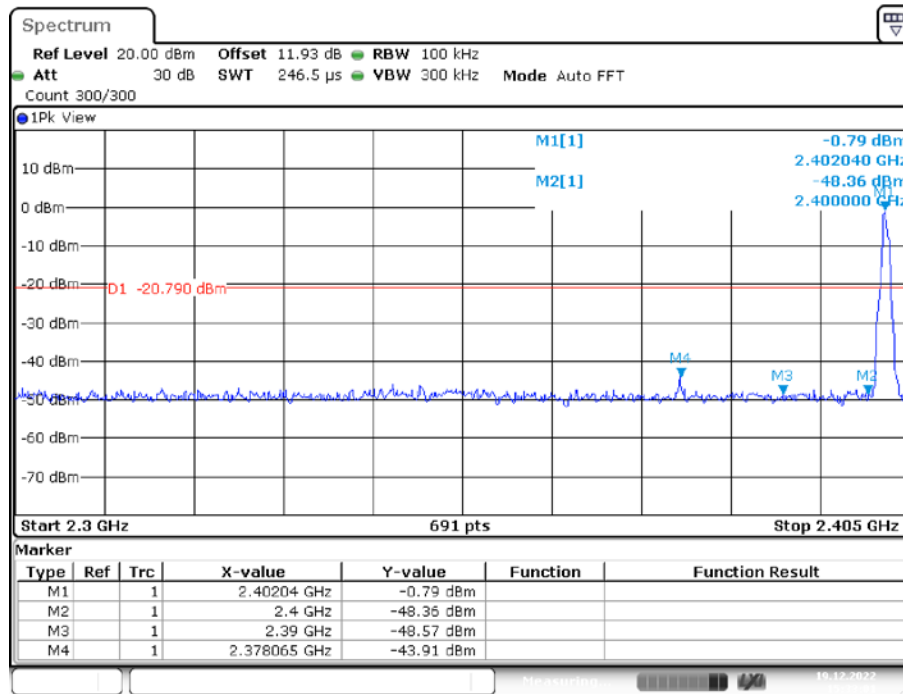

Date: 19.DEC.2022 15:33:01

BLE_1M_Ant1_High_2480

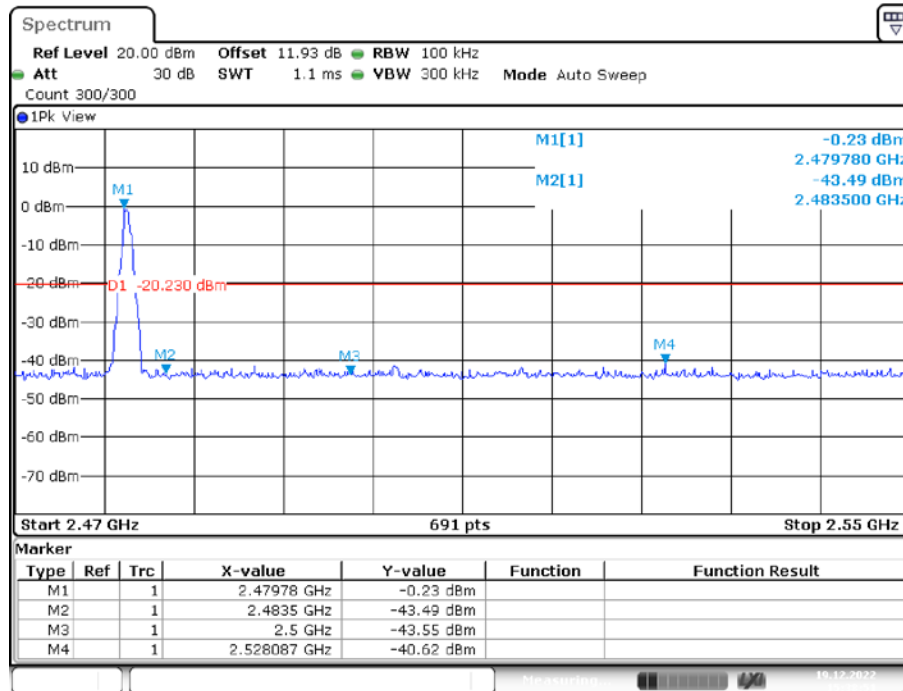

Date: 19.DEC.2022 15:38:51

FCC §15.247(e) – POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013, section 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-19.


EUT operation mode: Transmitting

Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-20.7	<=8	PASS
		2440	-20.12	<=8	PASS
		2480	-20.8	<=8	PASS


Please refer to the below plots:

BLE_1M_Ant1_2402

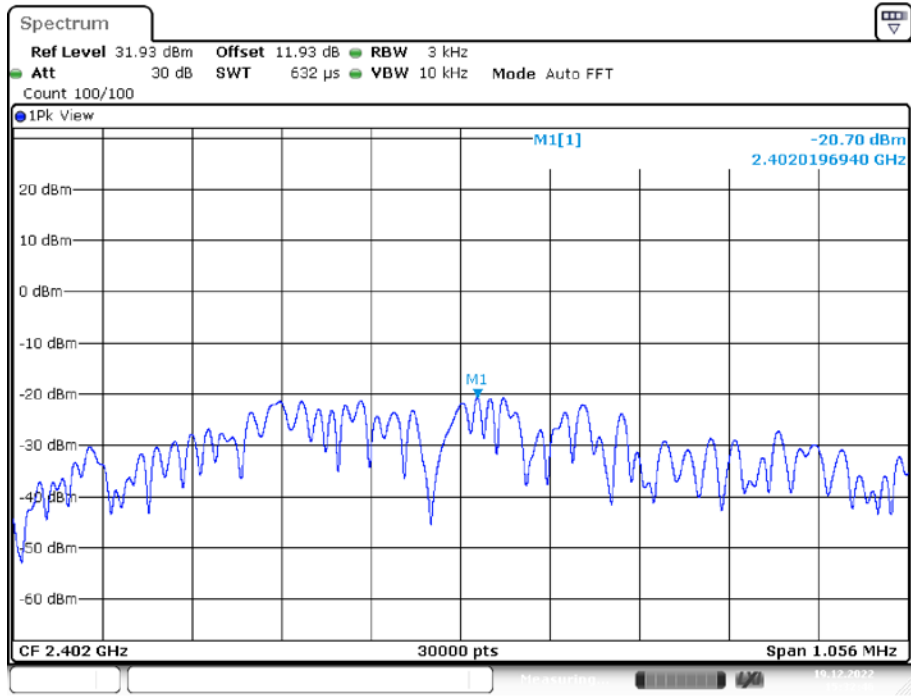


Date: 19.DEC.2022 15:32:46

BLE_1M_Ant1_2440

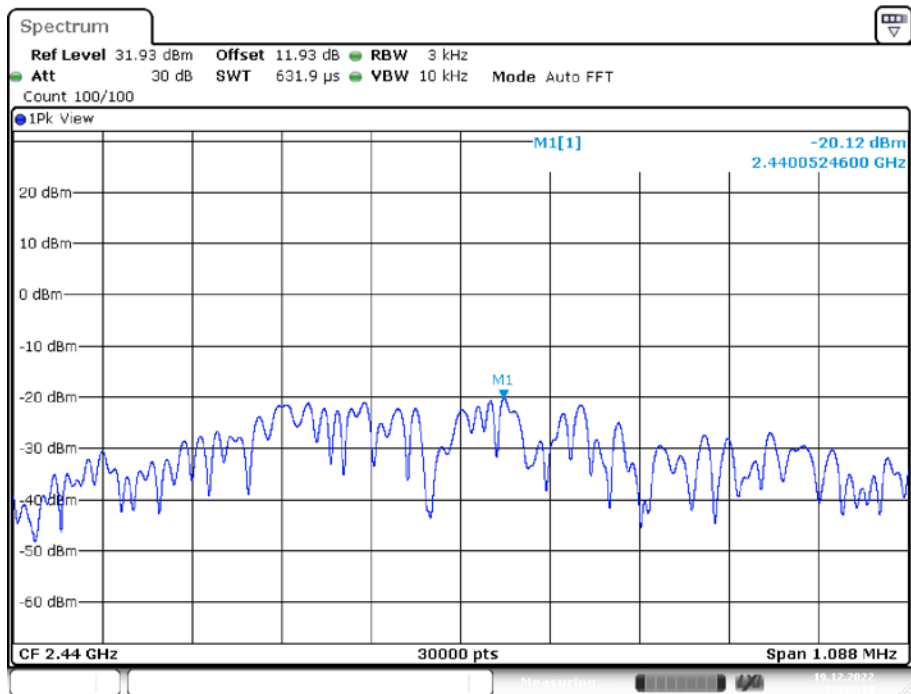

Date: 19.DEC.2022 15:35:13

BLE_1M_Ant1_2480

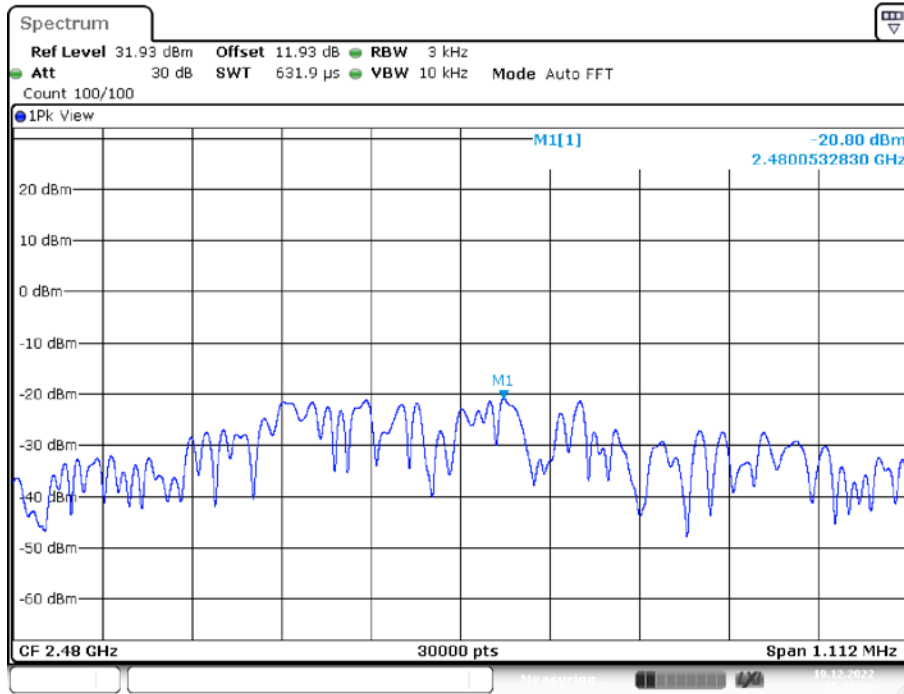

Date: 19.DEC.2022 15:38:36

******* END OF REPORT *******