



FCC PART 15.247
TEST REPORT

For

Zeeva International Limited

Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Hong Kong

FCC ID: 2ADM5-SP-0432

Report Type: Original Report	Product Type: Translucent speaker
Report Number: RSZ170630831-00	
Report Date: 2017-07-28	
Jimmy Xiao <i>Jimmy Xiao</i>	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST.....	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE.....	10
APPLICABLE STANDARD.....	10
FCC §15.203 – ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD.....	11
ANTENNA CONNECTOR CONSTRUCTION.....	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD.....	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE.....	12
CORRECTED FACTOR & MARGIN CALCULATION.....	13
TEST RESULTS SUMMARY.....	13
TEST DATA.....	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	17
TEST PROCEDURE.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST RESULTS SUMMARY.....	17
TEST DATA.....	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST.....	20
APPLICABLE STANDARD.....	20
TEST PROCEDURE.....	20
TEST DATA.....	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	27
APPLICABLE STANDARD.....	27
TEST PROCEDURE.....	27
TEST DATA.....	27

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST33
 APPLICABLE STANDARD33
 TEST PROCEDURE33
 TEST DATA33

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....36
 APPLICABLE STANDARD36
 TEST PROCEDURE36
 TEST DATA36

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT52
 APPLICABLE STANDARD52
 TEST PROCEDURE52
 TEST DATA52

FCC §15.247(d) - BAND EDGES TESTING53
 APPLICABLE STANDARD53
 TEST PROCEDURE53
 TEST DATA53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Zeeva International Limited's product, model number: SP-0432 (FCC ID: 2ADM5-SP-0432, UPC Number: 400028911744) in this report is a *Translucent speaker*, which was measured approximately: 80 mm (L) * 80 mm (W) * 87 mm (H), rated with input voltage: DC 5.0 V.

** All measurement and test data in this report was gathered from production sample serial number: 20170630 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-06-30.*

Objective

This test report is prepared on behalf of Zeeva International Limited in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
RF Conducted test with spectrum		±1.92 dB
RF Output Power with Power meter		±0.50 dB
Radiated emission	30MHz~1 GHz	±5.91 dB
	Above 1 GHz	±4.92 dB
Occupied Bandwidth		±0.5 kHz
Temperature		±1.0 °C
Humidity		±6 %

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

No exercise software was used

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	114772
SPY	Adapter	716D-0501000	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.5	EUT	Adapter

Block Diagram of Test Setup

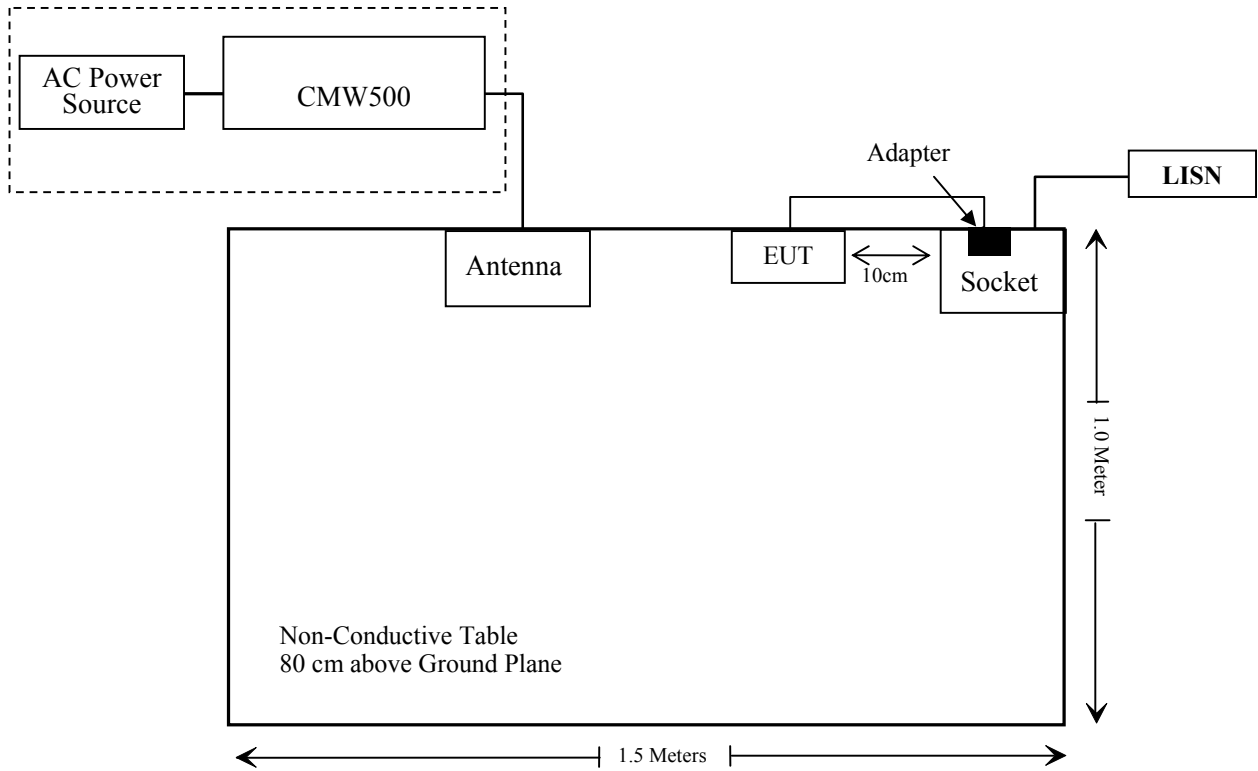

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2016-10-19	2017-10-19
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2016-12-07	2017-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-02-14	2017-08-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-05-12	2017-11-12
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
BIZI	Signal Analyzer	FSEM	845987/005	2017-08-24	2018-08-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19
Anritsu	Signal Generator	68369B	004114	2016-12-05	2017-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	1	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	2	2017-05-22	2017-11-22
RF Conducted Test					
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-12-05	2017-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-12-05	2017-12-05
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2017-05-23	2017-11-22
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2017-04-24	2018-04-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Ducommun technologies	RF Cable	RG-214	3	2017-05-22	2017-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum conducted Tune-up power		Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
	Power (dBm)	Power (mW)				
2480	-1.0	0.79	5	0.25	3.0	Yes

Result: No SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one PCB antenna arrangement which was permanently attached and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

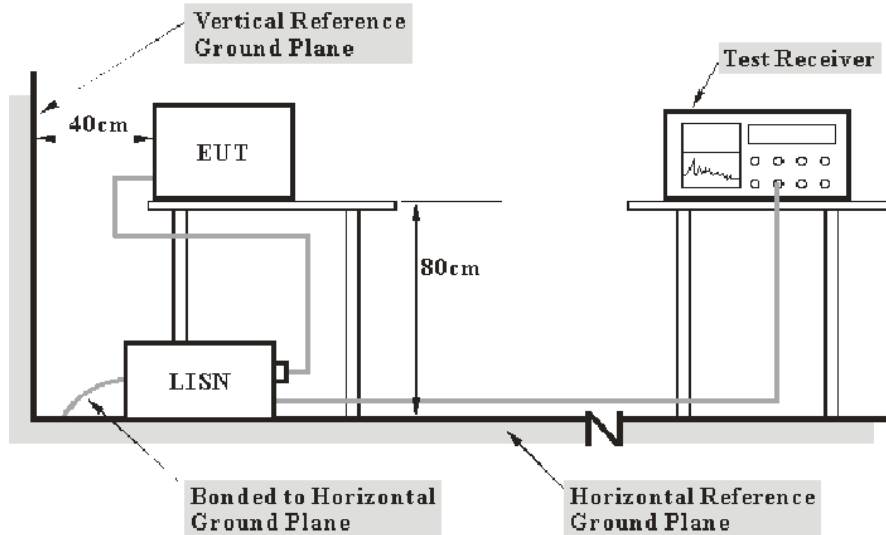

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BA CL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-07-25.

EUT operation mode: Transmitting & Charging

AC 120V/60 Hz, Line:


EMI Auto Test L

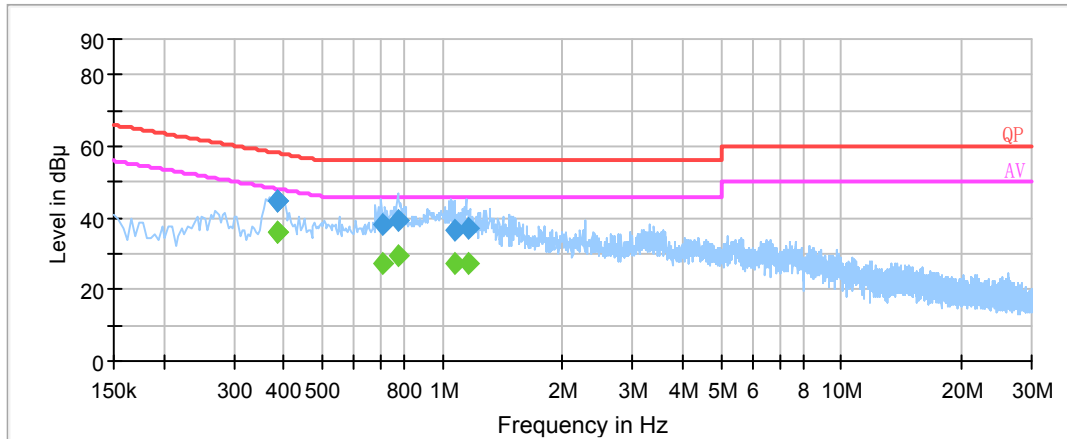

Frequency (MHz)	Corrected Amplitude (dBµV)	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave.)
0.384150	44.5	20.2	58.2	13.7	QP
0.384270	44.5	20.2	58.2	13.7	QP
0.707470	38.2	20.0	56.0	17.8	QP
0.774390	39.5	20.0	56.0	16.5	QP
1.069810	36.5	20.1	56.0	19.5	QP
1.156810	37.2	20.1	56.0	18.8	QP
0.384150	36.2	20.2	48.2	12.0	Ave.
0.384270	36.1	20.2	48.2	12.1	Ave.
0.707470	27.4	20.0	46.0	18.6	Ave.
0.774390	29.2	20.0	46.0	16.8	Ave.
1.069810	27.4	20.1	46.0	18.6	Ave.
1.156810	27.4	20.1	46.0	18.6	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

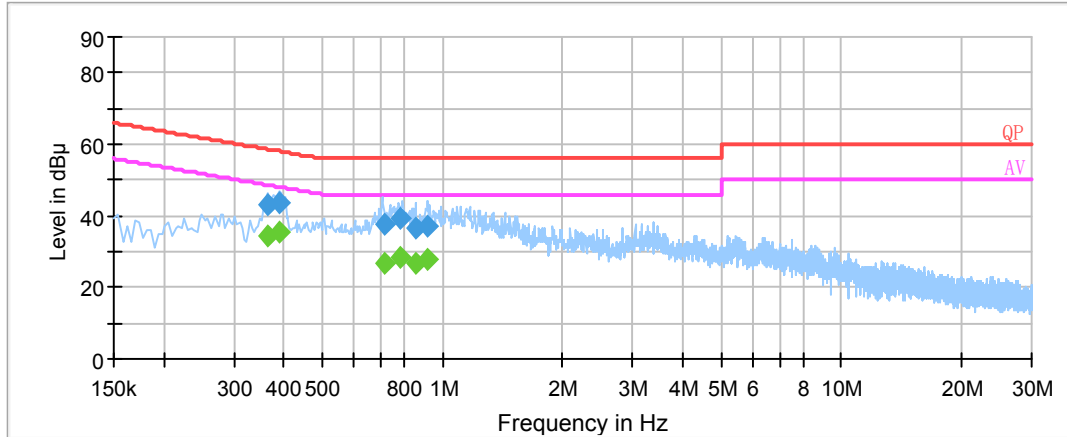

Frequency (MHz)	Corrected Amplitude (dBµV)	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave.)
0.364510	42.9	20.2	58.6	15.8	QP
0.388150	43.7	20.2	58.1	14.4	QP
0.715410	37.9	20.0	56.0	18.1	QP
0.782090	39.3	20.0	56.0	16.7	QP
0.861130	36.4	20.1	56.0	19.6	QP
0.920230	37.2	20.1	56.0	18.8	QP
0.364510	34.2	20.2	48.6	14.4	Ave.
0.388150	35.6	20.2	48.1	12.5	Ave.
0.715410	26.7	20.0	46.0	19.3	Ave.
0.782090	28.1	20.0	46.0	17.9	Ave.
0.861130	26.7	20.1	46.0	19.3	Ave.
0.920230	27.7	20.1	46.0	18.3	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit – Corrected Amplitude


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

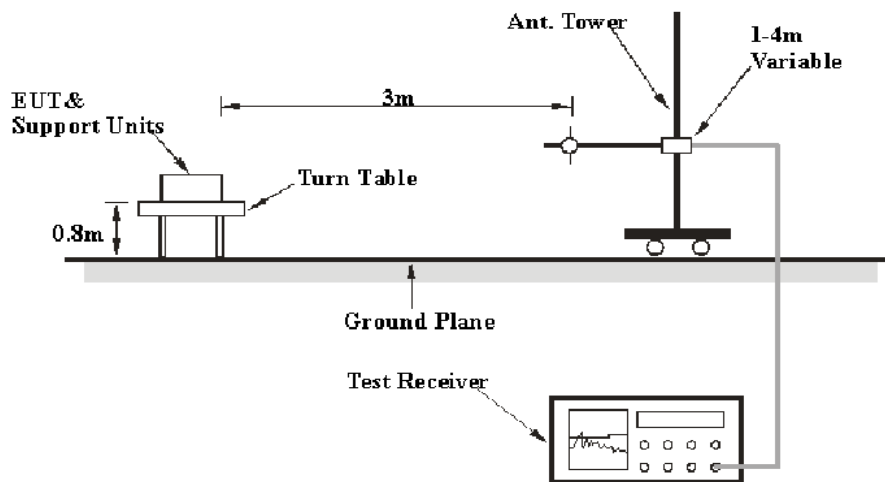

Above 1GHz:

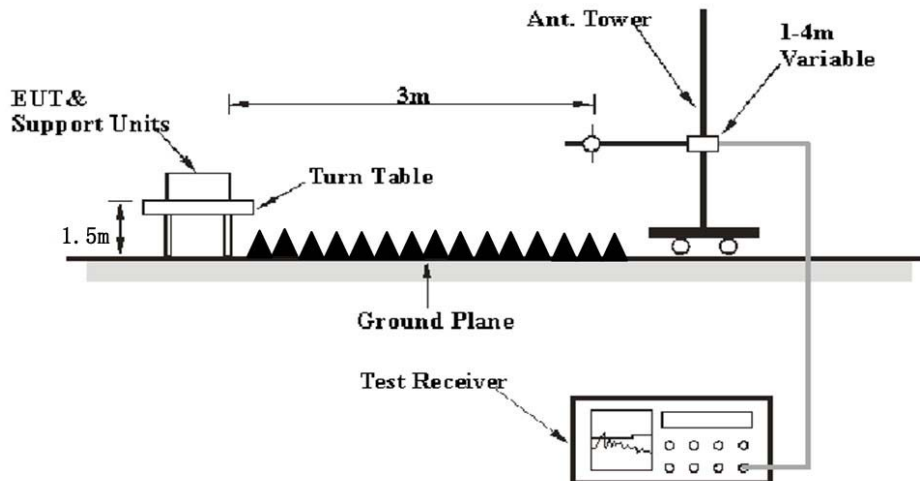

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, 205 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-07-25.

EUT operation mode: Transmitting

30 MHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247/205/209	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
481.36	28.96	QP	178	1.2	H	-2.60	26.36	46	19.64
2402.00	59.29	PK	230	1.3	H	33.92	93.21	/	/
2402.00	50.17	Ave.	230	1.3	H	33.92	84.09	/	/
2402.00	53.67	PK	85	2.4	V	33.92	87.59	/	/
2402.00	44.37	Ave.	85	2.4	V	33.92	78.29	/	/
2384.12	27.19	PK	323	1.2	H	33.92	61.11	74	12.89
2384.12	13.89	Ave.	323	1.2	H	33.92	47.81	54	6.19
2762.35	27.31	PK	275	1.3	H	34.35	61.66	74	12.34
2762.35	13.90	Ave.	275	1.3	H	34.35	48.25	54	5.75
2486.15	27.47	PK	217	2.1	H	34.08	61.55	74	12.45
2486.15	13.34	Ave.	217	2.1	H	34.08	47.42	54	6.58
4804.00	47.58	PK	145	2.1	H	5.84	53.42	74	20.58
4804.00	42.67	Ave.	145	2.1	H	5.84	48.51	54	5.49

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2441 MHz)									
481.36	29.00	QP	244	1.2	H	-2.60	26.40	46	19.60
2441.00	59.17	PK	94	2.3	H	33.92	93.09	/	/
2441.00	50.02	Ave.	94	2.3	H	33.92	83.94	/	/
2441.00	51.43	PK	295	1.6	V	33.92	85.35	/	/
2441.00	42.74	Ave.	295	1.6	V	33.92	76.66	/	/
2359.17	28.04	PK	156	1.0	H	33.92	61.96	74	12.04
2359.17	13.91	Ave.	156	1.0	H	33.92	47.83	54	6.17
2386.43	27.34	PK	49	2.5	H	33.92	61.26	74	12.74
2386.43	13.90	Ave.	49	2.5	H	33.92	47.82	54	6.18
2495.12	27.47	PK	308	1.8	H	34.08	61.55	74	12.45
2495.12	13.34	Ave.	308	1.8	H	34.08	47.42	54	6.58
4882.00	57.65	PK	307	1.6	H	6.21	63.86	74	10.14
4882.00	43.15	Ave.	307	1.6	H	6.21	49.36	54	4.64
High Channel (2480 MHz)									
481.36	30.44	QP	107	2.1	H	-2.60	27.84	46	18.16
2480.00	59.67	PK	349	2.1	H	34.08	93.75	/	/
2480.00	51.17	Ave.	349	2.1	H	34.08	85.25	/	/
2480.00	51.46	PK	199	1.1	V	34.08	85.54	/	/
2480.00	42.33	Ave.	199	1.1	V	34.08	76.41	/	/
2374.55	27.46	PK	256	1.6	H	33.92	61.38	74	12.62
2374.55	13.89	Ave.	256	1.6	H	33.92	47.81	54	6.19
2483.57	31.19	PK	23	2.1	H	34.08	65.27	74	8.73
2483.57	15.57	Ave.	23	2.1	H	34.08	49.65	54	4.35
2484.12	30.74	PK	282	1.5	H	34.08	64.82	74	9.18
2484.12	15.07	Ave.	282	1.5	H	34.08	49.15	54	4.85
4960.00	59.31	PK	248	1.2	H	7.82	67.13	74	6.87
4960.00	43.07	Ave.	248	1.2	H	7.82	50.89	54	3.11

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-07-24.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
BDR (GFSK)	Low	2402	0.998	0.740	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.733	Pass
	Adjacent	2442			
	High	2480	0.998	0.740	Pass
	Adjacent	2479			
EDR (π/4-DQPSK)	Low	2402	1.004	0.867	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.867	Pass
	Adjacent	2442			
	High	2480	1.004	0.867	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.998	0.867	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.867	Pass
	Adjacent	2442			
	High	2480	1.004	0.867	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

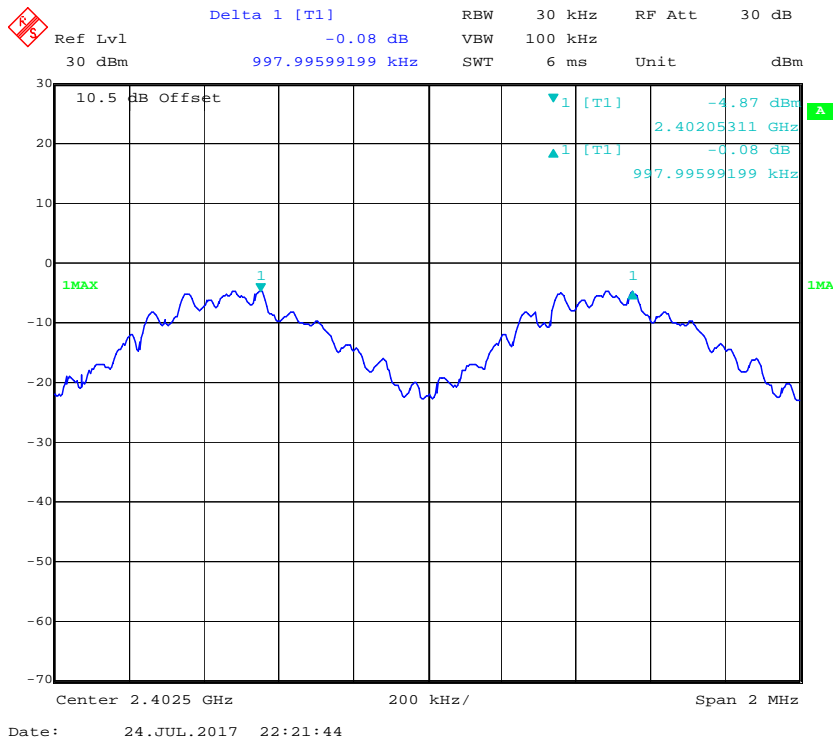


BDR (GFSK): Middle Channel

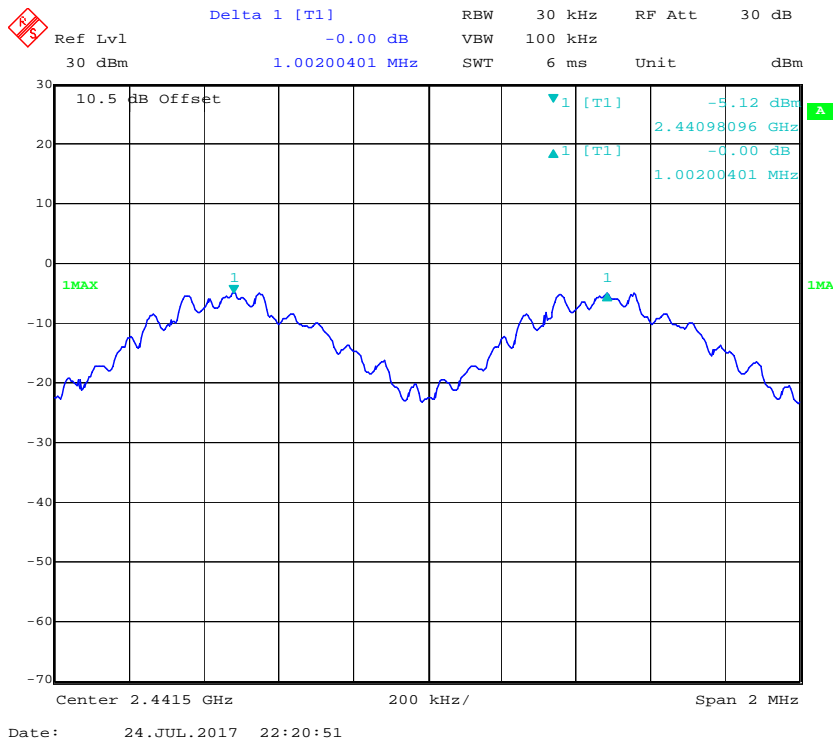


BDR (GFSK): High Channel

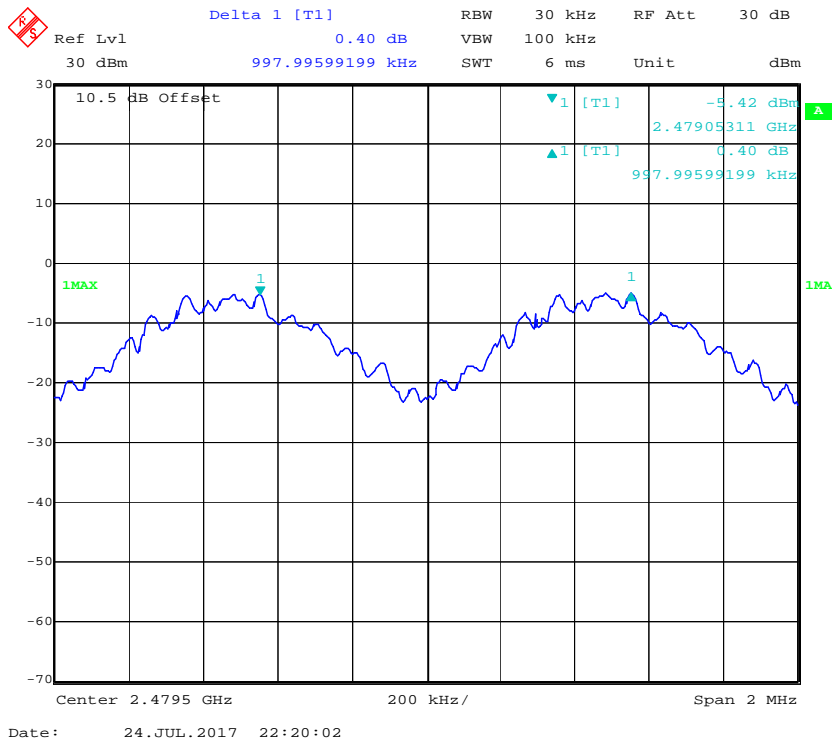


EDR ($\pi/4$ -DQPSK): Low Channel

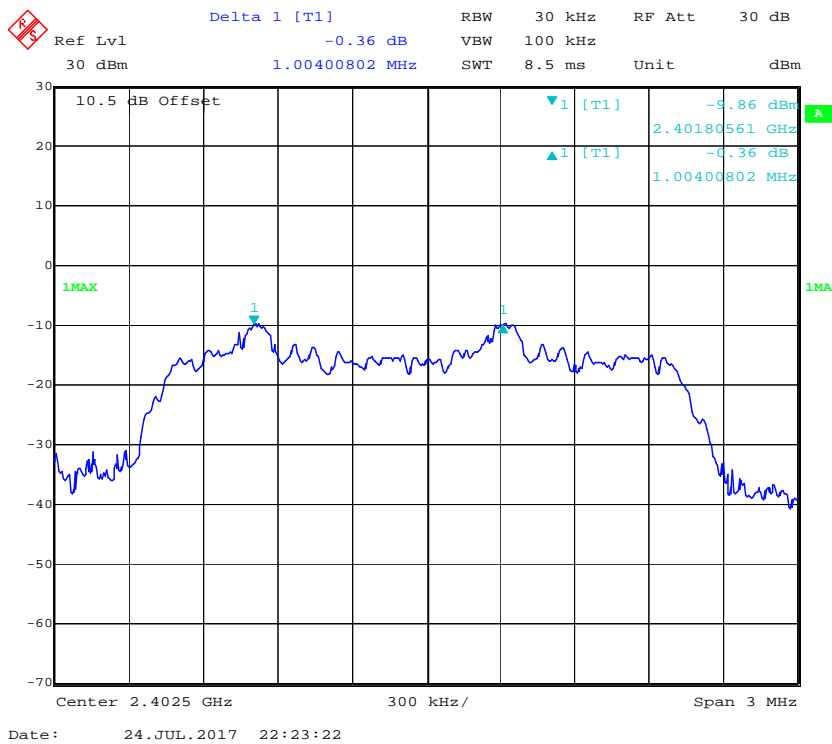


EDR ($\pi/4$ -DQPSK): Middle Channel

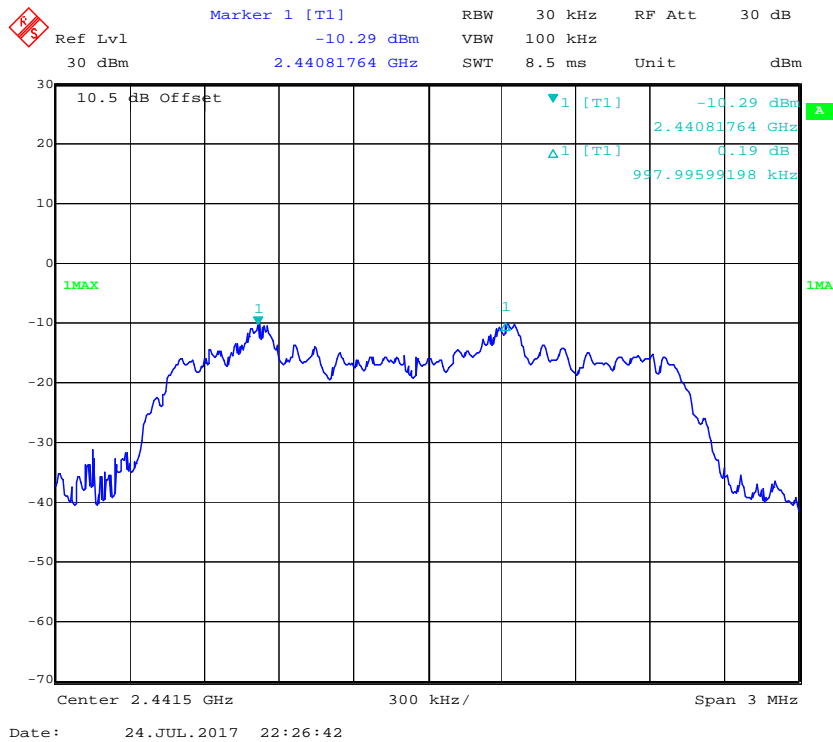


EDR ($\pi/4$ -DQPSK): High Channel

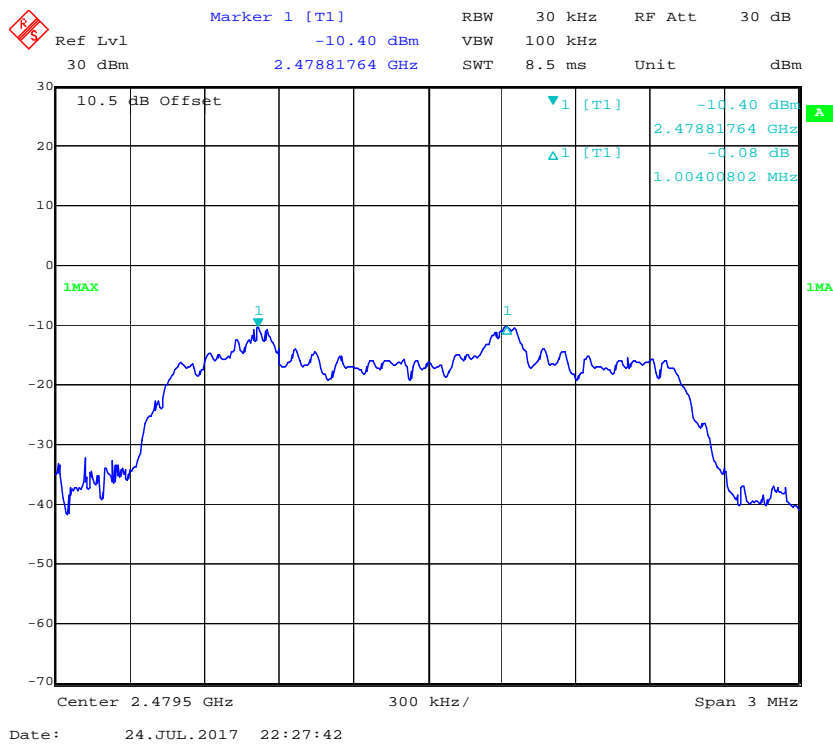


EDR (8DPSK): Low Channel

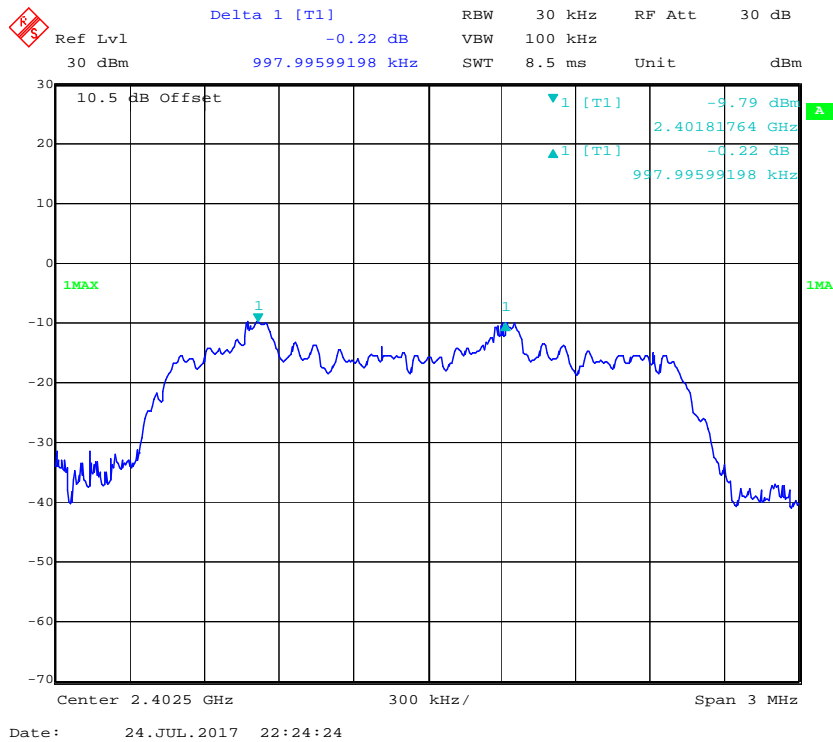

EDR (8DPSK): Middle Channel

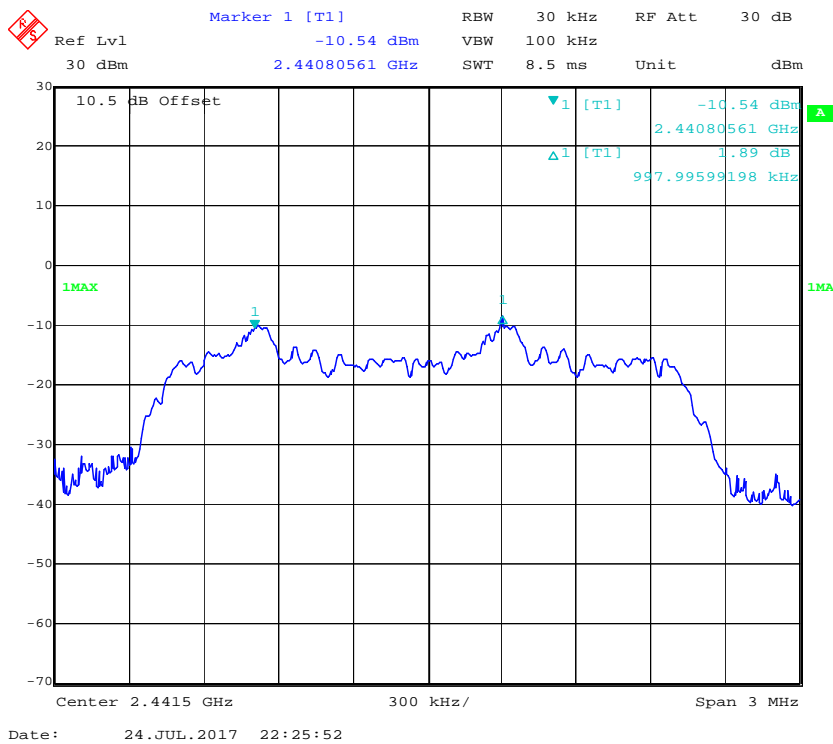

EDR (8DPSK): High Channel

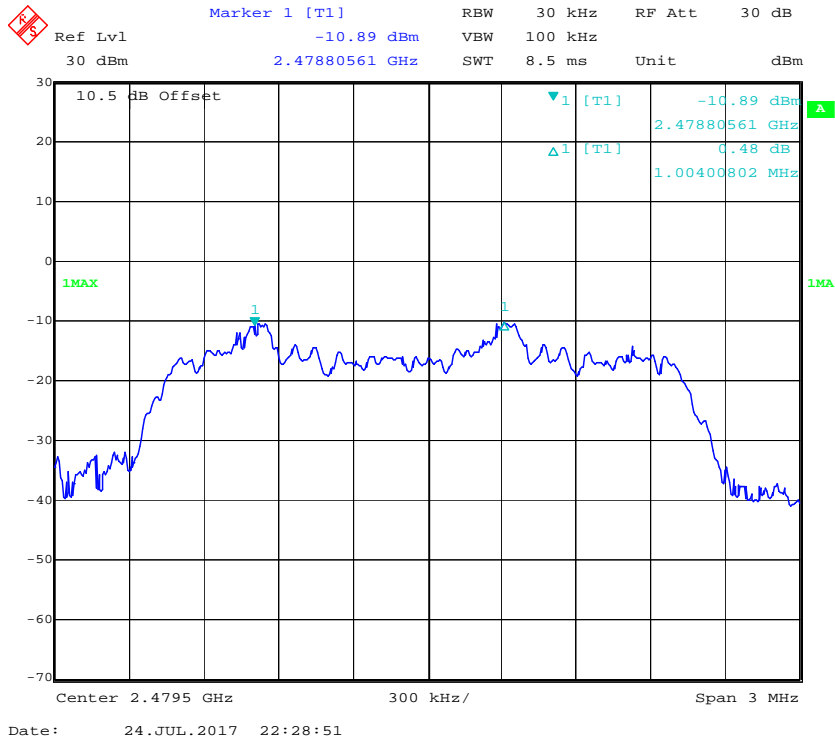

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Kobe Li on 2017-07-24.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.11
	Middle	2441	1.10
	High	2480	1.11
EDR ($\pi/4$-DQPSK)	Low	2402	1.30
	Middle	2441	1.30
	High	2480	1.30
EDR (8DPSK)	Low	2402	1.30
	Middle	2441	1.30
	High	2480	1.30


BDR (GFSK): Low Channel

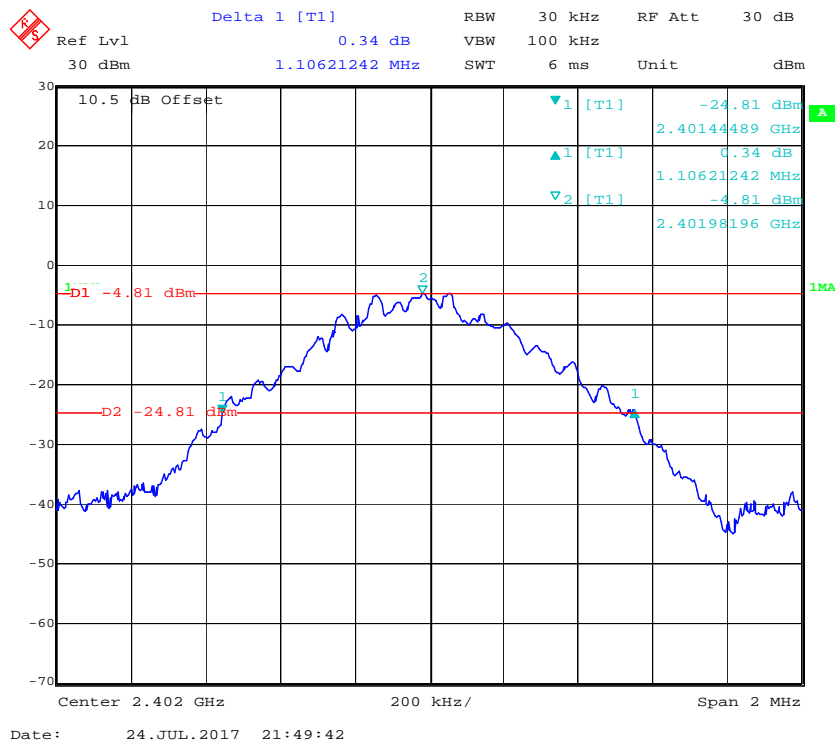


BDR (GFSK): Middle Channel

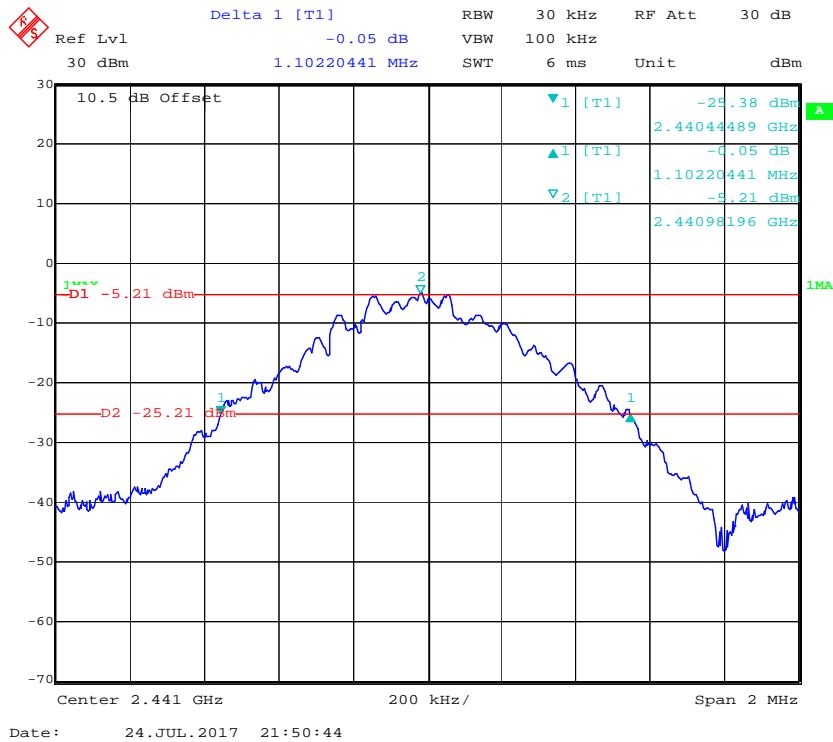


BDR (GFSK): High Channel

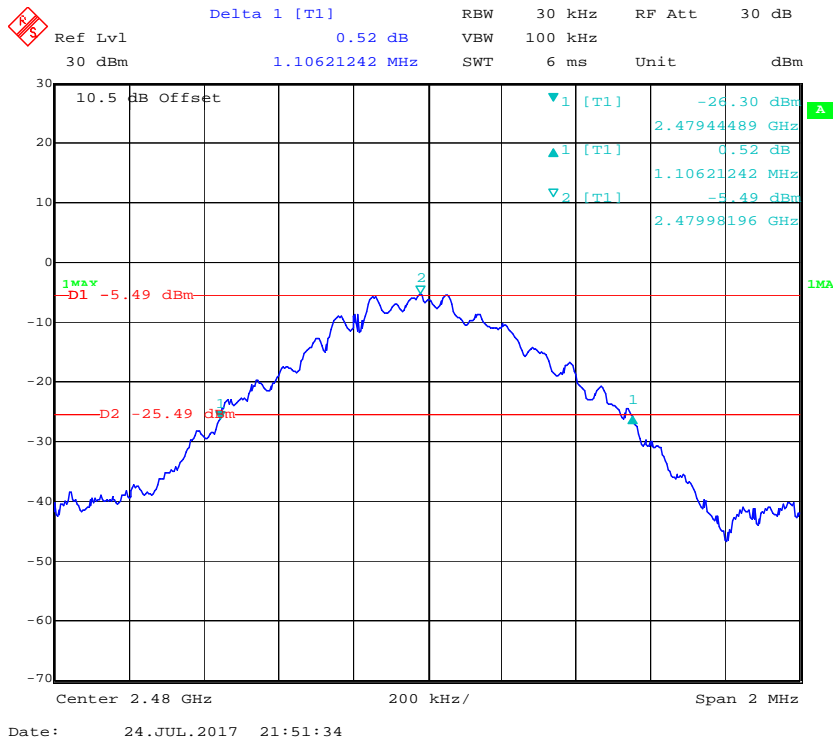


EDR ($\pi/4$ -DQPSK): Low Channel

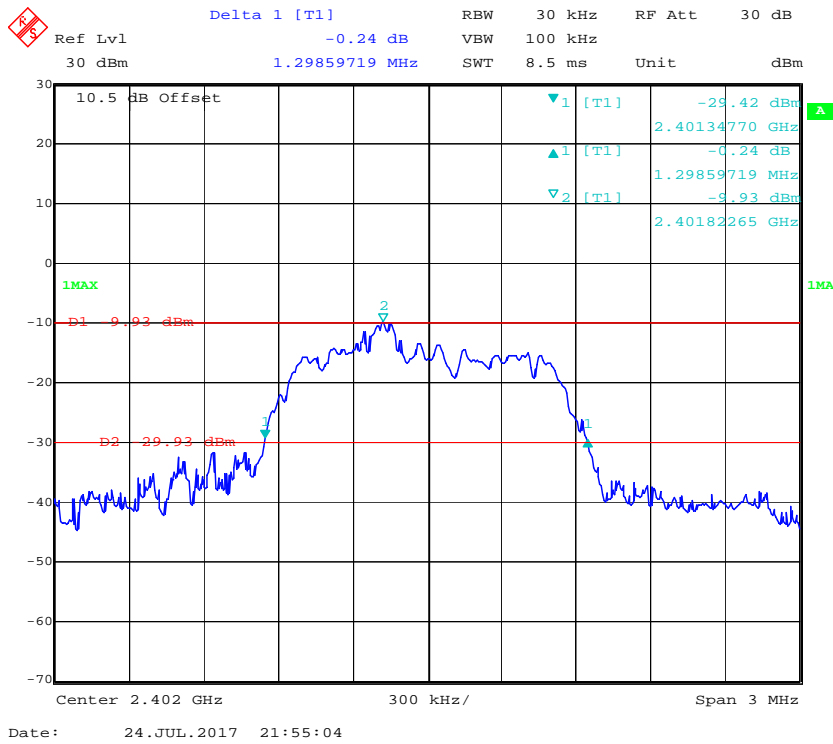


EDR ($\pi/4$ -DQPSK): Middle Channel

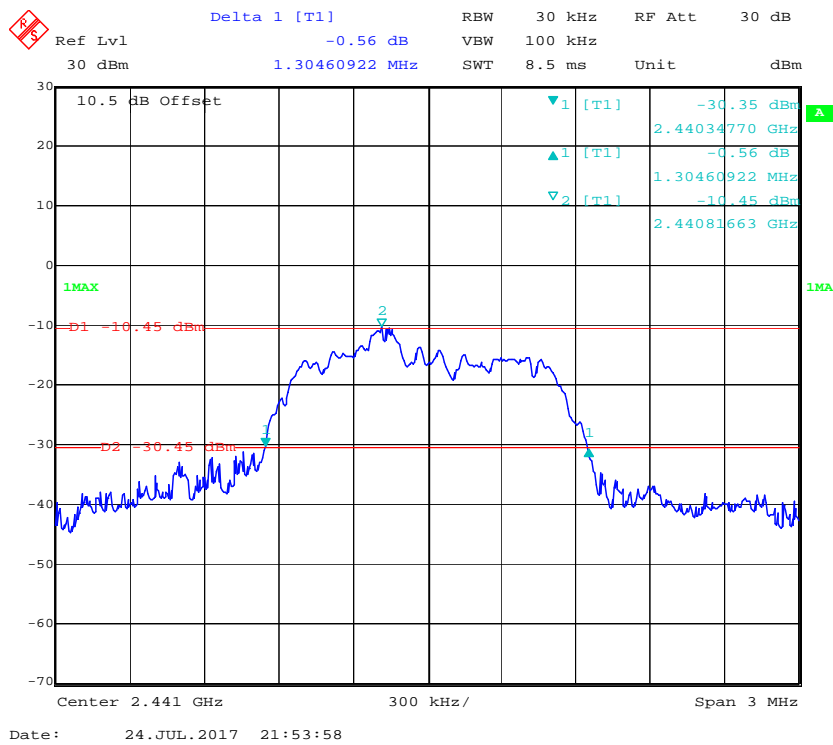


EDR ($\pi/4$ -DQPSK): High Channel

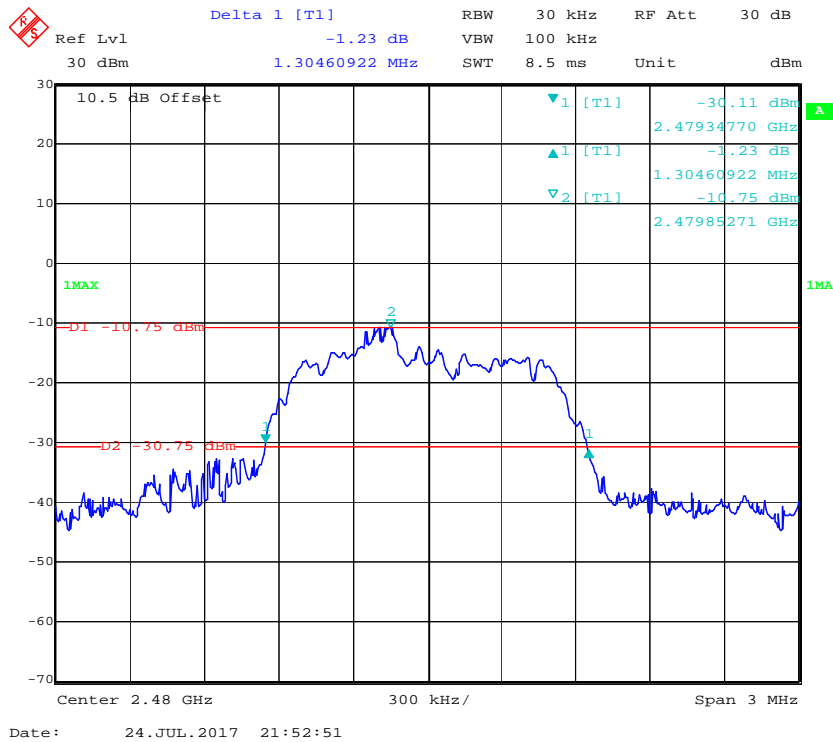


EDR (8DPSK): Low Channel

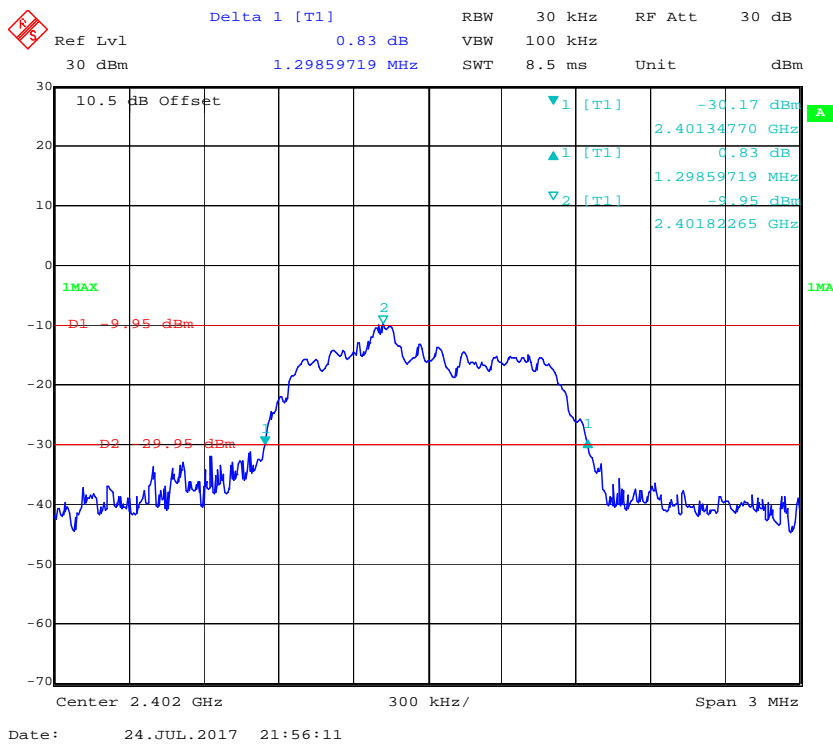

EDR (8DPSK): Middle Channel

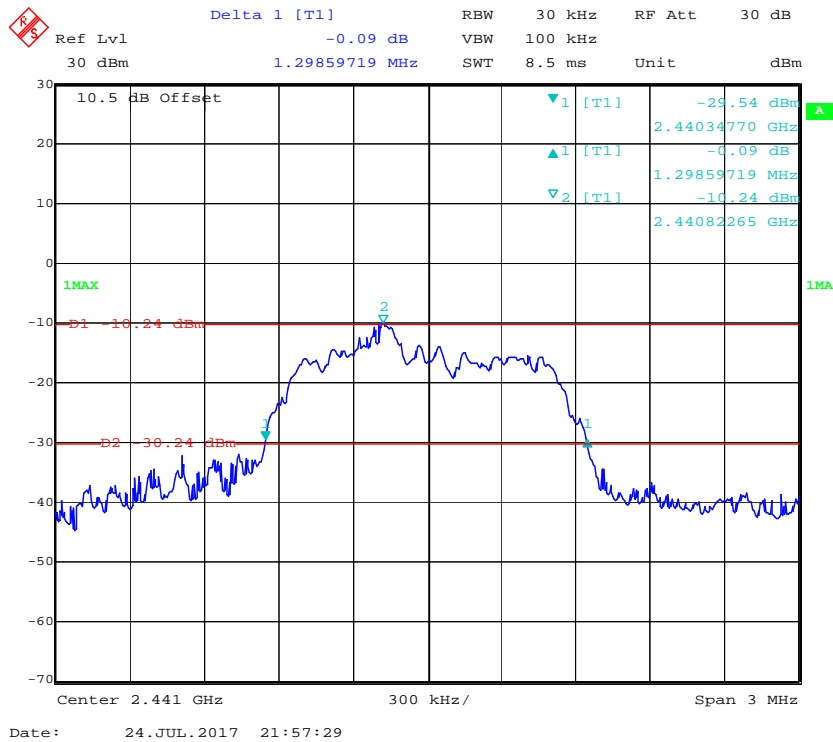

EDR (8DPSK): High Channel

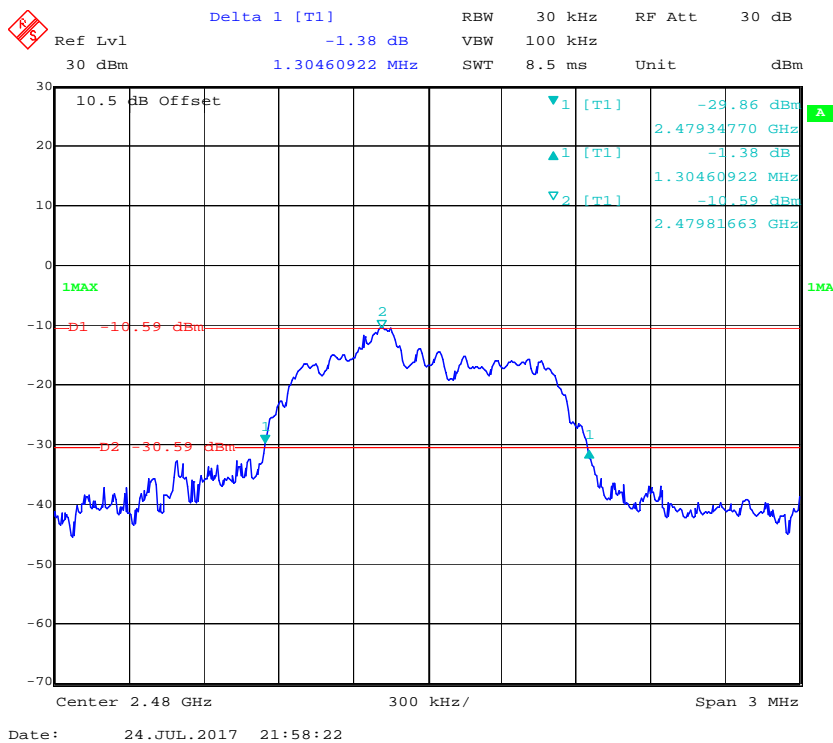

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Kobe Li on 2017-07-24.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

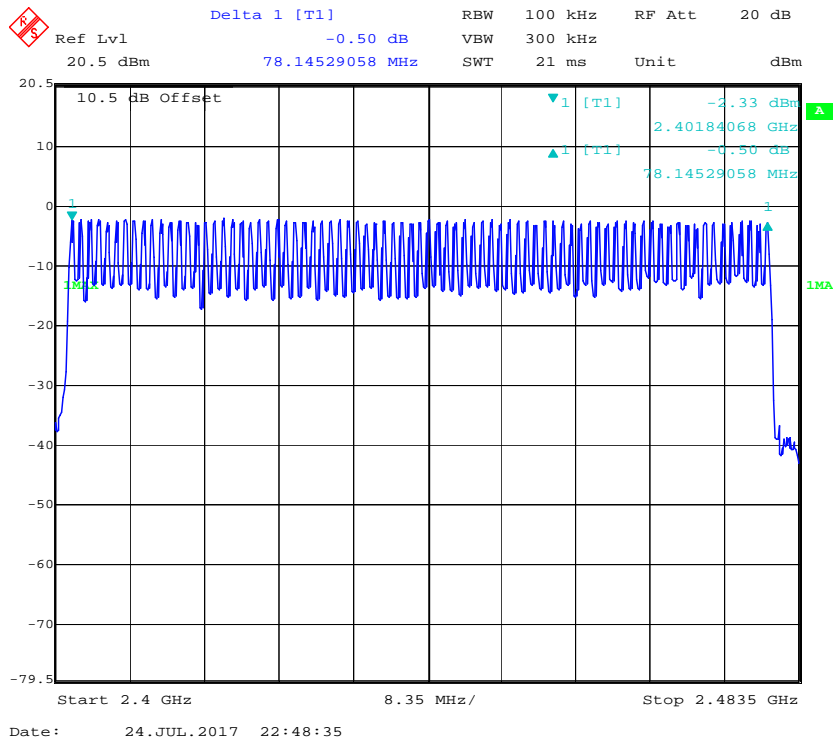

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

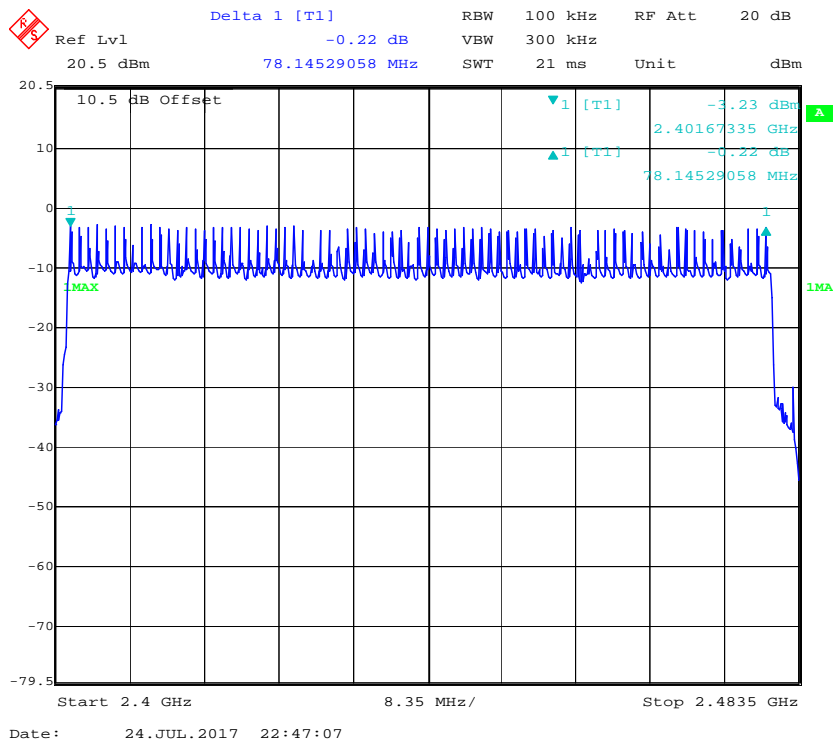

EDR (8DPSK): Number of Hopping Channels

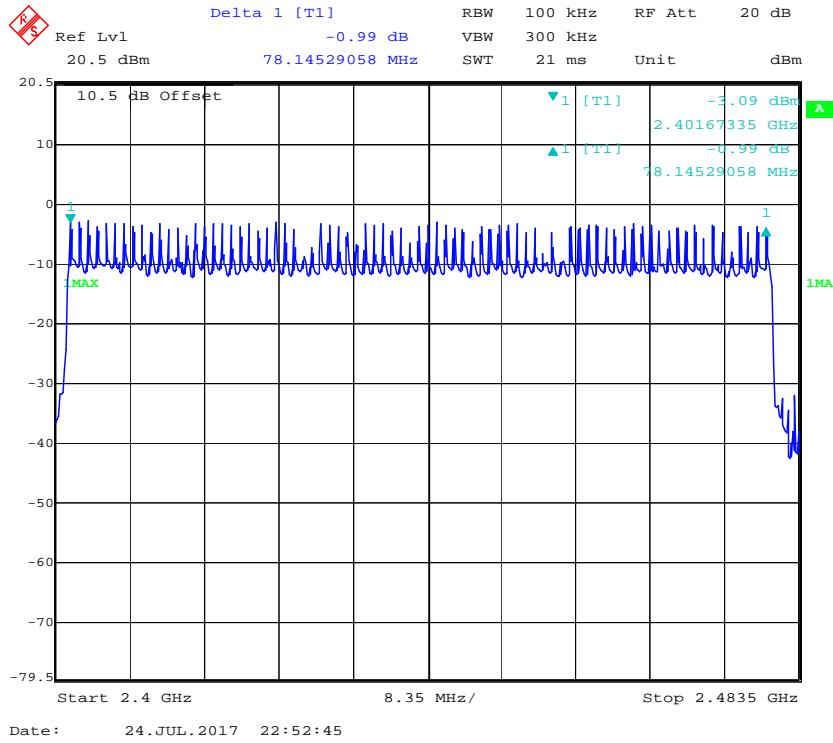

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	53~54 %
ATM Pressure:	101.0 kPa


The testing was performed by Kobe Li on 2017-07-24 and 2017-07-28.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.373	0.119	0.4	Pass
		Middle	0.373	0.119	0.4	Pass
		High	0.383	0.123	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.659	0.265	0.4	Pass
		Middle	1.725	0.276	0.4	Pass
		High	1.659	0.265	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.946	0.314	0.4	Pass
		Middle	2.956	0.315	0.4	Pass
		High	2.946	0.314	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
	EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.373	0.119	0.4
Middle			0.373	0.119	0.4	Pass
High			0.373	0.119	0.4	Pass
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
2DH 3		Low	1.659	0.265	0.4	Pass
		Middle	1.659	0.265	0.4	Pass
		High	1.671	0.267	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
2DH 5		Low	2.952	0.315	0.4	Pass
		Middle	2.952	0.315	0.4	Pass
		High	2.952	0.315	0.4	Pass
		Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)		3DH 1	Low	0.373	0.119	0.4
	Middle		0.373	0.119	0.4	Pass
	High		0.373	0.119	0.4	Pass
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	3DH 3	Low	1.671	0.267	0.4	Pass
		Middle	1.671	0.267	0.4	Pass
		High	1.671	0.267	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.962	0.316	0.4	Pass
		Middle	2.916	0.311	0.4	Pass
		High	3.032	0.323	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

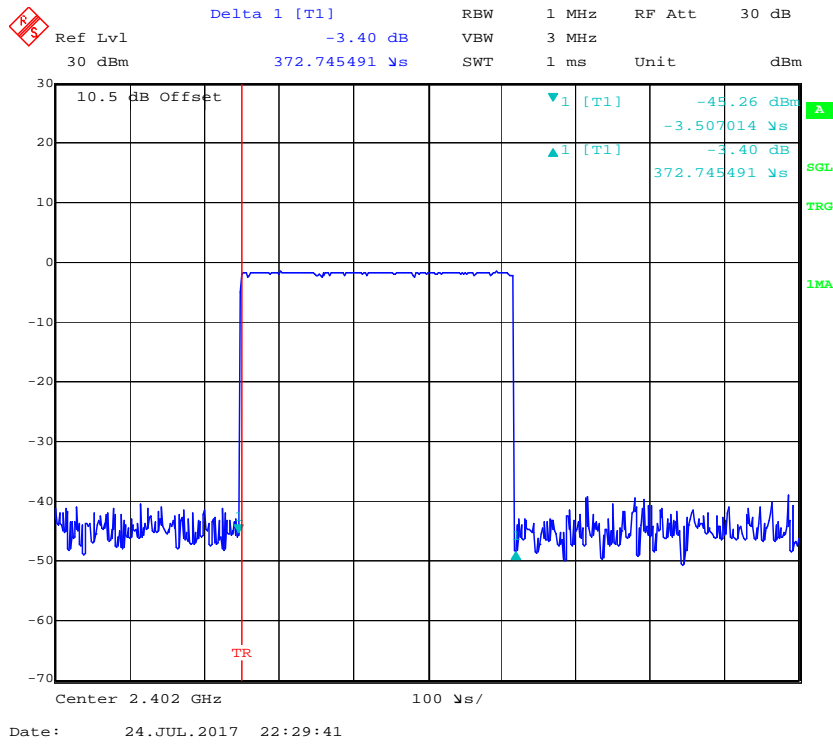

Pulse time, Middle Channel, DH1

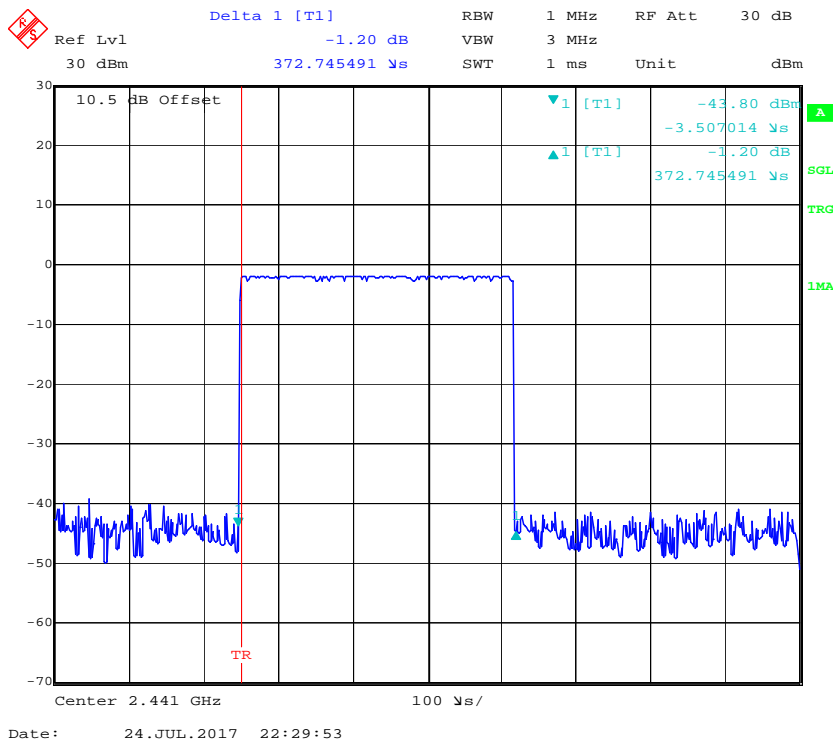


Pulse time, High Channel, DH1

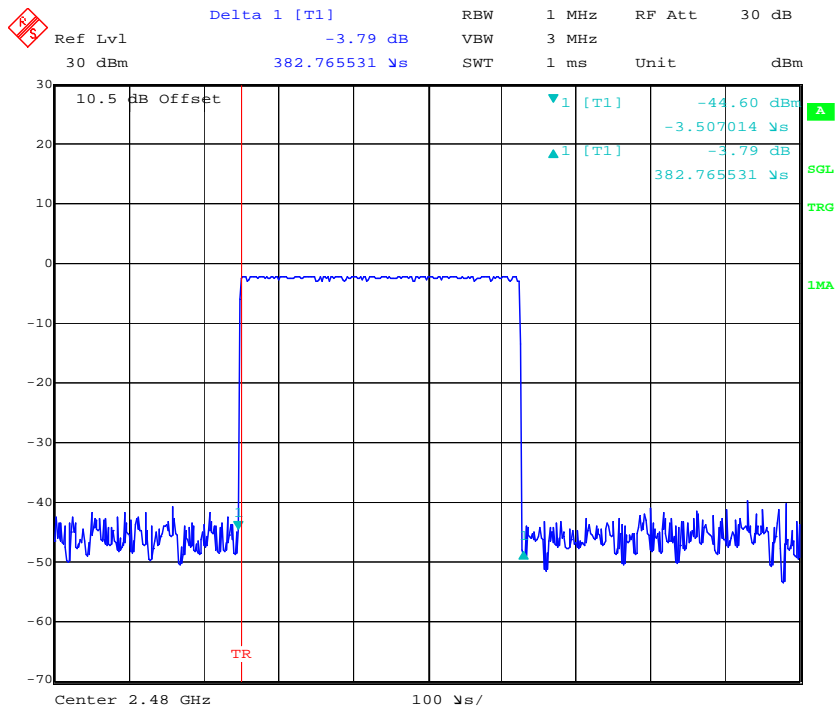


Date: 24.JUL.2017 22:30:00

Pulse time, Low Channel, DH3

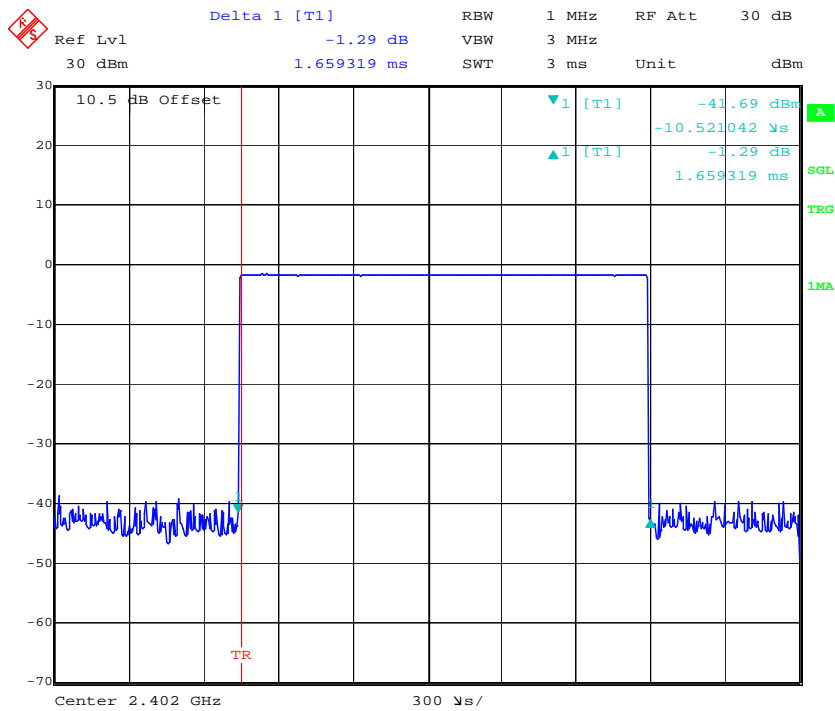


Date: 24.JUL.2017 22:30:42

Pulse time, Middle Channel, DH3

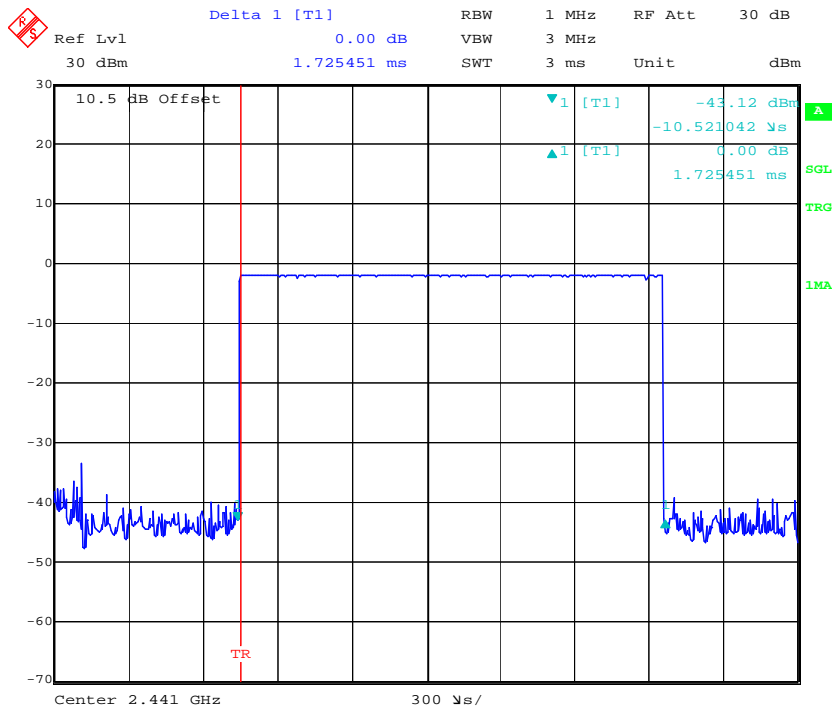


Date: 24.JUL.2017 22:30:48

Pulse time, High Channel, DH3

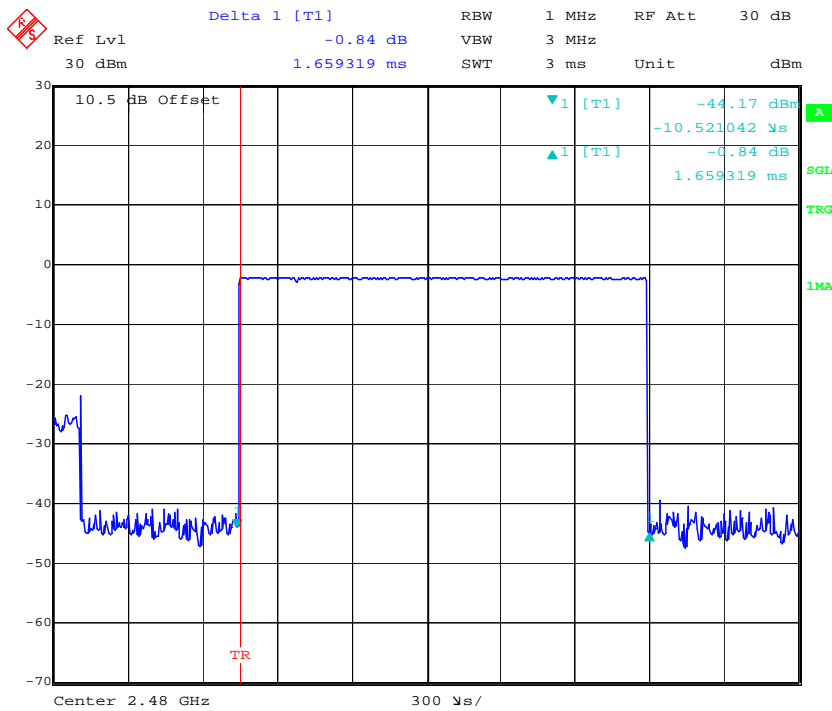


Date: 24.JUL.2017 22:30:55

Pulse time, Low Channel, DH5

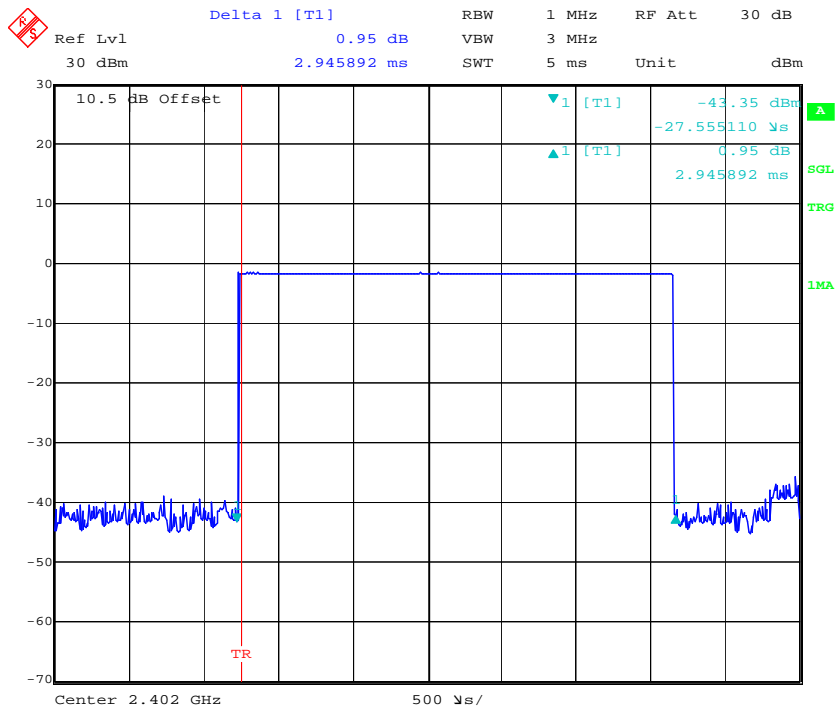


Date: 24.JUL.2017 22:36:35

Pulse time, Middle Channel, DH5

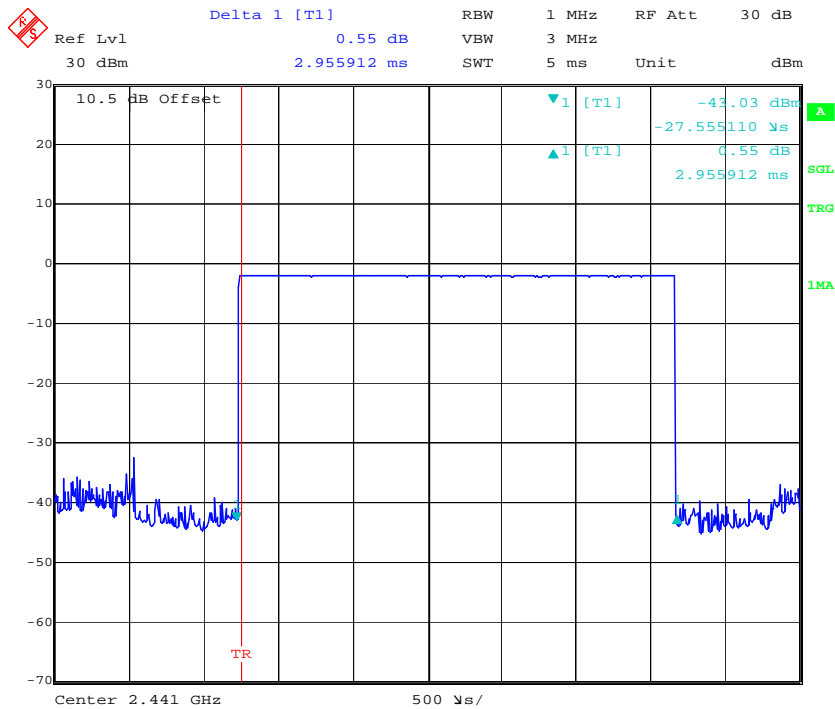


Date: 24.JUL.2017 22:36:42


Pulse time, High Channel, DH5

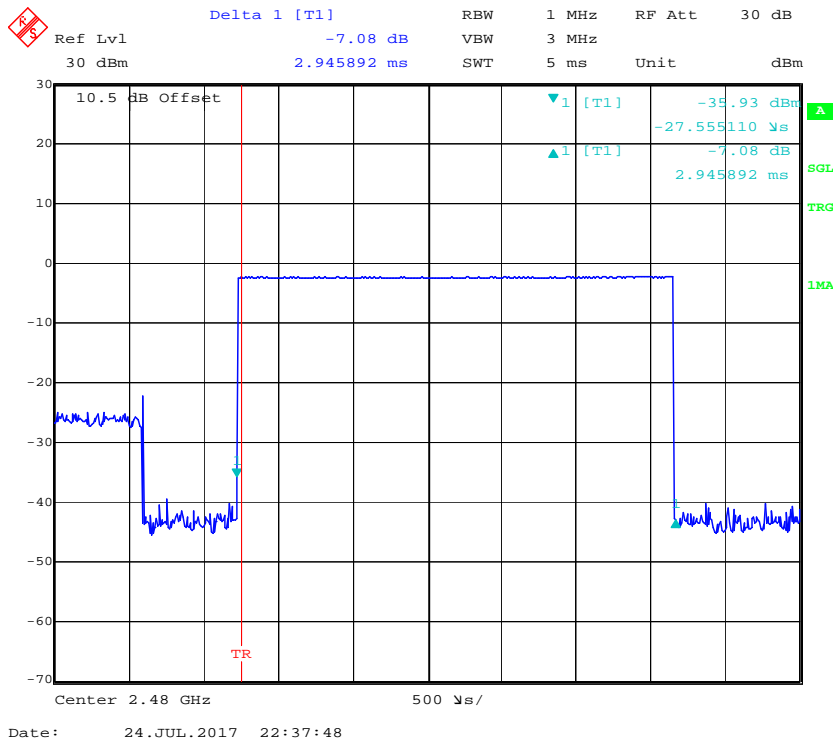


**EDR ($\pi/4$ -DQPSK):
Pulse time, Low Channel, 2DH1**

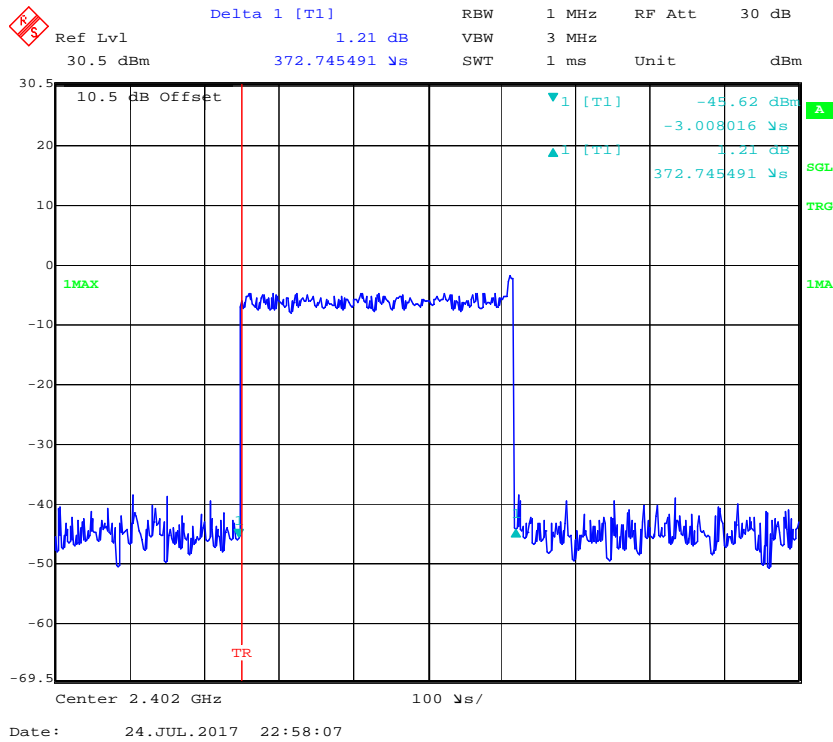


Pulse time, Middle Channel, 2DH1

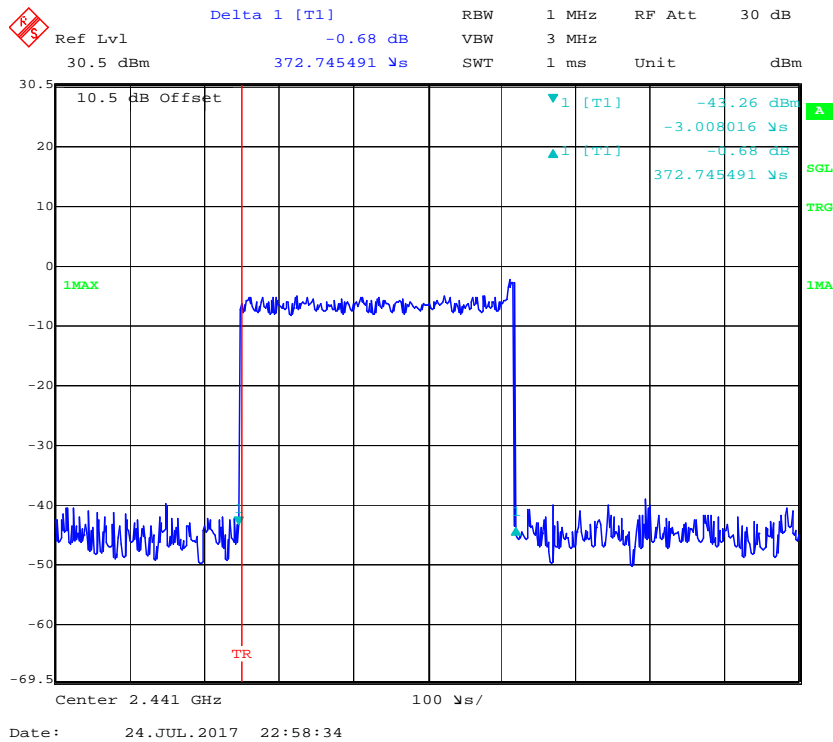


Pulse time, High Channel, 2DH1

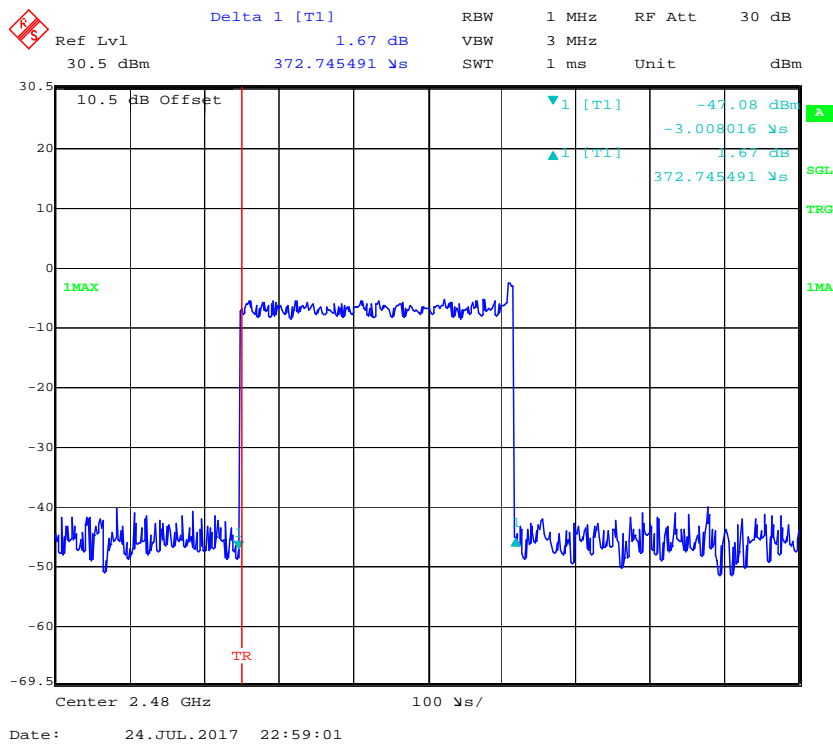


Pulse time, Low Channel, 2DH3

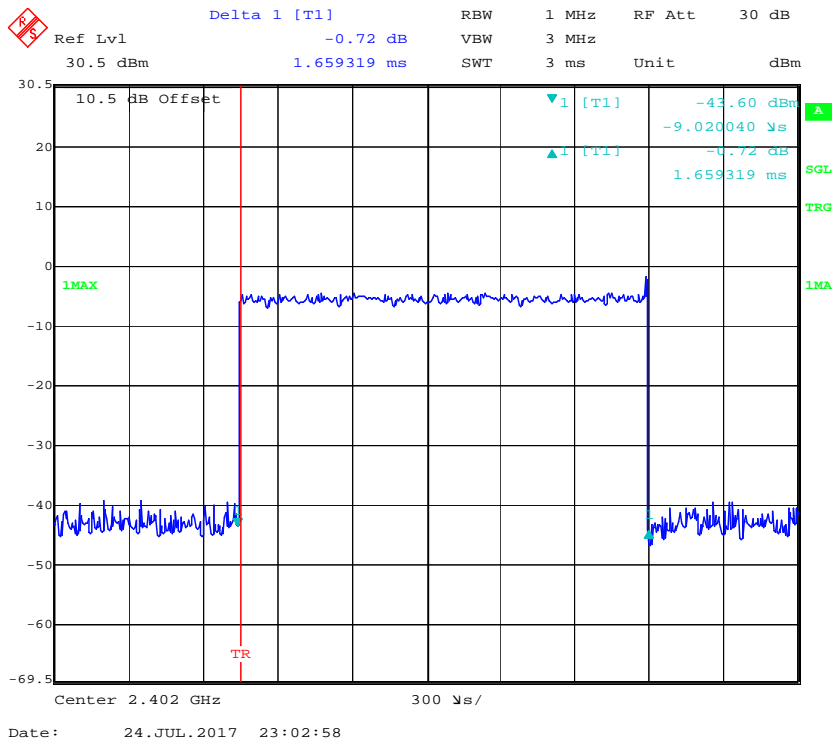


Pulse time, Middle Channel, 2DH3

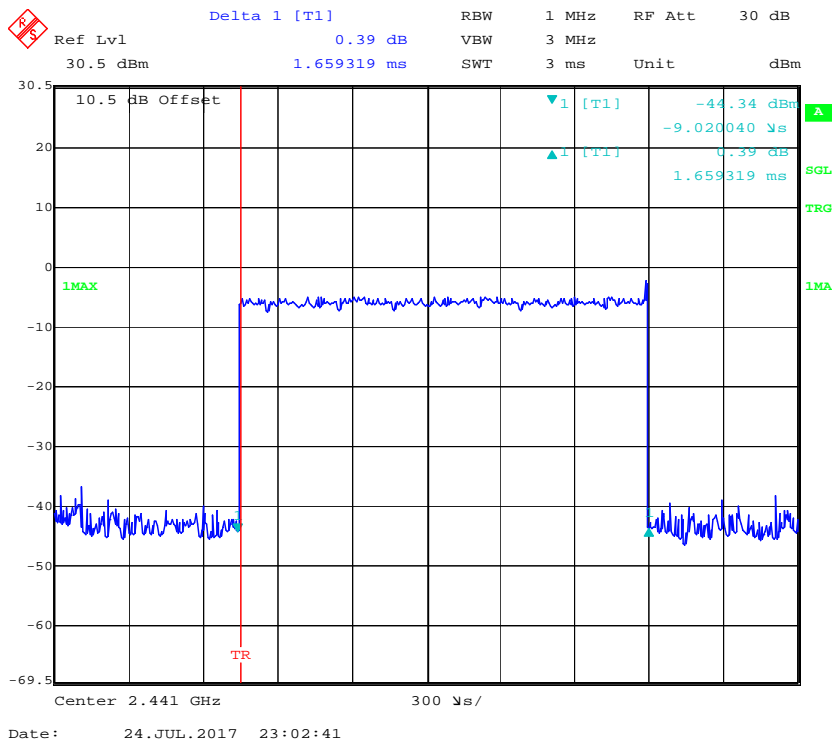


Pulse time, High Channel, 2DH3

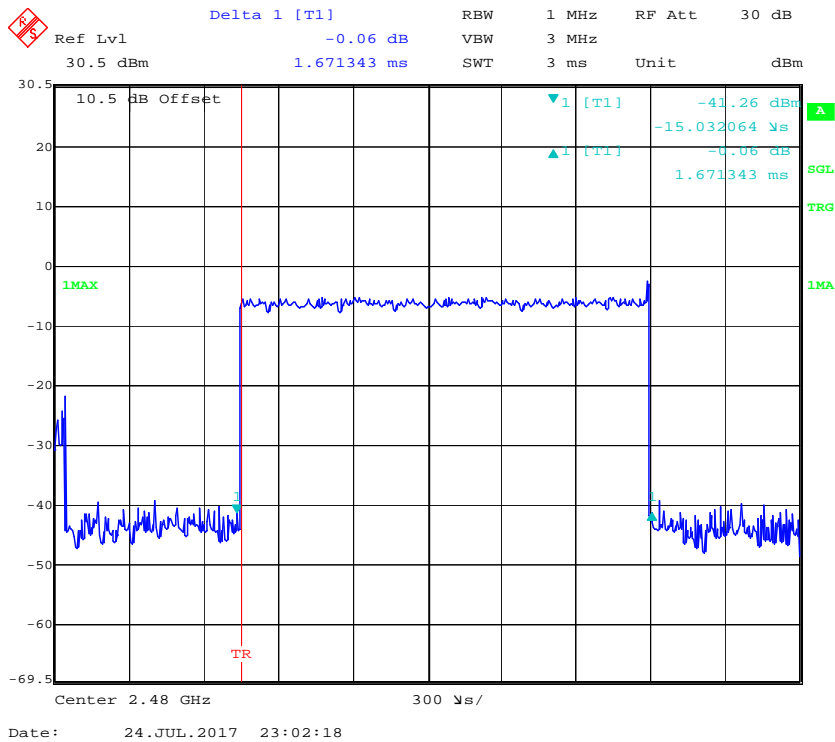


Pulse time, Low Channel, 2DH5

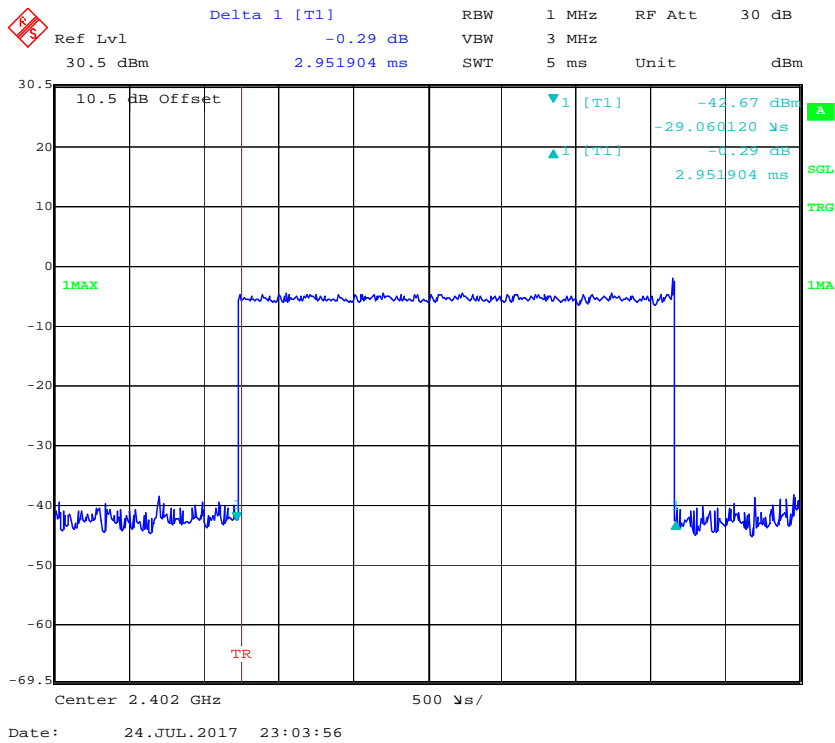


Pulse time, Middle Channel, 2DH5

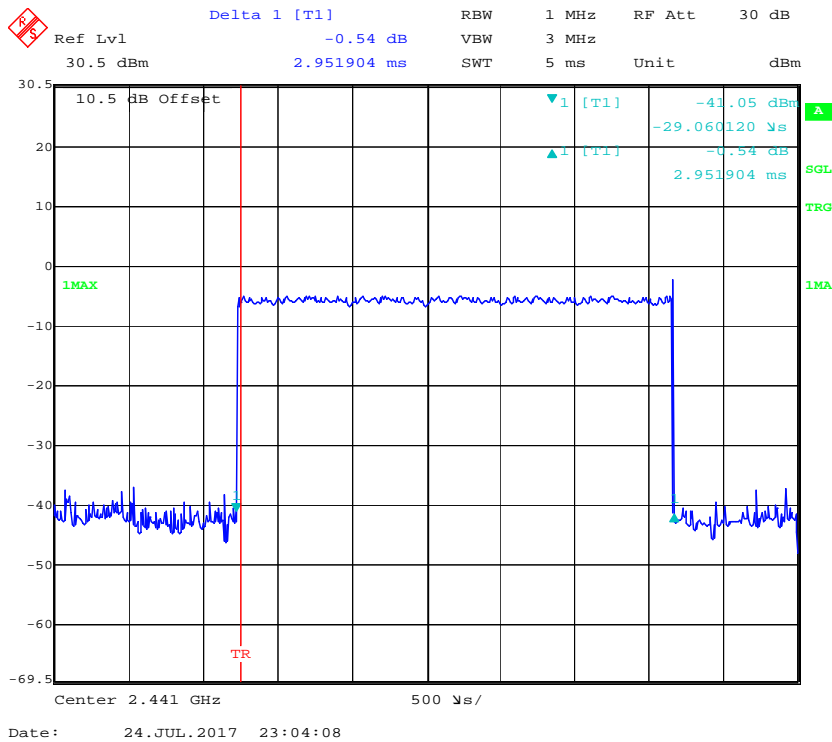


Pulse time, High Channel, 2DH5

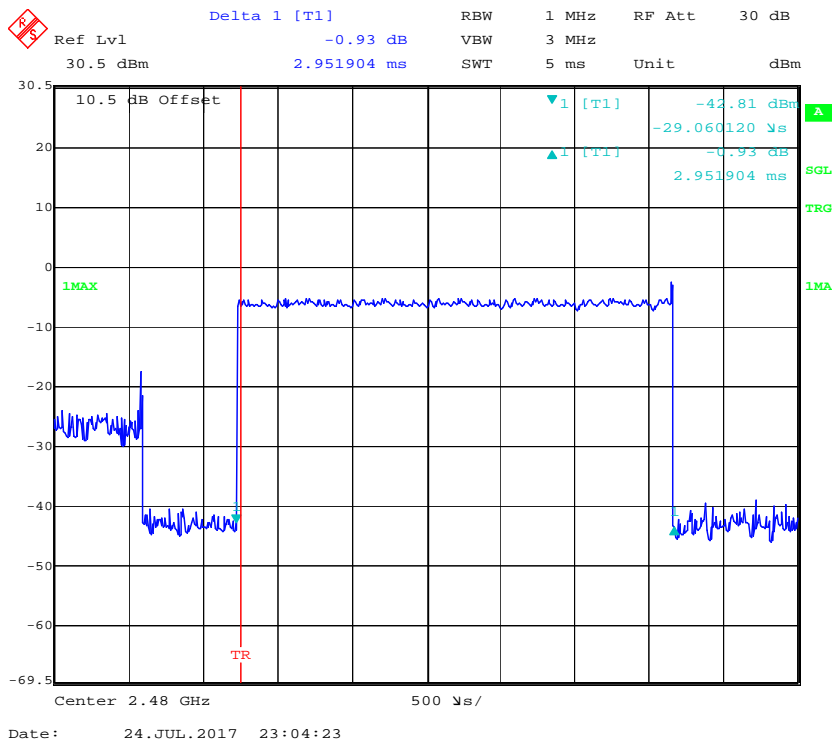


**EDR (8DPSK):
Pulse time, Low Channel, 3DH1**

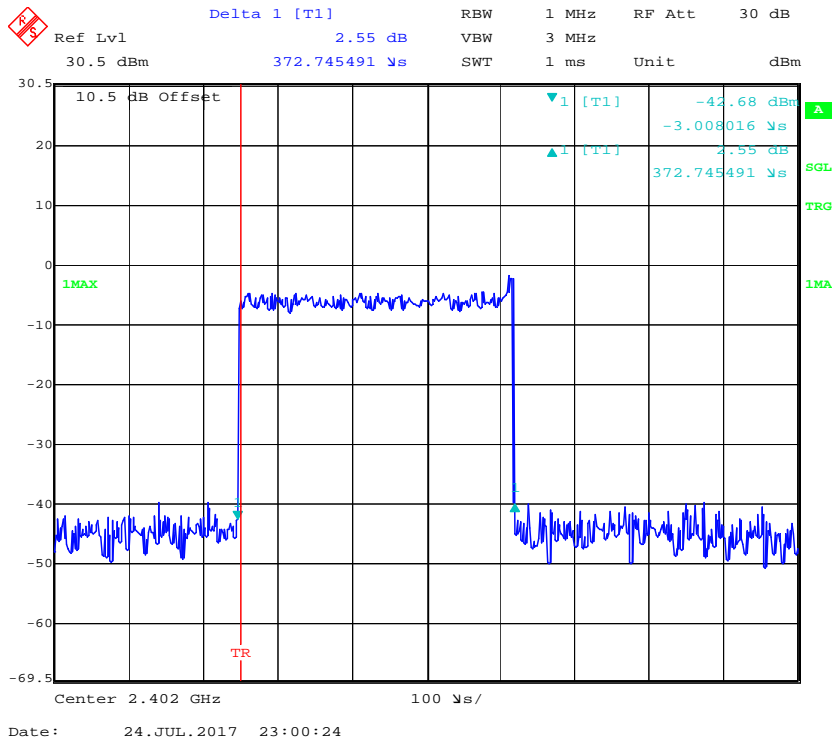


Pulse time, Middle Channel, 3DH1

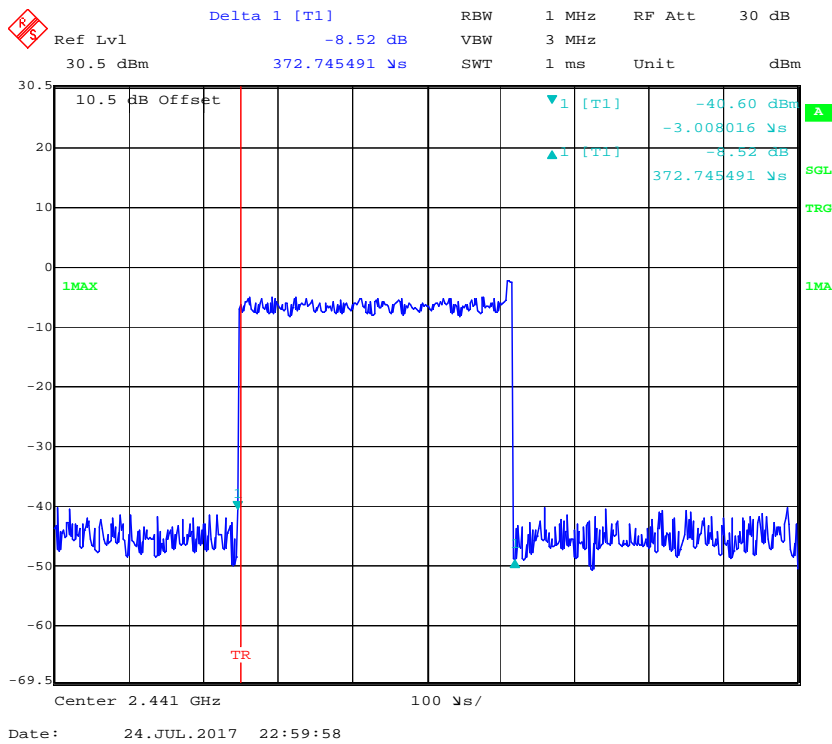


Pulse time, High Channel, 3DH1

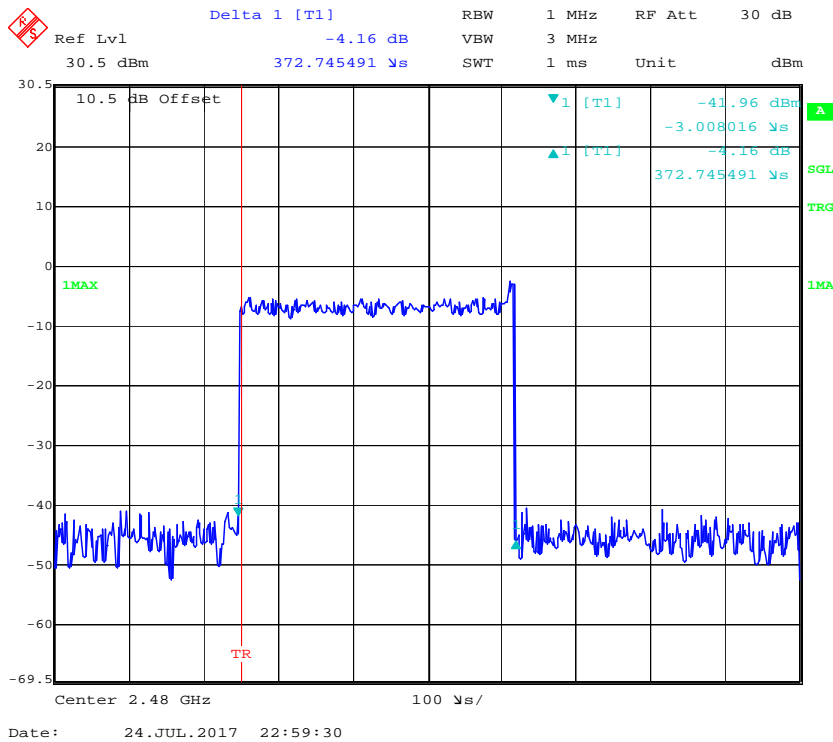


Pulse time, Low Channel, 3DH3

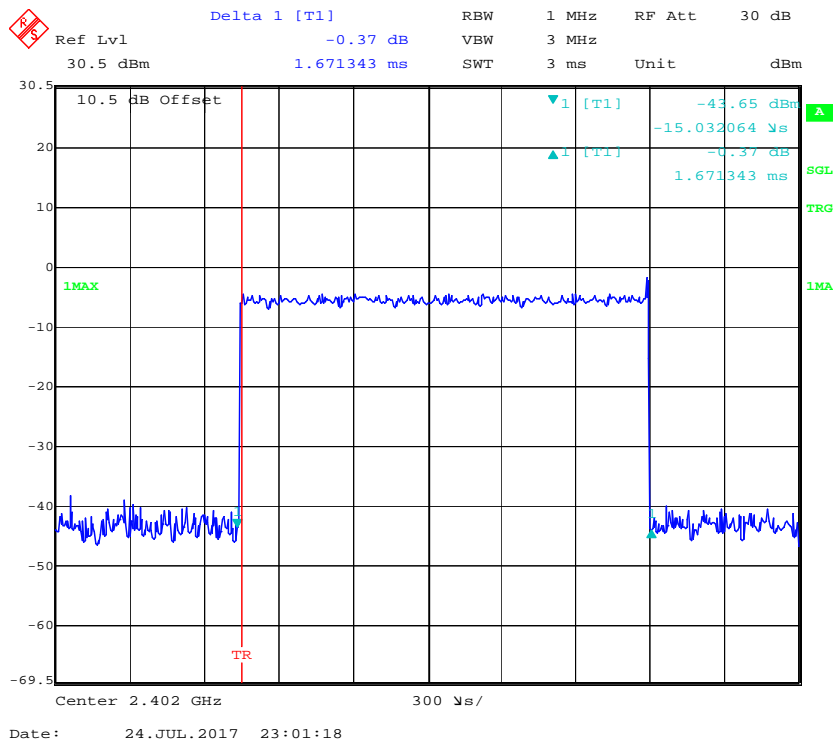


Pulse time, Middle Channel, 3DH3

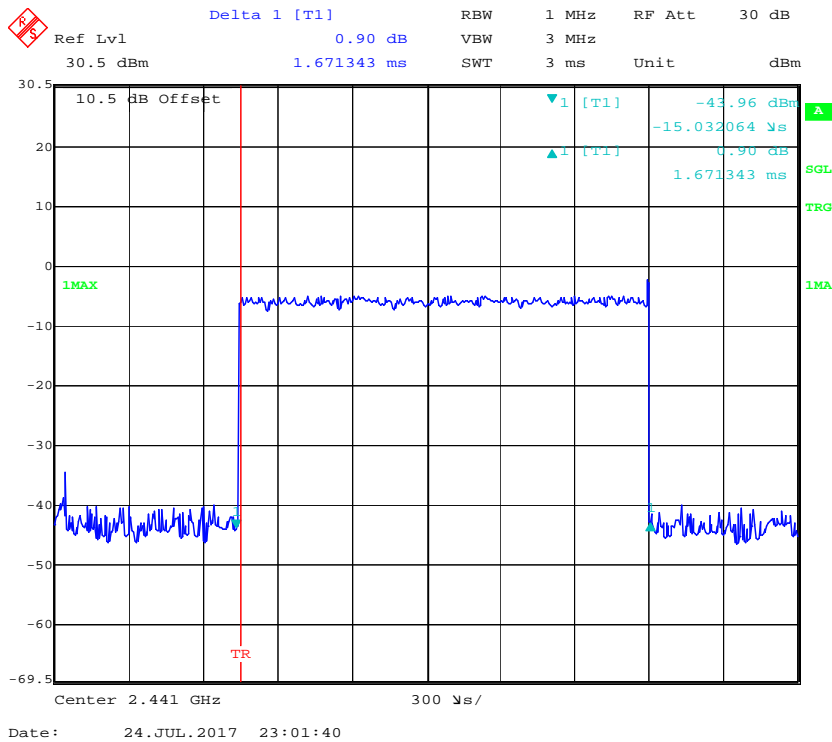


Pulse time, High Channel, 3DH3

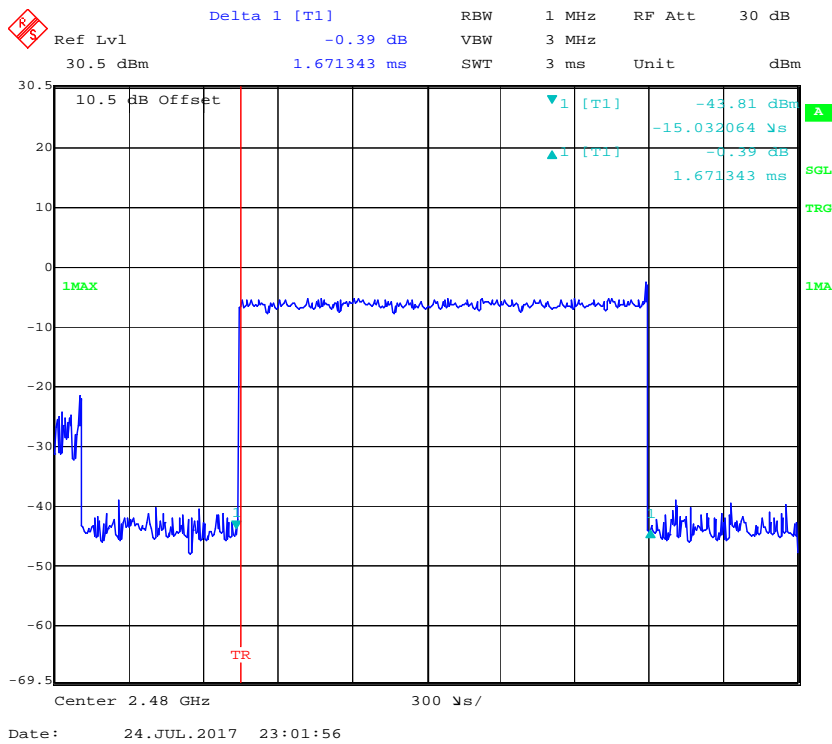


Pulse time, Low Channel, 3DH5

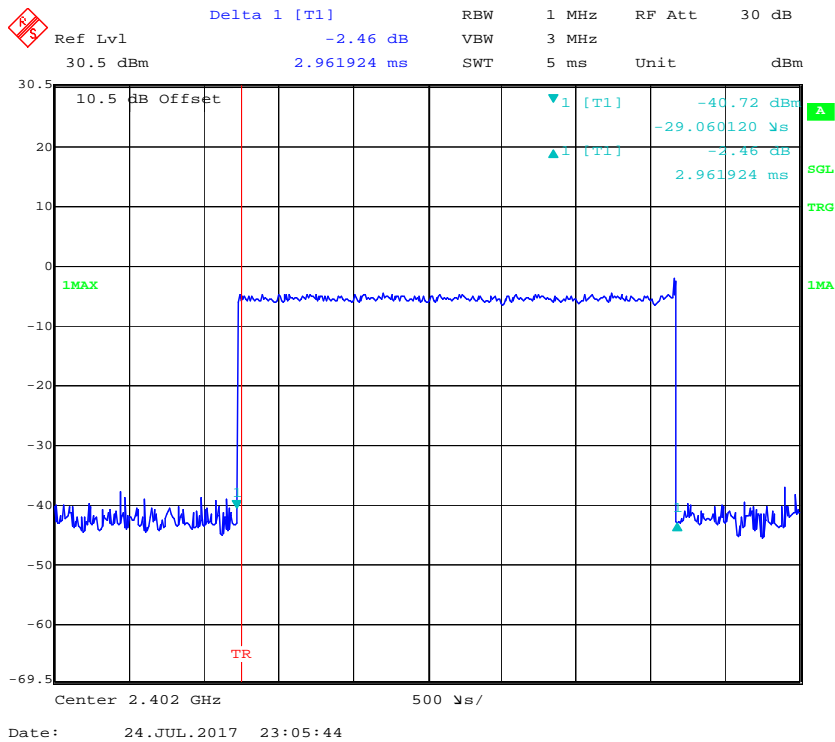

Pulse time, Middle Channel, 3DH5

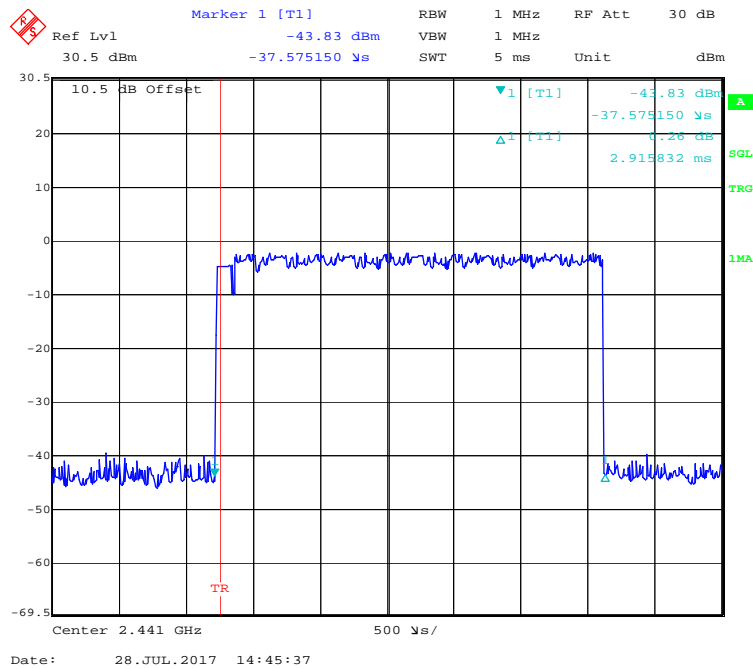

Pulse time, High Channel, 3DH5

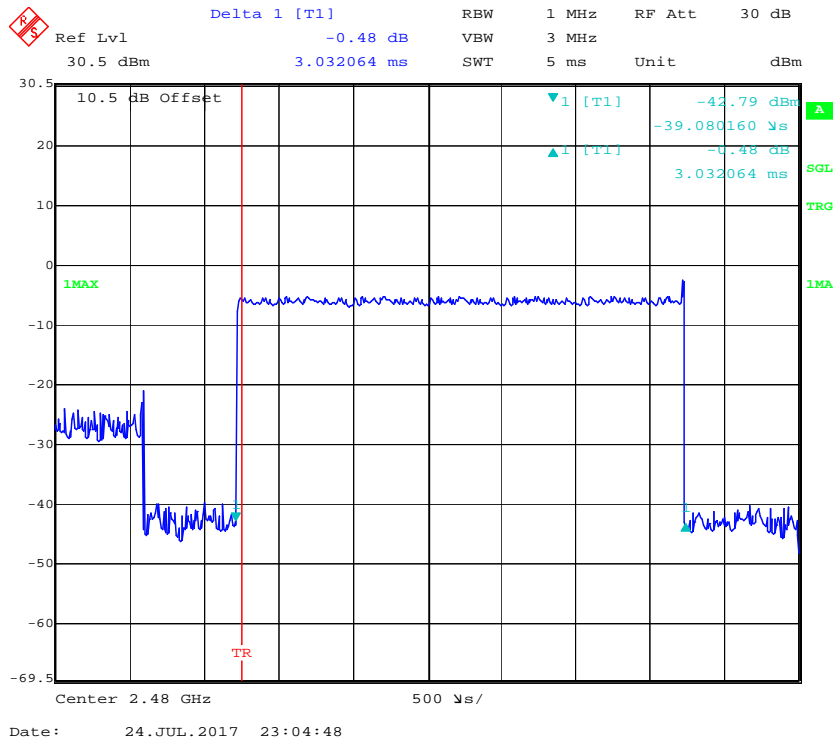

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-07-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
BDR (GFSK)	Low	2402	-2.01	30
	Middle	2441	-2.39	30
	High	2480	-2.64	30
EDR ($\pi/4$-DQPSK)	Low	2402	-1.89	30
	Middle	2441	-2.39	30
	High	2480	-2.27	30
EDR (8DPSK)	Low	2402	-1.89	30
	Middle	2441	-2.27	30
	High	2480	-2.52	30

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kobe Li on 2017-07-24.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

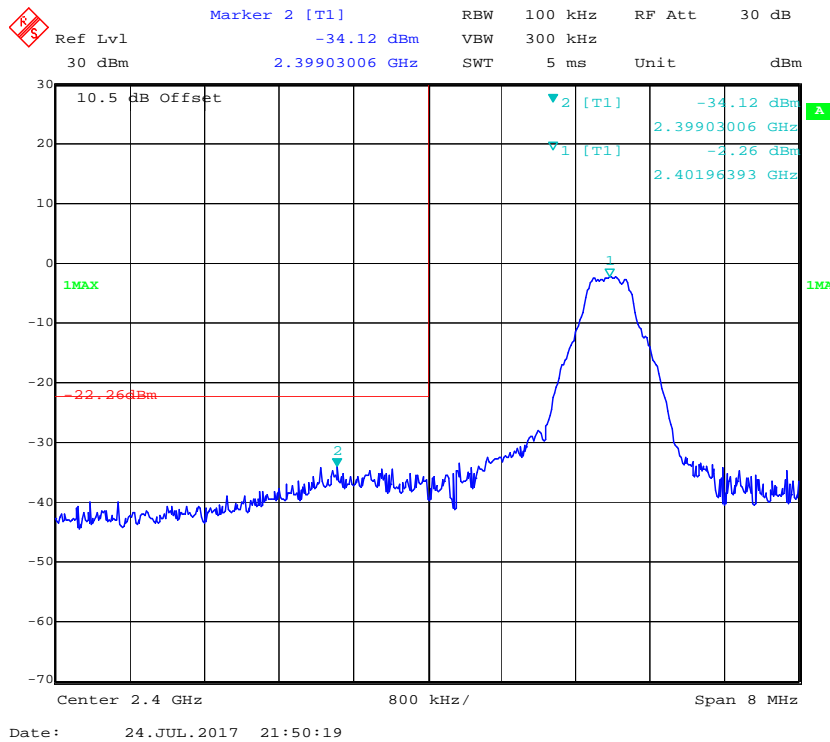


BDR (GFSK): Band Edge-Right Side

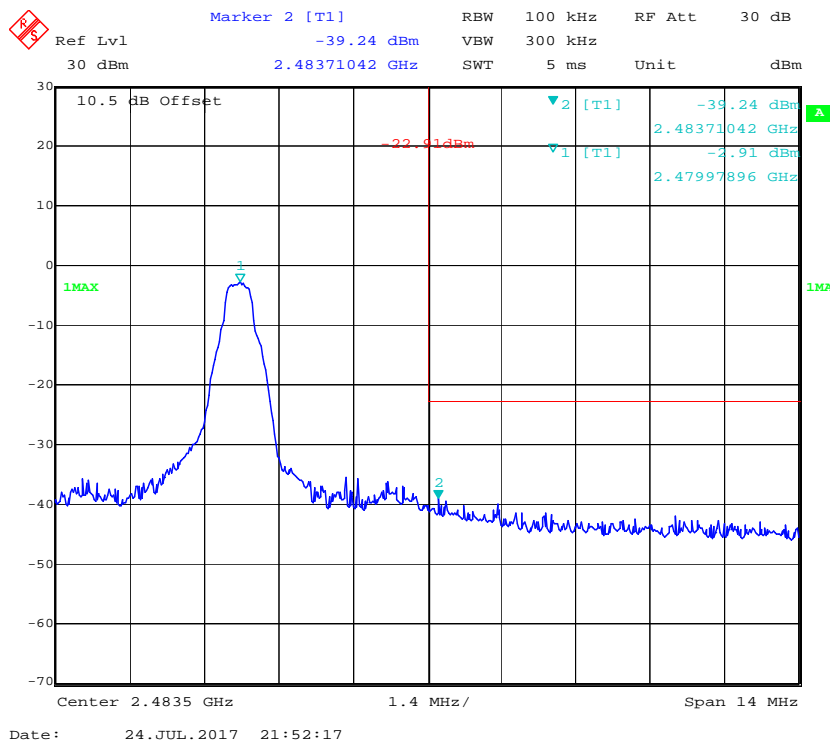


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

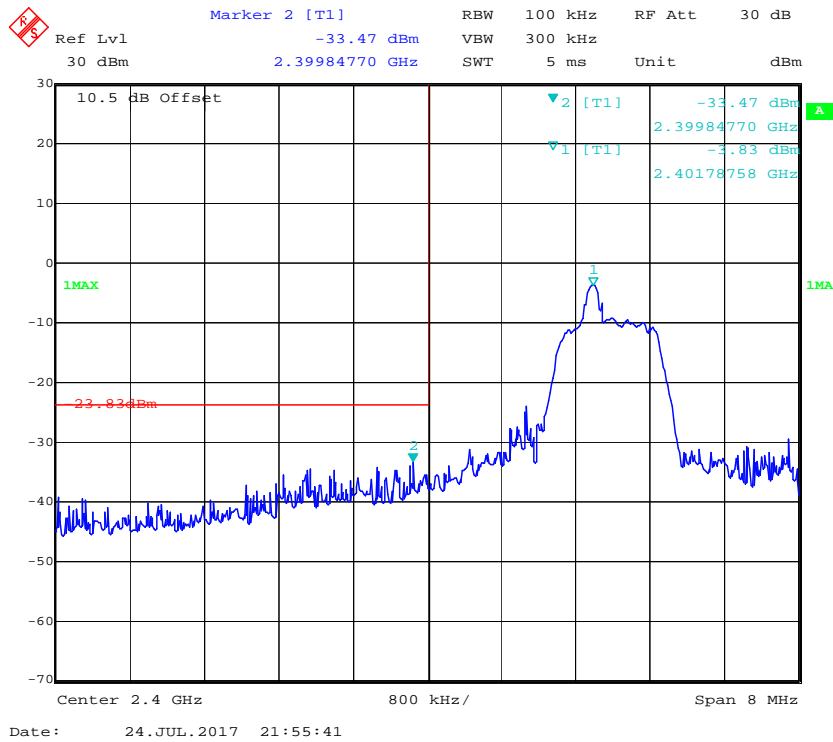


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

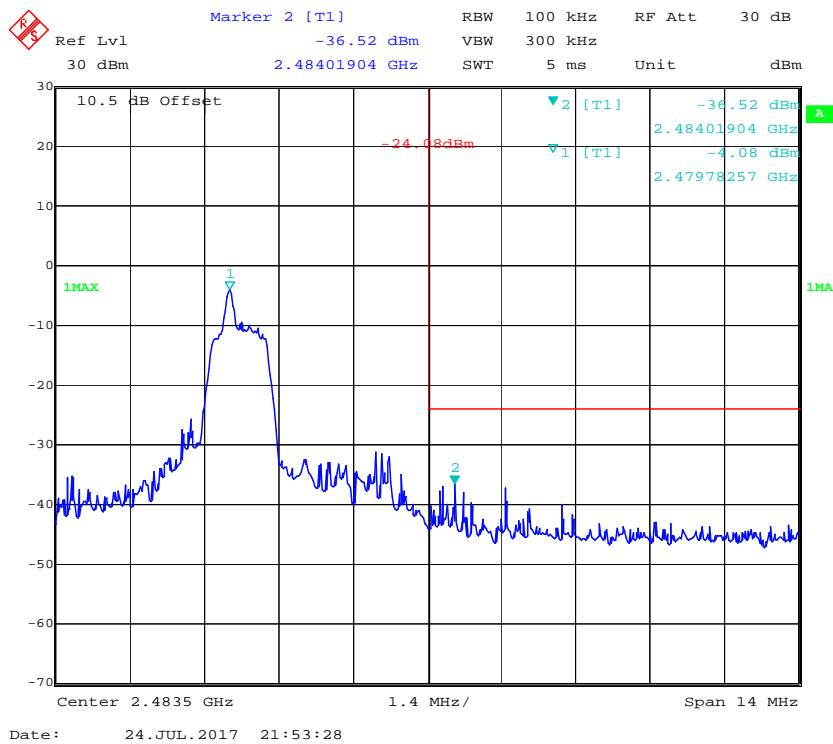

EDR (8DPSK): Band Edge-Left Side

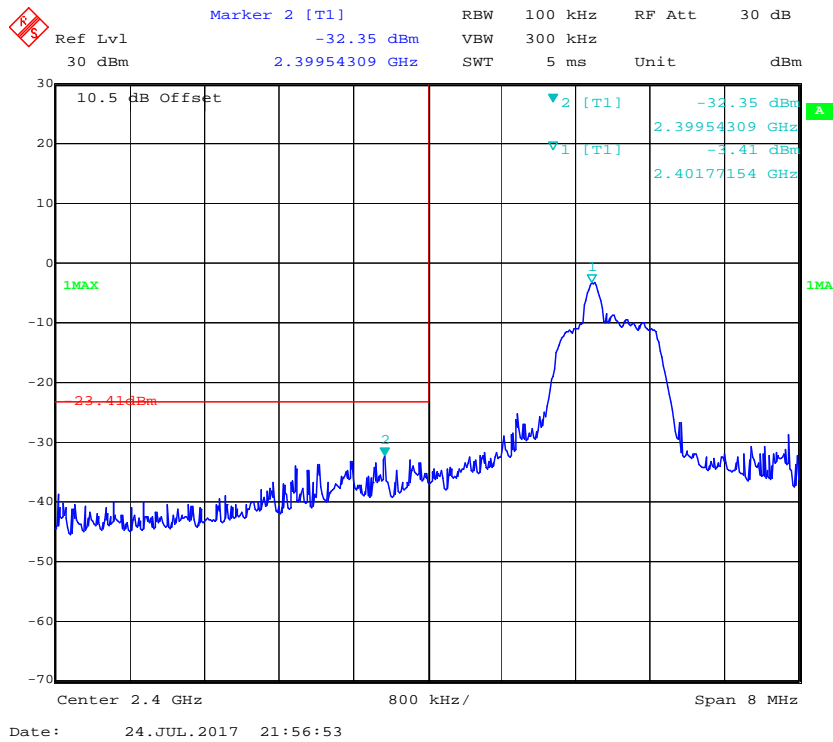

BDR (8DPSK): Band Edge-Right Side

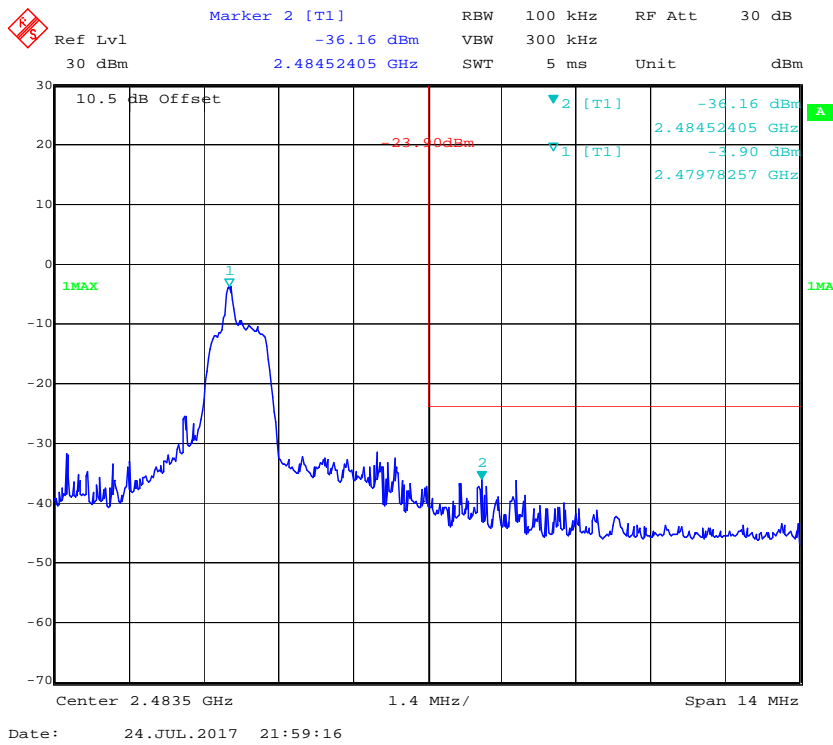

***** END OF REPORT *****