

# TEST REPORT

Applicant Name : Zeeva International Limited  
Address : Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road,  
Kowloon Bay, Hong Kong  
Report Number: SZ3220715-32239E-RF  
FCC ID: 2ADM5-TL-0023

### Test Standard (s)

FCC PART 15.249


### Sample Description

Product Type: BLACK PANTHER DRONE  
Model No.: TL-0023  
Trade Name: N/A  
Date Received: 2022-07-15  
Date of Test: 2022-08-08 to 2022-08-09  
Report Date: 2022-08-18

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

### Prepared and Checked By:



Jeff Jiang  
EMC Engineer

### Approved By:



Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data in affect testresults are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the result the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the A

only to

### Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Gua  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>GENERAL INFORMATION</b> .....	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE DESCRIPTIONS.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS</b> .....	<b>7</b>
<b>TEST EQUIPMENT LIST</b> .....	<b>8</b>
<b>FCC §1.1307 (B) &amp; §2.1093 – RF EXPOSURE</b> .....	<b>9</b>
APPLICABLE STANDARD .....	9
TEST RESULT .....	9
<b>FCC§15.203 – ANTENNA REQUIREMENT</b> .....	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC§15.205, §15.209 &amp; §15.249(D) – RADIATED EMISSIONS</b> .....	<b>11</b>
APPLICABLE STANDARD .....	11
TEST EQUIPMENT SETUP .....	11
EUT SETUP .....	12
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC§15.215(C) - 20DB EMISSION BANDWIDTH</b> .....	<b>19</b>
APPLICABLE STANDARD .....	19
TEST PROCEDURE .....	19
TEST DATA .....	19

---

**GENERAL INFORMATION**

---

**Product Description for Equipment under Test (EUT)**

Product	BLACK PANTHER DRONE
Tested Model	TL-0023
SKU	6645017
UPC	1922344850174
Frequency Range	2420-2460MHz
Maximum E-Field Strength (Peak)	86.97dBuV/m@3m
Modulation Technique	GFSK
Voltage Range	DC 4.5V from battery
Sample serial number	SZ3220715-32239E-RF-S1(Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

**Objective**

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing by manufacturer.

Frequency list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	15	2434	29	2448
2	2421	16	2435	30	2449
3	2422	17	2436	31	2450
4	2423	18	2437	32	2451
5	2424	19	2438	33	2452
6	2425	20	2439	34	2453
7	2426	21	2440	35	2454
8	2427	22	2441	36	2455
9	2428	23	2442	37	2456
10	2429	24	2443	38	2457
11	2430	25	2444	39	2458
12	2431	26	2445	40	2459
13	2432	27	2446	41	2460
14	2433	28	2447	/	/

Channel 1, Channel 21 and Channel 41 were selected for testing.

### EUT Exercise Software

Tested in switching channel by button and power level is default\*.

### Equipment Modifications

No modifications were made to the unit tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

### Support Cable Descriptions

Cable Description	Length (m)	From/Port	To
/	/	/	/

### Block Diagram of Test Setup

For Radiated Emmission

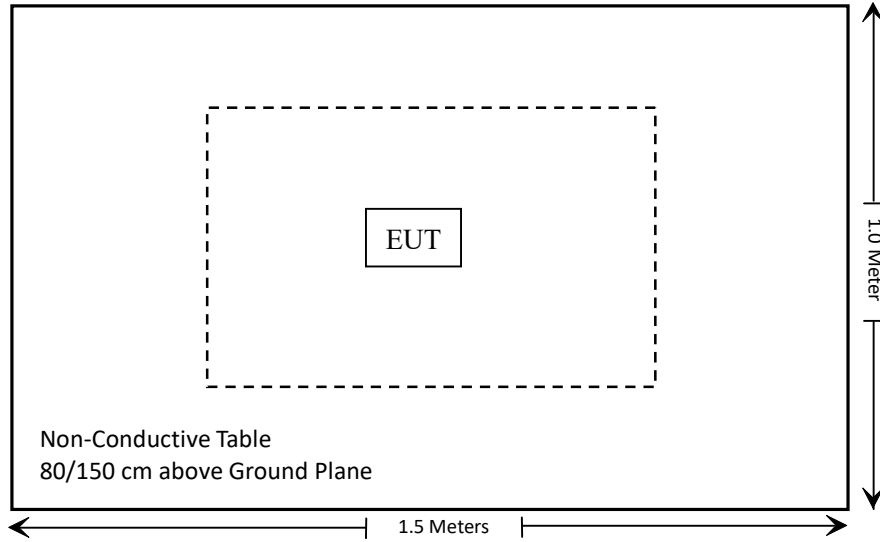

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249(d)	Radiated Emissions& Outside of Band Emission	Compliant
§15.215 (c)	20dB Bandwidth	Compliant

Note: The device is powered by battery only.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. Attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



## FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 – 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

### Test Result

For worst case:

Mode	Frequency	Maximum Tune-up Power		1-mW test Exemption
	(MHz)	(dBm)	(mW)	
2.4G SRD	2420-2460	-8.0	0.16	Yes

Note: The tune-up power was declared by the applicant.

**Result:** Compliant.

---

## **FCC§15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos for the construction of the antenna.

**Result:** Compliant.

## **FCC§15.205, §15.209 & §15.249(d) – RADIATED EMISSIONS**

### **Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

<b>Fundamental frequency</b>	<b>Field strength of fundamental (millivolts/meter)</b>	<b>Field strength of harmonics (microvolts/meter)</b>
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 ©, Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### **Test Equipment Setup**

The spectrum analyzer or receiver is set as:

Below 1000MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$


Above 1000MHz:

$$\begin{aligned} \text{Peak: RBW} &= 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto} \\ \text{Average: RBW} &= 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto} \end{aligned}$$


If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

### EUT Setup

#### Below 1GHz:

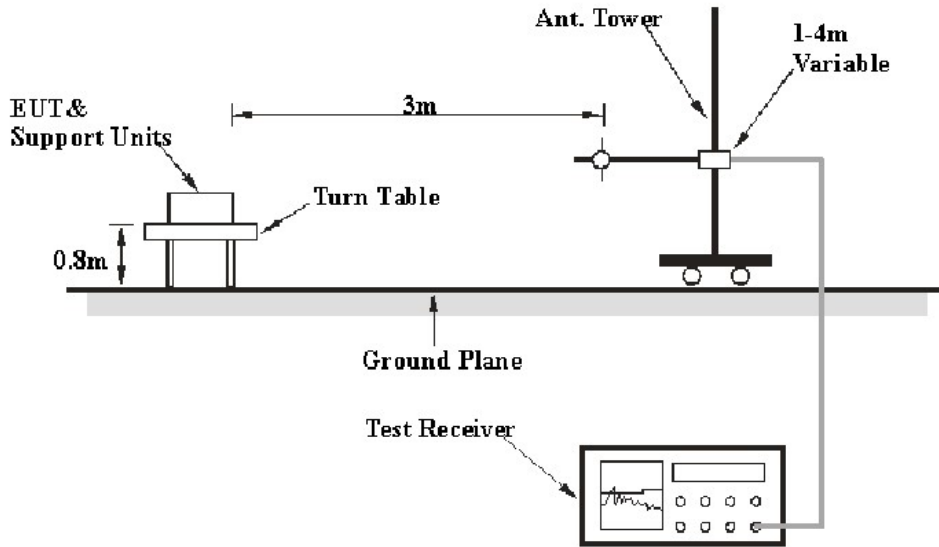

#### Above 1GHz:

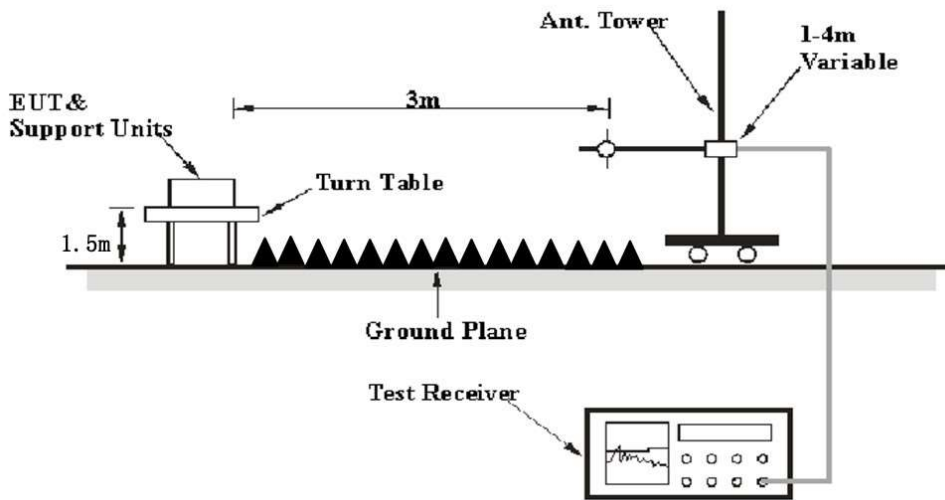

The radiated emission and out of band emission tests were performed in the 3meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

## Corrected Amplitude & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Results Summary

According to the EUT complied with the FCC Part 15.205, 15.209 & §15.249

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	60%
<b>ATM Pressure:</b>	108.0kPa


*The testing was performed by Level Li on 2022-08-09.*

*Test Mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)*

**30MHz-1GHz: (Worst case)**

**Middle Channel**


**Horizontal**

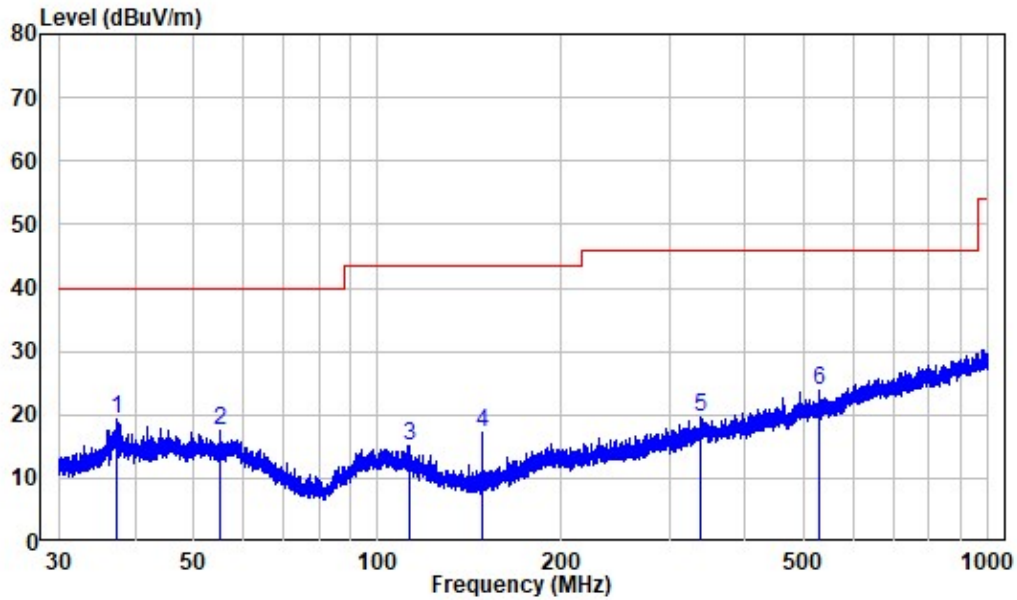

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZ3220715-32239E-RF  
 Test Mode: Transmitting

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	37.367	-10.94	30.36	19.42	40.00	-20.58 Peak
2	55.076	-10.28	27.93	17.65	40.00	-22.35 Peak
3	112.377	-12.31	27.49	15.18	43.50	-28.32 Peak
4	148.376	-15.36	32.67	17.31	43.50	-26.19 Peak
5	336.772	-7.55	27.13	19.58	46.00	-26.42 Peak
6	527.783	-4.47	28.24	23.77	46.00	-22.23 Peak

**Vertical**

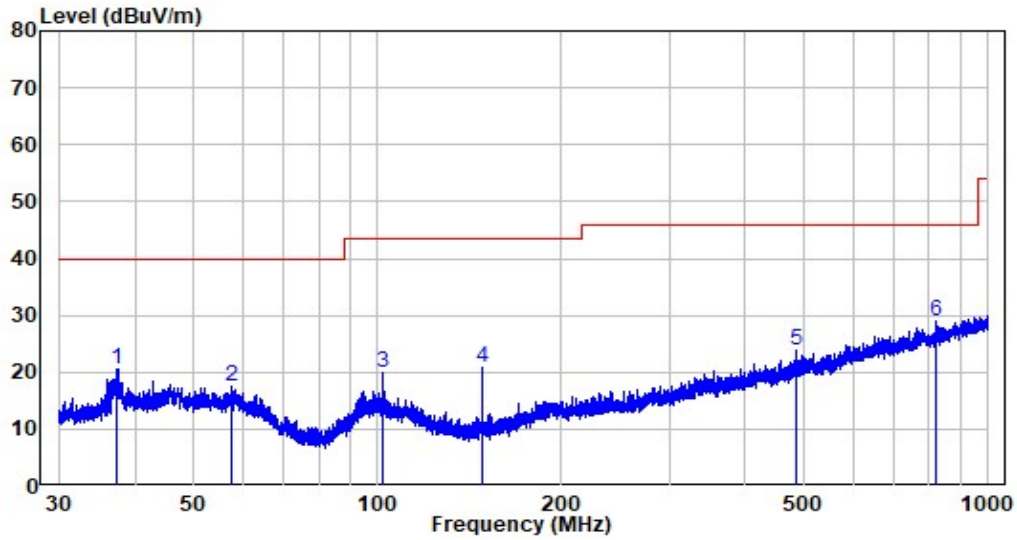

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZ3220715-32239E-RF  
 Test Mode: Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.367	-10.94	31.61	20.67	40.00	-19.33	Peak
2	57.443	-9.99	27.38	17.39	40.00	-22.61	Peak
3	101.912	-11.58	31.39	19.81	43.50	-23.69	Peak
4	148.311	-15.36	36.09	20.73	43.50	-22.77	Peak
5	486.035	-4.84	28.55	23.71	46.00	-22.29	Peak
6	822.071	0.03	28.86	28.89	46.00	-17.11	Peak

## Above 1 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	54.5	PK	118	2.0	H	-7.23	47.27	74	-26.73
2310	53.97	PK	276	1.9	V	-7.23	46.74	74	-27.26
2390	55.89	PK	73	1.4	H	-7.21	48.68	74	-25.32
2390	54.63	PK	74	2.1	V	-7.21	47.42	74	-26.58
2400	54.32	PK	118	2.0	H	-7.23	47.09	74	-26.91
2400	54.72	PK	276	1.9	V	-7.23	47.49	74	-26.51
2420	93.6	PK	320	1.1	H	-7.23	86.37	114	-27.63
2420	86.31	PK	22	1.0	V	-7.23	79.08	114	-34.92
4840	45.55	PK	118	2.0	H	-3.52	42.03	74	-31.97
4840	44.82	PK	320	1.1	V	-3.52	41.3	74	-32.7
Middle Channel									
2440	94.21	PK	209	1.9	H	-7.24	86.97	114	-27.03
2440	86.55	PK	305	1.2	V	-7.24	79.31	114	-34.69
4880	45.07	PK	209	1.9	H	-3.38	41.69	74	-32.31
4880	45.43	PK	305	1.2	V	-3.38	42.05	74	-31.95
High Channel									
2483.5	55.08	PK	108	1.8	H	-7.2	47.88	74	-26.12
2483.5	55.15	PK	310	2.1	V	-7.2	47.95	74	-26.05
2500	56.33	PK	108	1.8	H	-7.18	49.15	74	-24.85
2500	54.75	PK	310	2.1	V	-7.18	47.57	74	-26.43
2460	93.82	PK	17	2.1	H	-7.21	86.61	114	-27.39
2460	88.32	PK	306	1.1	V	-7.21	81.11	114	-32.89
4920	44.73	PK	17	2.1	H	-3.01	41.72	74	-32.28
4920	44.63	PK	287	1.1	V	-3.01	41.62	74	-32.38

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level (Corrected Amplitude) – Limit

The other spurious emission which is in the noise floor level was not recorded.


For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.




**Pre-scan plots:**

**1-18GHz: Middle Channel**

**Horizontal**

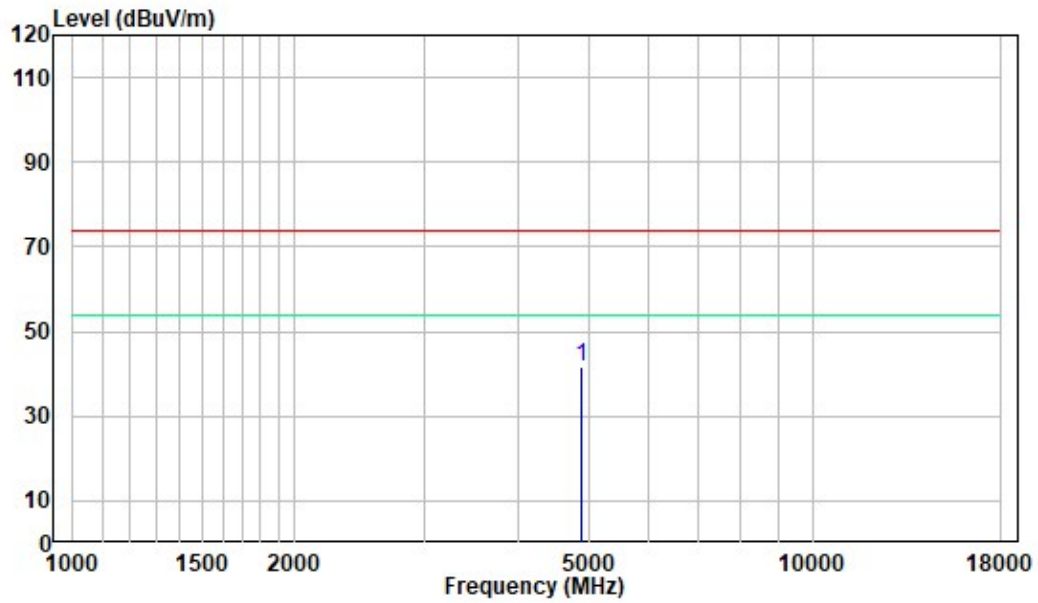


**Vertical**

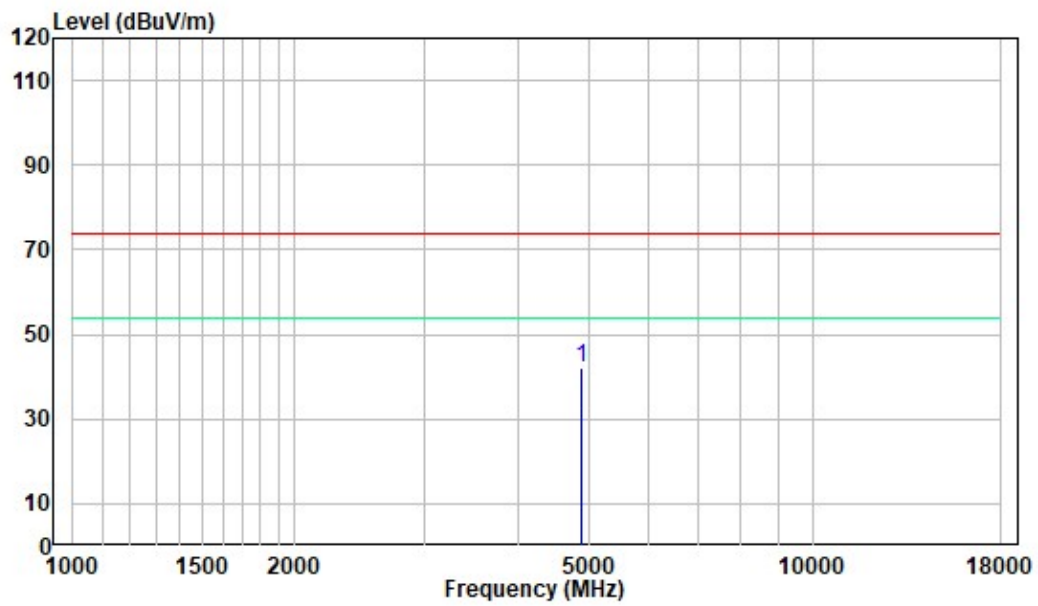


**18-25GHz: Middle Channel**

**Horizontal**

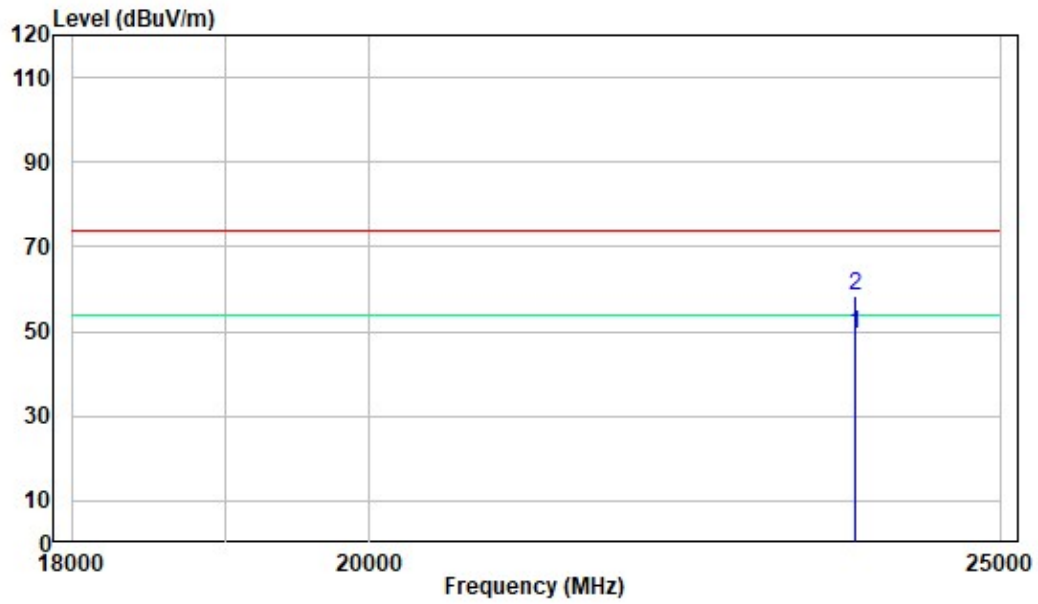

**Vertical**

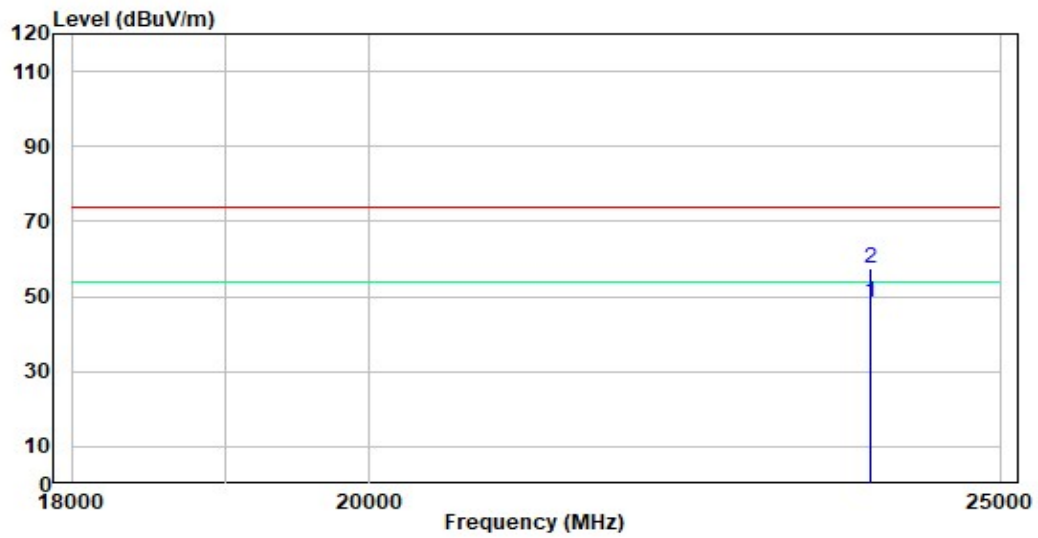

## FCC§15.215(c) - 20dB EMISSION BANDWIDTH

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Glenn. Jiang on 2022-08-08.*

*Test Mode: Transmitting*

*Please refer to the following table and plots.*


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2420	2.385
Middle	2440	2.397
High	2460	2.478

### Low Channel

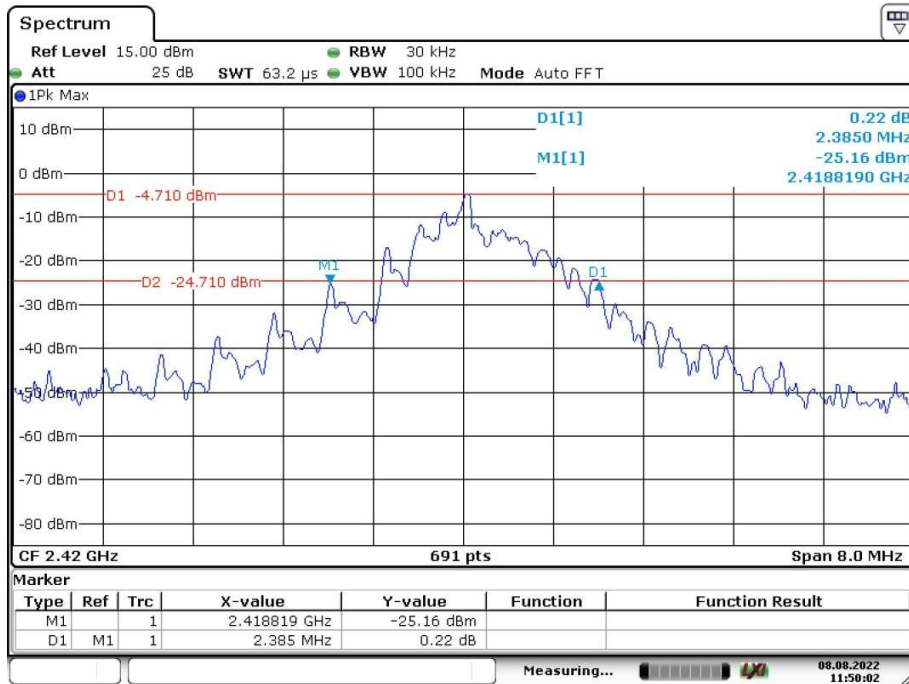


Date: 8.AUG.2022 11:50:02

### Middle Channel

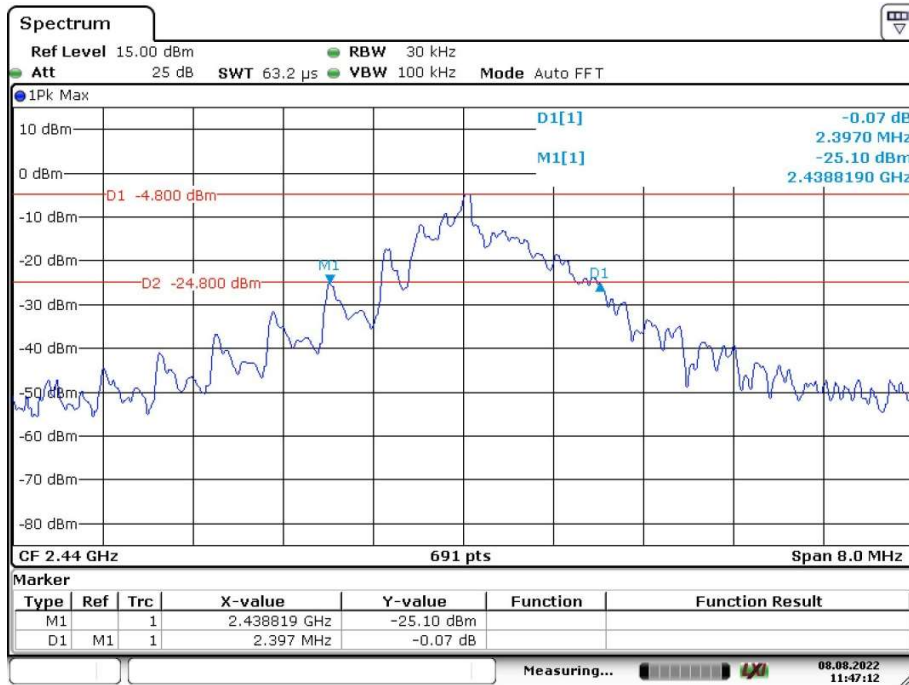

Date: 8.AUG.2022 11:47:13

### High Channel

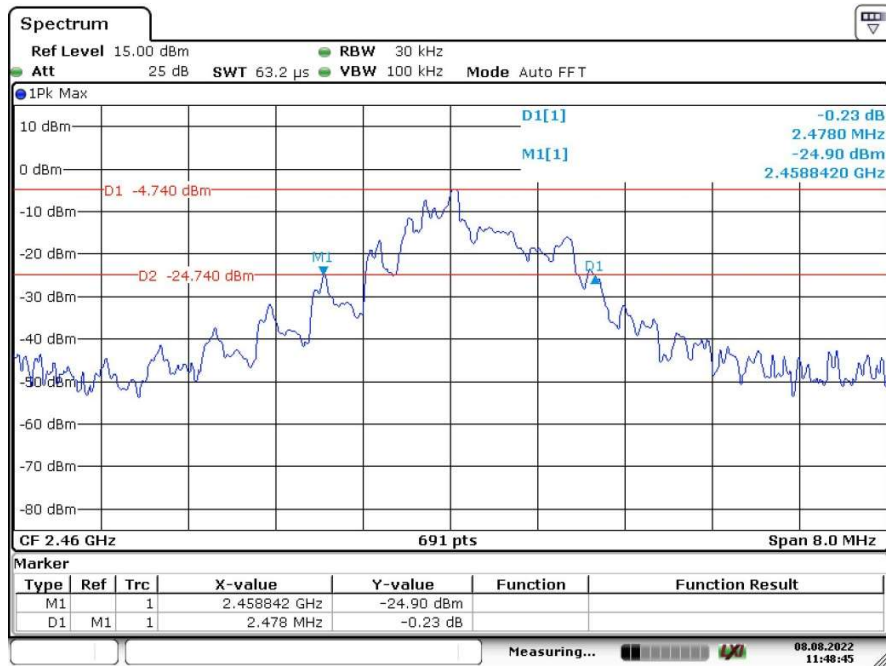

Date: 8.AUG.2022 11:48:46

\*\*\*\*\* END OF REPORT \*\*\*\*\*