



# **FCC TEST REPORT**

**FCC ID: 2ADMFHC-05**

On Behalf of

**Shenzhen KEYES DIY Robot Co.,Ltd**

**Bluetooth Transmission Module for Arduino with Bottom hc-05**

**Master and Slave**

**Model No.: Bluetooth**

Prepared for : Shenzhen KEYES DIY Robot Co.,Ltd  
Address : Room9A Jingxing Building, Changyong Road,Long Hua Xin Qu  
District, Shenzhen, China.

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A1912206-C06-R01  
Date of Receipt : December 23, 2019  
Date of Test : December 23, 2019-January 16, 2020  
Date of Report : January 16, 2020  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results .....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators .....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions .....	8
2.7. Test Facility .....	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List .....	10
<b>3. Maximum Peak Output power .....</b>	<b>11</b>
3.1. Limit .....	11
3.2. Test Procedure .....	11
3.3. Test Setup.....	11
3.4. Test Result .....	11
<b>4. Bandwidth.....</b>	<b>12</b>
4.1. Limit .....	12
4.2. Test Procedure .....	12
4.3. Test Result .....	12
<b>5. Carrier Frequency Separation.....</b>	<b>16</b>
5.1. Limit .....	16
5.2. Test Procedure .....	16
5.3. Test Result .....	16
<b>6. Number Of Hopping Channel.....</b>	<b>17</b>
6.1. Limit .....	17
6.2. Test Procedure .....	17
6.3. Test Result .....	17
<b>7. Dwell Time.....</b>	<b>18</b>
7.1. Test limit .....	18
7.2. Test Procedure .....	18
7.3. Test Result .....	18
<b>8. Radiated emissions.....</b>	<b>22</b>
8.1. Limit .....	22
8.2. Block Diagram of Test setup .....	23
8.3. Test Procedure .....	24
8.4. Test Result .....	24
<b>9. Band Edge Compliance .....</b>	<b>27</b>

---

9.1. Block Diagram of Test Setup.....	27
9.2. Limit .....	27
9.3. Test Procedure .....	27
9.4. Test Result .....	27
<b>10. Power Line Conducted Emissions .....</b>	<b>34</b>
10.1. Block Diagram of Test Setup.....	34
10.2. Limit .....	34
10.3. Test Procedure .....	34
10.4. Test Result .....	34
<b>11. Antenna Requirements .....</b>	<b>36</b>
11.1. Limit .....	36
11.2. Result .....	36
<b>12. Test setup photo .....</b>	<b>37</b>
12.1. Photos of Radiated emission.....	37
12.2. Photos of Conducted Emission test .....	38
<b>13. Photos of EUT .....</b>	<b>39</b>

### TEST REPORT DECLARATION

Applicant : Shenzhen KEYES DIY Robot Co.,Ltd  
 Address : Room9A Jingxing Building, Changyong Road,Long Hua Xin Qu District, Shenzhen, China.  
 Manufacturer : Shenzhen KEYES DIY Robot Co.,Ltd  
 Address : Room9A Jingxing Building, Changyong Road,Long Hua Xin Qu District, Shenzhen, China.  
 EUT Description : Bluetooth Transmission Module for Arduino with Bottom hc-05 Master and Slave  
 (A) Model No. : Bluetooth  
 (B) Trademark : Inland; Keystudio

Measurement Standard Used:



**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Ella Liang Project Engineer	 .....
Approved by (name + signature).....:	Simple Guan Project Manager	 .....
Date of issue.....	January 16, 2020	

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	January 16, 2020	Initial released Issue	Simple Guan

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	<ol style="list-style-type: none"> <li>1. P is an abbreviation for Pass.</li> <li>2. F is an abbreviation for Fail.</li> <li>3. N/A is an abbreviation for Not Applicable.</li> </ol>	

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description	: Bluetooth Transmission Module for Arduino with Bottom hc-05 Master and Slave
Trademark	: Inland; Keyestudio
Model Number	: Bluetooth
DIFF.	: N/A
Test Voltage	: DC 3.6-6V input

#### BT

Radio Technology	: Bluetooth V2.0
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Modulation type	: GFSK
Antenna Type	: PCB antenna, Maximum Gain is 0dBi
Software version	: V3.2
Hardware version	: V2.1


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1.	Notebook	ACER	ZQT	N/A	DOC

## 2.4. Block Diagram of connection between EUT and simulators

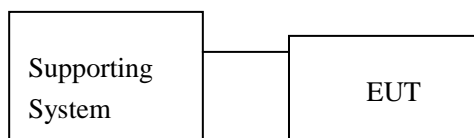

## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa



## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293961

July 15, 2019 Certificated by IC  
 Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	1 Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2019.09.06	1 Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1 Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2019.09.06	1 Year
Receiver	R&S	ESCI	101165	2019.09.05	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2 Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2018.09.26	2 Year
Cable	Resenberger	N/A	No.1	2019.09.05	1 Year
Cable	Resenberger	N/A	No.2	2019.09.05	1 Year
Cable	Resenberger	N/A	No.3	2019.09.05	1 Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1 Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2019.09.05	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.09.20	1 Year
Horn Antenna	A-INFOMW	LB-180100-KF	J211020657	2019.09.20	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.05	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2019.9.10	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.10	1 Year

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1.Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the average power detection.

#### 3.3.Test Setup

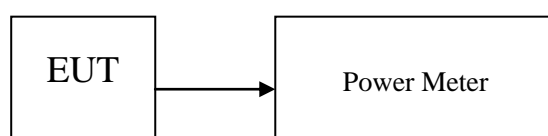

#### 3.4.Test Result

Mode	Freq (MHz)	Average Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	-6.314	30	Pass
	2441	<b>-6.146</b>	30	Pass
	2480	-6.907	30	Pass
Conclusion: PASS				

## 4. BANDWIDTH

### 4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### 4.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


### 4.3.Test Result

Condition	Mode	Frequency (MHz)	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	0.9217	1.024	/	Pass
NVNT	1-DH1	2441	0.9041	1.021	/	Pass
NVNT	1-DH1	2480	0.9547	1.0196	/	Pass


OBW NVNT 1-DH1 2402MHz

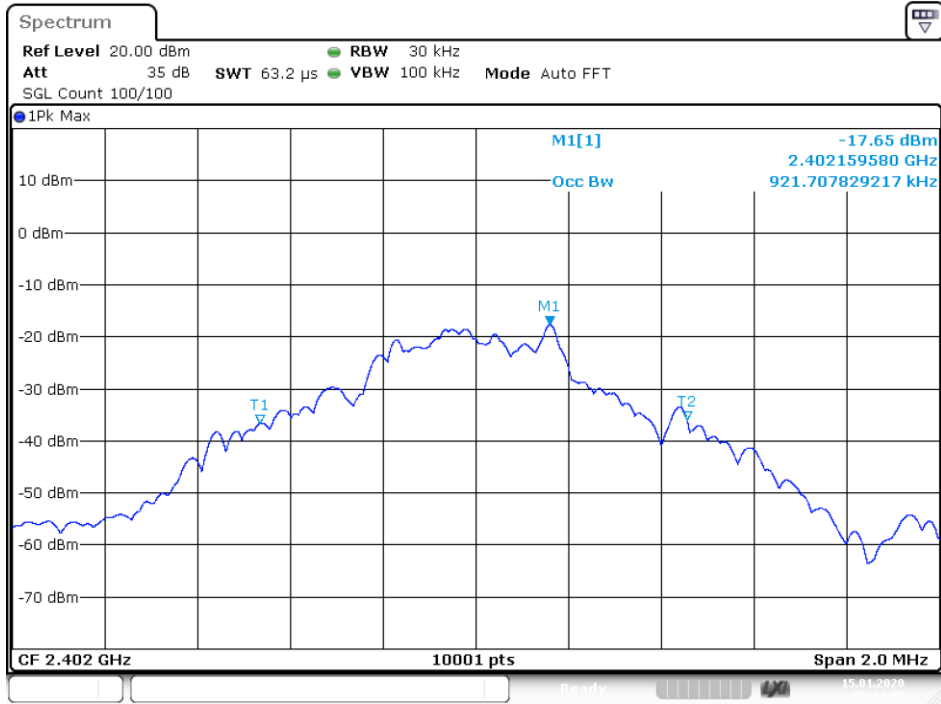


-20 dB BW NVNT 1-DH1 2402MHz

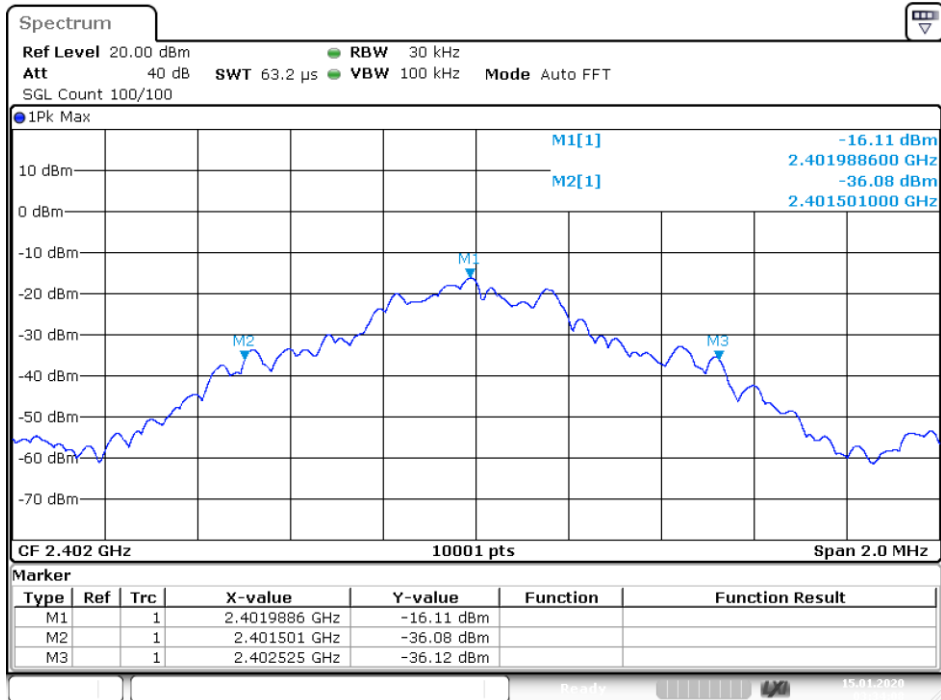


OBW NVNT 1-DH1 2441MHz

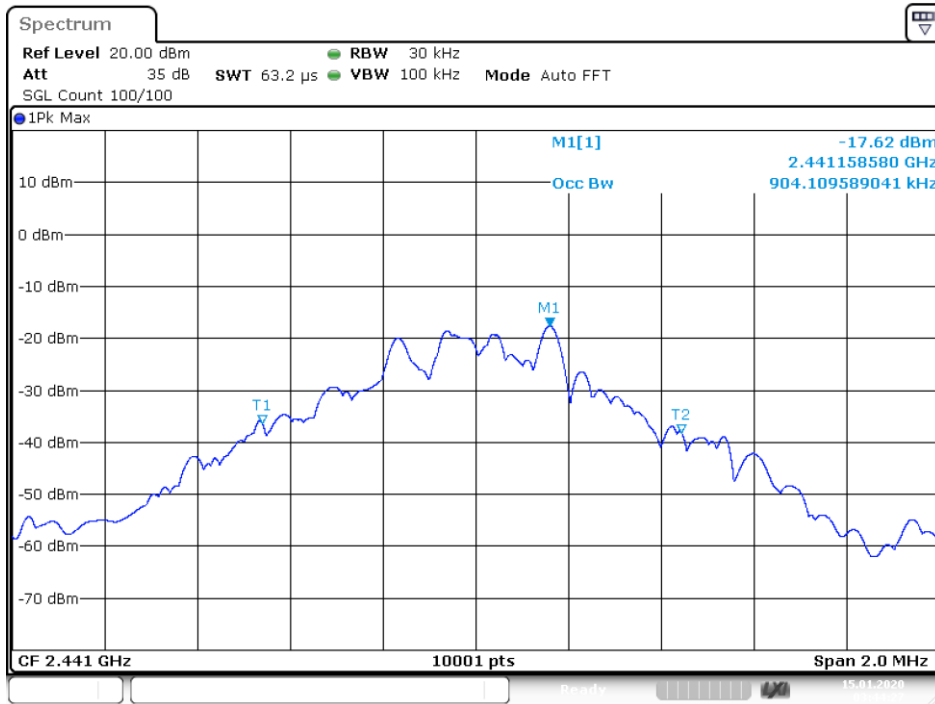

-20 dB BW NVNT 1-DH1 2441MHz

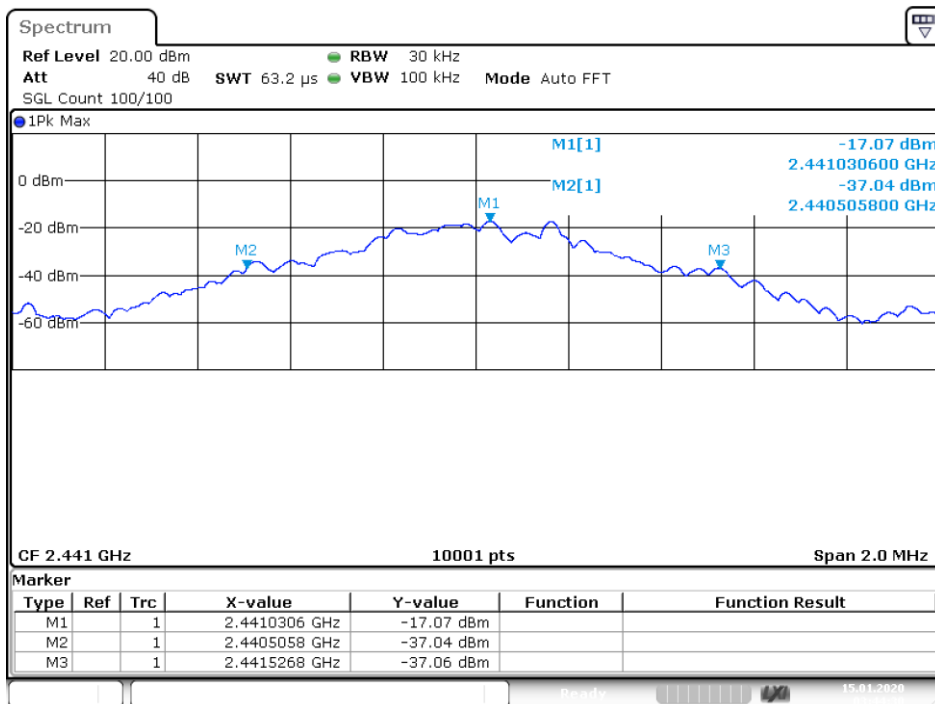


OBW NVNT 1-DH1 2480MHz

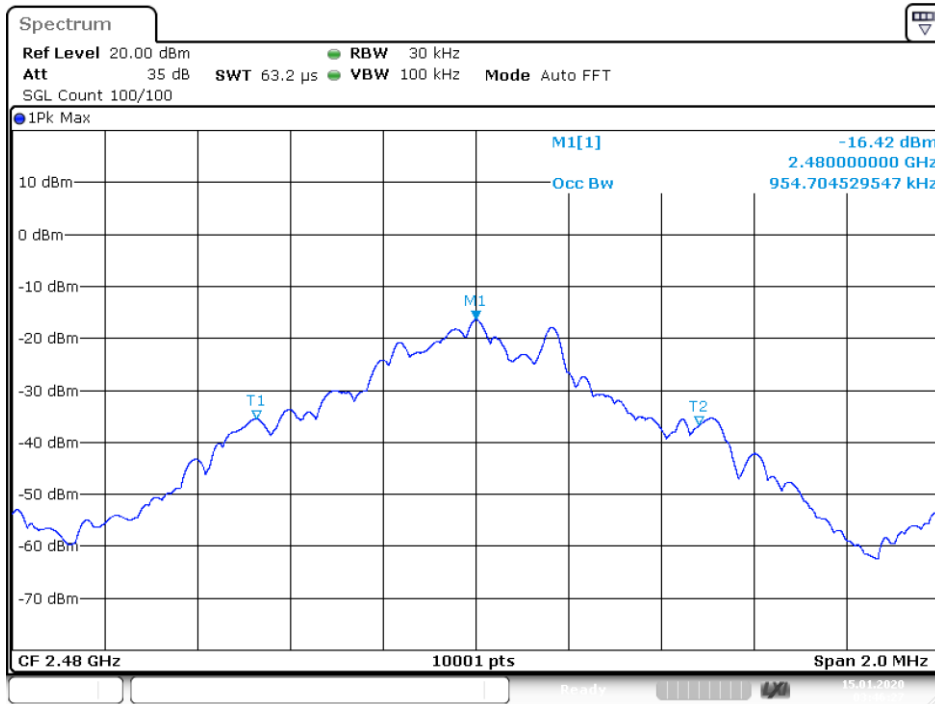

Date: 15.JAN.2020 03:46:27

-20 dB BW NVNT 1-DH1 2480MHz

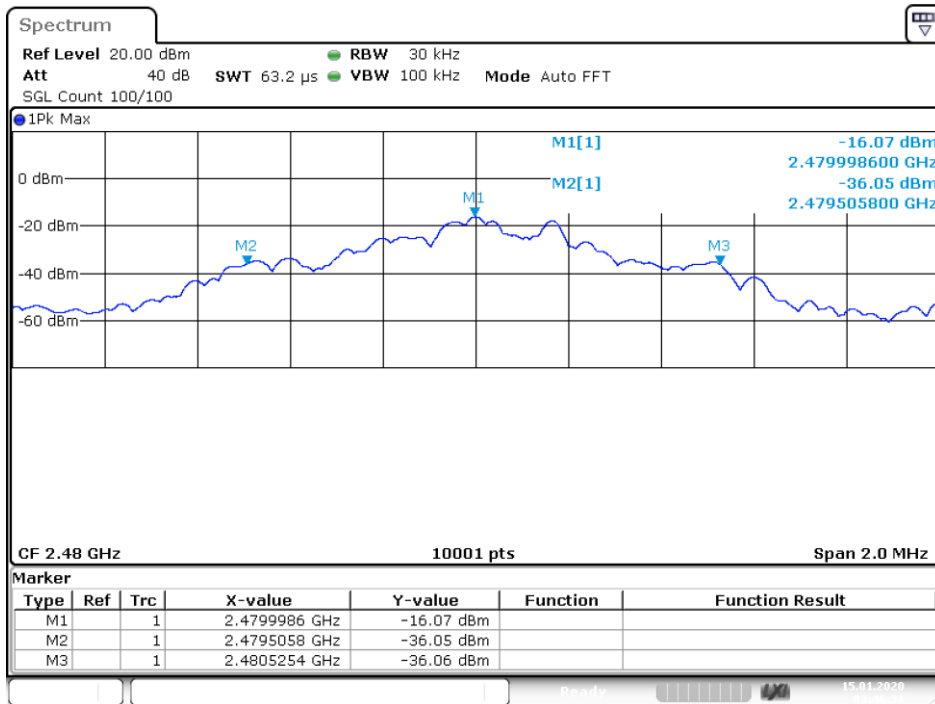

Date: 15.JAN.2020 03:46:31

## 5. CARRIER FREQUENCY SEPARATION

### 5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.

### 5.3.Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2441.146	2441.992	0.846	0.683	Pass

CFS NVNT 1-DH1 2441MHz

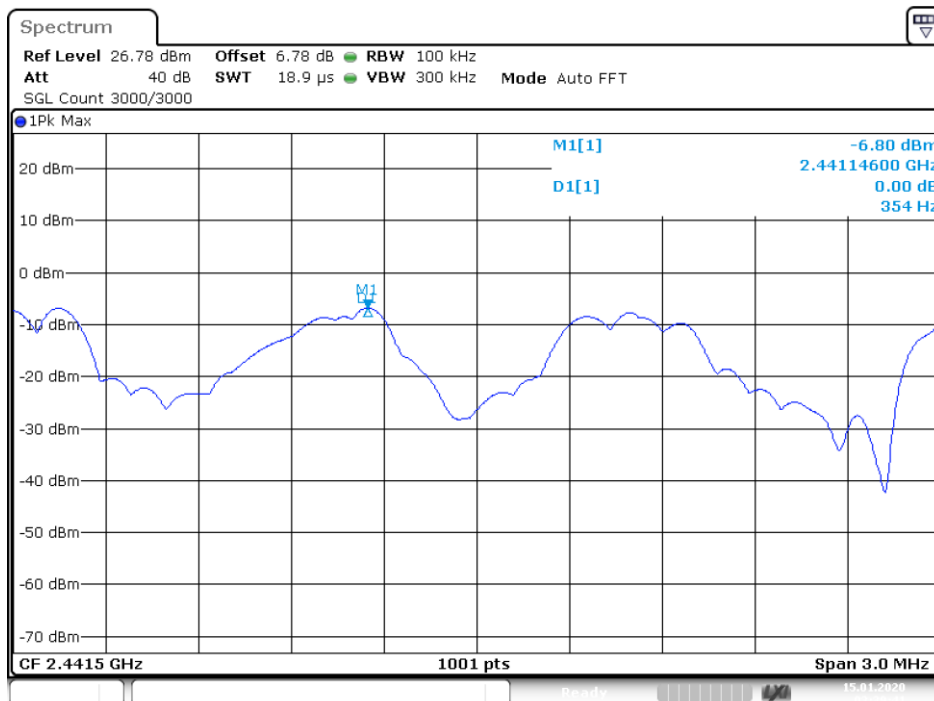

Date: 15.JAN.2020 03:39:40



## 6. NUMBER OF HOPPING CHANNEL

### 6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

### 6.3.Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz

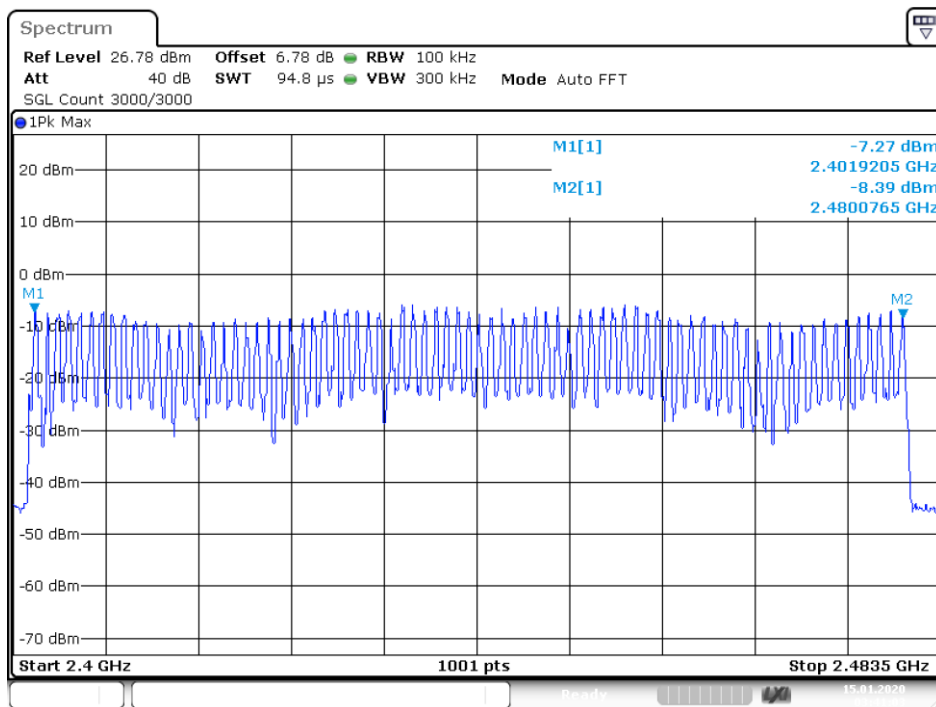

Date: 15.JAN.2020 03:41:03

## 7. DWELL TIME

### 7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequencies measured were complete.

### 7.3. Test Result

PASS.

Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	0.166	53.12	400	Pass
NVNT	1-DH1	2441	0.166	53.12	400	Pass
NVNT	1-DH1	2480	0.166	53.12	400	Pass
NVNT	1-DH3	2441	0.175	28.00	400	Pass
NVNT	1-DH5	2441	0.174	18.56	400	Pass


Note: 1 A period time = 0.4 (s) \* 79 = 31.6(s)

2 DH1 time slot = Pulse Duration \* (1600/(2\*79)) \* A period time/1000

DH3 time slot = Pulse Duration \* (1600/(4\*79)) \* A period time/1000


DH5 time slot = Pulse Duration \* (1600/(6\*79)) \* A period time/1000

Dwell NVNT 1-DH1 2402MHz

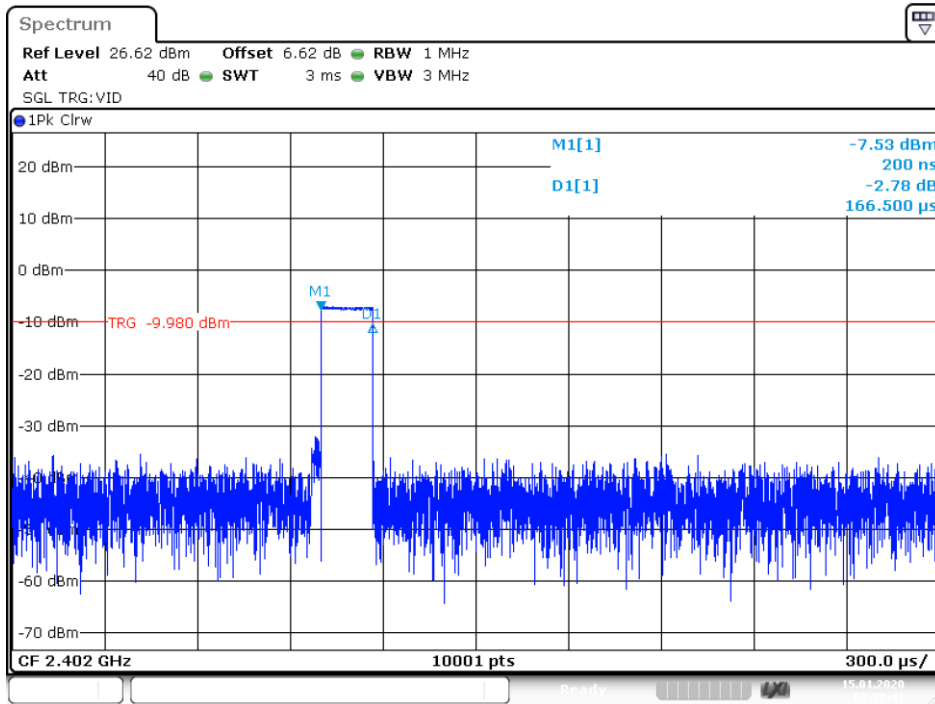


Date: 15.JAN.2020 03:38:41

Dwell NVNT 1-DH1 2441MHz

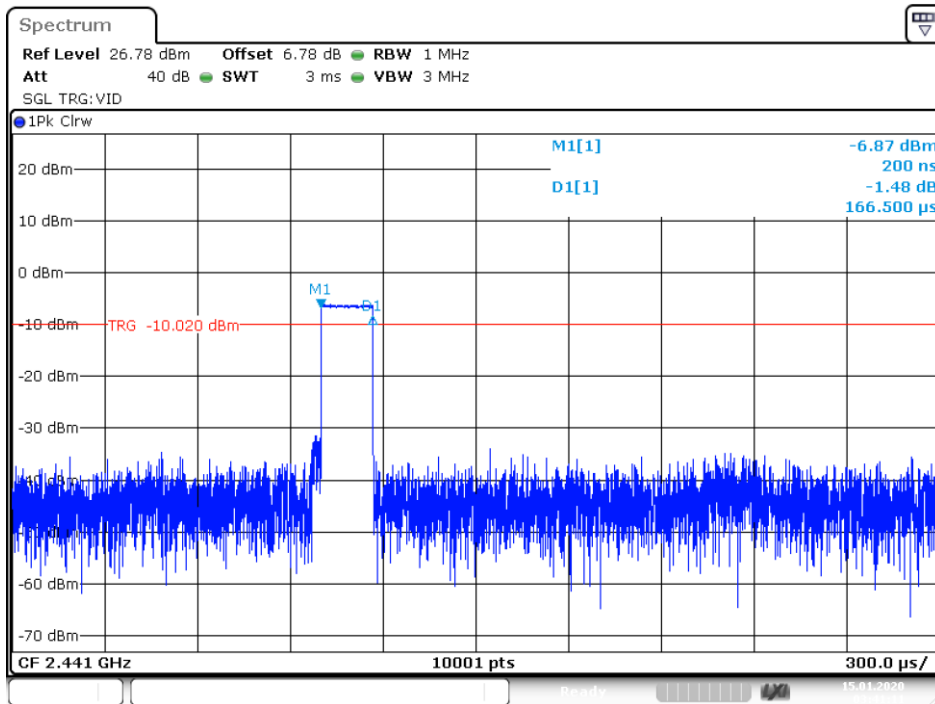


Date: 15.JAN.2020 03:41:11

Dwell NVNT 1-DH1 2480MHz

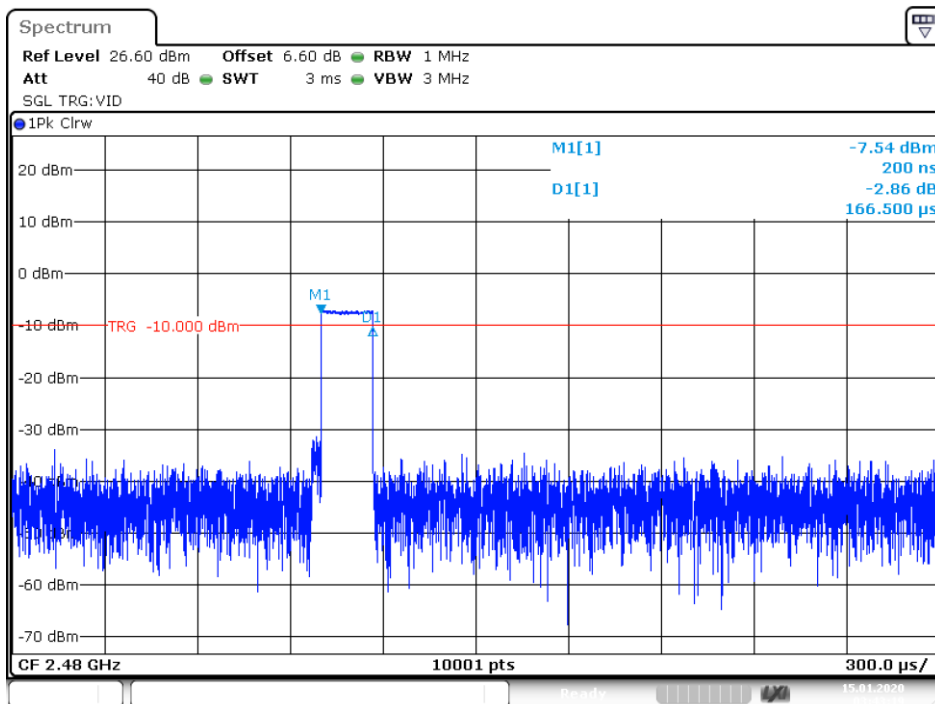


Date: 15.JAN.2020 03:43:19

### Dwell NVNT 1-DH3 2441MHz

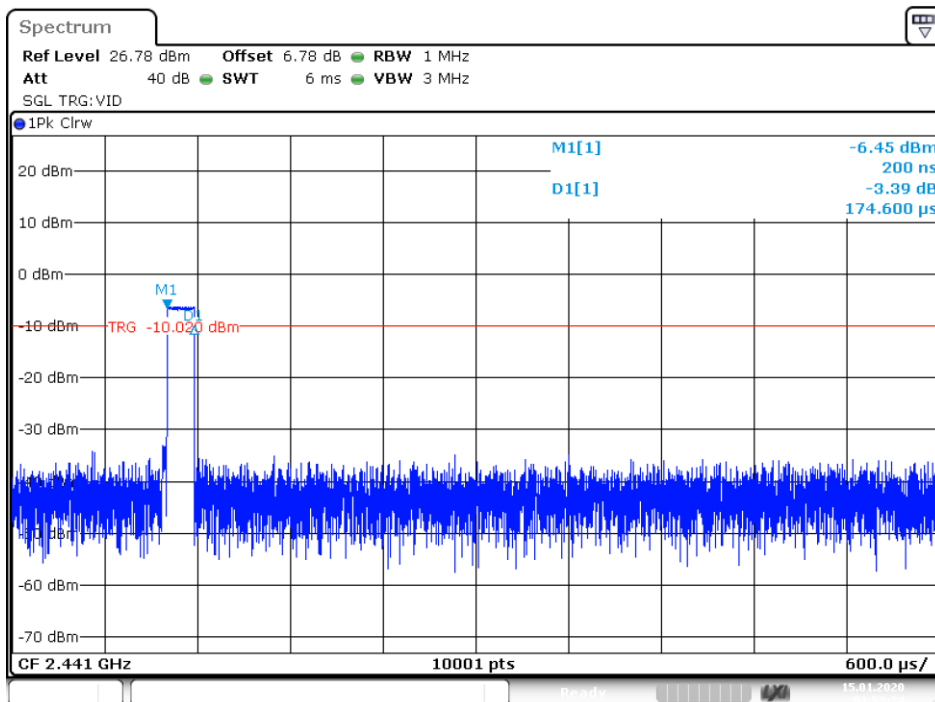

Date: 15.JAN.2020 03:53:24

### Dwell NVNT 1-DH5 2441MHz

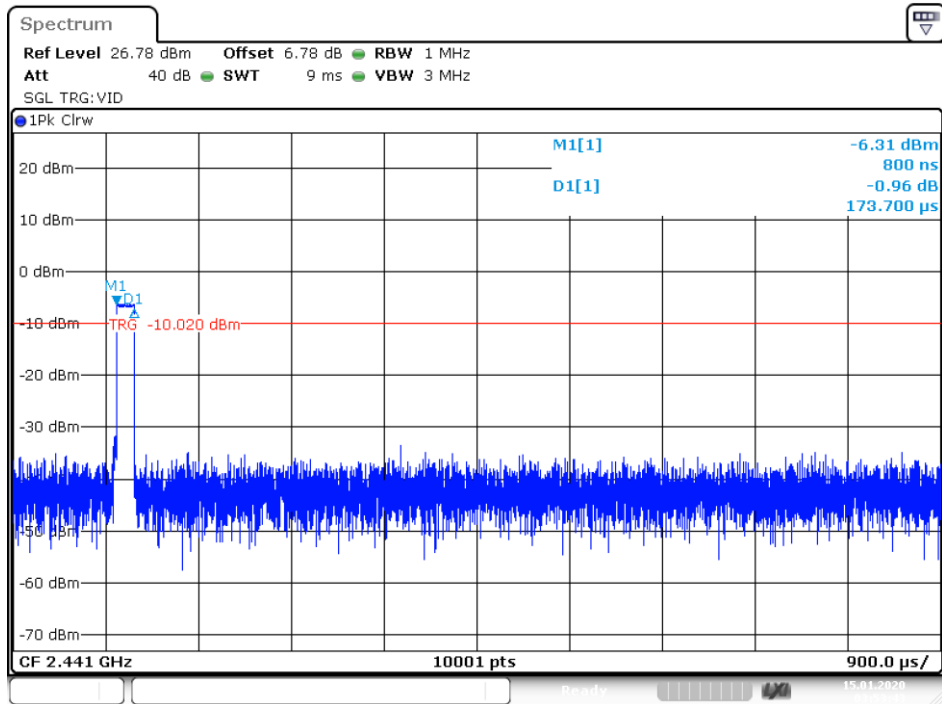

Date: 15.JAN.2020 03:53:43

## 8. RADIATED EMISSIONS

### 8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

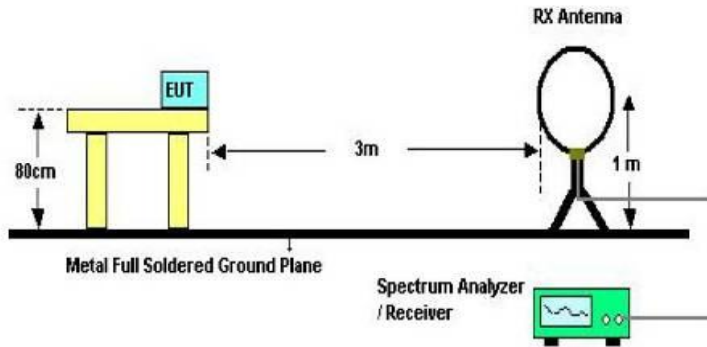

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

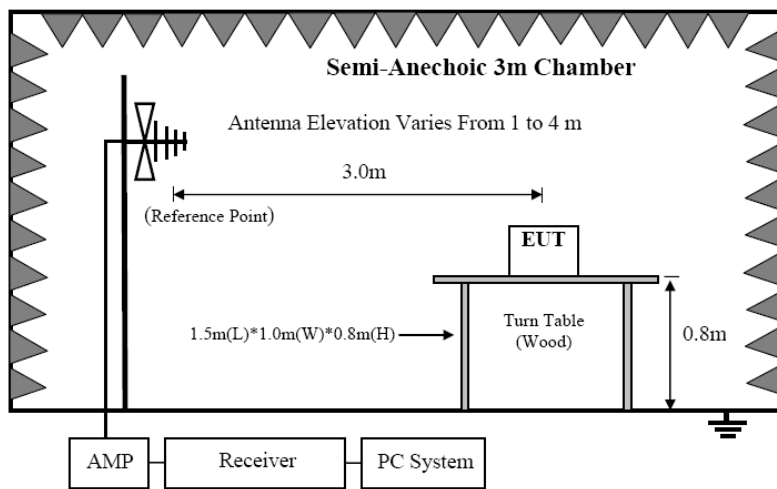

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

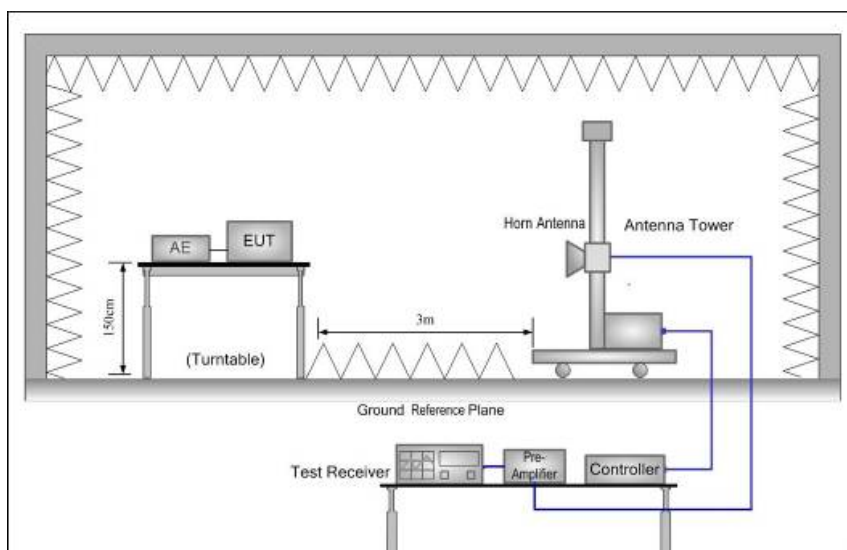

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

### 8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..  
Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




From 30MHz to 1000MHz: Conclusion: PASS

<b>EUT Description</b>	Bluetooth Transmission Module for Arduino with Bottom hc-05 Master and Slave	<b>Model No.</b>	Bluetooth
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test date</b>	2020-01-10
<b>Test Voltage</b>	DC 3.6V	<b>Test mode</b>	GFSK (2441MHz)

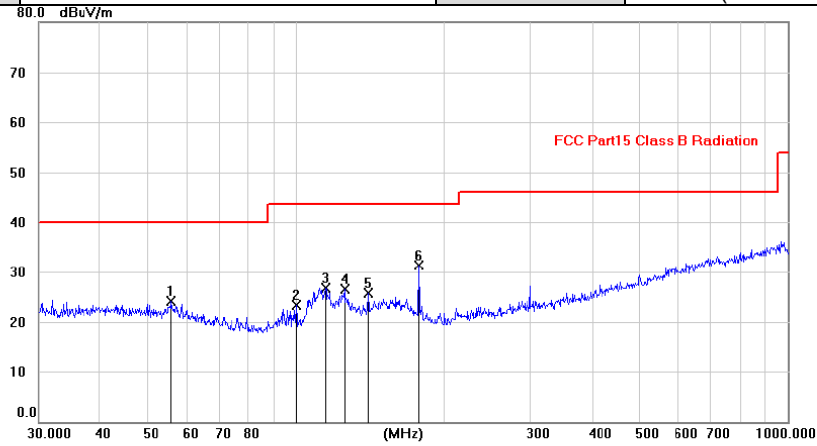

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		55.8634	10.50	13.57	24.07	40.00	-15.93	peak	
2		100.0179	12.40	10.85	23.25	43.50	-20.25	peak	
3		115.2801	14.18	12.47	26.65	43.50	-16.85	peak	
4		125.7981	13.21	13.36	26.57	43.50	-16.93	peak	
5		139.9488	11.43	14.31	25.74	43.50	-17.76	peak	
6	*	178.0078	18.26	12.96	31.22	43.50	-12.28	peak	

<b>Pol</b>	Horizontal
------------	------------

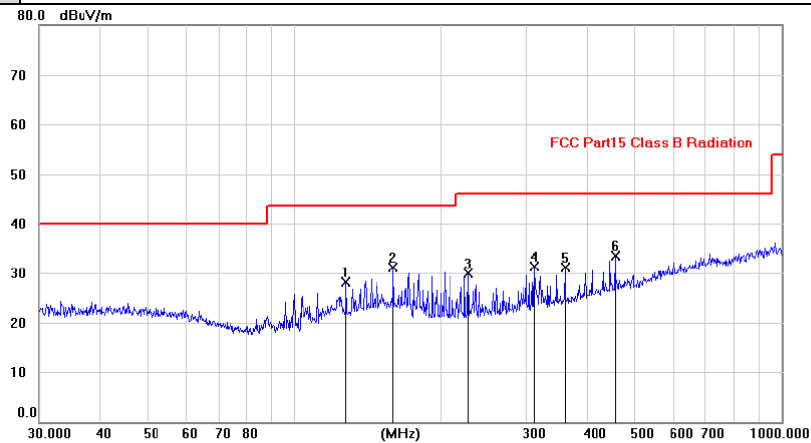

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		128.0231	14.58	13.48	28.06	43.50	-15.44	AVG	
2	*	160.0087	16.16	15.04	31.20	43.50	-12.30	peak	
3		228.0102	17.68	12.20	29.88	46.00	-16.12	peak	
4		311.9606	16.84	14.40	31.24	46.00	-14.76	peak	
5		360.0687	15.65	15.43	31.08	46.00	-14.92	peak	
6		456.0657	15.97	17.62	33.59	46.00	-12.41	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


Remark: All modes have been tested, and only worst data of GFSK (2441MHz) was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.92	V	33.95	10.18	34.26	57.79	74	16.21	PK
4804	36.62	V	33.95	10.18	34.26	46.49	54	7.51	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4824	45.28	H	33.95	10.18	34.26	55.15	74	18.85	PK
4824	37.47	H	33.95	10.18	34.26	47.34	54	6.66	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	43.93	V	33.93	10.2	34.29	53.77	74	20.23	PK
4882	36.58	V	33.93	10.2	34.29	46.42	54	7.58	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	45.30	H	33.93	10.2	34.29	55.14	74	18.86	PK
4882	33.97	H	33.93	10.2	34.29	43.81	54	10.19	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	45.93	V	33.98	10.22	34.25	55.88	74	18.12	PK
4960	36.33	V	33.98	10.22	34.25	46.28	54	7.72	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	41.87	H	33.98	10.22	34.25	51.82	74	22.18	PK
4960	31.87	H	33.98	10.22	34.25	41.82	54	12.18	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

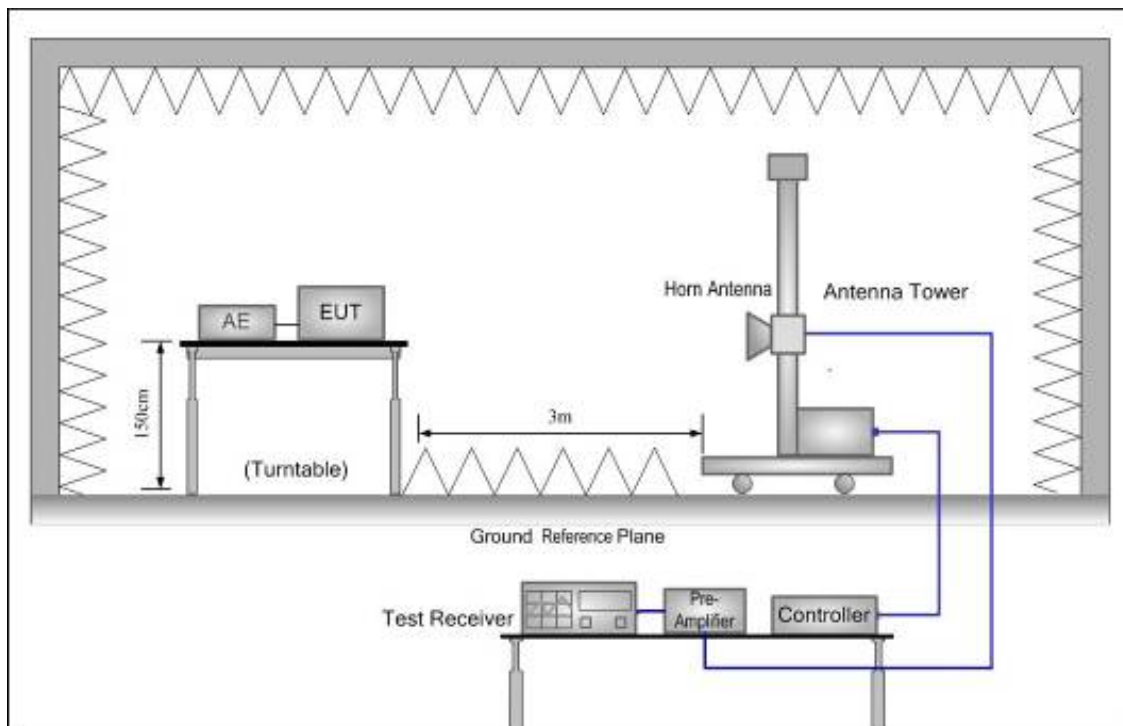

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 9.3. Test Procedure

All restriction band and non- restriction band have been tested, only worse case is reported.

### 9.4. Test Result

PASS. (See below detailed test data)


Radiated Method:

Hopping-off

Polarization: Vertical


Test Mode:

GFSK-Low

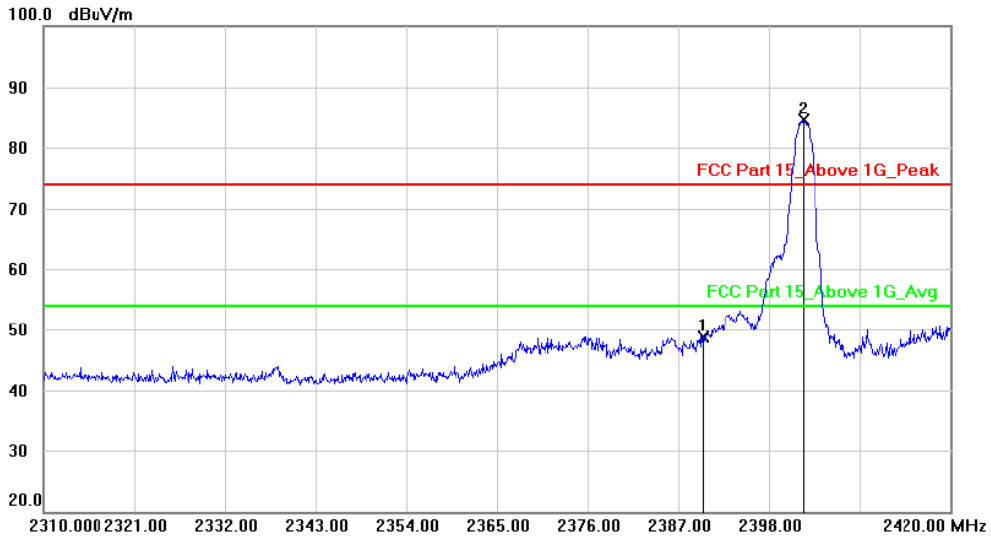

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		2390.000	52.01	-3.40	48.61	74.00	-25.39	peak		
2	*	2402.180	88.01	-3.41	84.60	74.00	10.60	peak		

Polarization: Horizontal

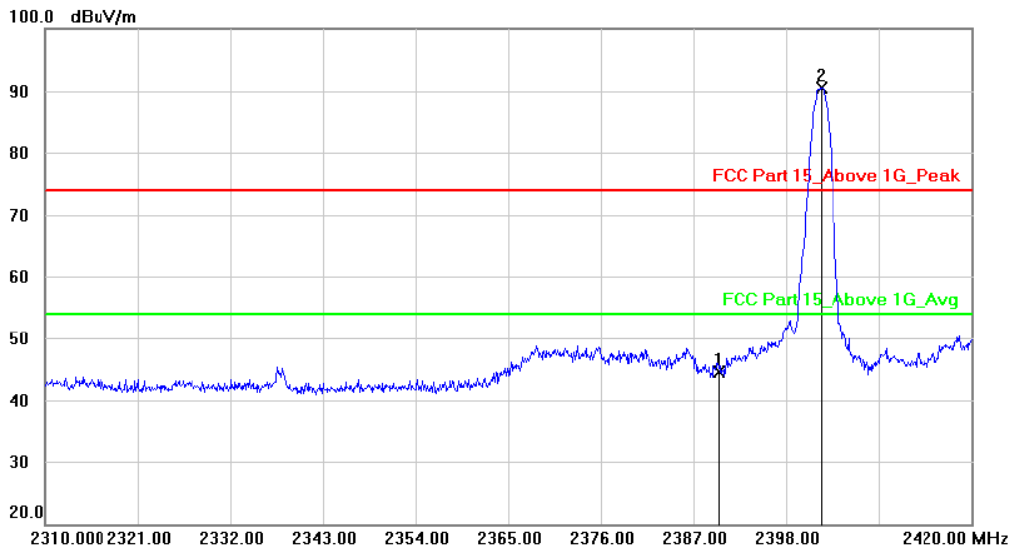


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		2390.000	47.95	-3.40	44.55	74.00	-29.45	peak		
2	*	2402.180	93.93	-3.41	90.52	74.00	16.52	peak		

Hopping-on


Polarization: Vertical

Test Mode: GFSK-Low

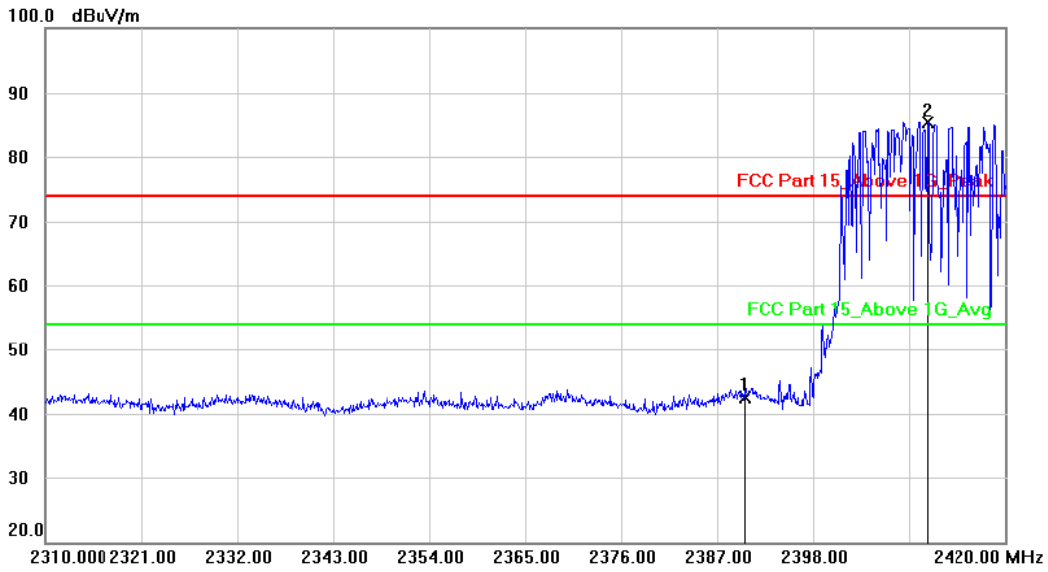

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	45.97	-3.40	42.57	74.00	-31.43	peak	
2	*	2411.090	88.74	-3.40	85.34	74.00	11.34	peak	

Polarization: Horizontal

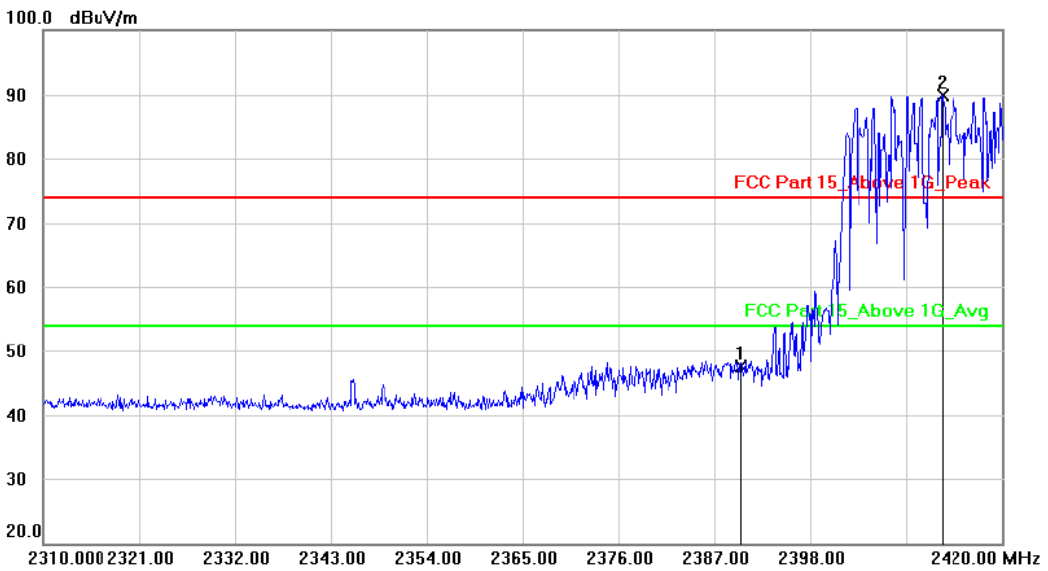


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	50.96	-3.40	47.56	74.00	-26.44	peak	
2	*	2413.180	93.32	-3.41	89.91	74.00	15.91	peak	

Hopping-off


Polarization: Vertical

Test Mode: GFSK-High

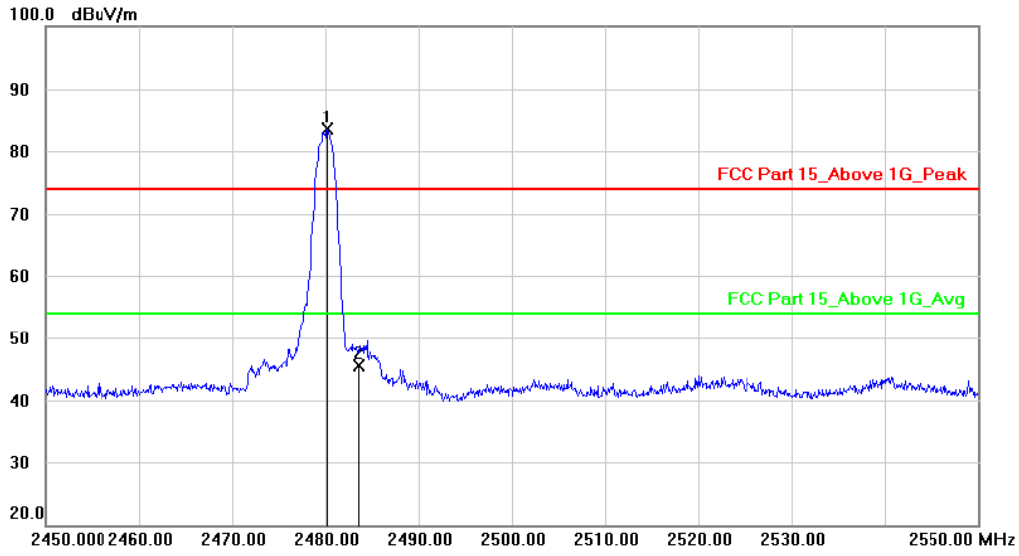

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.200	86.90	-3.38	83.52	74.00	9.52			peak
2		2483.500	48.86	-3.38	45.48	74.00	-28.52			peak

Polarization: Horizontal

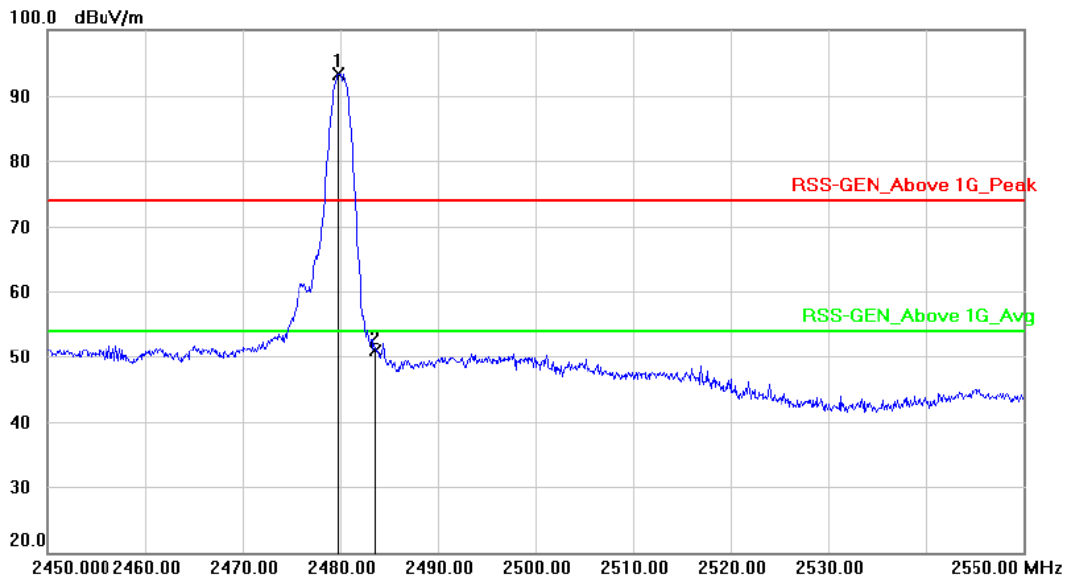


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.800	96.66	-3.38	93.28	74.00	19.28			peak
2		2483.500	54.32	-3.38	50.94	74.00	-23.06			peak

Hopping-on

Polarization: Vertical


Test Mode: GFSK-High

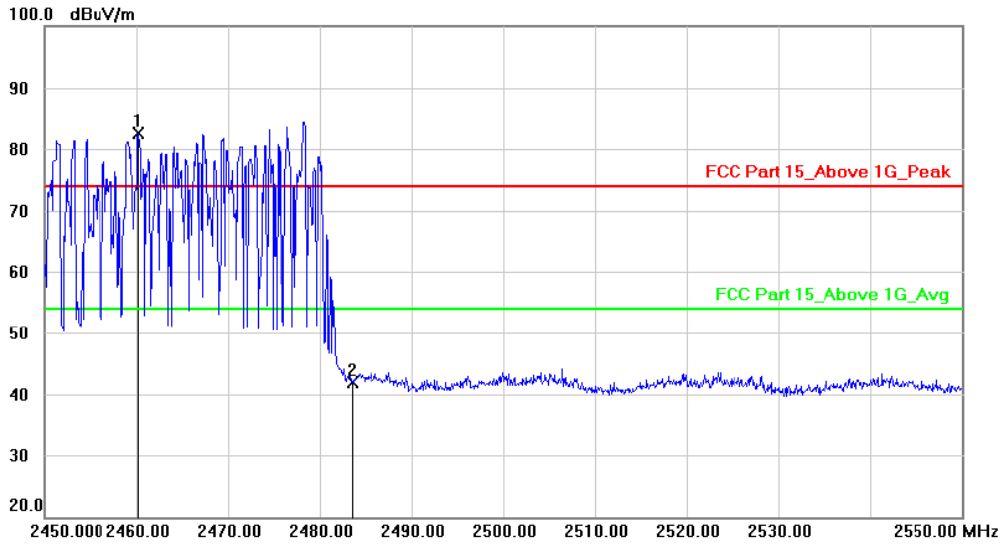

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	2460.200	85.89	-3.39	82.50	74.00	8.50	peak		
2		2483.500	45.26	-3.38	41.88	74.00	-32.12	peak		

Polarization: Horizontal

Test Mode: GFSK-High

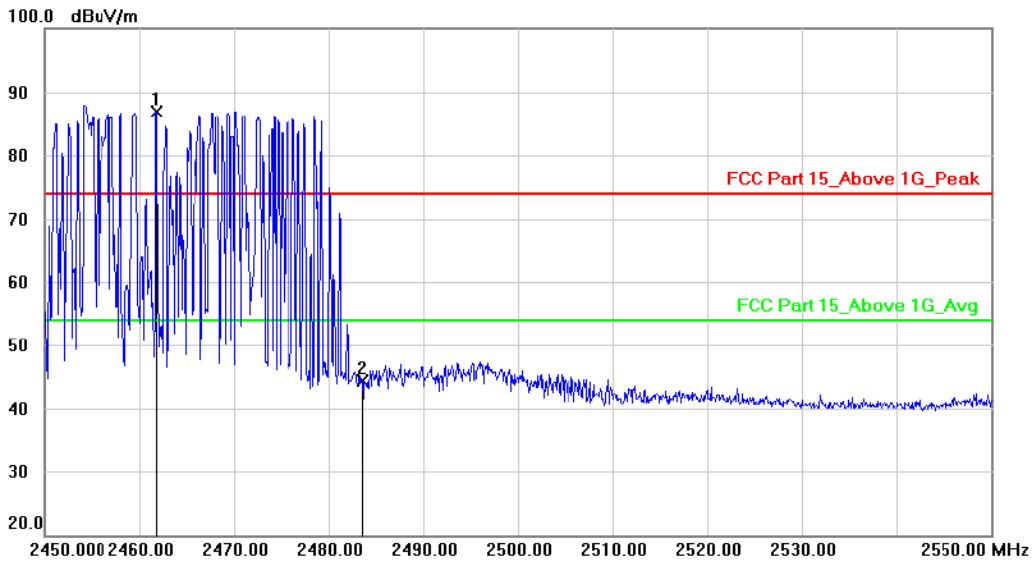


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	2461.800	90.29	-3.40	86.89	74.00	12.89	peak		
2		2483.500	47.67	-3.38	44.29	74.00	-29.71	peak		

hopping-on


Conducted Method

Band Edge NVNT 1-DH1 2402MHz Ant1 Hopping Emission

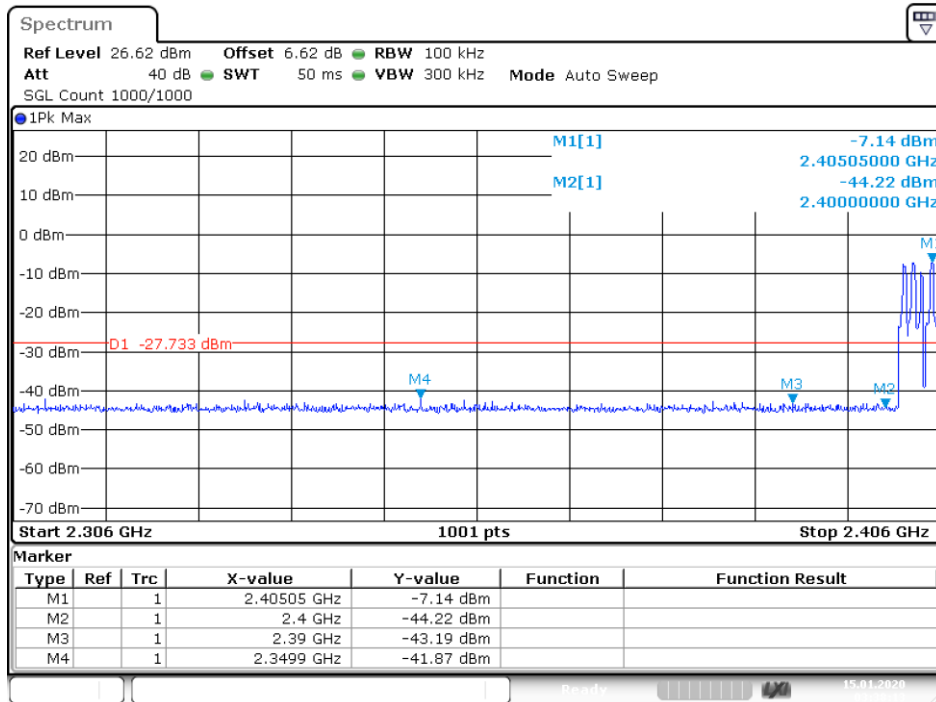

Date: 15.JAN.2020 03:38:13


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

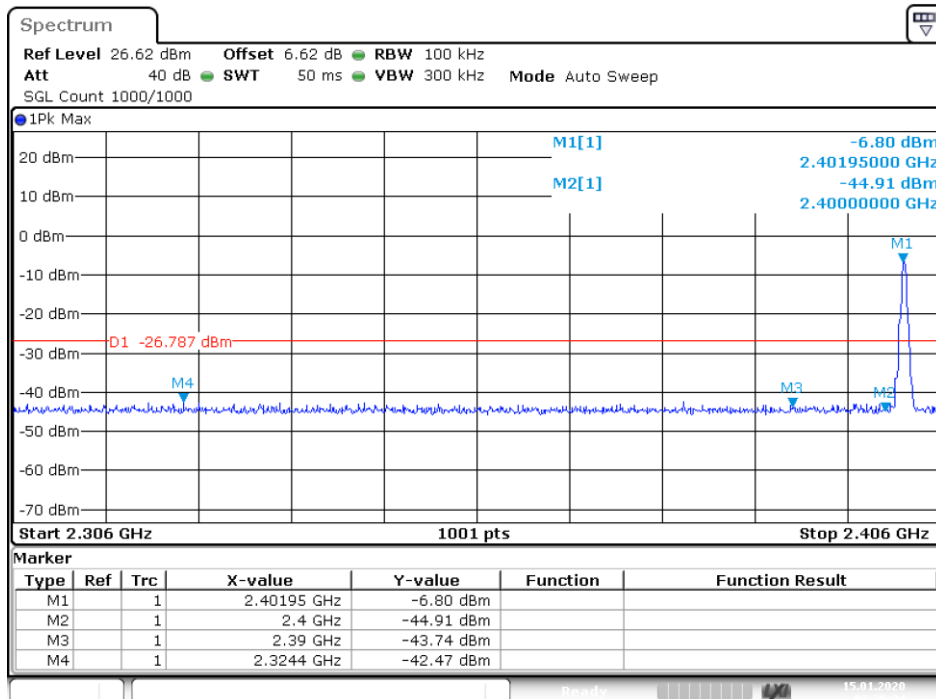

Date: 15.JAN.2020 03:35:34




Band Edge NVNT 1-DH1 2480MHz Ant1 Hopping Emission

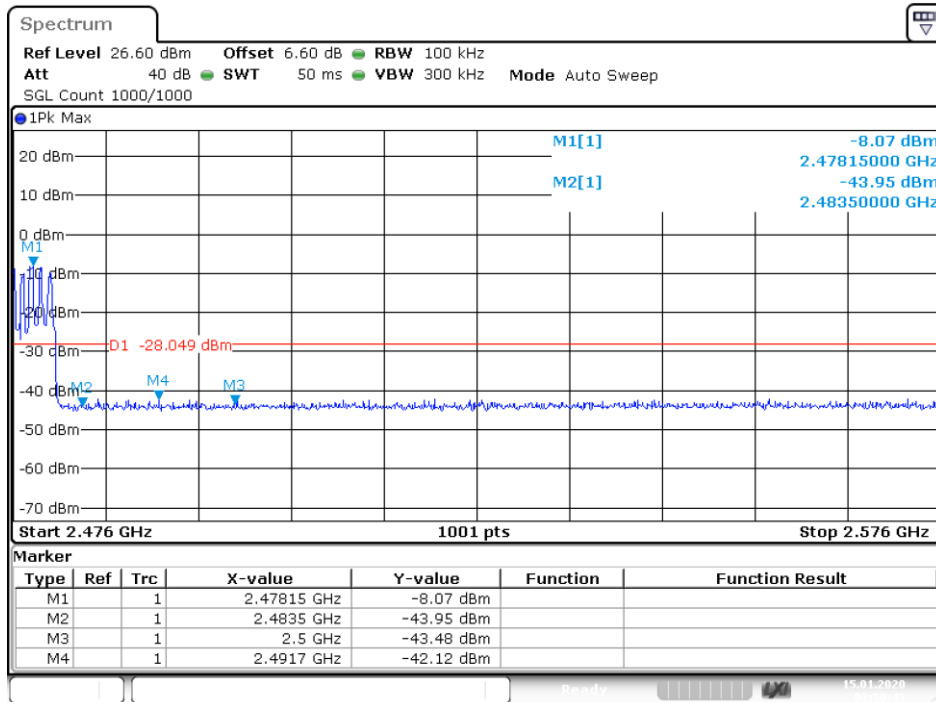

Date: 15.JAN.2020 03:50:45


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

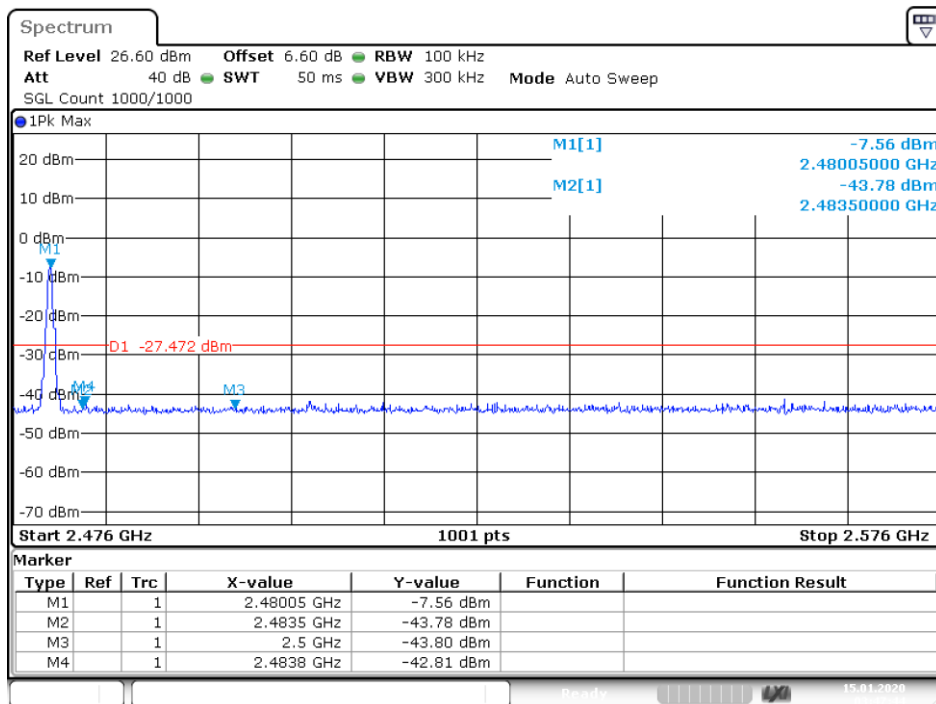

Date: 15.JAN.2020 03:47:44

## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

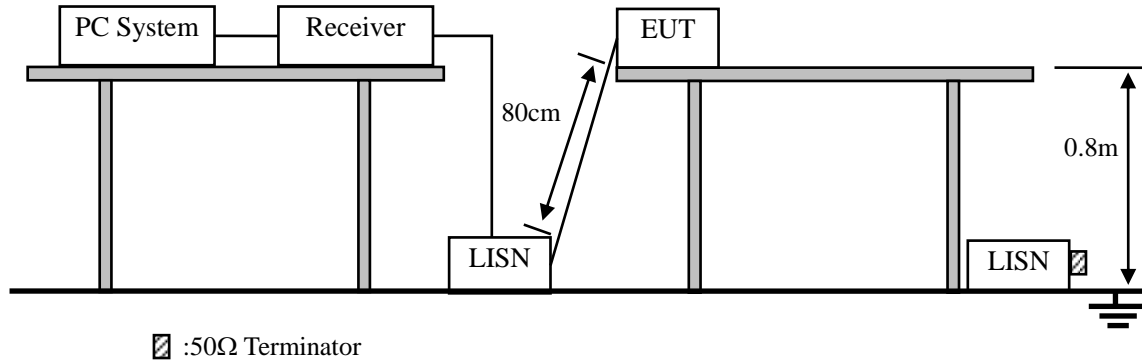

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

<b>EUT Description</b>	Bluetooth Transmission Module for Arduino with Bottom hc-05 Master and Slave	<b>Model No.</b>	Bluetooth
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test date</b>	2019/12/25
<b>Test Voltage</b>	AC 120V/ 60Hz	<b>Test mode</b>	GFSK (2441MHz)

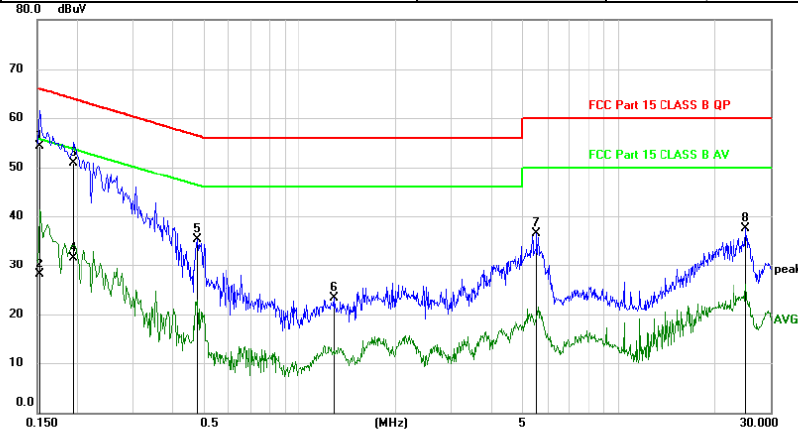

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1530	44.28	9.94	54.22	65.84	-11.62	QP	
2		0.1530	18.25	9.94	28.19	55.84	-27.65	AVG	
3		0.1949	40.99	9.92	50.91	63.83	-12.92	QP	
4		0.1949	21.54	9.92	31.46	53.83	-22.37	AVG	
5		0.4770	25.43	9.96	35.39	56.39	-21.00	peak	
6		1.2780	13.36	9.89	23.25	56.00	-32.75	peak	
7		5.5590	26.46	10.06	36.52	60.00	-23.48	peak	
8		25.1640	27.05	10.45	37.50	60.00	-22.50	peak	

<b>Pol</b>	Neutral
------------	---------

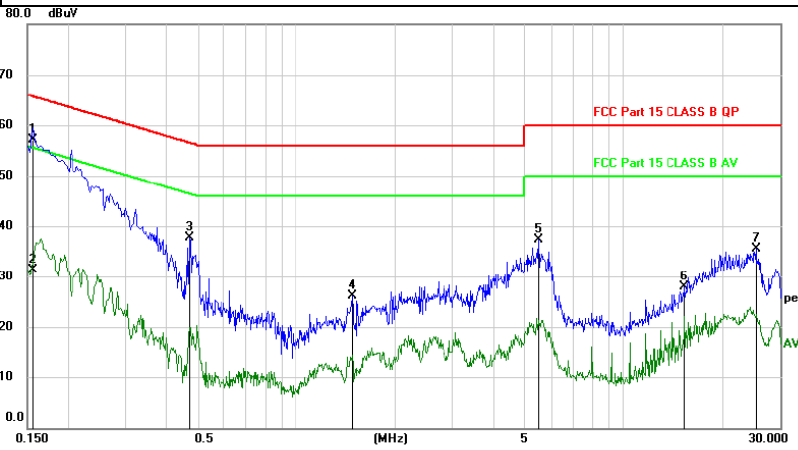

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1560	47.20	9.94	57.14	65.67	-8.53	QP	
2		0.1560	21.33	9.94	31.27	55.67	-24.40	AVG	
3		0.4710	27.70	9.95	37.65	56.50	-18.85	peak	
4		1.4730	16.28	9.90	26.18	56.00	-29.82	peak	
5		5.4780	27.23	10.06	37.29	60.00	-22.71	peak	
6		15.3120	17.59	10.34	27.93	60.00	-32.07	peak	
7		25.4130	25.13	10.46	35.59	60.00	-24.41	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK (2441MHz) was listed in this report.

## **11.ANTENNA REQUIREMENTS**

### **11.1.Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2.Result**

The EUT antenna is PCB antenna. It complies with the standard requirement.

## 12. TEST SETUP PHOTO



### 12.1. Photos of Radiated emission



## 12.2.Photos of Conducted Emission test



### 13.PHOTOS OF EUT

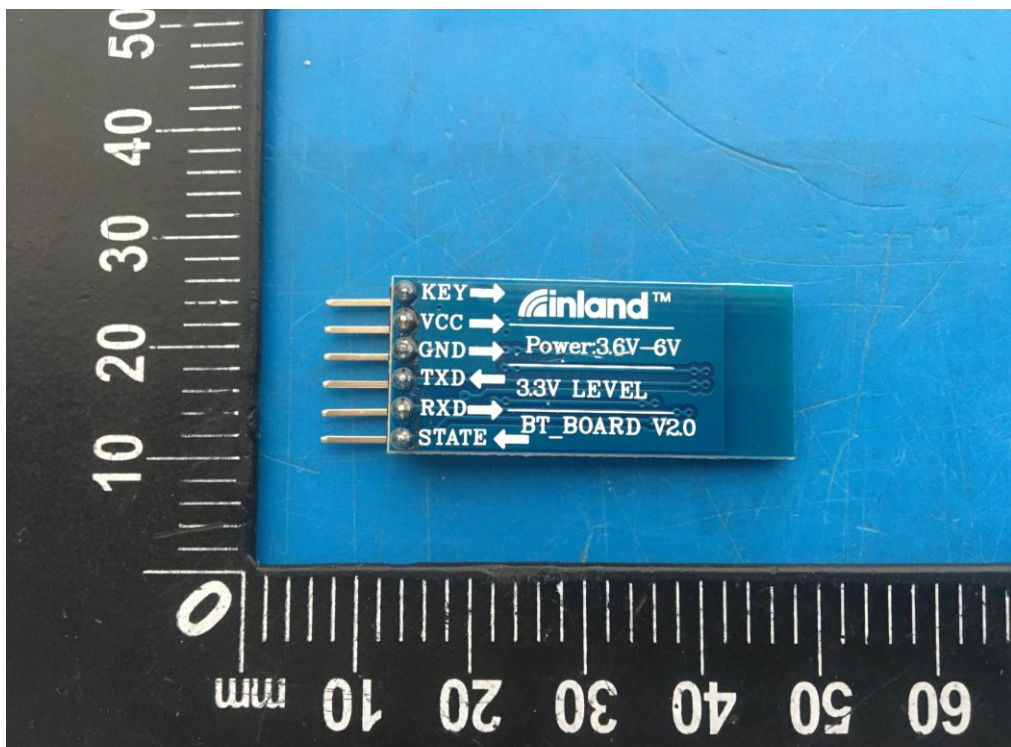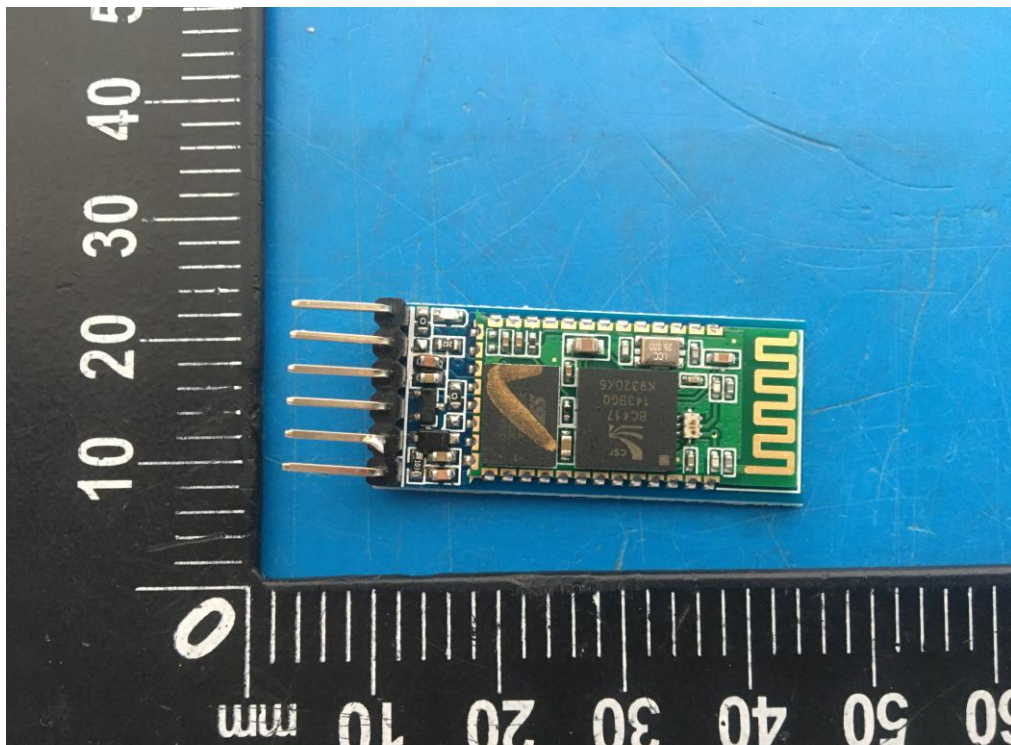

-----THE END OF REPORT-----