



Full

TEST REPORT

No. I17D00181-SRD01

For

Client : Hisense International Co., Ltd.

Production : Smartphone

Model Name : Hisense F8 MINI

FCC ID: 2AD0BF8MINI

Hardware Version: V1.00

Software Version: L1431.6.01.09.MX05

Issued date: 2017-07-07

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn



RF Test Report

Report No.: I17D00181-SRD01

Revision Version

Report Number	Revision	Date	Memo
I17D00181-SRD01	00	2017-07-07	Initial creation of test report

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION.....	5
1.2.	TESTING ENVIRONMENT.....	5
1.3.	PROJECT DATA	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION.....	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
4.	REFERENCE DOCUMENTS	9
4.1.	REFERENCE DOCUMENTS FOR TESTING.....	9
5.	SUMMARY OF TEST RESULTS.....	10
5.1.	NOTES.....	11
5.2.	STATEMENTS	11
6.	TEST RESULT.....	12
6.1.	PEAK OUTPUT POWER-CONDUCTED.....	12
6.2.	FREQUENCY BAND EDGES-CONDUCTED.....	17
6.3.	CONDUCTED EMISSION	24
6.4.	RADIATED EMISSION	34
6.5.	TIME OF OCCUPANCY (DWELL TIME)	52
6.6.	20DB BANDWIDTH	62



RF Test Report

Report No.: I17D00181-SRD01

6.7.	CARRIER FREQUENCY SEPARATION	68
6.8.	NUMBER OF HOPPING CHANNELS	70
6.9.	AC POWERLINE CONDUCTED EMISSION.....	74
7.	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	77
8.	TEST ENVIRONMENT	78
ANNEX A.	DEVIATIONS FROM PRESCRIBED TEST METHODS	79

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%


1.3. Project data

Project Leader:	Yu Anlu
Testing Start Date:	2017-06-19
Testing End Date:	2017-07-05


1.4. Signature



Yang Dejun
(Prepared this test report)



Ding Li
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Hisense International Co., Ltd.
Address: Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071,
China
Telephone: +86-532-55753242
Contact: Zhang Kelin

2.2. Manufacturer Information

Company Name: Hisense Communications Co., Ltd.
Address: 218 Qianwangang Road, Economic & Technological Development
Zone, Qingdao, Shandong Province, P.R. China
Telephone: +86-532-55755982
Contact: Zhang Ming

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Smartphone
Model name	Hisense F8 MINI
BT Frequency	2402MHz-2480MHz
BT Channel	Channel0-Channel78
BT type of modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Extreme Temperature	-10/+55°C
Nominal Voltage	3.8V
Extreme High Voltage	3.5V
Extreme Low Voltage	4.35V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

First Supply

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N14	865996030000114	V1.00	L1431.6.01.09.MX05	2017-06-16

Second Supply

EUTID*	SN or IMEI	HW Version	SW Version	Date of receipt
N31	865996030000924	V1.00	L1431.6.01.09.MX05	2017-06-16

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. Internal Identification of AE used during the test

Main supply

Part Name	Model Name	supplier	Remark
MAIN PCB	HYT7.820.1213	CHINABUILDER	
SUB PCB	HYT7.820.1215	CHINABUILDER	
MEMORY	KMQE10013M-B 318	SAMSUNG	
LCD	TXDY500DHDP	TXD	Black



RF Test Report

Report No.: I17D00181-SRD01

	AB-208		
BATTERY	LIW38238	WEIKE	
FINGERPRI NT	FS21019BY	Holitech	SUNWARE

Secondary Supply

Part Name	Model Name	supplier	Remark
MAIN PCB	HYT7.820.1213	REDBOARD	
SUB PCB	HYT7.820.1215	REDBOARD	
MEMORY	H9TQ17ABJTBC UR-KUM	Hynix	
LCD	HTT050H750	Holitech	Black
BATTERY	LIW38238	ZHONGSHAN TIANMAO BATTERY CO.,LTD	
FINGERPRI NT	FS21042BJ	Holitech	CHIPONE

Note: The secondly supply only test the worst cases.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	Jun,2016 Edition
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	/	P
Peak Power Spectral Density	15.247(d)	/	NA
20dB Occupied Bandwidth	15.247(a)	/	P
Band Edges Compliance	15.247(b)	/	P
Transmitter Spurious Emission-Conducted	15.247	/	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	/	P
AC Powerline Conducted Emission	15.107,15.207	/	P

Please refer to part 5 for detail.

The measurements are according to and ANSI C63.10.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	22°C
Voltage	Vnom	3.8V
Humidity	Hnom	32%
Air Pressure	Anom	1010hPa

Note:

- a. All the test data for each data were verified, but only the worst case was reported.
- b. The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH1 for GFSK, 2-DH1 for $\pi/4$ DQPSK, 3-DH1 for 8DPSK.
- c. The DC and low frequency voltages' measurement uncertainty is $\pm 2\%$.

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

5.2. Statements

The product name Hisense F8 MINI, supporting GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/HSPA+/WLAN/BT/BLE/GPS, manufactured by Hisense Communications Co., Ltd., is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Peak Output Power-Conducted

6.1.1 Measurement Limit

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

6.1.2 Test Condition:

Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	3MHz	10MHz	9MHz	Auto

6.1.3 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.5.

1. The output power of EUT was connected to the spectrum analyzer and CBT32 by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Measure the conducted output power and record the results it.

6.1.4 Measurement Results:

For GFSK

Channel	Ch0 2402 MHz	Ch39 2441 MHz	CH78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.128	7.449	6.319	P
	Fig.1	Fig.2	Fig.3	

For $\pi/4$ DQPSK

Channel	Ch0 2402 MHz	Ch39 2441 MHz	CH78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.196	8.57	7.426	P
	Fig.4	Fig.5	Fig.6	

For 8DPSK

Channel	Ch0 2402 MHz	Ch39 2441 MHz	CH78 2480 MHz	Conclusion
---------	--------------	---------------	---------------	------------

Peak Conducted Output Power (dBm)	8.57	9.005	7.861	P
	Fig.7	Fig.8	Fig.9	

Conclusion: PASS

Test graphs an below

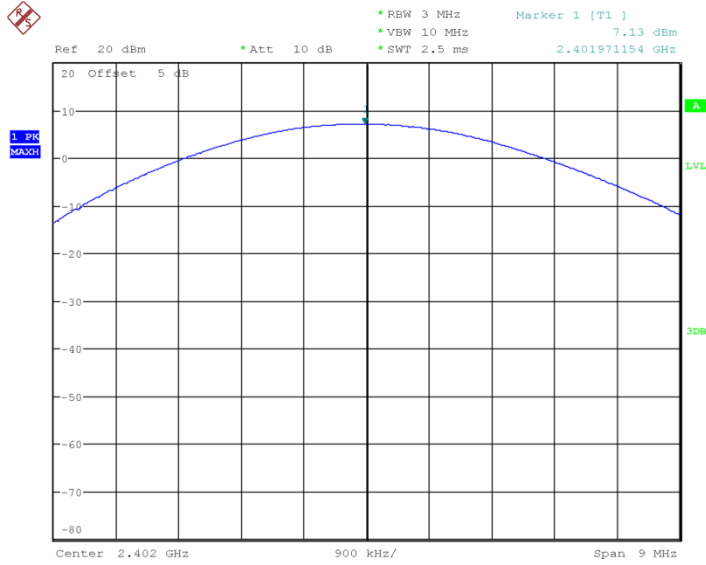


Fig.1 Peak Conducted Output Power CH0, DH1

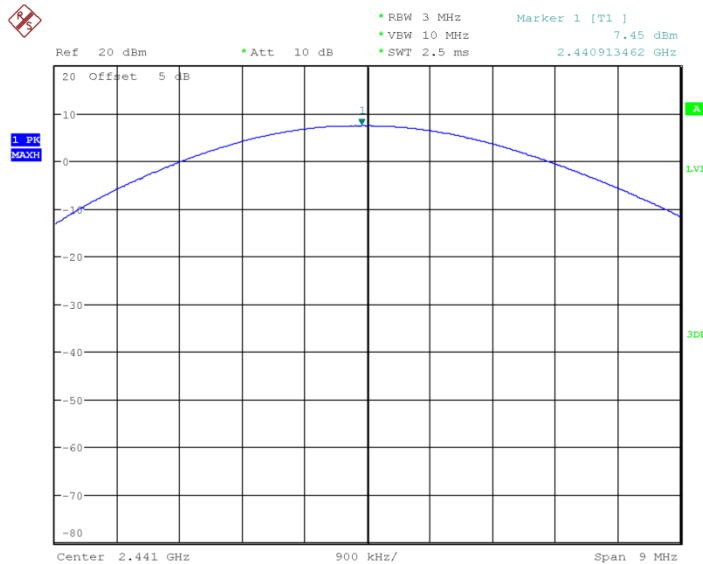


Fig.2 Peak Conducted Output Power CH39, DH1

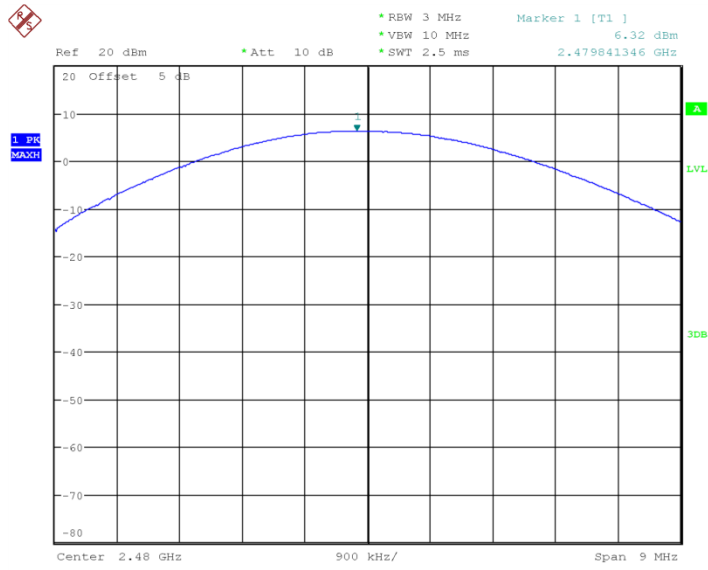


Fig.3 Peak Conducted Output Power CH78, DH1

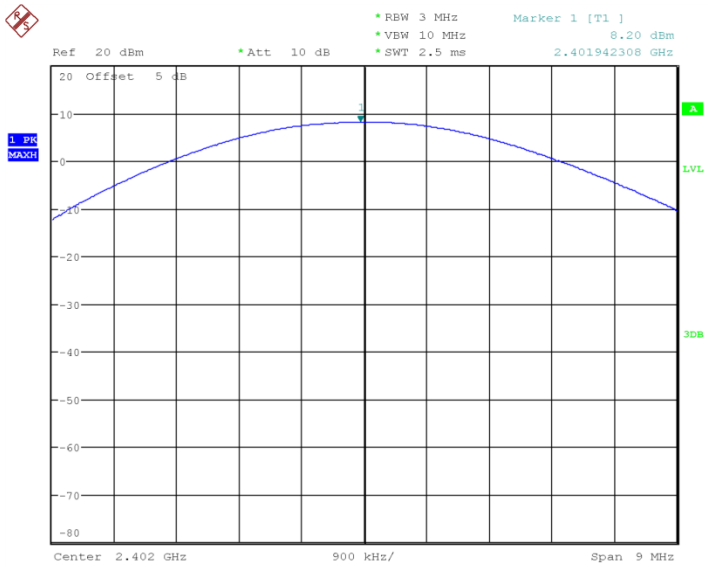


Fig.4 Peak Conducted Output Power CH0, 2DH1

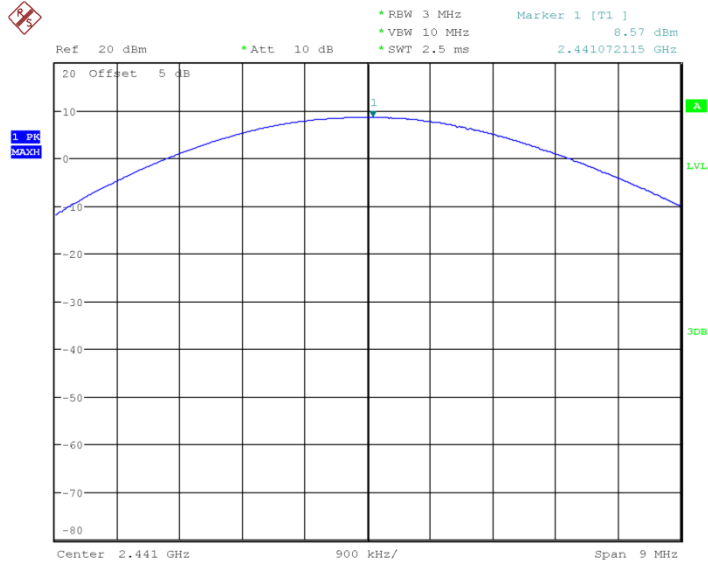


Fig.5 Peak Conducted Output Power CH39, 2DH1

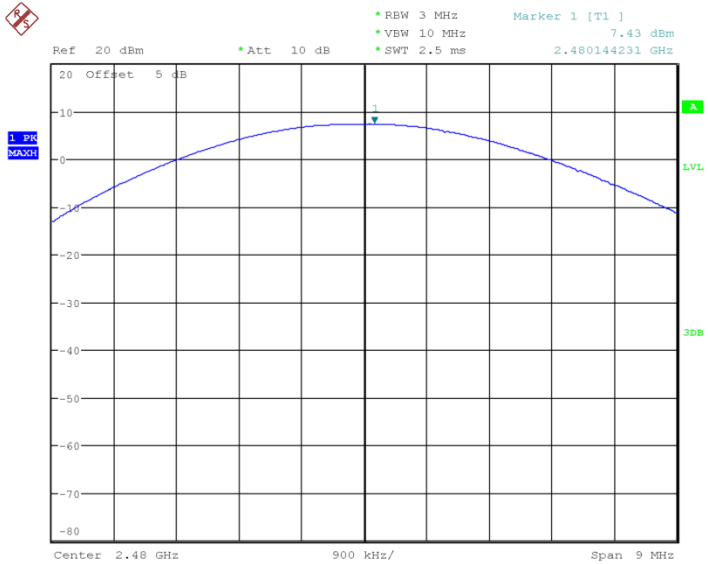


Fig.6 Peak Conducted Output Power CH78, 2DH1

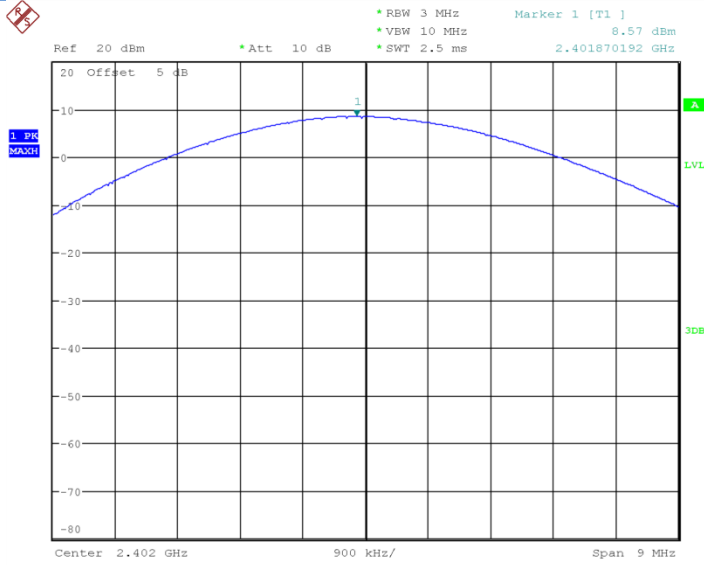


Fig.7 Peak Conducted Output Power CH0, 3DH1

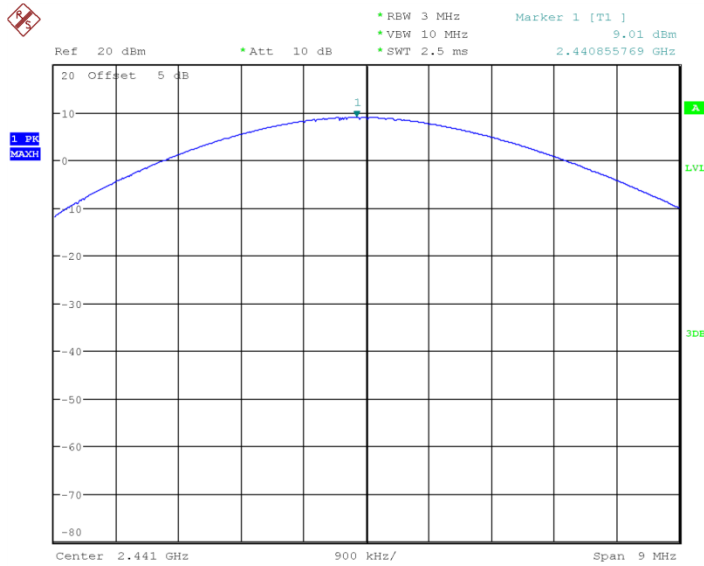


Fig.8 Peak Conducted Output Power CH39, 3DH1

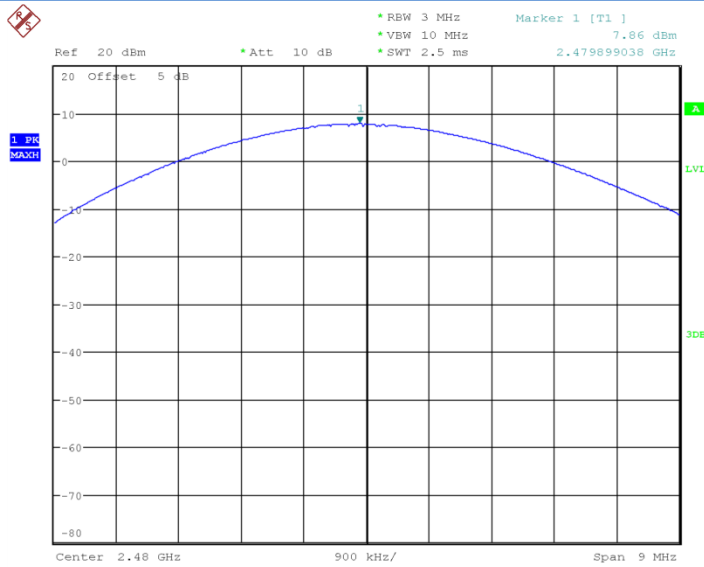


Fig.9 Peak Conducted Output Power CH78, 3DH1

6.2. Frequency Band Edges-Conducted

6.2.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

6.2.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.6.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.
4. Allow sweep to continue until the trace stabilizes.

6.2.3 Measurement results

For GFSK

Channel	Hopping	Band Edge Power (dBc)	Conclusion
0	Hopping OFF	Fig.10	P
	Hopping ON	Fig.11	P
78	Hopping OFF	Fig.12	P

	Hopping ON	Fig.13	P
--	------------	--------	---

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)	Conclusion
0	Hopping OFF	Fig.14	P
	Hopping ON	Fig.15	P
78	Hopping OFF	Fig.16	P
	Hopping ON	Fig.17	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)	Conclusion
0	Hopping OFF	Fig.18	P
	Hopping ON	Fig.19	P
78	Hopping OFF	Fig.20	P
	Hopping ON	Fig.21	P

Conclusion: PASS

Test graphs an below

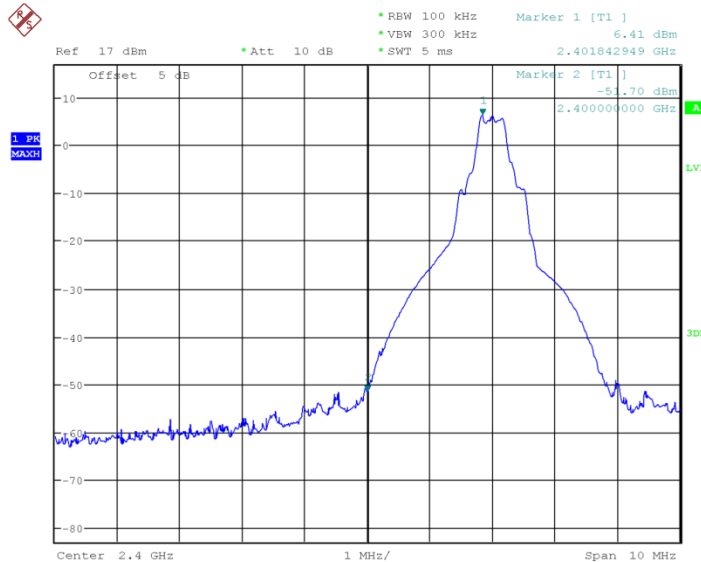


Fig.10 Frequency Band Edge: GFSK, Ch0, Hopping OFF

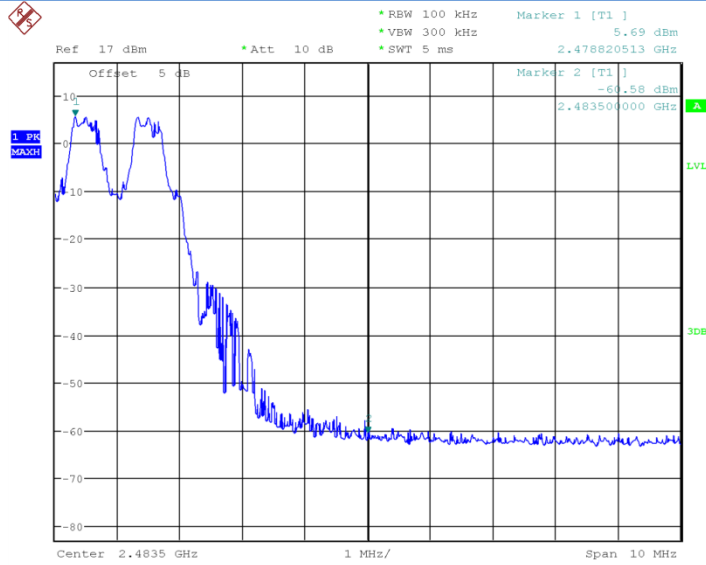


Fig.13 Frequency Band Edge: GFSK, Ch78, Hopping ON

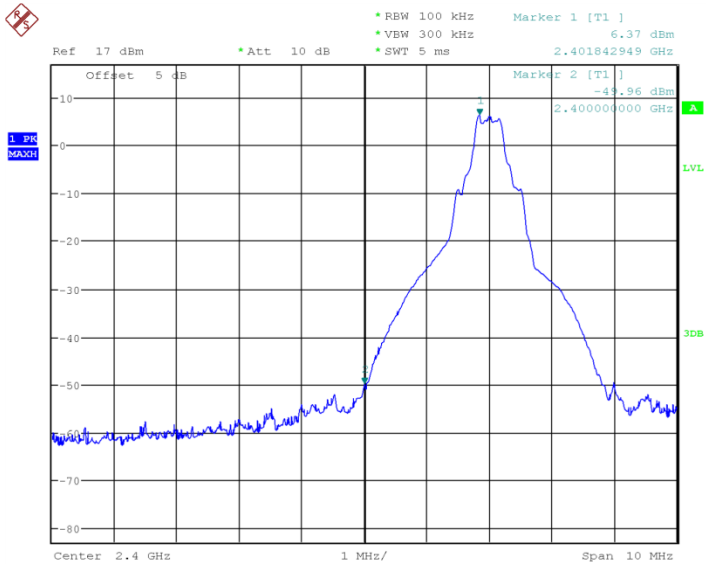


Fig.14 Frequency Band Edge: $\pi/4$ DQPSK, Ch0, Hopping OFF

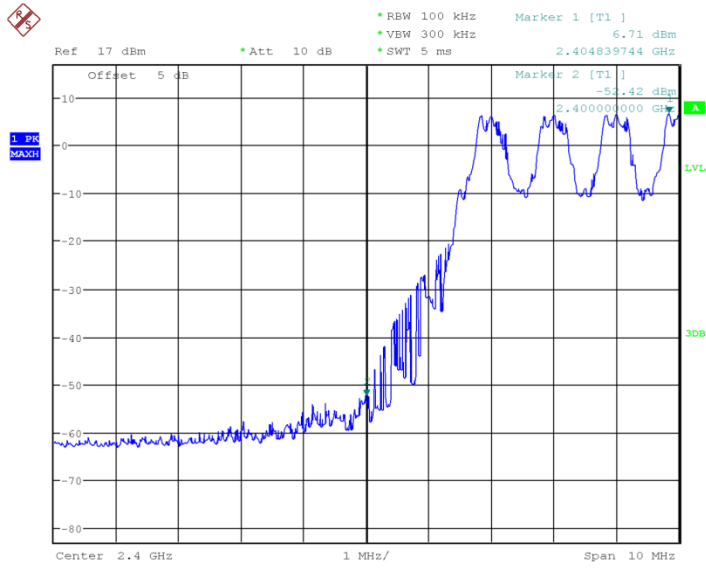


Fig.15 Frequency Band Edge: $\pi/4$ DQPSK, Ch0, Hopping ON

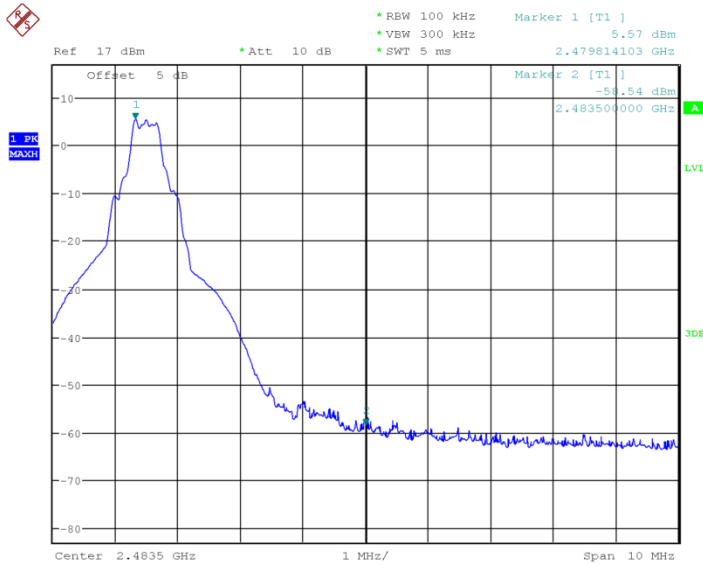


Fig.16 Frequency Band Edge: $\pi/4$ DQPSK, Ch78, Hopping OFF

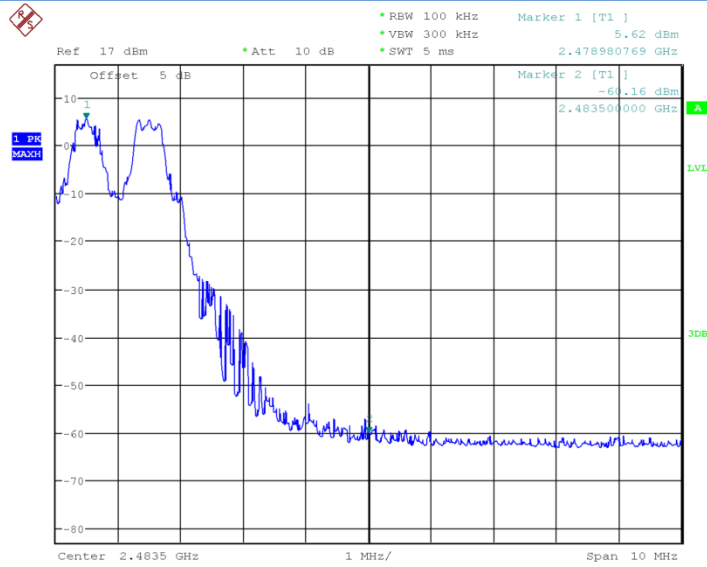


Fig.17 Frequency Band Edge: $\pi/4$ DQPSK, Ch78, Hopping ON

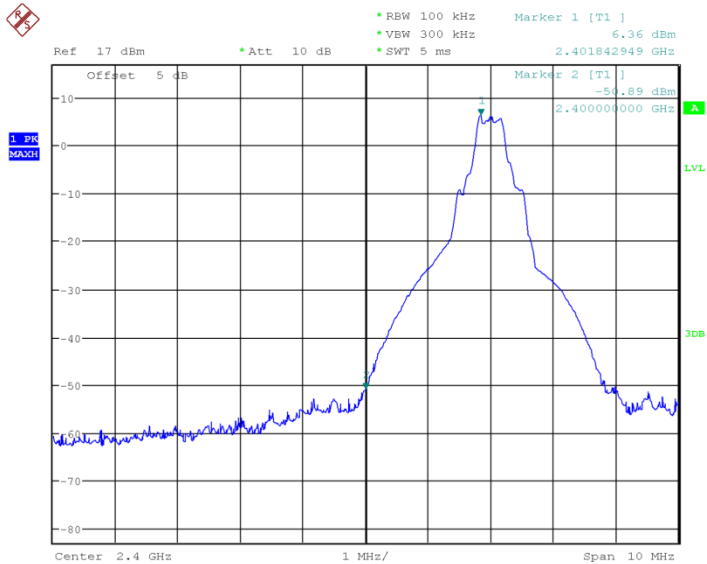


Fig.18 Frequency Band Edge: 8DPSK, Ch0, Hopping OFF

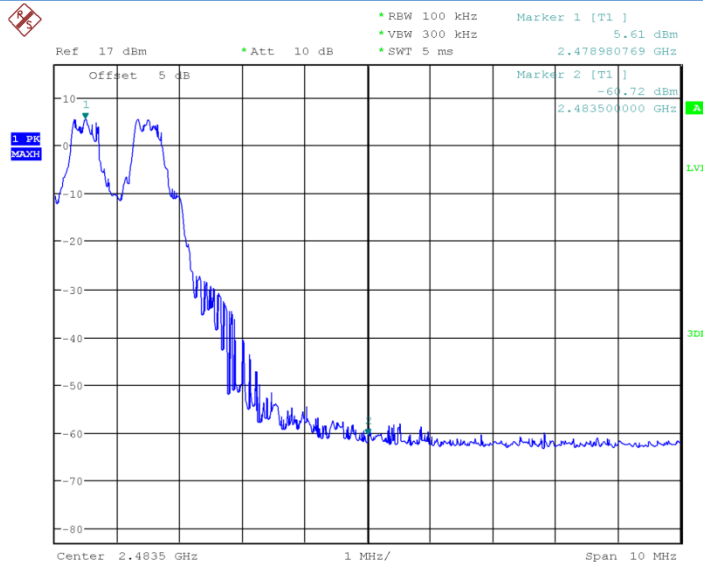


Fig.21 Frequency Band Edge: 8DPSK, Ch78, Hopping ON

6.3. Conducted Emission

6.3.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100KHz bandwidth

6.3.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.8.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

6.3.3 Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	Center Freq.	Fig.22	P
	30MHz~26GHz	Fig.23	P
Ch39 2441MHz	Center Freq.	Fig.24	P
	30MHz~26GHz	Fig.25	P
Ch78 2480MHz	Center Freq.	Fig.26	P

	30MHz~26GHz	Fig.27	P
--	-------------	--------	---

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	Center Freq.	Fig.28	P
	30MHz~26GHz	Fig.29	P
Ch39 2441MHz	Center Freq.	Fig.30	P
	30MHz~26GHz	Fig.31	P
Ch78 2480MHz	Center Freq.	Fig.32	P
	30MHz~26GHz	Fig.33	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	Center Freq.	Fig.34	P
	30MHz~26GHz	Fig.35	P
Ch39 2441MHz	Center Freq.	Fig.36	P
	30MHz~26GHz	Fig.37	P
Ch78 2480MHz	Center Freq.	Fig.38	P
	30MHz~26GHz	Fig.39	P

Conclusion: PASS

Test graphs as below

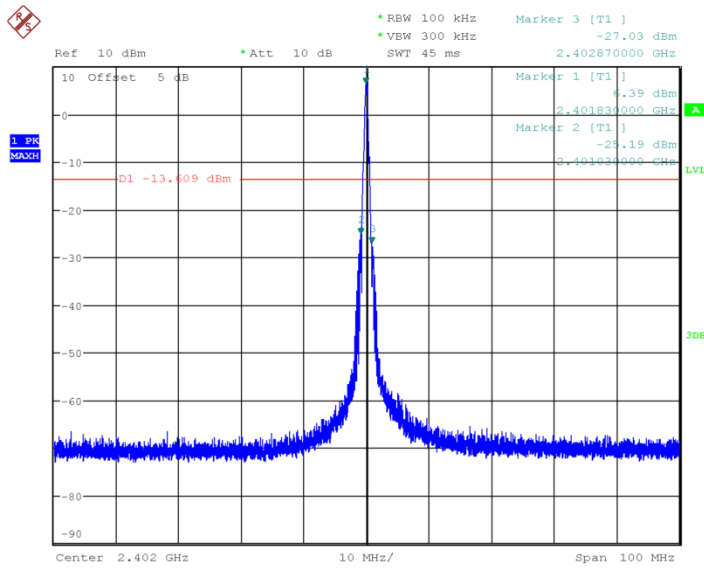


Fig.22 Conducted spurious emission: GFSK, Ch0, 2402MHz

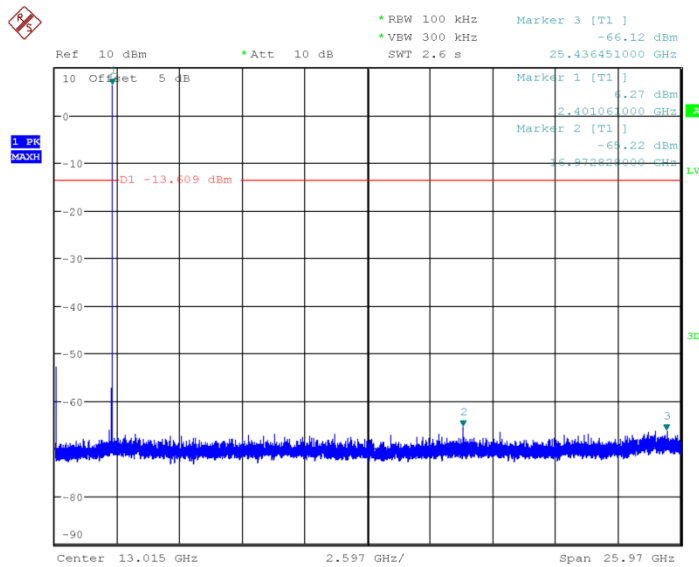


Fig.23 Conducted spurious emission: GFSK, Ch0, 30MHz~26GHz

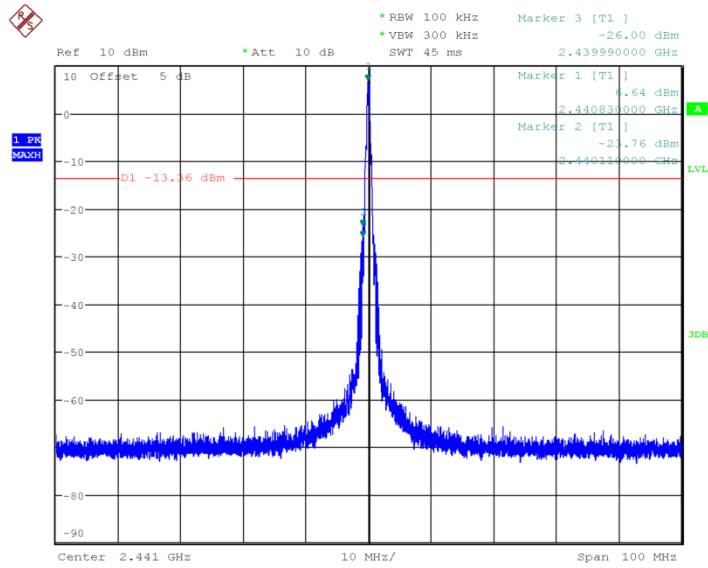


Fig.24 Conducted spurious emission: GFSK, Ch39, 2441MHz

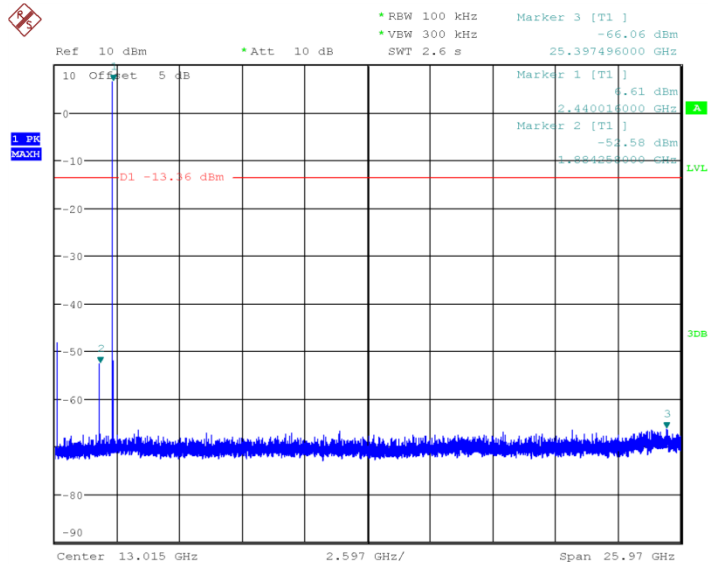


Fig.25 Conducted spurious emission: GFSK, Ch39, 30MHz~26GHz

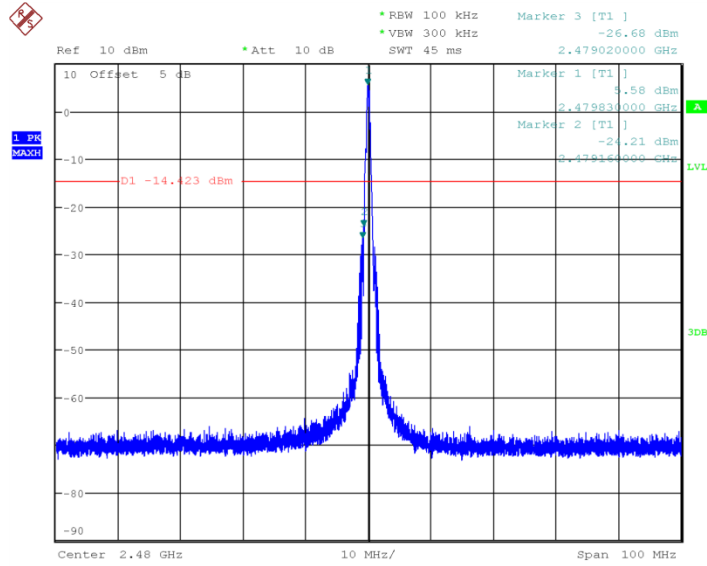


Fig.26 Conducted spurious emission: GFSK, Ch78, 2480MHz

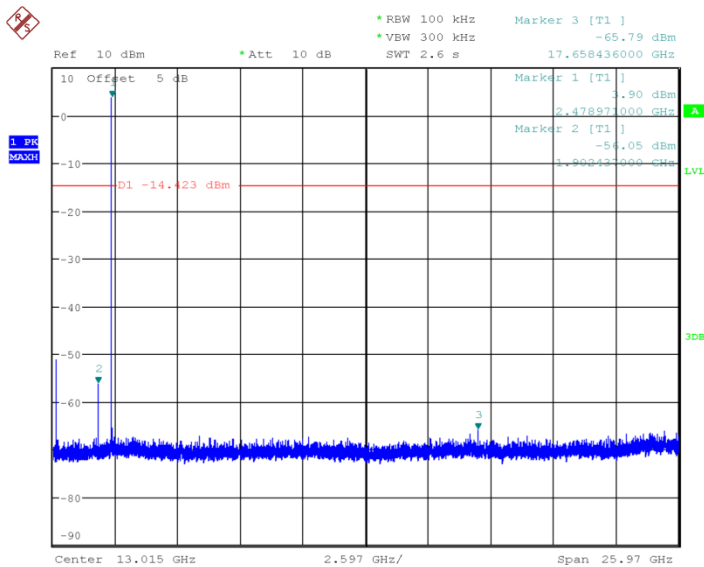


Fig.27 Conducted spurious emission: GFSK, Ch78, 30MHz~26GHz

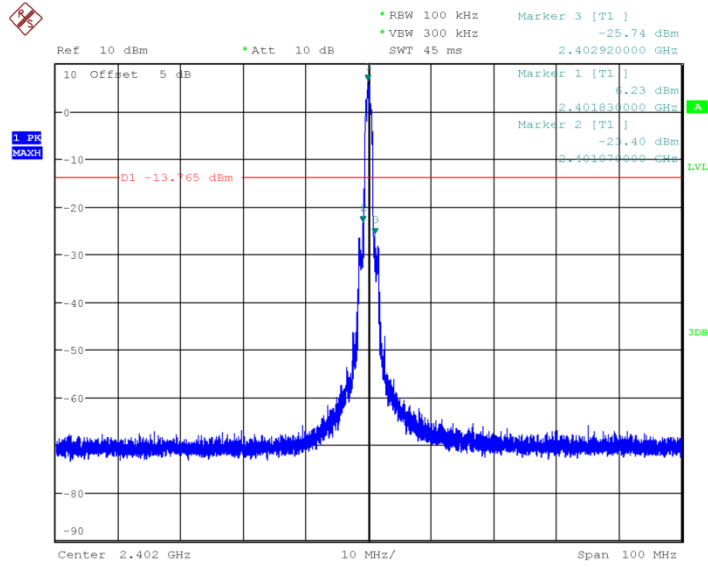


Fig.28 Conducted spurious emission: $\pi/4$ DQPSK, Ch0, 2402MHz

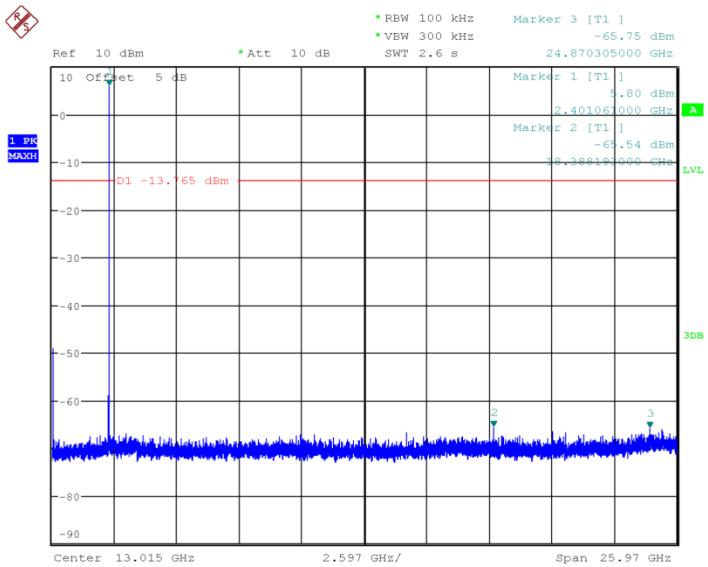


Fig.29 Conducted spurious emission: $\pi/4$ DQPSK, Ch0, 30MHz~26GHz

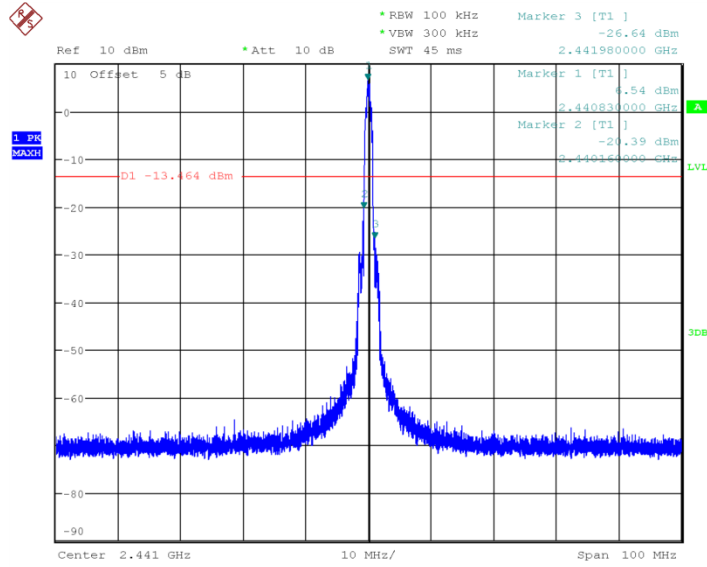


Fig.30 Conducted spurious emission: $\pi/4$ DQPSK, Ch39, 2441MHz

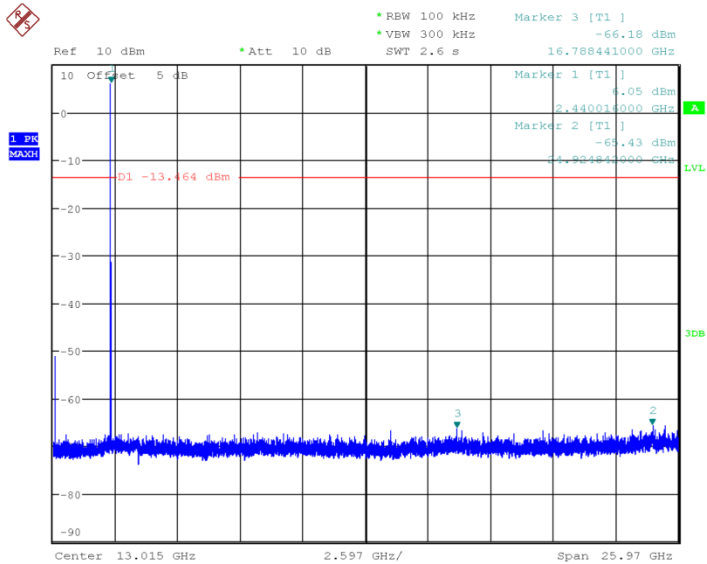


Fig.31 Conducted spurious emission: $\pi/4$ DQPSK, Ch39, 30MHz~26GHz

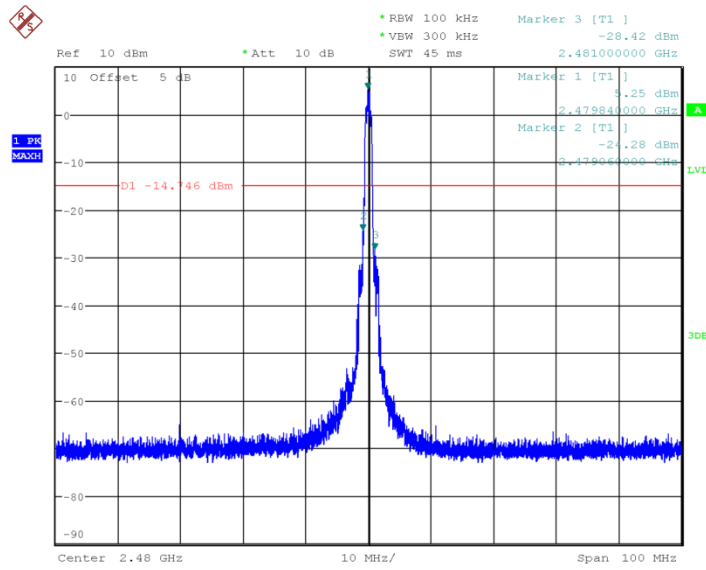


Fig.32 Conducted spurious emission: $\pi/4$ DQPSK, Ch78, 2480MHz

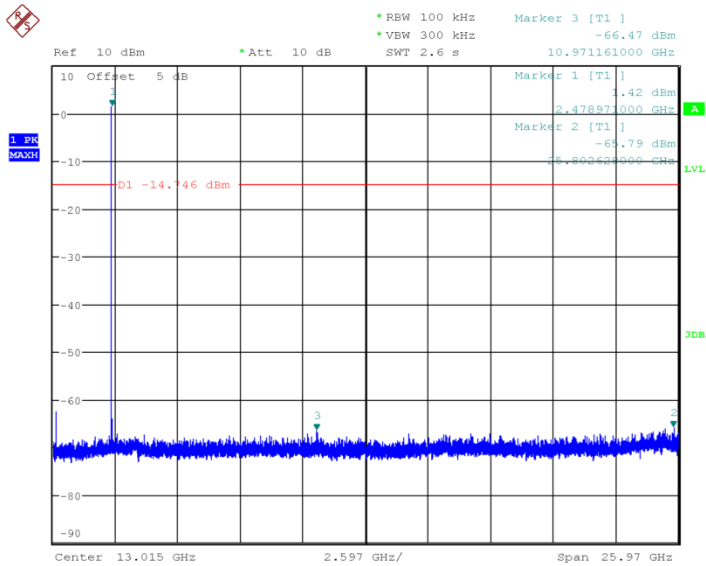


Fig.33 Conducted spurious emission: $\pi/4$ DQPSK, Ch78, 30MHz~26GHz

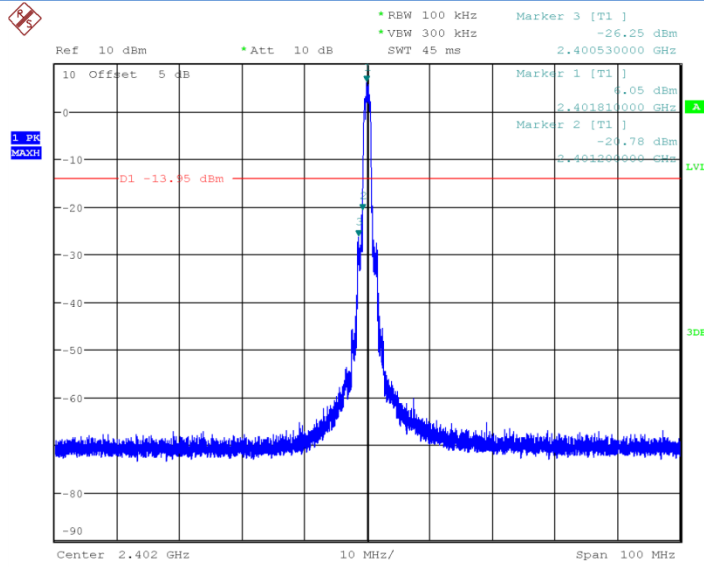


Fig.34 Conducted spurious emission: 8DPSK, Ch0, 2402MHz

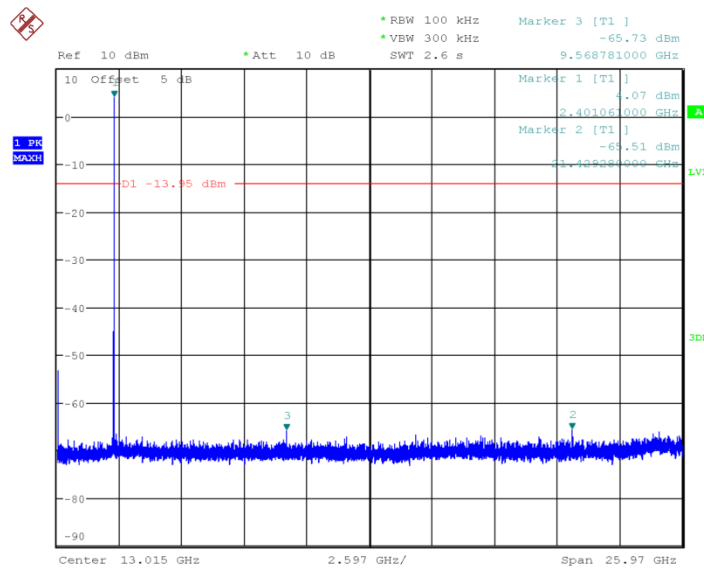


Fig.35 Conducted spurious emission: 8DPSK, Ch0, 30MHz~26GHz

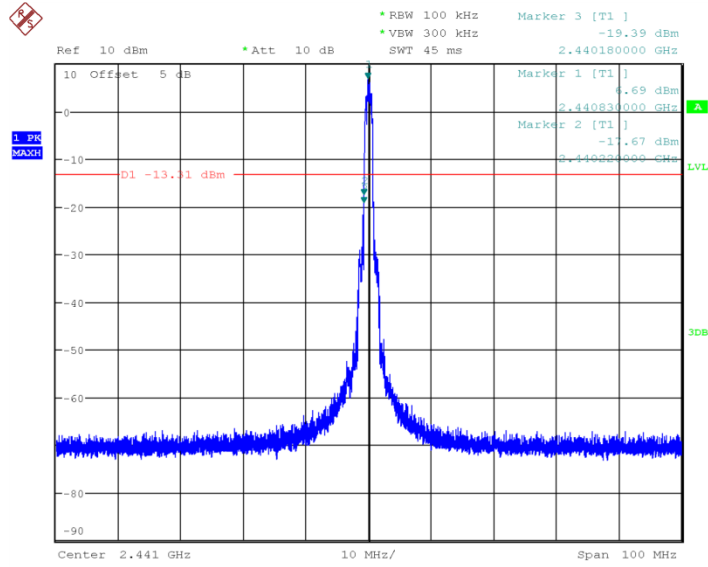


Fig.36 Conducted spurious emission: 8DPSK, Ch39, 2441MHz

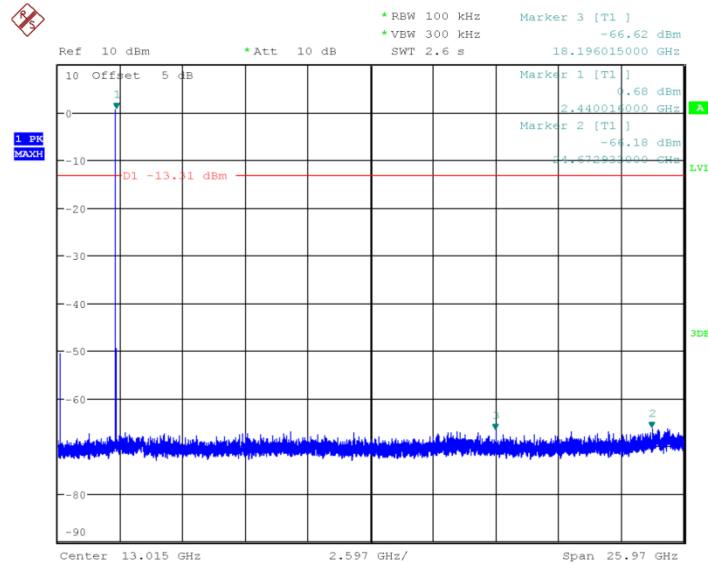


Fig.37 Conducted spurious emission: 8DPSK, Ch39, 30MHz~26GHz

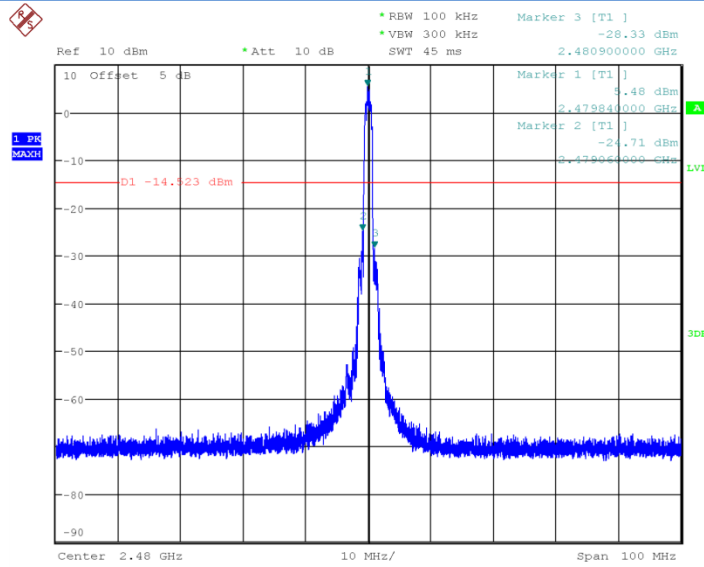


Fig.38 Conducted spurious emission: 8DPSK, Ch78, 2480MHz

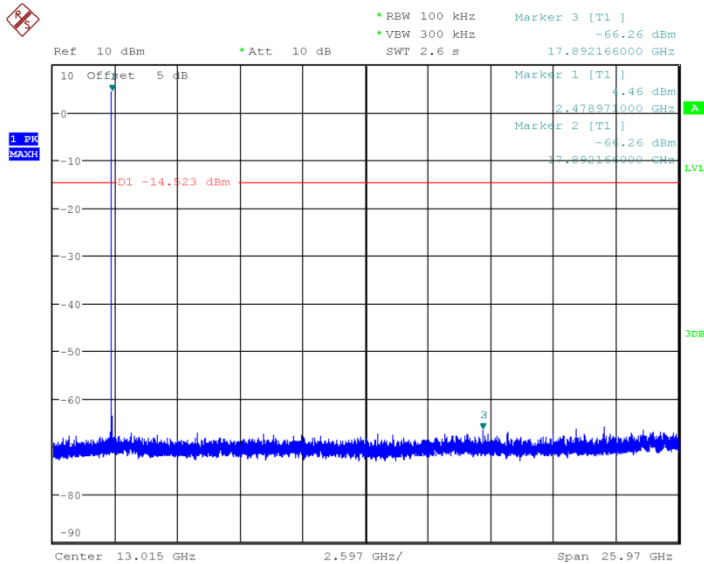


Fig.39 Conducted spurious emission: 8DPSK, Ch78, 30MHz~26GHz

6.4. Radiated Emission

6.4.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

6.4.3 Measurement Results:

A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$A_{Rpi} = \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain}$$

$$\text{Result} = P_{\text{Mea}} + A_{Rpi}$$

**Main supply
For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	30MH~1GHz	Fig.40	P
	1GHz~3GHz	Fig.41	P
	3GHz~18GHz	Fig.42	P
Power	2.38GHz~2.4GHz	Fig.43	P
Power	2.45GHz~2.5GHz	Fig.44	P

**Secondly supply
For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	30MH~1GHz	Fig.45	P
	1GHz~3GHz	Fig.46	P
	3GHz~18GHz	Fig.47	P
Power	2.38GHz~2.4GHz	Fig.48	P
Power	2.45GHz~2.5GHz	Fig.49	P

Note: The secondly supply only test the worst case.

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	30MH~1GHz	Fig.50	P
	1GHz~3GHz	Fig.51	P
	3GHz~18GHz	Fig.52	P
Power	2.38GHz~2.4GHz	Fig.53	P
Power	2.45GHz~2.5GHz	Fig.54	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	30MH~1GHz	Fig.55	P
	1GHz~3GHz	Fig.56	P

	3GHz~18GHz	Fig.57	P
Power	2.38GHz~2.4GHz	Fig.58	P
Power	2.45GHz~2.5GHz	Fig.59	P

Main supply
GFSK Ch0 30MHz-1GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
33.12492	8.75	-26.4	35.15	V
33.826964	9.96	-26.6	36.56	V
220.900164	11.05	-23.9	34.95	V
479.911512	11.34	-16.4	27.74	H
670.890328	14.56	-13.1	27.66	H
907.61096	18.54	-9.1	27.64	H

GFSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1873.4496	43.13	1.1	42.03	V
2278.3984	47.77	6	41.77	H
2703.442115	50.51	9.5	41.01	H
2771.265	51.22	9.5	41.72	V
2888.286154	52.29	10.7	41.59	H
2976.84327	51.66	10.9	40.76	V

GFSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13402.1336	53.18	17.1	36.08	V
14306.34193	54.27	20.1	34.17	V
15255.10127	54.47	21.1	33.37	V
15831.31587	57.41	24	33.41	H

16979.97147	60.06	26.8	33.26	H
17623.48207	60.43	28.5	31.93	V

GFSK Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14306.34193	42.4	20.1	22.3	V
15255.10127	42.67	21.1	21.57	V
15831.31587	45.14	24	21.14	H
16979.97147	48.06	26.8	21.26	H
17623.48207	48.81	28.5	20.31	V

Secondly supply
GFSK Ch0 30MHz-1GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
31.8134	6.45	-26.1	32.55	V
34.012364	9.55	-26.6	36.15	V
37.18214	7.87	-25.4	33.27	V
168.394156	1.9	-26.5	28.4	H
226.020276	4.45	-23.6	28.05	H
829.503044	16.68	-10.6	27.28	V

GFSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2754.519615	50.32	9.4	40.92	H
2782.039808	50.63	9.6	41.03	V
2826.483654	50.62	10.3	40.32	V
2890.179808	51.33	10.7	40.63	H
2930.045192	50.67	10.6	40.07	V
2944.934423	51.64	10.5	41.14	H

GFSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14891.02513	55.32	21.5	33.82	V
15458.86	56.77	22.7	34.07	V
16072.75667	58.14	24.2	33.94	H
16501.68727	58.87	26.4	32.47	H
16995.5872	59.56	26.8	32.76	H
17491.01253	61.22	28.4	32.82	V

GFSK Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14891.02513	43.6	21.5	22.1	V
15458.86	44.02	22.7	21.32	V
16072.75667	46.08	24.2	21.88	H
16501.68727	46.92	26.4	20.52	H
16995.5872	47.95	26.8	21.15	H
17491.01253	48.77	28.4	20.37	V

Note: The secondly supply only test the worst case.

$\pi/4$ DQPSK Ch0 30MHz-1GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
43.698288	28.47	-23.5	51.97	V
151.963412	10.73	-27.8	38.53	V
295.674996	6.79	-21.5	28.29	V
490.831576	11.83	-16	27.83	H
809.148884	16.94	-10.7	27.64	H
921.468208	18.93	-8.8	27.73	V

$\pi/4$ DQPSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------

1791.5084	43.24	0.8	42.44	H
2155.8808	45.47	4.1	41.37	H
2361.4804	51.51	8	43.51	V
2526.2425	49.98	8.3	41.68	V
2681.042693	51.26	9.4	41.86	H
2878.052115	51.95	10.7	41.25	V

 $\pi/4$ DQPSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13519.39607	54.03	18	36.03	H
14269.125	54.67	19.8	34.87	H
15265.5904	55.88	21.1	34.78	V
16010.82513	59.68	24.6	35.08	V
16793.17773	59.32	26.8	32.52	V
17505.0118	60.97	28.4	32.57	V

 $\pi/4$ DQPSK Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13519.39607	41.11	18	23.11	H
14269.125	42.01	19.8	22.21	H
15265.5904	43.02	21.1	21.92	V
16010.82513	46.48	24.6	21.88	V
16793.17773	47.26	26.8	20.46	V
17505.0118	48.81	28.4	20.41	V

8DPSK Ch0 30MHz-1GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
42.119056	30.25	-23.6	53.85	V
48.557076	8.94	-23.3	32.24	V

82.28398	12.57	-27.6	40.17	H
90.382568	6.77	-25.3	32.07	H
419.748992	10.75	-17.5	28.25	H
725.55648	15.51	-12.3	27.81	V

8DPSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1849.7016	43.33	1	42.33	V
1977.5684	42.9	1.1	41.8	V
2181.1284	45.86	4.3	41.56	H
2576.042884	50.08	8.6	41.48	H
2750.62	50.63	9.4	41.23	V
2871.523654	52.21	10.7	41.51	H

8DPSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
7206.1656	53.98	4.3	49.68	H
14883.6154	56.33	21.4	34.93	H
16032.31187	58.64	24.5	34.14	H
16521.20913	59.12	26.2	32.92	H
16796.9732	59.29	26.9	32.39	H
17552.2792	61.2	28.6	32.6	V

8DPSK Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14883.6154	43.44	21.4	22.04	H
16032.31187	46.33	24.5	21.83	H
16521.20913	46.59	26.2	20.39	H
16796.9732	47.35	26.9	20.45	H

17552.2792	49.19	28.6	20.59	V
------------	-------	------	-------	---

Note: Only the worst case is written in the report.

Conclusion: PASS

Main supply

Test graphs as below:

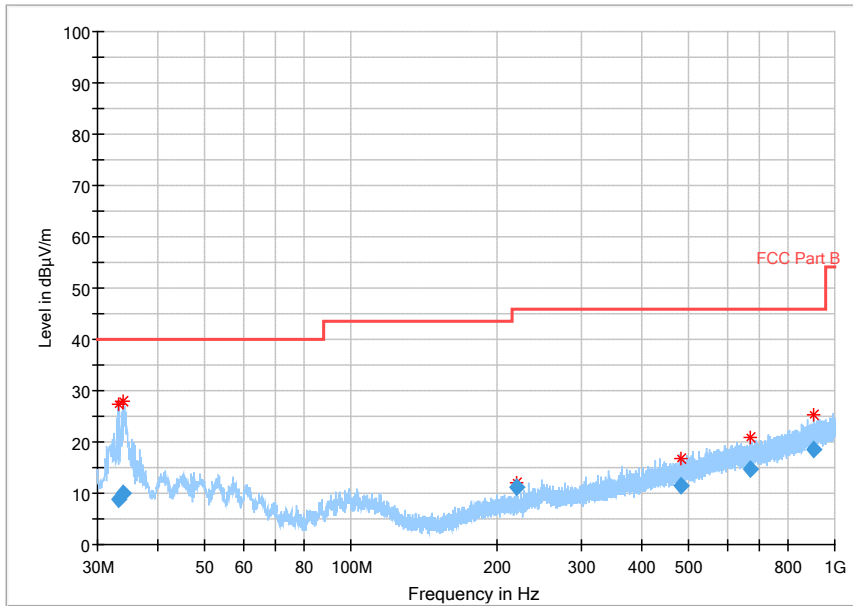


Fig.40 Radiated emission: GFSK, Ch0, 30MHz~1GHz

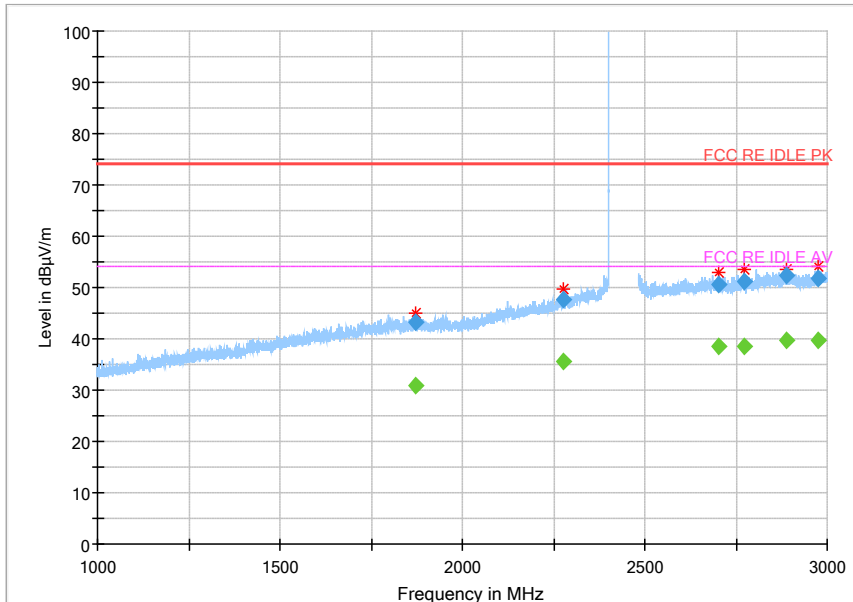


Fig.41 Radiated emission: GFSK, Ch0, 1GHz~3GHz

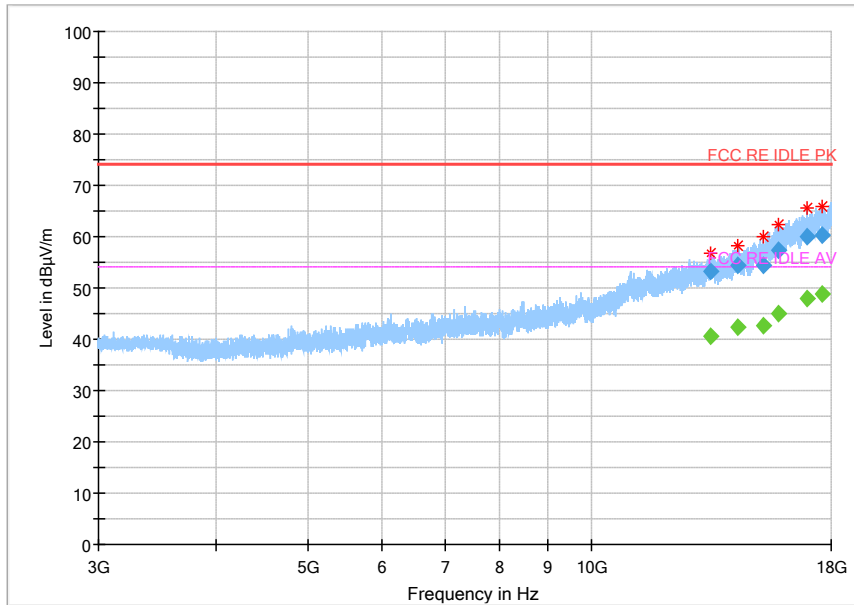


Fig.42 Radiated emission: GFSK, Ch0, 3GHz~18GHz

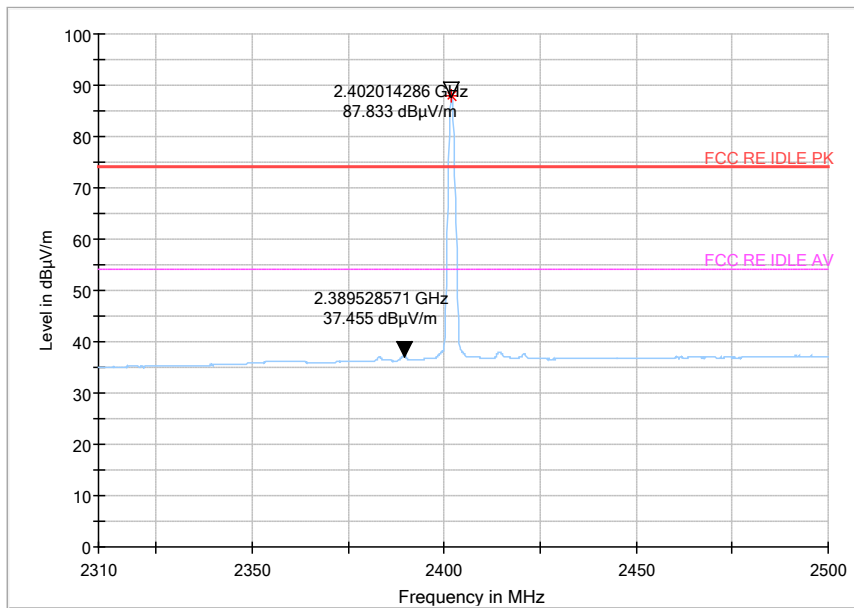


Fig.43 Radiated emission (Power): GFSK, low channel

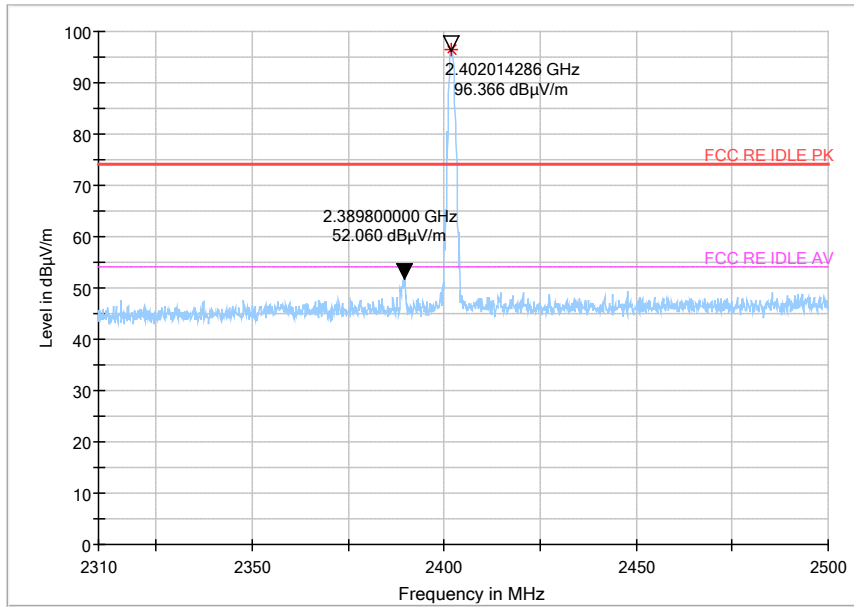


Fig.44 Radiated emission (Power): GFSK, high channel

Secondly supply

Test graphs as below:

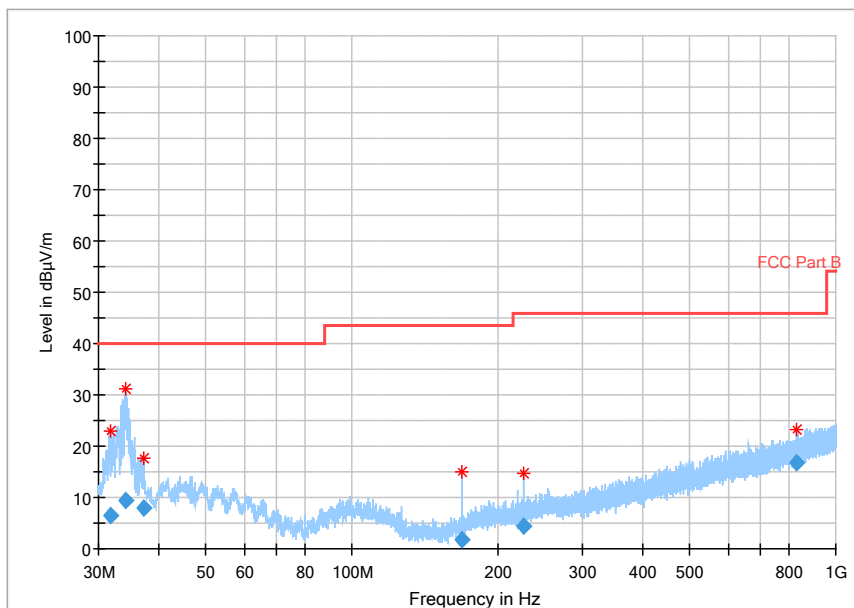


Fig.45 Radiated emission: GFSK, Ch0, 30MHz~1GHz

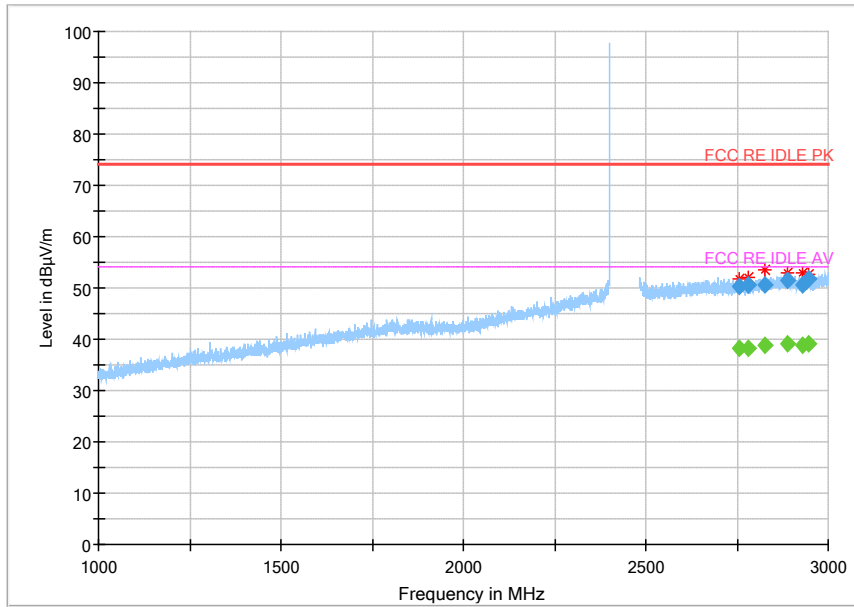


Fig.46 Radiated emission: GFSK, Ch0, 1GHz~3GHz

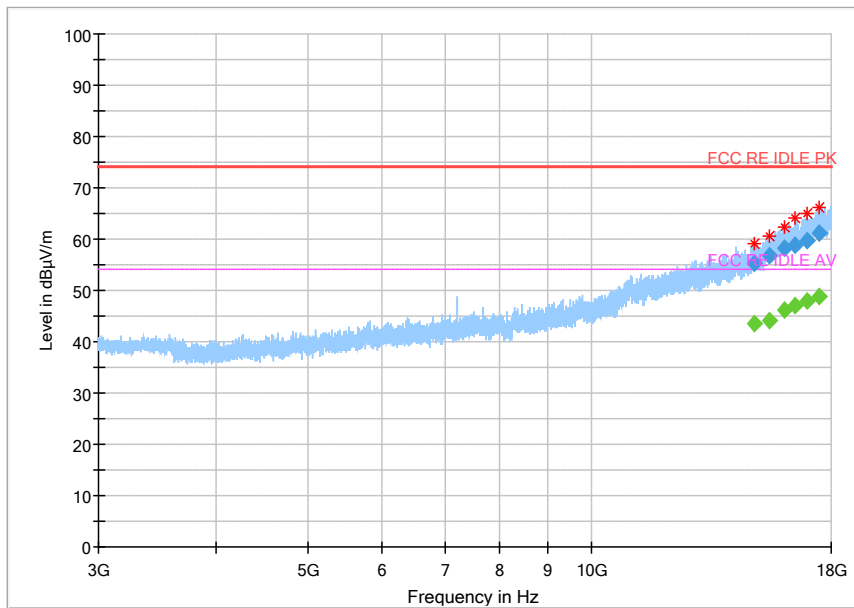


Fig.47 Radiated emission: GFSK, Ch0, 3GHz~18GHz

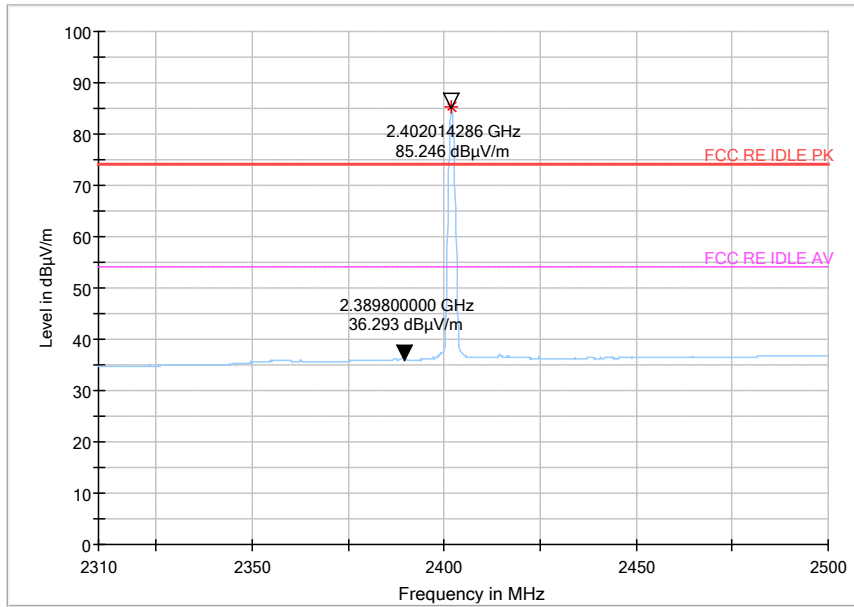


Fig.48 Radiated emission (Power): GFSK, low channel

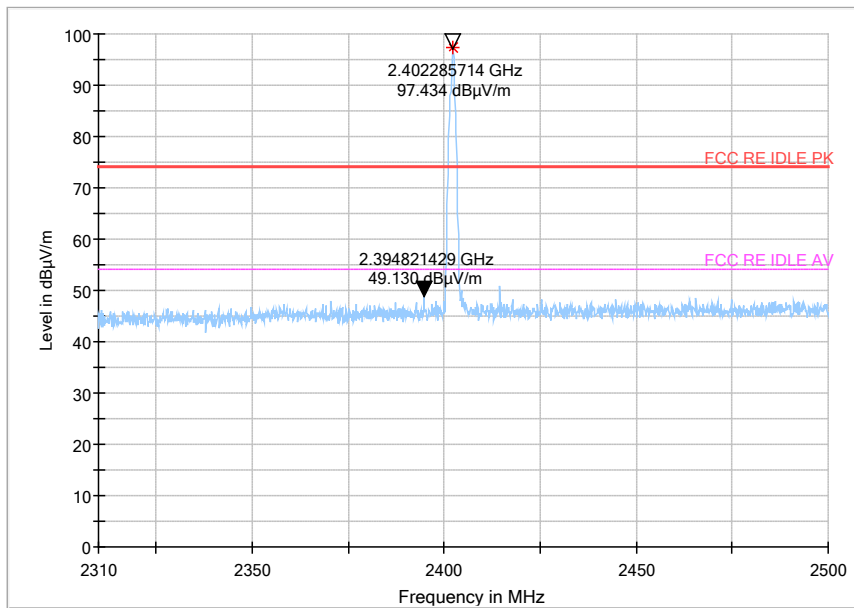


Fig.49 Radiated emission (Power): GFSK, high channel

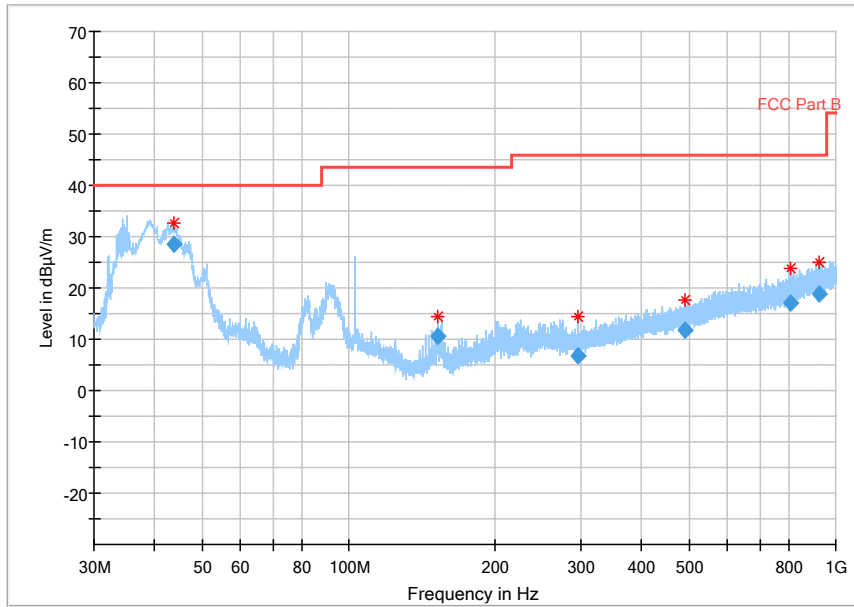


Fig.50 Radiated emission: $\pi/4$ DQPSK, Ch0, 30MHz~1GHz

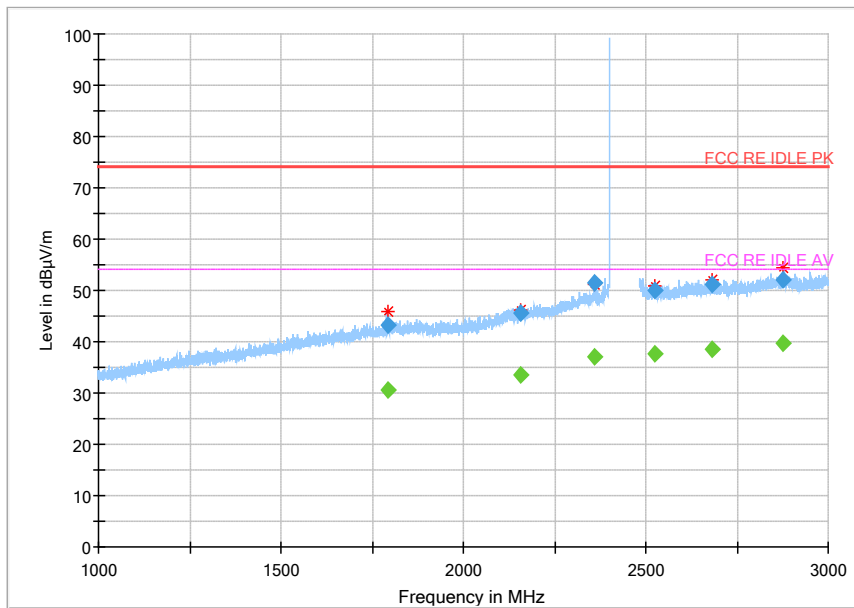


Fig.51 Radiated emission: $\pi/4$ DQPSK, Ch0, 1GHz~3GHz

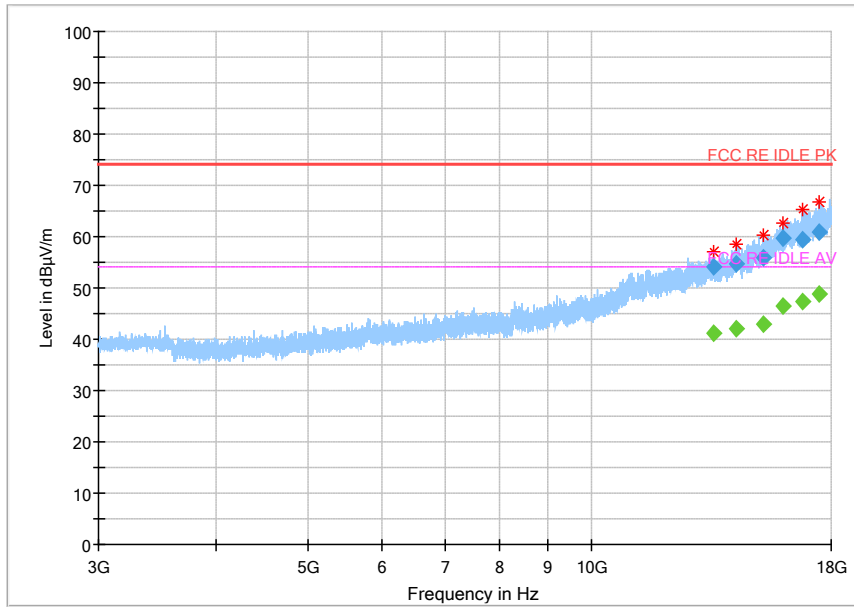


Fig.52 Radiated emission: $\pi/4$ DQPSK, Ch0, 3GHz~18GHz

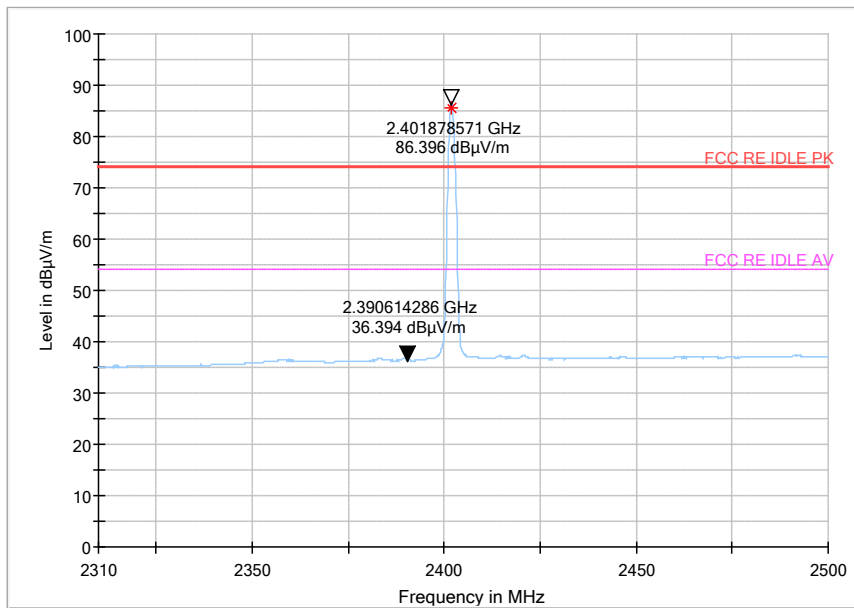


Fig.53 Radiated emission (Power): $\pi/4$ DQPSK, low channel

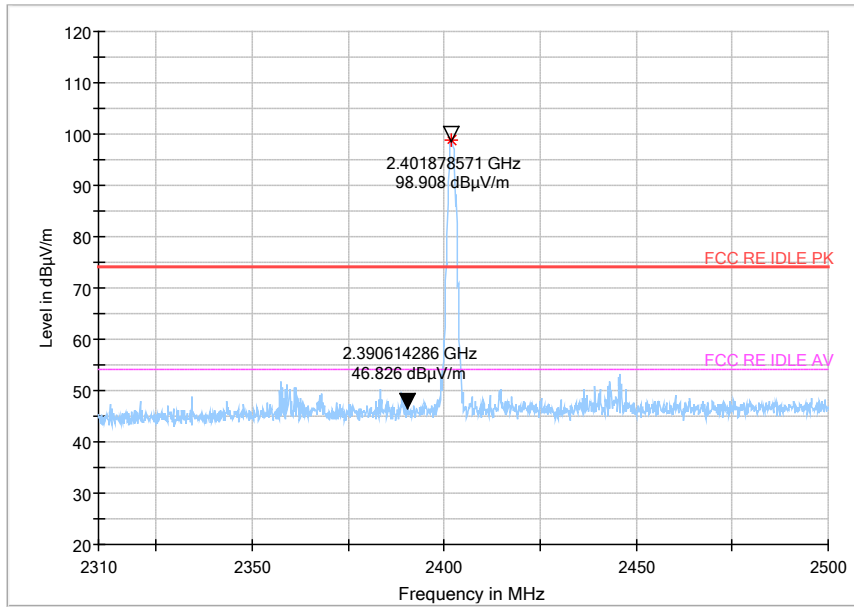


Fig.54 Radiated emission (Power): $\pi/4$ DQPSK, high channel

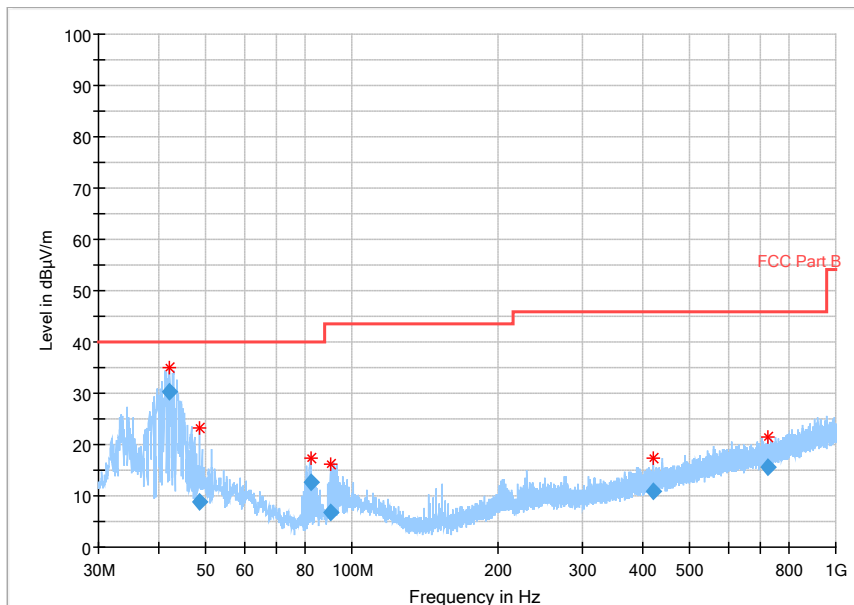


Fig.55 Radiated emission: 8DPSK, Ch0, 30MHz~1GHz

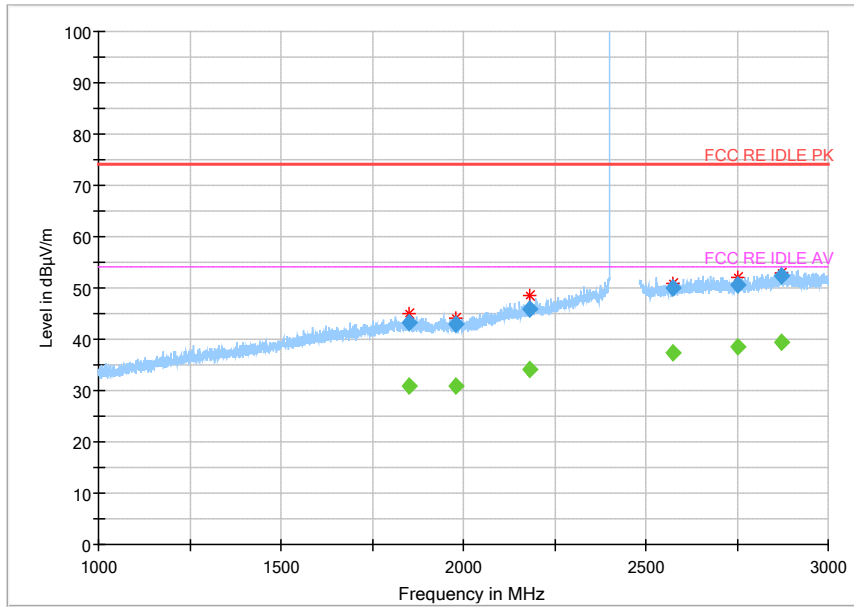


Fig.56 Radiated emission: 8DPSK, Ch0, 1GHz~3GHz

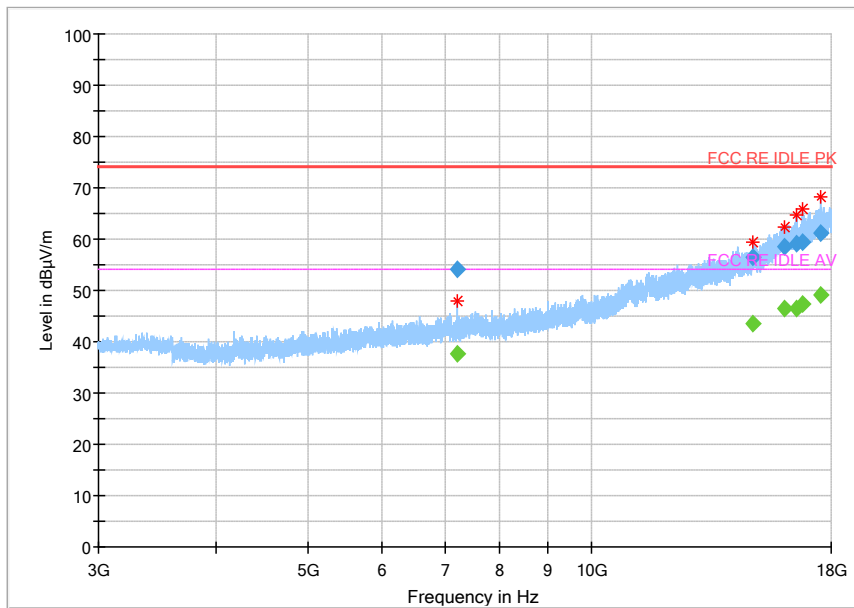


Fig.57 Radiated emission: 8DPSK, Ch0, 3GHz~18GHz

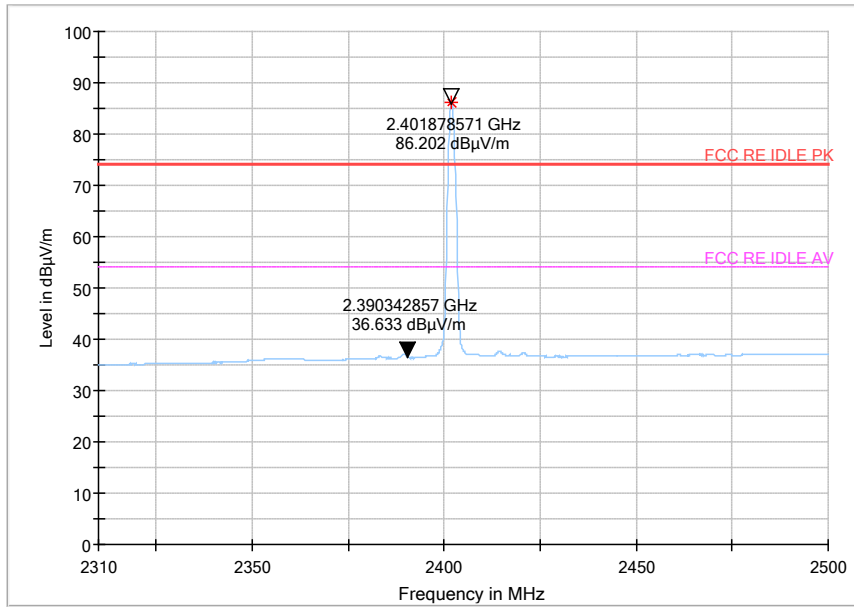


Fig.58 Radiated emission (Power): 8DPSK, low channel


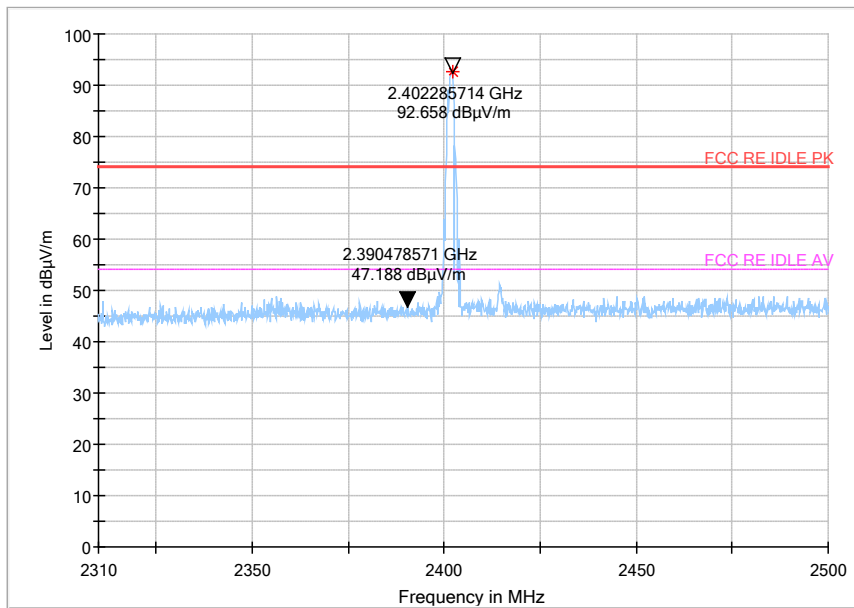


Fig.59 Radiated emission (Power): 8DPSK, high channel

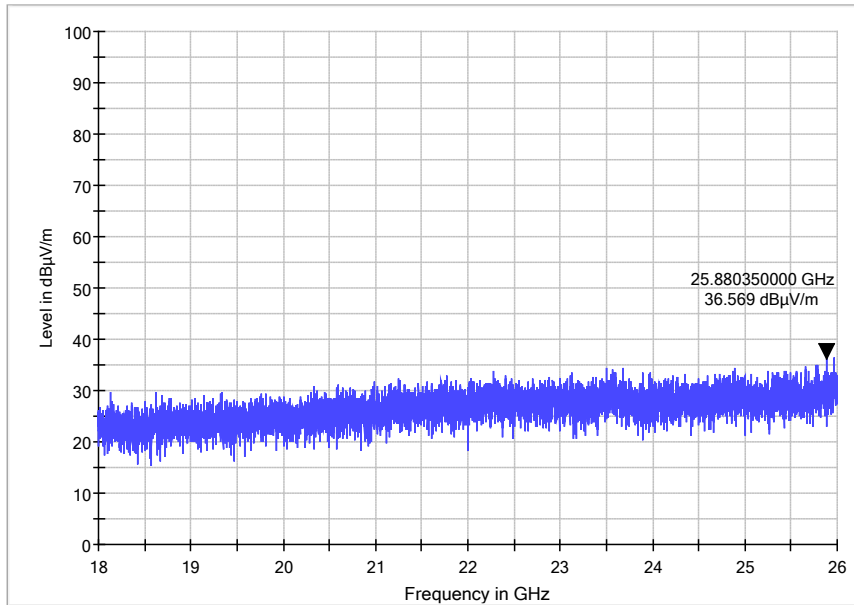

ALL Channel 18GHz~26GHz

6.5. Time Of Occupancy (Dwell Time)

6.5.1 Measurement Limit:

Standard	Limit (ms)
FCC 47CFR Part 15.247 (a) (1) (iii)	< 400

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Max hold.
9. Use the marker-delta function, and record it.

6.5.3 Measurement Result
For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.60	126.55	P
		Fig.61		
	DH3	Fig.62	198.21	P
		Fig.63		
	DH5	Fig.64	256.65	P
		Fig.65		

For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	2DH1	Fig.66	119.11	P
		Fig.67		
	2DH3	Fig.68	280.3	P
		Fig.69		
	2DH5	Fig.70	273.46	P
		Fig.71		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	3DH1	Fig.72	116.68	P
		Fig.73		
	3DH3	Fig.74	289.26	P
		Fig.75		
	3DH5	Fig.76	309.92	P
		Fig.77		

Conclusion: PASS
Test graphs as below:

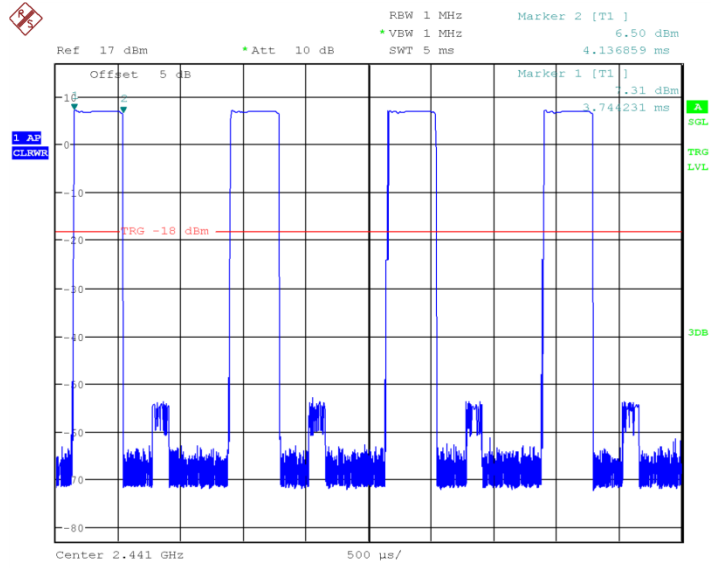


Fig.60 Time of occupancy (Dwell Time): Ch39, Packet DH1

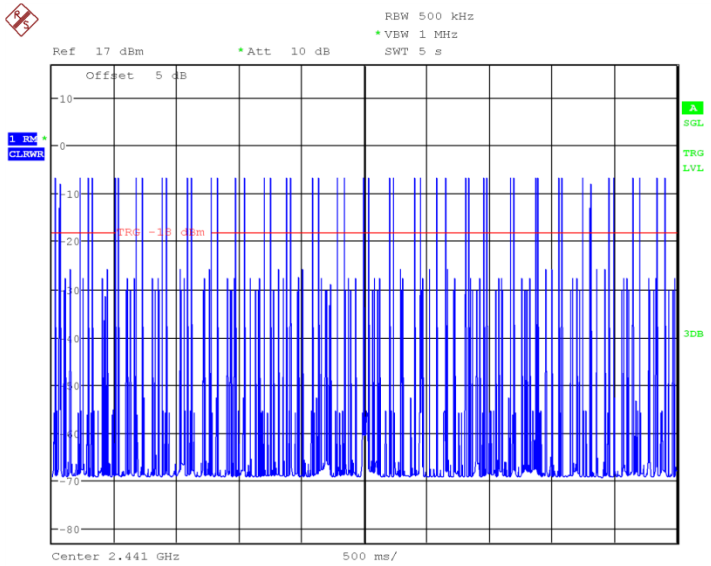


Fig.61 Number of Transmissions Measurement: Ch39, Packet DH1

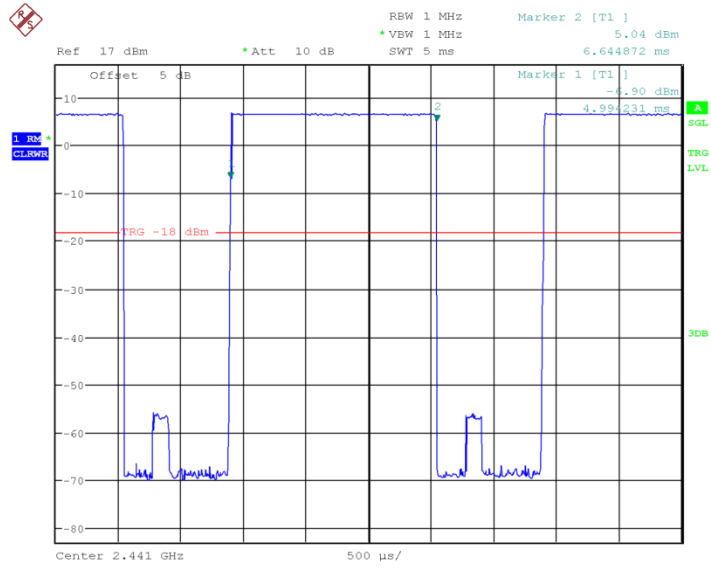


Fig.62 Time of occupancy (Dwell Time): Ch39, Packet DH3

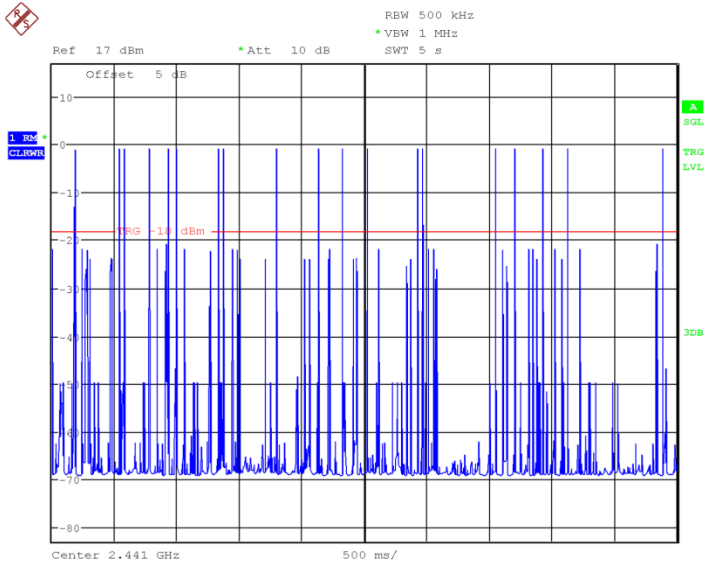


Fig.63 Number of Transmissions Measurement: Ch39, Packet DH3

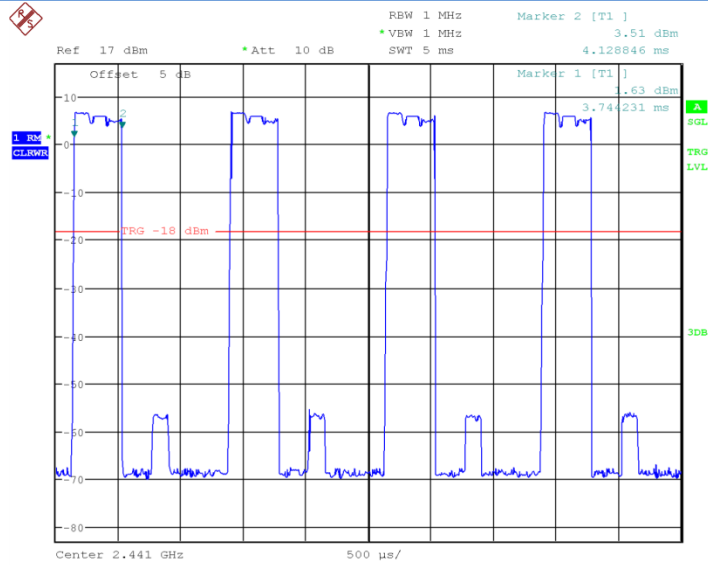


Fig.66 Time of occupancy (Dwell Time): Ch39, Packet 2-DH1

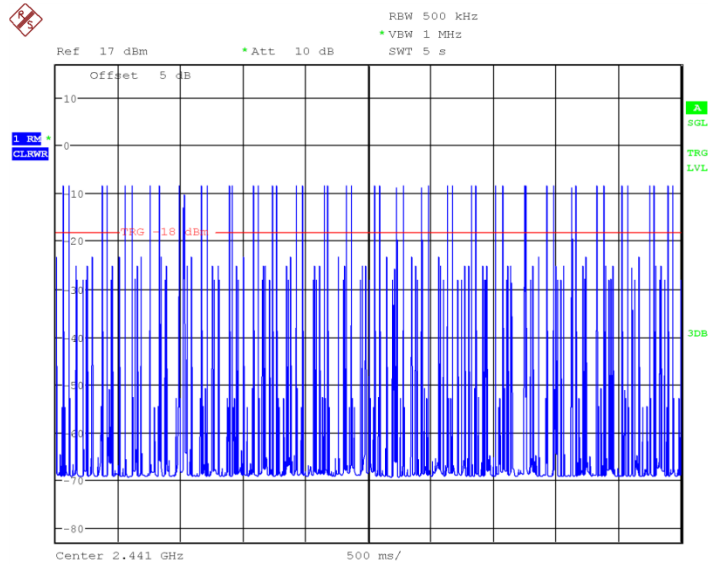


Fig.67 Number of Transmissions Measurement: Ch39, Packet 2-DH1

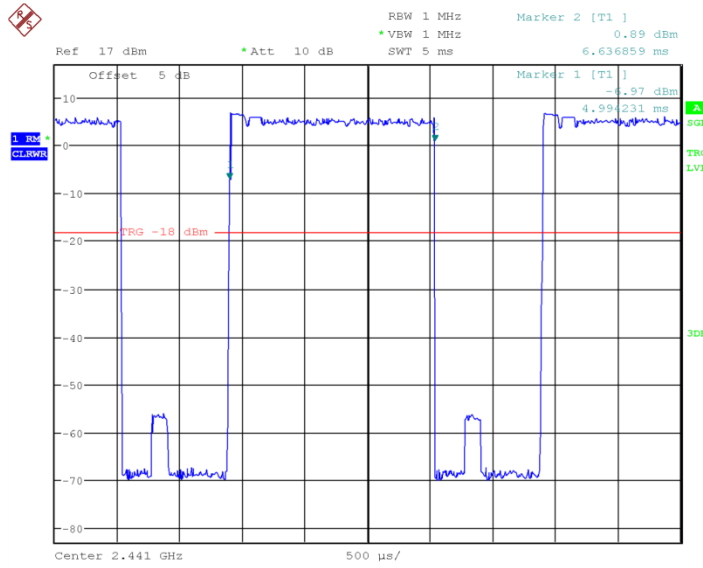


Fig.68 Time of occupancy (Dwell Time): Ch39,Packet 2-DH3

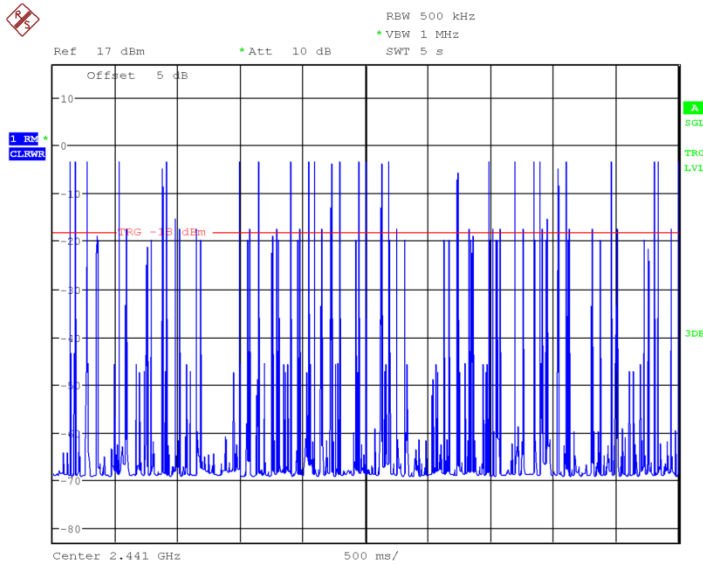


Fig.69 Number of Transmissions Measurement: Ch39, Packet 2-DH3

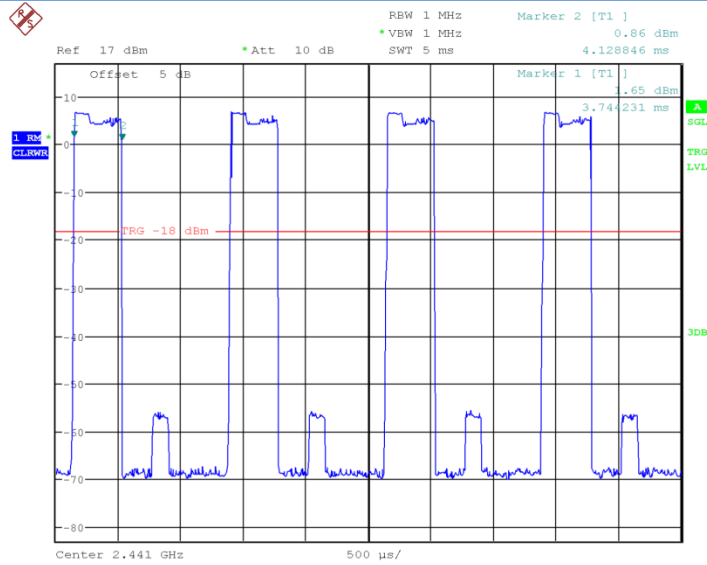


Fig.72 Time of occupancy (Dwell Time): Ch39,Packet 3-DH1

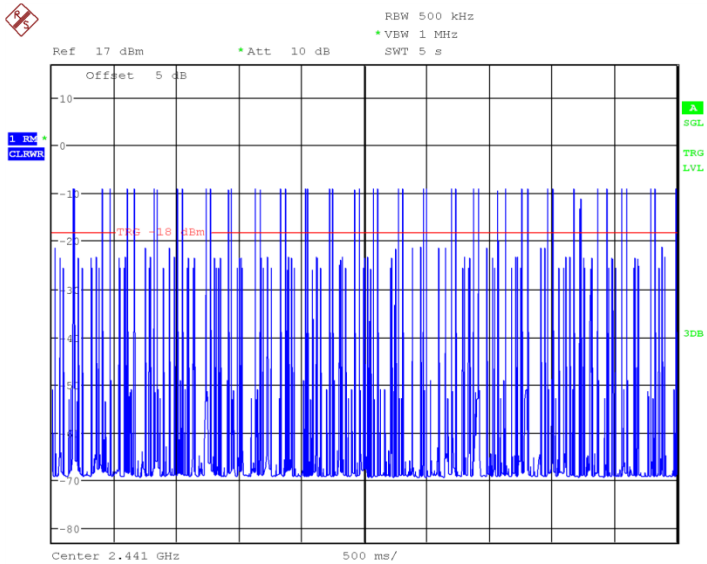


Fig.73 Number of Transmissions Measurement: Ch39, Packet 3-DH1

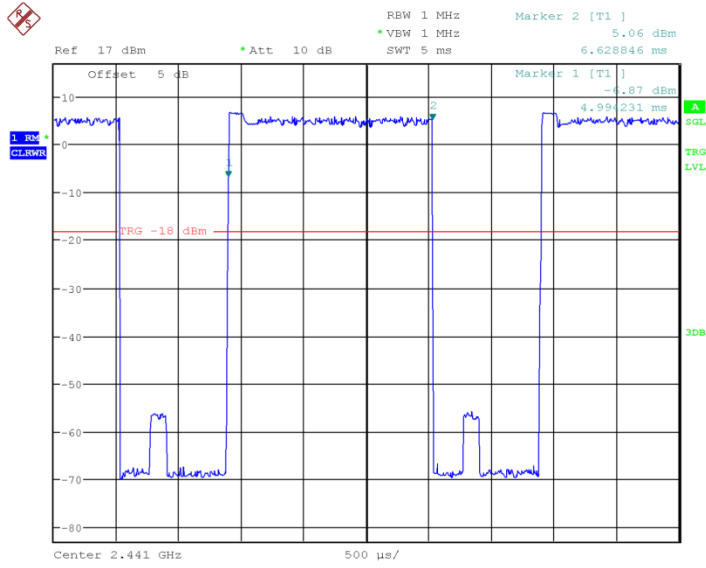


Fig.74 Time of occupancy (Dwell Time): Ch39,Packet 3-DH3

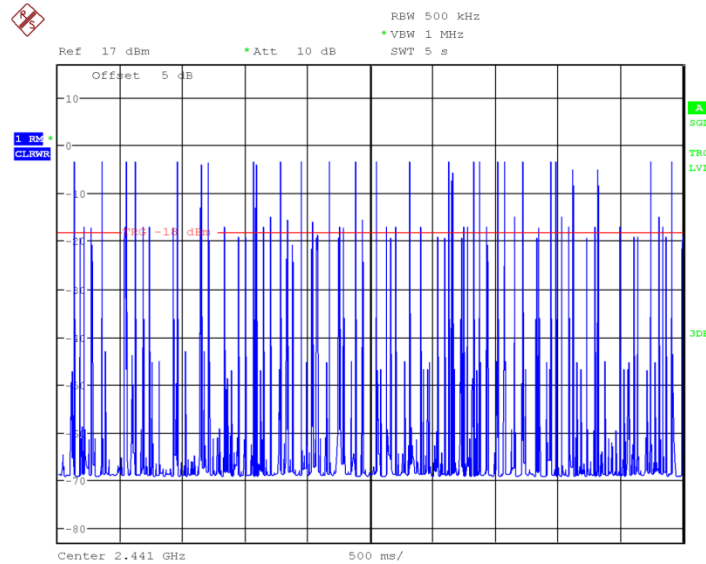


Fig.75 Number of Transmissions Measurement: Ch39, Packet 3-DH3

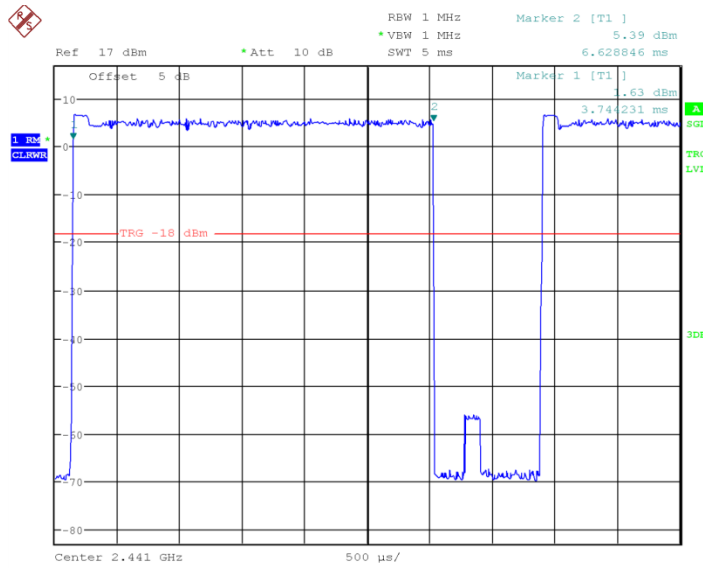


Fig.76 Time of occupancy (Dwell Time): Ch39,Packet 3-DH5

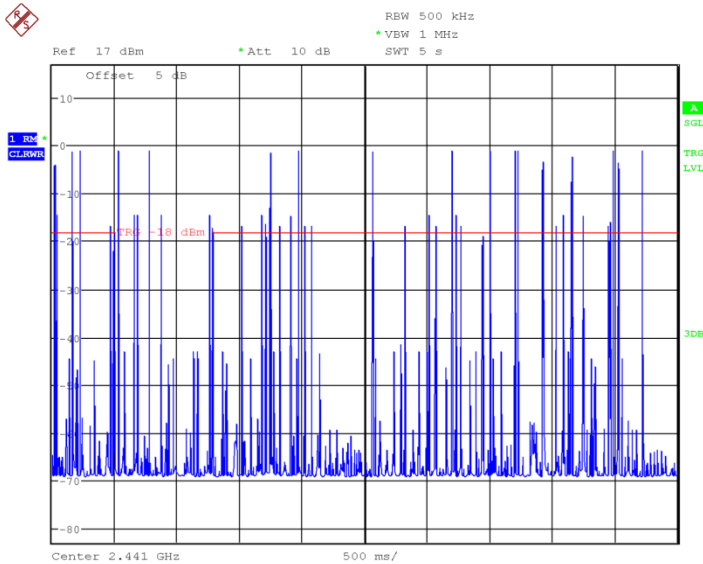


Fig.77 Number of Transmissions Measurement: Ch39, Packet 3-DH5

6.6. 20dB Bandwidth

6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a) (1)	N/A

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

Measurement Result:

For GFSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.78	1.034	P
39	Fig.79	1.029	P
78	Fig.80	1.029	P

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.81	1.24	P
39	Fig.82	1.221	P
78	Fig.83	1.221	P

For 8DPSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig.84	1.279	P
39	Fig.85	1.279	P
78	Fig.86	1.274	P

Conclusion: PASS

Test graphs as below:

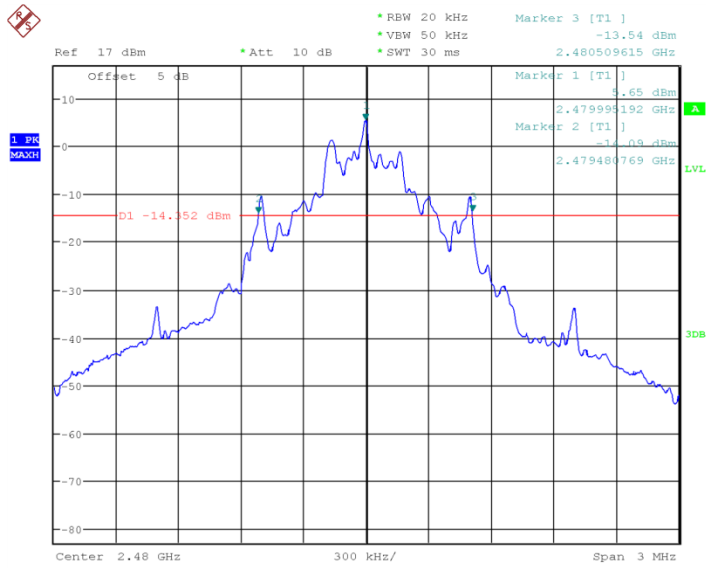


Fig.80 20dB Bandwidth: GFSK, Ch78

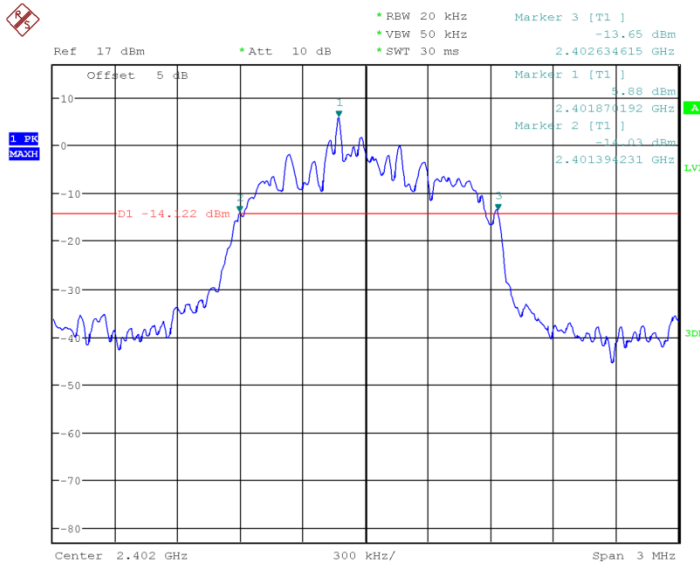


Fig.81 20dB Bandwidth: $\pi/4$ DQPSK, Ch0

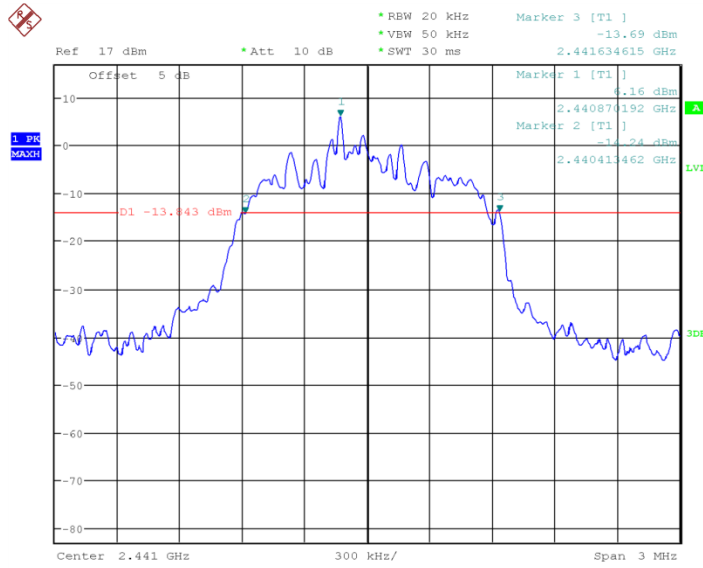


Fig.82 20dB Bandwidth: $\pi/4$ DQPSK, Ch39

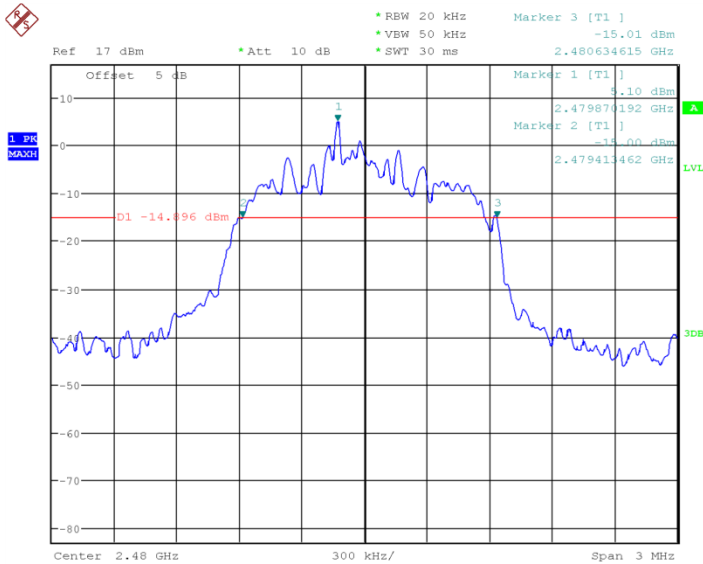


Fig.83 20dB Bandwidth: $\pi/4$ DQPSK, Ch78

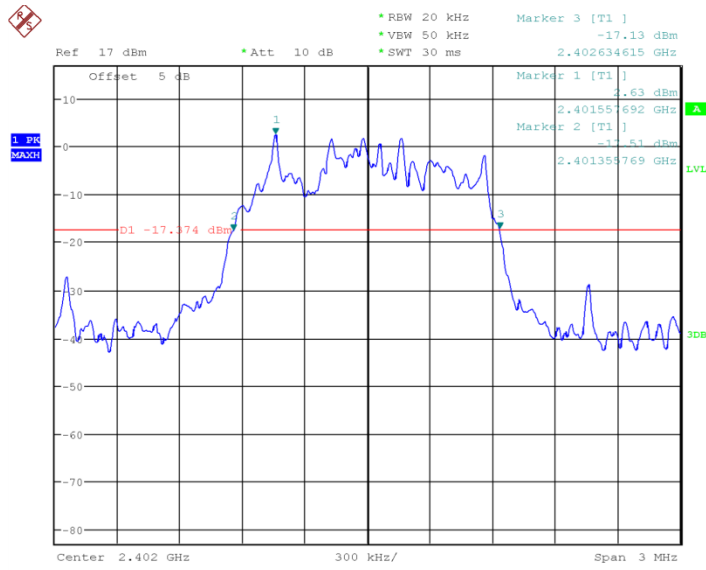


Fig.84 20dB Bandwidth: 8DPSK, Ch0

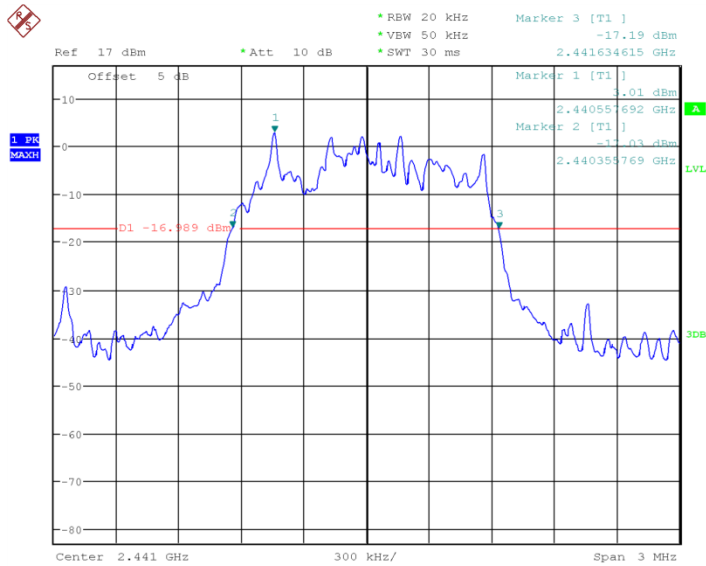


Fig.85 20dB Bandwidth: 8DPSK, Ch39

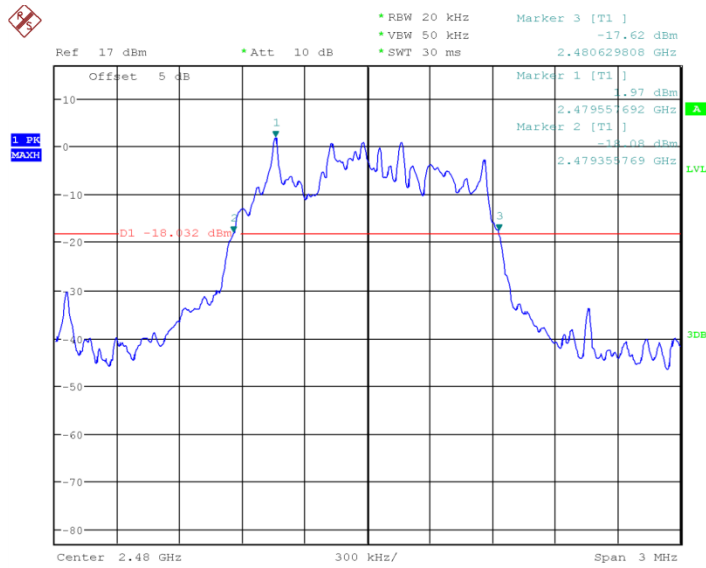


Fig.86 20dB Bandwidth: 8DPSK, Ch78

6.7. Carrier Frequency Separation

6.7.1 Measurement Limit:

Standard	Limit (KHz)
FCC 47 CFR Part 15.247 (a) (1)	Over 25KHz or (2/3)*20dB bandwidth

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

6.7.3 Measurement Result:

For GFSK

Channel	Carrier separation (KHz)	Conclusion
39	Fig.87 1028.8	P

For $\pi/4$ DQPSK

Channel	Carrier separation (KHz)		Conclusion
39	Fig.88	1009.6	P

For 8DPSK

Channel	Carrier separation (KHz)		Conclusion
39	Fig.89	980.8	P

Conclusion: PASS

Test graphs as below:

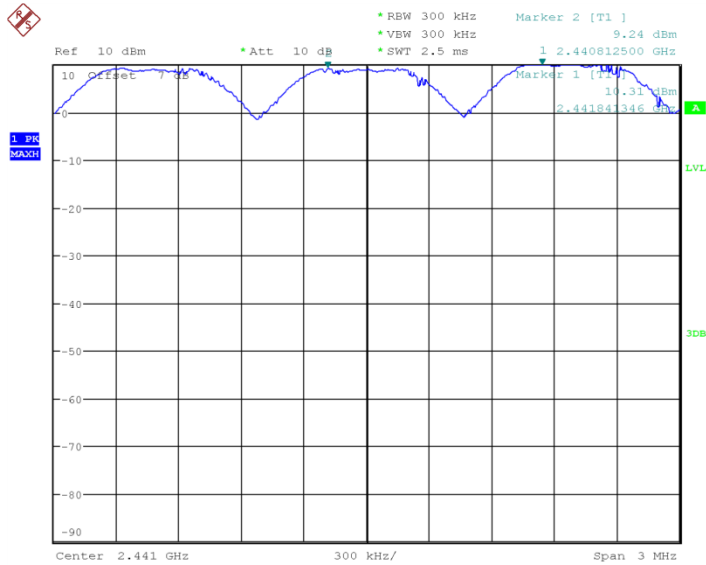


Fig.87 Carrier separation measurement: GFSK, Ch39

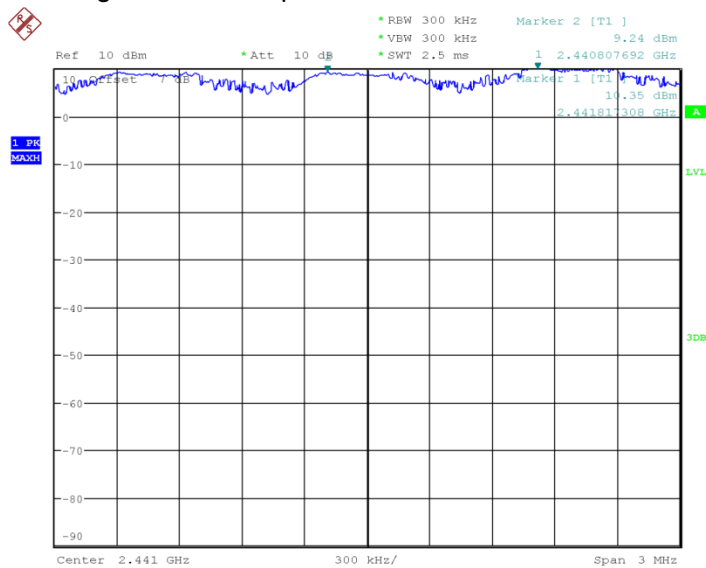


Fig.88 Carrier separation measurement: $\pi/4$ DQPSK, Ch39

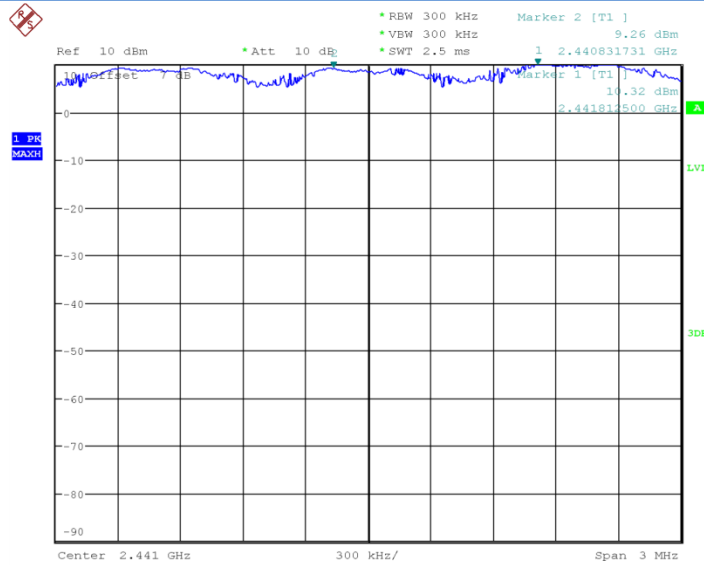


Fig.89 Carrier separation measurement: 8DPSK, Ch39

6.8. Number Of Hopping Channels

6.8.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels

6.8.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. $VBW \geq RBW$.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.

6.8.3 Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.90	79	P
40~78	Fig.91		P

For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.92	79	P
40~78	Fig.93		P

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		P

Conclusion: PASS

Test graphs as below:

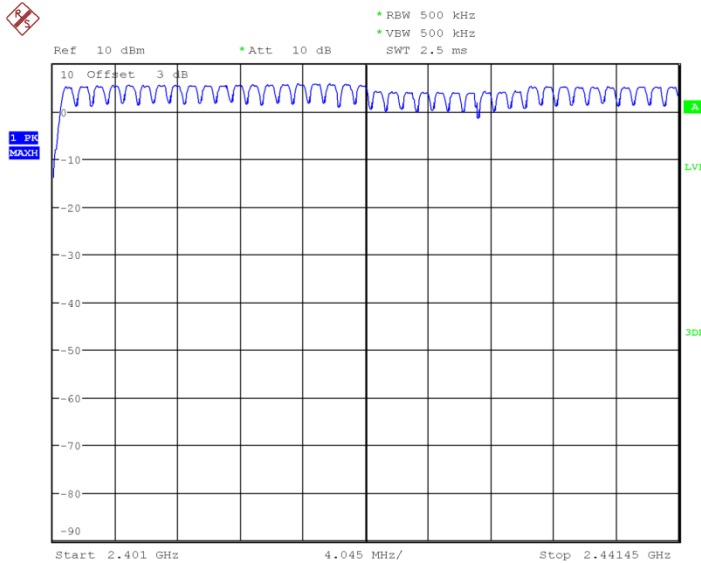


Fig.90 Number of hopping frequency: GFSK, Ch0~39

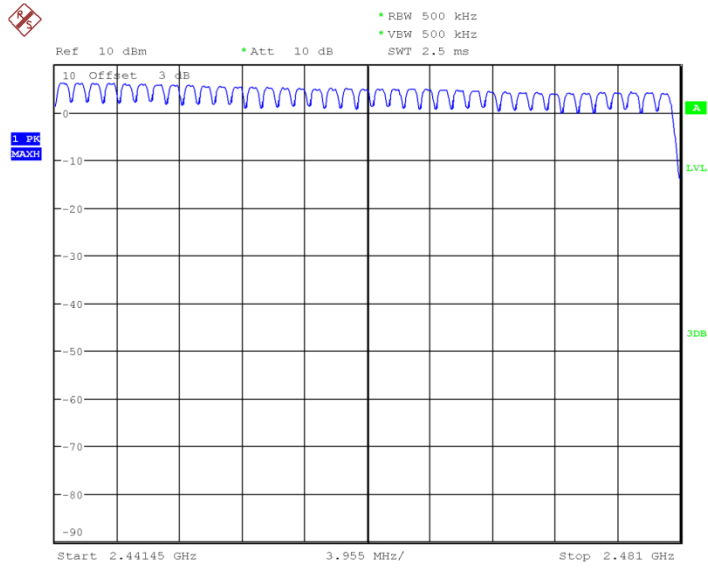


Fig.91 Number of hopping frequency: GFSK, Ch40~78

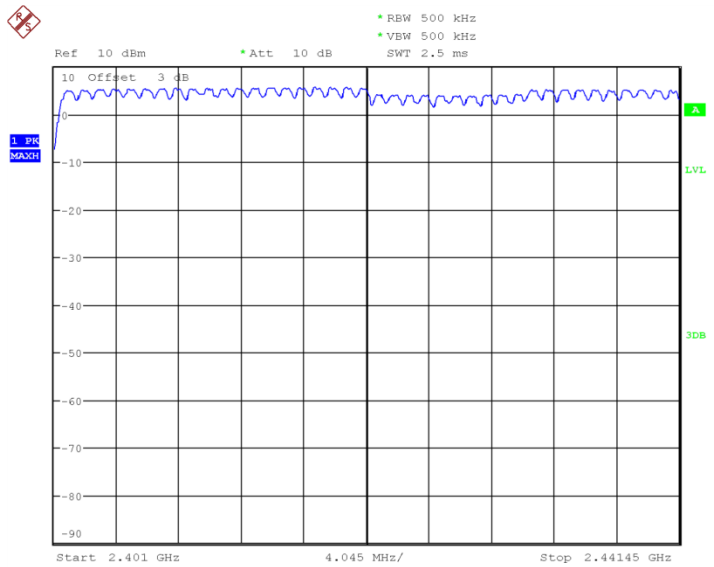


Fig.92 Number of hopping frequency: $\pi/4$ DQPSK, Ch0~39

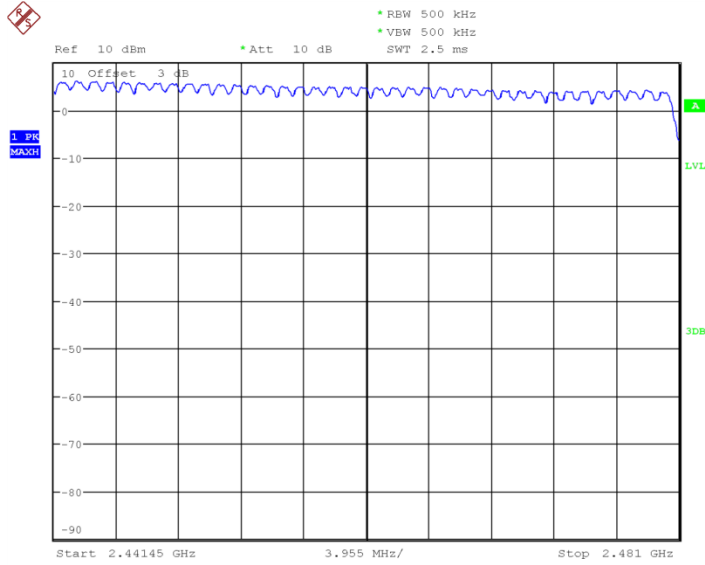


Fig.93 Number of hopping frequency: $\pi/4$ DQPSK, Ch40~78

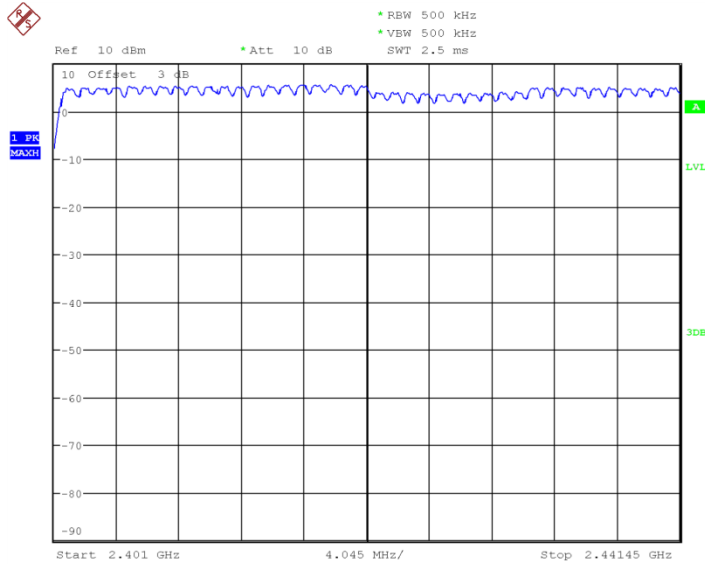


Fig.94 Number of hopping frequency: 8DPSK, Ch0~39

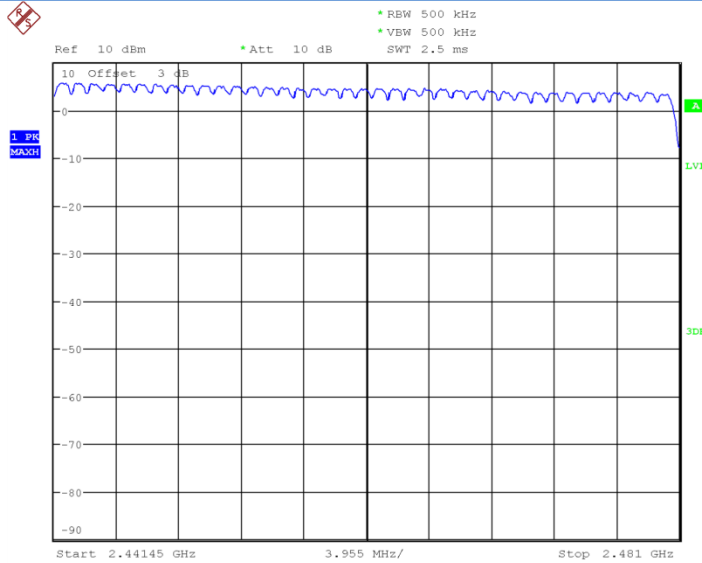


Fig.95 Number of hopping frequency: 8DPSK, Ch40~78

6.9. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by

the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Result (dBμV)	Conclusion
			With charger	
			BT	
0.15 to 0.5	66 to 56	56 to 46	Fig.96	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

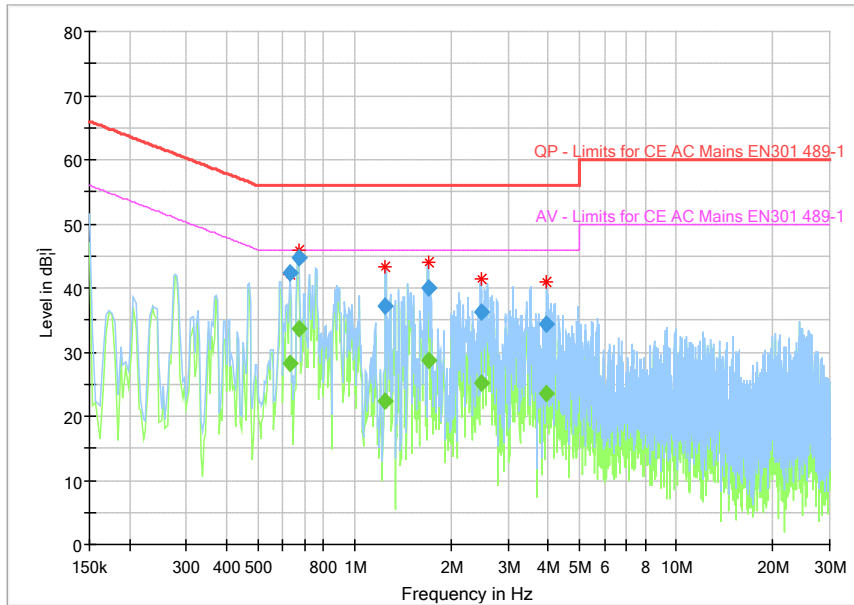


Fig.96 AC Powerline Conducted Emission

Frequency (MHz)	QuasiPeak (dB µV)	Average (dB µV)	Limit (dB µV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.631331	---	28.19	46.00	17.81	1000.0	9.000	L1	ON	9.7
0.631331	42.36	---	56.00	13.64	1000.0	9.000	L1	ON	9.7
0.668644	---	33.68	46.00	12.32	1000.0	9.000	L1	ON	9.7
0.668644	44.59	---	56.00	11.41	1000.0	9.000	L1	ON	9.7
1.246988	37.06	---	56.00	18.94	1000.0	9.000	N	ON	9.7
1.246988	---	22.29	46.00	23.71	1000.0	9.000	N	ON	9.7
1.694738	39.95	---	56.00	16.05	1000.0	9.000	L1	ON	9.7
1.694738	---	28.75	46.00	17.25	1000.0	9.000	L1	ON	9.7
2.474569	36.22	---	56.00	19.78	1000.0	9.000	L1	ON	9.7
2.474569	---	25.14	46.00	20.86	1000.0	9.000	L1	ON	9.7
3.959606	34.31	---	56.00	21.69	1000.0	9.000	L1	ON	9.7
3.959606	---	23.46	46.00	22.54	1000.0	9.000	L1	ON	9.7

7. Test Equipment and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal	FSQ26	101096	Rohde&Schwarz	2017-05-11	1 Year
2	DC Power Supply	ZUP60-14	LOC-220Z006	TDL-Lambda	2017-05-11	1 Year
3	Bluetooth Tester	CBT32	100785	Rohde&Schwarz	2017-05-11	1 Year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2017-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 metersx3.0 metersx2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 metersx10.9 metersx5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*******End The Report*******