

# FCC RADIO TEST REPORT

## FCC ID: 2AWAG-PINEPHONEPRO

**Product:** PINEPHONEPRO

**Trade Mark:** PINE64

**Model No.:** PINEPHONEPRO

**Family Model:** N/A

**Report No.:** S21101902807004

**Issue Date:** Nov 26. 2021

### Prepared for

Pine Store Limited

1906, 19/F., Ginza Plaza, 2A Sai Yeung Choi South Street,  
Mongkok, Kowloon, Hong Kong.

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China


Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

**TEST RESULT CERTIFICATION**

**Applicant's name** ..... : Pine Store Limited  
**Address** ..... : 1906, 19/F., Ginza Plaza, 2A Sai Yeung Choi South Street, Mongkok, Kowloon, Hong Kong.  
**Manufacturer's Name**..... : Pine Store Limited  
**Address** ..... : 1906, 19/F., Ginza Plaza, 2A Sai Yeung Choi South Street, Mongkok, Kowloon, Hong Kong.


**Product description**


**Product name**..... : PINEPHONEPRO  
**Trademark** ..... :  PINE64  
**Model and/or type reference** ..... : PINEPHONEPRO  
**Family Model**..... : N/A  
**Standards**..... : FCC Part15.407  
**Test procedure** ..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
 KDB 905462 D03 Client Without DFS New Rules v01r02  
 KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** .....  
**Date (s) of performance of tests** ..... Oct 19. 2021 ~ Nov 26. 2021  
**Date of Issue** ..... Nov 26. 2021  
**Test Result**..... **Pass**

Testing Engineer :   
 \_\_\_\_\_  
 (Mukzi Lee)

Authorized Signatory :   
 \_\_\_\_\_  
 (Alex Li)

**Table of Contents**

	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
<b>1 . GENERAL INFORMATION</b>	<b>9</b>
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	11
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
<b>2 . EMC EMISSION TEST</b>	<b>16</b>
2.1 CONDUCTED EMISSION MEASUREMENT	16
2.1.1 APPLICABLE STANDARD	16
2.1.2 CONFORMANCE LIMIT	16
2.1.3 TEST CONFIGURATION	16
2.1.4 TEST PROCEDURE	16
2.2 RADIATED EMISSION MEASUREMENT	25
2.2.1 APPLICABLE STANDARD	25
2.2.2 CONFORMANCE LIMIT	25
2.2.3 MEASURING INSTRUMENTS	25
2.2.4 TEST CONFIGURATION	26
2.2.5 TEST PROCEDURE	27
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	28
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	29
2.2.8 TEST RESULTS (1GHZ-18GHZ)	37
2.2.10 TEST RESULTS (18GHZ-40GHZ)	41
<b>3 . POWER SPECTRAL DENSITY TEST</b>	<b>52</b>
3.1 APPLIED PROCEDURES / LIMIT	52
3.2 TEST PROCEDURE	53
3.3 DEVIATION FROM STANDARD	53
3.4 TEST SETUP	53
3.5 EUT OPERATION CONDITIONS	53
3.6 TEST RESULTS	54
<b>4 . 26DB &amp; 99% EMISSION BANDWIDTH</b>	<b>55</b>
4.1 APPLIED PROCEDURES / LIMIT	55
4.2 TEST PROCEDURE	55
4.3 EUT OPERATION CONDITIONS	56
4.4 TEST RESULTS	56

**Table of Contents**

	<b>Page</b>
<b>5 . MINIMUM 6 DB BANDWIDTH</b>	<b>57</b>
5.1 APPLIED PROCEDURES / LIMIT	57
5.2 TEST PROCEDURE	57
5.3 DEVIATION FROM STANDARD	57
5.4 TEST SETUP	57
5.5 EUT OPERATION CONDITIONS	57
5.6 TEST RESULTS	58
<b>6 . MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>59</b>
6.1 PPLIED PROCEDURES / LIMIT	59
6.2 TEST RESULTS	61
<b>7 . OUT OF BAND EMISSIONS</b>	<b>62</b>
7.1 APPLICABLE STANDARD	62
7.2 TEST PROCEDURE	62
7.3 DEVIATION FROM STANDARD	63
7.4 TEST SETUP	63
7.5 EUT OPERATION CONDITIONS	63
7.6 TEST RESULTS	64
<b>8. FREQUENCY STABILITY MEASUREMENT</b>	<b>65</b>
8.1 LIMIT	65
8.2 TEST PROCEDURES	65
8.3 TEST SETUP LAYOUT	65
8.4 EUT OPERATION DURING TEST	65
8.5 TEST RESULTS	66
<b>9. DYNAMIC FREQUENCY SELECTION(DFS)</b>	<b>78</b>
9.1 APPLICABILITY OF DFS REQUIREMENTS	78
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	78
9.3 DFS RESPONSE REQUIREMENT VALUES	79
9.4 SHORT PULSE RADAR TEST WAVEFORMS	79
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	80
9.6 CONDUCTED CALIBRATION SETUP	80
9.7 RADAR WAVEFORM CALIBRATION RESULT	81
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	82
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

**Table of Contents**

	<b>Page</b>
<b>AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST</b>	<b>83</b>
<b>10. ANTENNA REQUIREMENT</b>	<b>84</b>
<b>10.1 STANDARD REQUIREMENT</b>	<b>84</b>
<b>10.2 EUT ANTENNA</b>	<b>84</b>

**Revision History**

Report No.	Version	Description	Issued Date
S21101902807004	Rev.01	Initial issue of report	Nov 26. 2021

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 3)

**NOTE:**

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP. When the information to be sent is missing or the operation fails, the device will automatically stop sending and directly connect to the AP correctly again.

**1.1 FACILITIES AND ACCREDITATIONS**

**FACILITIES**

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

**LABORATORY ACCREDITATIONS AND LISTINGS**

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.  
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.  
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China


**1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated( > 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$



**1. GENERAL INFORMATION**  
**1.1 GENERAL DESCRIPTION OF EUT**

Equipment	PINEPHONEPRO																		
Trade Mark	 PINE64																		
Model Name	PINEPHONEPRO																		
Family Model	N/A																		
Model Difference	N/A																		
FCC ID	2AWAG-PINEPHONEPRO																		
Product Description	<table border="1"> <tr> <td>Mode Supported</td> <td> <input checked="" type="checkbox"/>802.11a  <input checked="" type="checkbox"/>802.11n(HT20)  <input checked="" type="checkbox"/>802.11n(HT40)  <input checked="" type="checkbox"/>802.11ac(HT20)  <input checked="" type="checkbox"/>802.11ac(HT40)  <input checked="" type="checkbox"/>802.11ac(HT80)                 </td> </tr> <tr> <td>Data Rate</td> <td>802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9</td> </tr> <tr> <td>Modulation</td> <td>OFDM with BPSK/QPSK/16QAM/64QAM</td> </tr> <tr> <td>Operating Frequency Range</td> <td> <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz  <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz  <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz  <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz                 </td> </tr> <tr> <td>Function:</td> <td> <input type="checkbox"/>Outdoor AP <input type="checkbox"/>Indoor AP <input type="checkbox"/>Fixed P2P  <input checked="" type="checkbox"/>Client                 </td> </tr> <tr> <td>DFS type:</td> <td> <input type="checkbox"/>master devices  <input type="checkbox"/>Slave devices with radar detection  <input checked="" type="checkbox"/>Slave devices without radar detection                 </td> </tr> <tr> <td>Support TPC</td> <td> <input type="checkbox"/>YES  <input checked="" type="checkbox"/>NO                 </td> </tr> <tr> <td>Antenna Type</td> <td>PIFA antenna</td> </tr> <tr> <td>Antenna Gain</td> <td>1.64dBi</td> </tr> </table>	Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> 802.11ac(HT20) <input checked="" type="checkbox"/> 802.11ac(HT40) <input checked="" type="checkbox"/> 802.11ac(HT80)	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz	Function:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input checked="" type="checkbox"/> Client	DFS type:	<input type="checkbox"/> master devices <input type="checkbox"/> Slave devices with radar detection <input checked="" type="checkbox"/> Slave devices without radar detection	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	Antenna Type	PIFA antenna	Antenna Gain	1.64dBi
	Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> 802.11ac(HT20) <input checked="" type="checkbox"/> 802.11ac(HT40) <input checked="" type="checkbox"/> 802.11ac(HT80)																	
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9																	
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM																	
	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz																	
	Function:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input checked="" type="checkbox"/> Client																	
	DFS type:	<input type="checkbox"/> master devices <input type="checkbox"/> Slave devices with radar detection <input checked="" type="checkbox"/> Slave devices without radar detection																	
	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO																	
	Antenna Type	PIFA antenna																	
	Antenna Gain	1.64dBi																	
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.																			
Ratings	DC 3.8V from battery or DC 5V from type-c port.																		
Adapter	N/A																		
Battery	DC 3.8V, 3000mAh, 11.40Wh																		
Connecting I/O Port(s)	Please refer to the User's Manual																		
HW Version	Pinephonepro-V02-0911																		
SW Version	pinephone_pro_android9_1119.img																		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

## 1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

### 1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

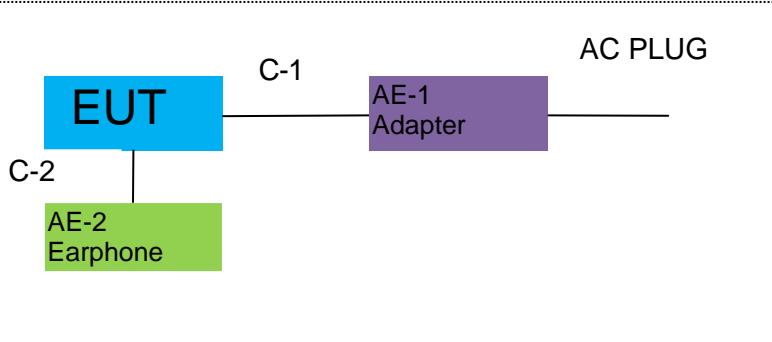

For Radiated Test Cases



For Conducted Test Cases

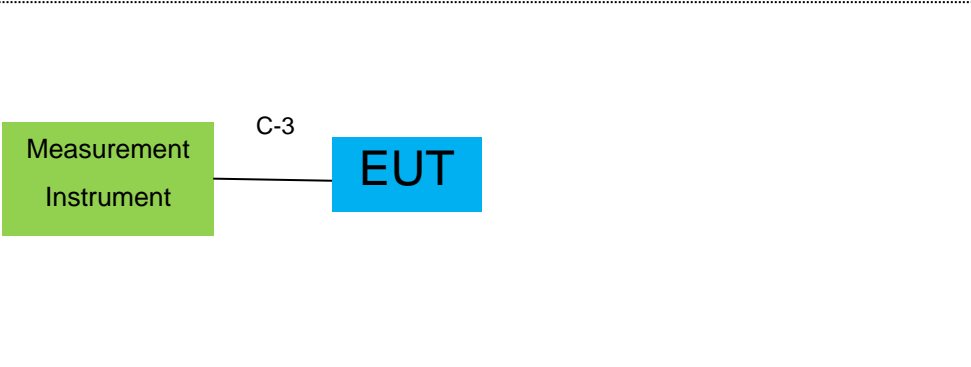

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

#### 1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals
AE-2	Earphone	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.2m	
C-2	Earphone Cable	NO	NO	1.2m	
C-3	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

### 1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2021.07.01	2022.06.30	1 year
4	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
8	Amplifier	EMC	EMC051835SE	980246	2021.07.01	2022.06.30	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2020.11.19 2021.11.07	2021.11.18 2022.11.06	1 year
10	Power Meter	DARE	RPR3006W	15100041SN084	2021.07.01	2022.06.30	1 year
11	USB RF Power Sensor	DARE	RPR3006W	15100041SN084	2021.07.01	2022.06.30	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2021.07.01	2022.06.30	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2019.08.06	2022.08.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2021.04.27	2022.04.26	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
18	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2021.04.27	2022.04.26	1 year
19	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.11.19 2021.11.07	2021.11.18 2022.11.06	1 year
20	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2021.04.27	2022.04.26	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
2	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2021.04.27	2022.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

## 2. EMC EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

#### 2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 2.1.3 TEST CONFIGURATION

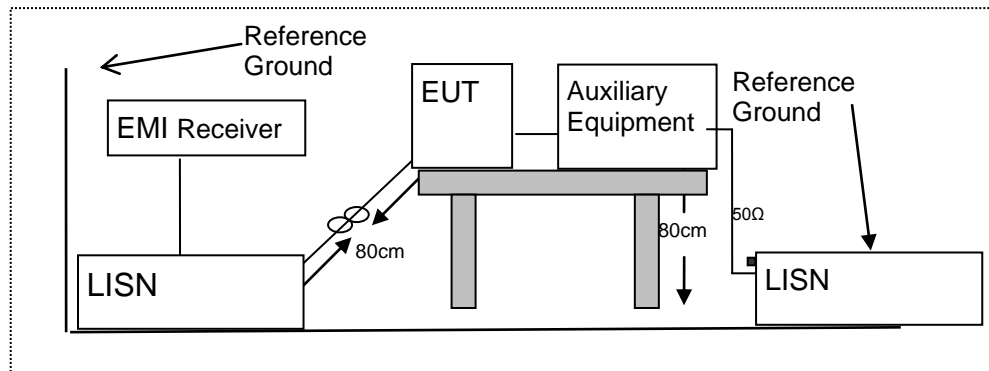

#### 2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.




EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1728	36.79	9.68	46.47	64.82	-18.35	QP
0.1728	25.95	9.68	35.63	54.82	-19.19	AVG
0.2038	35.00	9.63	44.63	63.45	-18.82	QP
0.2038	24.96	9.63	34.59	53.45	-18.86	AVG
0.2700	29.45	9.63	39.08	61.12	-22.04	QP
0.2700	18.29	9.63	27.92	51.12	-23.20	AVG
0.3870	23.72	9.64	33.36	58.13	-24.77	QP
0.3870	10.13	9.64	19.77	48.13	-28.36	AVG
0.5735	22.70	9.68	32.38	56.00	-23.62	QP
0.5735	13.96	9.68	23.64	46.00	-22.36	AVG
6.6699	28.83	9.69	38.52	60.00	-21.48	QP
6.6699	19.14	9.69	28.83	50.00	-21.17	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

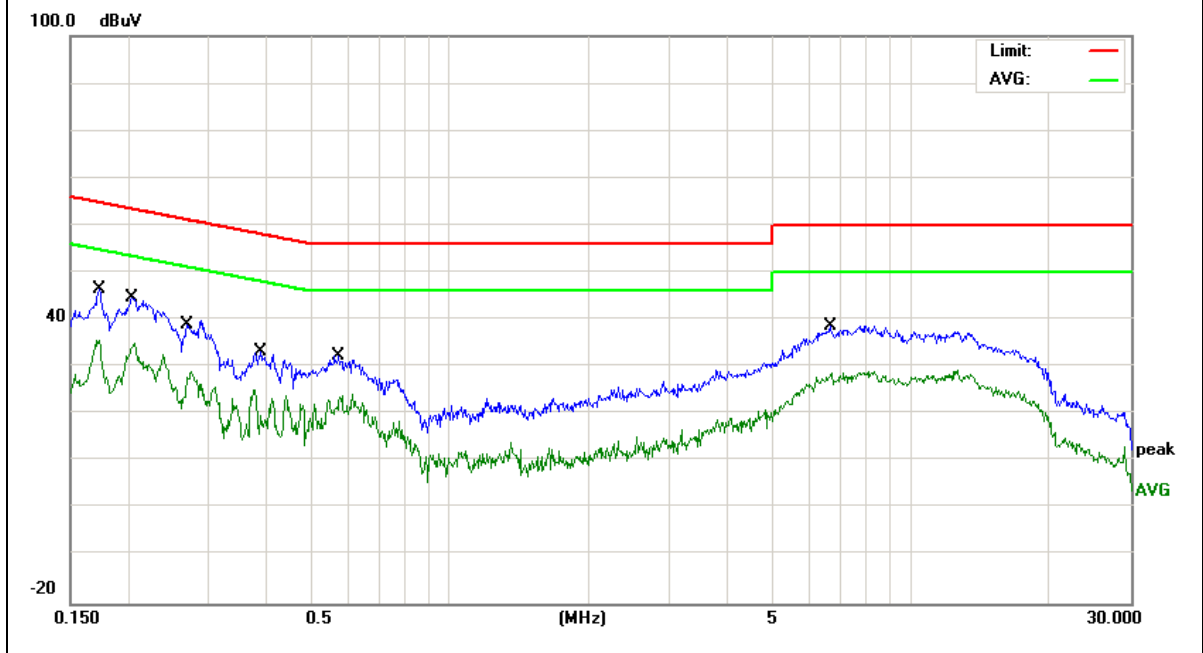


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1703	33.91	9.63	43.54	64.94	-21.40	QP
0.1703	22.23	9.63	31.86	54.94	-23.08	AVG
0.1912	31.25	9.63	40.88	63.98	-23.10	QP
0.1912	19.03	9.63	28.66	53.98	-25.32	AVG
0.4138	27.10	9.71	36.81	57.57	-20.76	QP
0.4138	21.63	9.71	31.34	47.57	-16.23	AVG
1.2257	23.20	9.73	32.93	56.00	-23.07	QP
1.2257	14.40	9.73	24.13	46.00	-21.87	AVG
7.5819	16.23	9.80	26.03	50.00	-23.97	AVG
7.5819	26.29	9.80	36.09	60.00	-23.91	QP
12.3856	18.85	9.77	28.62	50.00	-21.38	AVG
12.3856	27.80	9.77	37.57	60.00	-22.43	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

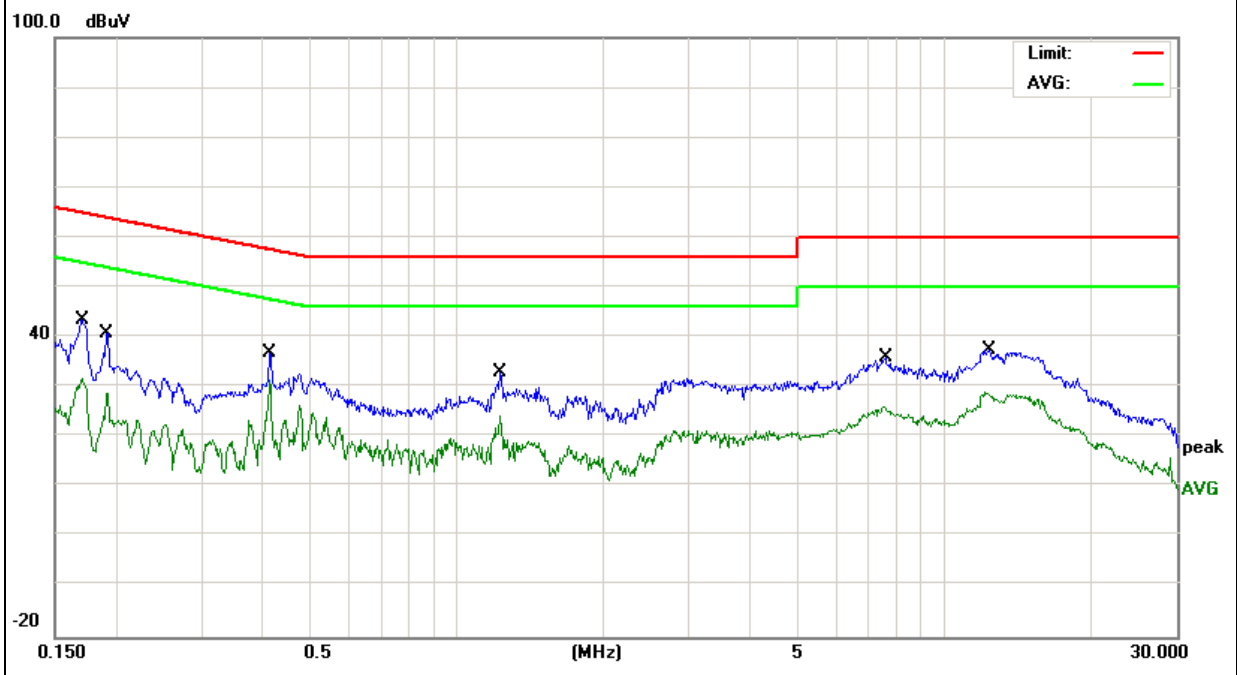


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1675	38.86	9.69	48.55	65.08	-16.53	QP
0.1675	27.86	9.69	37.55	55.08	-17.53	AVG
0.2006	36.14	9.63	45.77	63.58	-17.81	QP
0.2006	25.60	9.63	35.23	53.58	-18.35	AVG
0.2802	30.36	9.63	39.99	60.81	-20.82	QP
0.2802	20.35	9.63	29.98	50.81	-20.83	AVG
0.5655	24.61	9.67	34.28	56.00	-21.72	QP
0.5655	14.87	9.67	24.54	46.00	-21.46	AVG
4.7979	27.57	9.68	37.25	56.00	-18.75	QP
4.7979	16.73	9.68	26.41	46.00	-19.59	AVG
8.6499	31.76	9.70	41.46	60.00	-18.54	QP
8.6499	21.62	9.70	31.32	50.00	-18.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

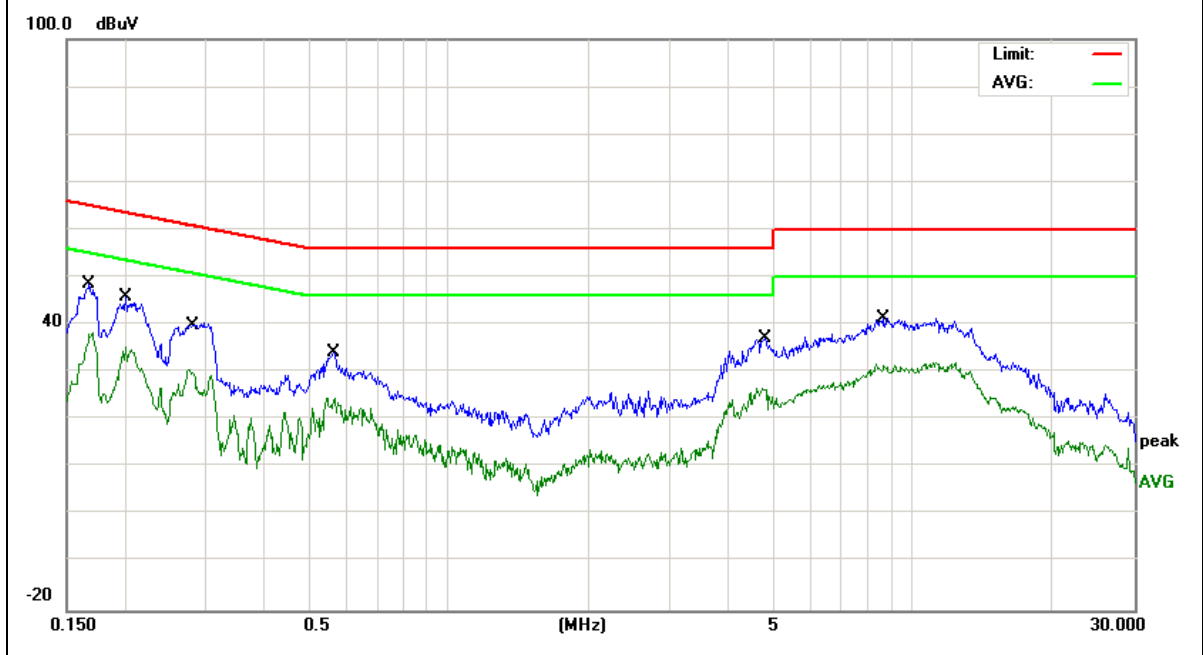


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1675	25.02	9.63	34.65	55.08	-20.43	AVG
0.1675	35.89	9.63	45.52	65.08	-19.56	QP
0.4465	26.89	9.72	36.61	56.94	-20.33	QP
0.4465	19.04	9.72	28.76	46.94	-18.18	AVG
1.4778	22.31	9.70	32.01	56.00	-23.99	QP
1.4778	11.24	9.70	20.94	46.00	-25.06	AVG
4.7538	24.23	9.78	34.01	56.00	-21.99	QP
4.7538	13.61	9.78	23.39	46.00	-22.61	AVG
7.7339	20.13	9.80	29.93	50.00	-20.07	AVG
7.7339	29.81	9.80	39.61	60.00	-20.39	QP
11.6935	24.59	9.79	34.38	50.00	-15.62	AVG
11.6935	33.19	9.79	42.98	60.00	-17.02	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

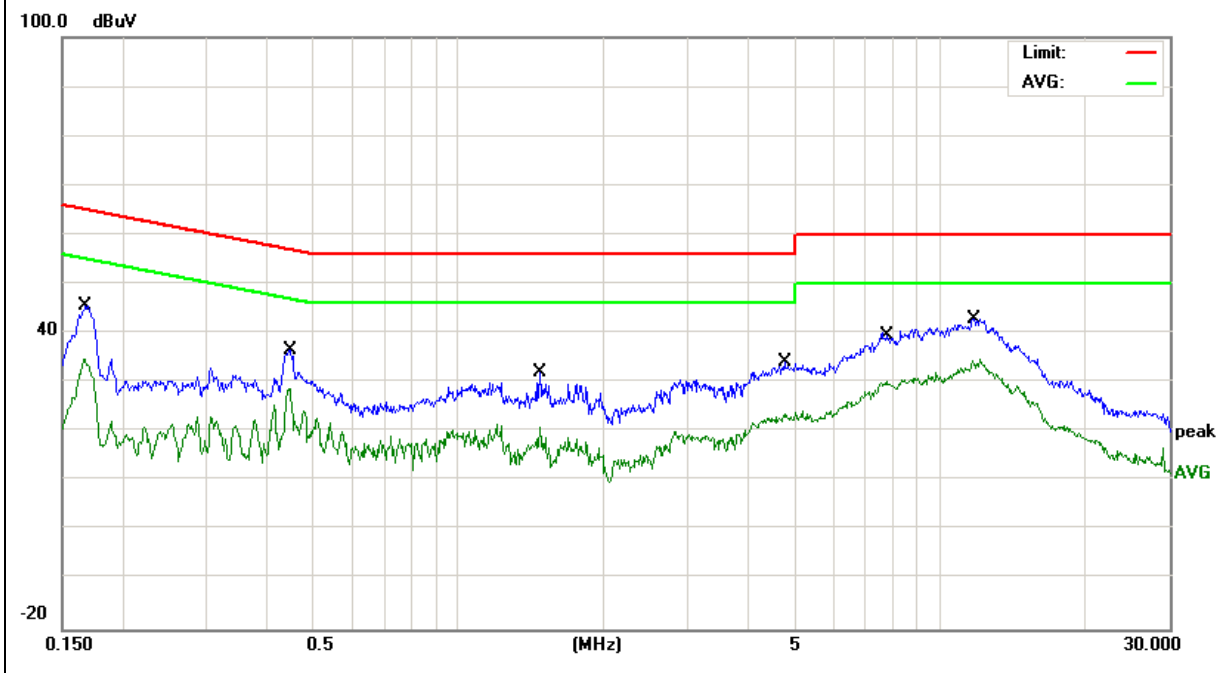


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1711	37.29	9.69	46.98	64.90	-17.92	QP
0.1711	27.85	9.69	37.54	54.90	-17.36	AVG
0.2419	23.18	9.63	32.81	52.03	-19.22	AVG
0.2419	33.76	9.63	43.39	62.03	-18.64	QP
0.3099	28.93	9.63	38.56	59.97	-21.41	QP
0.3099	20.01	9.63	29.64	49.97	-20.33	AVG
0.4460	24.24	9.64	33.88	56.95	-23.07	QP
0.4460	15.35	9.64	24.99	46.95	-21.96	AVG
3.7820	28.22	9.68	37.90	56.00	-18.10	QP
3.7820	17.29	9.68	26.97	46.00	-19.03	AVG
7.8939	34.56	9.70	44.26	60.00	-15.74	QP
7.8939	24.47	9.70	34.17	50.00	-15.83	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

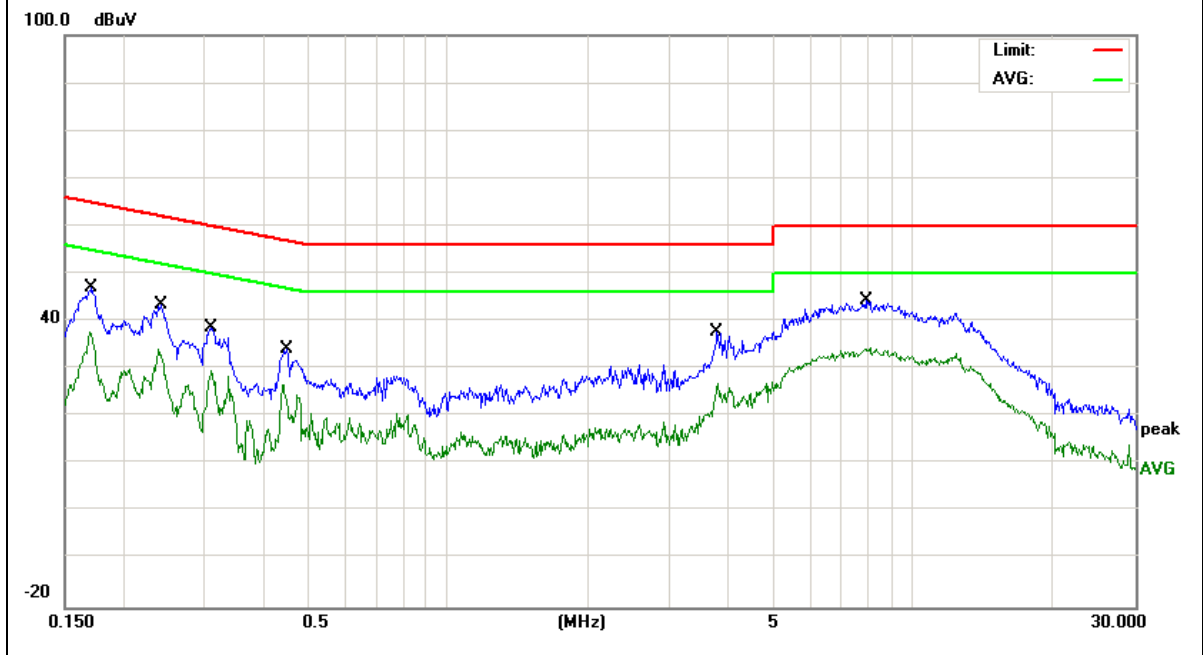


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1872	33.10	9.63	42.73	64.16	-21.43	QP
0.1872	20.70	9.63	30.33	54.16	-23.83	AVG
0.4460	26.25	9.72	35.97	56.95	-20.98	QP
0.4460	18.49	9.72	28.21	46.95	-18.74	AVG
1.4778	21.31	9.70	31.01	56.00	-24.99	QP
1.4778	10.24	9.70	19.94	46.00	-26.06	AVG
4.8379	25.52	9.78	35.30	56.00	-20.70	QP
4.8379	15.37	9.78	25.15	46.00	-20.85	AVG
8.3215	33.15	9.80	42.95	60.00	-17.05	QP
8.3215	23.19	9.80	32.99	50.00	-17.01	AVG
11.7819	33.70	9.78	43.48	60.00	-16.52	QP
11.7819	24.98	9.78	34.76	50.00	-15.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

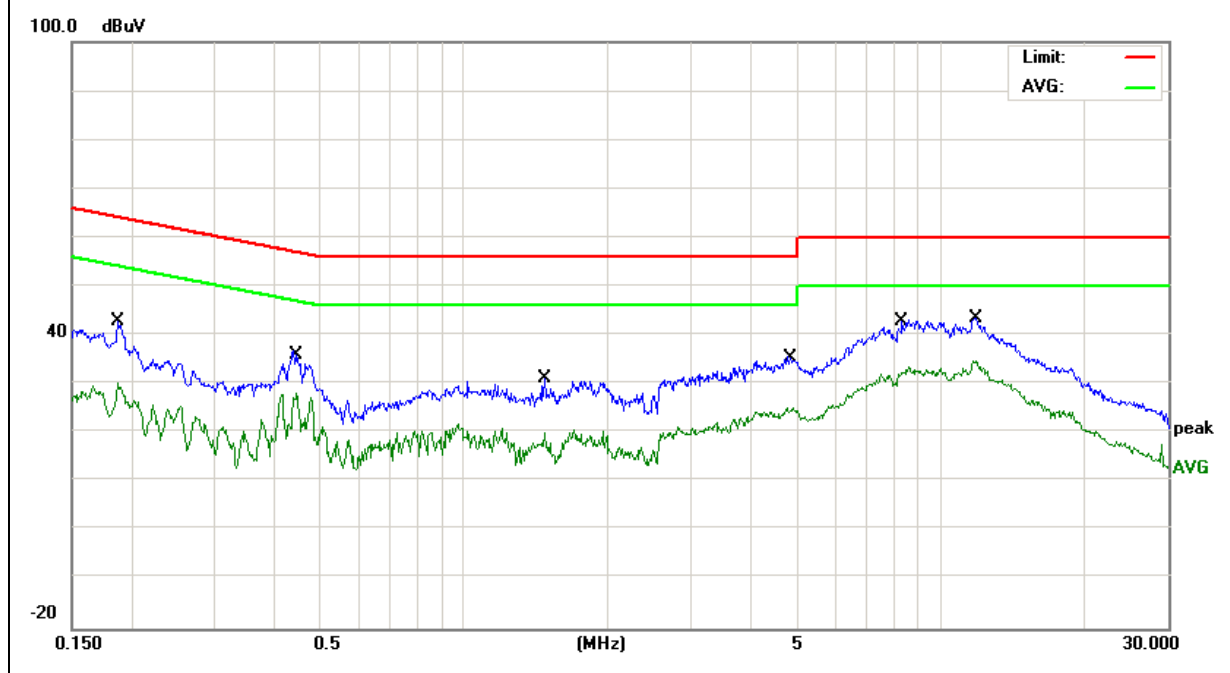


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1685	30.32	9.69	40.01	65.03	-25.02	QP
0.1685	21.15	9.69	30.84	55.03	-24.19	AVG
0.2379	38.40	9.63	48.03	62.17	-14.14	QP
0.2379	29.64	9.63	39.27	52.17	-12.90	AVG
0.4460	27.24	9.64	36.88	56.95	-20.07	QP
0.4460	18.35	9.64	27.99	46.95	-18.96	AVG
0.5735	24.70	9.68	34.38	56.00	-21.62	QP
0.5735	15.96	9.68	25.64	46.00	-20.36	AVG
3.8180	24.01	9.68	33.69	56.00	-22.31	QP
3.8180	13.79	9.68	23.47	46.00	-22.53	AVG
9.1416	31.67	9.71	41.38	60.00	-18.62	QP
9.1416	22.71	9.71	32.42	50.00	-17.58	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

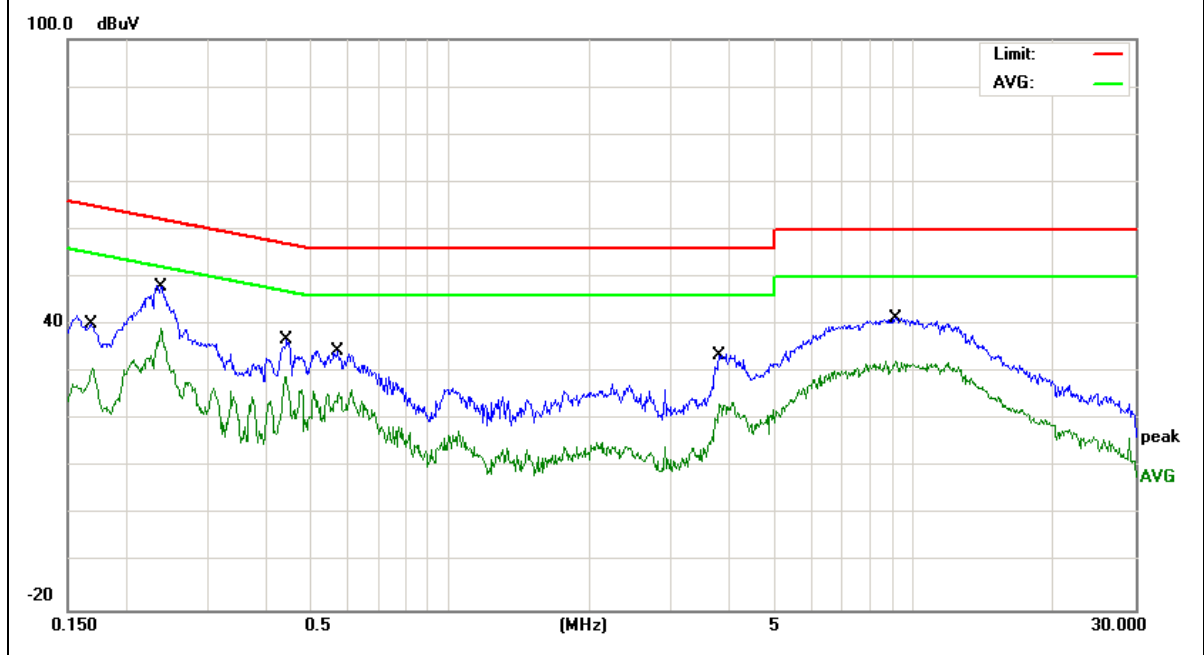


EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1700	21.98	9.63	31.61	54.96	-23.35	AVG
0.1700	33.83	9.63	43.46	64.96	-21.50	QP
0.2700	26.36	9.65	36.01	61.12	-25.11	QP
0.2700	17.62	9.65	27.27	51.12	-23.8	AVG
0.4138	23.60	9.71	33.31	57.57	-24.26	QP
0.4138	18.13	9.71	27.84	47.57	-19.73	AVG
0.8296	17.52	9.68	27.20	46.00	-18.80	AVG
0.8296	26.03	9.68	35.71	56.00	-20.29	QP
9.4496	31.97	9.81	41.78	60.00	-18.22	QP
9.4496	22.60	9.81	32.41	50.00	-17.59	AVG
11.5014	33.36	9.79	43.15	60.00	-16.85	QP
11.5014	25.01	9.79	34.80	50.00	-15.20	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

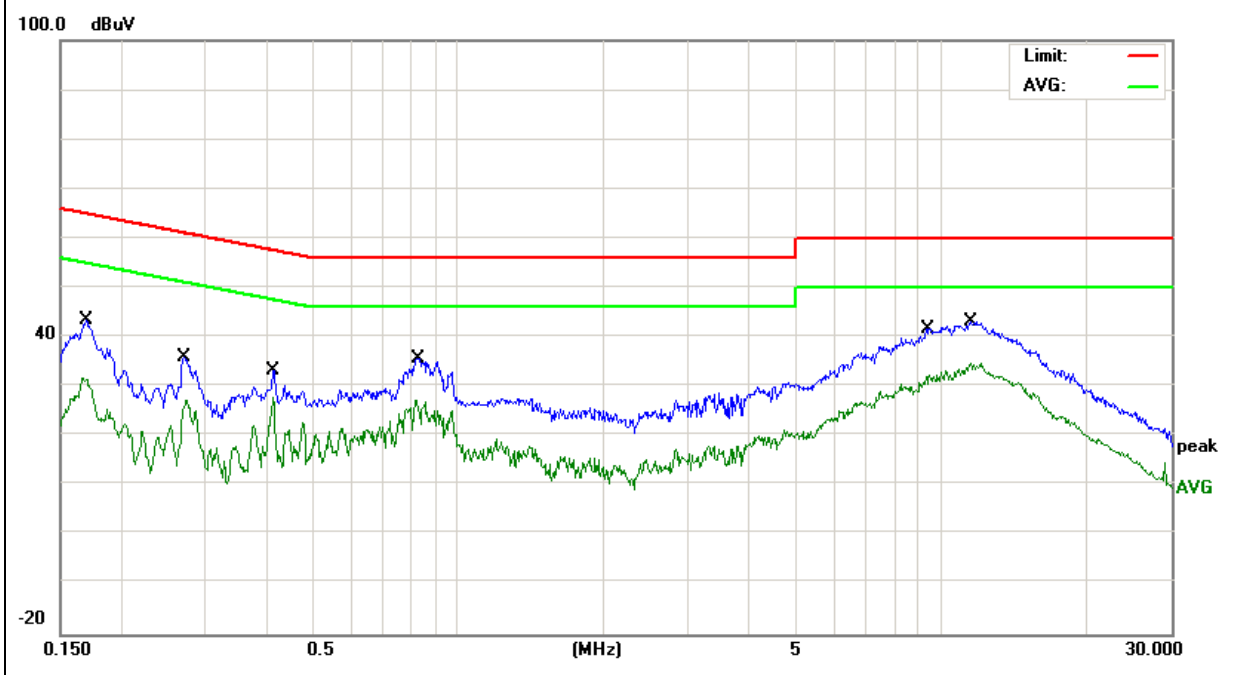



## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

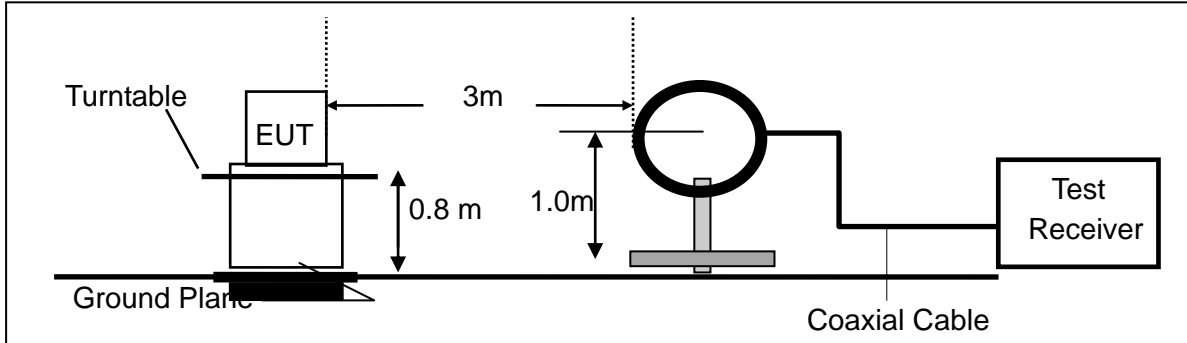

(b) For radiated emissions from 30MHz to 1000MHz

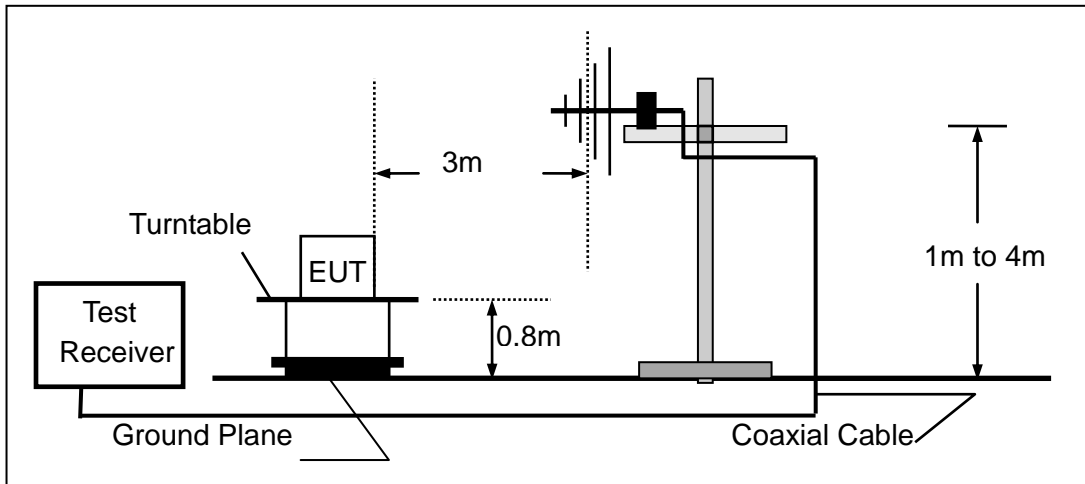

(c) For radiated emissions above 1000MHz

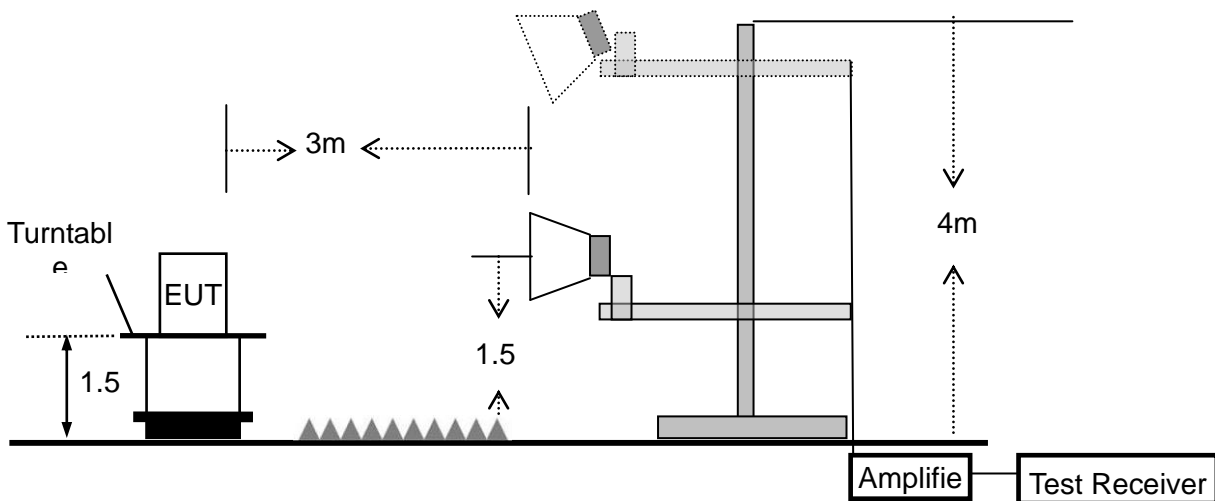

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 * \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**2.2.6 TEST RESULTS (9KHZ – 30 MHZ)**

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G)- 802.11ac80 (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.6374	6.88	24.55	31.43	40.00	-8.57	QP
V	39.8541	11.35	19.02	30.37	40.00	-9.63	QP
V	43.3534	11.73	17.20	28.93	40.00	-11.07	QP
V	135.5062	15.00	18.81	33.81	43.50	-9.69	QP
V	701.7607	5.28	30.91	36.19	46.00	-9.81	QP
V	912.8618	4.79	33.87	38.66	46.00	-7.34	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

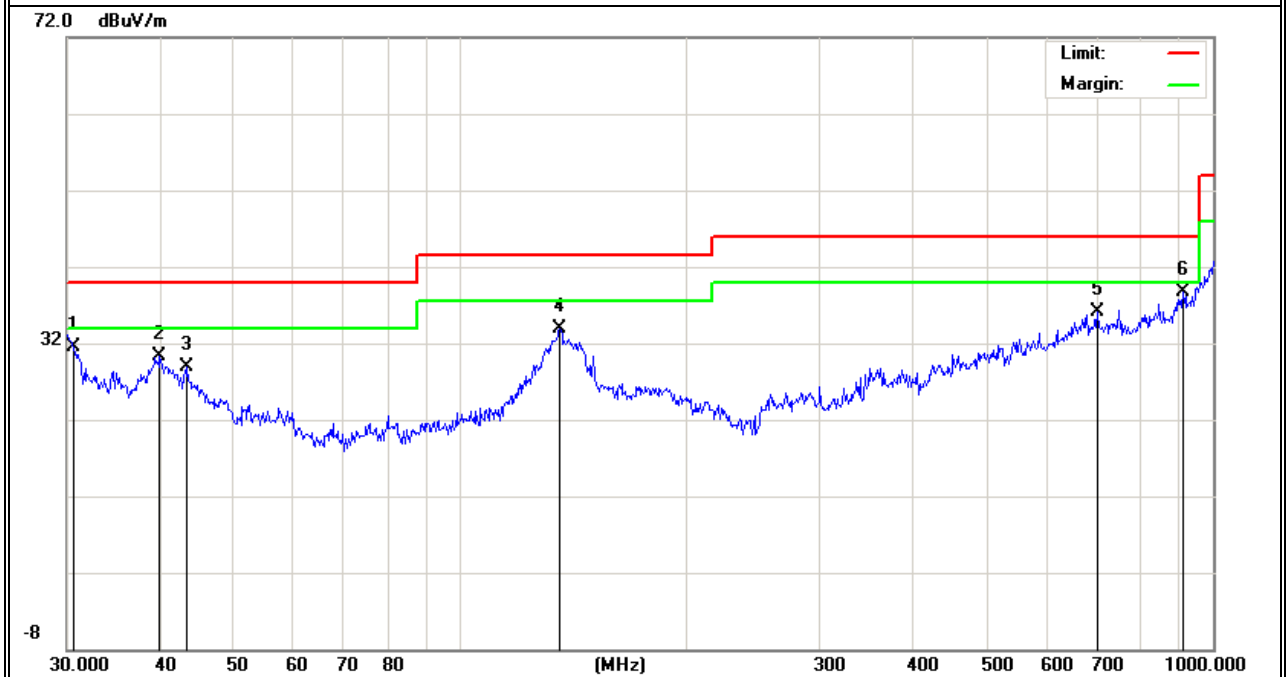

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.3170	4.40	24.88	29.28	40.00	-10.72	QP
H	33.6802	4.09	22.18	26.27	40.00	-13.73	QP
H	74.9191	12.11	13.19	25.30	40.00	-14.70	QP
H	158.1123	11.58	18.56	30.14	43.50	-13.36	QP
H	386.6338	4.97	24.57	29.54	46.00	-16.46	QP
H	872.1832	5.36	33.37	38.73	46.00	-7.27	QP

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

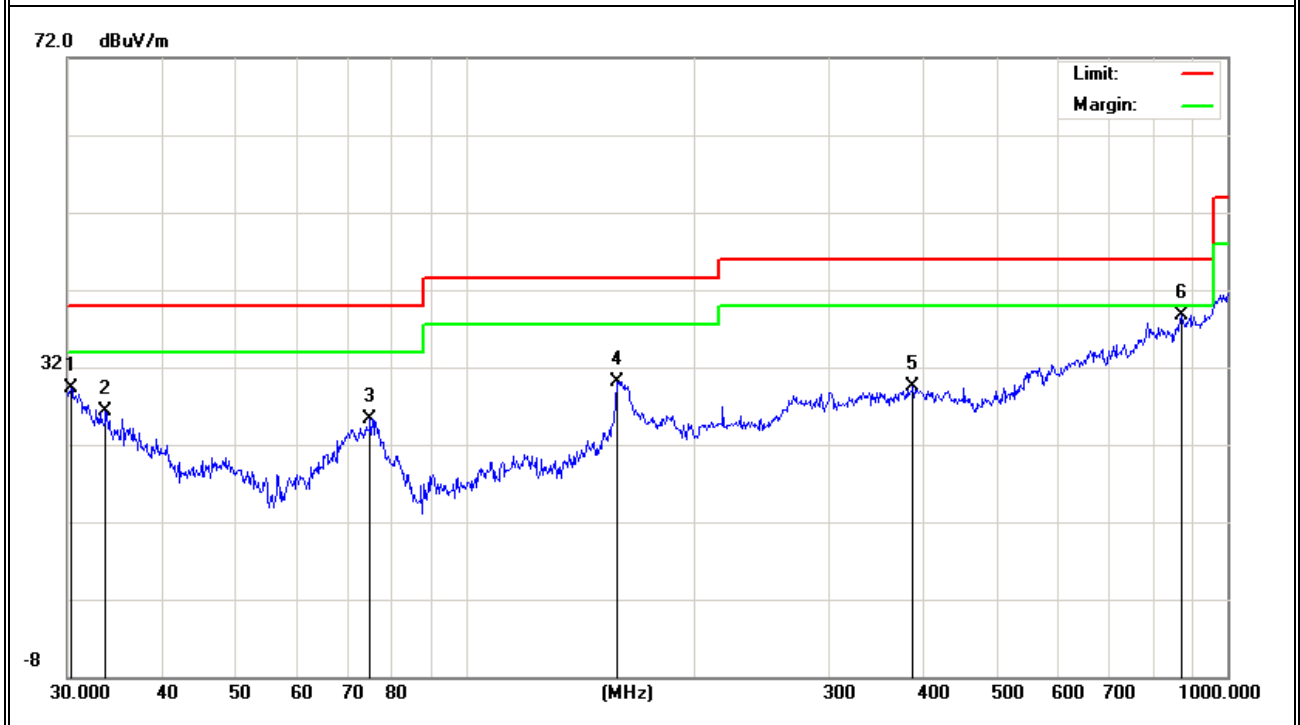


EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.3G)- 802.11n20 (Middle CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.5304	6.33	24.66	30.99	40.00	-9.01	QP
V	39.9941	11.98	19.01	30.99	40.00	-9.01	QP
V	135.0319	10.36	18.74	29.10	43.50	-14.40	QP
V	300.3672	8.49	21.89	30.38	46.00	-15.62	QP
V	679.9600	6.30	30.86	37.16	46.00	-8.84	QP
V	912.8618	6.29	33.87	40.16	46.00	-5.84	QP

**Remark:**


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

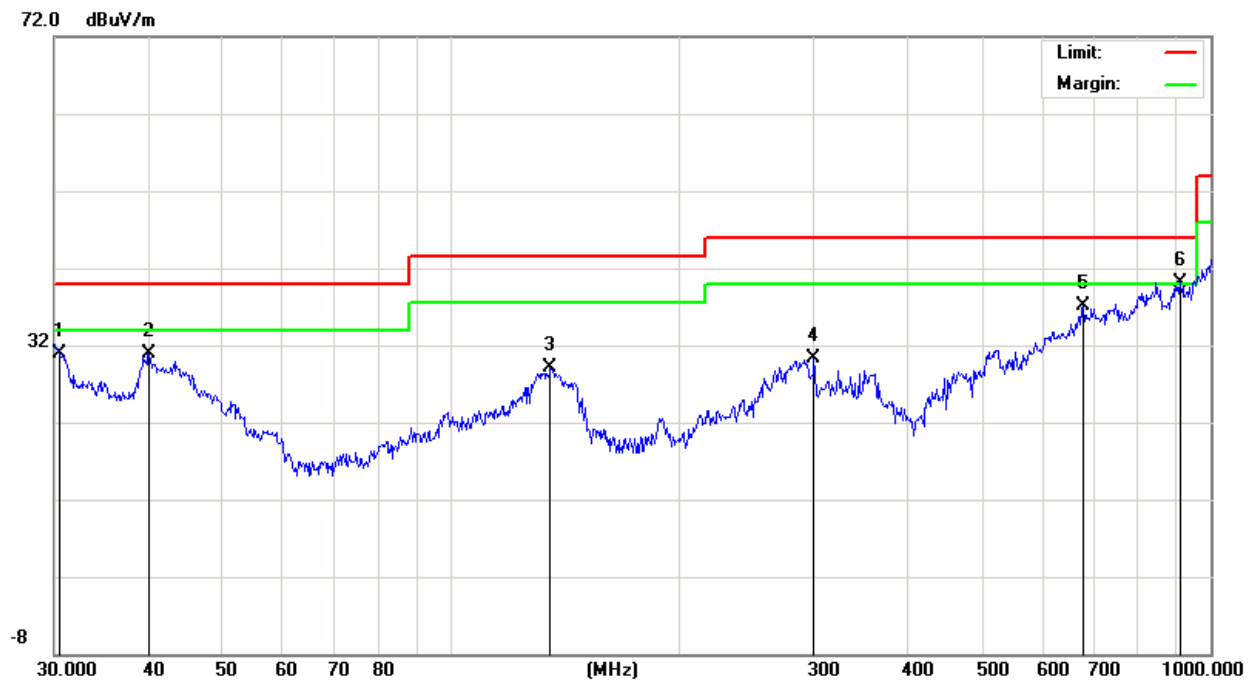

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.3170	3.40	24.88	28.28	40.00	-11.72	QP
H	66.4989	15.10	12.29	27.39	40.00	-12.61	QP
H	74.9191	18.11	13.19	31.30	40.00	-8.70	QP
H	183.8437	15.34	16.76	32.10	43.50	-11.40	QP
H	684.7454	0.50	30.82	31.32	46.00	-14.68	QP
H	893.867	2.99	33.68	36.67	46.00	-9.33	QP

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

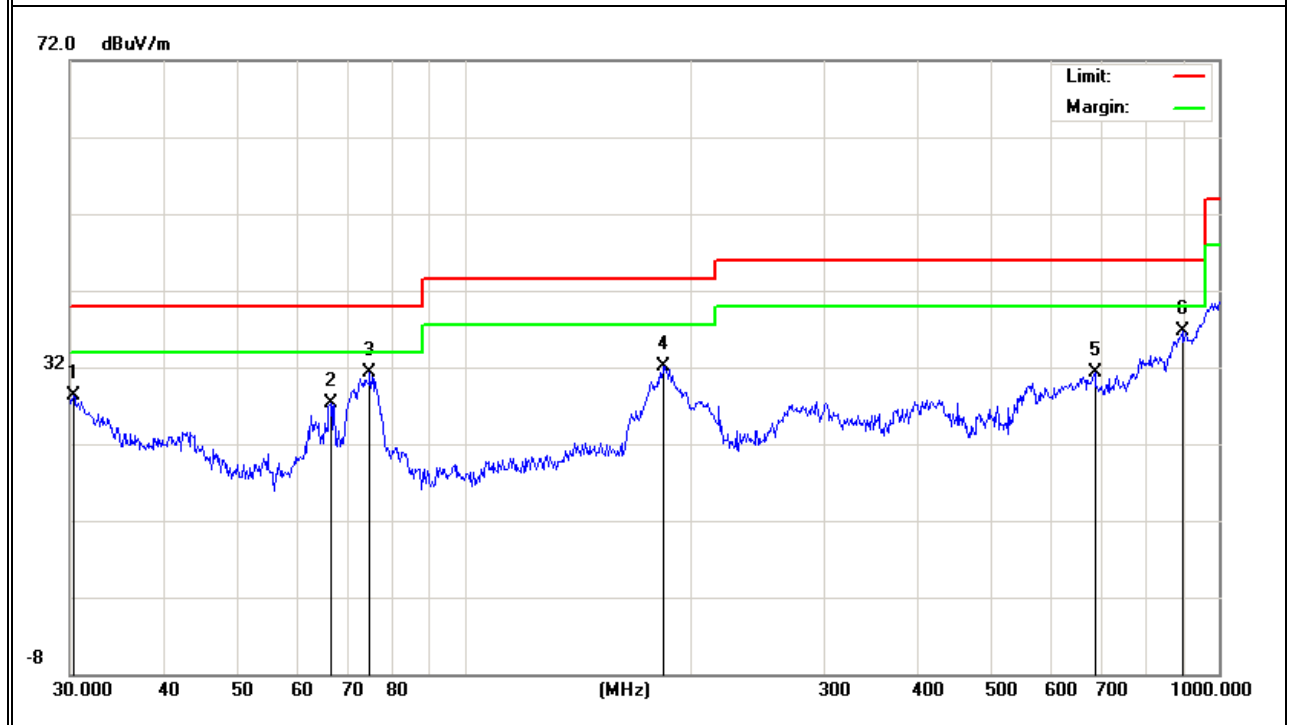




EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.6G)- 802.11ac80 (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.5304	6.33	24.66	30.99	40.00	-9.01	QP
V	39.8541	5.85	19.02	24.87	40.00	-15.13	QP
V	80.0806	11.31	14.14	25.45	40.00	-14.55	QP
V	156.4576	12.10	18.52	30.62	43.50	-12.88	QP
V	361.7139	4.06	23.70	27.76	46.00	-18.24	QP
V	900.1471	3.97	33.81	37.78	46.00	-8.22	QP

**Remark:**


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

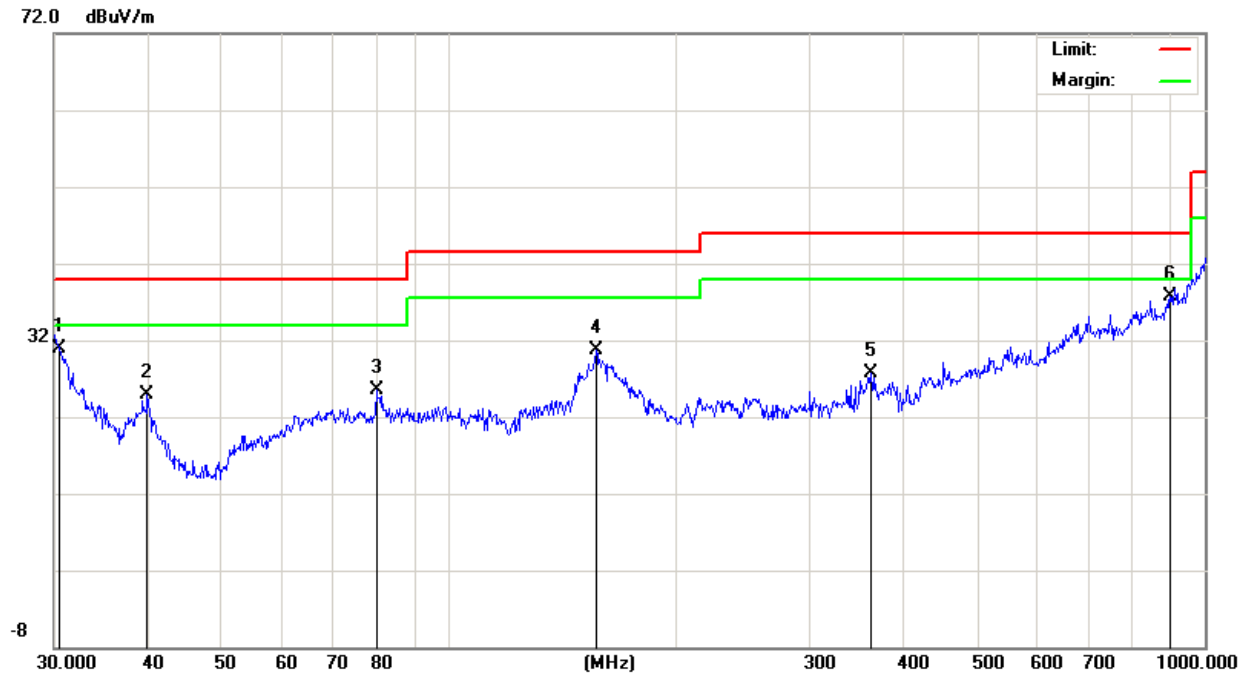

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.0701	5.37	24.07	29.44	40.00	-10.56	QP
H	33.6802	6.09	22.18	28.27	40.00	-11.73	QP
H	66.2660	11.39	12.25	23.64	40.00	-16.36	QP
H	159.7844	7.99	18.61	26.60	43.50	-16.90	QP
H	293.0842	8.04	21.41	29.45	46.00	-16.55	QP
H	785.0932	2.00	32.19	34.19	46.00	-11.81	QP

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

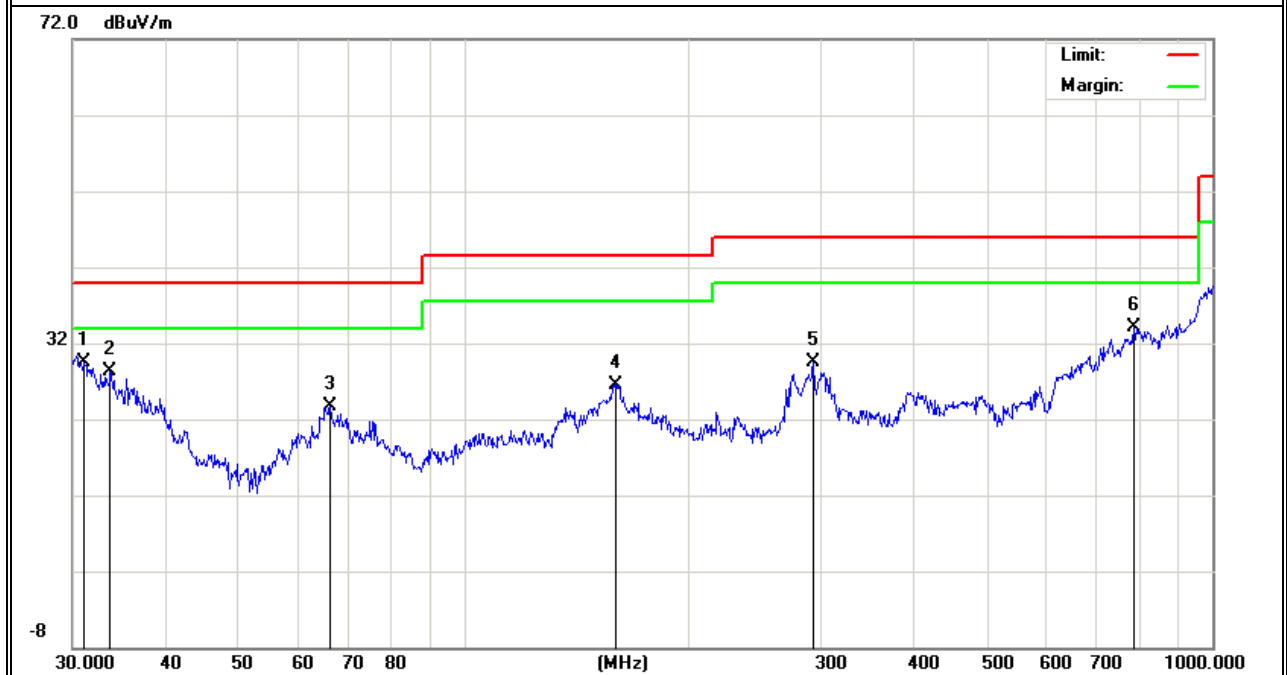


EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.8G) - 802.11n40 (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.3170	6.48	24.88	31.36	40.00	-8.64	QP
V	59.0251	14.90	11.65	26.55	40.00	-13.45	QP
V	135.5062	12.50	18.81	31.31	43.50	-12.19	QP
V	487.3149	3.16	27.00	30.16	46.00	-15.84	QP
V	670.4891	1.87	30.82	32.69	46.00	-13.31	QP
V	912.8618	2.79	33.87	36.66	46.00	-9.34	QP

**Remark:**


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

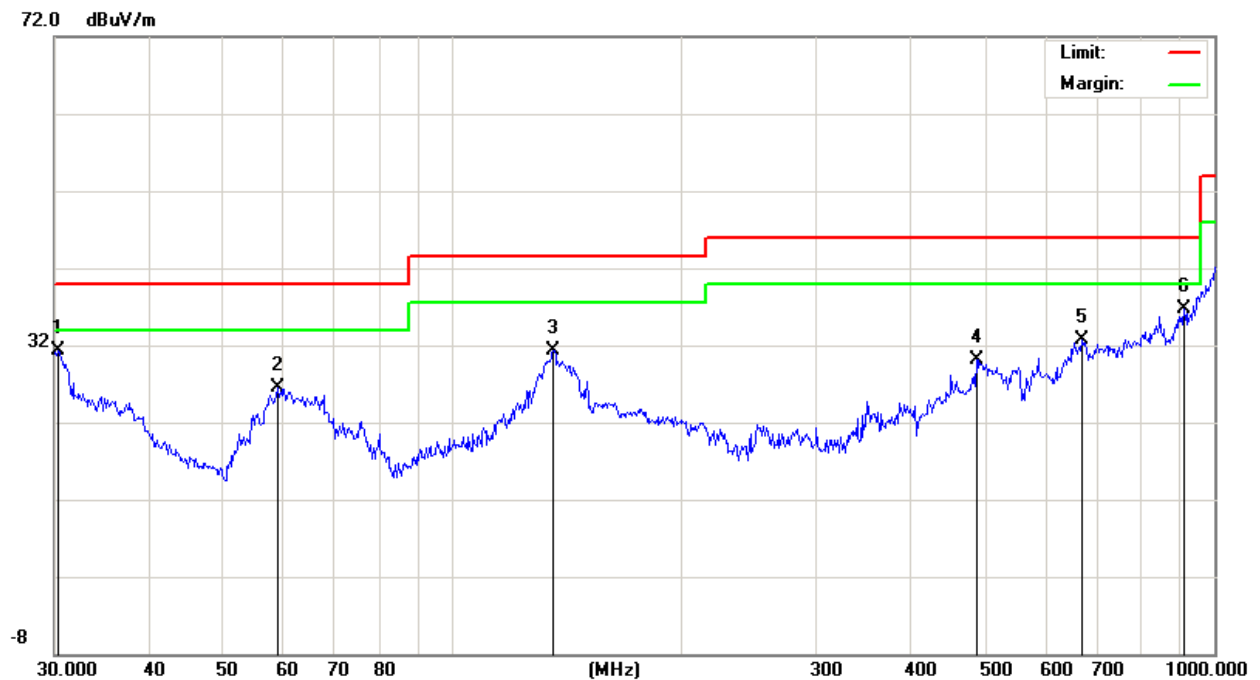

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.0701	6.37	24.07	30.44	40.00	-9.56	QP
H	66.9668	10.60	12.38	22.98	40.00	-17.02	QP
H	159.2247	8.57	18.59	27.16	43.50	-16.34	QP
H	301.4223	5.84	21.87	27.71	46.00	-18.29	QP
H	714.1734	2.47	30.99	33.46	46.00	-12.54	QP
H	785.0932	3.50	32.19	35.69	46.00	-10.31	QP

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

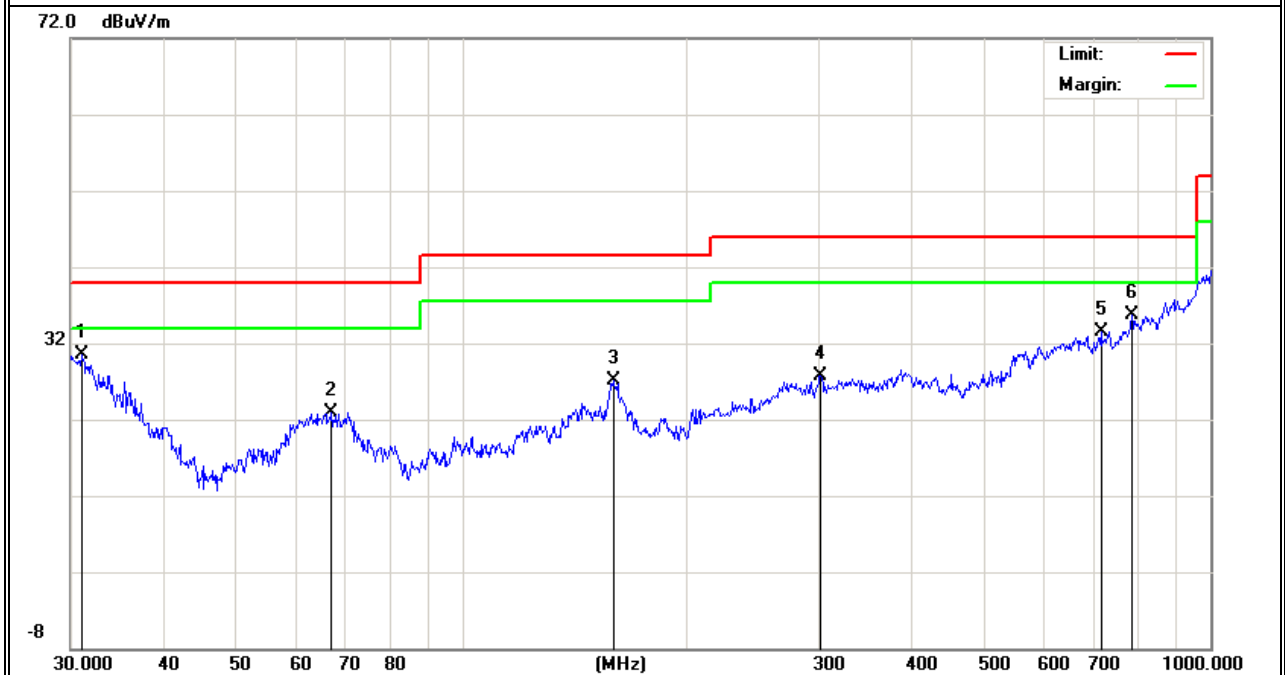

Note: All modes have been tested, just the the worst mode has been recorded in the report.

### 2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G) - 802.11ac80		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G									
Vertical	3694.36	61.96	5.94	35.40	44.00	59.30	74.00	-14.70	Pk
Vertical	3694.46	42.64	5.94	35.40	44.00	39.98	54.00	-14.02	AV
Vertical	10360.42	58.68	8.46	39.75	44.50	62.39	68.20	-5.81	Pk
Vertical	15540.62	61.26	10.12	38.80	44.10	66.08	74.00	-7.92	Pk
Vertical	15540.75	39.90	10.12	38.80	42.70	46.12	54.00	-7.88	AV
Horizontal	3713.52	63.57	5.94	35.18	44.00	60.69	74.00	-13.31	Pk
Horizontal	3713.48	44.01	5.94	35.18	44.00	41.13	54.00	-12.87	AV
Horizontal	10360.81	59.15	8.46	38.71	44.50	61.82	68.20	-6.38	Pk
Horizontal	15540.74	57.63	10.12	38.38	44.10	62.03	74.00	-11.97	Pk
Horizontal	15540.83	41.06	10.12	38.38	44.10	45.46	54.00	-8.54	AV

Note:"802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.3G) - 802.11n40_5270~5310MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5270 MHz)-Above 1G									
Vertical	4633.82	63.19	5.44	35.40	44.00	60.04	74.00	-13.96	Pk
Vertical	4633.82	44.87	5.74	35.40	44.00	42.01	54.00	-11.99	AV
Vertical	10520.42	60.64	8.26	39.75	44.50	64.15	68.20	-4.05	Pk
Vertical	15780.59	61.92	10.12	38.80	44.10	66.74	74.00	-7.26	Pk
Vertical	15780.60	41.00	9.62	38.80	42.70	46.72	54.00	-7.28	AV
Horizontal	4366.61	65.33	5.57	35.18	44.00	62.07	74.00	-11.93	Pk
Horizontal	4366.57	44.77	5.74	35.18	44.00	41.69	54.00	-12.31	AV
Horizontal	10520.49	60.63	8.38	38.71	44.50	63.22	68.20	-4.98	Pk
Horizontal	15780.83	58.79	9.88	38.38	44.10	62.95	74.00	-11.05	Pk
Horizontal	15780.76	41.74	9.94	38.38	44.10	45.96	54.00	-8.04	AV
High Channel (5310 MHz)-Above 1G									
Vertical	4122.86	60.25	6.08	36.35	44.05	58.63	74.00	-15.37	Pk
Vertical	4122.59	43.74	6.39	36.35	44.05	42.43	54.00	-11.57	AV
Vertical	10560.49	60.82	8.28	37.88	44.51	62.47	68.20	-5.73	Pk
Vertical	15840.88	62.73	9.79	38.8	44.10	67.21	74.00	-6.79	Pk
Vertical	15840.90	40.58	9.70	38.8	42.70	46.38	54.00	-7.62	AV
Horizontal	3869.88	59.71	6.11	36.37	44.05	58.14	74.00	-15.86	Pk
Horizontal	3870.03	47.01	6.27	36.37	44.05	45.60	54.00	-8.40	AV
Horizontal	10560.97	56.19	8.33	38.64	44.50	58.66	68.20	-9.54	Pk
Horizontal	15840.88	61.49	9.99	38.38	44.10	65.76	74.00	-8.24	Pk
Horizontal	15840.67	41.89	9.81	38.38	44.10	45.98	54.00	-8.02	AV

Note: ANT 1 802.11n40(5G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.6G) - 802.11ac80 _5530~5610MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5530 MHz)-Above 1G									
Vertical	5433.49	65.11	5.61	35.40	44.00	62.12	74.00	-11.88	Pk
Vertical	5433.34	46.07	5.76	35.40	44.00	43.23	54.00	-10.77	AV
Vertical	11000.74	60.72	8.24	39.75	44.50	64.21	74.00	-9.79	Pk
Vertical	11000.61	42.71	8.35	39.75	44.50	46.31	54.00	-7.69	AV
Vertical	16500.93	52.01	10.05	38.80	44.10	56.76	68.20	-11.44	Pk
Horizontal	5126.94	61.33	5.78	35.18	44.00	58.29	74.00	-15.71	Pk
Horizontal	5126.73	43.42	5.66	35.18	44.00	40.27	54.00	-13.73	AV
Horizontal	11000.65	59.06	8.22	38.71	44.50	61.49	74.00	-12.51	Pk
Horizontal	11000.72	42.28	8.14	38.71	44.50	44.63	54.00	-9.37	AV
Horizontal	16500.94	57.72	10.04	38.38	44.10	62.04	68.20	-6.16	Pk
High Channel (5610 MHz)-Above 1G									
Vertical	4933.74	63.67	6.29	36.35	44.05	62.25	74.00	-11.75	Pk
Vertical	4933.59	44.95	6.24	36.35	44.05	43.49	54.00	-10.51	AV
Vertical	11201.05	60.65	8.24	37.88	44.51	62.27	74.00	-11.73	Pk
Vertical	11201.06	45.33	8.13	37.88	44.51	46.82	54.00	-7.18	AV
Vertical	16800.78	59.59	9.71	38.80	44.10	64.00	68.20	-4.20	Pk
Horizontal	4766.68	61.38	6.44	36.37	44.05	60.14	74.00	-13.86	Pk
Horizontal	4766.64	44.10	6.13	36.37	44.05	42.56	54.00	-11.44	AV
Horizontal	11200.70	61.67	8.31	38.64	44.50	64.12	74.00	-9.88	Pk
Horizontal	11200.78	43.92	8.04	38.64	44.50	46.10	54.00	-7.90	AV
Horizontal	16800.82	57.84	10.09	38.38	44.10	62.21	68.20	-5.99	Pk

Note: "802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) -- 802.11n40 _5755~5795MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	5122.85	64.12	5.94	35.40	44.00	61.46	74.00	-12.54	Pk
Vertical	5122.74	45.78	5.94	35.40	44.00	43.12	54.00	-10.88	AV
Vertical	11491.18	60.39	8.46	39.75	44.50	64.10	74.00	-9.90	Pk
Vertical	11490.99	43.65	8.46	39.75	44.50	47.36	54.00	-6.64	AV
Vertical	17236.09	52.47	10.12	38.80	44.10	57.29	68.20	-10.91	Pk
Horizontal	5167.02	60.01	5.94	35.18	44.00	57.13	68.20	-11.07	Pk
Horizontal	11490.90	59.43	8.46	38.71	44.50	62.10	74.00	-11.90	Pk
Horizontal	11490.98	42.68	8.46	38.71	44.50	45.35	54.00	-8.65	AV
Horizontal	17235.89	51.59	10.12	38.38	44.10	55.99	68.20	-12.21	Pk
High Channel (5795 MHz)-Above 1G									
Vertical	5433.73	62.98	6.48	36.35	44.05	61.76	74.00	-12.24	Pk
Vertical	5433.87	43.32	6.48	36.35	44.05	42.10	54.00	-11.90	AV
Vertical	11570.71	60.75	8.47	37.88	44.51	62.59	74.00	-11.41	Pk
Vertical	11570.78	43.50	8.47	37.88	44.51	45.34	54.00	-8.66	AV
Vertical	17356.40	55.97	10.12	38.80	44.10	60.79	68.20	-7.41	Pk
Horizontal	4866.93	60.26	6.48	36.37	44.05	59.06	74.00	-14.94	Pk
Horizontal	4866.97	42.99	6.48	36.37	44.05	41.79	54.00	-12.21	AV
Horizontal	11570.69	63.19	8.47	38.64	44.50	65.80	74.00	-8.20	Pk
Horizontal	11570.86	44.38	8.47	38.64	44.50	46.99	54.00	-7.01	AV
Horizontal	17355.95	56.79	10.12	38.38	44.10	61.19	68.20	-7.01	Pk

Note: "802.11n40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




**2.2.10 TEST RESULTS (18GHz-40GHz)**

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11ac40 5190MHz~5230MHz; TX (5.3G)-802.11n40 5270MHz~5310MHz; TX (5.6G)-802.11n20 5500MHz~5700MHz; TX (5.8G)-802.11ac40 5755MHz~5795MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5190 MHz)-Above 1G

Horizontal

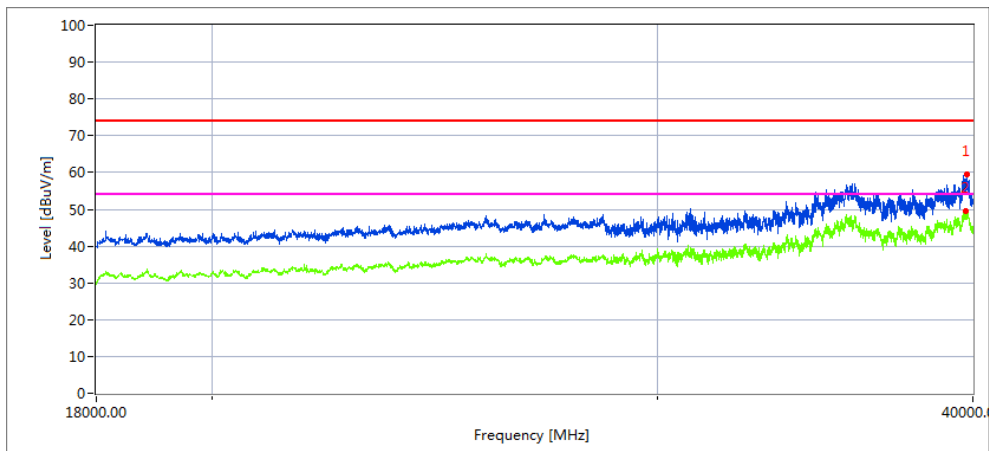

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39768.98	39.16	20.09	44.07	43.48	59.84	68.2	8.36	Peak
39766.76	27.3	20.09	44.04	43.48	47.95	54	6.05	AVG


Vertical

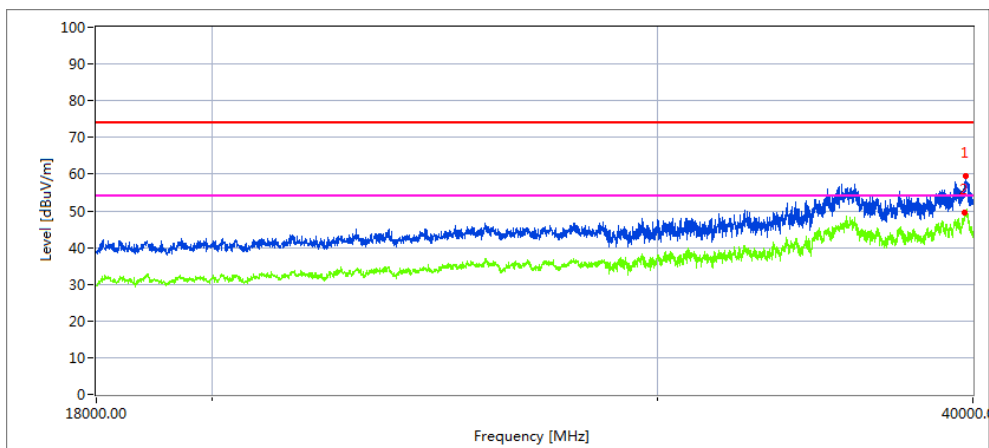

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.396	36.02	20.09	44.07	43.48	56.7	68.2	11.5	Peak
39769.315	27.29	20.09	44.04	43.48	47.94	54	6.06	AVG


### High Channel (5230 MHz)-Above 1G

Horizontal

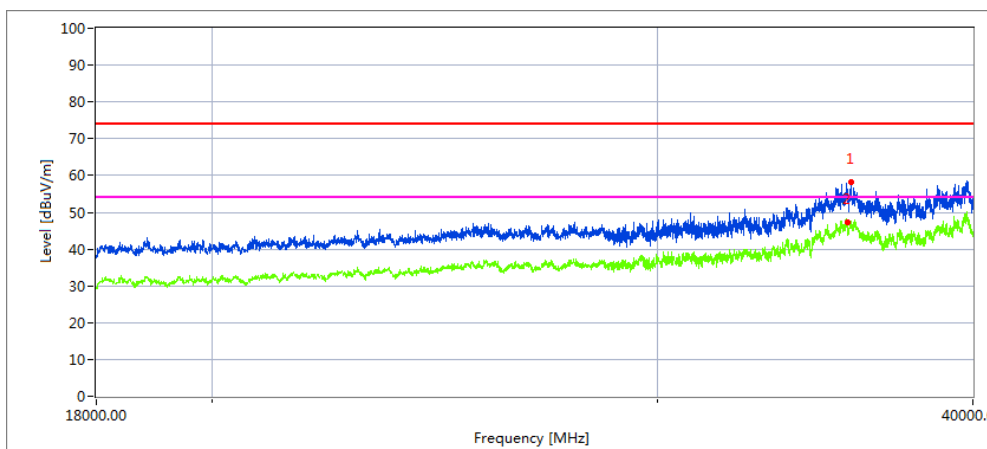

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39176.02	38.87	19.98	43.84	44.62	58.07	68.2	10.13	Peak
39175.96	29.91	19.98	43.84	44.62	49.11	54	4.89	AVG


Vertical

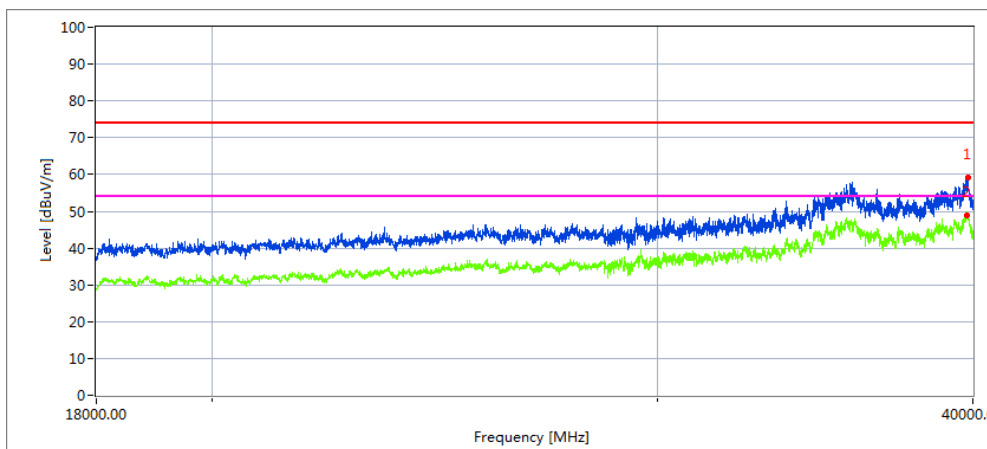

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39385.71	39.01	20.01	44.06	42.69	60.39	68.2	7.81	Peak
39385.62	28.91	20.01	44.06	42.69	50.29	54	3.71	AVG


Low Channel (5270 MHz)-Above 1G

Horizontal

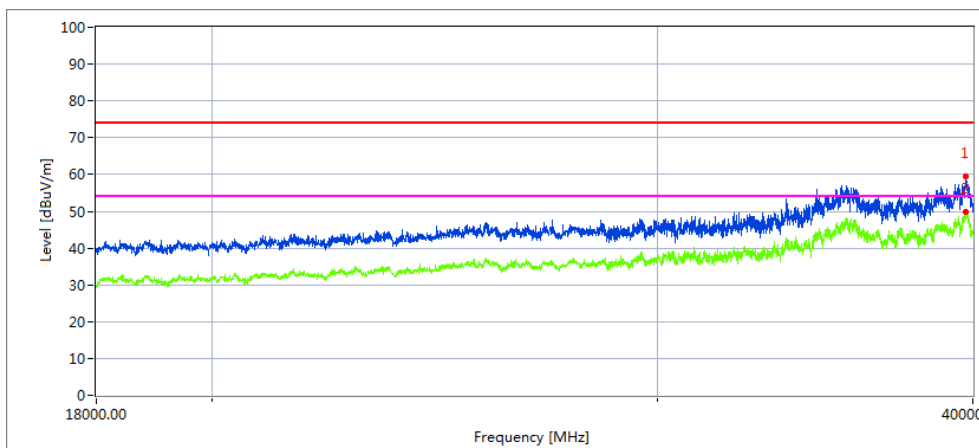

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39176.23	38.16	19.98	43.84	44.62	57.36	68.2	10.84	Peak
39176.23	29.36	19.98	43.84	44.62	48.56	54	5.44	AVG


Vertical

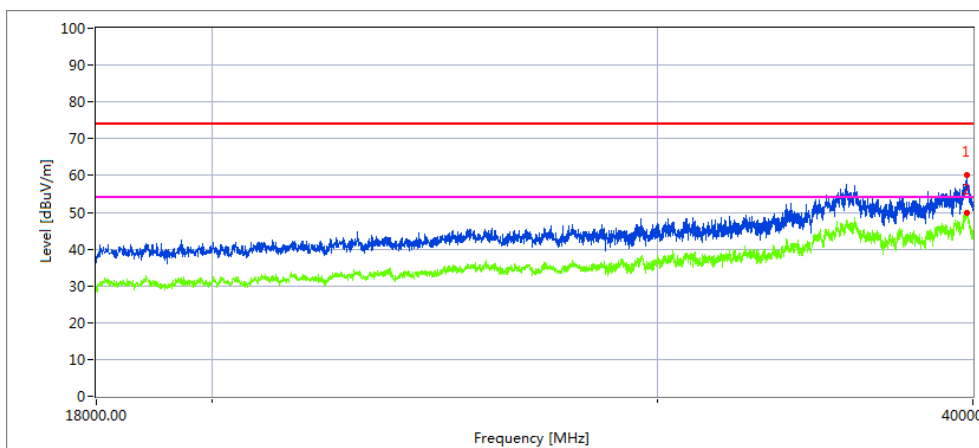

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39385.84	38.44	20.01	44.06	42.69	59.82	68.2	8.38	Peak
39385.84	28.2	20.01	44.06	42.69	49.58	54	4.42	AVG


### High Channel (5310 MHz)-Above 1G

Horizontal

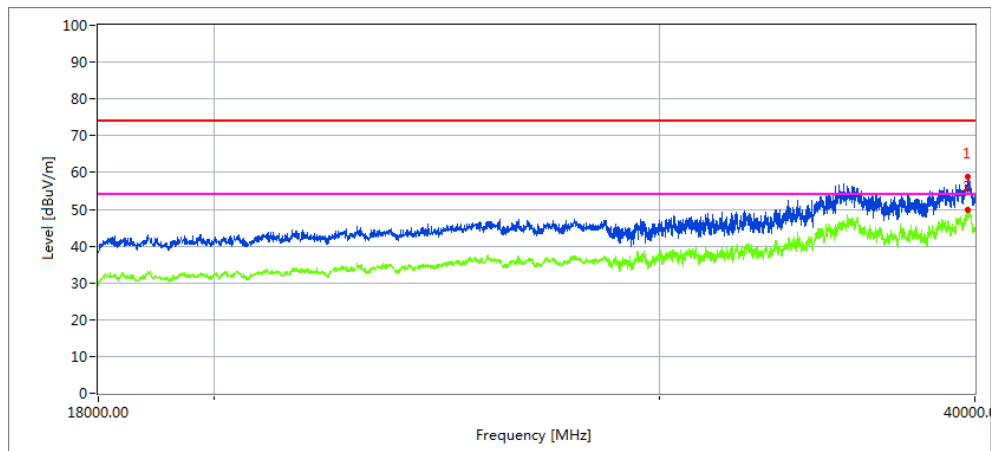

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39176.91	39.04	19.98	43.84	44.62	58.24	68.2	9.96	Peak
39176.74	30.72	19.98	43.84	44.62	49.92	54	4.08	AVG


Vertical

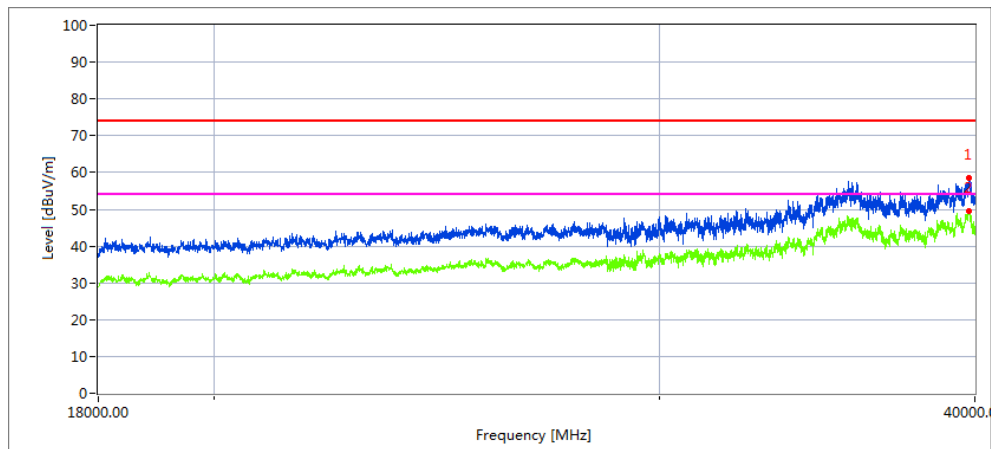

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39368.904	35.78	20.01	44.06	42.69	57.16	68.2	11.04	Peak
39368.874	27.45	20.01	44.06	42.69	48.83	54	5.17	AVG


Low Channel (5500 MHz)-Above 1G

Horizontal

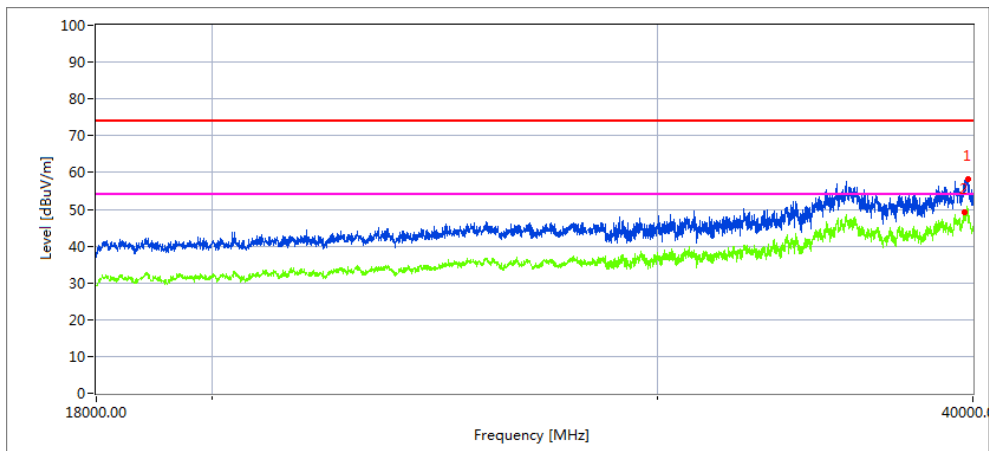

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39696.377	37.31	20.09	44.07	43.48	57.99	68.2	10.21	Peak
39652.991	29.19	20.07	44.06	43.48	49.84	54	4.16	AVG


Vertical

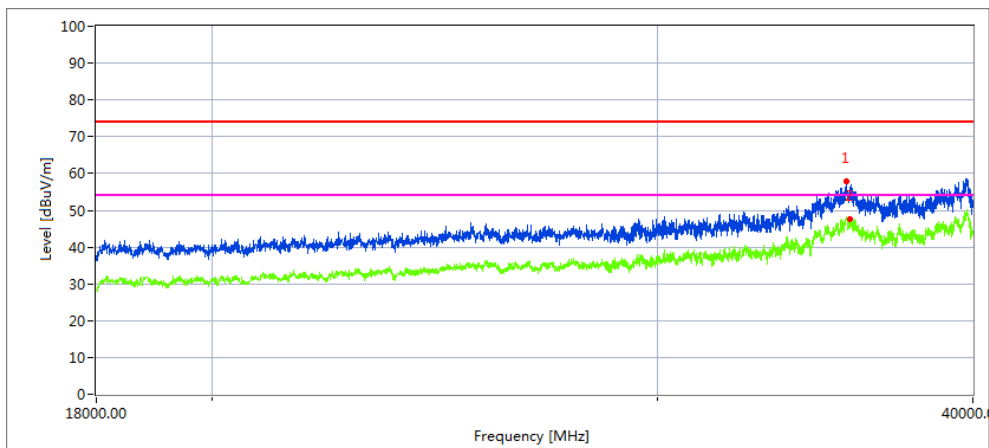

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
36575.461	37.4	19.16	42.61	41.56	57.61	68.2	10.59	Peak
36575.491	27.59	19.16	42.61	41.56	47.8	54	6.2	AVG


High Channel (5700 MHz)-Above 1G

Horizontal

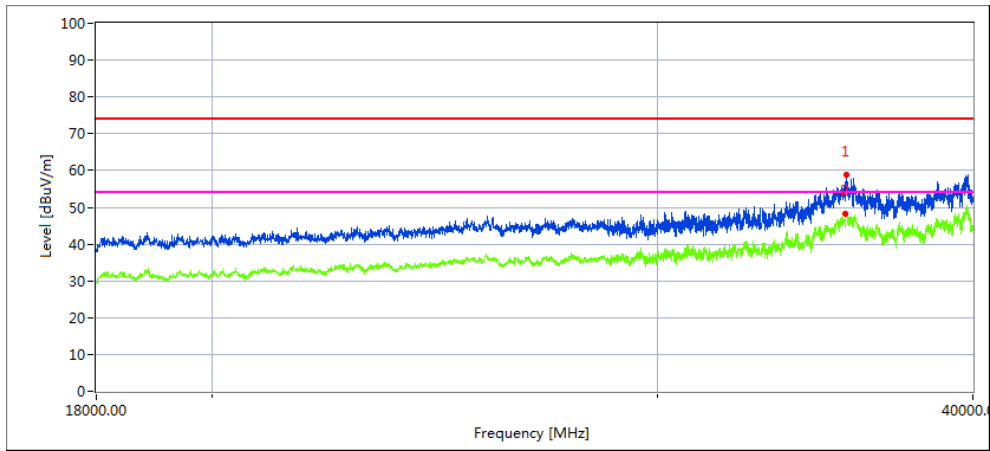

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35794.49	37.69	19.17	42.63	42.74	56.75	68.2	11.45	Peak
35763.188	29.02	19.14	42.61	42.71	48.06	54	5.94	AVG


Vertical

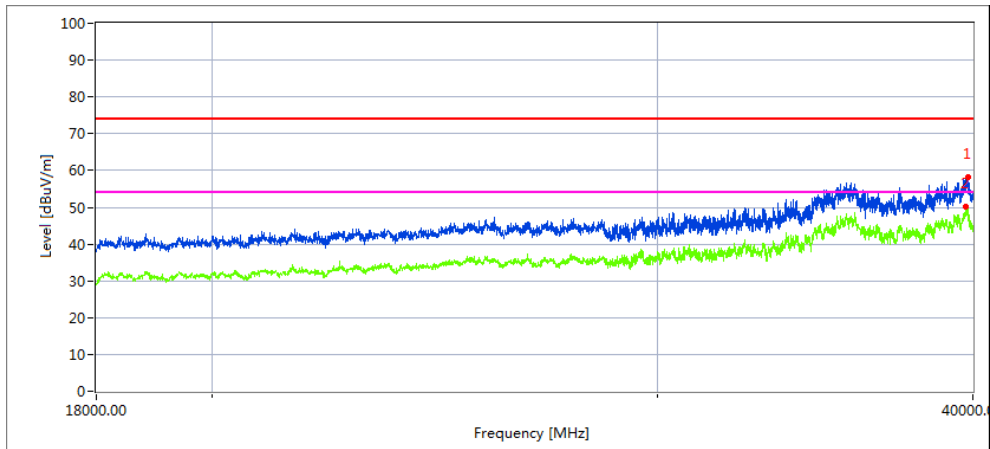

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39816.613	38.6	20.09	42.63	43.48	57.84	68.2	10.36	Peak
39803.968	30.73	20.09	42.61	43.48	49.95	54	4.05	AVG


Low Channel (5755 MHz)-Above 1G

Horizontal

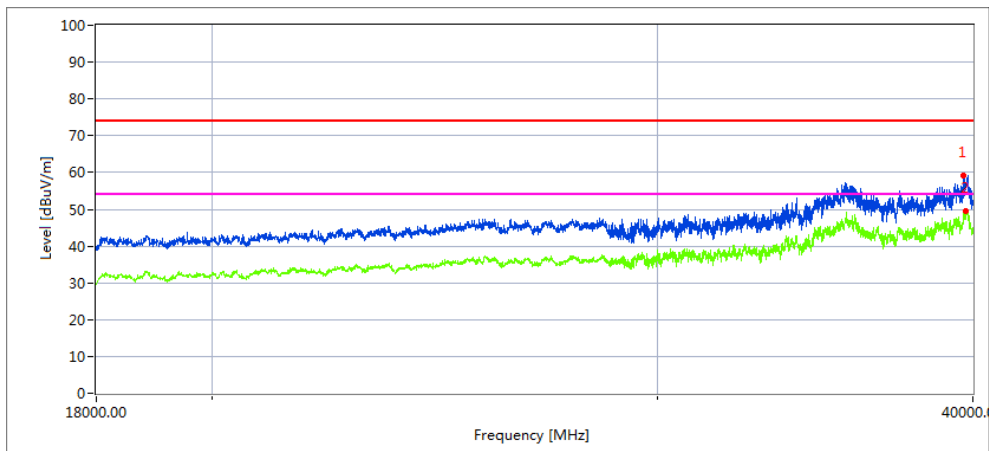

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39669.884	38.44	20.09	44.16	43.48	59.21	68.2	8.99	Peak
39669.694	29.57	20.09	44.16	43.48	50.34	54	3.66	AVG


Vertical

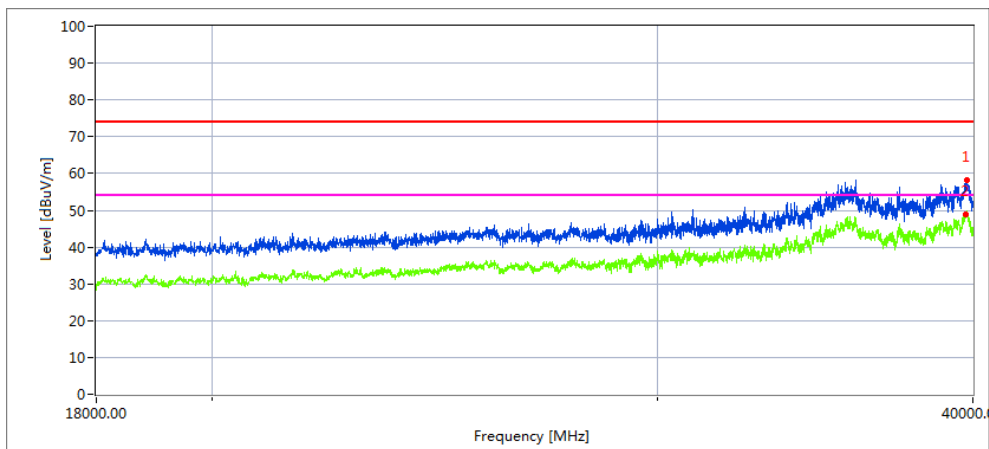

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39731.052	37.45	20.06	44.07	43.21	58.37	68.2	9.83	Peak
39731.202	28.39	20.06	44.07	43.21	49.31	54	4.69	AVG


### High Channel (5795 MHz)-Above 1G

Horizontal

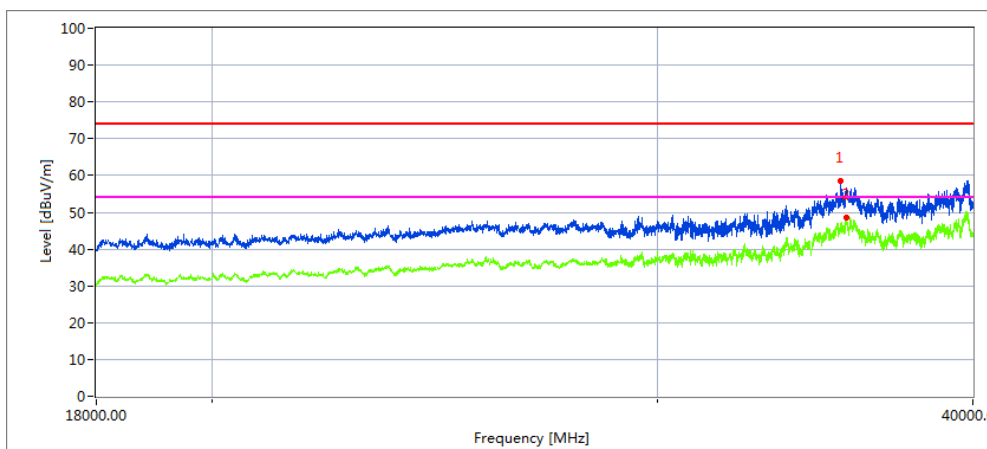

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35628.194	39.66	19.11	42.63	43.48	57.92	68.2	10.28	Peak
35635.768	30.22	19.12	42.63	43.48	48.49	54	5.51	AVG

Vertical

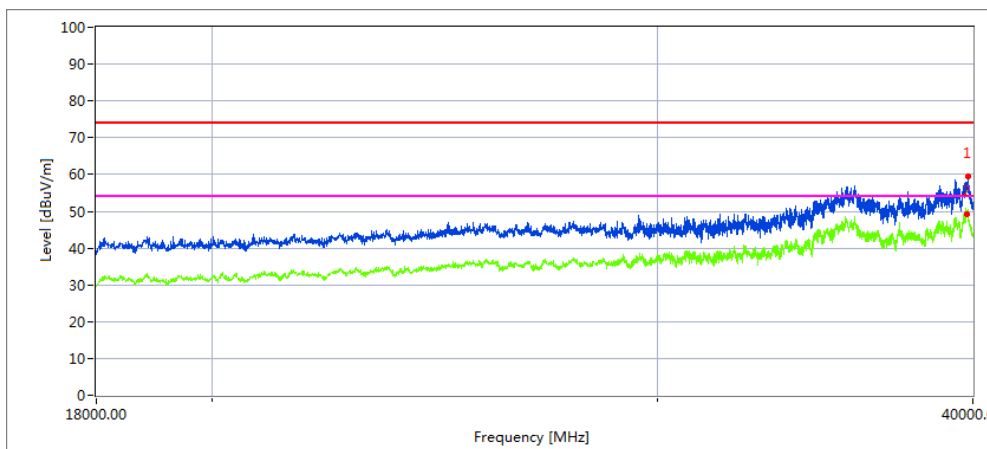

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39821.713	38.38	20.1	44.1	43.22	59.36	68.2	8.84	Peak
39821.563	29.34	20.1	44.1	43.22	50.32	54	3.68	AVG



2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11ac80 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11a Mode									
4500	56.48	5.2	35.6	44.2	53.08	74	-20.92	Pk	Horizontal
4500	47.22	5.2	35.6	44.2	43.82	54	-10.18	AV	Horizontal
4500	59.36	5.2	35.6	44.2	55.96	74	-18.04	Pk	Horizontal
4500	46.42	5.2	35.6	44.2	43.02	54	-10.98	AV	Horizontal
5150	70.23	5.36	35.66	44.22	67.03	74	-6.97	Pk	Horizontal
5150	80.05	5.36	35.66	44.22	76.85	54	22.85	AV	Horizontal
5150	56.88	5.36	35.66	44.22	53.68	74	-20.32	Pk	Vertical
5150	79.86	5.36	35.66	44.22	76.66	54	22.66	AV	Vertical
5350	65.81	5.68	35.68	44.22	62.95	74	-11.05	Pk	Vertical
5350	47.45	5.68	35.68	44.22	44.59	54	-9.41	AV	Vertical
5350	61.11	5.68	35.68	44.22	58.25	74	-15.75	Pk	Horizontal
5350	45.79	5.68	35.68	44.22	42.93	54	-11.07	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac80" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.3G)-802.11n20 5250MHz~5350MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel (5320 MHz)-Above 1G									
Vertical	66.36	66.36	6.96	37.24	43.50	67.06	74.00	-6.94	Pk
Vertical	44.09	44.35	7.07	37.24	43.50	45.16	54.00	-8.84	AV
Horizontal	66.98	67.05	7.05	37.24	43.50	67.84	74.00	-6.16	Pk
Horizontal	46.38	46.66	7.05	37.24	43.50	47.45	54.00	-6.55	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.6G)-802.11ac80 5470MHz~5725MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	68.34	68.36	5.61	35.40	44.00	65.37	74.00	-8.63	Pk
Vertical	51.32	51.33	5.76	35.40	44.00	48.49	54.00	-5.51	AV
Horizontal	63.15	63.25	5.78	35.18	44.00	60.21	74.00	-13.79	Pk
Horizontal	48.02	48.36	5.66	35.18	44.00	45.20	54.00	-8.80	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac80" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

### 3. POWER SPECTRAL DENSITY TEST

#### 3.1 APPLIED PROCEDURES / LIMIT

##### According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

### 3.3 DEVIATION FROM STANDARD

No deviation.

### 3.4 TEST SETUP



### 3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.6 TEST RESULTS**

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

## 4. 26DB & 99% EMISSION BANDWIDTH

### 4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

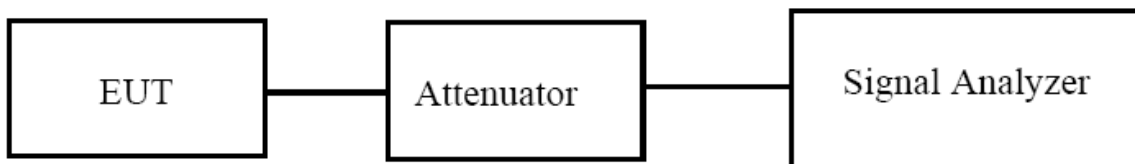

### 4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 4.4 TEST RESULTS

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.



## 5. MINIMUM 6 DB BANDWIDTH

### 5.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP

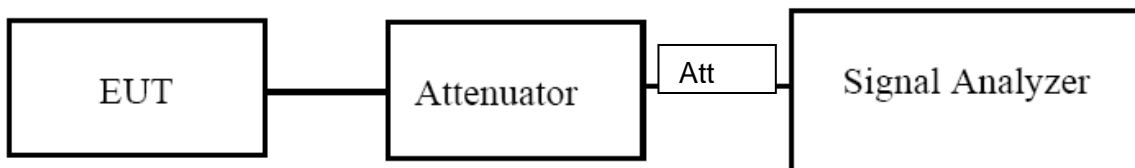

### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS**

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

## 6. MAXIMUM CONDUCTED OUTPUT POWER

### 6.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


### 6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
  - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
    - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
    - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
    - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
  - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
  - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
  - d) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle {e.g.,  $[10 \log (1 / 0.25)]$ , if the duty cycle is 25%}.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

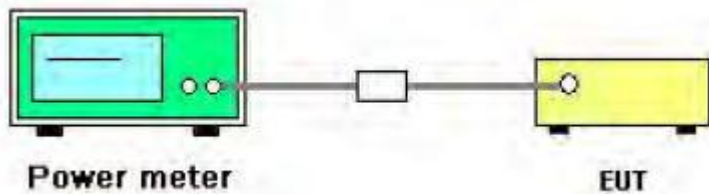

### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2 TEST RESULTS**

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

## 7. OUT OF BAND EMISSIONS

### 7.1 APPLICABLE STANDARD

#### According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

### 7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot


the graph with marking the highest point and edge frequency.

5. Repeat above procedures until all measured frequencies were complete.

**7.3 DEVIATION FROM STANDARD**

No deviation.

**7.4 TEST SETUP**

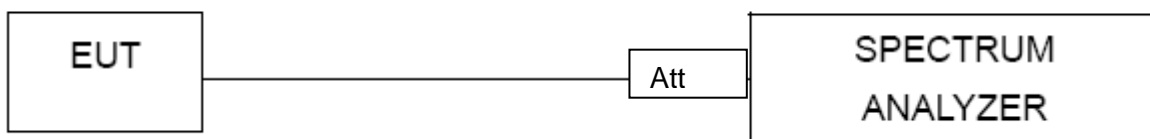

**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.6 TEST RESULTS**

EUT :	PINEPHONEPRO	Model Name :	PINEPHONEPRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V

Test data reference attachment.



## 8. Frequency Stability Measurement


### 8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$ .

### 8.3 TEST SETUP LAYOUT

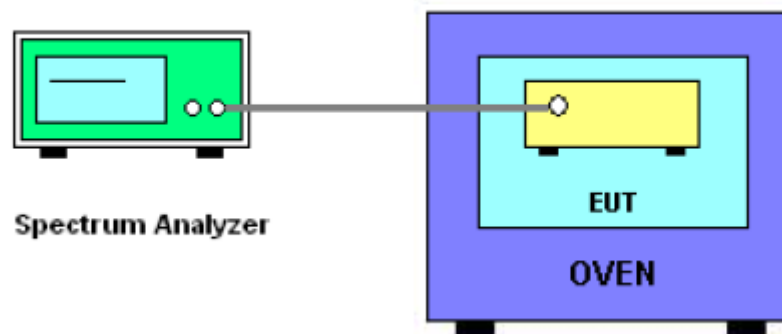

### 8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

8.5 TEST RESULTS

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5180.0137	5180	0.0137	-2.6448
		V max (V)	4.2	5180.0174	5180	0.0174	-3.3591
		V min (V)	3.4	5180.0194	5180	0.0194	-3.7452
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5180.0335	5180	0.0335	-6.4672
		T (°C)	-10	5180.0079	5180	0.0079	-1.5251
		T (°C)	0	5180.0034	5180	0.0034	-0.6564
		T (°C)	10	5180.0110	5180	0.0110	-2.1236
		T (°C)	20	5180.0100	5180	0.0100	-1.9305
		T (°C)	30	5180.0325	5180	0.0325	-6.2741
		T (°C)	40	5180.0229	5180	0.0229	-4.4208
		T (°C)	50	5180.0272	5180	0.0272	-5.2510
		T (°C)	60	5180.0295	5180	0.0295	-5.6950
		T (°C)	70	5180.0085	5180	0.0085	-1.6409
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5200.0219	5200	0.0219	-4.2115
		V max (V)	4.2	5200.0299	5200	0.0299	-5.7500
		V min (V)	3.4	5200.0338	5200	0.0338	-6.5000
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5200.0075	5200	0.0075	-1.4423
		T (°C)	-10	5200.0209	5200	0.0209	-4.0192
		T (°C)	0	5200.0206	5200	0.0206	-3.9615
		T (°C)	10	5200.0327	5200	0.0327	-6.2885
		T (°C)	20	5200.0202	5200	0.0202	-3.8846
		T (°C)	30	5200.0138	5200	0.0138	-2.6538
		T (°C)	40	5200.0264	5200	0.0264	-5.0769
		T (°C)	50	5200.0167	5200	0.0167	-3.2115
		T (°C)	60	5200.0162	5200	0.0162	-3.1154
		T (°C)	70	5200.0299	5200	0.0299	-5.7500
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5240.0039	5240	0.0039	-0.7443
		V max (V)	4.2	5240.0128	5240	0.0128	-2.4427
		V min (V)	3.4	5240.0142	5240	0.0142	-2.7099
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5240.0118	5240	0.0118	-2.2519
		T (°C)	-10	5240.0214	5240	0.0214	-4.0840
		T (°C)	0	5240.0126	5240	0.0126	-2.4046
		T (°C)	10	5240.0157	5240	0.0157	-2.9962
		T (°C)	20	5240.0226	5240	0.0226	-4.3130
		T (°C)	30	5240.0177	5240	0.0177	-3.3779
		T (°C)	40	5240.0106	5240	0.0106	-2.0229
		T (°C)	50	5240.0228	5240	0.0228	-4.3511
		T (°C)	60	5240.0329	5240	0.0329	-6.2786
		T (°C)	70	5240.0007	5240	0.0007	-0.1336
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5260.0122	5260	0.01220	-2.3194
		V max (V)	4.2	5260.0036	5260	0.00360	-0.6844
		V min (V)	3.4	5260.0011	5260	0.00110	-0.2091
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5260.0227	5260	0.02270	-4.3156
		T (°C)	-10	5260.0125	5260	0.01250	-2.3764
		T (°C)	0	5260.0183	5260	0.01830	-3.4791
		T (°C)	10	5260.0211	5260	0.02110	-4.0114
		T (°C)	20	5260.0048	5260	0.00480	-0.9125
		T (°C)	30	5260.0213	5260	0.02130	-4.0494
		T (°C)	40	5260.0316	5260	0.03160	-6.0076
		T (°C)	50	5260.0287	5260	0.02870	-5.4563
		T (°C)	60	5260.0067	5260	0.00670	-1.2738
		T (°C)	70	5260.0088	5260	0.00880	-1.6730
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5280.0068	5280	0.00680	-1.2879
		V max (V)	4.2	5280.0024	5280	0.00240	-0.4545
		V min (V)	3.4	5280.0286	5280	0.02860	-5.4167
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5280.0076	5280	0.00760	-1.4394
		T (°C)	-10	5280.0339	5280	0.03390	-6.4205
		T (°C)	0	5280.0134	5280	0.01340	-2.5379
		T (°C)	10	5280.0224	5280	0.02240	-4.2424
		T (°C)	20	5280.0084	5280	0.00840	-1.5909
		T (°C)	30	5280.0037	5280	0.00370	-0.7008
		T (°C)	40	5280.0197	5280	0.01970	-3.7311
		T (°C)	50	5280.0132	5280	0.01320	-2.5000
		T (°C)	60	5280.0144	5280	0.01440	-2.7273
		T (°C)	70	5280.0107	5280	0.01070	-2.0265
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5320.0233	5320	0.02330	-4.3797
		V max (V)	4.2	5320.0250	5320	0.02500	-4.6992
		V min (V)	3.4	5320.0031	5320	0.00310	-0.5827
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5320.0058	5320	0.00580	-1.0902
		T (°C)	-10	5320.0077	5320	0.00770	-1.4474
		T (°C)	0	5320.0154	5320	0.01540	-2.8947
		T (°C)	10	5320.0117	5320	0.01170	-2.1992
		T (°C)	20	5320.0145	5320	0.01450	-2.7256
		T (°C)	30	5320.0150	5320	0.01500	-2.8195
		T (°C)	40	5320.0260	5320	0.02600	-4.8872
		T (°C)	50	5320.0192	5320	0.01920	-3.6090
		T (°C)	60	5320.0257	5320	0.02570	-4.8308
		T (°C)	70	5320.0148	5320	0.01480	-2.7820
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5500.0269	5500	0.02690	-4.8909
		V max (V)	4.2	5500.0127	5500	0.01270	-2.3091
		V min (V)	3.4	5500.0204	5500	0.02040	-3.7091
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5500.0279	5500	0.02790	-5.0727
		T (°C)	-10	5500.0002	5500	0.00020	-0.0364
		T (°C)	0	5500.0336	5500	0.03360	-6.1091
		T (°C)	10	5500.0249	5500	0.02490	-4.5273
		T (°C)	20	5500.0335	5500	0.03350	-6.0909
		T (°C)	30	5500.0000	5500	0.00000	0.0000
		T (°C)	40	5500.0016	5500	0.00160	-0.2909
		T (°C)	50	5500.0126	5500	0.01260	-2.2909
		T (°C)	60	5500.0130	5500	0.01300	-2.3636
		T (°C)	70	5500.0038	5500	0.00380	-0.6909
Limits				Within 5470-5725MHz			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5600.0078	5600	0.00780	-1.3929
		V max (V)	4.2	5600.0334	5600	0.03340	-5.9643
		V min (V)	3.4	5600.0157	5600	0.01570	-2.8036
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5600.0204	5600	0.02040	-3.6429
		T (°C)	-10	5600.0084	5600	0.00840	-1.5000
		T (°C)	0	5600.0318	5600	0.03180	-5.6786
		T (°C)	10	5600.0021	5600	0.00210	-0.3750
		T (°C)	20	5600.0153	5600	0.01530	-2.7321
		T (°C)	30	5600.0204	5600	0.02040	-3.6429
		T (°C)	40	5600.0171	5600	0.01710	-3.0536
		T (°C)	50	5600.0147	5600	0.01470	-2.6250
		T (°C)	60	5600.0297	5600	0.02970	-5.3036
		T (°C)	70	5600.0008	5600	0.00080	-0.1429
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5700.0238	5700	0.02380	-4.1754
		V max (V)	4.2	5700.0079	5700	0.00790	-1.3860
		V min (V)	3.4	5700.0202	5700	0.02020	-3.5439
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5700.0110	5700	0.01100	-1.9298
		T (°C)	-10	5700.0232	5700	0.02320	-4.0702
		T (°C)	0	5700.0318	5700	0.03180	-5.5789
		T (°C)	10	5700.0327	5700	0.03270	-5.7368
		T (°C)	20	5700.0081	5700	0.00810	-1.4211
		T (°C)	30	5700.0118	5700	0.01180	-2.0702
		T (°C)	40	5700.0067	5700	0.00670	-1.1754
		T (°C)	50	5700.0180	5700	0.01800	-3.1579
		T (°C)	60	5700.0181	5700	0.01810	-3.1754
		T (°C)	70	5700.0218	5700	0.02180	-3.8246
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	PINEPHONEPRO	Model Name. :	PINEPHONEPRO
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5745.0093	5745	0.00930	-1.6188
		V max (V)	4.2	5745.014	5745	0.01400	-2.4369
		V min (V)	3.4	5745.019	5745	0.01900	-3.3072
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5745.0172	5745	0.01720	-2.9939
		T (°C)	-10	5745.0251	5745	0.02510	-4.3690
		T (°C)	0	5745.0196	5745	0.01960	-3.4117
		T (°C)	10	5745.0339	5745	0.03390	-5.9008
		T (°C)	20	5745.0209	5745	0.02090	-3.6379
		T (°C)	30	5745.0107	5745	0.01070	-1.8625
		T (°C)	40	5745.0200	5745	0.02000	-3.4813
		T (°C)	50	5745.0094	5745	0.00940	-1.6362
		T (°C)	60	5745.0197	5745	0.01970	-3.4291
		T (°C)	70	5745.0107	5745	0.01070	-1.8625
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5785.0113	5785	0.01130	-1.9533
		V max (V)	4.2	5785.0141	5785	0.01410	-2.4373
		V min (V)	3.4	5785.0238	5785	0.02380	-4.1141
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5785.0259	5785	0.02590	-4.4771
		T (°C)	-10	5785.0192	5785	0.01920	-3.3189
		T (°C)	0	5785.0079	5785	0.00790	-1.3656
		T (°C)	10	5785.0047	5785	0.00470	-0.8124
		T (°C)	20	5785.0118	5785	0.01180	-2.0398
		T (°C)	30	5785.0139	5785	0.01390	-2.4028
		T (°C)	40	5785.0095	5785	0.00950	-1.6422
		T (°C)	50	5785.0321	5785	0.03210	-5.5488
		T (°C)	60	5785.0073	5785	0.00730	-1.2619
		T (°C)	70	5785.0233	5785	0.02330	-4.0277
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5825.0300	5825	0.03000	-5.1502
		V max (V)	4.2	5825.001	5825	0.00100	-0.1717
		V min (V)	3.4	5825.0162	5825	0.01620	-2.7811
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5825.0198	5825	0.01980	-3.3991
		T (°C)	-10	5825.0213	5825	0.02130	-3.6567
		T (°C)	0	5825.0203	5825	0.02030	-3.4850
		T (°C)	10	5825.0002	5825	0.00020	-0.0343
		T (°C)	20	5825.0031	5825	0.00310	-0.5322
		T (°C)	30	5825.0138	5825	0.01380	-2.3691
		T (°C)	40	5825.0030	5825	0.00300	-0.5150
		T (°C)	50	5825.0303	5825	0.03030	-5.2017
		T (°C)	60	5825.0300	5825	0.03000	-5.1502
		T (°C)	70	5825.0117	5825	0.01170	-2.0086
Limits				Within 5745-5850MHz			
Result				Complies			

## 9. DYNAMIC FREQUENCY SELECTION(DFS)

### 9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
<p><b>Note</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.</p>		

### 9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> EIRP is based on the highest antenna gain.</p>	

### 9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

**Note 1:** The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

### 9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	Roundup $\left( \frac{1}{360} \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

**9.5 CALIBRATION SETUP AND DFS TEST RESULTS**

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset  $-1.0\text{dB}$  to compensate RF cable loss  $1.0\text{dB}$ .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

**9.6 CONDUCTED CALIBRATION SETUP**

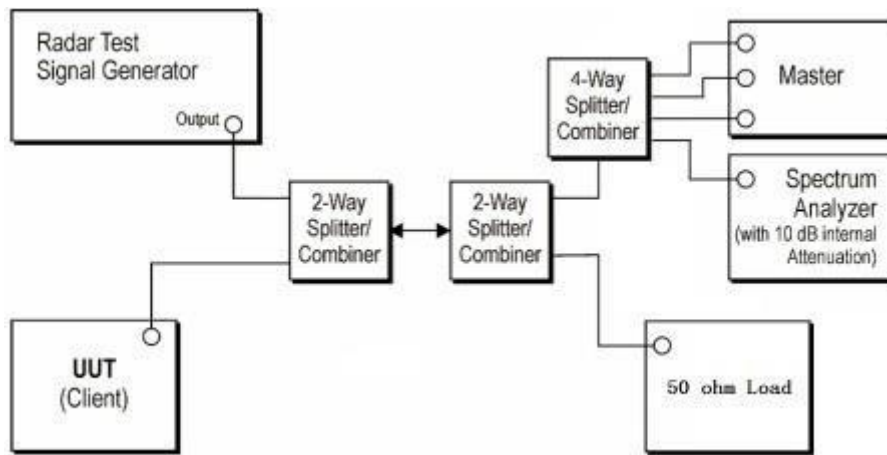

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

- Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.
2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.
  3. The time required for the master and slave devices to fully start up is 120s.
  4. EUT does not support TPC.




### 9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

### 9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

#### TEST CONFIGURATION:

Setup for Client with injection at the Master

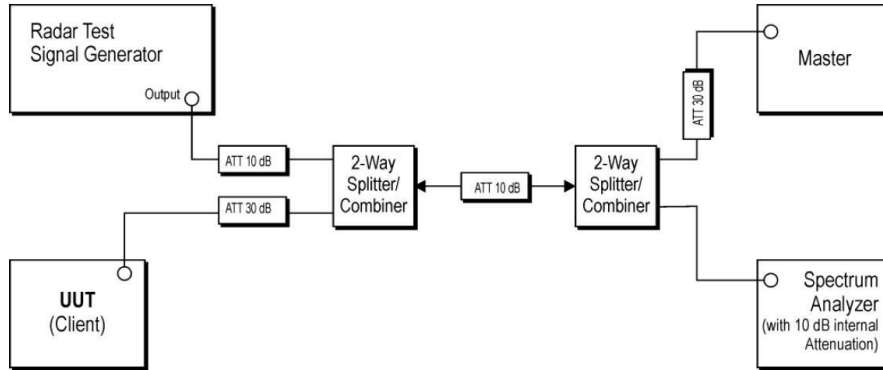

#### TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

#### TEST MODE:

Please refer to the clause 2.2

**9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND  
NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST**

Test data reference attachment.

## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is permanent attached PIFA antenna (antenna gain: 1.64dBi). It comply with the standard requirement.

END OF REPORT