



FCC PART 27  
FCC PART 22H, PART 24E  
TEST REPORT

For

**ONE DIAMOND ELECTRONICS INC.**

1450 Frazee Road, Suite 303, San Diego, California, United States

**FCC ID: 2ADWUP5525A**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile Phone
<b>Report Number:</b> RSZ160926012-00D	
<b>Report Date:</b> 2016-12-28	
Oscar Ye 	
<b>Reviewed By:</b> Engineer	
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>7</b>
<b>FCC §1.1307 &amp; §2.1093 - RF EXPOSURE.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
TEST RESULT .....	9
<b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>	<b>10</b>
<b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C); §27.50 (C)(D) (H) - RF OUTPUT POWER.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST PROCEDURE .....	11
TEST DATA .....	11
<b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 &amp; §27.53 - OCCUPIED BANDWIDTH.....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST DATA .....	33
<b>FCC §2.1051, §22.917(A) &amp; §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>59</b>
APPLICABLE STANDARD .....	59
TEST PROCEDURE .....	59
TEST DATA .....	59
<b>FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS.....</b>	<b>86</b>
APPLICABLE STANDARD .....	86
TEST PROCEDURE .....	86
TEST DATA .....	86
<b>FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES .....</b>	<b>89</b>
APPLICABLE STANDARD .....	89
TEST PROCEDURE .....	89
TEST DATA .....	89
<b>FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY.....</b>	<b>132</b>
APPLICABLE STANDARD .....	132
TEST PROCEDURE .....	132
TEST DATA .....	133

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *ONE DIAMOND ELECTRONICS INC.*'s product, model number: *P5525A (FCC ID: 2ADWUP5525A)* in this report is a *Mobile Phone* which was measured approximately: 15.5 cm (L) \* 7.9 cm (W) \* 0.9 cm (H), rated with input voltage: DC 3.8 V battery or DC 5.0V from adapter.

#### Adapter Information:

Input: 90-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1.0A

*\* All measurement and test data in this report was gathered from production sample serial number: 1603335 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-09-26.*

### Objective

This test report is prepared on behalf of *ONE DIAMOND ELECTRONICS INC.* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS & DSS and Part 15B JBP submissions with FCC ID: 2ADWUP5525A.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		±3.26 dB
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0°C
Humidity		±6%

### Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


### Equipment Modifications

No modification was made to the EUT.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

### Block Diagram of Test Setup

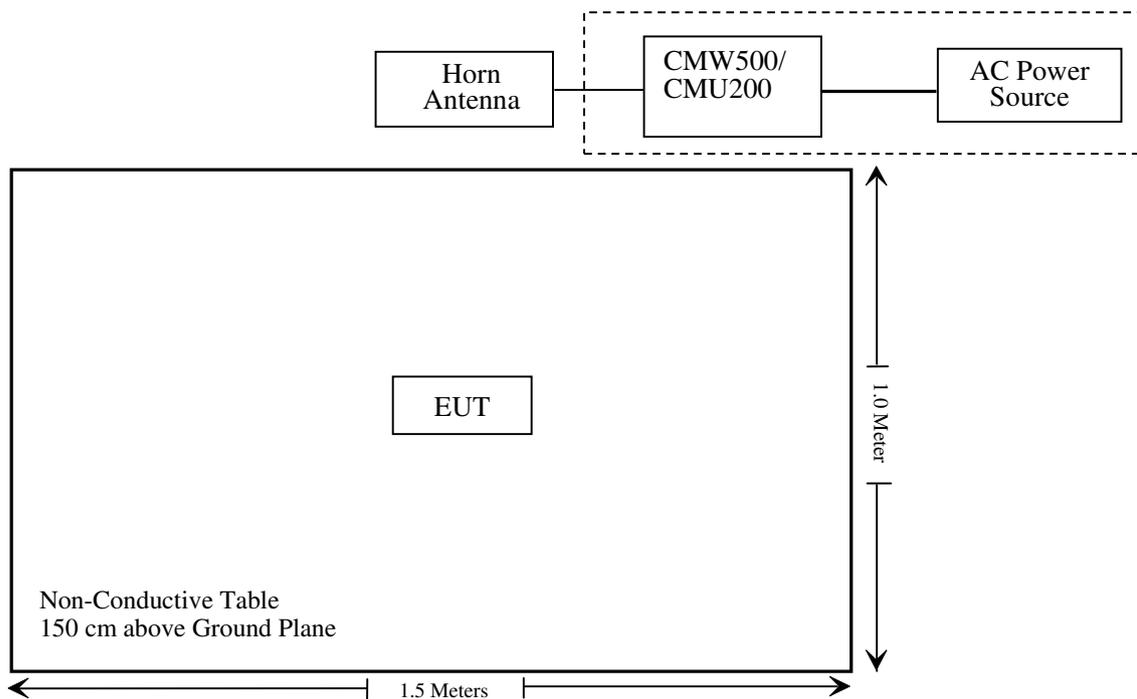

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1307, §2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (c) (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Sonoma Instrument	Amplifier	330	171377	2016-12-12	2017-12-12
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2018-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-01-11	2017-01-10
ETS	Horn Antenna	3115	9311-4159	2016-01-11	2017-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-7	007	2016-12-12	2017-12-12
HP	Signal Generator	8341B	2624A00116	2016-08-29	2017-08-29
<b>RF Conducted test</b>					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHHEL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2015-11-25	2016-11-25
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2016-11-25	2017-11-25
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-116218-UY	2016-10-08	2017-10-08
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12
WEINSCHHEL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC §1.1307 & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSZ160926012-20.

---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H, 24E & Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50 (c)(d) (h) - RF OUTPUT POWER

### Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.


According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

### Test Procedure

#### Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



#### Radiated method:

TIA 603-D section 2.2.17

### Test Data

#### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	48 %
ATM Pressure:	101.5 kPa

The testing was performed by Chris Wang on 2016-12-02.

**Conducted Power**

**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.30	38.45
	190	836.6	32.35	38.45
	251	848.8	32.33	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.38	31.10	29.82	28.61	38.45
	190	836.6	31.31	30.99	29.70	28.51	38.45
	251	848.8	31.26	30.94	29.70	28.48	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	25.11	24.15	22.12	21.15	38.45
	190	836.6	25.09	24.13	22.23	21.19	38.45
	251	848.8	24.98	24.01	22.10	21.05	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		21.87	21.22	21.20
		HSDPA	1	20.47	20.56	20.98
			2	20.58	20.46	20.54
			3	20.54	20.46	20.37
			4	20.45	20.67	20.24
			5	20.67	20.71	20.68
		HSUPA	1	20.38	20.46	20.59
			2	20.24	20.41	20.46
			3	20.75	20.31	20.25
			4	20.37	20.78	20.31
				5	20.34	20.47
HSPA+	1	20.12	20.18	20.21		

**PCS Band (Part 24E)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.15	33
	661	1880.0	28.97	33
	810	1909.8	28.71	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.17	28.45	26.83	25.72	33
	661	1880.0	29.01	28.32	26.78	25.69	33
	810	1909.8	28.68	28.10	26.62	25.60	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	26.01	25.13	23.16	22.22	33
	661	1880.0	26.00	25.16	23.16	22.19	33
	810	1909.8	26.16	25.28	23.31	22.37	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.81	21.31	21.97
		HSDPA	1	20.34	20.91	20.71
			2	20.21	20.74	20.98
			3	20.15	20.36	20.68
			4	20.14	20.64	20.12
			5	20.36	20.47	20.36
		HSUPA	1	20.15	20.36	21.71
			2	20.36	20.65	20.11
			3	20.36	20.47	20.36
			4	20.11	20.36	20.10
			5	20.36	20.45	20.11
		HSPA+	1	20.18	20.12	20.16

**Peak-to-average ratio (PAR)****Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.12	13
	Middle	0.15	13
	High	0.15	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.19	13
	Middle	0.19	13
	High	0.21	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.48	13
	Middle	3.44	13
	High	3.40	13
HSDPA (16QAM)	Low	3.35	13
	Middle	3.37	13
	High	3.31	13
HSUPA (BPSK)	Low	3.40	13
	Middle	3.36	13
	High	3.41	13

**PCS Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.16	13
	Middle	0.15	13
	High	0.18	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.21	13
	Middle	0.24	13
	High	0.27	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	1.23	13
	Middle	1.25	13
	High	1.42	13
HSDPA (16QAM)	Low	1.37	13
	Middle	1.30	13
	High	1.35	13
HSUPA (BPSK)	Low	1.40	13
	Middle	1.37	13
	High	1.43	13

**Radiated Power**

**GSM Mode:**

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	95.09	70	2.3	H	24.9	0.26	4.75	29.39	38.45	9.06
836.6	96.15	139	2.4	V	21.9	0.26	4.75	26.39	38.45	12.06
EIRP for PCS Band (Part 24E), Middle Channel										
1880.0	79.59	157	1.2	H	18.1	0.45	8.84	26.49	33	6.51
1880.0	79.72	144	1.6	V	16.0	0.45	8.84	24.39	33	8.61

**EDGE Mode:**

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	90.55	208	1.8	H	20.3	0.26	4.75	24.79	38.45	13.66
836.6	91.84	106	2.2	V	17.6	0.26	4.75	22.09	38.45	16.36
EIRP, PCS Band (Part 24E), Middle Channel										
1880.0	76.65	121	1.5	H	15.2	0.45	8.84	23.59	33	9.41
1880.0	76.74	164	1.1	V	13.0	0.45	8.84	21.39	33	11.61

**WCDMA Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	87.11	305	1.1	H	16.9	0.26	4.75	21.39	38.45	17.06
836.6	87.69	239	2.4	V	13.5	0.26	4.75	17.99	38.45	20.46
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.0	73.83	305	1.1	H	12.4	0.45	8.84	20.79	33	12.21
1880.0	71.65	239	2.4	V	7.9	0.45	8.84	16.29	33	16.71

**Note:**

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

**LTE Band 4:**

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	23.17	23.17	23.12
		RB Size=1, RB Offset=2	22.90	22.44	22.71
		RB Size=1, RB Offset=5	21.75	22.81	22.98
		RB Size=3, RB Offset=0	21.85	21.21	22.95
		RB Size=3, RB Offset=1	22.34	22.41	22.64
		RB Size=3, RB Offset=2	21.76	21.03	21.05
		RB Size=6, RB Offset=0	21.26	21.06	21.40
	16QAM	RB Size=1, RB Offset=0	22.82	22.44	22.79
		RB Size=1, RB Offset=2	21.82	21.48	22.72
		RB Size=1, RB Offset=5	22.30	21.38	22.94
		RB Size=3, RB Offset=0	22.38	21.57	22.11
		RB Size=3, RB Offset=1	21.17	22.78	21.57
		RB Size=3, RB Offset=2	22.61	21.98	21.13
		RB Size=6, RB Offset=0	20.15	20.53	20.88
3.0	QPSK	RB Size=1, RB Offset=0	22.49	22.51	22.99
		RB Size=1, RB Offset=7	22.03	22.56	22.23
		RB Size=1, RB Offset=14	21.39	22.84	22.86
		RB Size=8, RB Offset=0	22.38	22.06	21.55
		RB Size=8, RB Offset=4	21.31	21.25	22.66
		RB Size=8, RB Offset=7	22.71	21.52	22.55
		RB Size=15, RB Offset=0	20.87	20.14	20.19
	16QAM	RB Size=1, RB Offset=0	22.61	22.60	22.64
		RB Size=1, RB Offset=7	21.74	22.55	22.09
		RB Size=1, RB Offset=14	21.47	22.83	22.11
		RB Size=8, RB Offset=0	21.24	22.85	21.21
		RB Size=8, RB Offset=4	22.43	21.01	21.68
		RB Size=8, RB Offset=7	22.12	22.85	22.65
		RB Size=15, RB Offset=0	20.98	20.92	20.73

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.26	22.06	21.40
		RB Size=1, RB Offset=24	21.82	21.44	22.79
		RB Size=1, RB Offset=49	21.82	21.48	22.72
		RB Size=25, RB Offset=0	22.30	21.38	22.94
		RB Size=25, RB Offset=12	22.38	21.57	22.11
		RB Size=25, RB Offset=24	21.17	22.78	21.57
		RB Size=50, RB Offset=0	20.61	20.98	20.13
	16QAM	RB Size=1, RB Offset=0	22.15	22.53	22.88
		RB Size=1, RB Offset=24	22.49	22.51	22.99
		RB Size=1, RB Offset=49	22.03	22.56	22.23
		RB Size=25, RB Offset=0	21.39	22.84	22.86
		RB Size=25, RB Offset=12	22.38	22.06	21.55
		RB Size=25, RB Offset=24	21.31	21.25	22.66
		RB Size=50, RB Offset=0	20.71	20.52	20.55
10.0	QPSK	RB Size=1, RB Offset=0	22.26	22.06	22.40
		RB Size=1, RB Offset=24	21.82	21.44	22.79
		RB Size=1, RB Offset=49	21.82	21.48	22.72
		RB Size=25, RB Offset=0	22.30	21.38	22.94
		RB Size=25, RB Offset=12	22.38	21.57	22.11
		RB Size=25, RB Offset=24	21.17	22.78	21.57
		RB Size=50, RB Offset=0	20.61	20.98	20.13
	16QAM	RB Size=1, RB Offset=0	23.15	22.53	22.88
		RB Size=1, RB Offset=24	22.49	22.51	22.99
		RB Size=1, RB Offset=49	22.03	22.56	22.23
		RB Size=25, RB Offset=0	21.39	22.84	22.86
		RB Size=25, RB Offset=12	22.38	22.06	21.55
		RB Size=25, RB Offset=24	21.31	21.25	22.66
		RB Size=50, RB Offset=0	20.71	20.52	20.55

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.87	23.14	23.19
		RB Size=1, RB Offset=37	21.45	22.60	22.64
		RB Size=1, RB Offset=74	21.74	22.55	22.09
		RB Size=36, RB Offset=0	21.47	22.83	22.11
		RB Size=36, RB Offset=18	21.24	22.85	21.21
		RB Size=36, RB Offset=37	22.43	21.01	21.68
		RB Size=75, RB Offset=0	20.12	20.85	20.65
	16QAM	RB Size=1, RB Offset=0	22.98	22.92	22.73
		RB Size=1, RB Offset=37	21.34	22.68	22.11
		RB Size=1, RB Offset=74	22.57	21.11	22.83
		RB Size=36, RB Offset=0	21.29	21.34	21.78
		RB Size=36, RB Offset=18	22.46	22.25	21.43
		RB Size=36, RB Offset=37	21.07	21.59	22.77
		RB Size=75, RB Offset=0	20.82	20.60	20.85
20.0	QPSK	RB Size=1, RB Offset=0	22.28	22.61	22.05
		RB Size=1, RB Offset=49	21.65	22.13	21.93
		RB Size=1, RB Offset=99	21.17	21.17	21.12
		RB Size=50, RB Offset=0	22.90	22.44	22.71
		RB Size=50, RB Offset=24	21.75	22.81	22.98
		RB Size=50, RB Offset=49	21.85	21.21	22.95
		RB Size=100, RB Offset=0	20.34	20.41	20.64
	16QAM	RB Size=1, RB Offset=0	22.76	22.03	22.05
		RB Size=1, RB Offset=49	22.26	22.06	21.98
		RB Size=1, RB Offset=99	21.82	21.44	22.79
		RB Size=50, RB Offset=0	21.82	21.48	22.72
		RB Size=50, RB Offset=24	22.30	21.38	22.94
		RB Size=50, RB Offset=49	22.38	21.57	22.11
		RB Size=100, RB Offset=0	20.17	20.78	20.57

**Peak-to-average ratio (PAR)**

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.36	13	Pass
QPSK (100%RB Size)	6.53	13	Pass
16QAM (1RB Size)	4.18	13	Pass
16QAM (100%RB Size)	6.23	13	Pass

**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	77.17	283	2.0	H	13.6	0.40	8.52	21.72	30
1732.50	75.54	175	1.9	V	10.0	0.40	8.52	18.12	30
3 MHz Bandwidth									
1732.50	77.03	150	1.8	H	13.4	0.40	8.52	21.52	30
1732.50	75.26	204	2.2	V	9.6	0.40	8.52	17.72	30
5 MHz Bandwidth									
1732.50	76.88	29	1.3	H	13.2	0.40	8.52	21.32	30
1732.50	75.16	297	1.3	V	9.5	0.40	8.52	17.62	30
10 MHz Bandwidth									
1732.50	76.72	336	1.4	H	13.1	0.40	8.52	21.22	30
1732.50	74.64	171	1.3	V	9.0	0.40	8.52	17.12	30
15 MHz Bandwidth									
1732.50	76.41	178	1.9	H	12.8	0.40	8.52	20.92	30
1732.50	74.64	217	2.0	V	9.0	0.40	8.52	17.12	30
20 MHz Bandwidth									
1732.50	76.12	245	1.8	H	12.5	0.40	8.52	20.62	30
1732.50	74.47	115	1.6	V	8.8	0.40	8.52	16.92	30

**16QAM:**

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	76.91	29	2.3	H	13.3	0.40	8.52	21.42	30
1732.50	75.24	212	1.4	V	9.6	0.40	8.52	17.72	30
3 MHz Bandwidth									
1732.50	76.69	43	1.8	H	13.0	0.40	8.52	21.12	30
1732.50	74.95	347	2.4	V	9.3	0.40	8.52	17.42	30
5 MHz Bandwidth									
1732.50	76.46	59	1.1	H	12.8	0.40	8.52	20.92	30
1732.50	74.89	33	2.0	V	9.2	0.40	8.52	17.32	30
10 MHz Bandwidth									
1732.50	76.16	217	2.0	H	12.5	0.40	8.52	20.62	30
1732.50	74.62	287	2.2	V	9.0	0.40	8.52	17.12	30
15 MHz Bandwidth									
1732.50	75.71	242	1.7	H	12.1	0.40	8.52	20.22	30
1732.50	74.39	127	2.0	V	8.7	0.40	8.52	16.82	30
20 MHz Bandwidth									
1732.50	75.66	173	1.8	H	12.0	0.40	8.52	20.12	30
1732.50	74.13	316	1.2	V	8.5	0.40	8.52	16.62	30

**LTE Band 7**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5	QPSK	RB Size=1, RB Offset=0	22.32	22.24	22.18
		RB Size=1, RB Offset=12	22.75	22.97	21.65
		RB Size=1, RB Offset=24	21.38	21.30	22.20
		RB Size=12, RB Offset=0	22.01	21.07	21.63
		RB Size=12, RB Offset=6	22.25	22.19	21.27
		RB Size=12, RB Offset=11	22.87	22.81	22.63
		RB Size=25, RB Offset=0	21.92	22.43	21.08
	16QAM	RB Size=1, RB Offset=0	22.01	22.47	22.68
		RB Size=1, RB Offset=12	21.26	21.05	22.75
		RB Size=1, RB Offset=24	22.22	21.21	22.78
		RB Size=12, RB Offset=0	21.19	21.89	22.46
		RB Size=12, RB Offset=6	22.35	22.85	21.33
		RB Size=12, RB Offset=11	21.91	21.37	22.12
		RB Size=25, RB Offset=0	21.34	21.48	21.58
10	QPSK	RB Size=1, RB Offset=0	22.48	22.20	21.82
		RB Size=1, RB Offset=24	22.09	22.69	22.89
		RB Size=1, RB Offset=49	21.03	22.90	21.35
		RB Size=25, RB Offset=0	21.41	21.40	21.73
		RB Size=25, RB Offset=12	22.49	21.27	21.71
		RB Size=25, RB Offset=24	22.54	22.24	21.57
		RB Size=50, RB Offset=0	21.53	21.94	21.33
	16QAM	RB Size=1, RB Offset=0	22.55	22.54	21.86
		RB Size=1, RB Offset=24	22.95	22.27	21.71
		RB Size=1, RB Offset=49	22.92	21.68	22.97
		RB Size=25, RB Offset=0	22.37	21.09	22.16
		RB Size=25, RB Offset=12	21.83	22.07	22.37
		RB Size=25, RB Offset=24	22.65	22.44	21.73
		RB Size=50, RB Offset=0	21.87	21.73	21.92

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15	QPSK	RB Size=1, RB Offset=0	22.09	22.97	22.57
		RB Size=1, RB Offset=37	21.08	22.86	22.95
		RB Size=1, RB Offset=74	21.41	21.46	22.43
		RB Size=36, RB Offset=0	21.64	22.3	21.76
		RB Size=36, RB Offset=18	21.78	21.47	22.88
		RB Size=36, RB Offset=37	21.96	21.60	22.34
		RB Size=75, RB Offset=0	21.61	21.71	21.37
	16QAM	RB Size=1, RB Offset=0	22.96	22.32	22.66
		RB Size=1, RB Offset=37	22.32	22.24	22.18
		RB Size=1, RB Offset=74	22.75	22.97	21.65
		RB Size=36, RB Offset=0	21.38	21.30	22.20
		RB Size=36, RB Offset=18	22.01	21.07	21.63
		RB Size=36, RB Offset=37	22.25	22.19	21.27
		RB Size=75, RB Offset=0	21.87	21.81	21.63
20	QPSK	RB Size=1, RB Offset=0	22.92	22.43	22.08
		RB Size=1, RB Offset=49	21.01	21.47	21.68
		RB Size=1, RB Offset=99	21.26	21.05	22.75
		RB Size=50, RB Offset=0	22.22	21.21	22.78
		RB Size=50, RB Offset=24	21.19	21.89	22.46
		RB Size=50, RB Offset=49	22.35	22.85	21.33
		RB Size=100, RB Offset=0	21.91	21.37	21.12
	16QAM	RB Size=1, RB Offset=0	22.34	22.48	21.58
		RB Size=1, RB Offset=49	22.48	22.20	21.82
		RB Size=1, RB Offset=99	22.09	22.69	22.89
		RB Size=50, RB Offset=0	21.03	22.90	21.35
		RB Size=50, RB Offset=24	21.41	21.40	21.73
		RB Size=50, RB Offset=49	22.49	21.27	21.71
		RB Size=100, RB Offset=0	21.54	21.24	21.57

**Peak-to-average ratio (PAR)**

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.21	13	Pass
QPSK (100%RB Size)	5.37	13	Pass
16QAM (1RB Size)	4.66	13	Pass
16QAM (100%RB Size)	5.84	13	Pass

**EIRP:**

**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.0	74.41	117	2.4	H	11.8	0.49	10.10	21.41	33
2535.0	70.08	306	2.3	V	6.7	0.49	10.10	16.31	33
10 MHz Bandwidth									
2535.0	74.12	271	1.8	H	11.5	0.49	10.10	21.11	33
2535.0	69.52	270	1.9	V	6.2	0.49	10.10	15.81	33
15 MHz Bandwidth									
2535.0	73.94	38	1.4	H	11.3	0.49	10.10	20.91	33
2535.0	69.27	298	2.2	V	5.9	0.49	10.10	15.51	33
20 MHz Bandwidth									
2535.0	73.43	168	2.1	H	10.8	0.49	10.10	20.41	33
2535.0	68.65	350	2.3	V	5.3	0.49	10.10	14.91	33

**16QAM:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	74.29	86	1.3	H	11.6	0.49	10.10	21.21	33
2535.00	70.18	36	2.2	V	6.8	0.49	10.10	16.41	33
10 MHz Bandwidth									
2535.00	73.94	347	1.2	H	11.3	0.49	10.10	20.91	33
2535.00	69.42	345	2.4	V	6.1	0.49	10.10	15.71	33
15 MHz Bandwidth									
2535.00	73.67	23	1.7	H	11.0	0.49	10.10	20.61	33
2535.00	69.27	255	1.9	V	5.9	0.49	10.10	15.51	33
20 MHz Bandwidth									
2535.00	73.16	5	2.2	H	10.5	0.49	10.10	20.11	33
2535.00	68.84	117	2.0	V	5.5	0.49	10.10	15.11	33

**LTE Band 12:**

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.89	22.97	22.84
		RB Size=1, RB Offset=2	21.94	21.63	22.74
		RB Size=1, RB Offset=5	21.60	21.44	22.37
		RB Size=3, RB Offset=0	21.66	22.40	21.41
		RB Size=3, RB Offset=1	21.53	21.86	21.78
		RB Size=3, RB Offset=2	22.21	21.15	21.25
		RB Size=6, RB Offset=0	21.36	21.43	21.97
	16QAM	RB Size=1, RB Offset=0	22.43	22.94	22.57
		RB Size=1, RB Offset=2	21.35	22.09	22.8
		RB Size=1, RB Offset=5	21.47	22.04	21.49
		RB Size=3, RB Offset=0	22.41	22.17	22.18
		RB Size=3, RB Offset=1	22.47	22.99	22.36
		RB Size=3, RB Offset=2	21.95	21.54	21.71
		RB Size=6, RB Offset=0	21.68	21.43	21.42
3.0	QPSK	RB Size=1, RB Offset=0	22.88	22.78	22.09
		RB Size=1, RB Offset=7	22.89	22.90	22.88
		RB Size=1, RB Offset=14	21.42	22.07	21.02
		RB Size=8, RB Offset=0	22.67	22.9	21.82
		RB Size=8, RB Offset=4	21.61	22.73	21.93
		RB Size=8, RB Offset=7	22.77	22.70	22.71
		RB Size=15, RB Offset=0	21.85	21.96	21.14
	16QAM	RB Size=1, RB Offset=0	22.97	22.88	22.66
		RB Size=1, RB Offset=7	22.69	22.70	22.69
		RB Size=1, RB Offset=14	21.98	22.91	21.96
		RB Size=8, RB Offset=0	21.41	22.96	22.76
		RB Size=8, RB Offset=4	22.78	22.15	21.78
		RB Size=8, RB Offset=7	22.63	22.73	21.11
		RB Size=15, RB Offset=0	21.43	21.38	21.91

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.62	22.61	22.39
		RB Size=1, RB Offset=12	21.89	21.97	21.84
		RB Size=1, RB Offset=24	21.94	21.63	22.74
		RB Size=12, RB Offset=0	21.57	21.44	22.37
		RB Size=12, RB Offset=6	21.66	22.42	21.49
		RB Size=12, RB Offset=11	21.53	21.86	21.78
		RB Size=25, RB Offset=0	21.21	21.15	21.25
	16QAM	RB Size=1, RB Offset=0	22.36	22.43	22.97
		RB Size=1, RB Offset=12	21.43	22.94	22.57
		RB Size=1, RB Offset=24	21.35	22.09	22.8
		RB Size=12, RB Offset=0	21.47	22.04	21.49
		RB Size=12, RB Offset=6	22.41	22.17	22.18
		RB Size=12, RB Offset=11	22.47	22.99	22.36
		RB Size=25, RB Offset=0	21.95	21.54	21.71
10.0	QPSK	RB Size=1, RB Offset=0	22.68	22.43	22.42
		RB Size=1, RB Offset=24	22.88	21.78	22.09
		RB Size=1, RB Offset=49	22.87	22.90	22.78
		RB Size=25, RB Offset=0	21.42	22.07	21.02
		RB Size=25, RB Offset=12	22.67	22.90	21.82
		RB Size=25, RB Offset=24	21.61	22.73	21.93
		RB Size=50, RB Offset=0	21.77	21.70	21.70
	16QAM	RB Size=1, RB Offset=0	22.85	22.96	22.14
		RB Size=1, RB Offset=24	22.97	21.88	21.66
		RB Size=1, RB Offset=49	22.70	22.70	22.69
		RB Size=25, RB Offset=0	21.50	22.91	21.96
		RB Size=25, RB Offset=12	21.41	22.96	22.76
		RB Size=25, RB Offset=24	22.78	22.15	21.78
		RB Size=50, RB Offset=0	21.63	21.73	21.11

**Peak-to-average ratio (PAR)**

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.89	13	Pass
QPSK (100%RB Size)	5.33	13	Pass
16QAM (1RB Size)	4.51	13	Pass
16QAM (100%RB Size)	6.01	13	Pass

**QPSK:**

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
707.5	96.01	202	1.0	H	17.7	0.26	4.25	21.69	34.77
707.5	89.07	22	2.2	V	13.8	0.26	4.25	17.79	34.77
3 MHz Bandwidth									
707.5	95.63	98	2.4	H	17.3	0.26	4.25	21.29	34.77
707.5	88.87	39	1.4	V	13.5	0.26	4.25	17.49	34.77
5 MHz Bandwidth									
707.5	95.12	2	1.7	H	16.8	0.26	4.25	20.79	34.77
707.5	88.43	260	1.8	V	13.1	0.26	4.25	17.09	34.77
10 MHz Bandwidth									
707.5	85.68	236	2.3	H	16.2	0.26	4.25	20.19	34.77
707.5	86.64	72	1.3	V	12.6	0.26	4.25	16.59	34.77

**16QAM:**

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
707.5	95.78	283	1.2	H	17.5	0.26	4.25	21.49	34.77
707.5	88.93	203	2.5	V	13.7	0.26	4.25	17.69	34.77
3 MHz Bandwidth									
707.5	95.42	347	1.7	H	17.1	0.26	4.25	21.09	34.77
707.5	88.48	212	1.7	V	13.2	0.26	4.25	17.19	34.77
5 MHz Bandwidth									
707.5	95.12	275	1.5	H	16.8	0.26	4.25	20.79	34.77
707.5	88.18	110	2.2	V	12.9	0.26	4.25	16.89	34.77
10 MHz Bandwidth									
707.5	94.67	144	1.8	H	16.3	0.26	4.25	20.29	34.77
707.5	87.62	338	1.7	V	12.4	0.26	4.25	16.39	34.77

**LTE Band 17:**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB Size=1, RB Offset=0	22.35	22.34	22.34
		RB Size=1, RB Offset=12	21.73	22.80	22.78
		RB Size=1, RB Offset=24	21.79	21.81	22.86
		RB Size=12, RB Offset=0	22.53	22.63	21.45
		RB Size=12, RB Offset=6	21.05	22.94	22.37
		RB Size=12, RB Offset=11	22.94	21.12	21.76
		RB Size=25, RB Offset=0	20.71	20.33	20.69
	16QAM	RB Size=1, RB Offset=0	22.38	21.68	21.07
		RB Size=1, RB Offset=12	21.26	21.93	22.77
		RB Size=1, RB Offset=24	22.48	22.69	22.19
		RB Size=12, RB Offset=0	22.09	21.29	21.17
		RB Size=12, RB Offset=6	21.35	21.33	22.82
		RB Size=12, RB Offset=11	22.18	21.22	21.28
		RB Size=25, RB Offset=0	20.49	20.82	20.77
10M	QPSK	RB Size=1, RB Offset=0	21.32	21.93	22.45
		RB Size=1, RB Offset=24	22.54	21.78	22.23
		RB Size=1, RB Offset=49	22.33	22.34	22.23
		RB Size=25, RB Offset=0	22.06	21.92	21.98
		RB Size=25, RB Offset=12	22.28	21.43	21.38
		RB Size=25, RB Offset=24	21.28	21.77	21.66
		RB Size=50, RB Offset=0	20.84	20.91	20.79
	16QAM	RB Size=1, RB Offset=0	22.62	22.07	21.47
		RB Size=1, RB Offset=24	21.81	21.38	21.78
		RB Size=1, RB Offset=49	21.49	21.38	21.57
		RB Size=25, RB Offset=0	22.40	22.39	22.48
		RB Size=25, RB Offset=12	22.38	22.29	21.33
		RB Size=25, RB Offset=24	21.68	21.68	22.54
		RB Size=50, RB Offset=0	20.75	20.80	20.81

**Peak-to-average ratio (PAR)**

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.31	13	Pass
QPSK (100%RB Size)	5.17	13	Pass
16QAM (1RB Size)	4.62	13	Pass
16QAM (100%RB Size)	5.35	13	Pass

**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710	95.79	220	1.9	H	17.4	0.26	4.25	21.39	34.77
710	89.86	198	1.1	V	14.6	0.26	4.25	18.59	34.77
10 MHz Bandwidth									
710	95.12	74	1.4	H	16.8	0.26	4.25	20.79	34.77
710	89.78	153	1.9	V	14.5	0.26	4.25	18.49	34.77

**16QAM:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710	96.12	107	2.1	H	17.8	0.26	4.25	21.79	34.77
710	88.98	162	1.9	V	13.7	0.26	4.25	17.69	34.77
10 MHz Bandwidth									
710	85.75	107	1.6	H	17.4	0.26	4.25	21.39	34.77
710	88.35	353	2.3	V	13.1	0.26	4.25	17.09	34.77

**FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH**


**Applicable Standard**

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

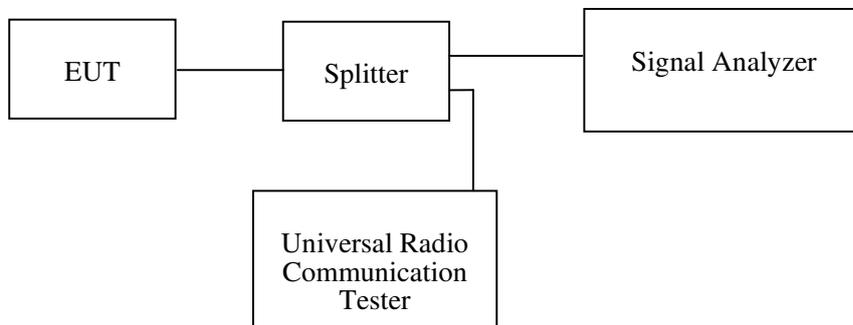

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	25~26 °C
<b>Relative Humidity:</b>	47~48 %
<b>ATM Pressure:</b>	101.0~101.5 kPa

*The testing was performed by Chris Wang from 2016-11-28 to 2016-12-22*

*EUT operation mode: Transmitting*

Test Result: Compliance. Please refer to the following tables and plots.

**Cellular Band (Part 22H)**

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.5	320.6
EGPRS(8PSK)	836.6	242.5	320.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.19	4.93
HSUPA (BPSK)	836.6	4.21	4.91
HSDPA (16QAM)	836.6	4.21	4.93


**PCS Band (Part 24E)**

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	242.5	320.6
EGPRS(8PSK)	1880.0	246.5	310.6


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.21	4.89
HSUPA (BPSK)	1880.0	4.21	4.93
HSDPA (16QAM)	1880.0	4.23	4.91

**Cellular Band (Part 22H)**


**26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode**

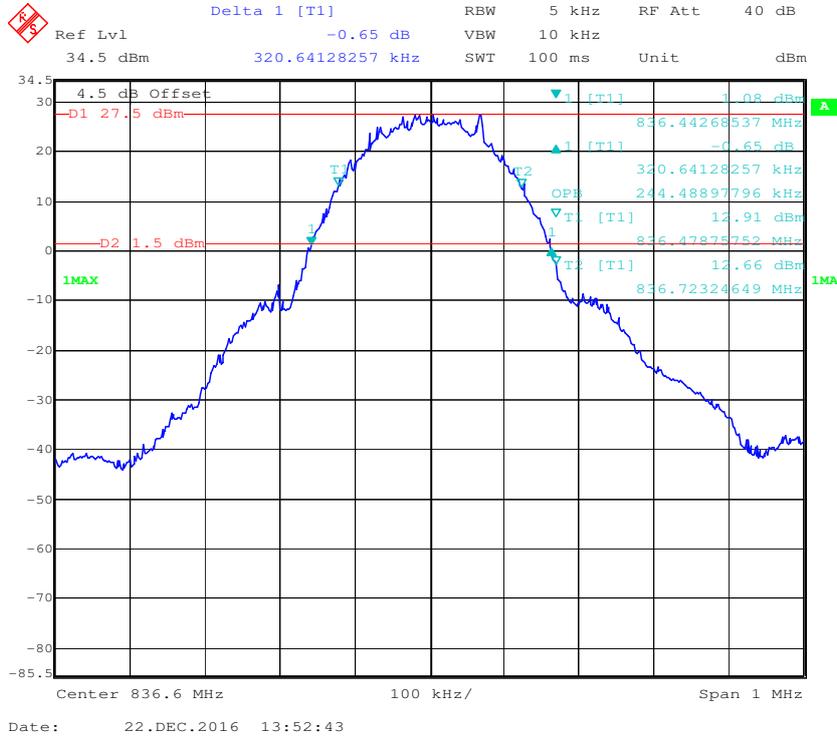


**26 dB Emissions & 99% Occupied Bandwidth for EDGE Mode**

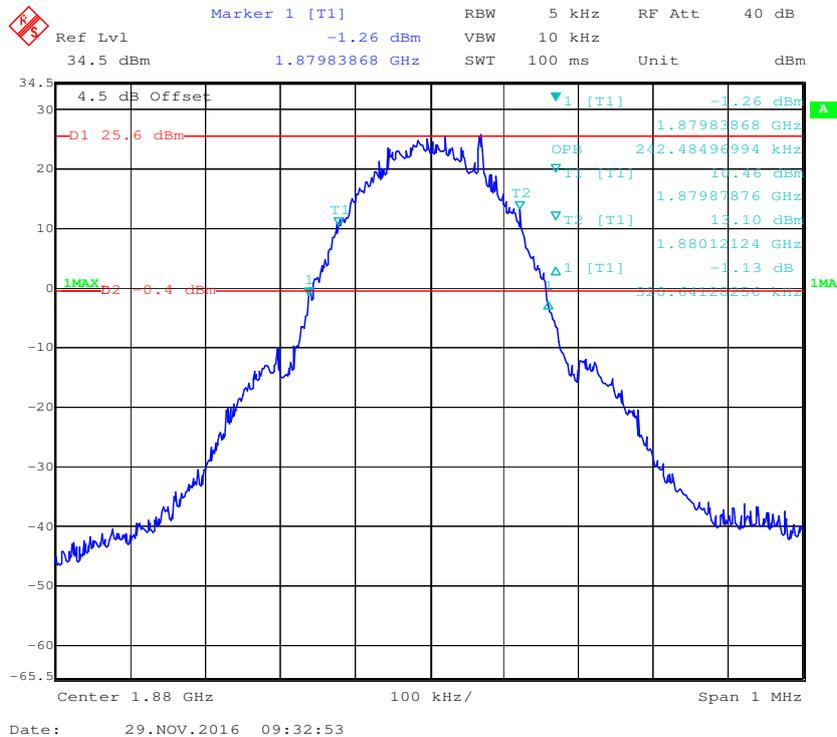


**26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode**

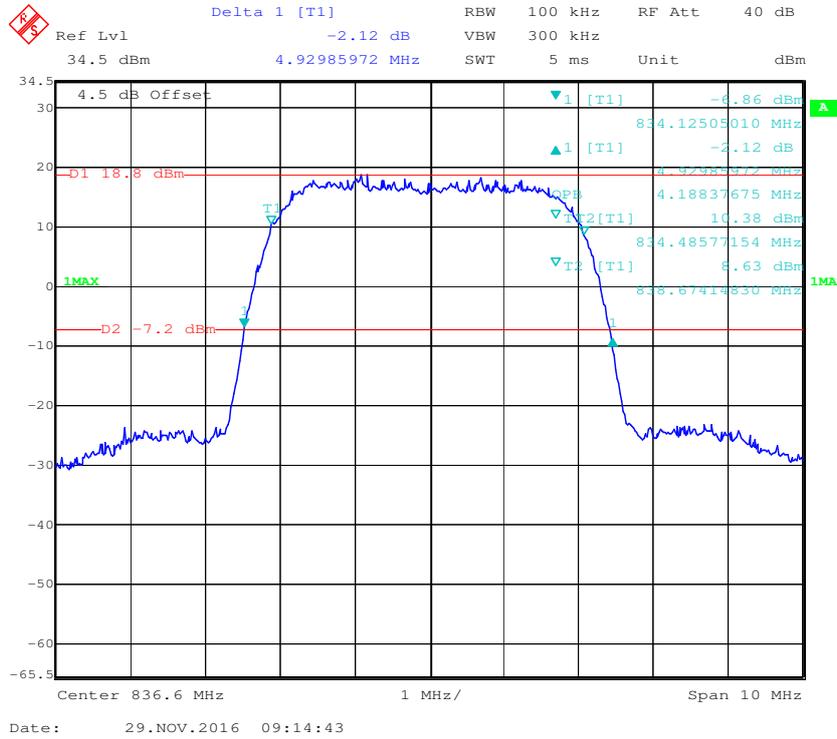

**26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode**

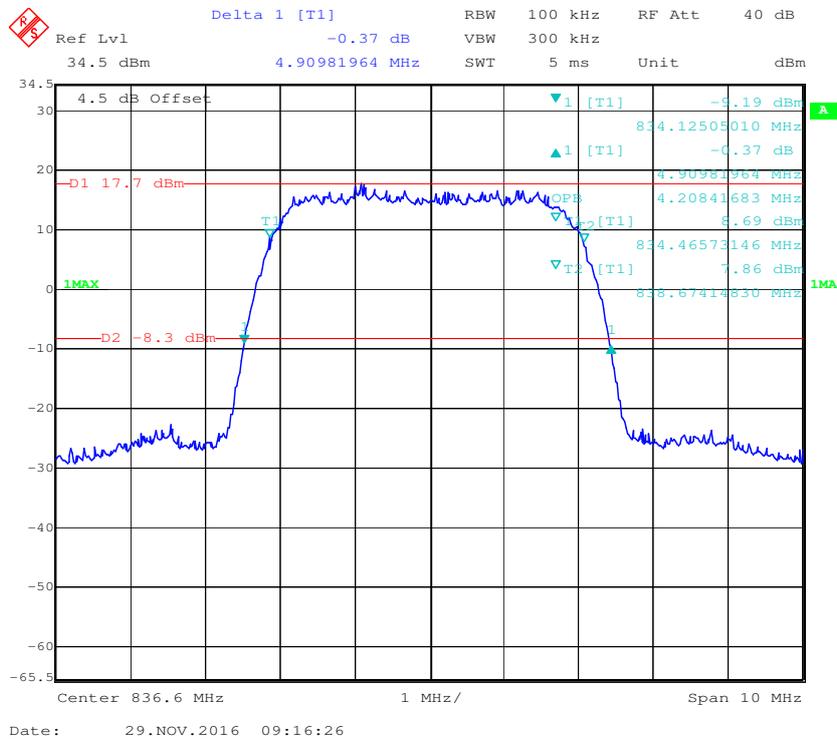


**26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode**

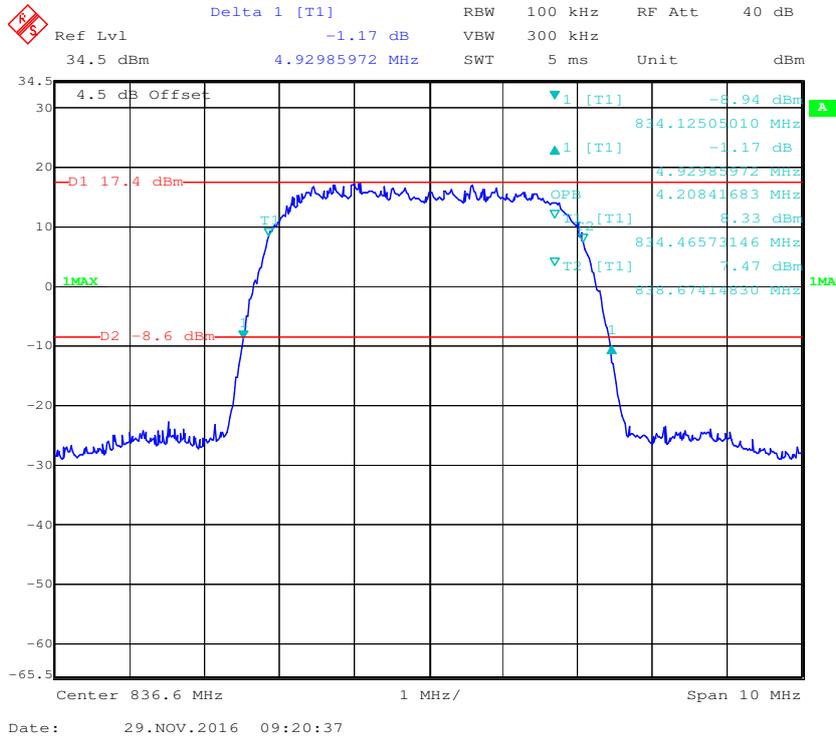


**PCS Band (Part 24E)**


**26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode**

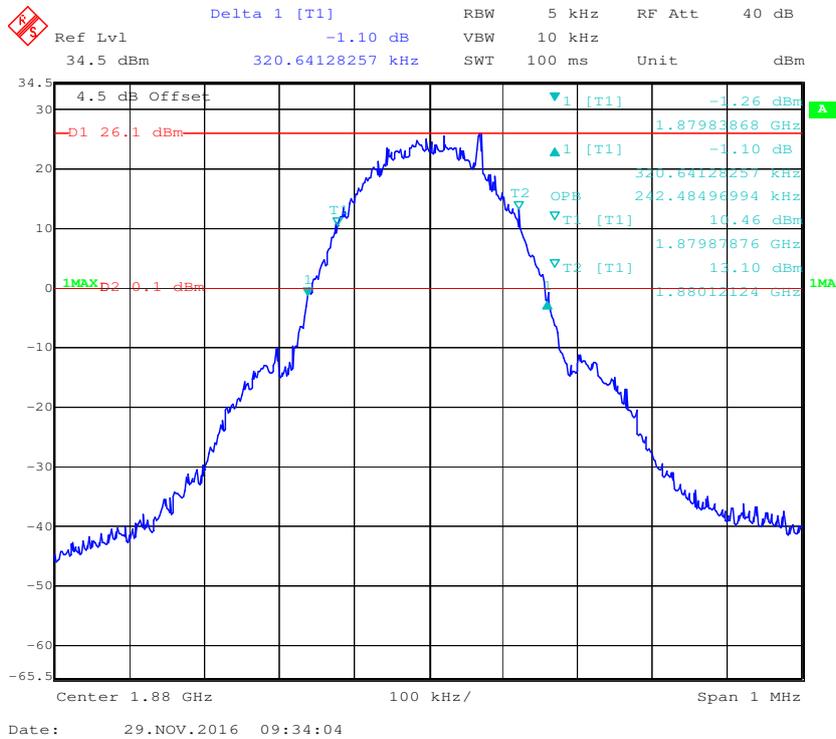


**26 dB Emissions & 99% Occupied Bandwidth for EDGE Mode**

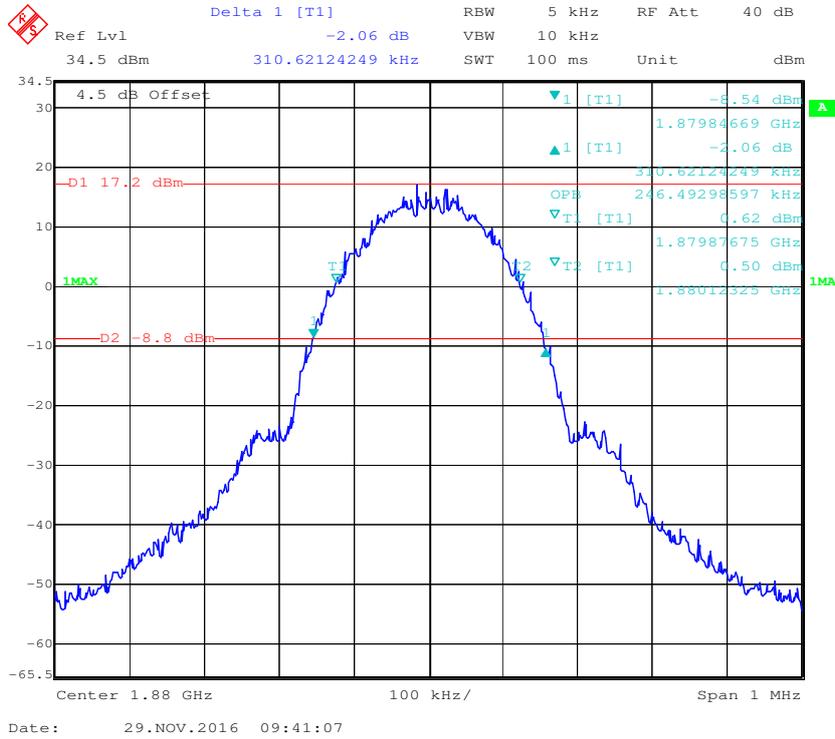


**26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode**

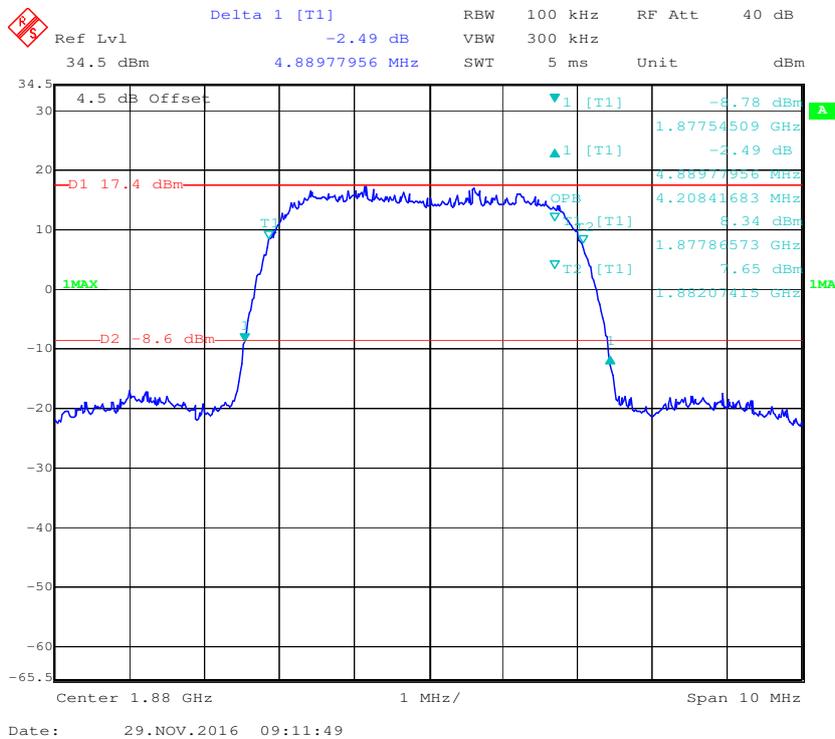

**26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode**

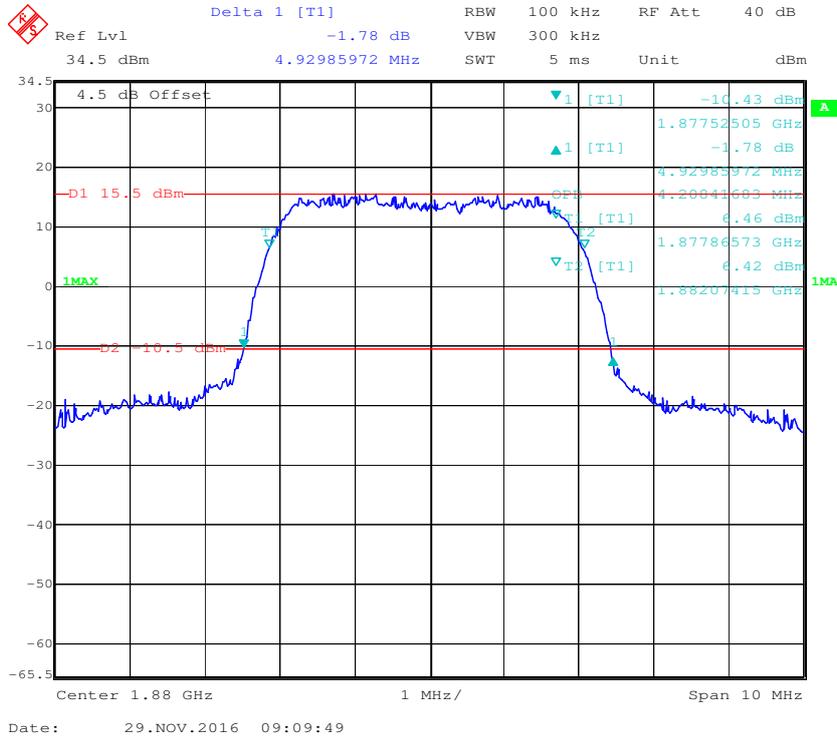


**26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode**

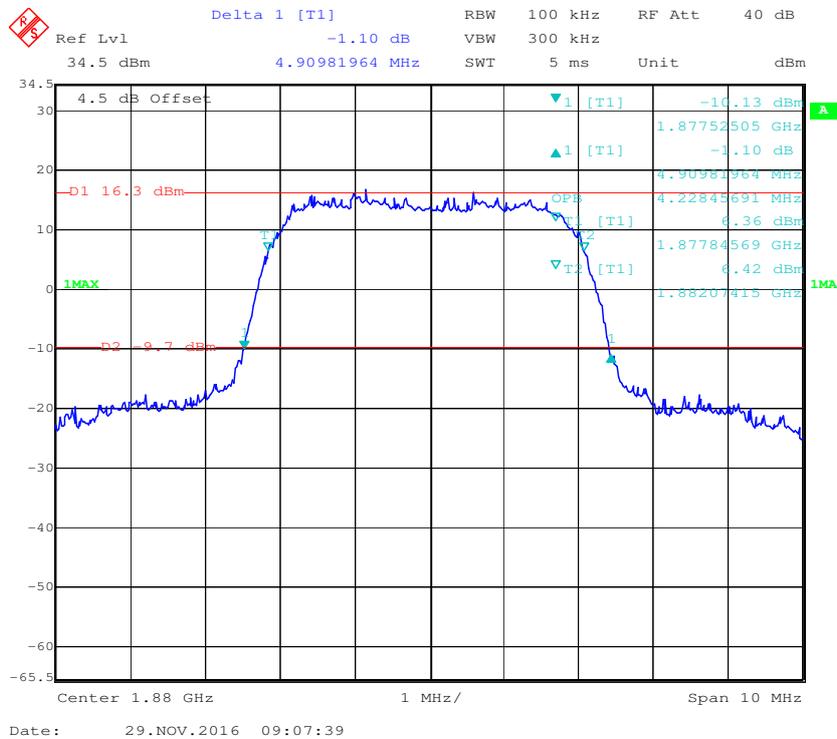


**LTE Band 4: (Middle Channel)**

<b>Bandwidth (MHz)</b>	<b>Modulation</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>26 dB Emission Bandwidth (MHz)</b>
1.4	QPSK	1.117	1.296
	16QAM	1.105	1.285
3.0	QPSK	2.693	2.934
	16QAM	2.705	2.982
5.0	QPSK	4.549	5.110
	16QAM	4.529	5.070
10.0	QPSK	8.978	9.900
	16QAM	8.978	9.739
15.0	QPSK	13.587	15.090
	16QAM	13.527	15.030
20.0	QPSK	18.036	19.639
	16QAM	18.116	19.719


**QPSK (1.4 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

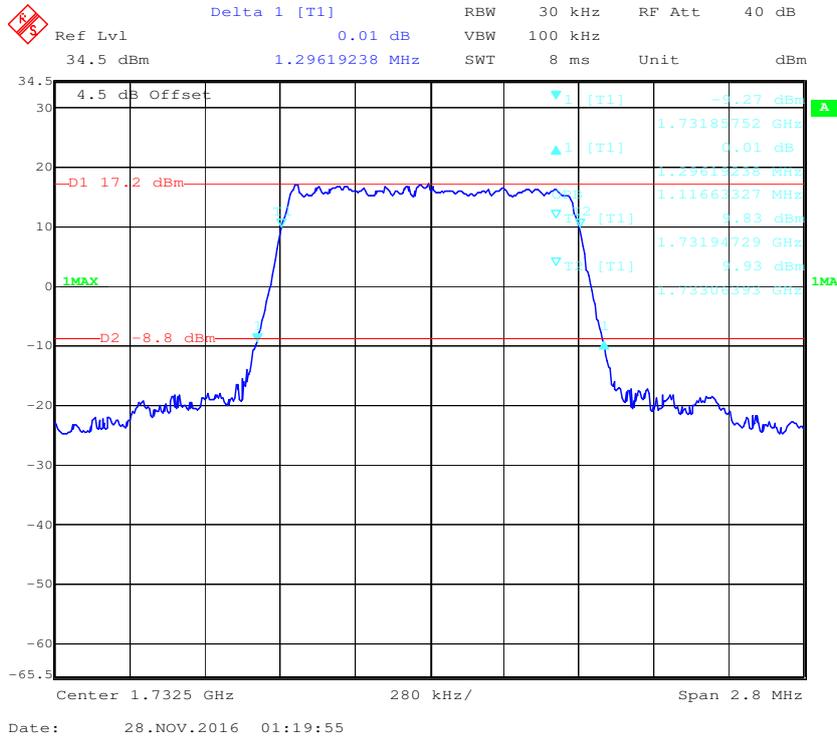


**16-QAM (1.4 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

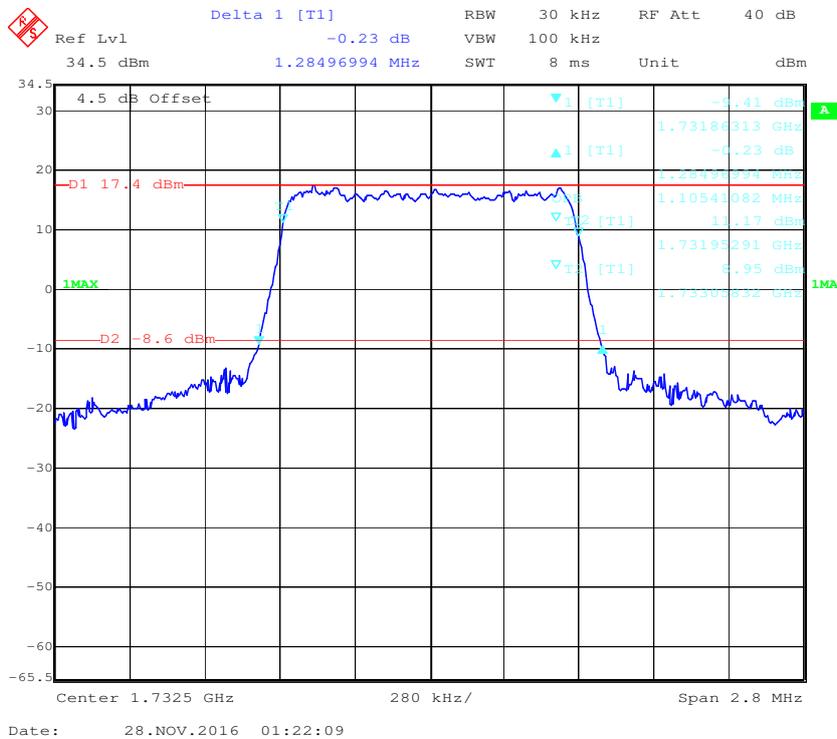


**QPSK (3.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

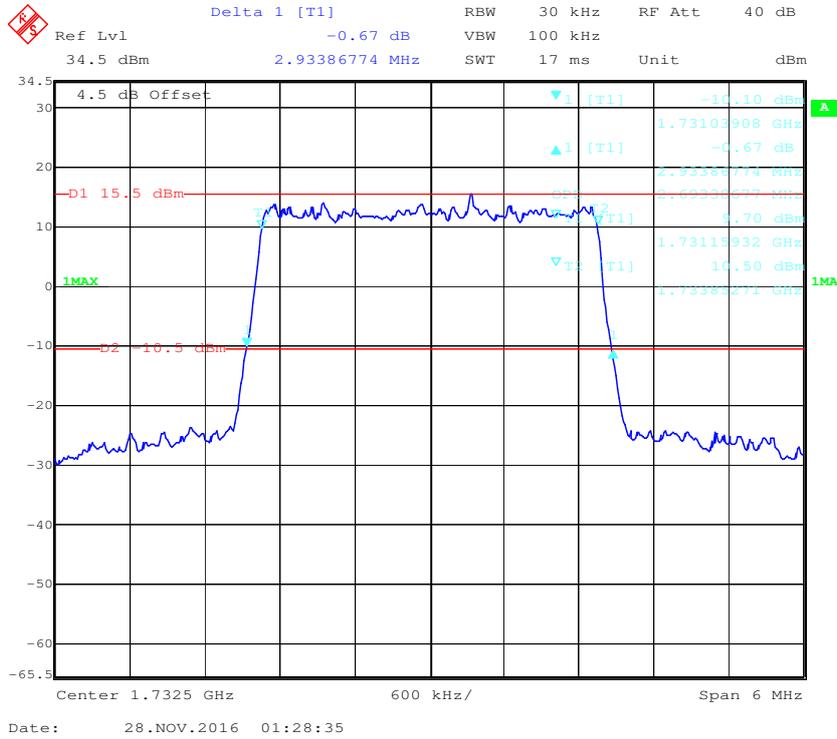


**16-QAM (3.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

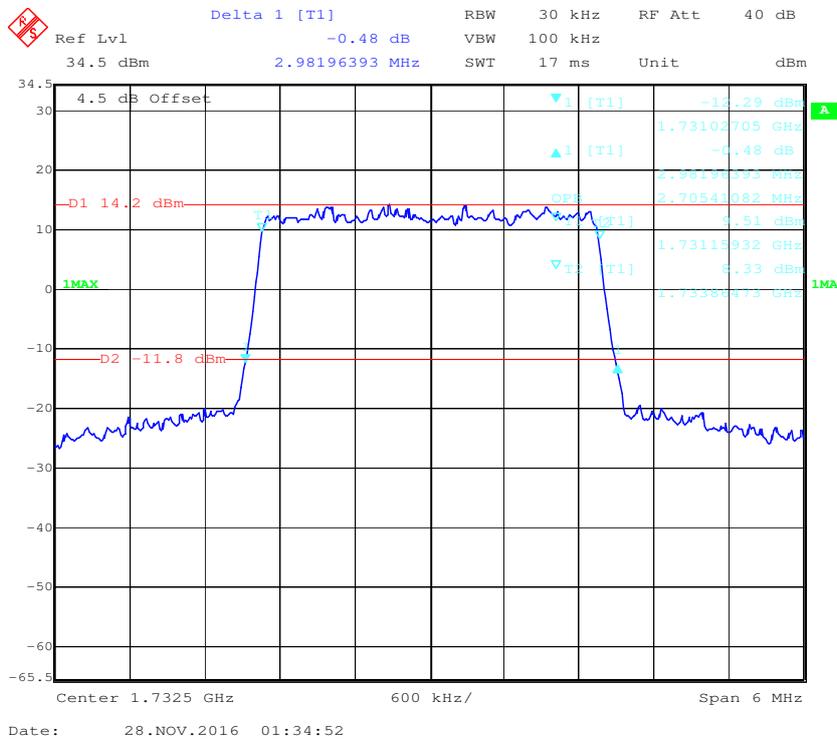


**QPSK (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

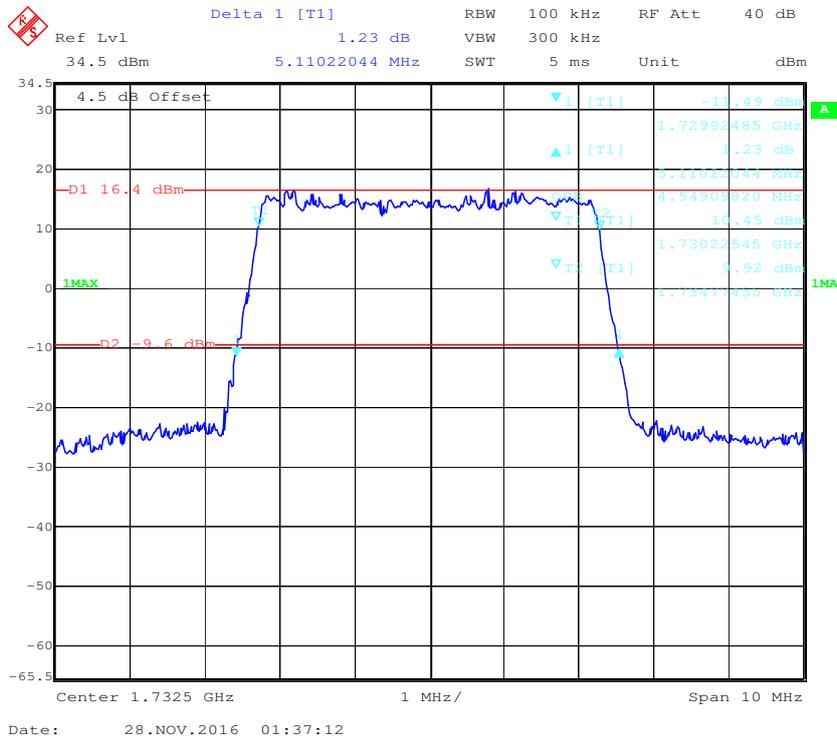


**16-QAM (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

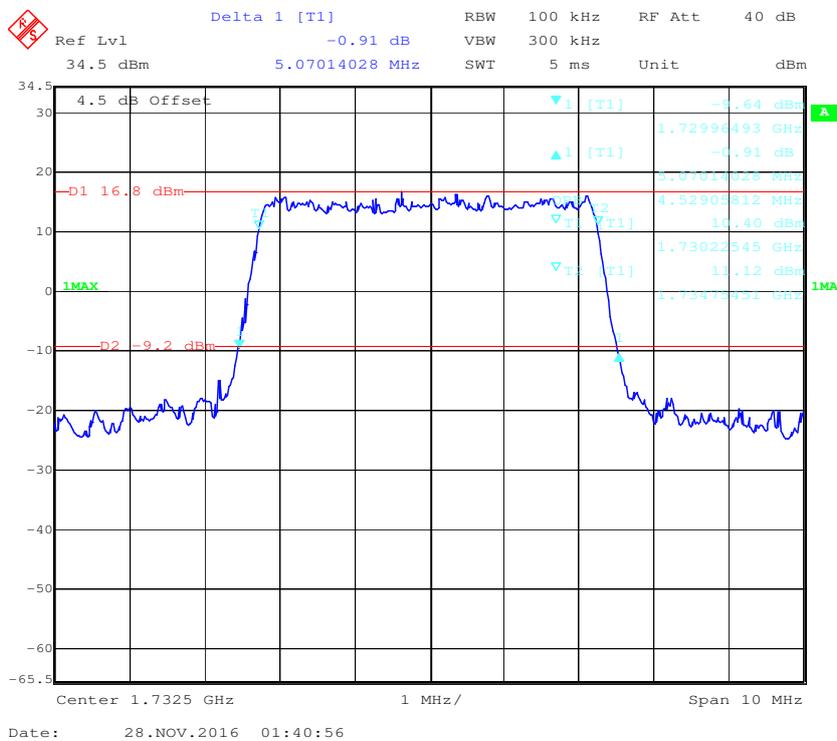


**QPSK (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

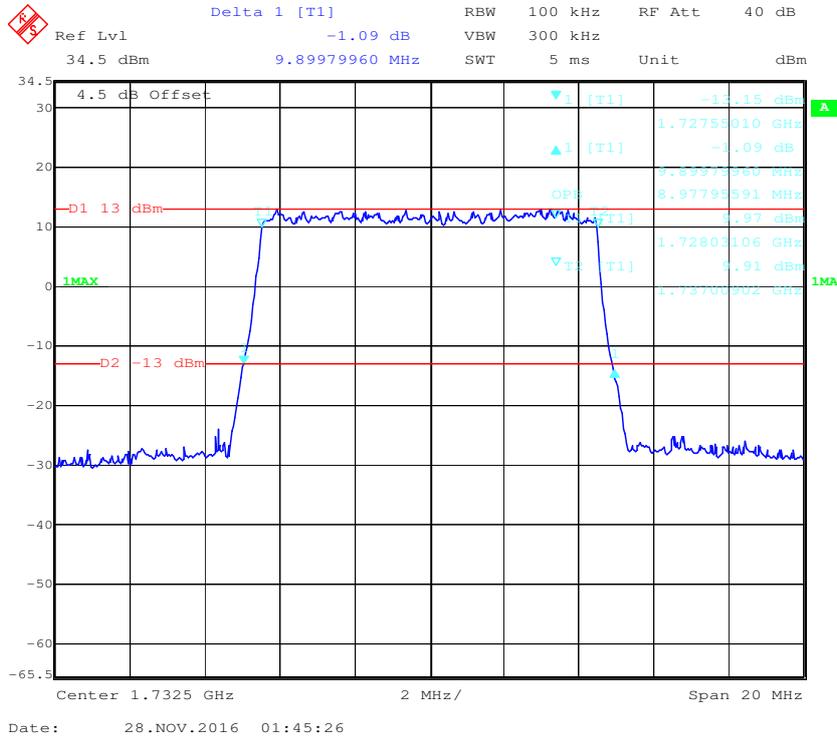


**16-QAM (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

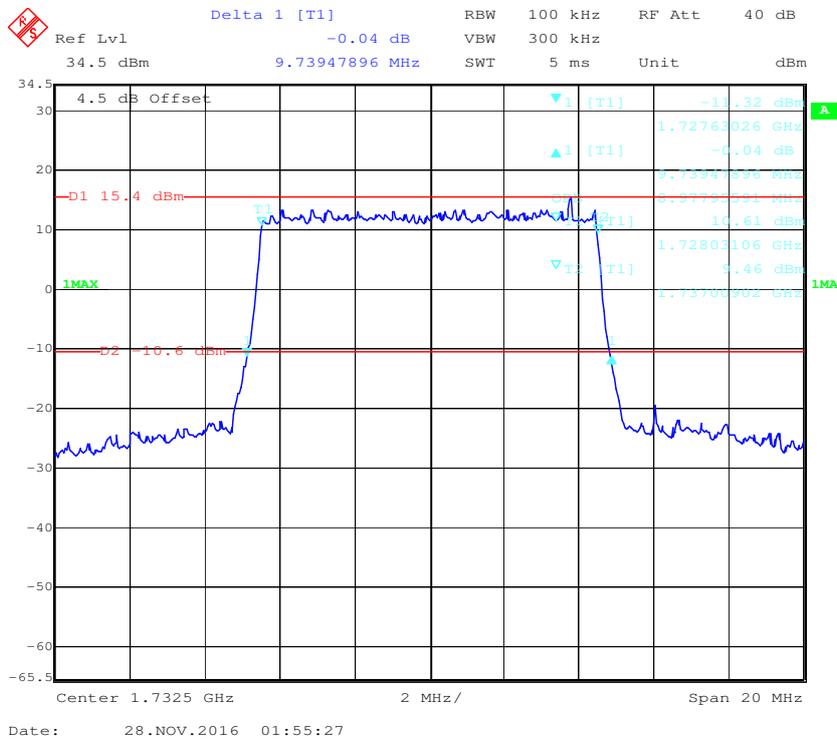


**QPSK (15.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

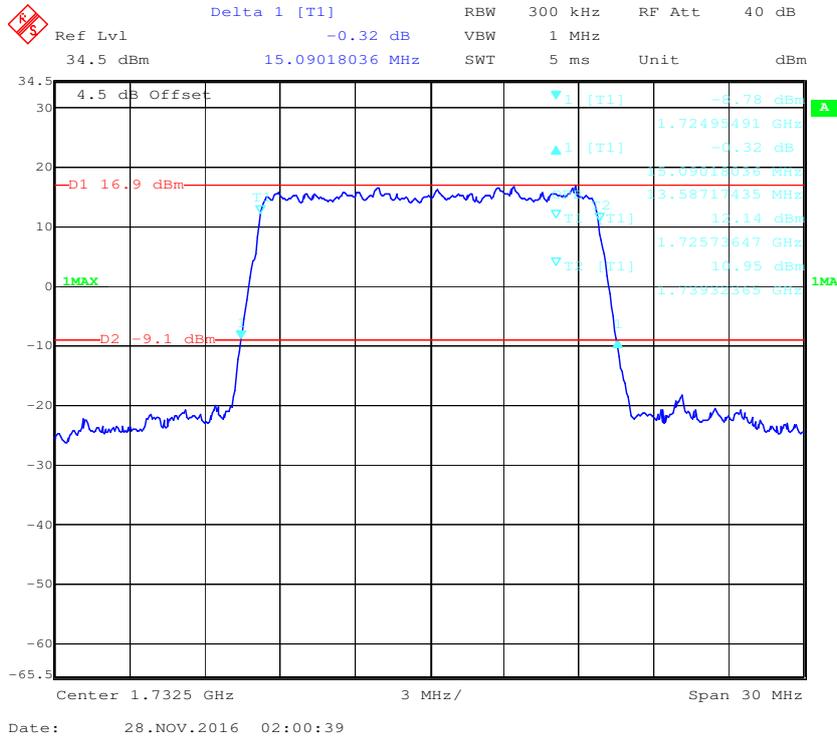


**16-QAM (15.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

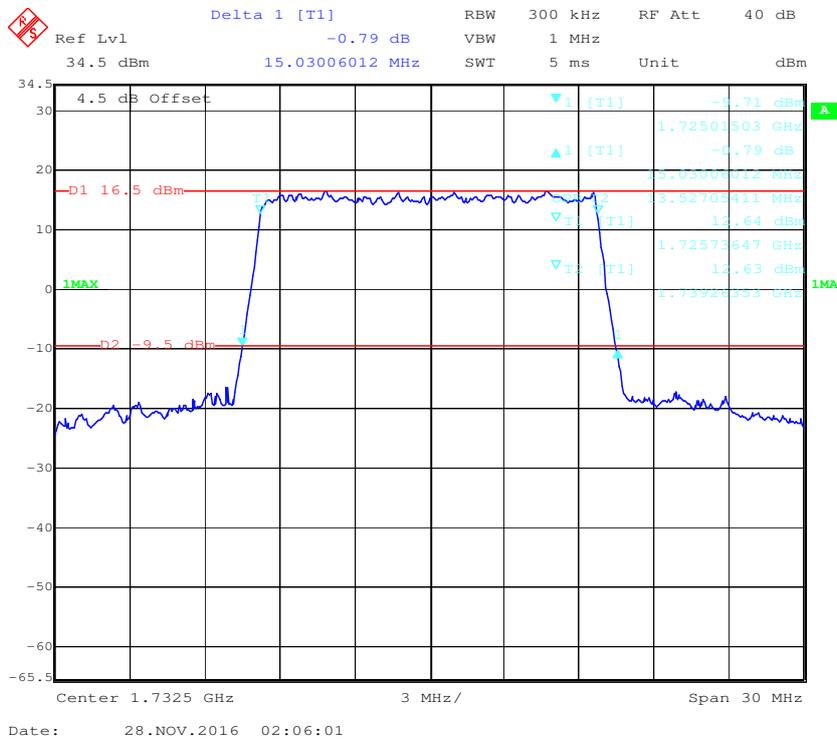

**QPSK (20.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

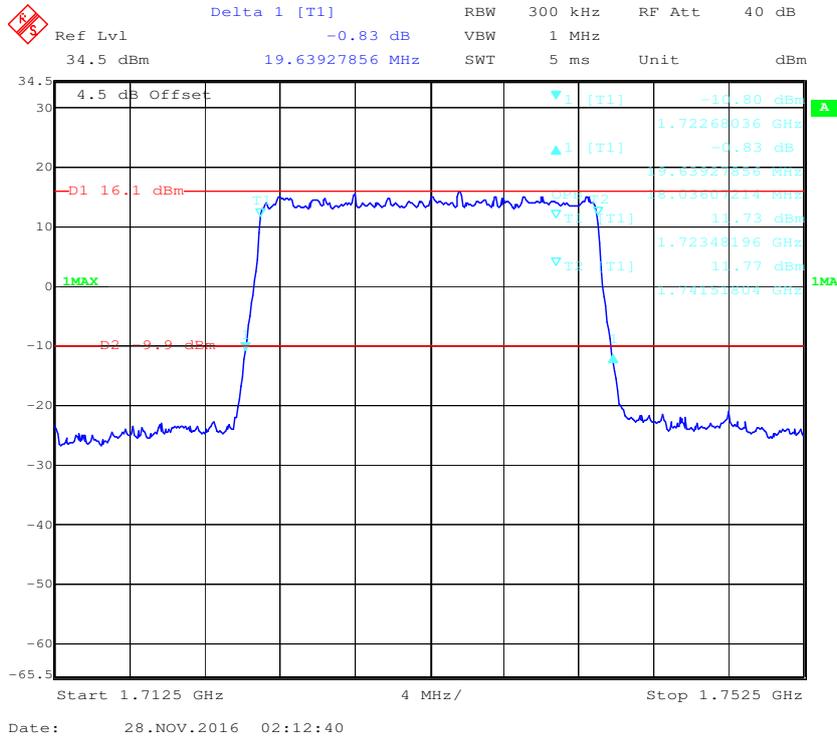


**16-QAM (20.0 MHz) -99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

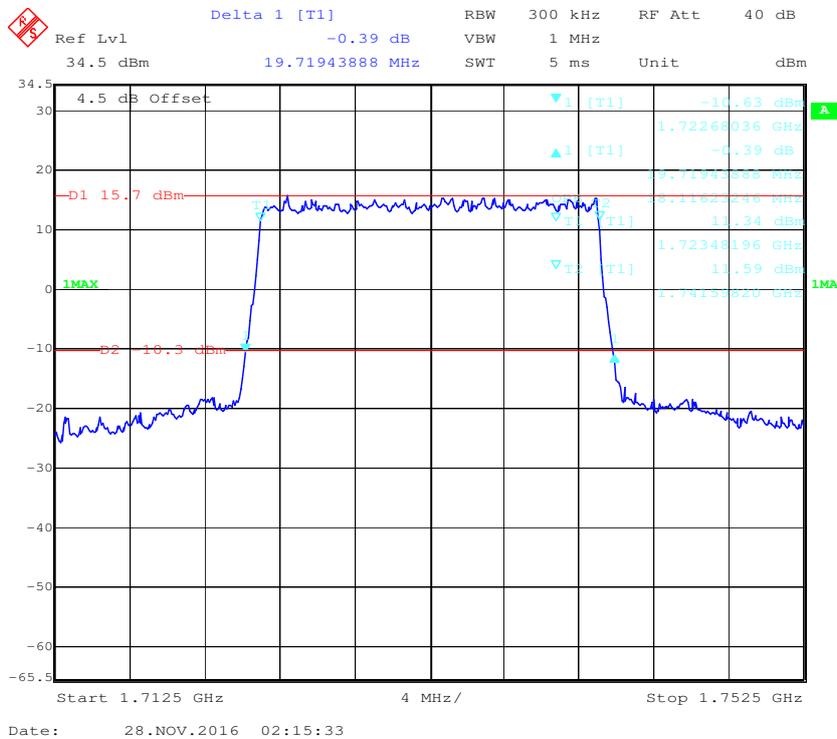


**LTE BAND 7:**

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.090
	16QAM	4.549	5.090
10.0	QPSK	9.018	9.900
	16QAM	8.978	9.659
15.0	QPSK	13.587	15.090
	16QAM	13.587	15.090
20.0	QPSK	18.036	19.639
	16QAM	18.116	19.719


**QPSK (5 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

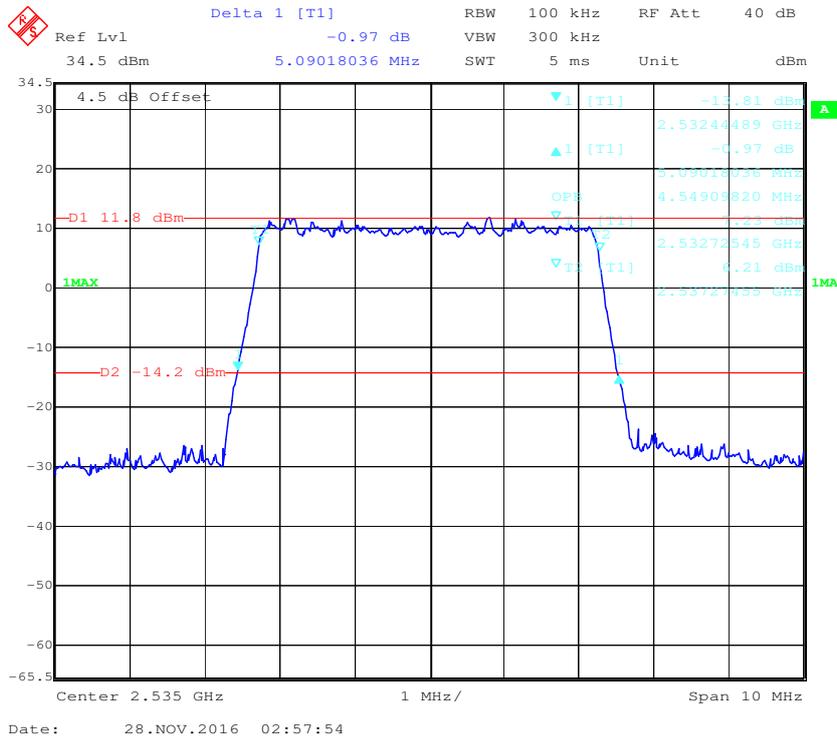

**16-QAM (5 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

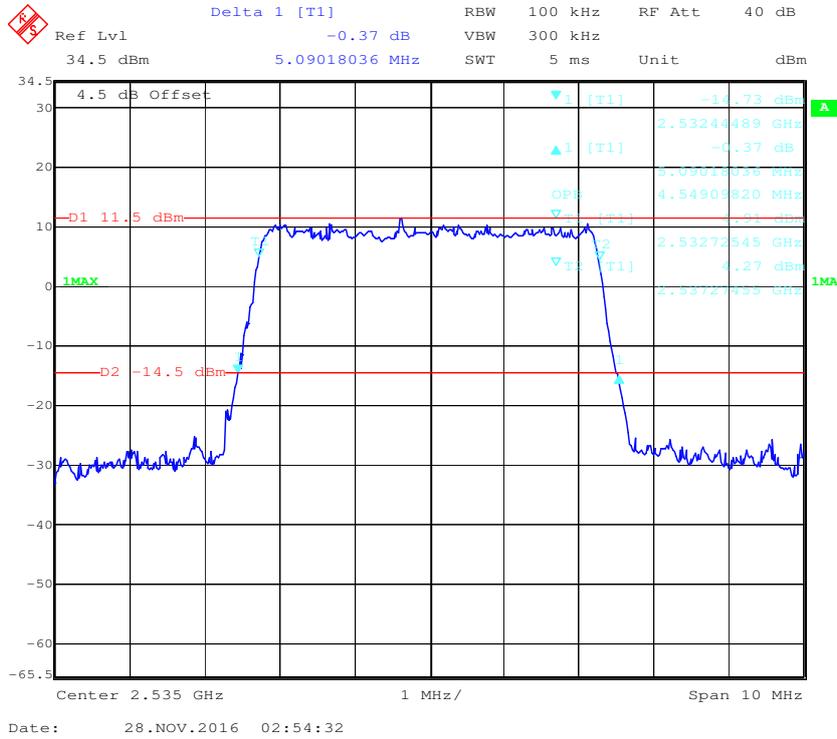


**QPSK (10 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

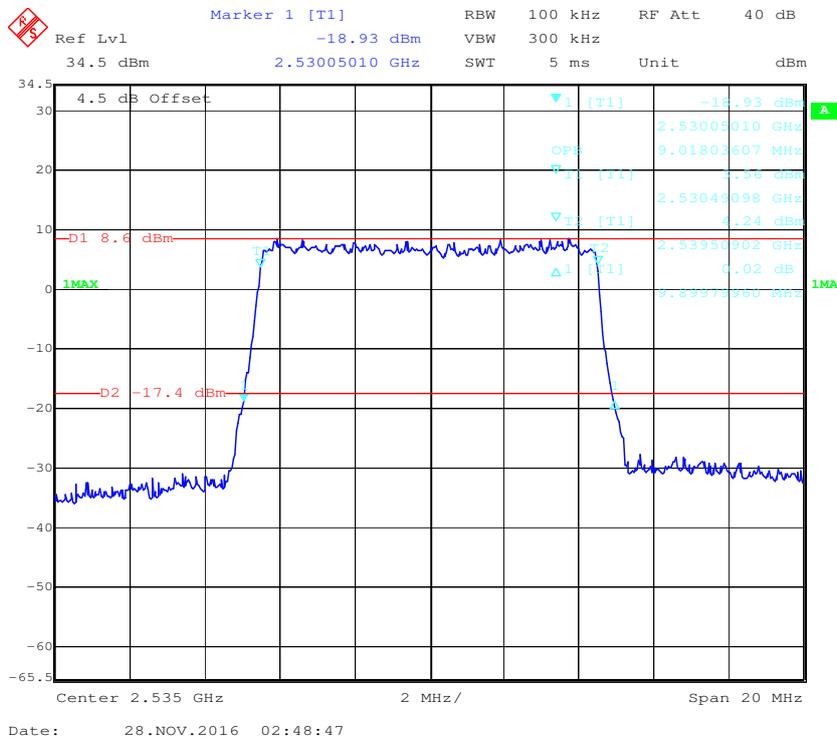





**16-QAM (15 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

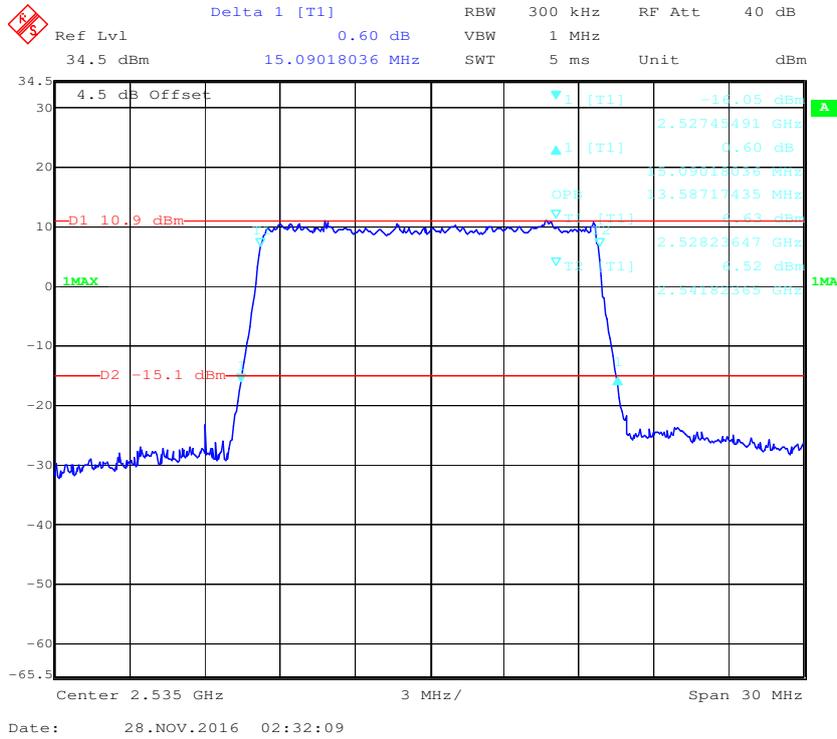

**QPSK (20 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

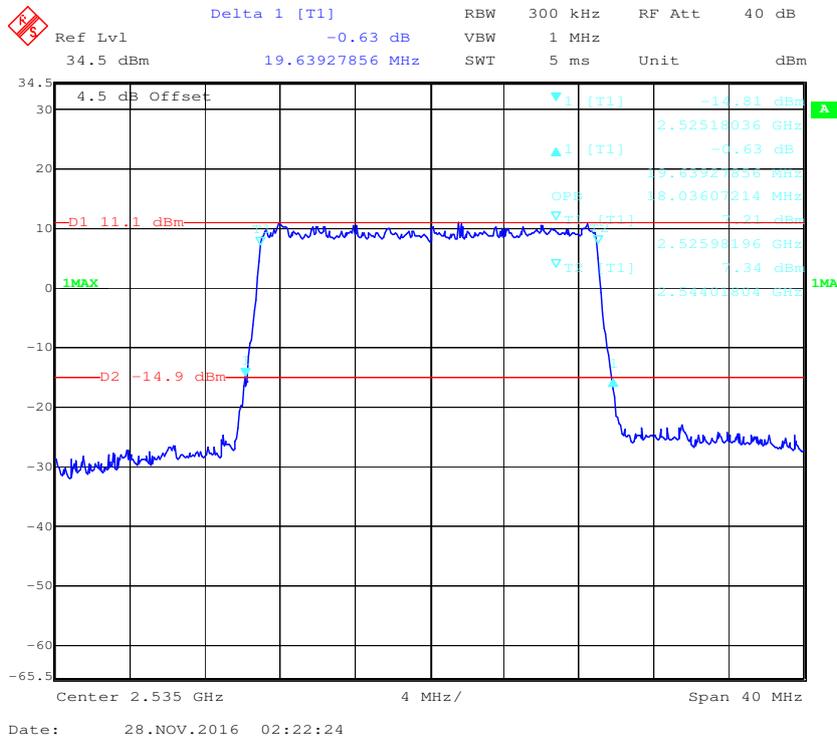


**16-QAM (20 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

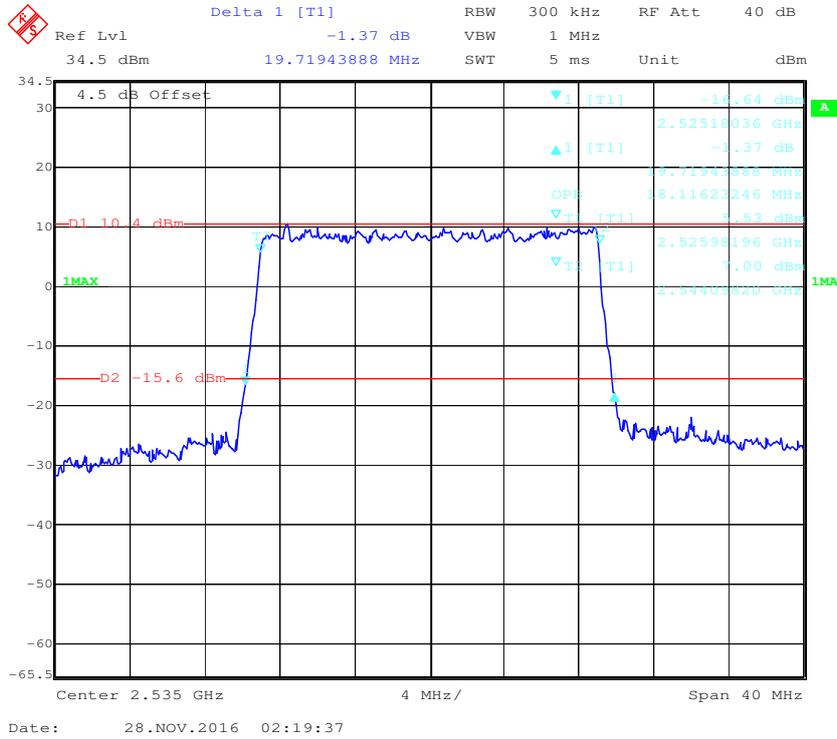


**LTE Band 12: (Middle Channel)**

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.100	1.291
	16QAM	1.117	1.291
3.0	QPSK	2.705	2.934
	16QAM	2.693	2.982
5.0	QPSK	4.549	5.070
	16QAM	4.569	5.090
10.0	QPSK	9.018	9.940
	16QAM	9.018	9.699


**QPSK (1.4 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

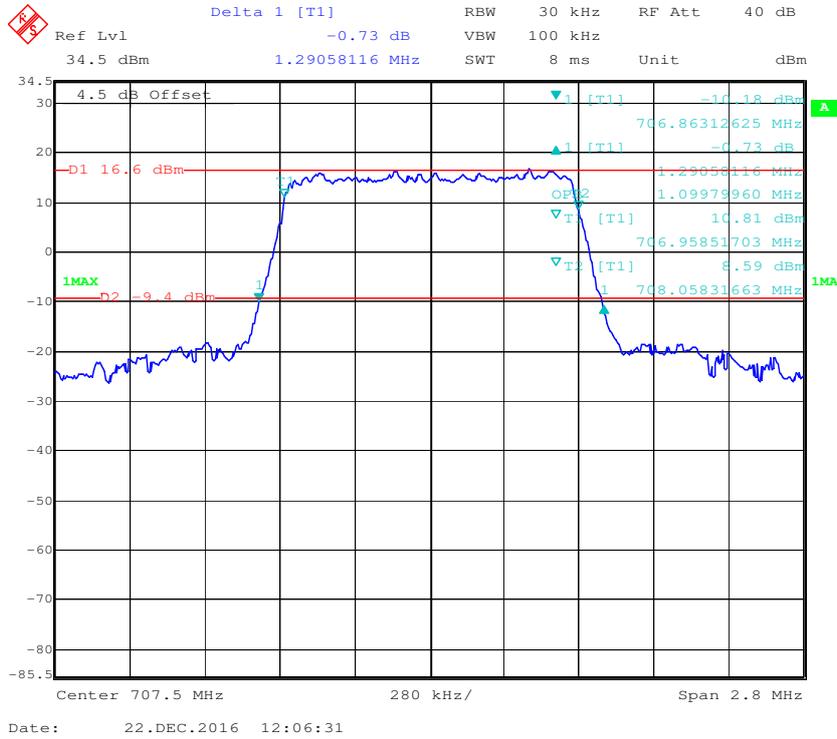


**16-QAM (1.4 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

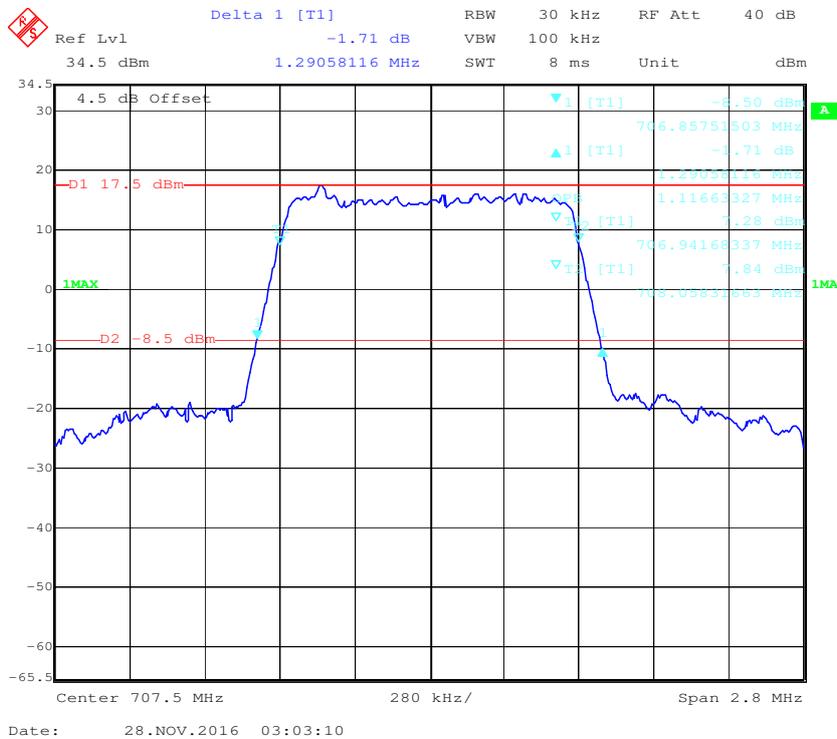


**QPSK (3.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

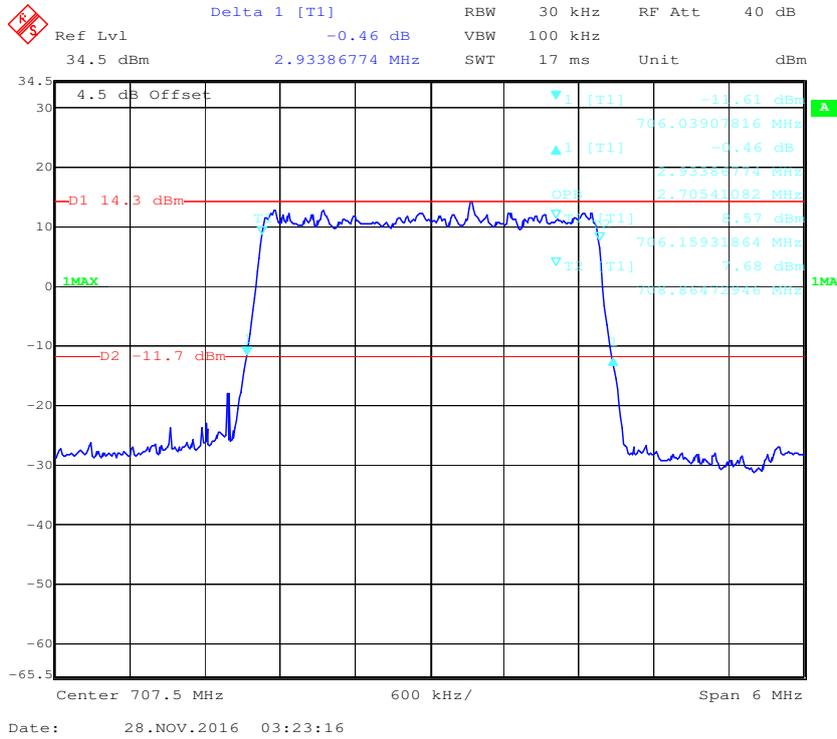


**16-QAM (3.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

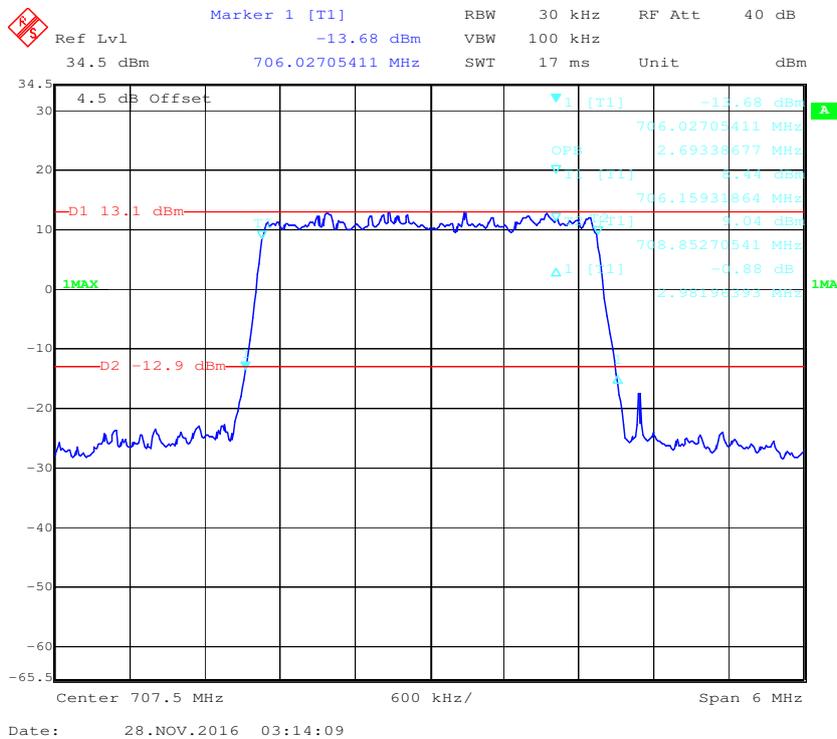


**QPSK (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

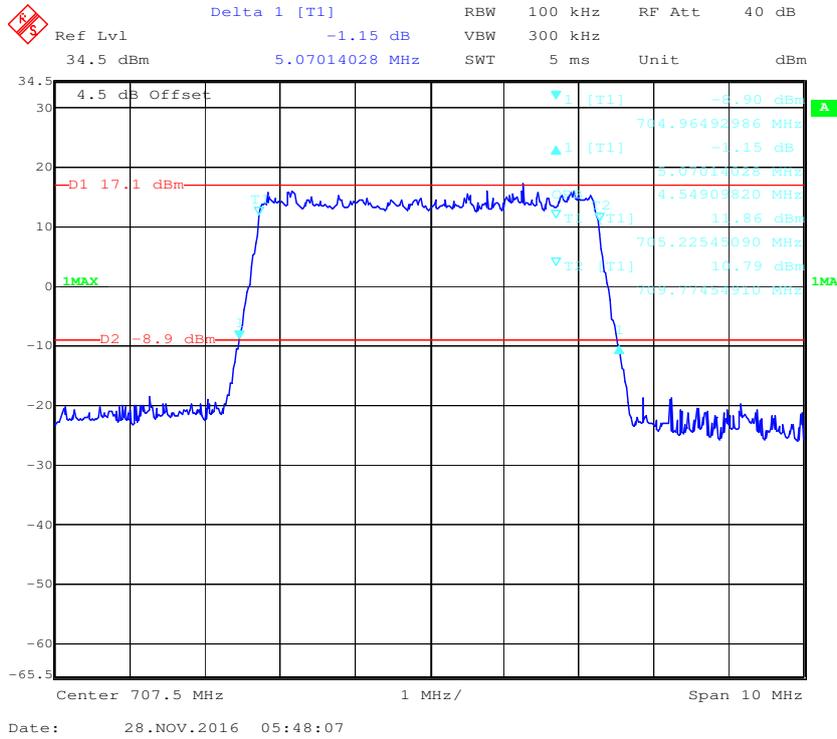


**16-QAM (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

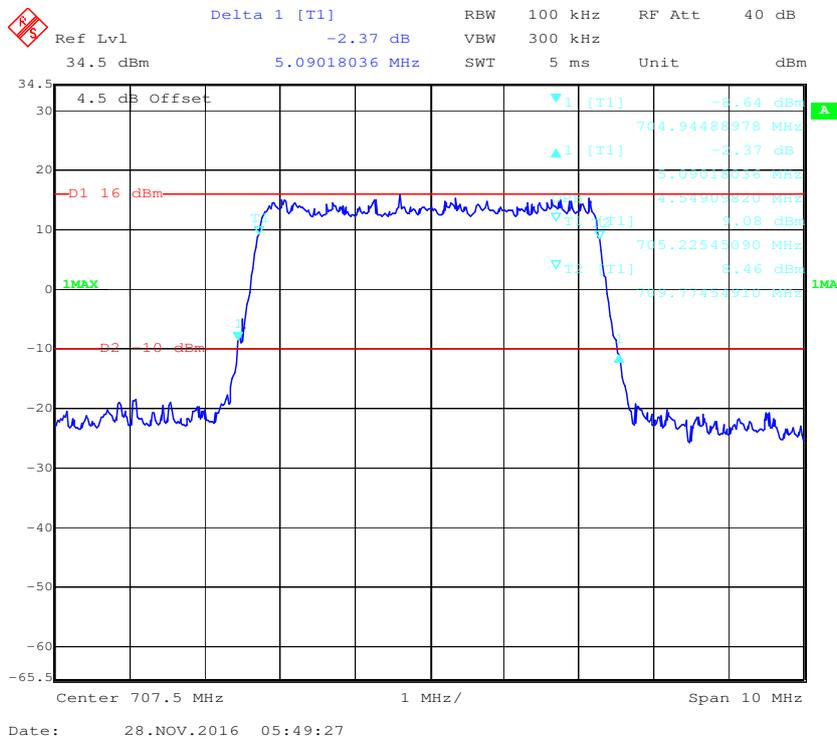

**QPSK (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

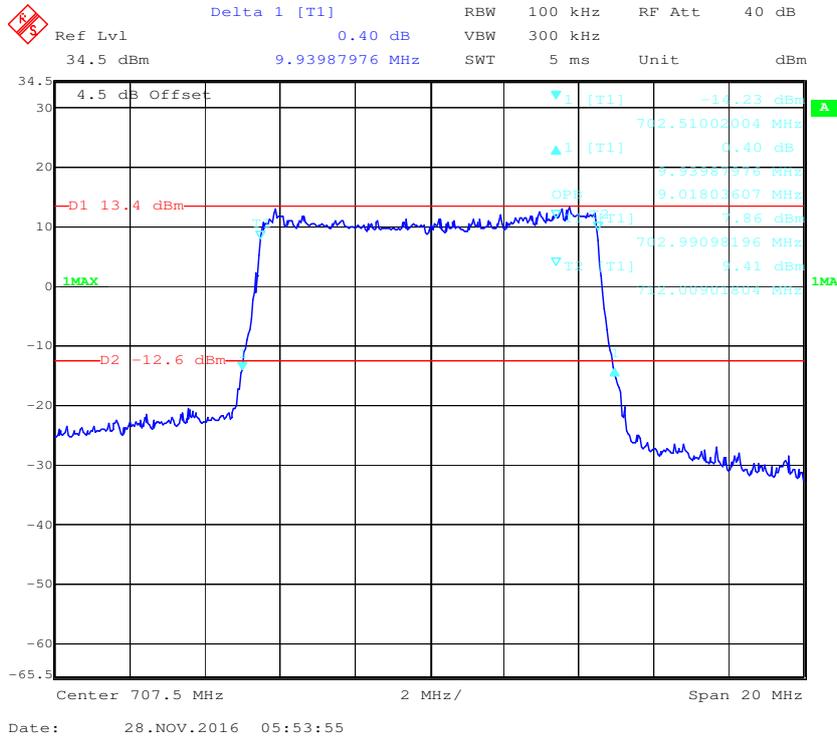


**16-QAM (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

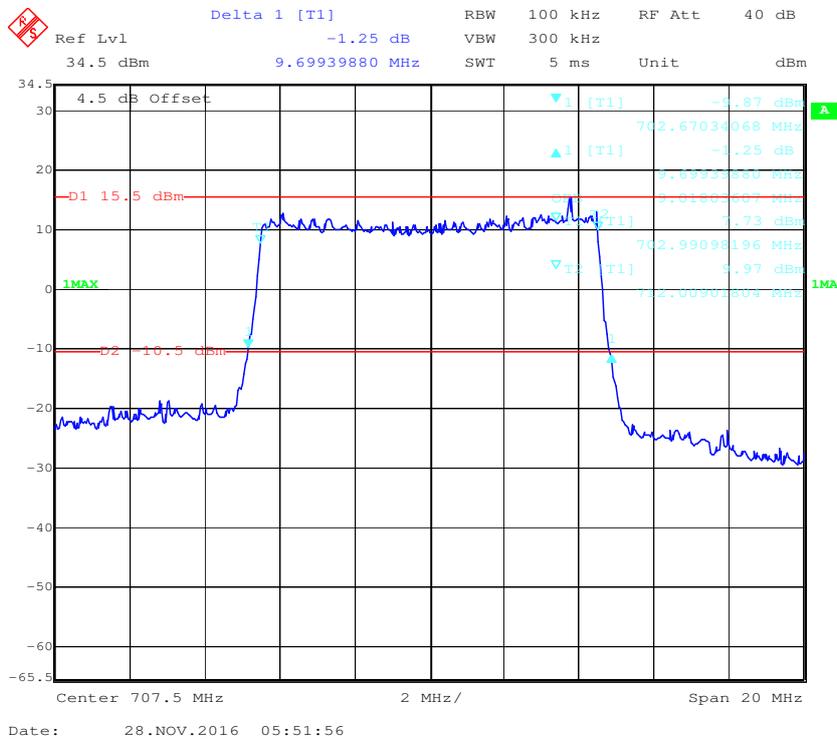


**LTE Band 17: (Middle Channel)**

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.070
	16QAM	4.549	5.070
10.0	QPSK	8.978	9.860
	16QAM	8.978	9.619


**QPSK (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

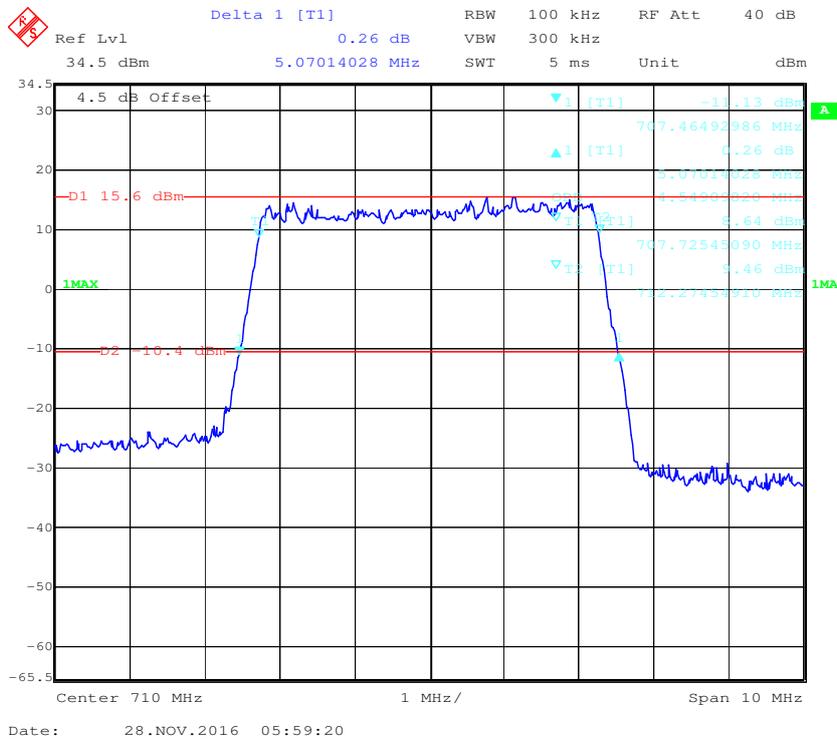


**16-QAM (5.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

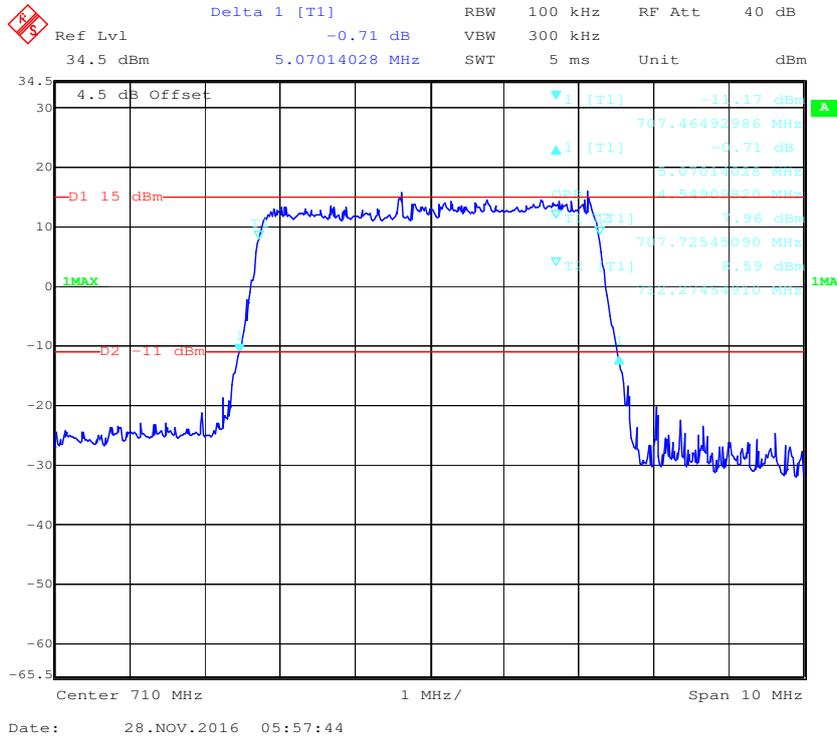

**QPSK (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel**

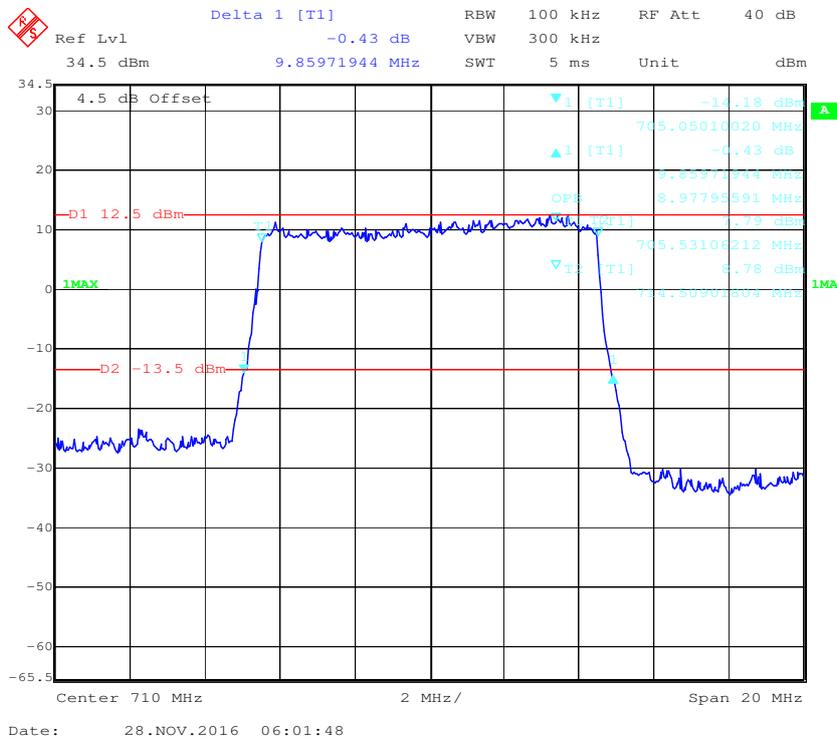

16-QAM (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth Middle channel

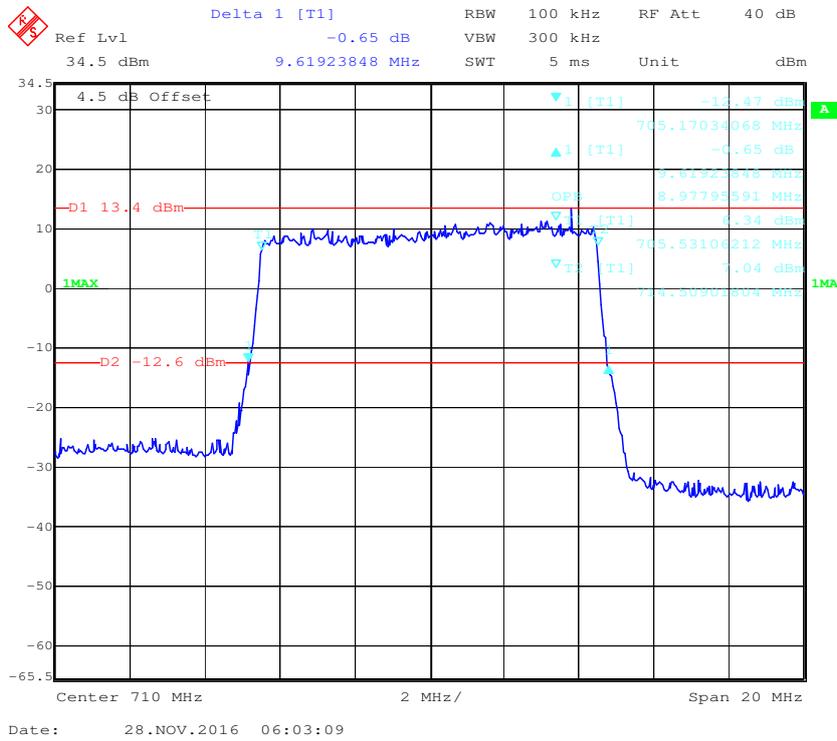

**FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**


**Applicable Standard**

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

**Test Procedure**

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

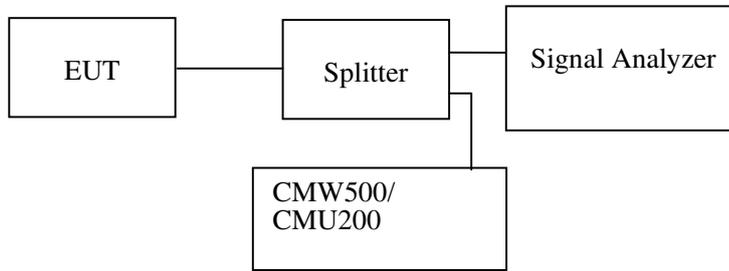

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	23~25 °C
<b>Relative Humidity:</b>	48~53 %
<b>ATM Pressure:</b>	100.0~101.5 kPa


*The testing was performed by Chris Wang on 2016-10-26 and 2016-11-28.*

*EUT operation mode: Transmitting*

*Test result: Compliance, please refer to the following plots.*


Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

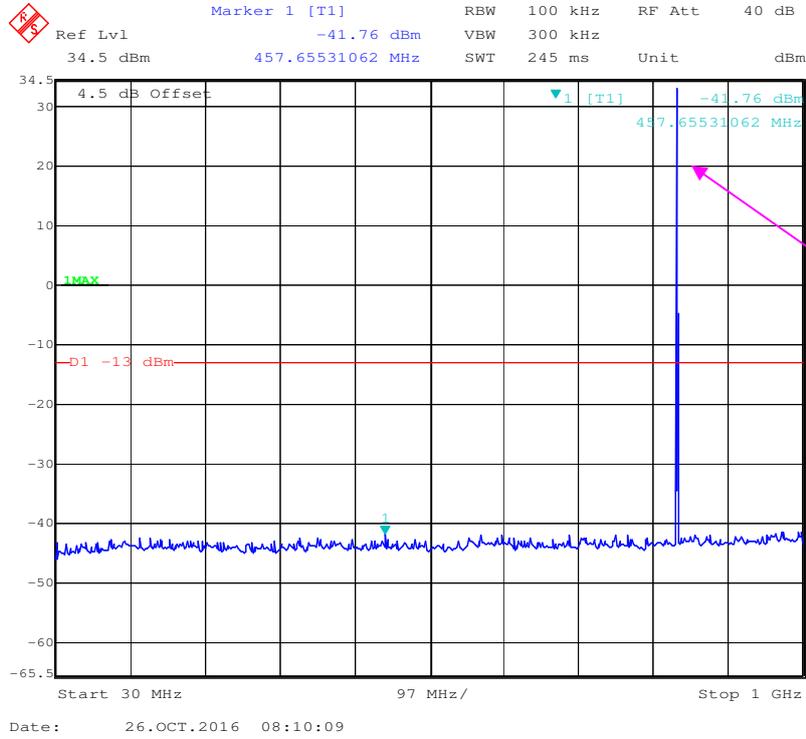


Fundamental test


1 GHz – 10 GHz (GSM Mode)

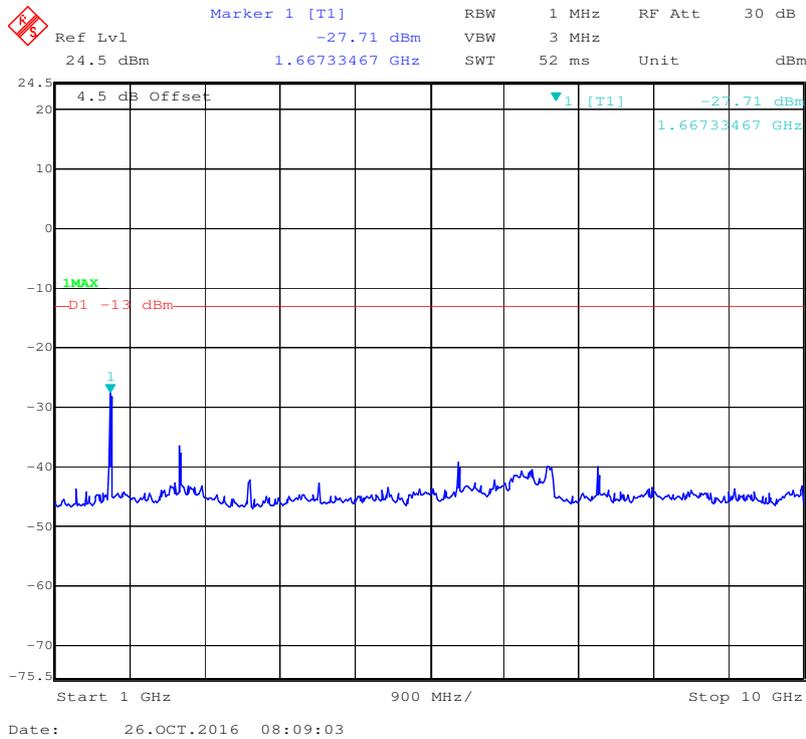

### 30 MHz – 1 GHz (WCDMA Mode)

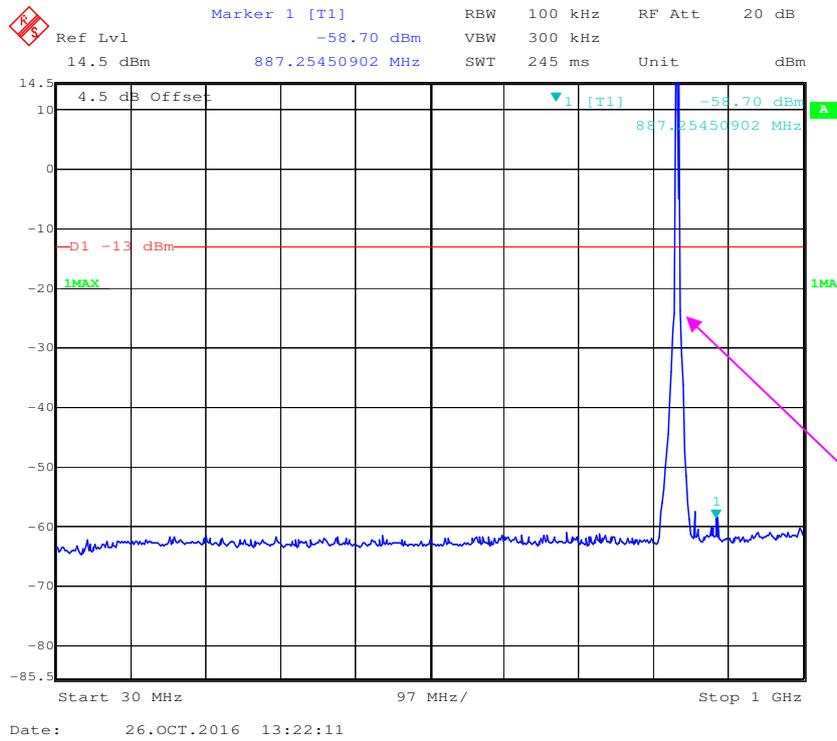


### 1 GHz – 10 GHz (WCDMA Mode)

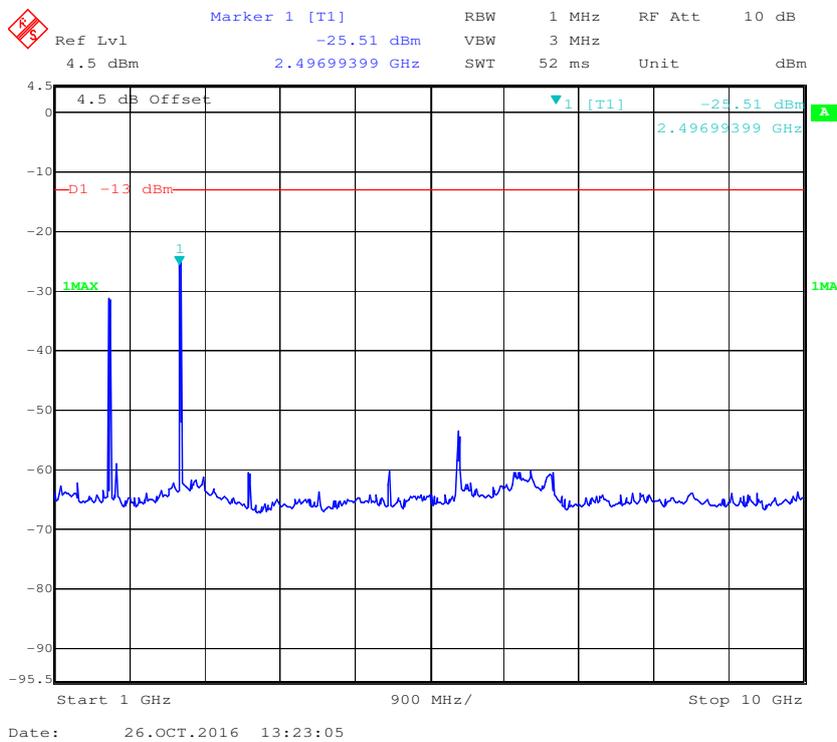


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

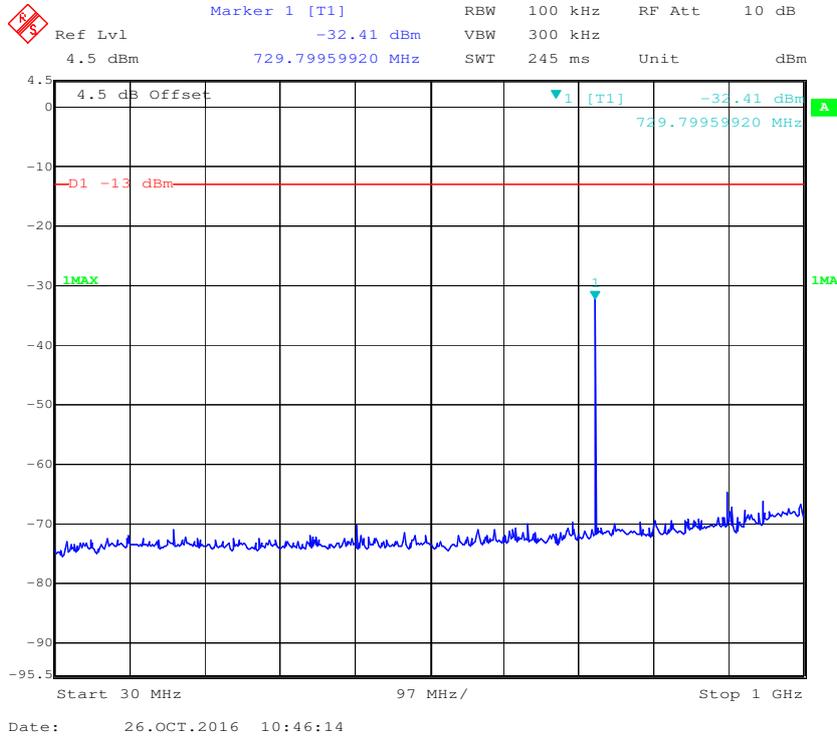


1 GHz – 2 GHz (GSM Mode)

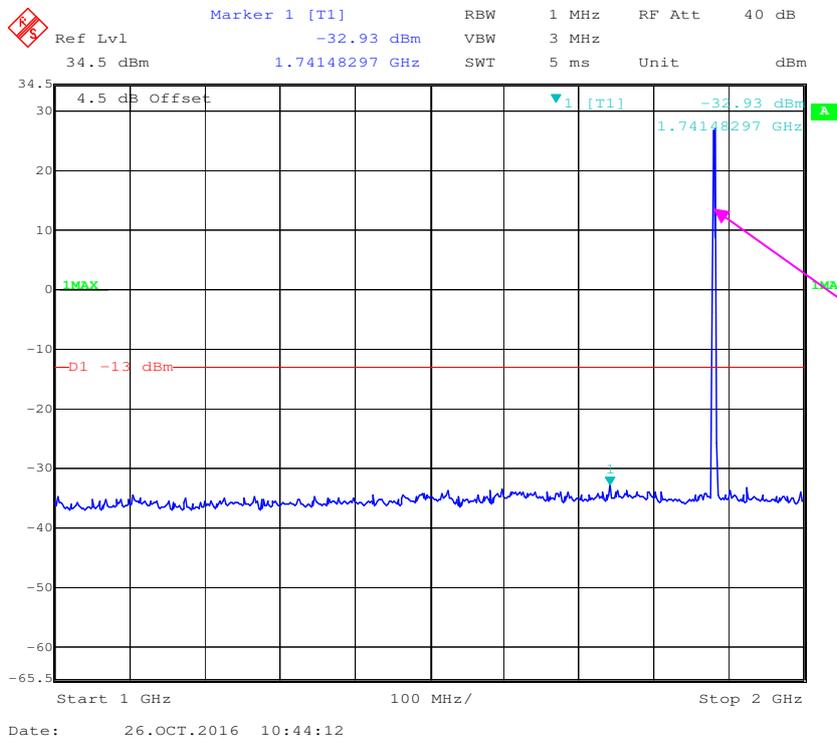




**1 GHz – 20 GHz (WCDMA Mode)**

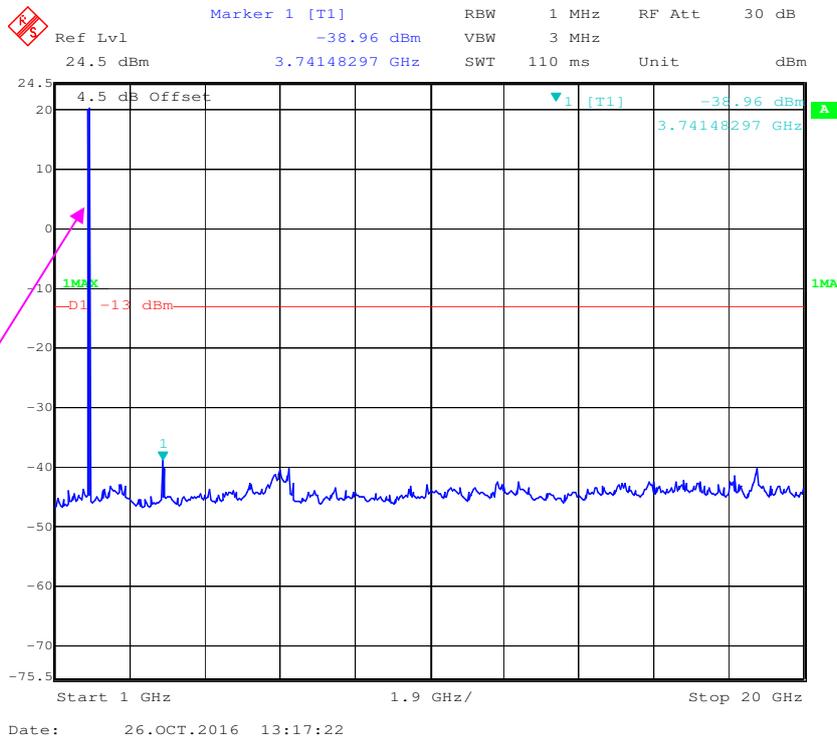

Fundamental test


**LTE Band 4:**

**30 MHz - 1 GHz (1.4 MHz, Middle Channel)**

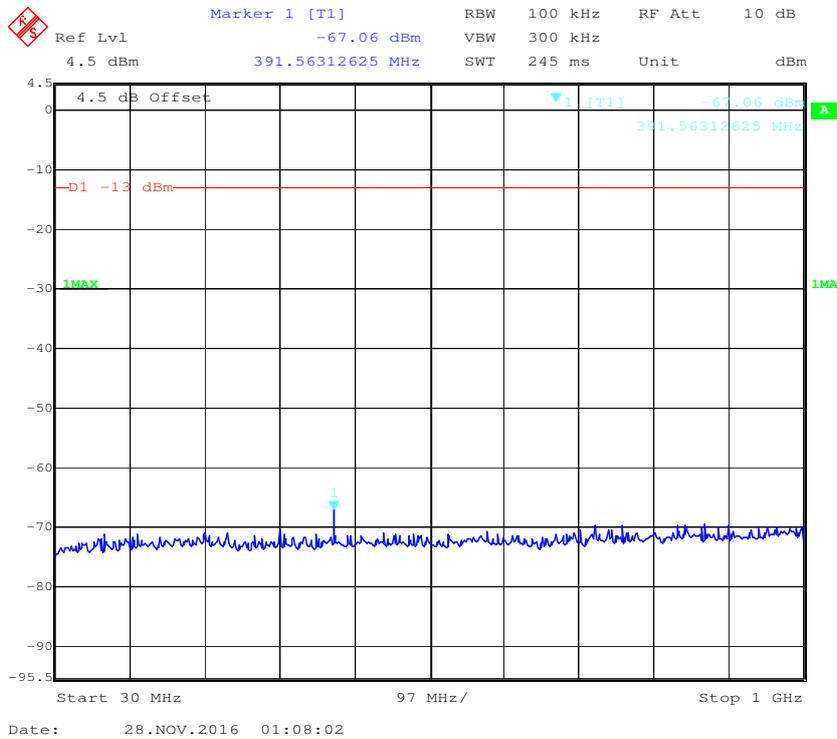




### 30 MHz - 1 GHz (3.0 MHz, Middle Channel)

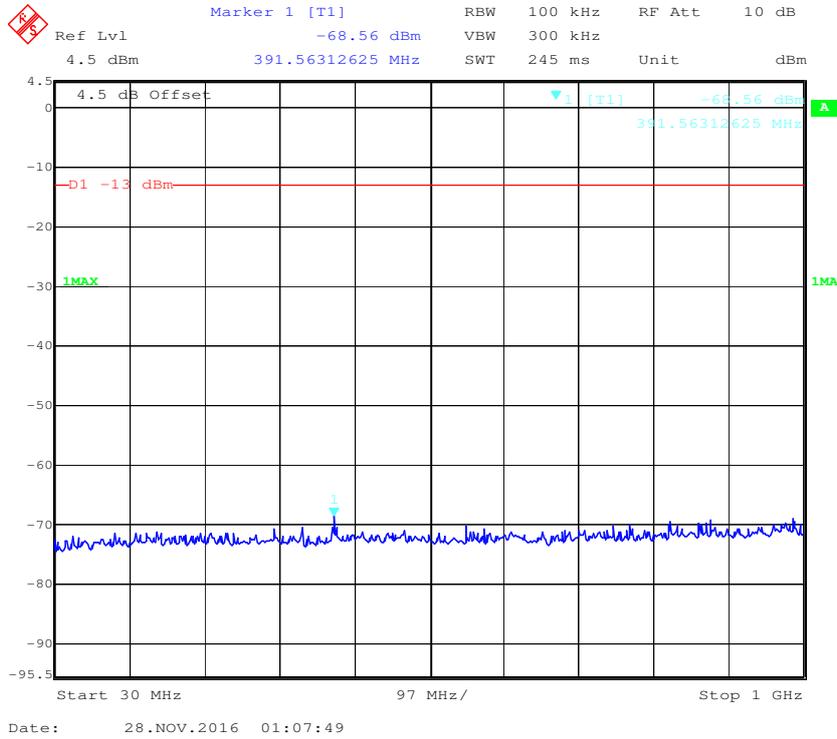


### 1 GHz - 2 GHz (3.0 MHz, Middle Channel)

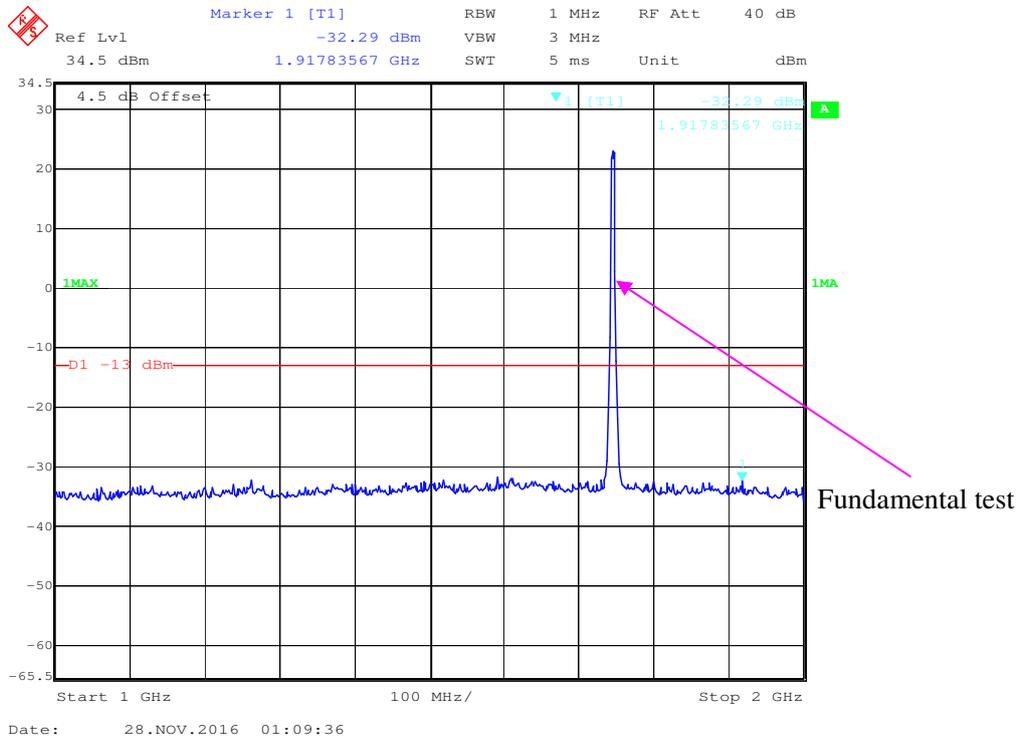






### 30 MHz - 1 GHz (10.0 MHz, Middle Channel)

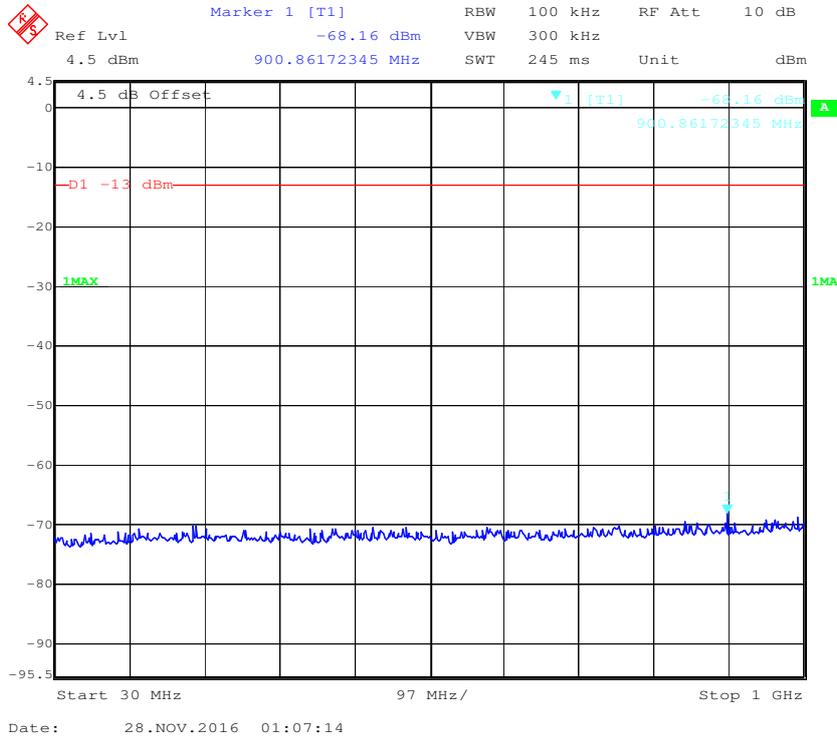


### 1 GHz - 2 GHz (10.0 MHz, Middle Channel)

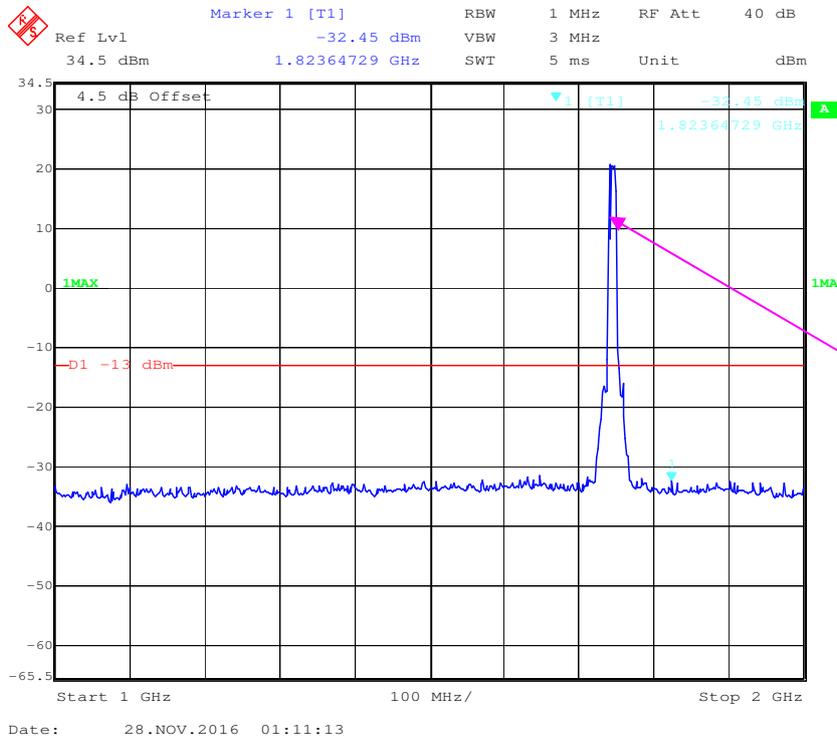


Fundamental test

### 2 GHz – 20 GHz (10.0 MHz, Middle Channel)

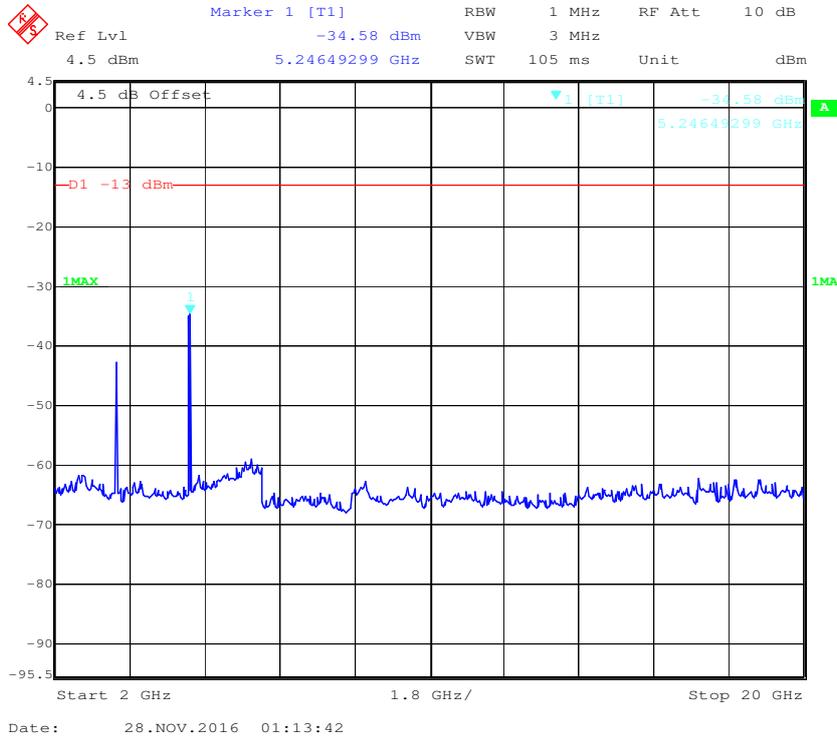


### 30 MHz - 1 GHz (15.0 MHz, Middle Channel)

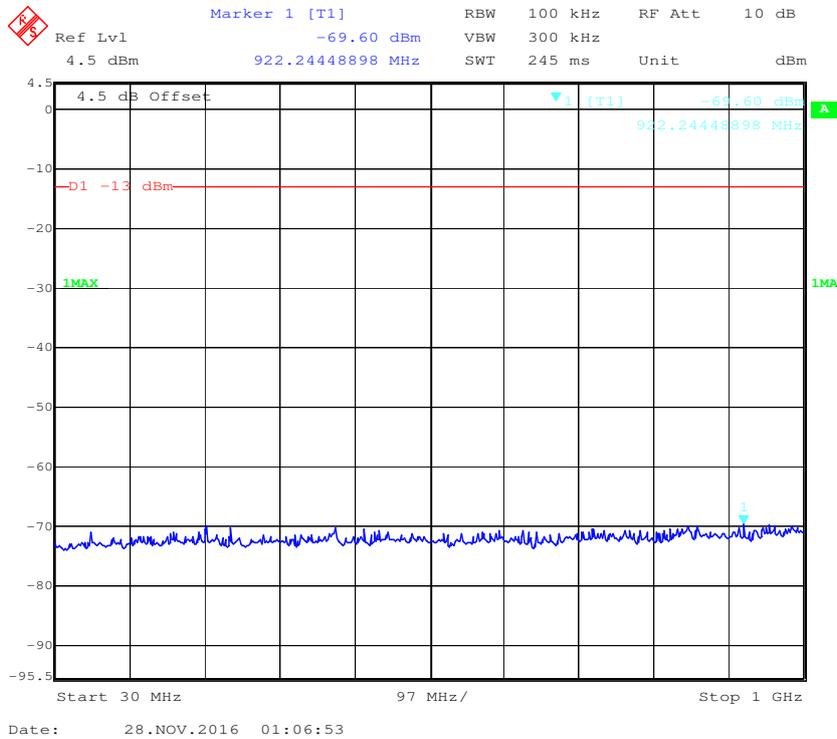





### 30 MHz - 1 GHz (20.0 MHz, Middle Channel)

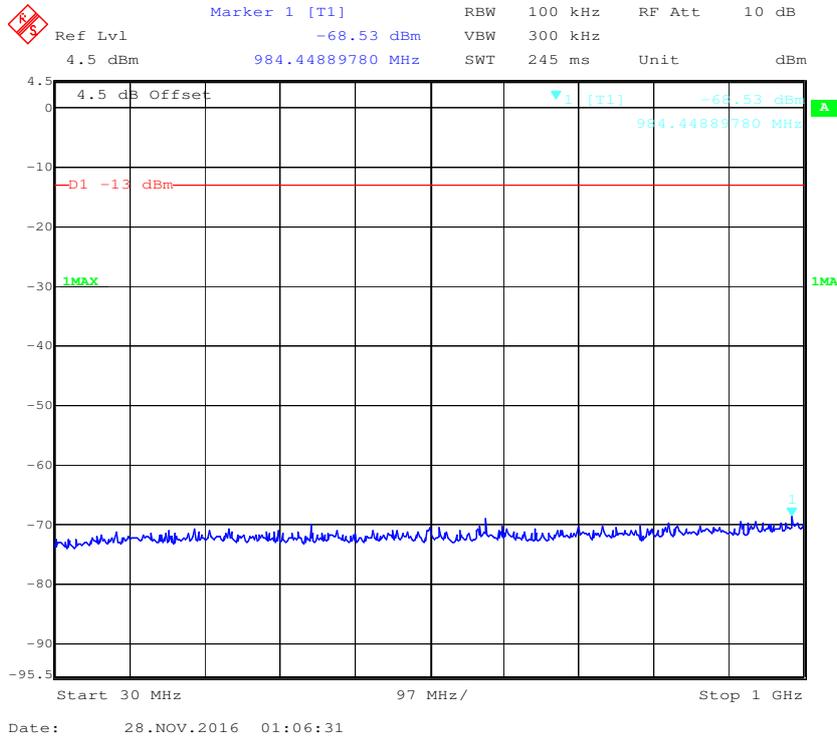

### 1 GHz - 2 GHz (20.0 MHz, Middle Channel)

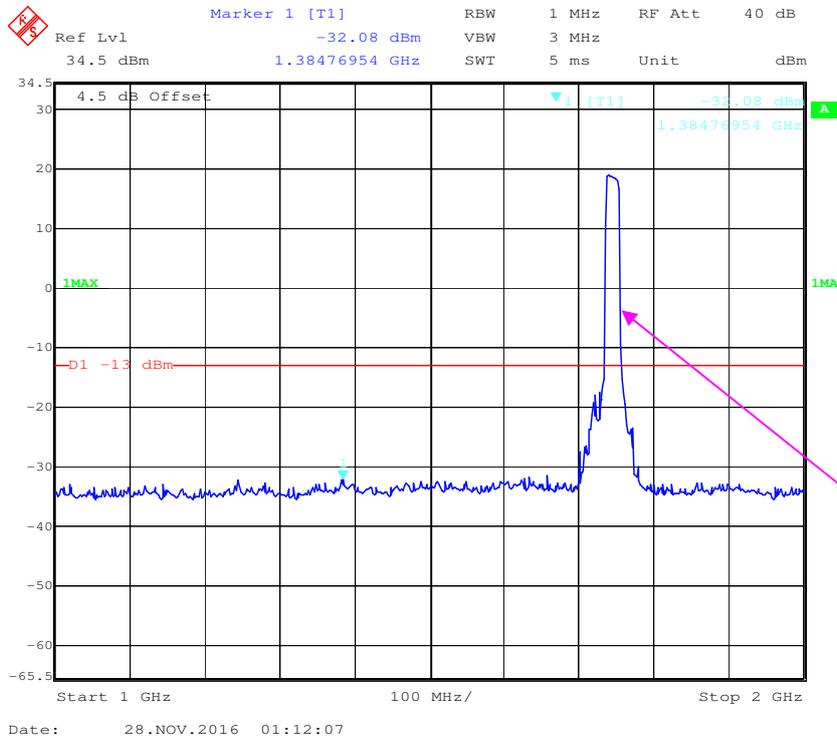


2 GHz – 20 GHz (20.0 MHz, Middle Channel)

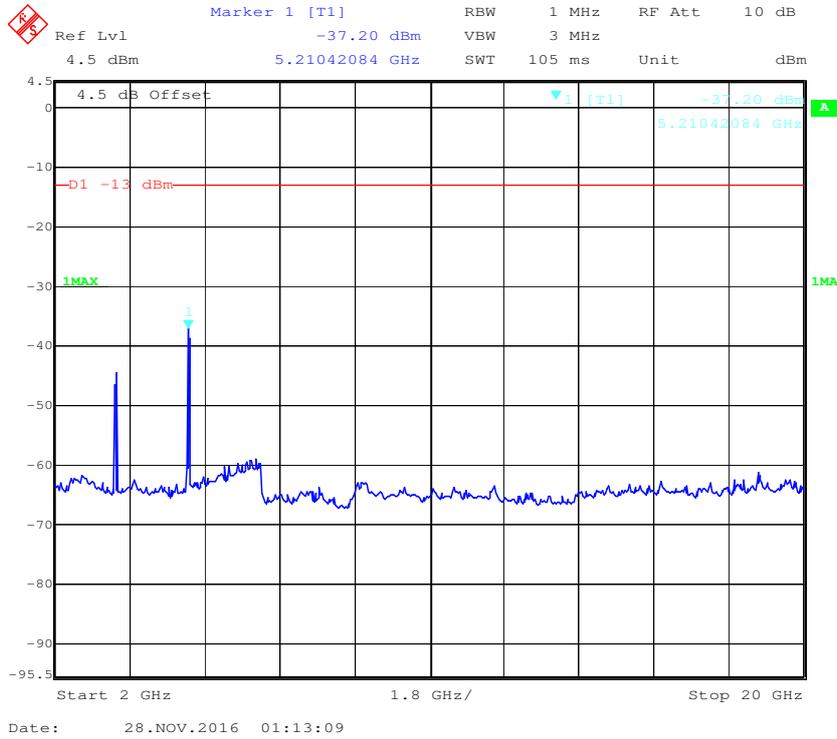


LTE Band 7:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

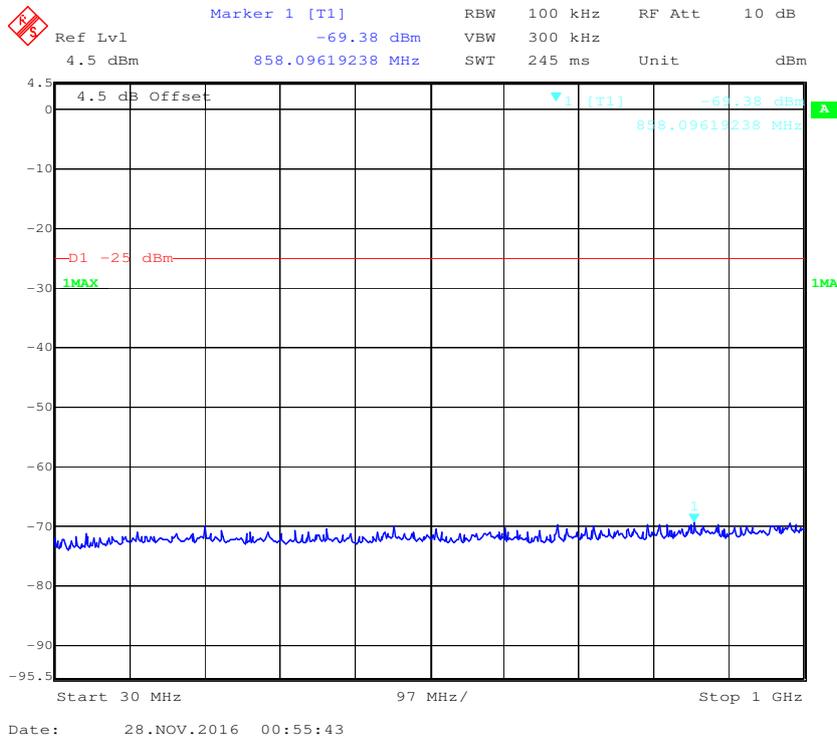




### 30 MHz - 1 GHz (10.0 MHz, Middle Channel)

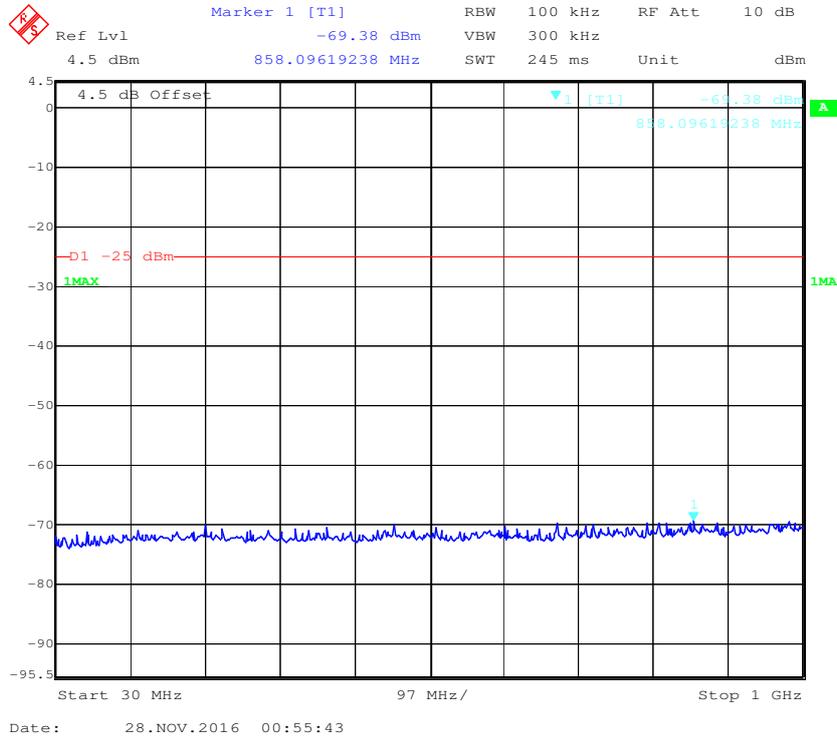


### 1 GHz - 3 GHz (10.0 MHz, Middle Channel)

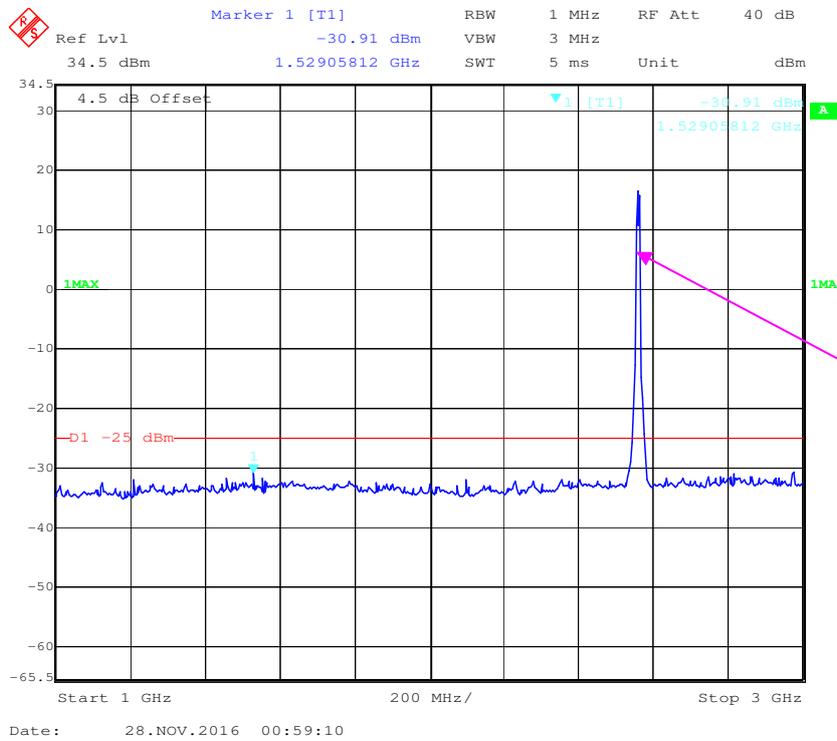







### 30 MHz - 1 GHz (20.0 MHz, Middle Channel)

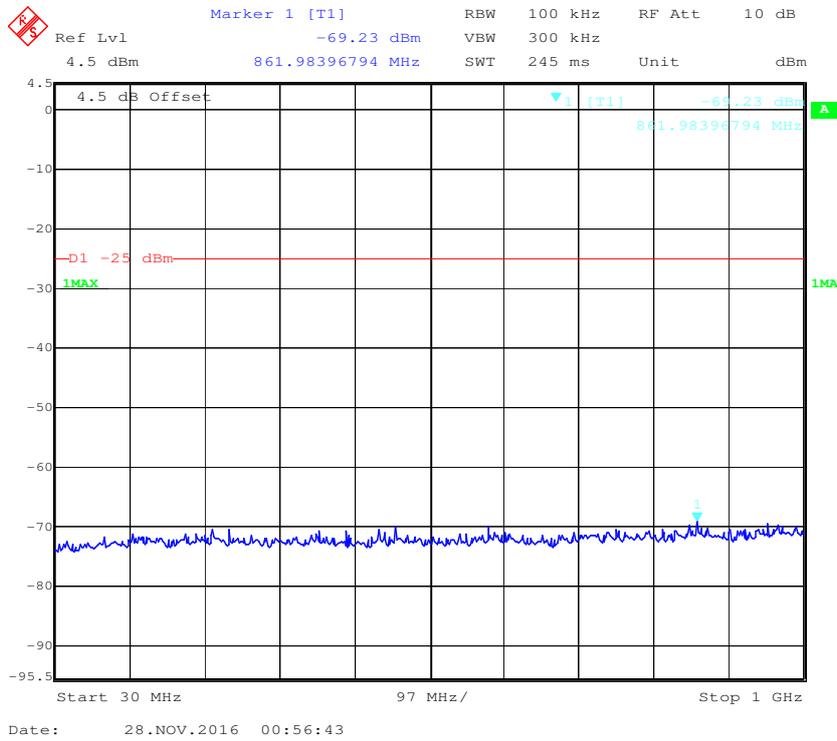

### 1 GHz - 3 GHz (20.0 MHz, Middle Channel)

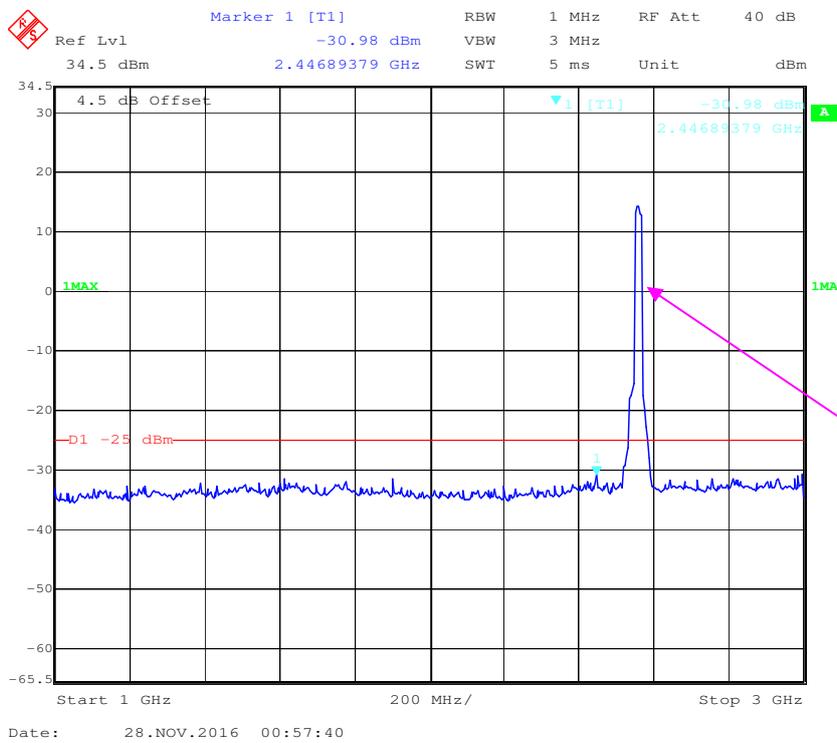


### 3 GHz – 26 GHz (20.0 MHz, Middle Channel)

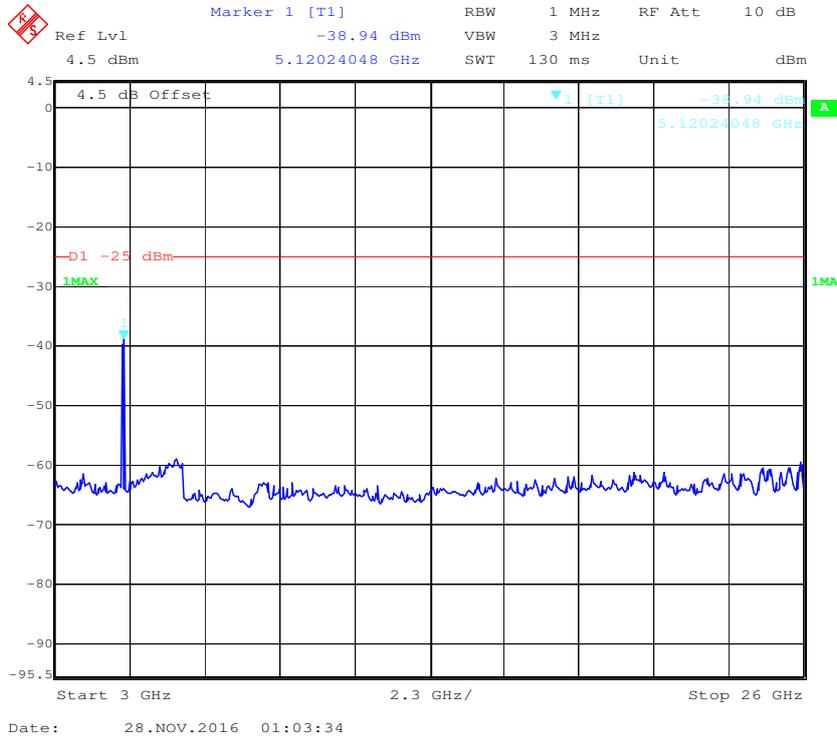


### LTE Band 12:

### 30 MHz - 1 GHz (1.4 MHz, Middle Channel)

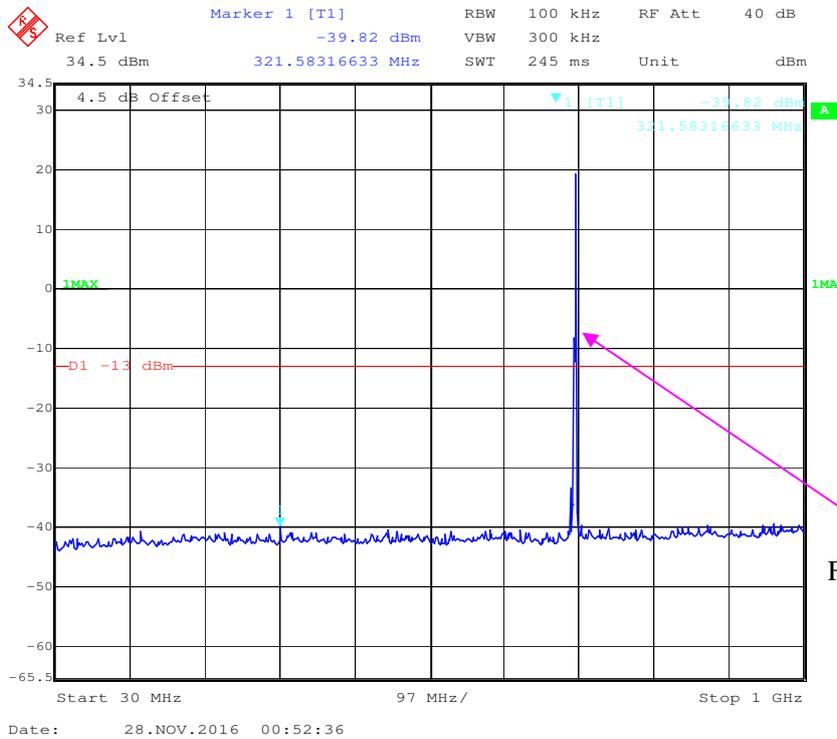


Fundamental test


### 1 GHz – 8 GHz (1.4 MHz, Middle Channel)

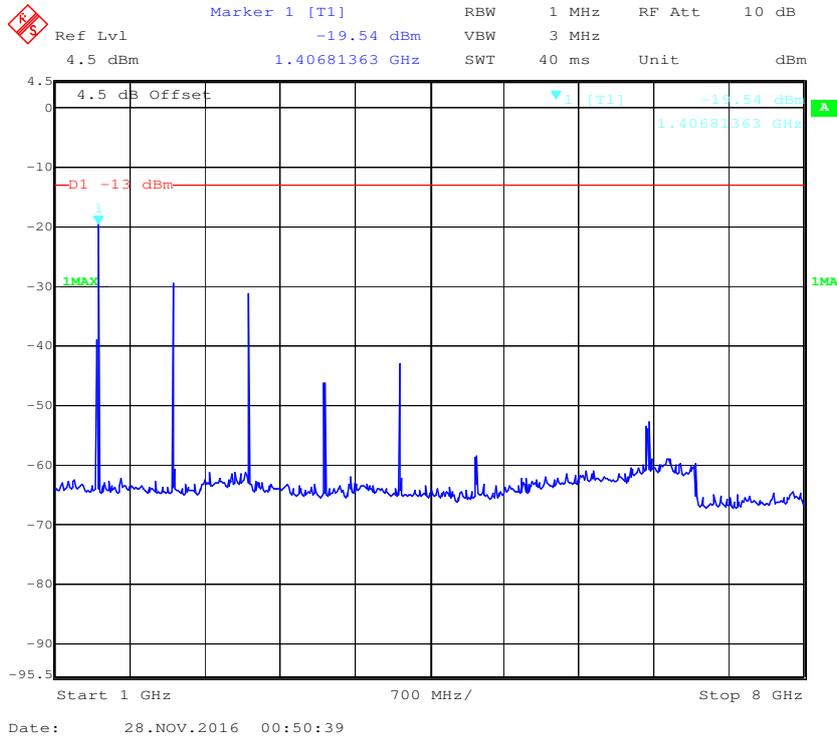


### 30 MHz - 1 GHz (3.0 MHz, Middle Channel)

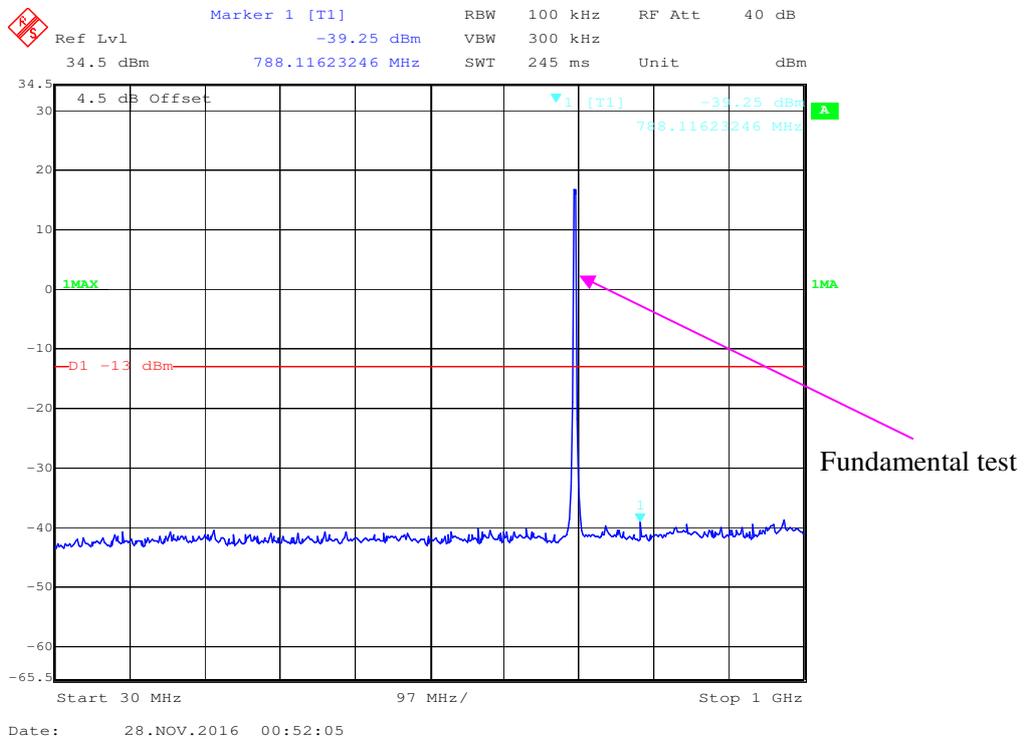


### 1 GHz – 8 GHz (3.0 MHz, Middle Channel)

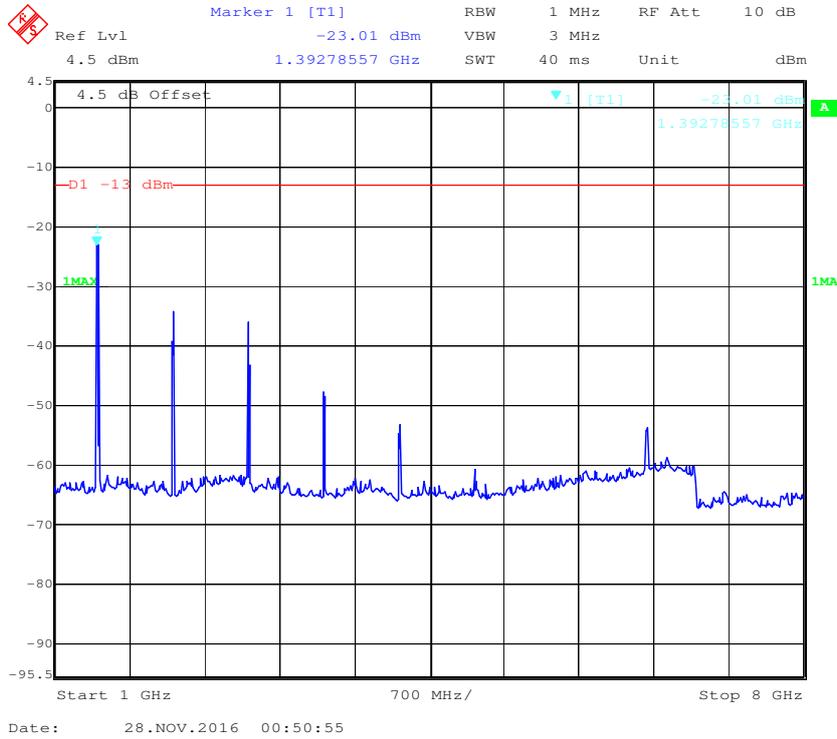


### 30 MHz - 1 GHz (5.0 MHz, Middle Channel)

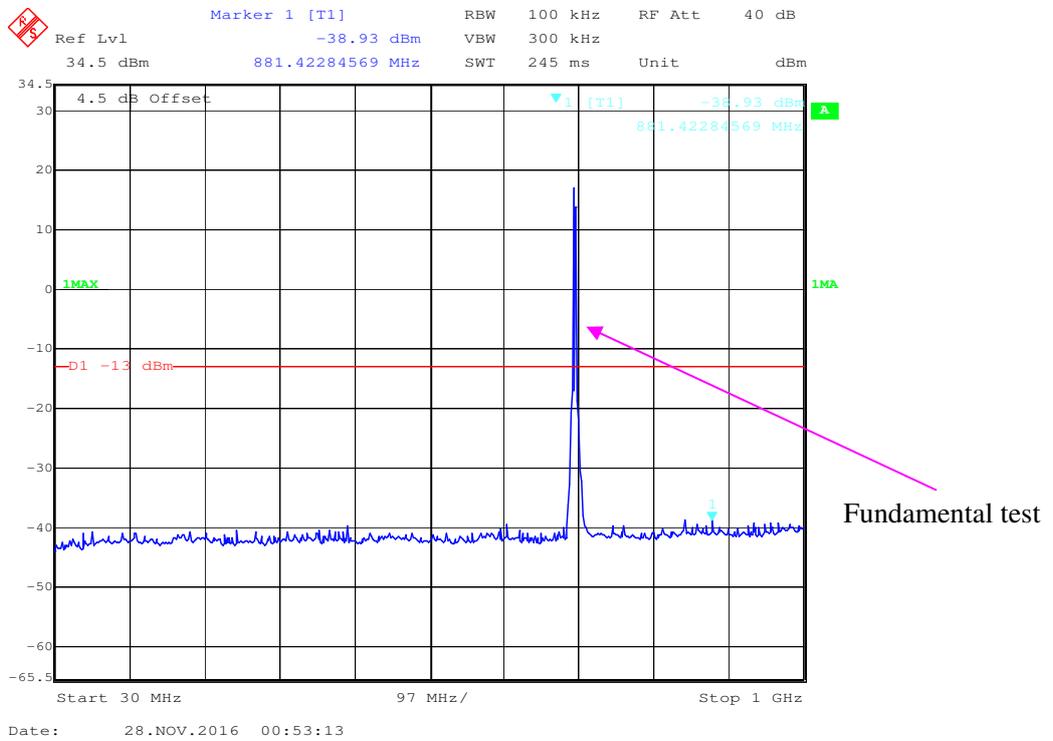


### 1 GHz –8 GHz (5.0 MHz, Middle Channel)

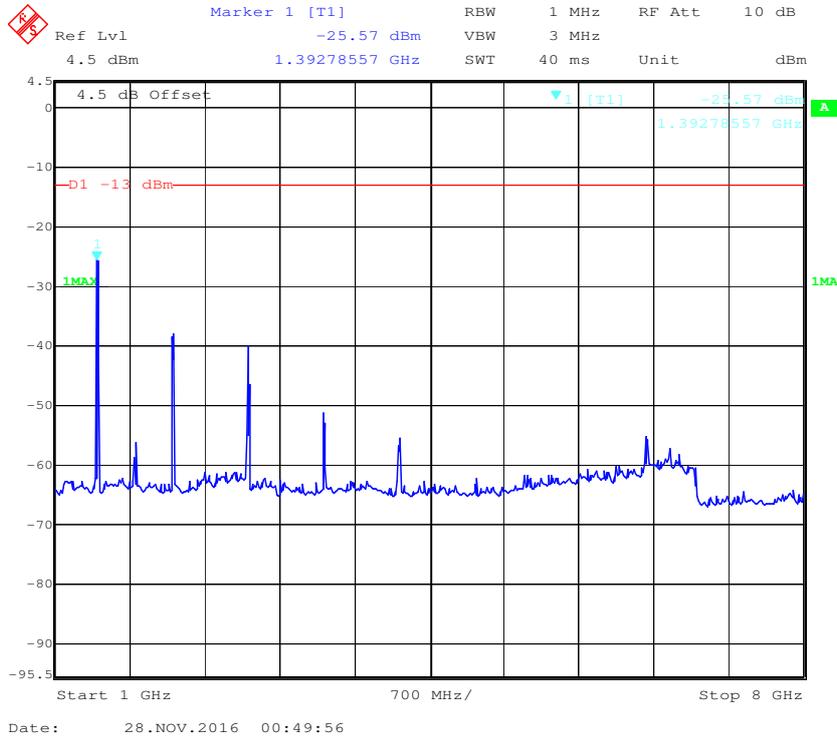

### 30 MHz - 1 GHz (10.0 MHz, Middle Channel)

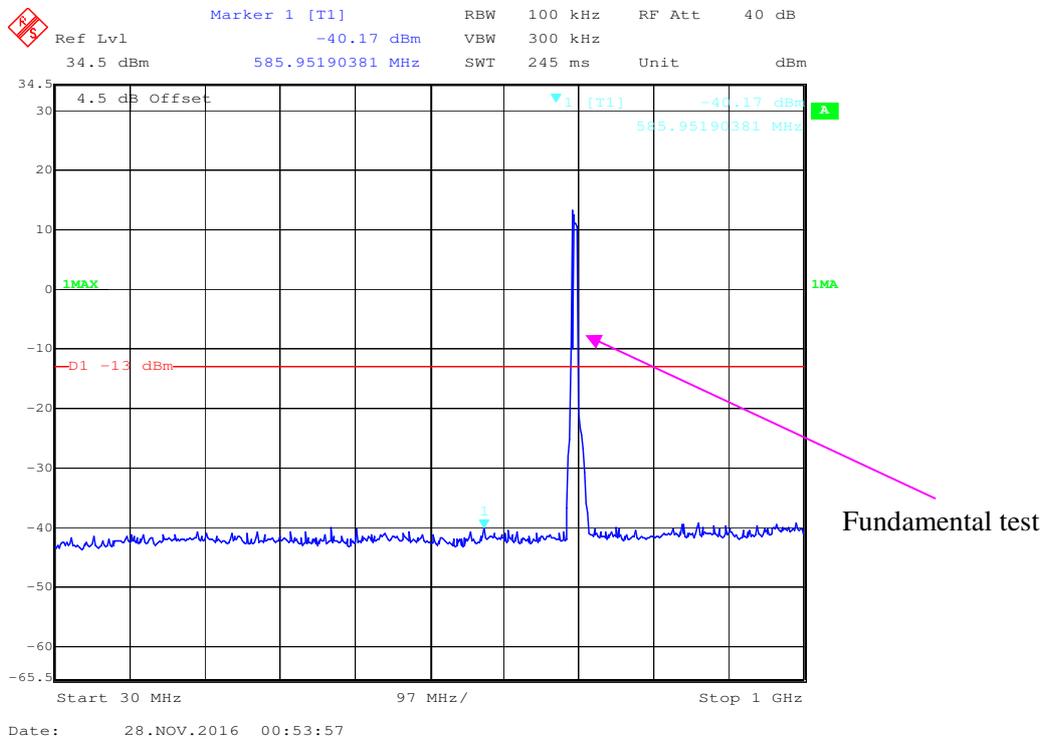


### 1 GHz – 8 GHz (10.0 MHz, Middle Channel)

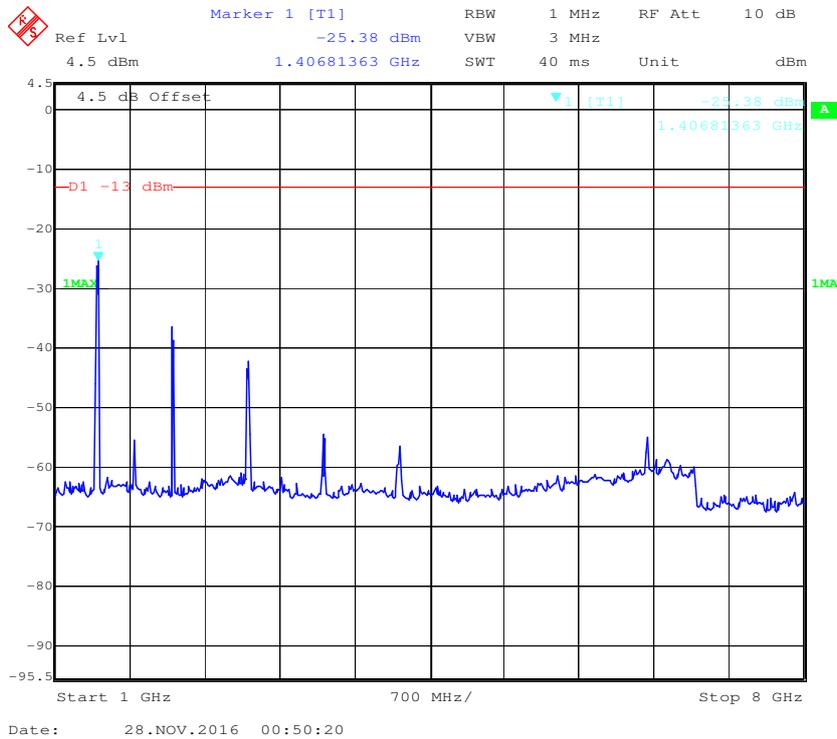


### LTE Band 17:


### 30 MHz - 1 GHz (5.0 MHz, Middle Channel)

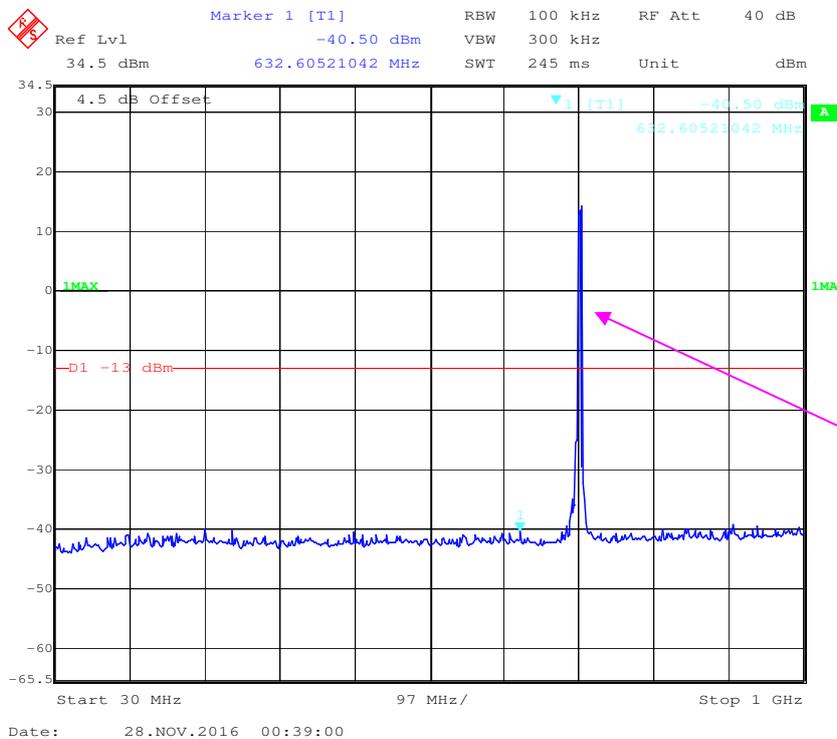


### 1 GHz – 8 GHz (5.0 MHz, Middle Channel)

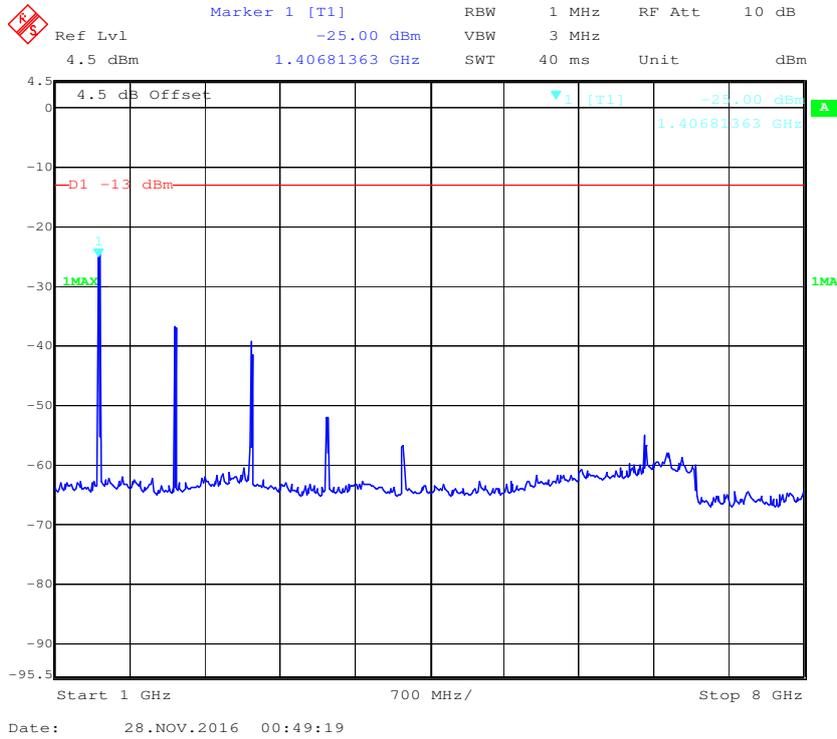

### 30 MHz - 1 GHz (10.0 MHz, Middle Channel)

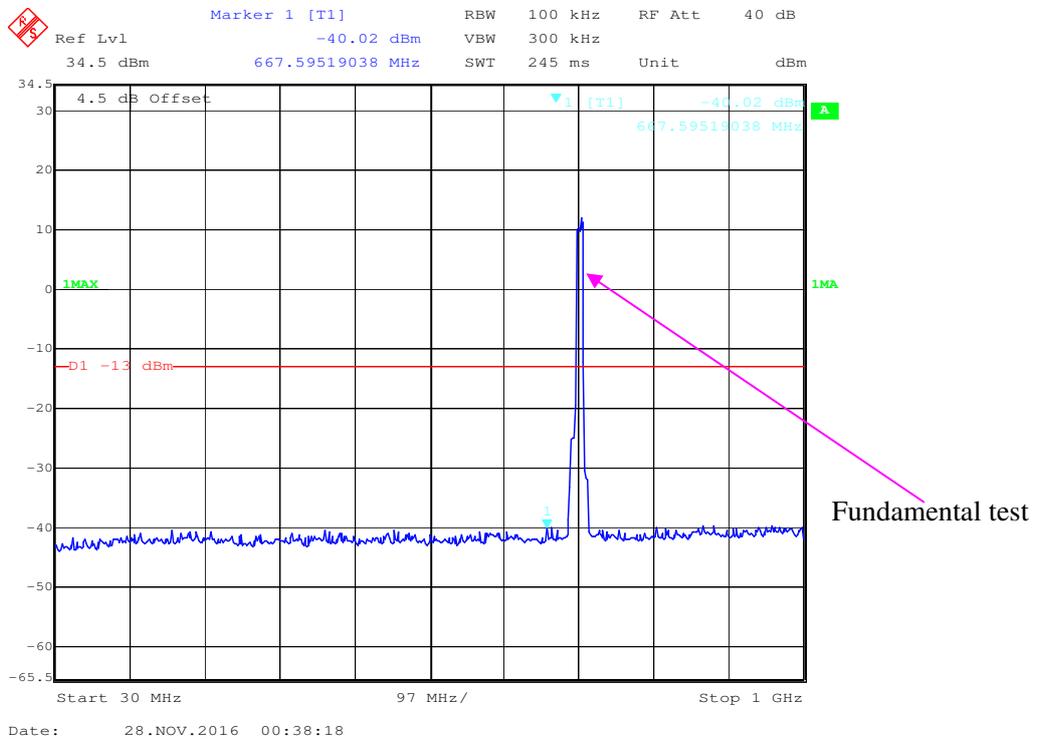

1 GHz – 8 GHz (10.0 MHz, Middle Channel)

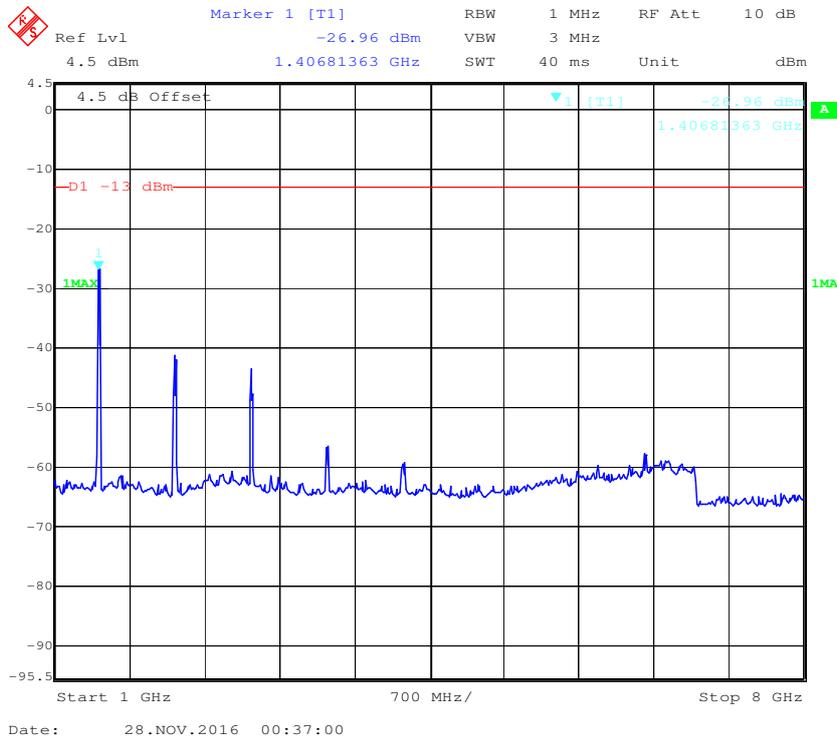

## **FCC § 2.1053; § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) SPURIOUS RADIATED EMISSIONS**

### **Applicable Standard**

FCC § 2.1053, § 22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### **Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TX pwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Spurious attenuation limit in dB =  $55 + 10 \text{Log}_{10} (\text{power out in Watts})$

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	101.5 kPa

*The testing was performed by Layne Li on 2016-12-13.*

*EUT operation mode: Transmitting*

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

**Cellular Band (Part 22H)**

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
<b>GSM Mode, Middle channel</b>										
399.88	61.36	319	1.4	H	-41.3	0.23	4.65	-36.88	-13	23.88
399.88	65.90	305	2.2	V	-39.9	0.23	4.65	-35.48	-13	22.48
1673.20	59.30	277	1.9	H	-42.5	0.40	8.52	-34.38	-13	21.38
1673.20	61.17	199	2.4	V	-42.6	0.40	8.52	-34.48	-13	21.48
<b>WCDMA Mode, Middle channel</b>										
399.88	56.56	53	1.4	H	-46.1	0.23	4.65	-41.68	-13	28.68
399.88	60.40	139	1.3	V	-45.4	0.23	4.65	-40.98	-13	27.98
1673.20	59.90	274	2.5	H	-41.9	0.40	8.52	-33.78	-13	20.78
1673.20	60.07	272	2.0	V	-43.7	0.40	8.52	-35.58	-13	22.58

30 MHz ~ 20 GHz:

**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
<b>GSM Mode, Middle channel</b>										
399.88	56.46	129	2.4	H	-46.2	0.23	4.65	-41.78	-13	28.78
399.88	60.90	168	1.5	V	-44.9	0.23	4.65	-40.48	-13	27.48
3760.00	54.22	294	2.0	H	-41.8	0.59	9.72	-32.67	-13	19.67
3760.00	57.11	314	1.8	V	-40.0	0.59	9.72	-30.87	-13	17.87
<b>WCDMA Mode, Middle channel</b>										
399.88	55.76	347	1.7	H	-46.9	0.23	4.65	-42.48	-13	29.48
399.88	58.00	85	2.4	V	-47.8	0.23	4.65	-43.38	-13	30.38
3760.00	55.22	155	2.5	H	-40.8	0.59	9.72	-31.67	-13	18.67
3760.00	55.11	293	2.4	V	-42.0	0.59	9.72	-32.87	-13	19.87

**LTE Band:**

*Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)*

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna Height (m)	Polar (H/V)	Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
<b>Band 4</b>										
<b>Test frequency range:30 MHz ~ 20 GHz</b>										
399.88	55.06	122	1.8	H	-47.6	0.23	4.65	-43.18	-13	30.18
399.88	57.70	231	1.5	V	-48.1	0.23	4.65	-43.68	-13	30.68
3465.00	47.13	263	1.7	H	-49.9	0.54	9.90	-40.54	-13	27.54
3465.00	48.83	342	1.3	V	-49.5	0.54	9.90	-40.14	-13	27.14
<b>Band 7</b>										
<b>Test frequency range: 30 MHz ~ 26 GHz</b>										
399.88	53.56	275	1.3	H	-49.1	0.23	4.65	-44.68	-25	19.68
399.88	53.90	159	1.8	V	-51.9	0.23	4.65	-47.48	-25	22.48
5070.00	44.84	120	1.1	H	-48.3	0.64	10.30	-38.64	-25	13.64
5070.00	45.27	218	2.2	V	-49.4	0.64	10.30	-39.74	-25	14.74
<b>Band 12</b>										
<b>Test frequency range: 30 MHz ~ 10GHz</b>										
399.88	53.56	137	1.8	H	-49.1	0.23	4.65	-44.68	-13	31.68
399.88	54.70	154	1.4	V	-51.1	0.23	4.65	-46.68	-13	33.68
1415.00	62.47	2	1.8	H	-41.6	0.34	7.92	-34.02	-13	21.02
1415.00	62.50	319	1.1	V	-43.3	0.34	7.92	-35.72	-13	22.72
<b>Band 17</b>										
<b>Test frequency range: 30 MHz ~ 10GHz</b>										
399.88	53.26	36	2.2	H	-49.4	0.23	4.65	-44.98	-13	31.98
399.88	54.90	32	1.4	V	-50.9	0.23	4.65	-46.48	-13	33.48
1420.00	63.07	244	1.2	H	-41.0	0.34	7.92	-33.42	-13	20.42
1420.00	65.00	316	1.3	V	-40.8	0.34	7.92	-33.22	-13	20.22

**Note:**

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

**FCC § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) - BAND EDGES**

**Applicable Standard**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to § 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to FCC § 27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

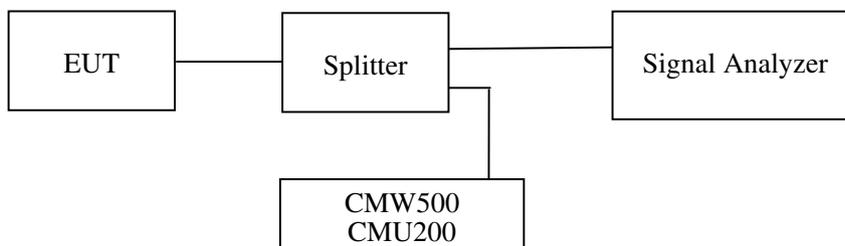

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	23~25 °C
<b>Relative Humidity:</b>	48~52 %
<b>ATM Pressure:</b>	100.0~101.5 kPa

*The testing was performed by Chris Wang from 2016-11-27 to 2016-12-14.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following plots.*


**Cellular Band, Left Band Edge for GSM (GMSK) Mode**

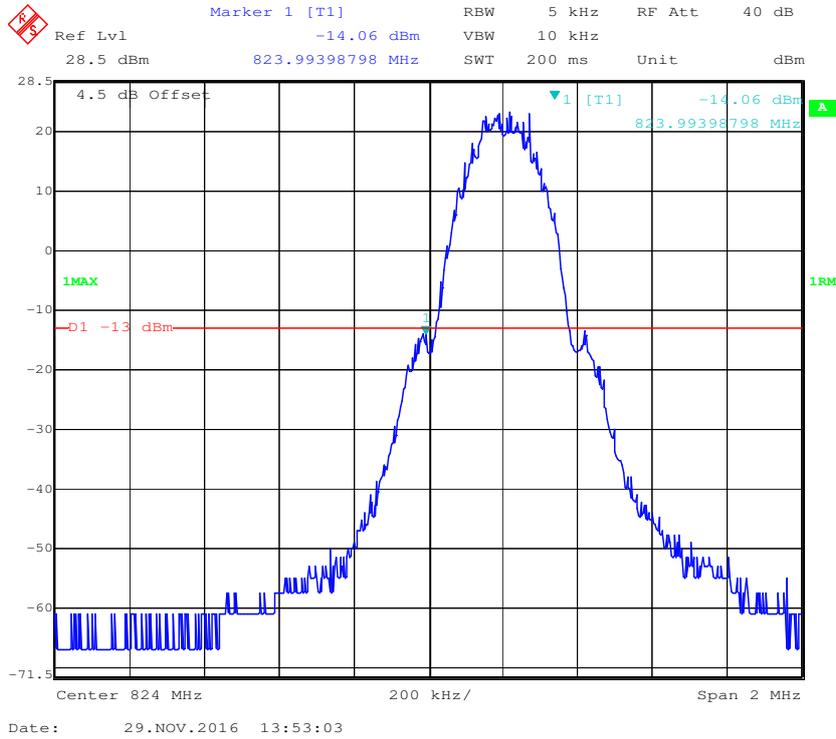


**Cellular Band, Right Band Edge for GSM (GMSK) Mode**

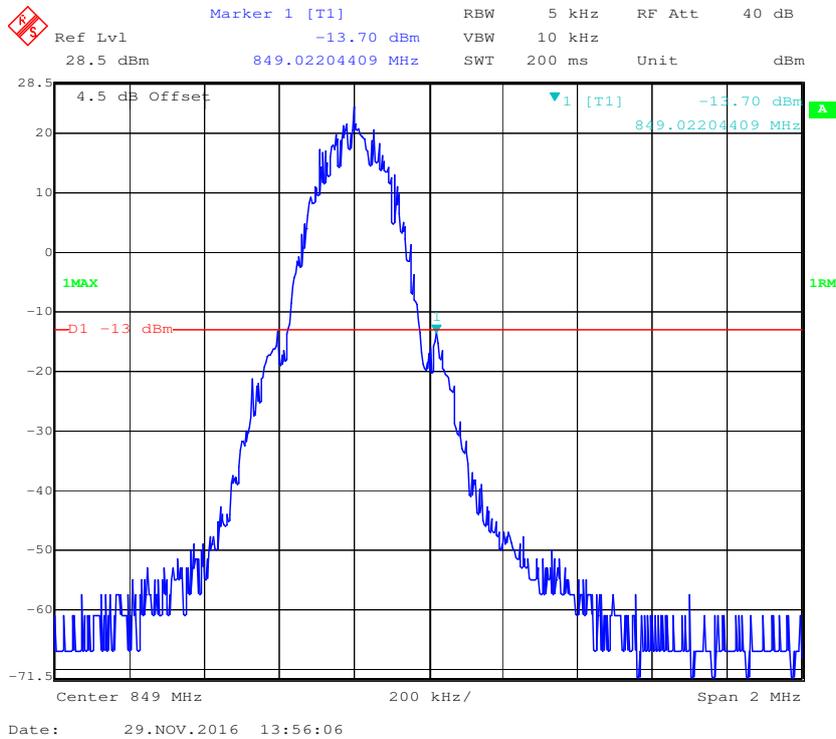


**Cellular Band, Left Band Edge for EDGE Mode**

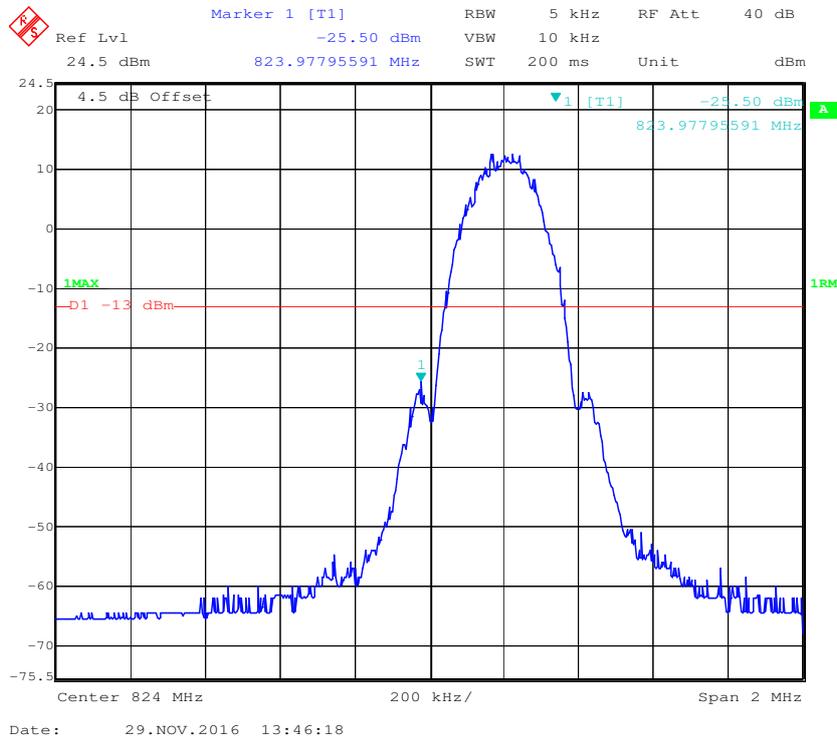


**Cellular Band, Right Band Edge for EDGE Mode**

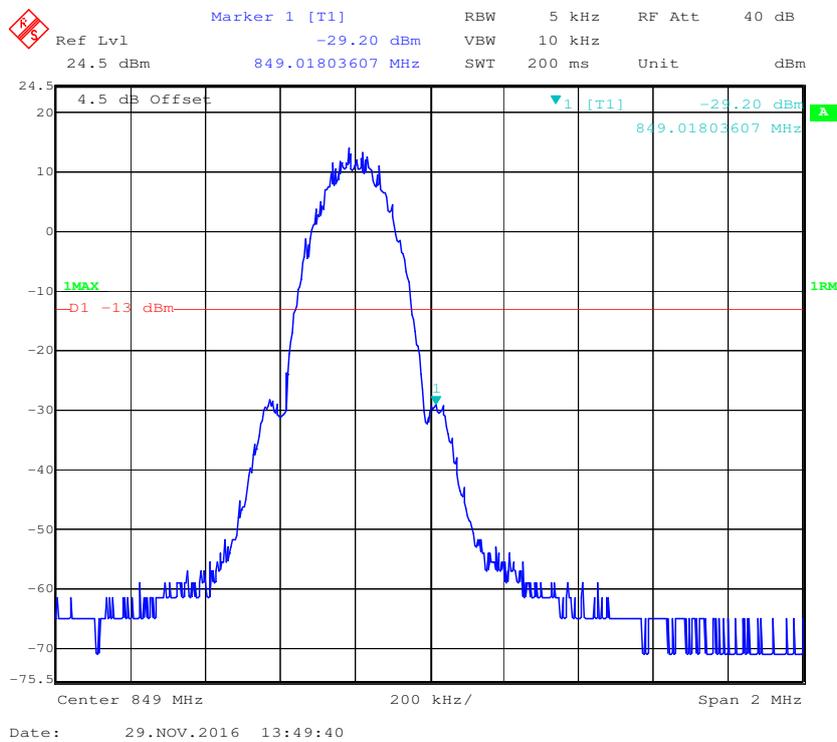


### Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

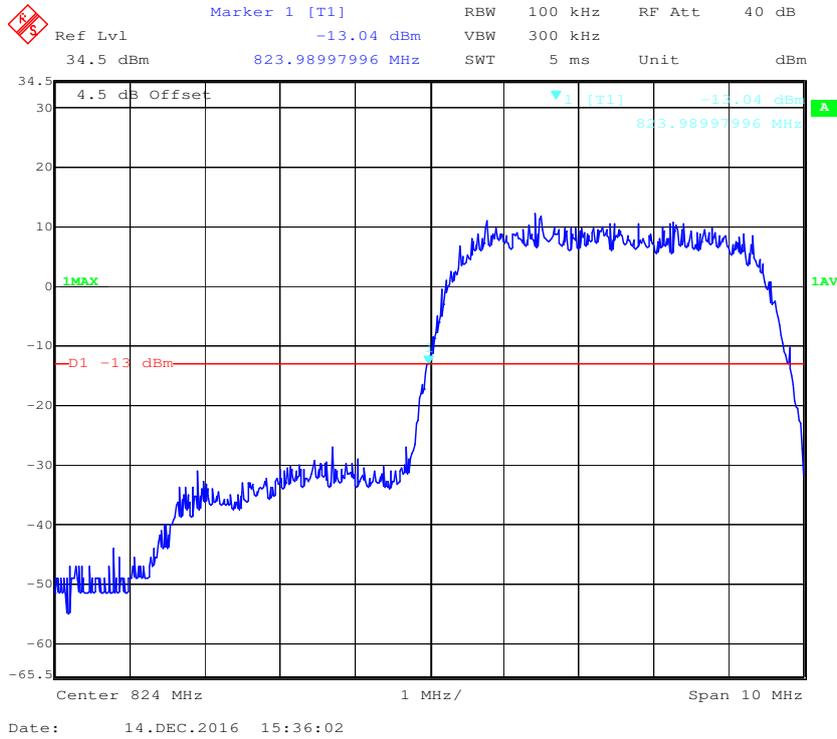


### Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

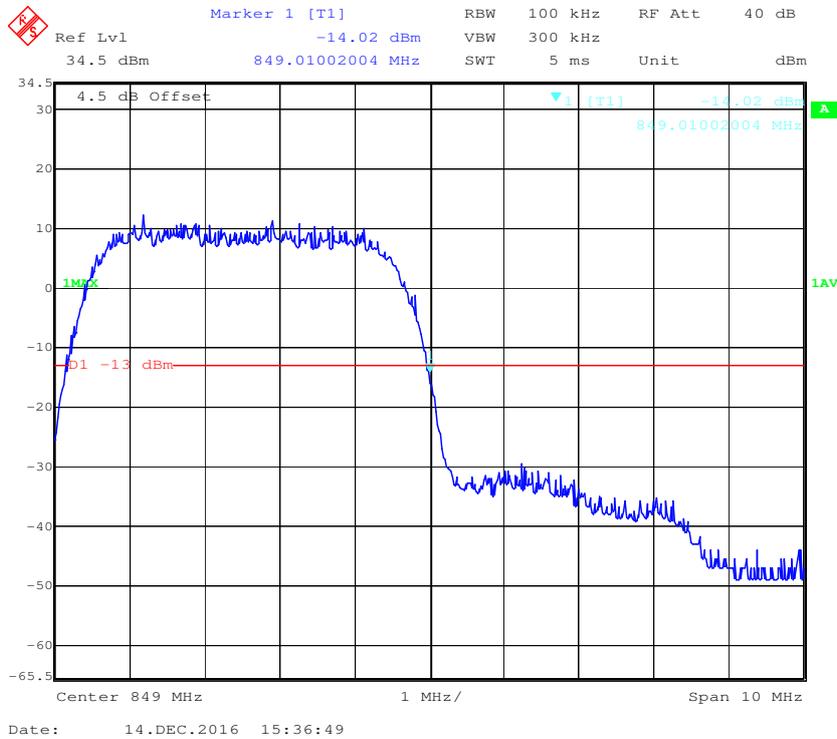


### Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

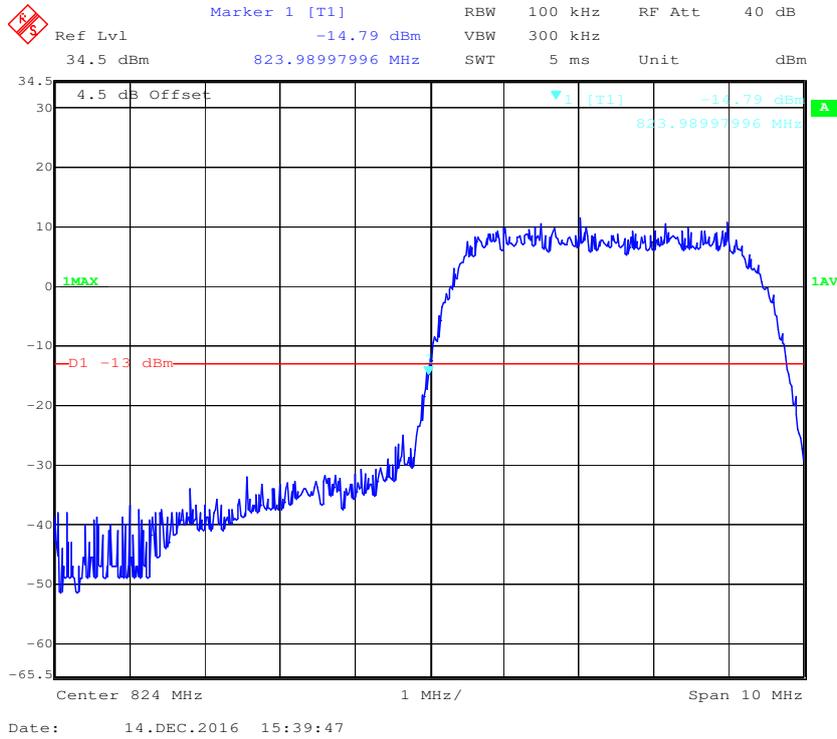


### Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

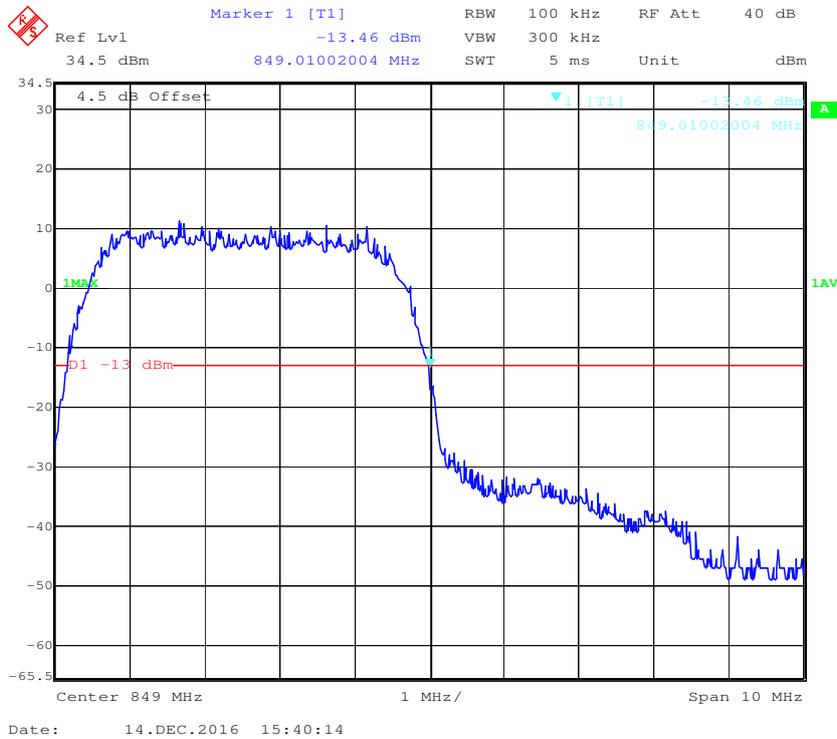


### Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

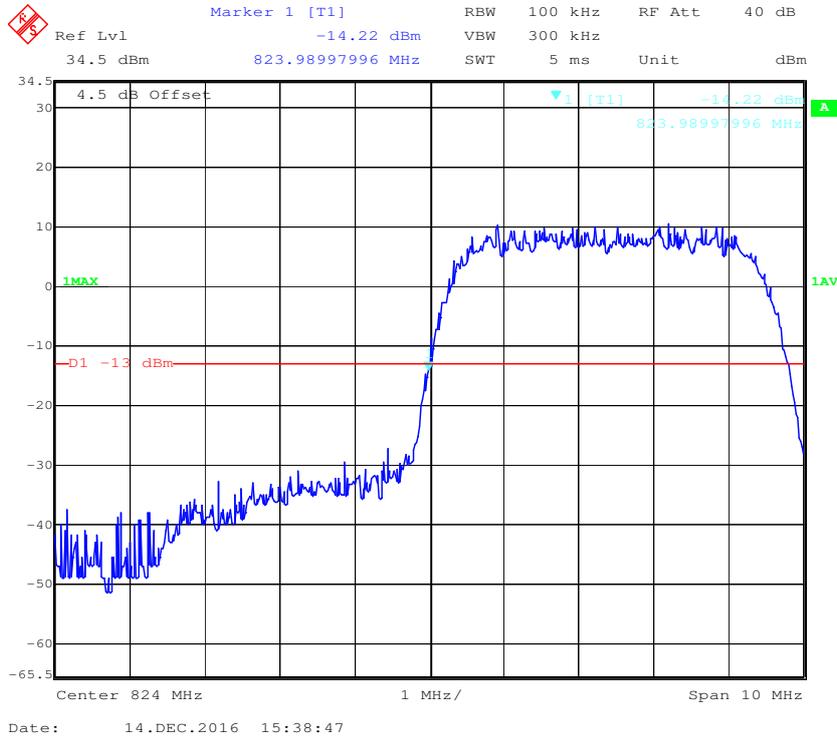


### Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

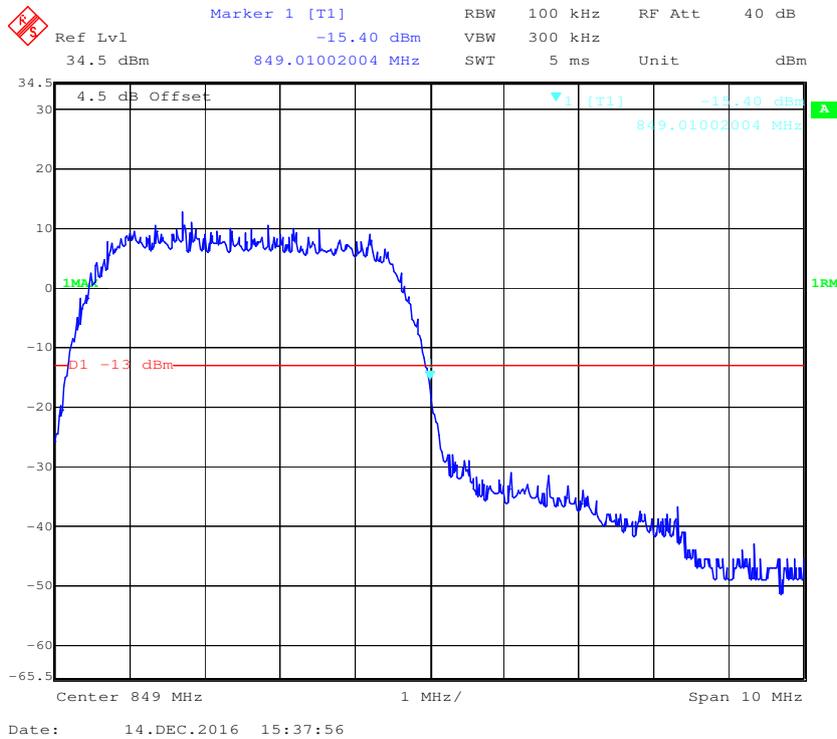


### PCS Band, Left Band Edge for GSM (GMSK) Mode

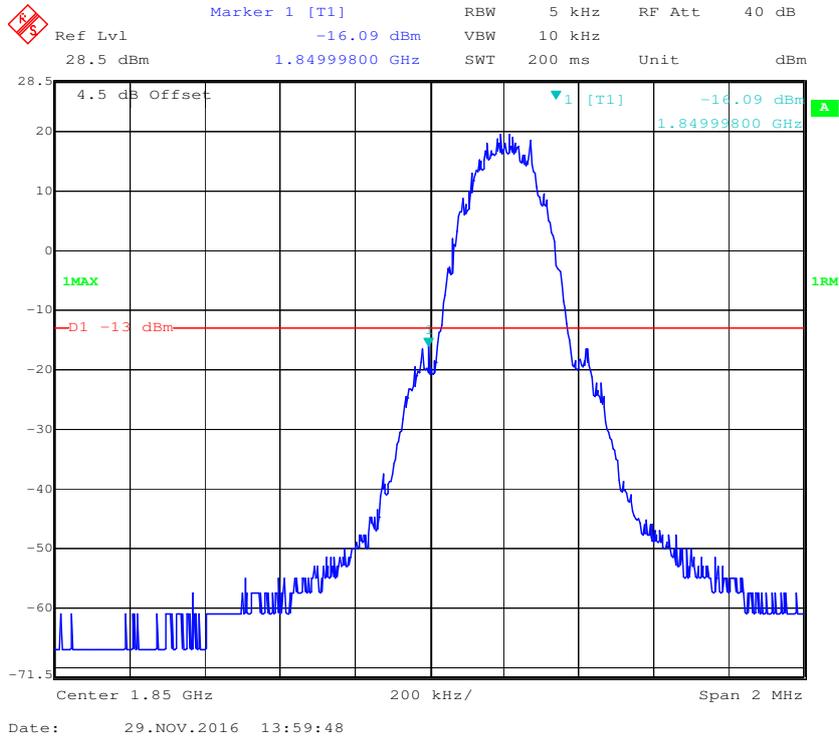


### PCS Band, Right Band Edge for GSM (GMSK) Mode

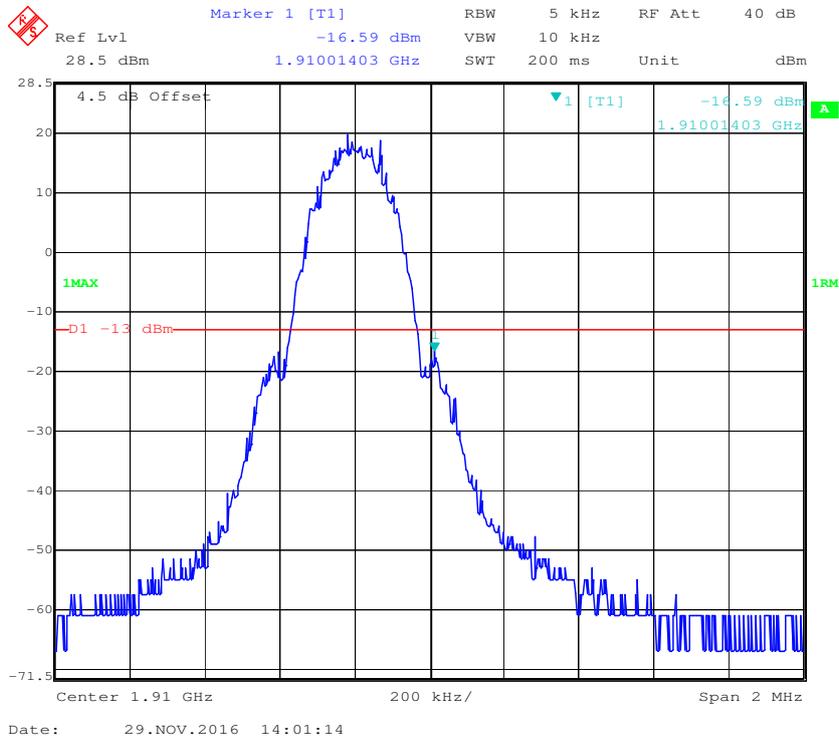


**PCS Band, Left Band Edge for EDGE Mode**

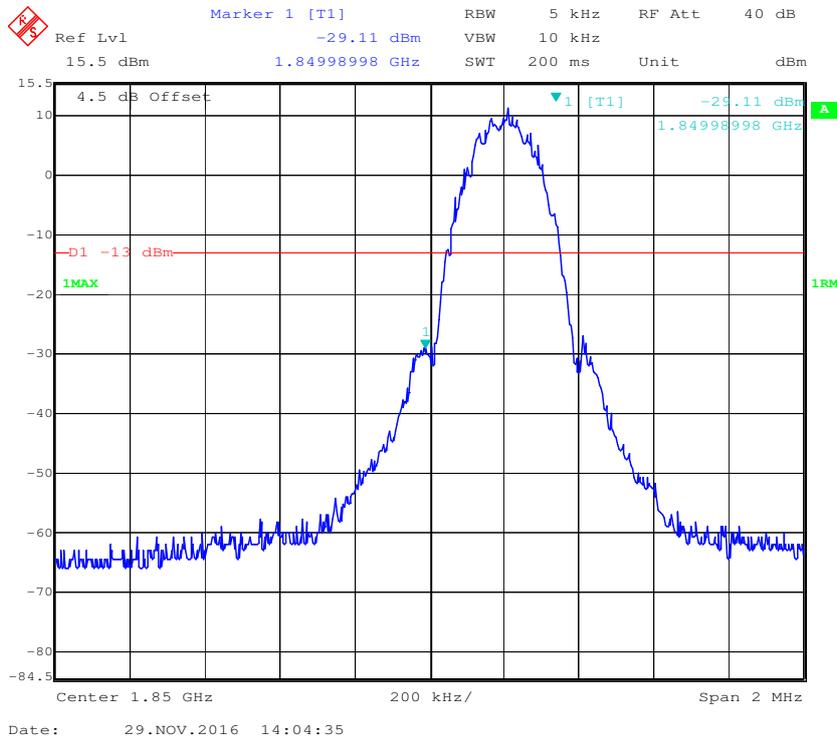


**PCS Band, Right Band Edge for EDGE Mode**

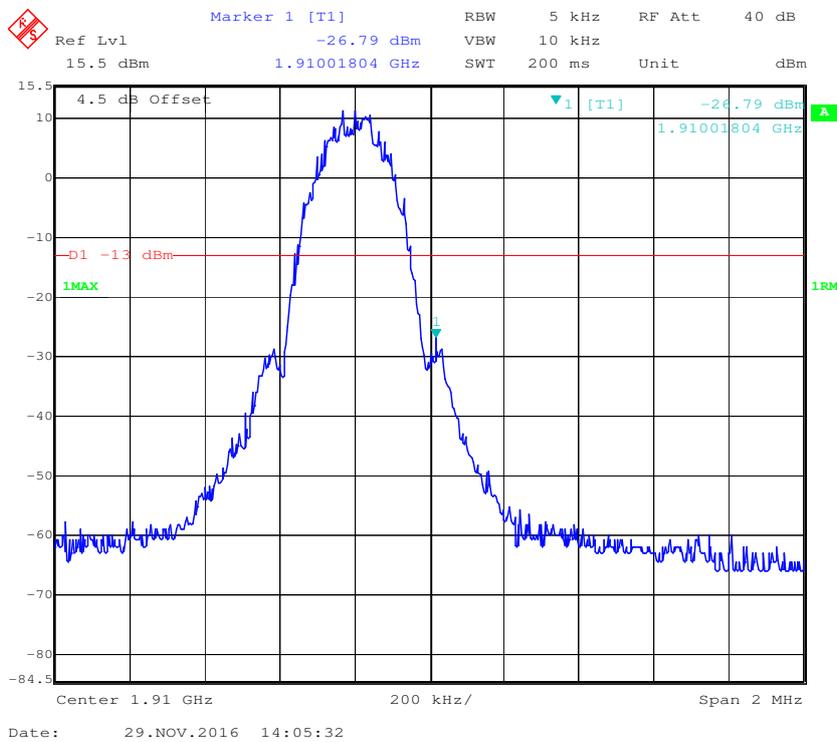


**PCS Band, Left Band Edge for WCDMA (BPSK) Mode**

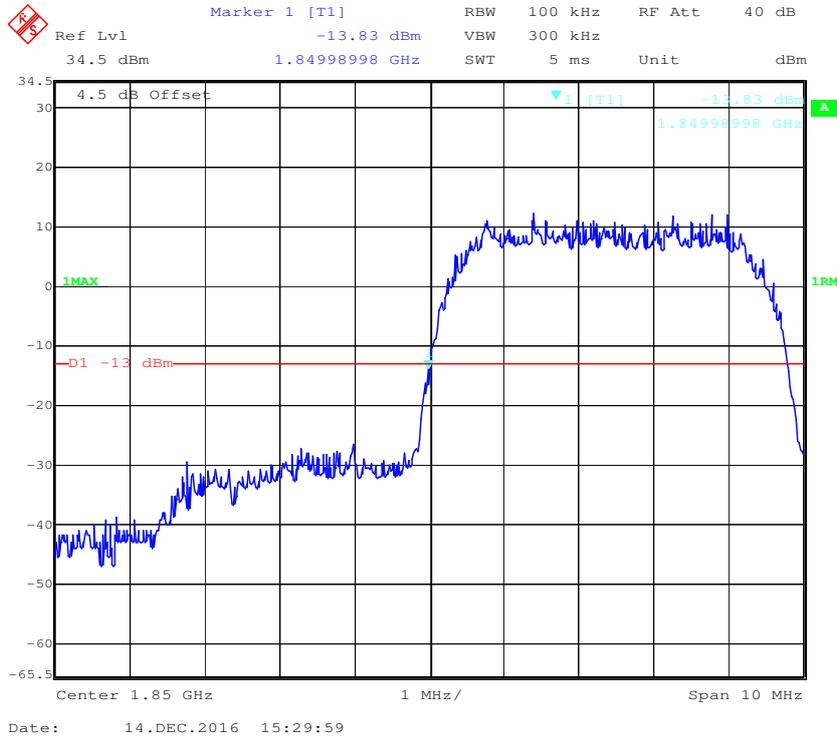


**PCS Band, Right Band Edge for WCDMA (BPSK) Mode**

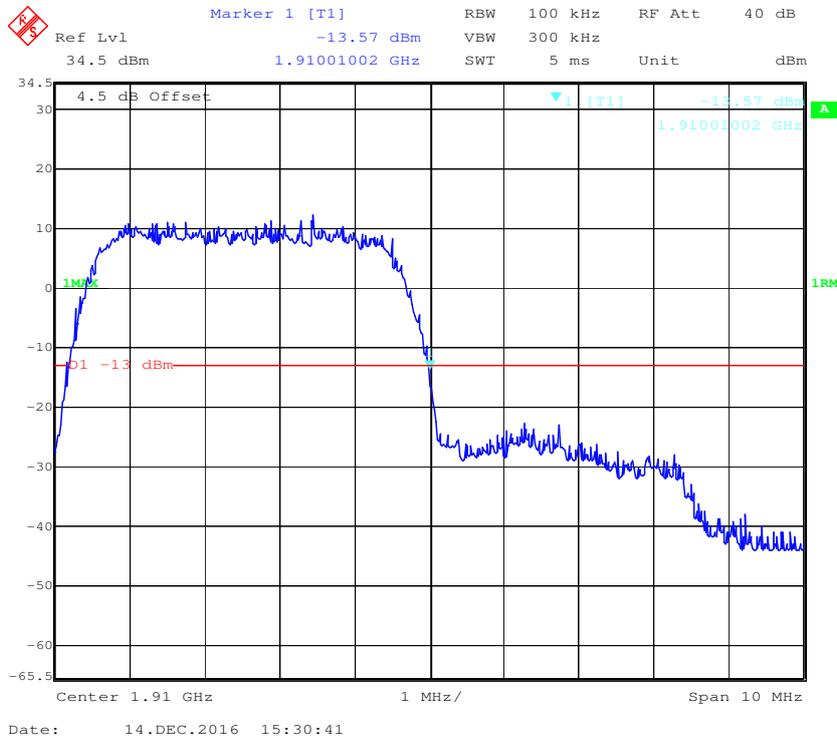


**PCS Band, Left Band Edge for HSDPA (16QAM) Mode**

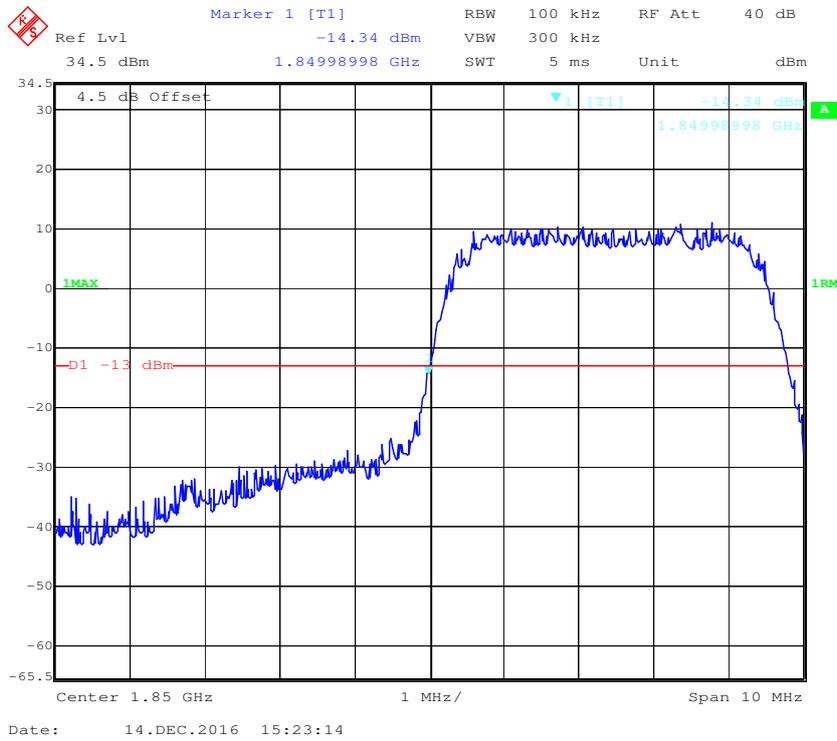


**PCS Band, Right Band Edge for HSDPA (16QAM) Mode**

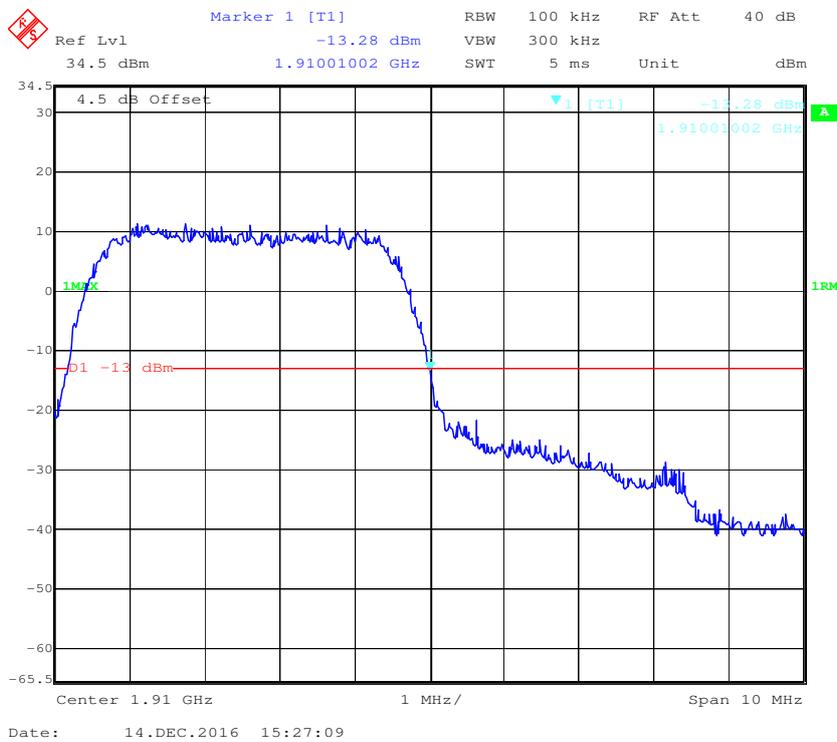

**PCS Band, Left Band Edge for HSUPA (BPSK) Mode**

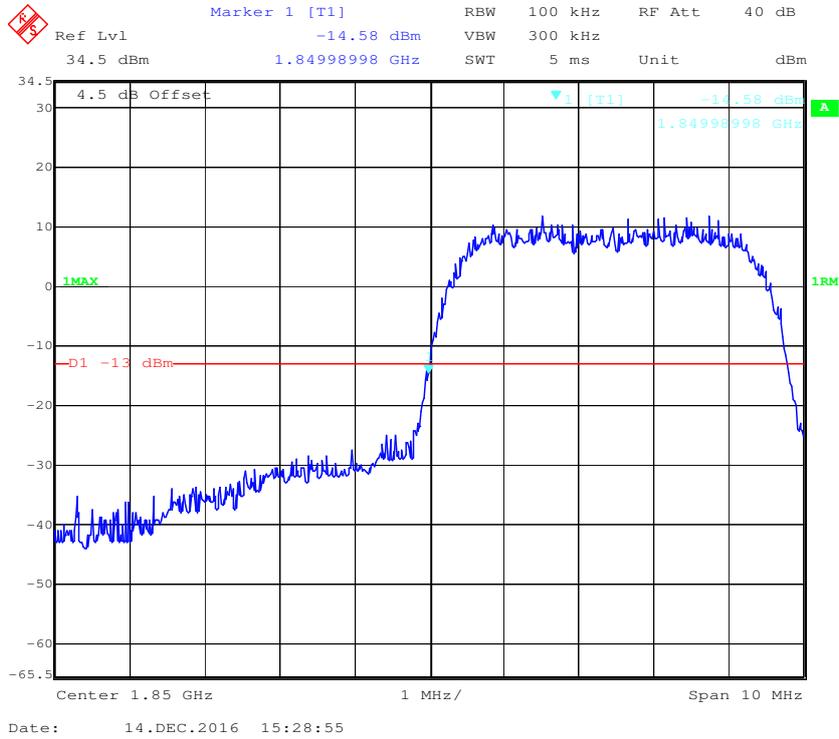


**PCS Band, Right Band Edge for HSUPA (BPSK) Mode**

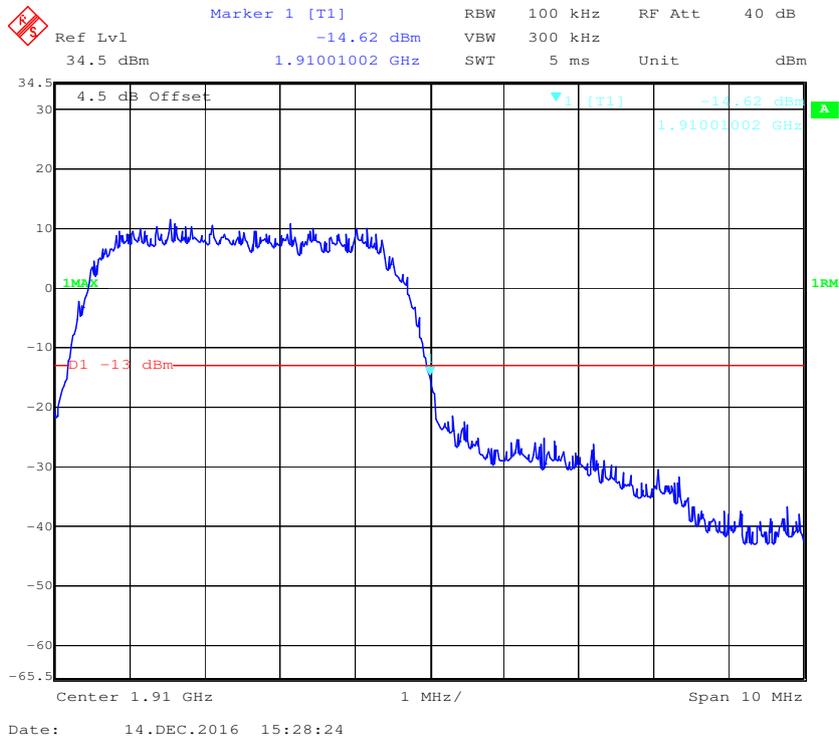


LTE Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

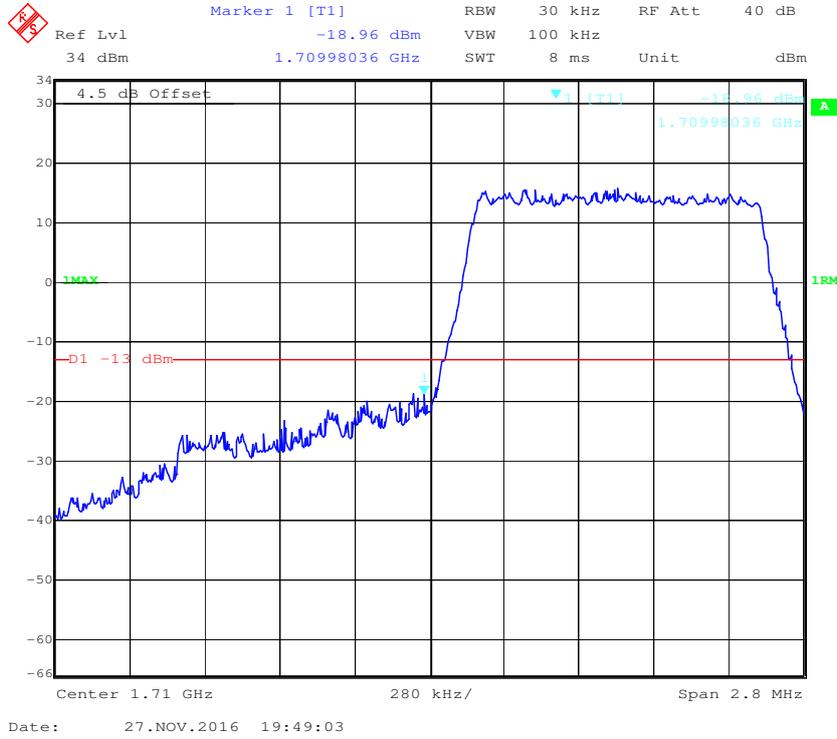


QPSK (1.4 MHz, FULL RB) - Right Band Edge

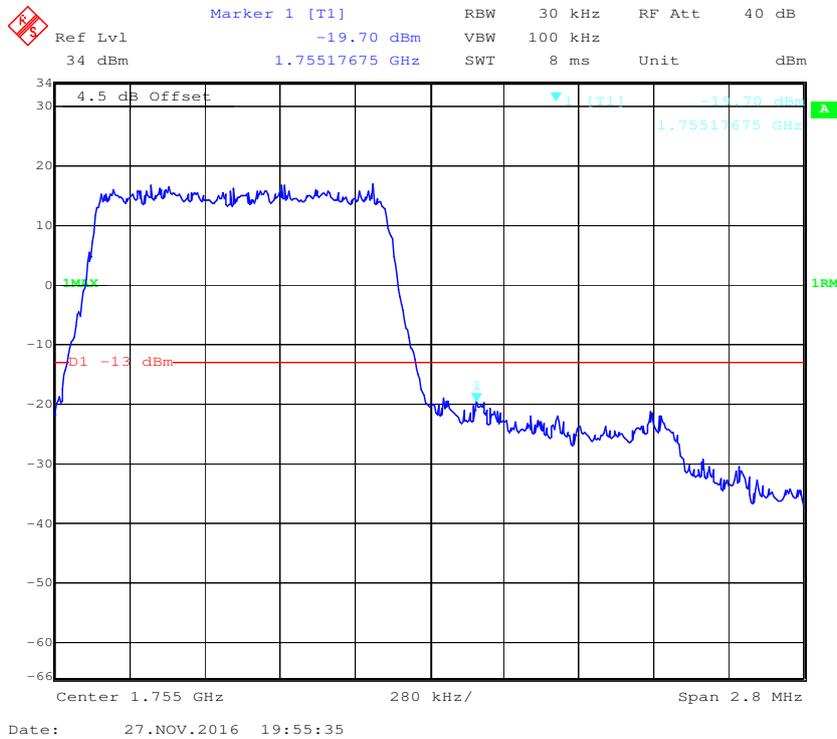


### 16-QAM (1.4 MHz, FULL RB) - Left Band Edge

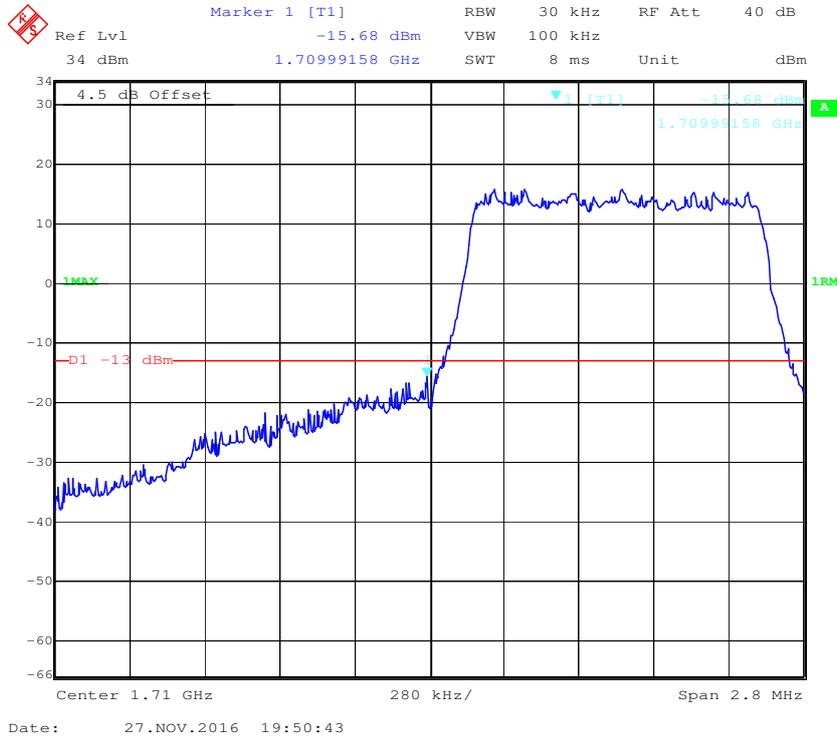


### 16-QAM (1.4 MHz, FULL RB) - Right Band Edge

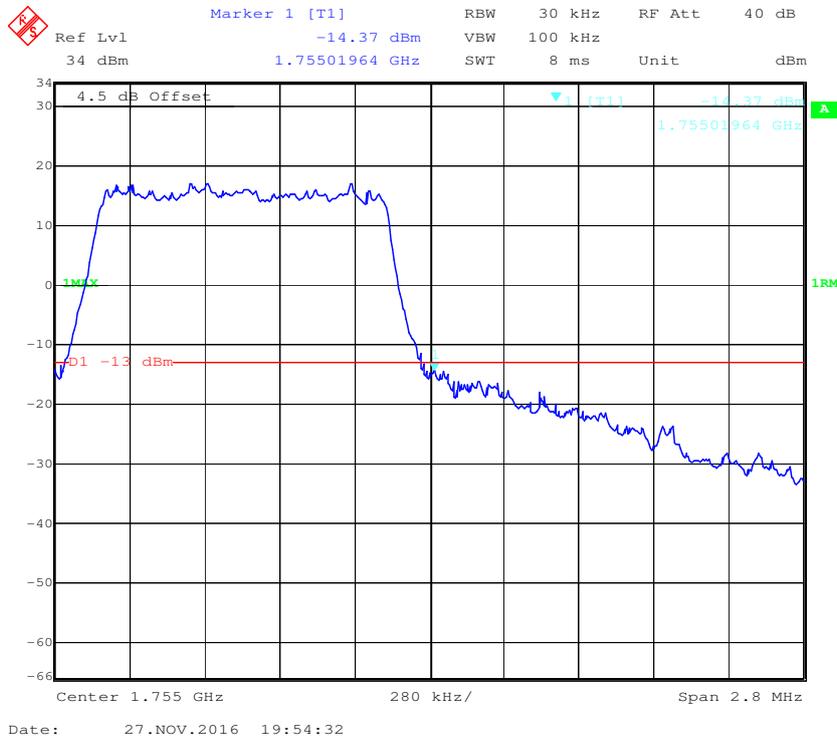


### QPSK (3.0 MHz, FULL RB) - Left Band Edge

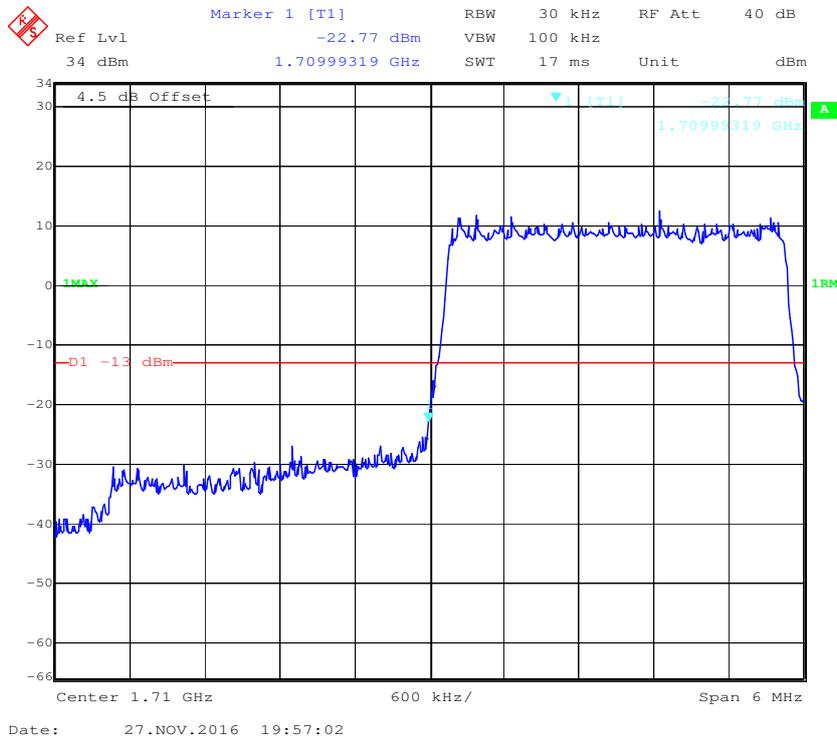


### QPSK (3.0 MHz, FULL RB) - Right Band Edge

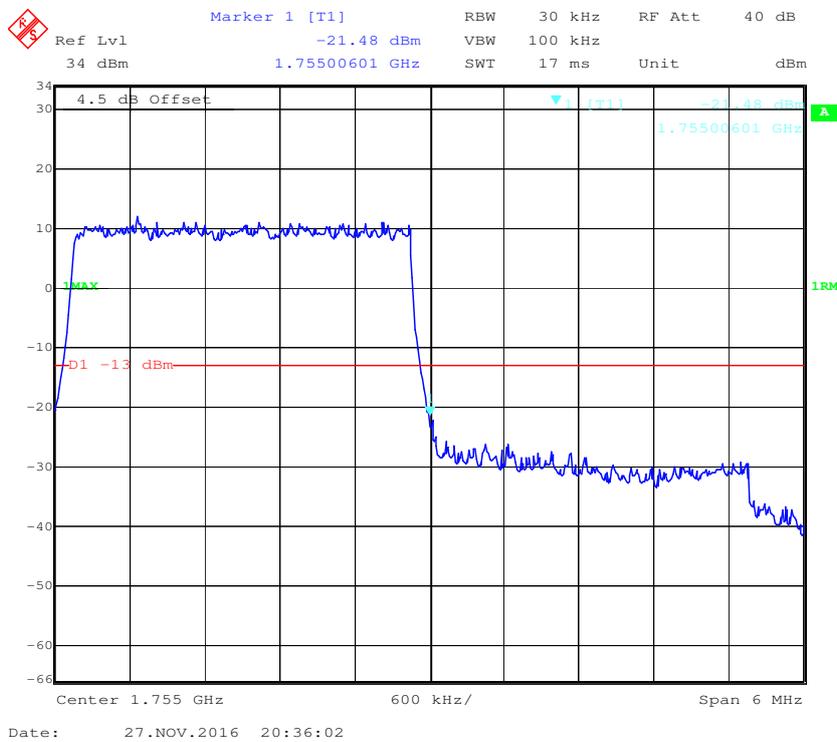


### 16-QAM (3.0 MHz, FULL RB) - Left Band Edge

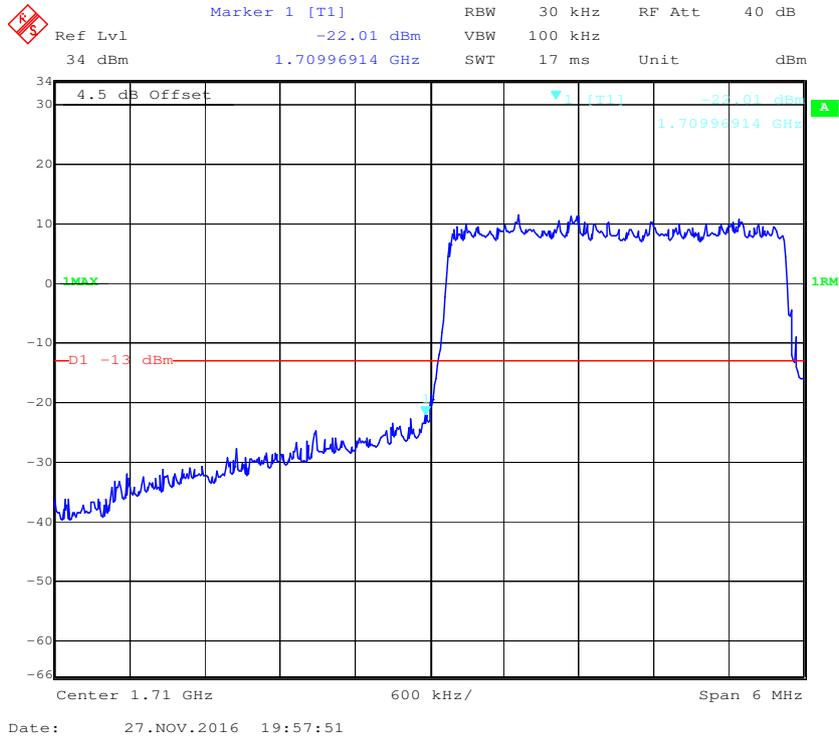


### 16-QAM (3.0 MHz, FULL RB) - Right Band Edge

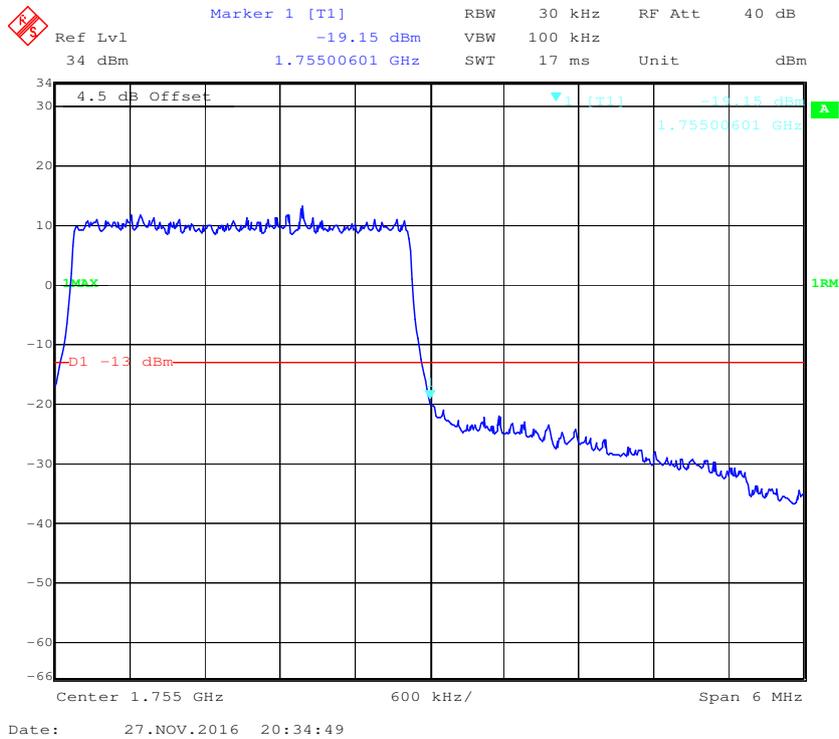


### QPSK (5.0 MHz, FULL RB) - Left Band Edge

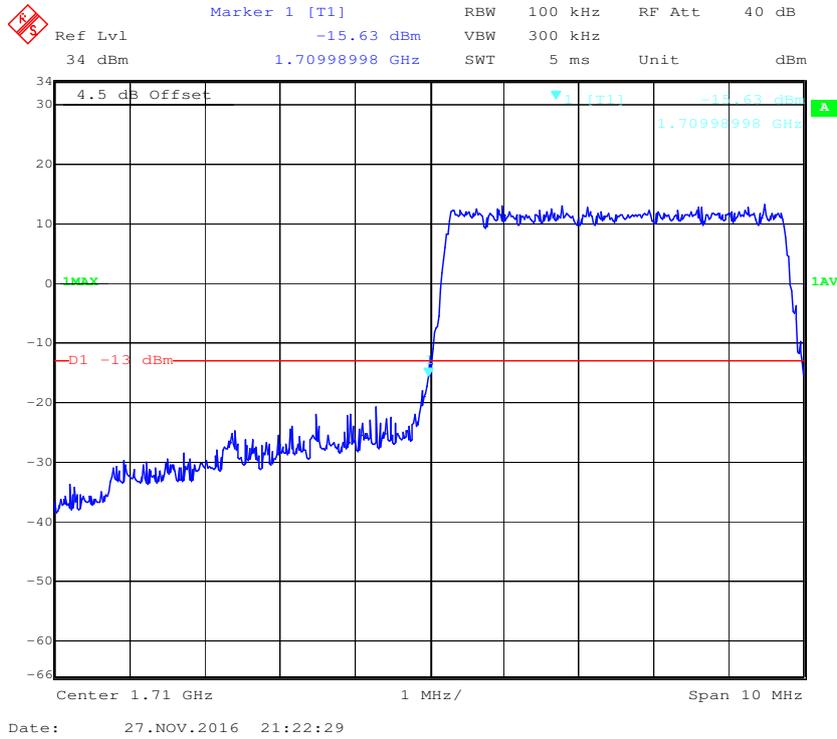


### QPSK (5.0 MHz, FULL RB) - Right Band Edge

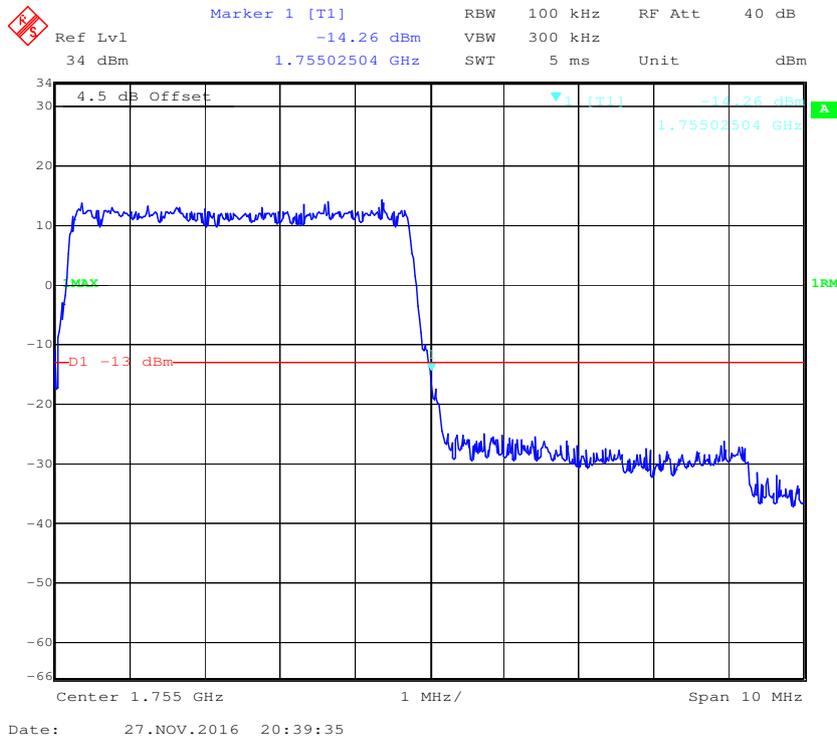


### 16-QAM (5.0 MHz, FULL RB) - Left Band Edge

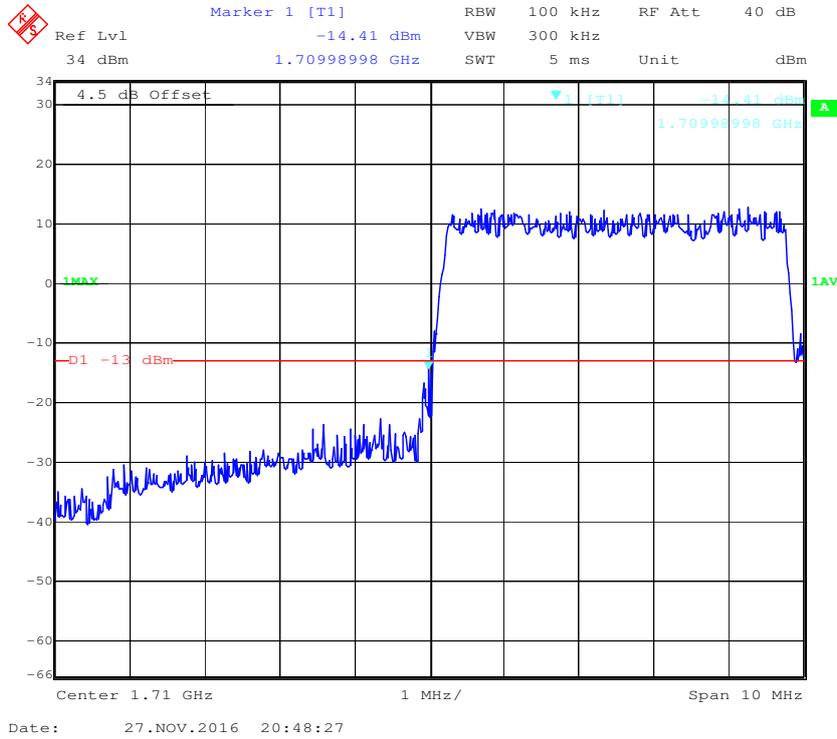


### 16-QAM (5.0 MHz, FULL RB) - Right Band Edge

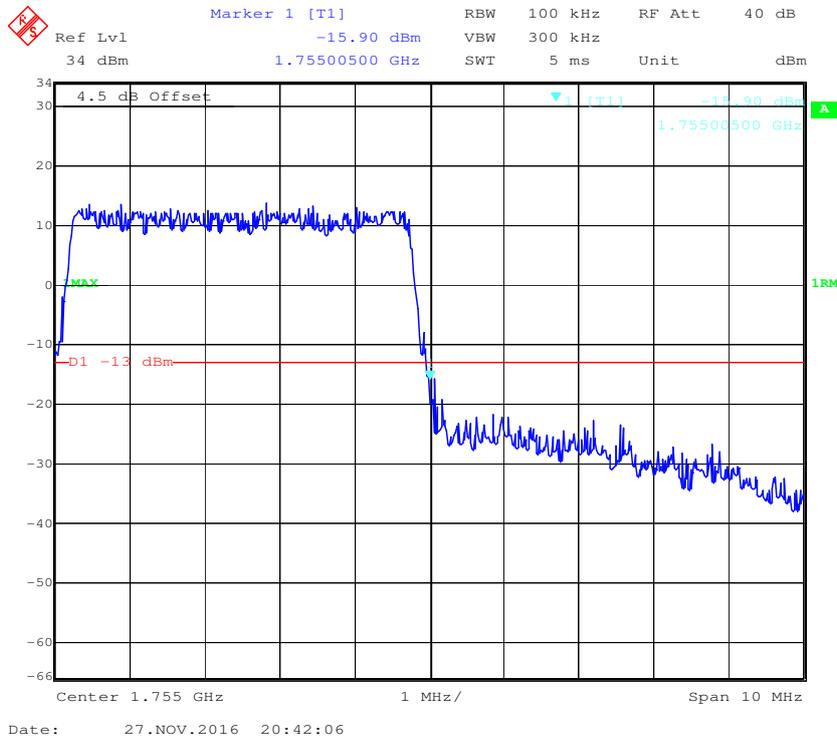


### QPSK (10.0 MHz, FULL RB) - Left Band Edge

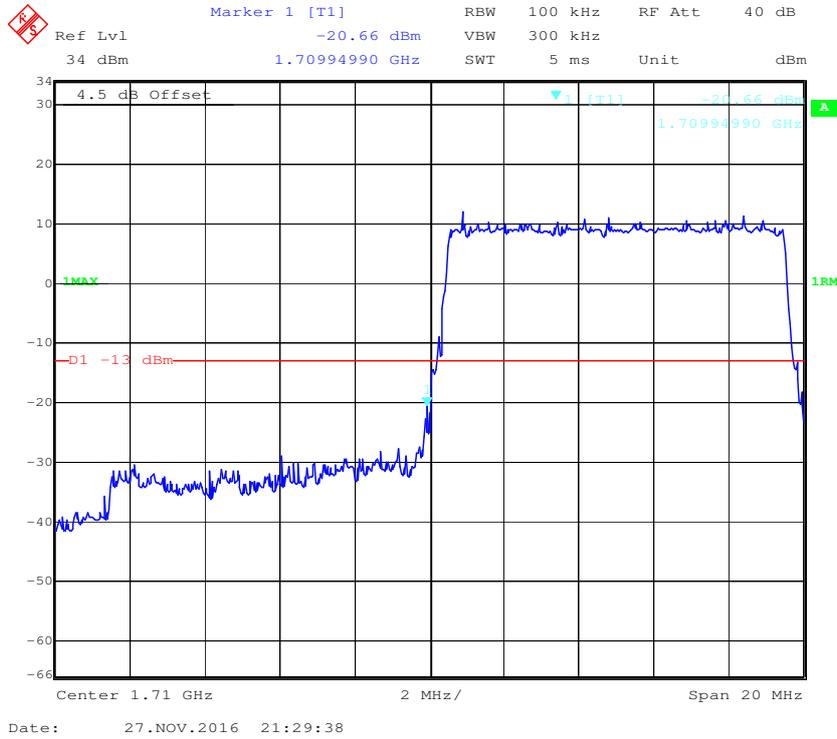


### QPSK (10.0 MHz, FULL RB) - Right Band Edge

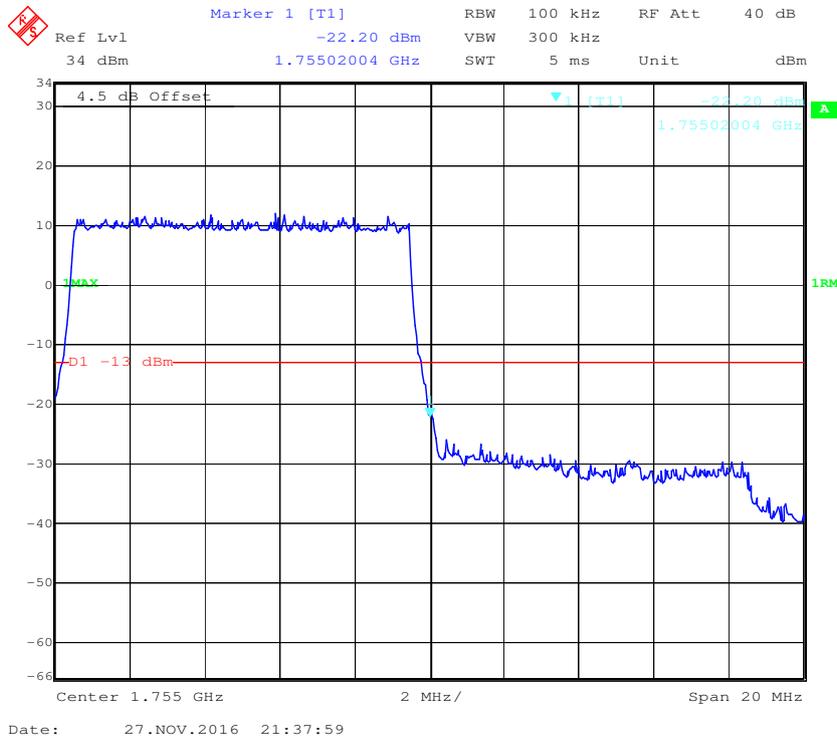


### 16-QAM (10.0 MHz, FULL RB) - Left Band Edge

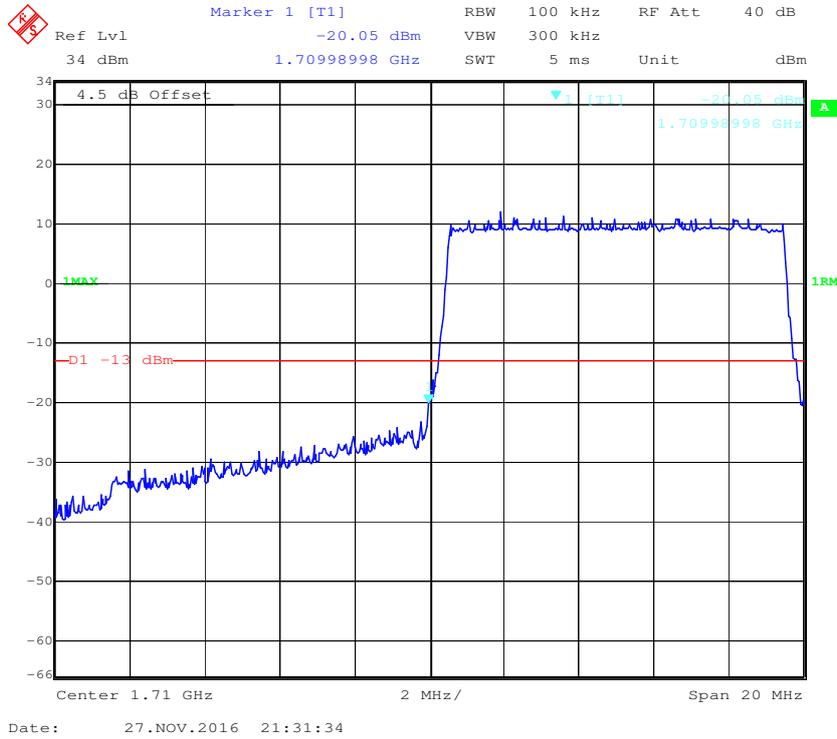


### 16-QAM (10.0 MHz, FULL RB) - Right Band Edge

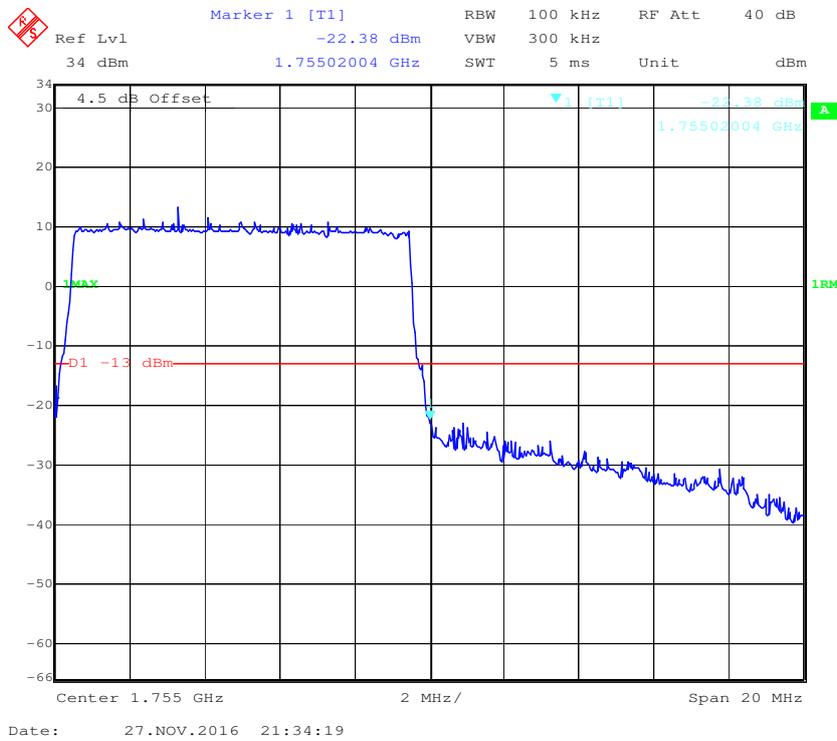


### QPSK (15.0 MHz, FULL RB) - Left Band Edge

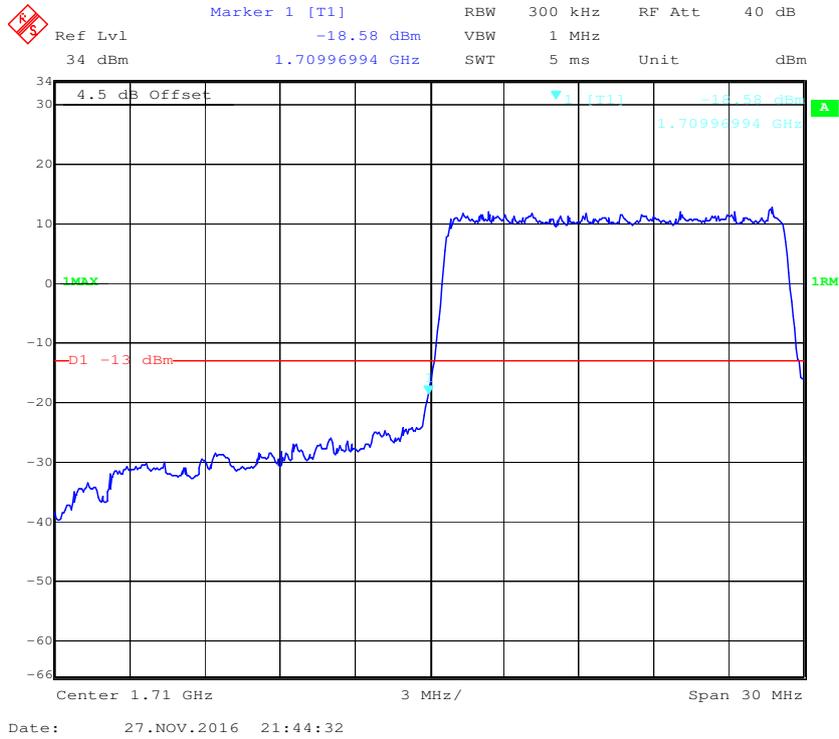


### QPSK (15.0 MHz, FULL RB) - Right Band Edge

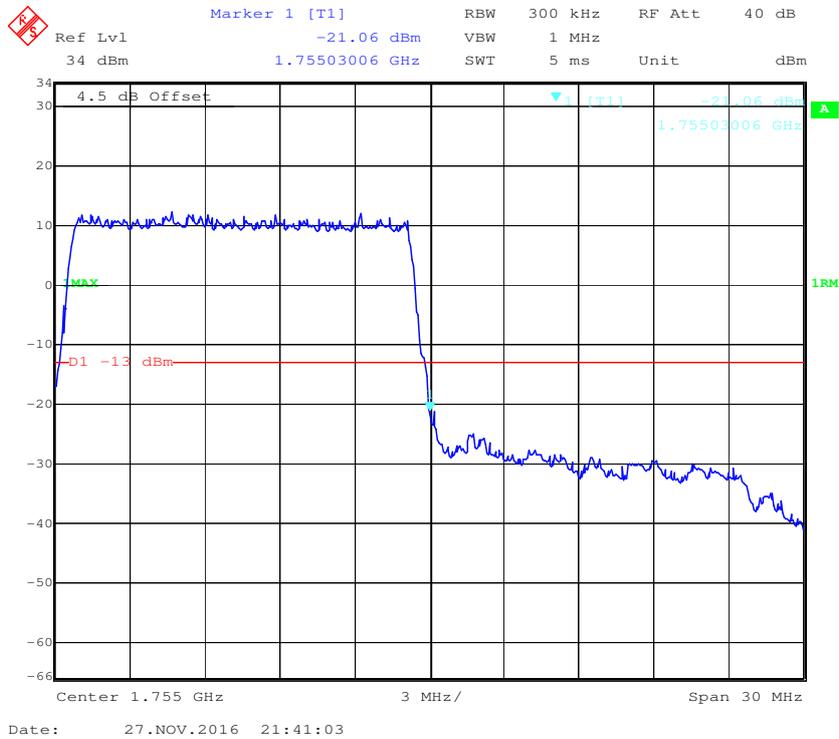


**16-QAM (15.0 MHz, FULL RB) - Left Band Edge**

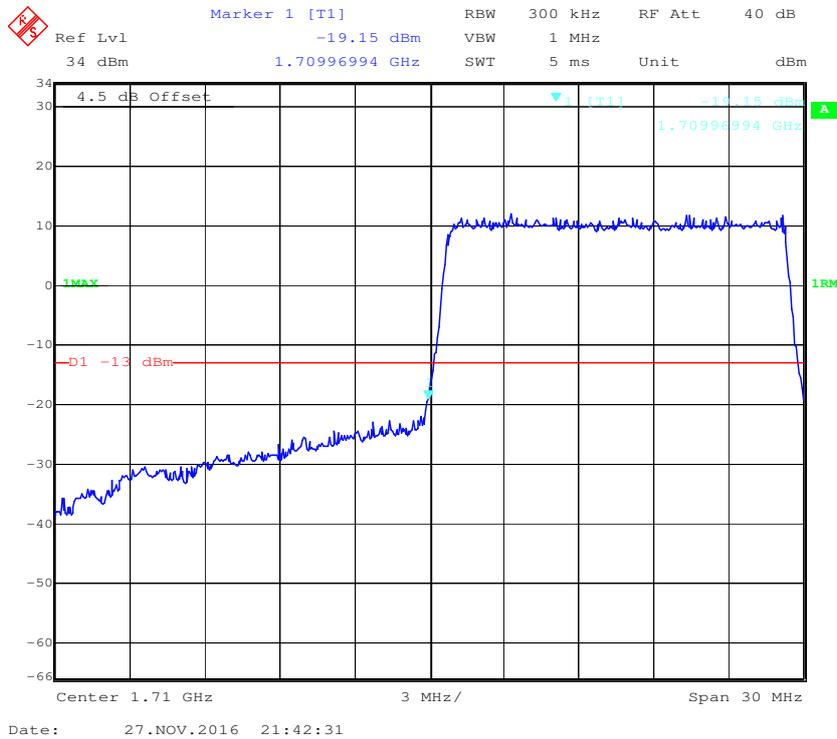


**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

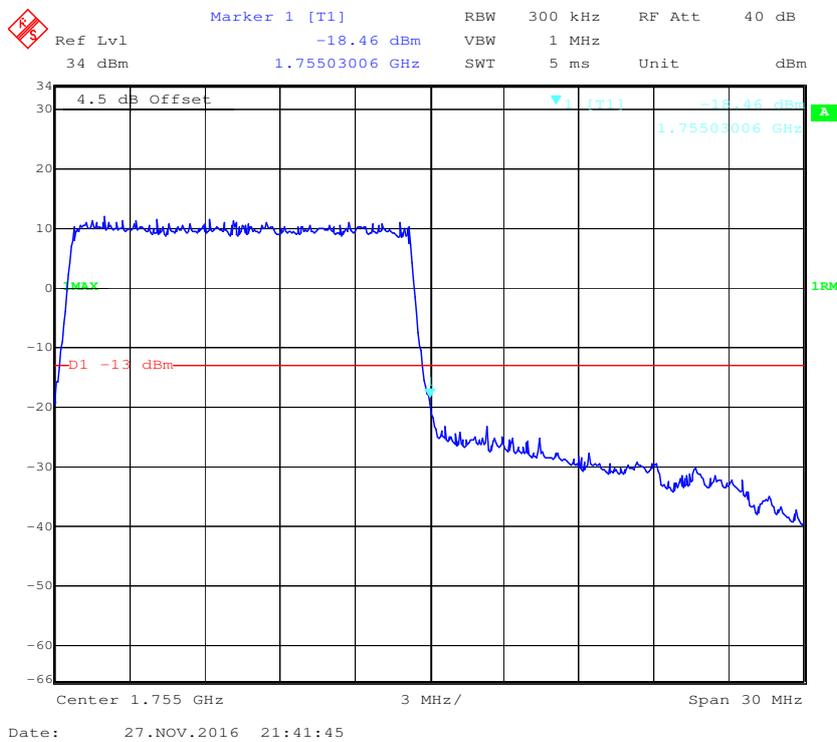


**QPSK (20.0 MHz, FULL RB) - Left Band Edge**

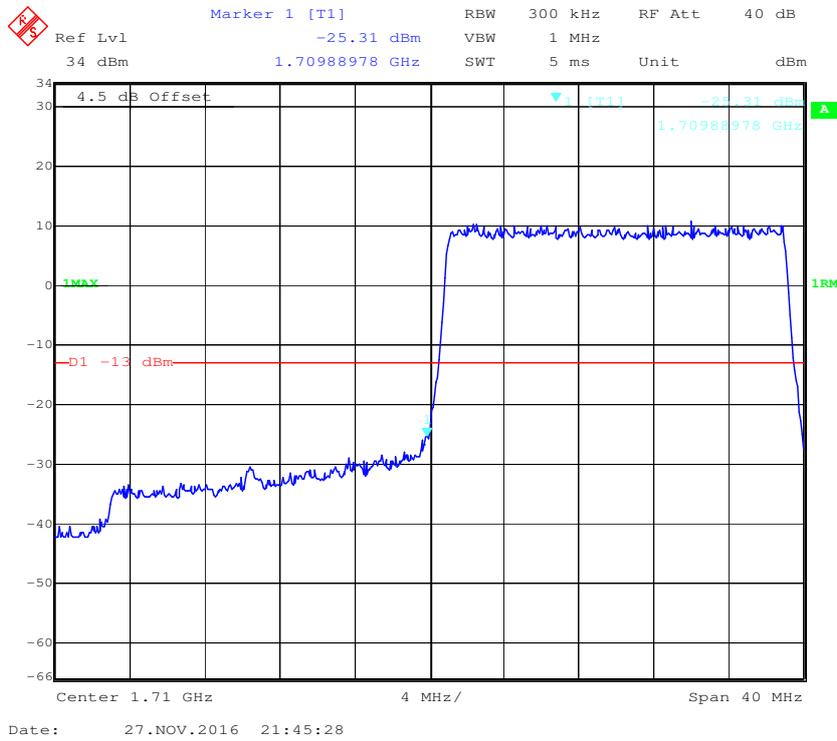


**QPSK (20.0 MHz, FULL RB) - Right Band Edge**

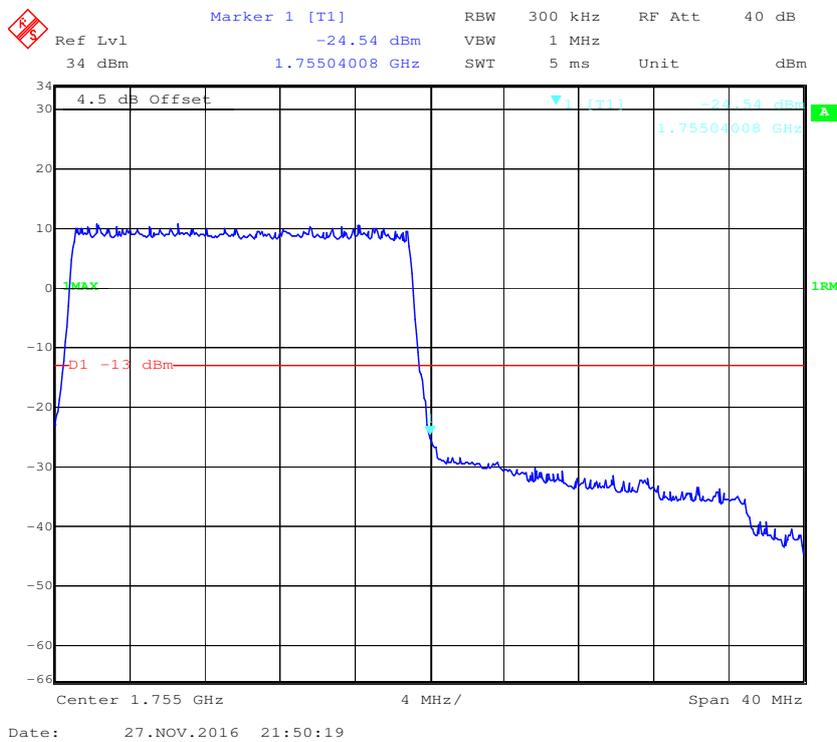

### 16-QAM (20.0 MHz, FULL RB) - Left Band Edge

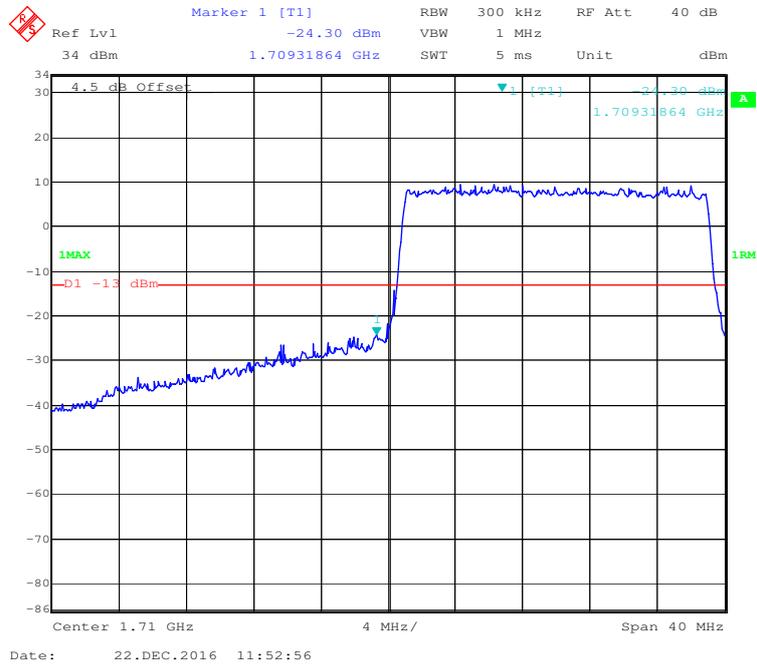


### 16-QAM (20.0 MHz, FULL RB) - Right Band Edge

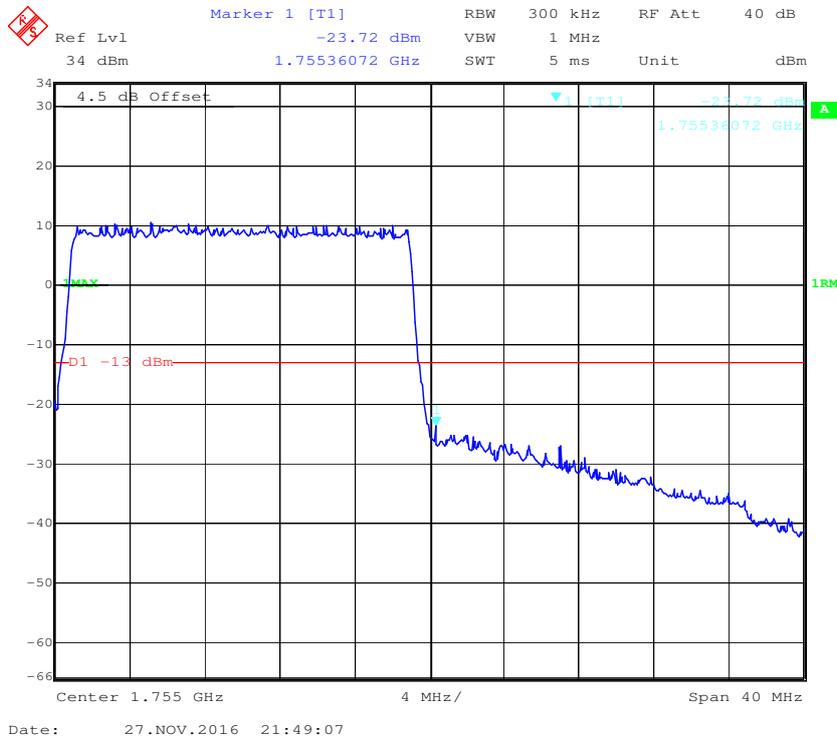


**LTE Band 7:**


**QPSK (5.0 MHz, FULL RB) - Left Band Edge**

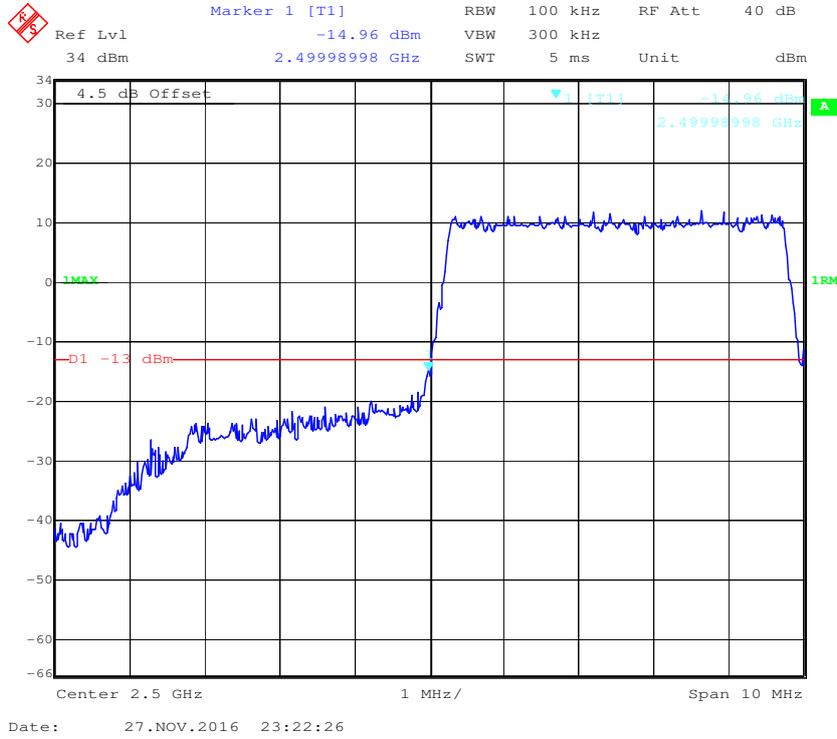


**QPSK (5.0 MHz, FULL RB) - Right Band Edge**

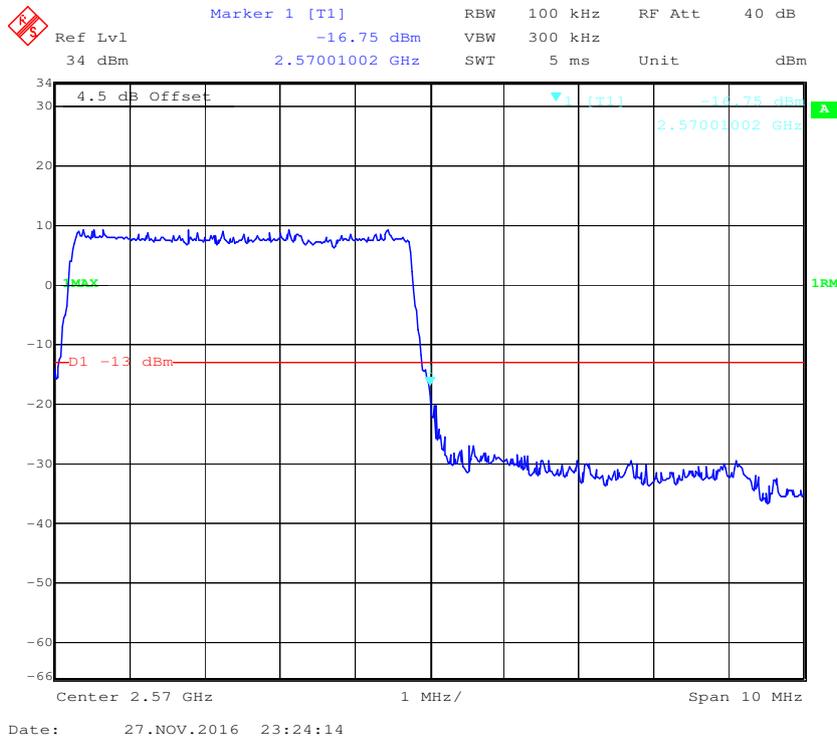


### 16-QAM (5.0 MHz, FULL RB) - Left Band Edge

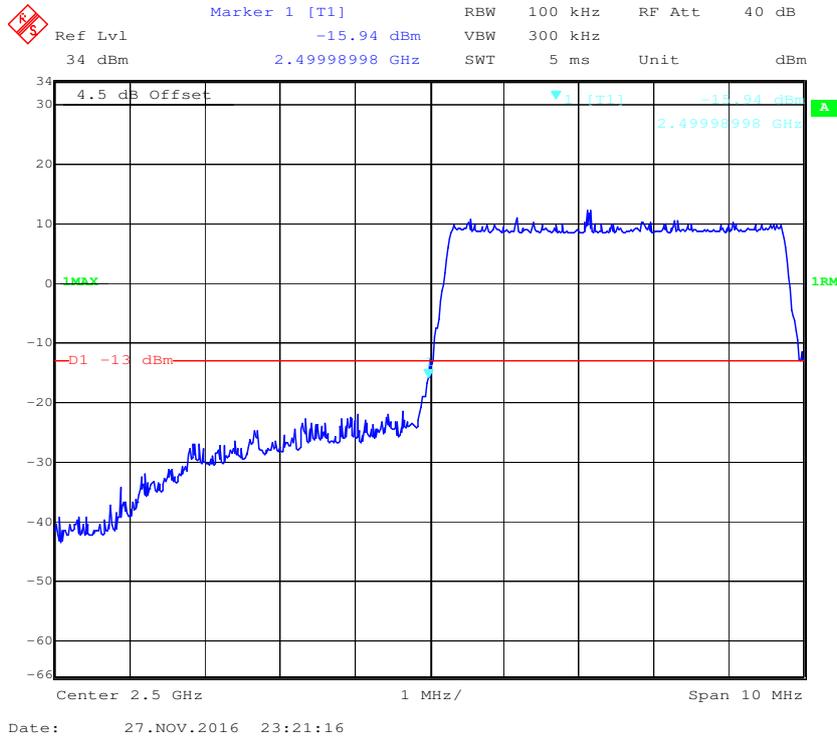


### 16-QAM (5.0 MHz, FULL RB) - Right Band Edge

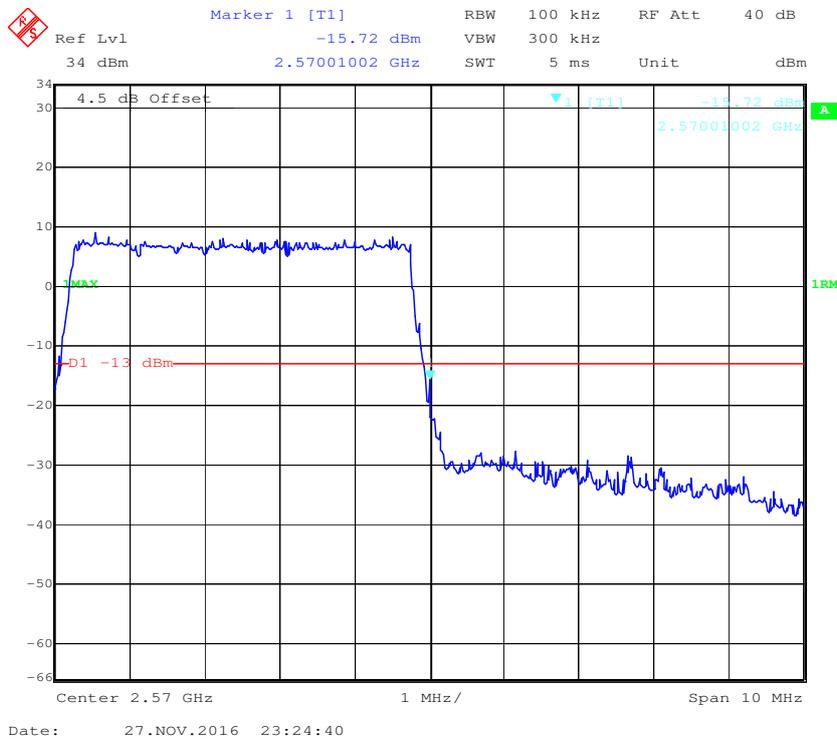


### QPSK (10.0 MHz, FULL RB) - Left Band Edge

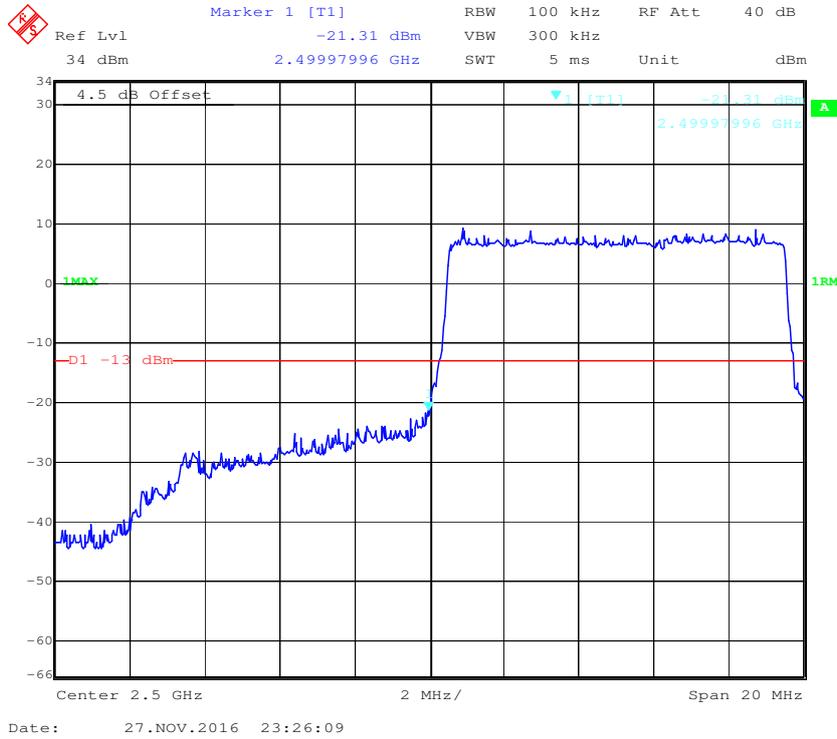


### QPSK (10.0 MHz, FULL RB) - Right Band Edge

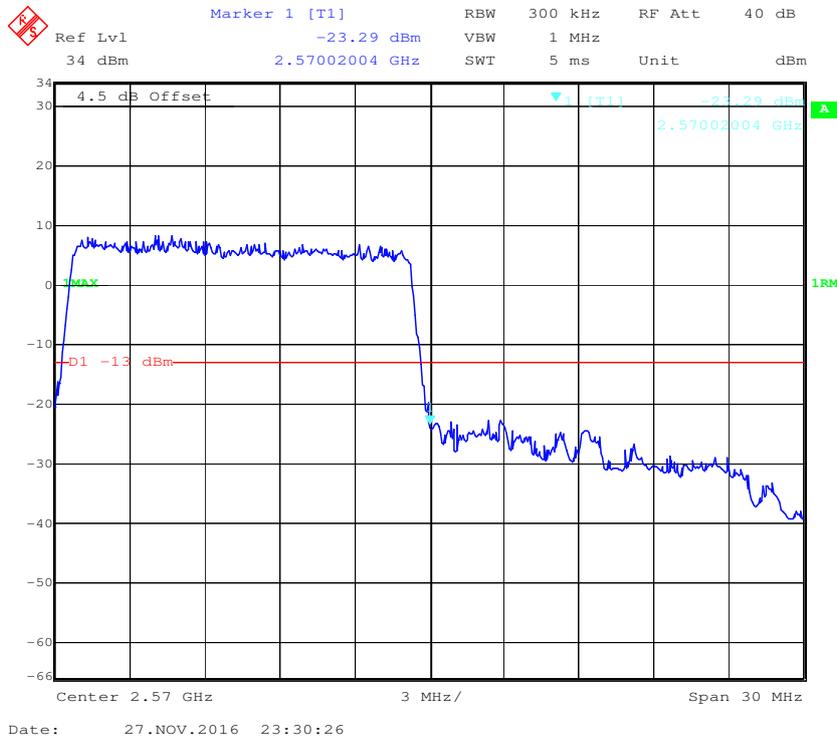


**16-QAM (10.0 MHz, FULL RB) - Left Band Edge**

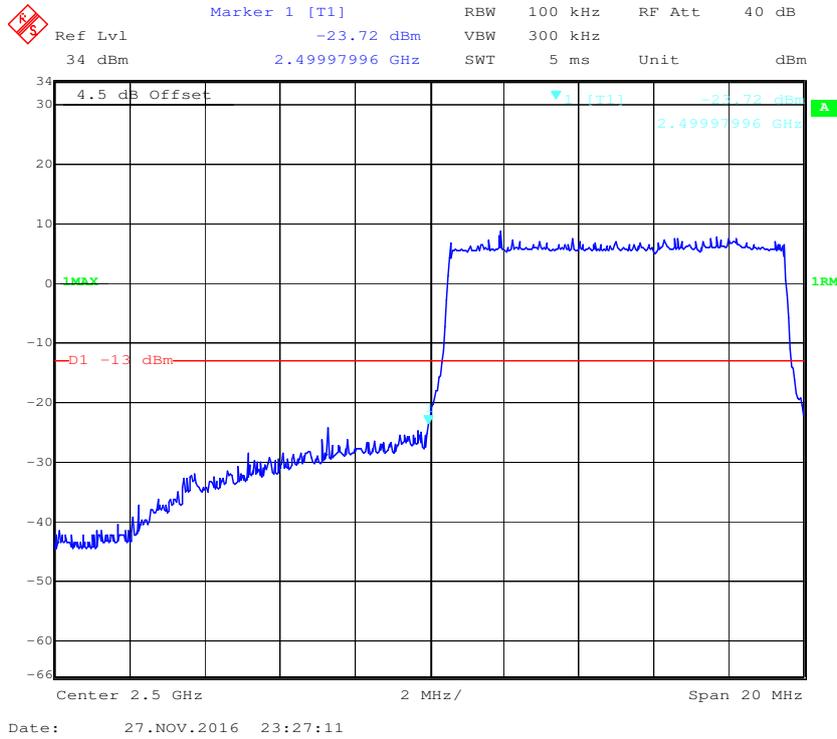


**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

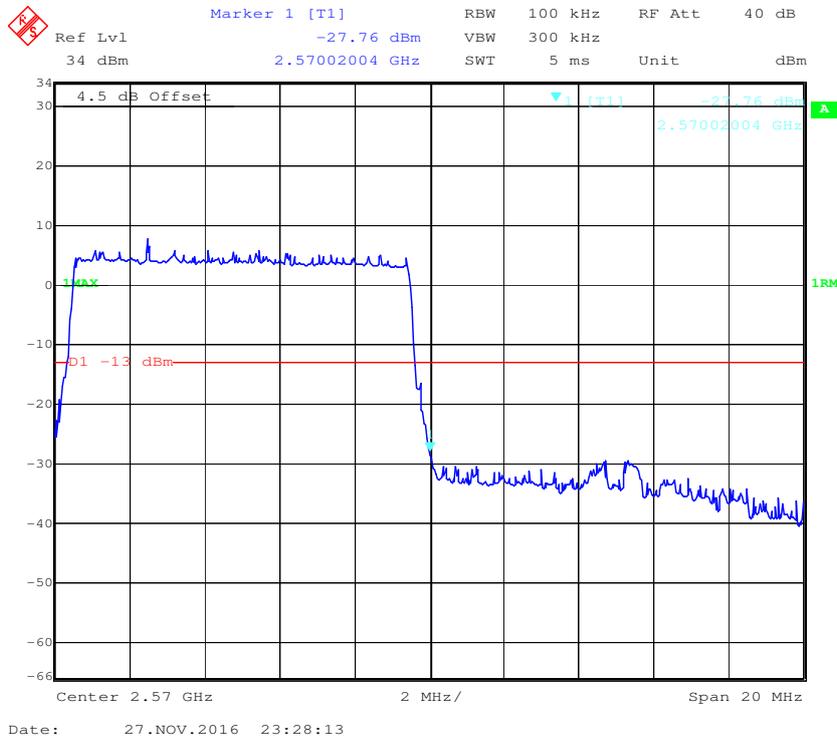


### QPSK (15 MHz, FULL RB) - Left Band Edge

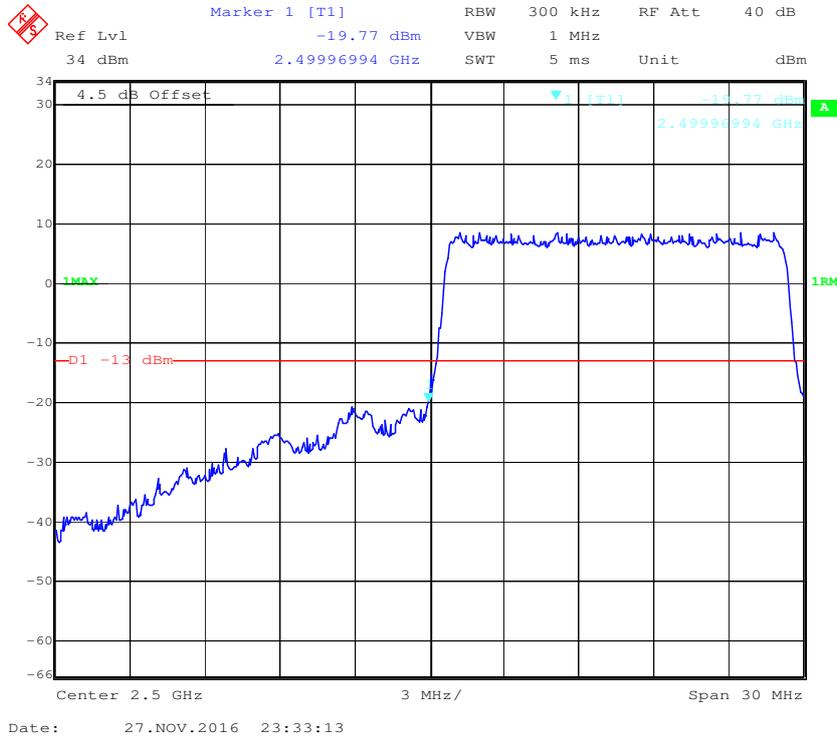


### QPSK (15 MHz, FULL RB) - Right Band Edge

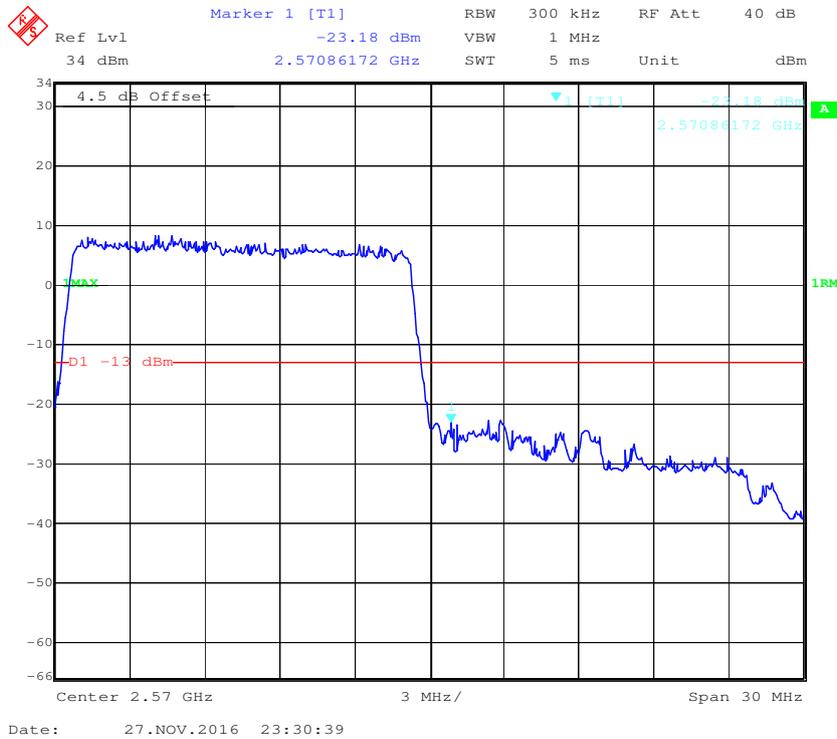


### 16-QAM (15 MHz, FULL RB) - Left Band Edge

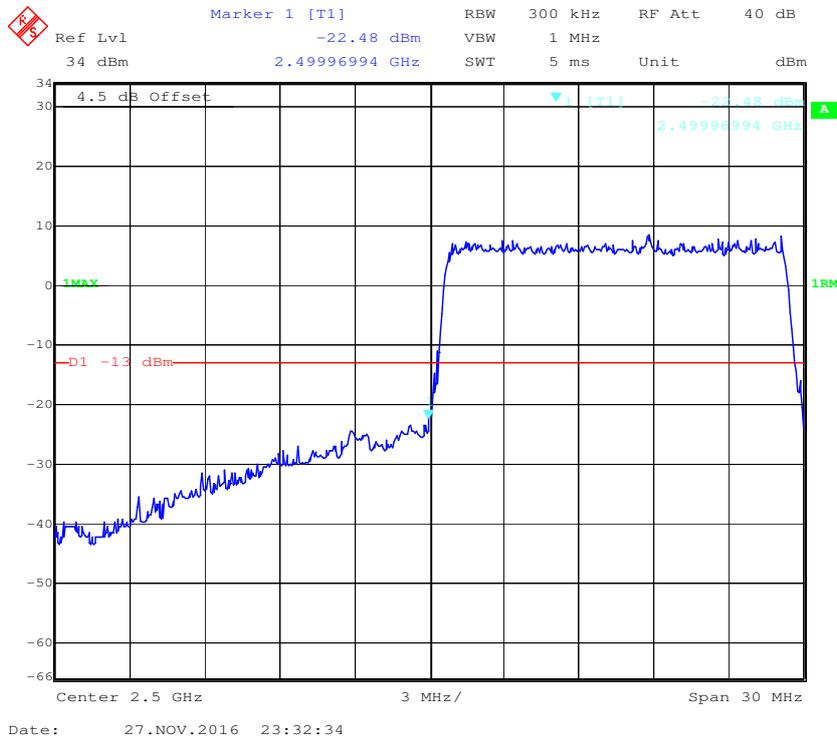


### 16-QAM (15 MHz, FULL RB) - Right Band Edge

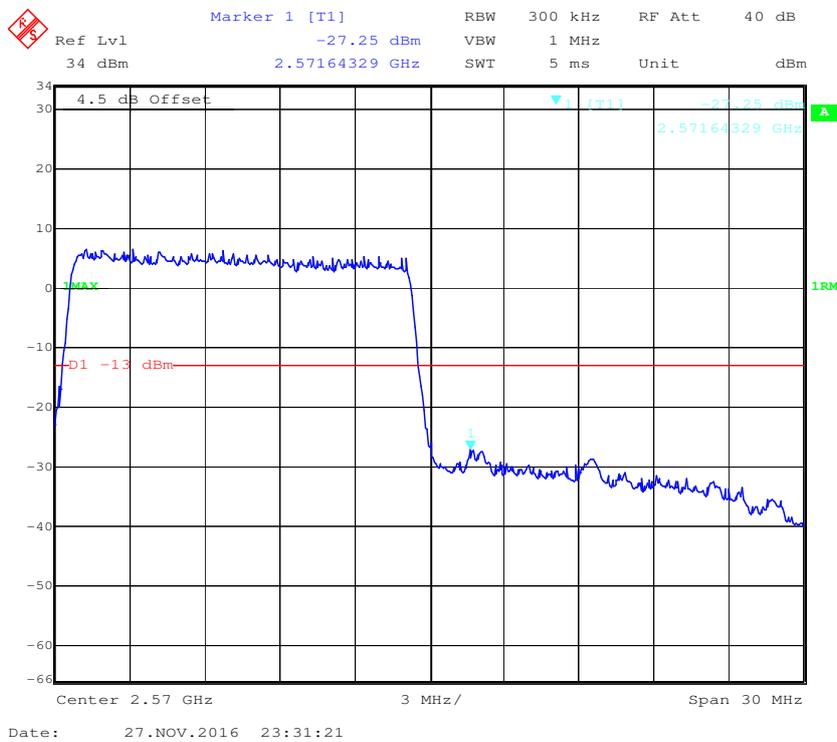


**QPSK (20 MHz, FULL RB) - Left Band Edge**

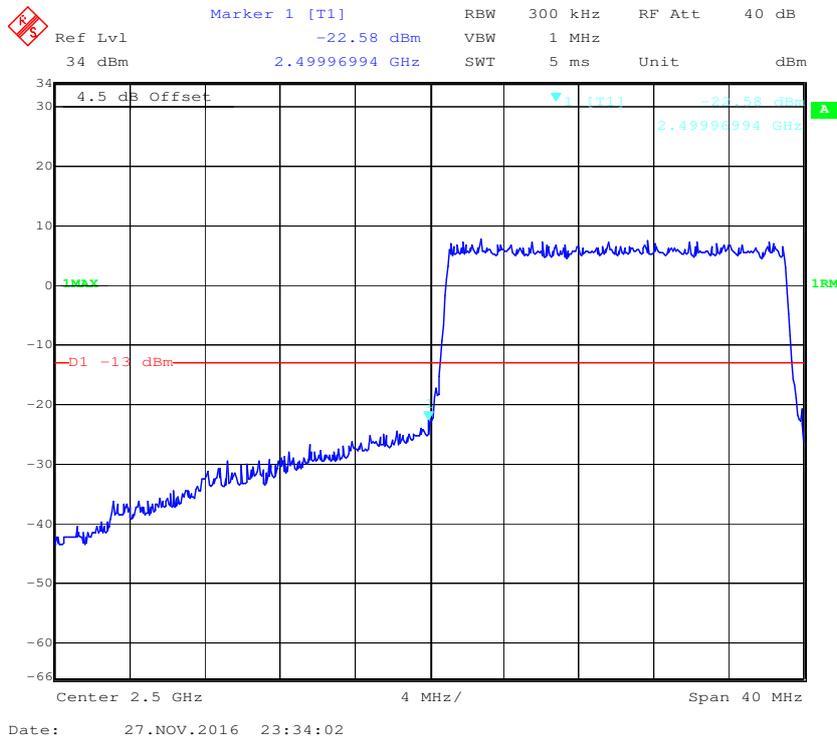


**QPSK (20 MHz, FULL RB) - Right Band Edge**

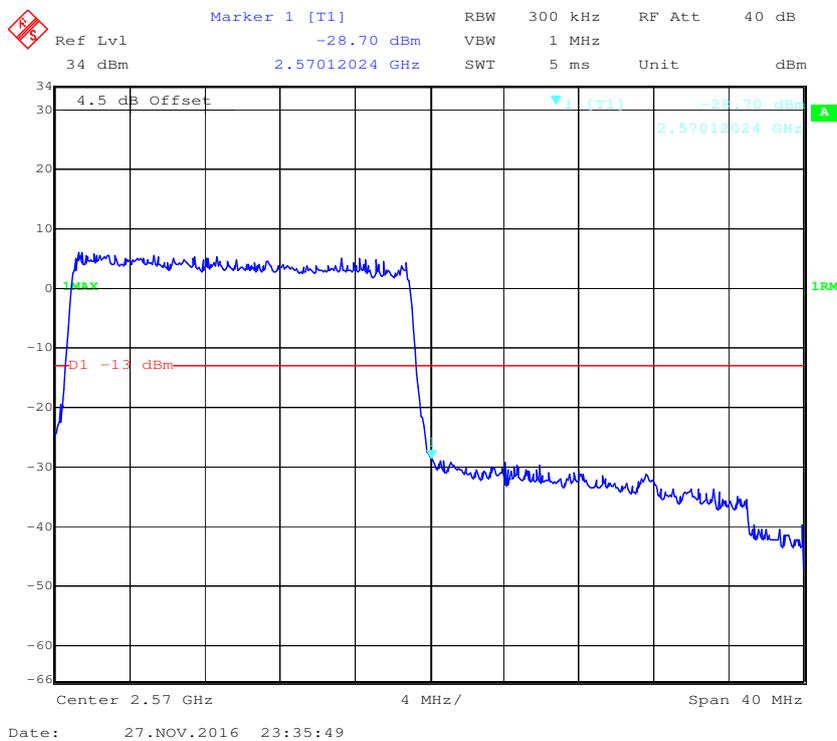

**16-QAM (20 MHz, FULL RB) - Left Band Edge**

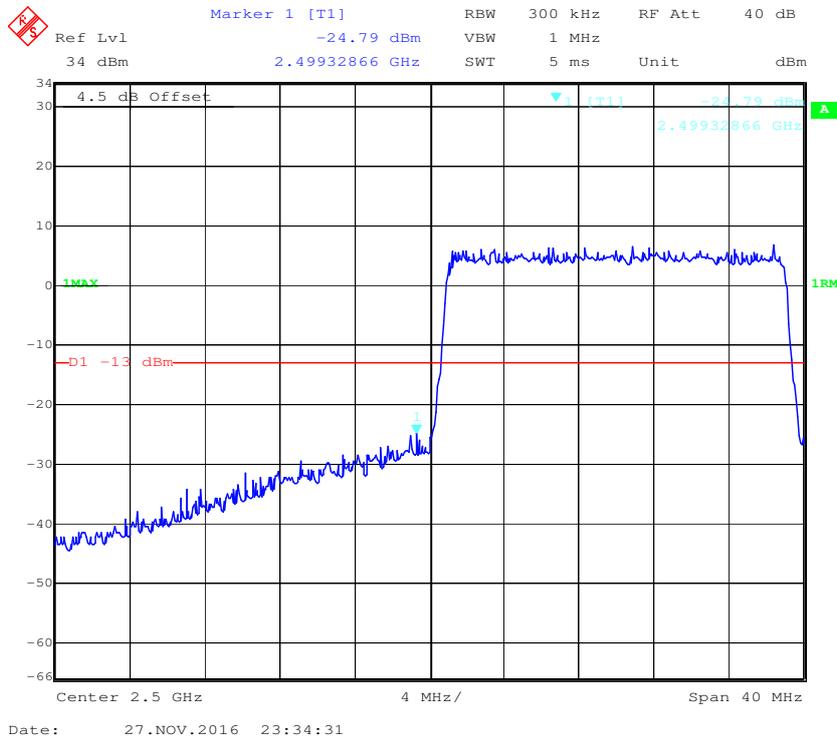


**16-QAM (20 MHz, FULL RB) - Right Band Edge**

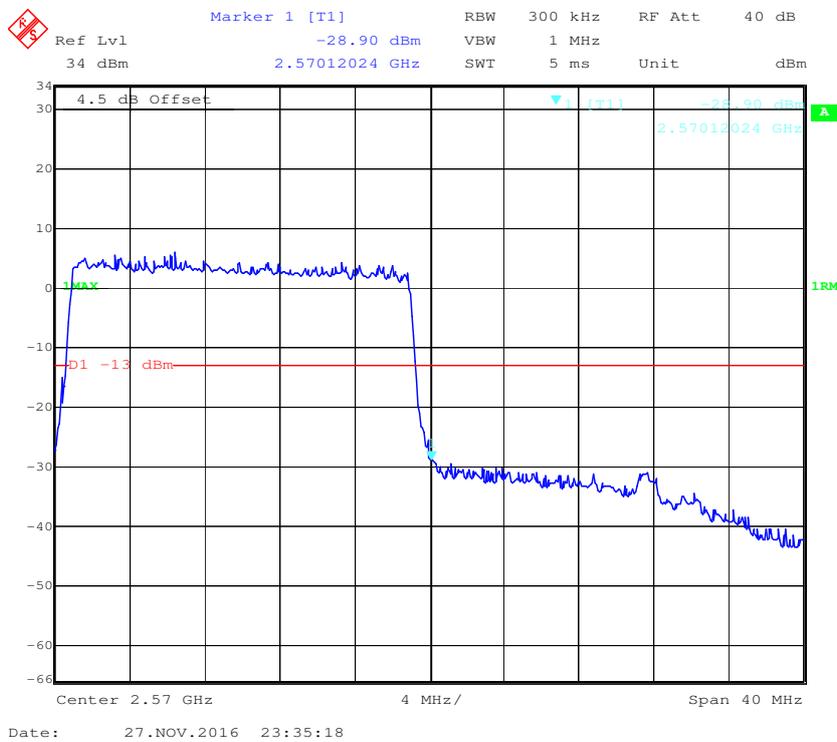


LTE Band 12:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

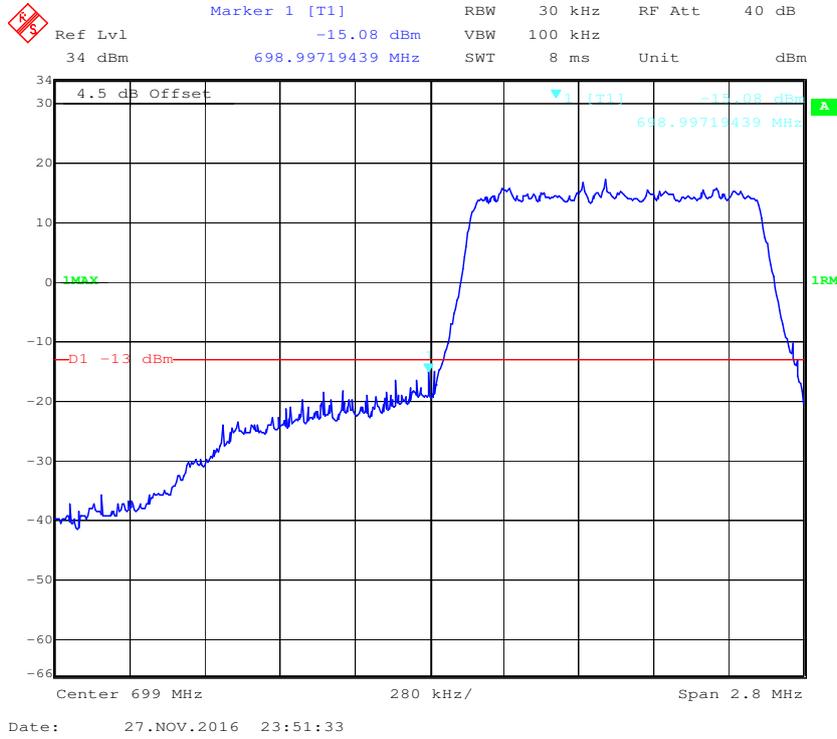


QPSK (1.4 MHz, FULL RB) - Right Band Edge

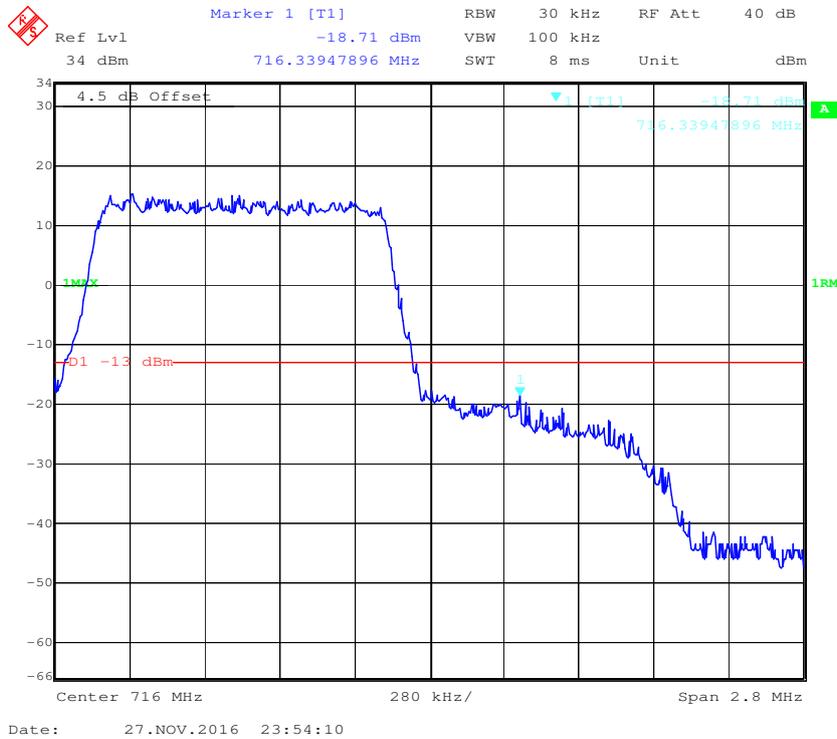


### 16-QAM (1.4 MHz, FULL RB) - Left Band Edge

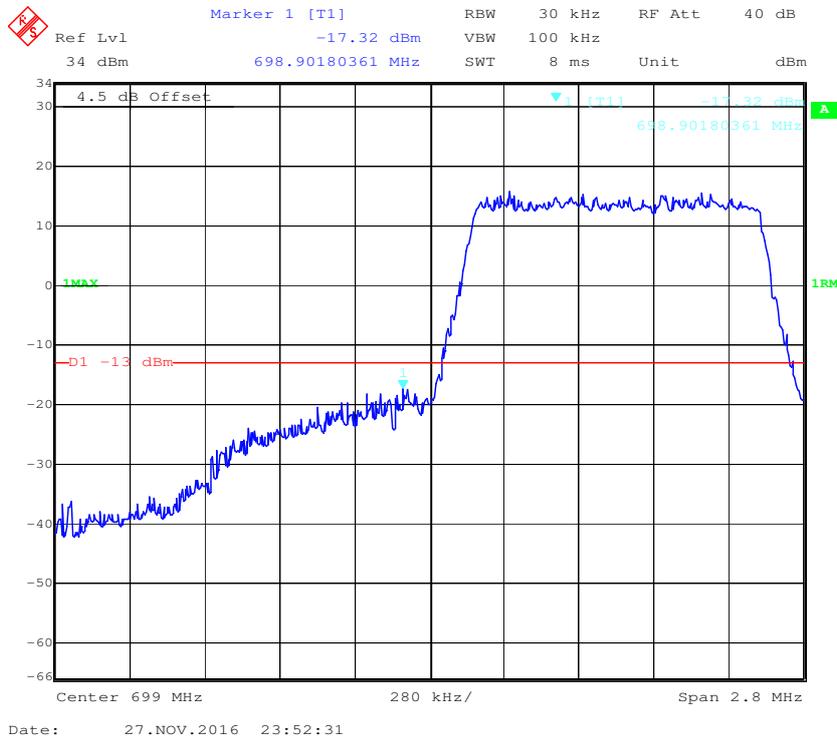


### 16-QAM (1.4 MHz, FULL RB) - Right Band Edge

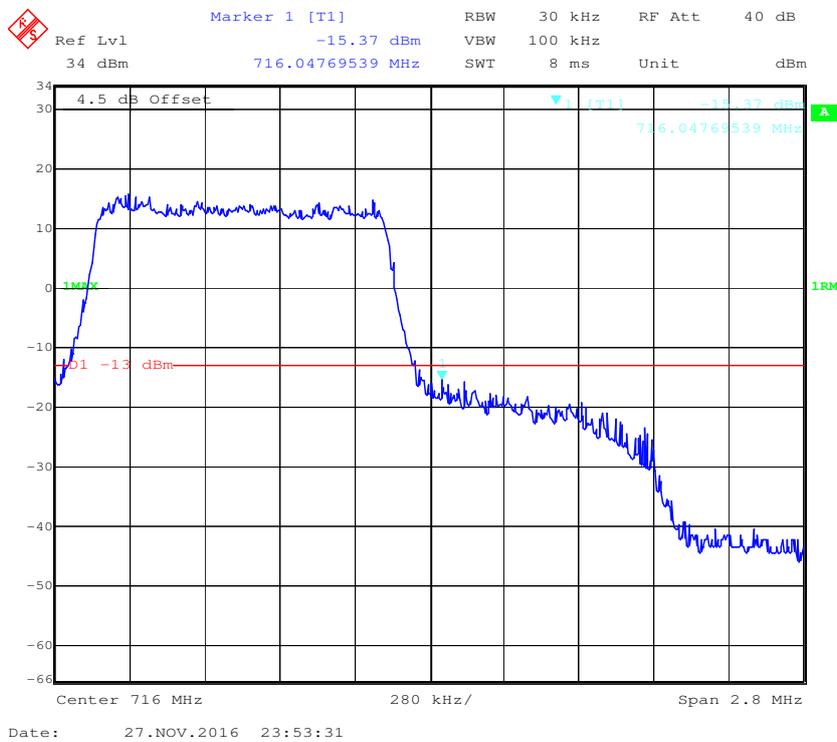


**QPSK (3.0 MHz, FULL RB) - Left Band Edge**

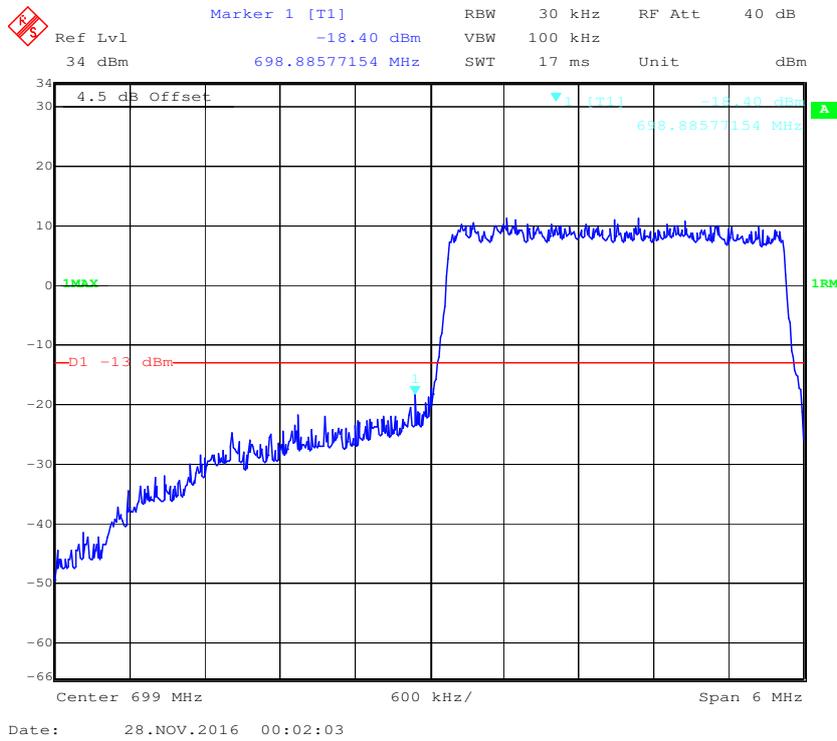


**QPSK (3.0 MHz, FULL RB) - Right Band Edge**

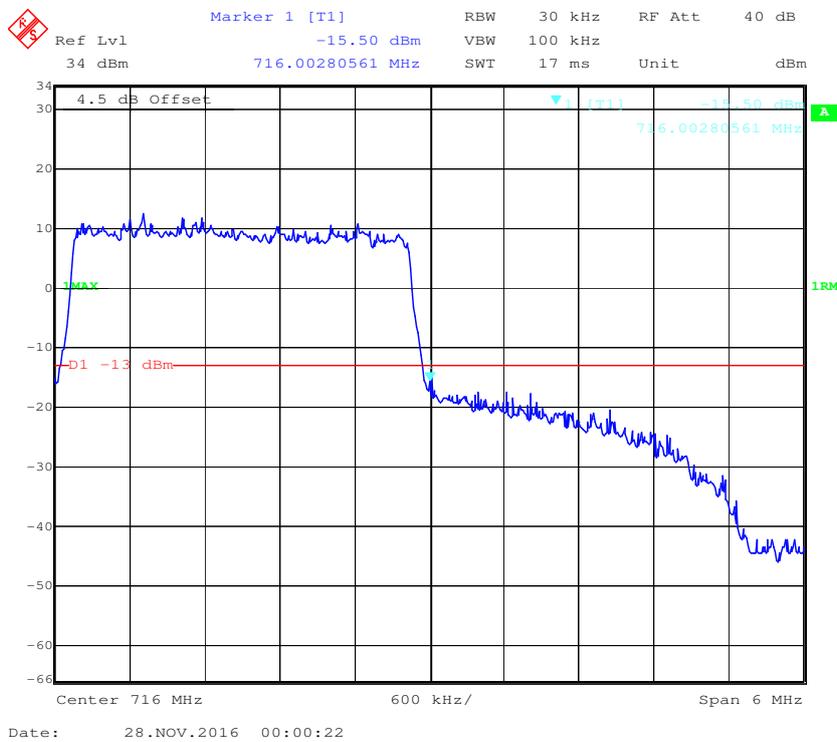


### 16-QAM (3.0 MHz, FULL RB) - Left Band Edge

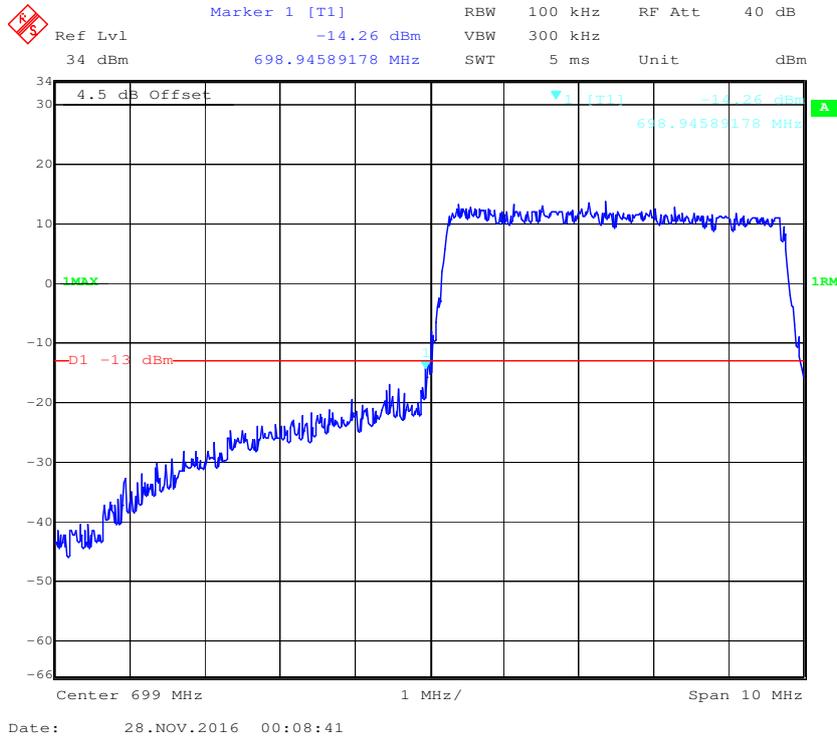


### 16-QAM (3.0 MHz, FULL RB) - Right Band Edge

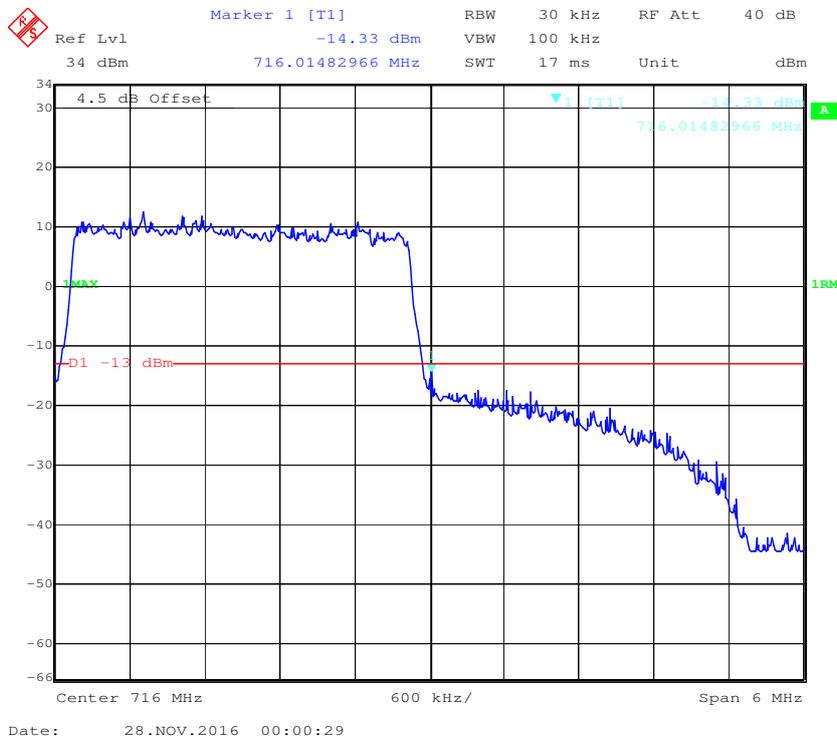


### QPSK (5.0 MHz, FULL RB) - Left Band Edge

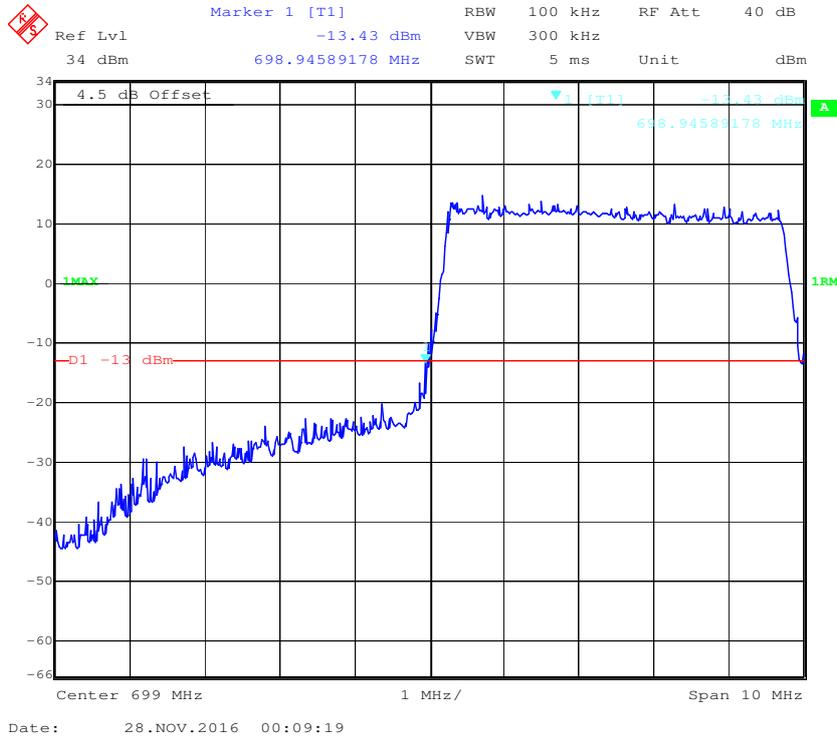


### QPSK (5.0 MHz, FULL RB) - Right Band Edge

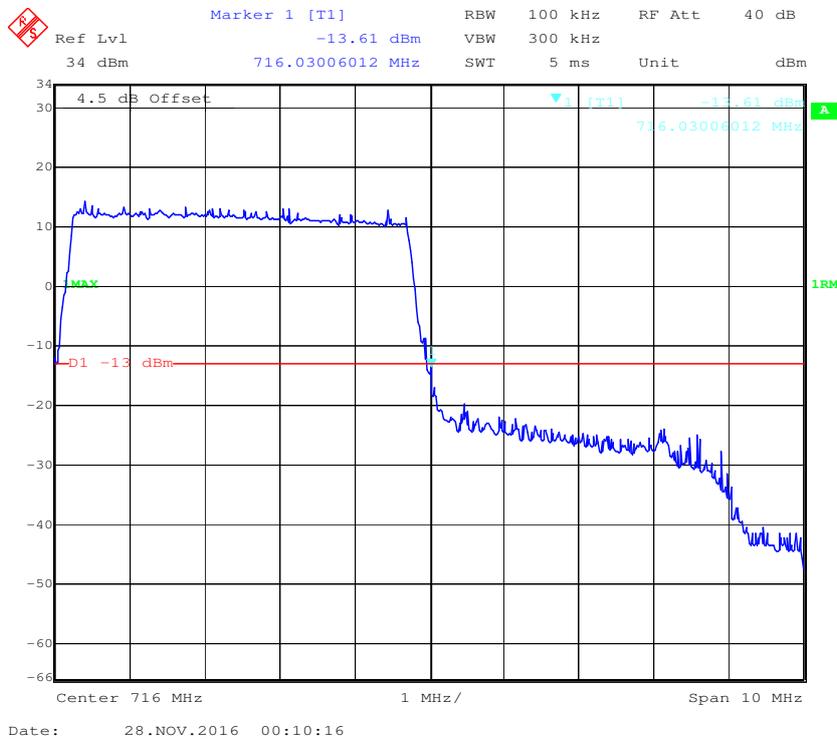


### 16-QAM (5.0 MHz, FULL RB) - Left Band Edge

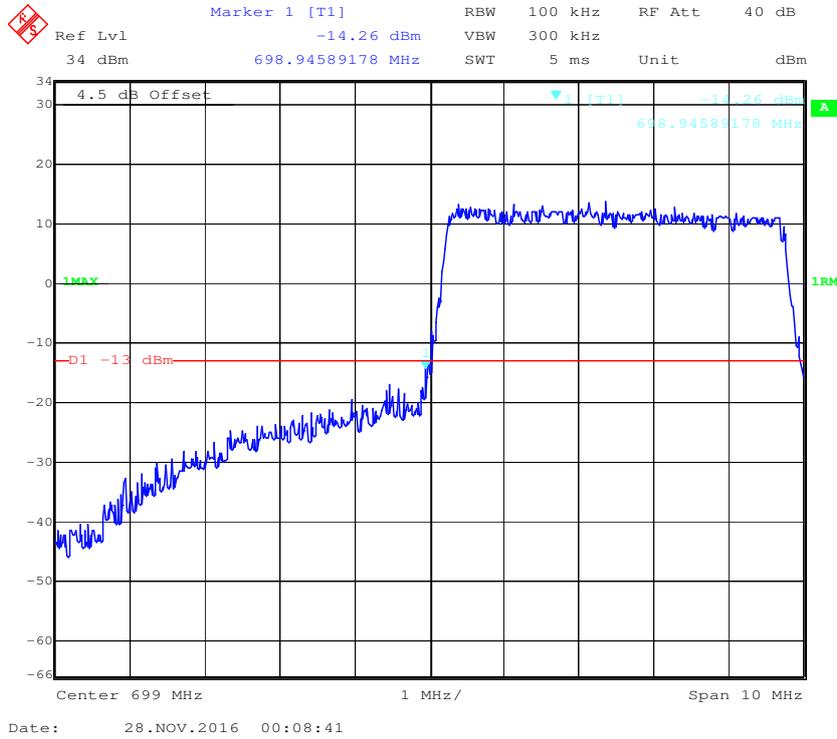


### 16-QAM (5.0 MHz, FULL RB) - Right Band Edge

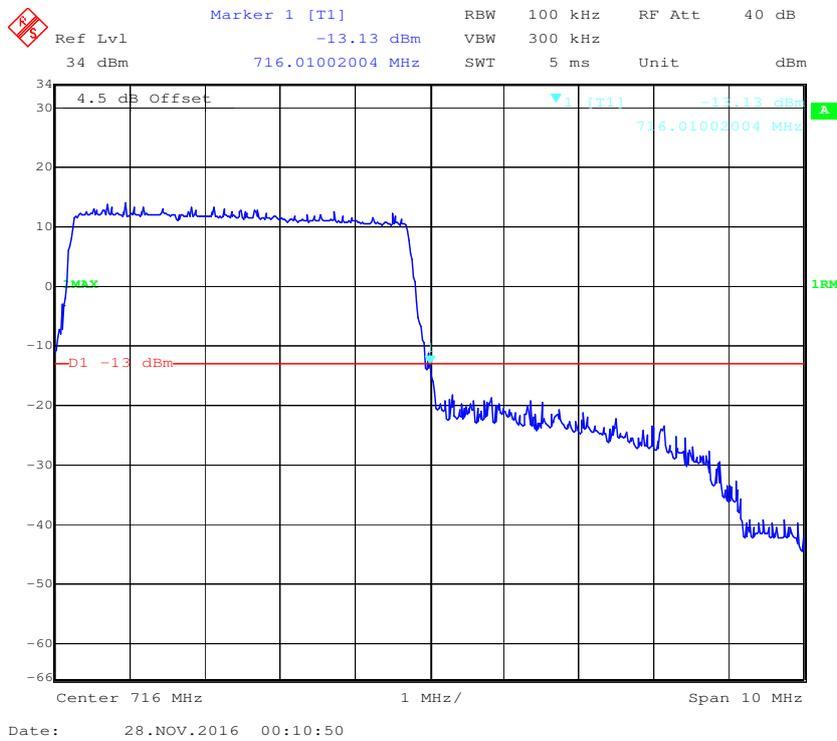


**QPSK (10.0 MHz, FULL RB) - Left Band Edge**

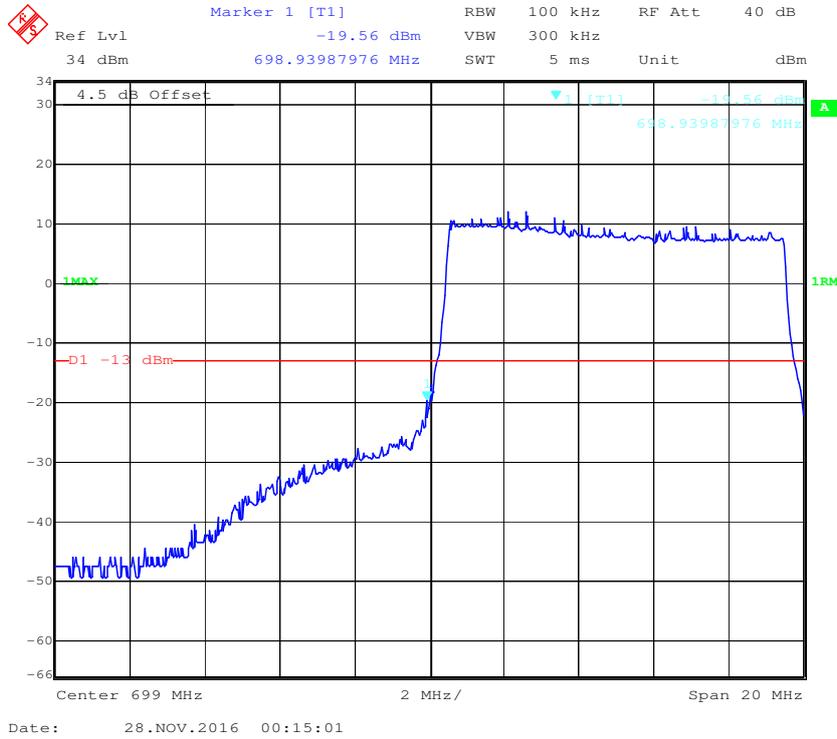


**QPSK (10.0 MHz, FULL RB) - Right Band Edge**

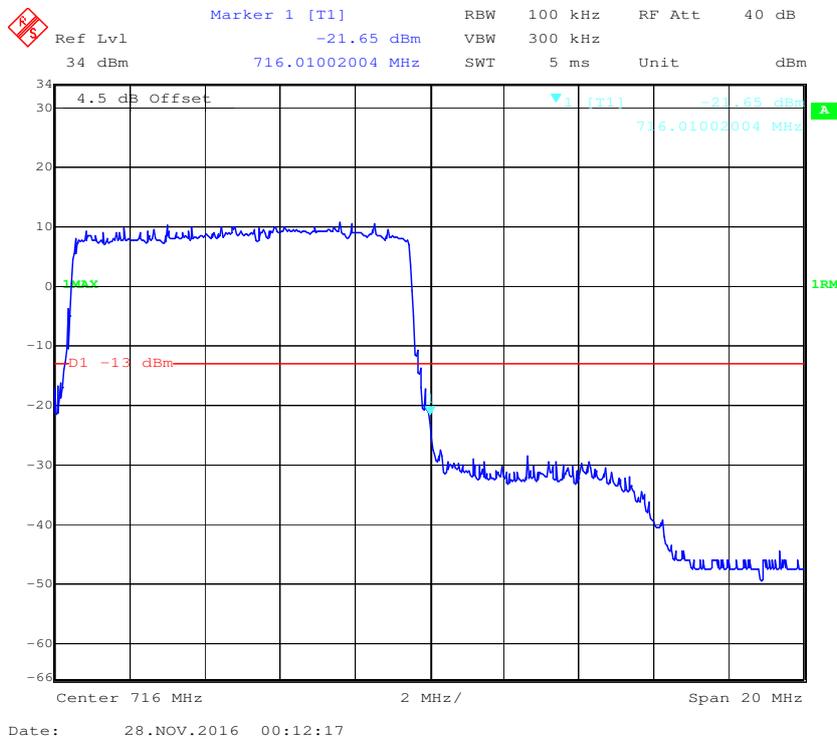

### 16-QAM (10.0 MHz, FULL RB) - Left Band Edge

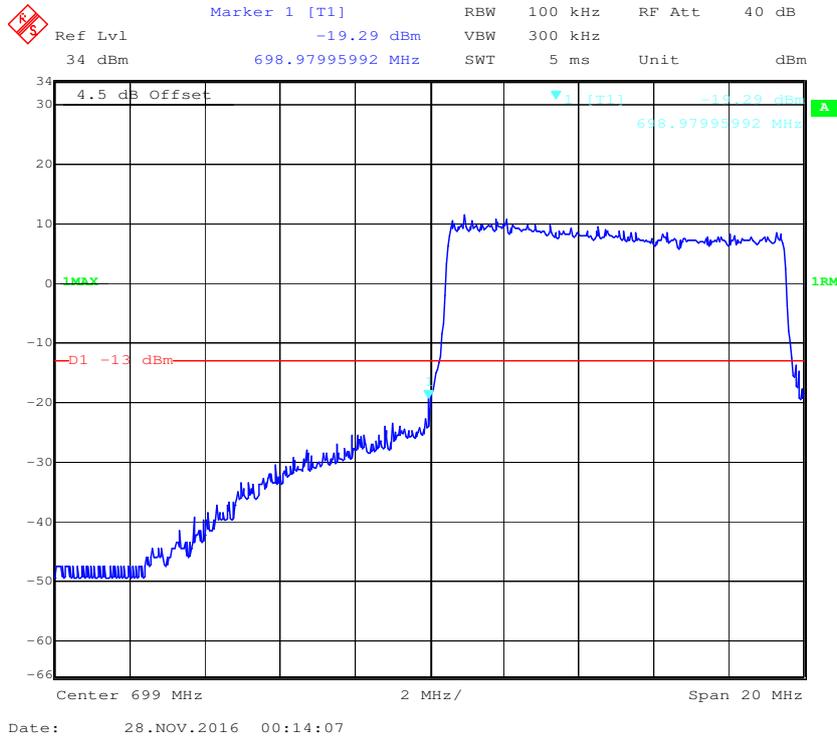


### 16-QAM (10.0 MHz, FULL RB) - Right Band Edge

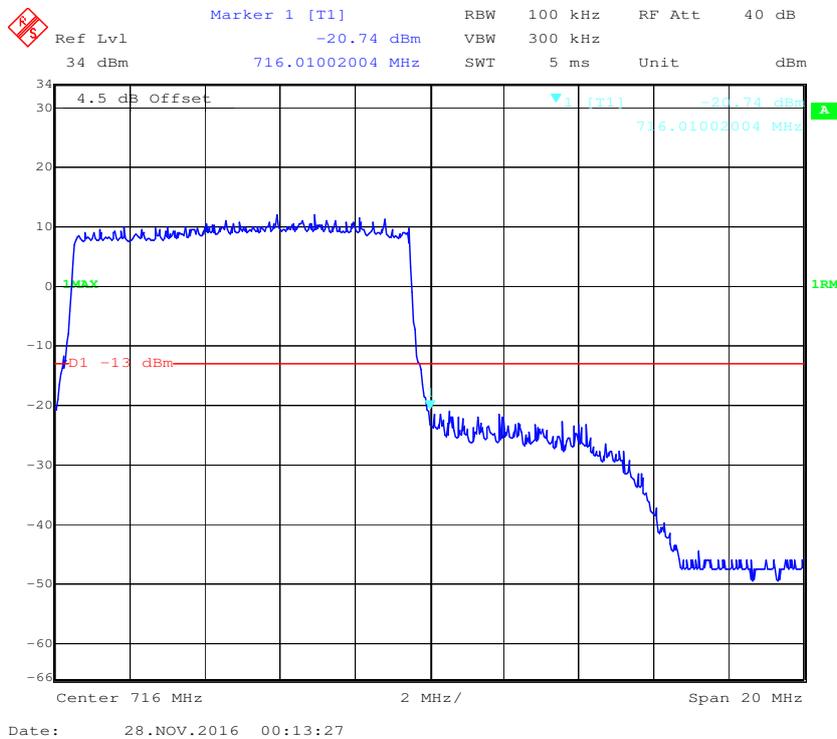


LTE Band 17:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

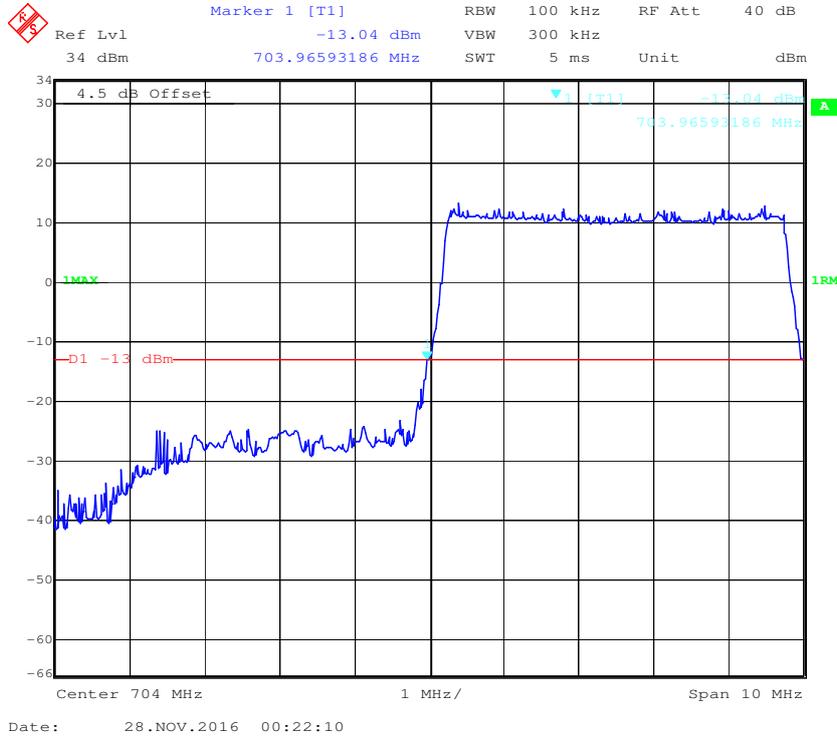


QPSK (5.0 MHz, FULL RB) - Right Band Edge

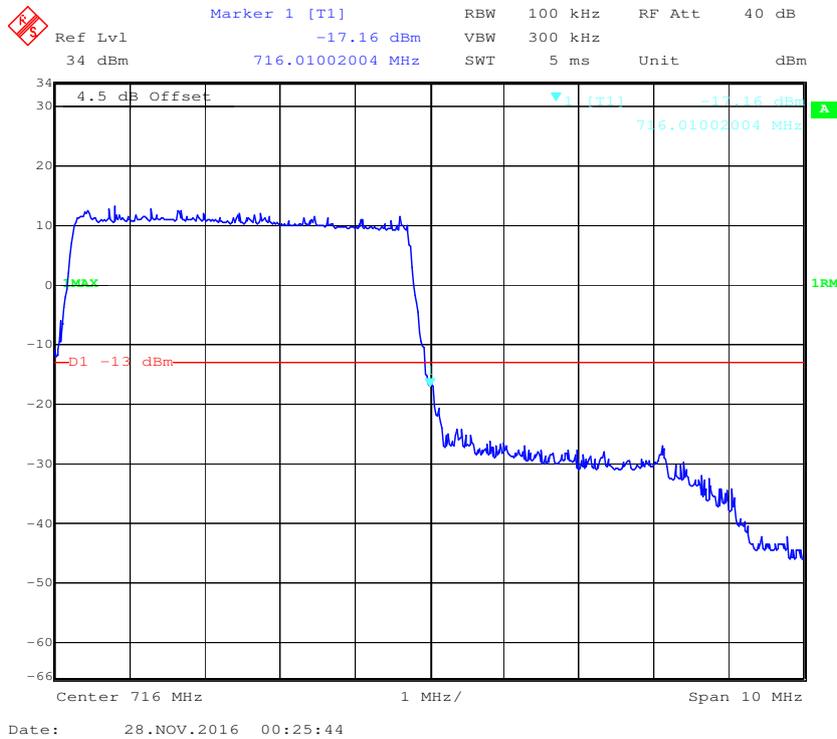


### 16-QAM (5.0 MHz, FULL RB) - Left Band Edge

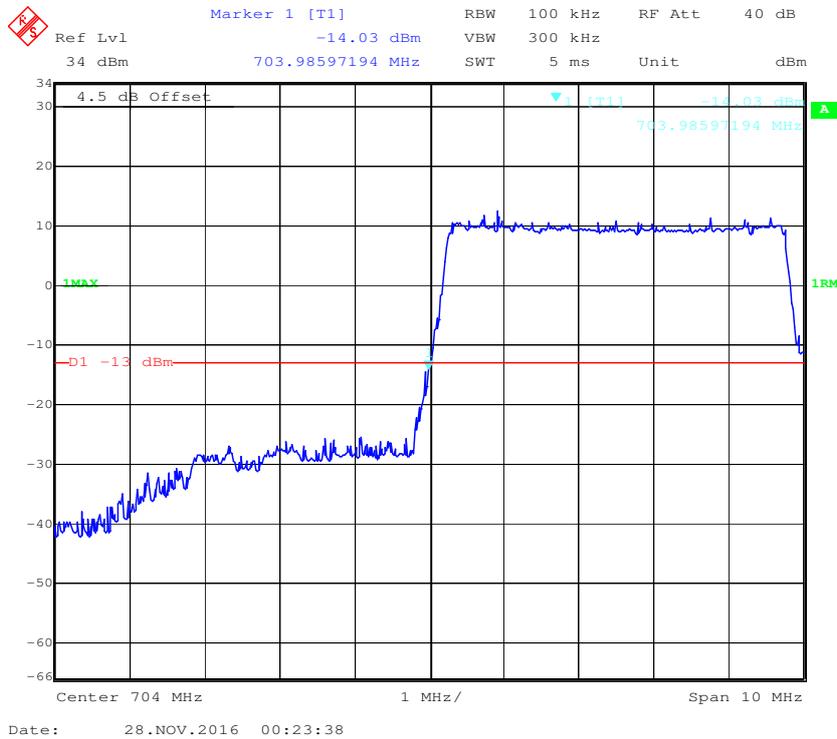


### 16-QAM (5.0 MHz, FULL RB) - Right Band Edge

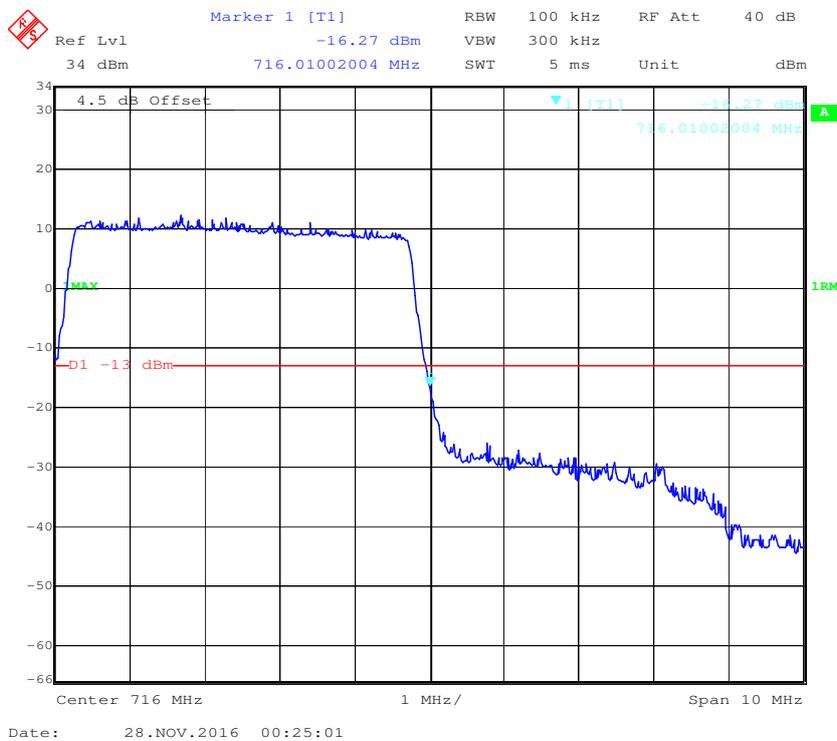


### QPSK (10.0 MHz, FULL RB) - Left Band Edge

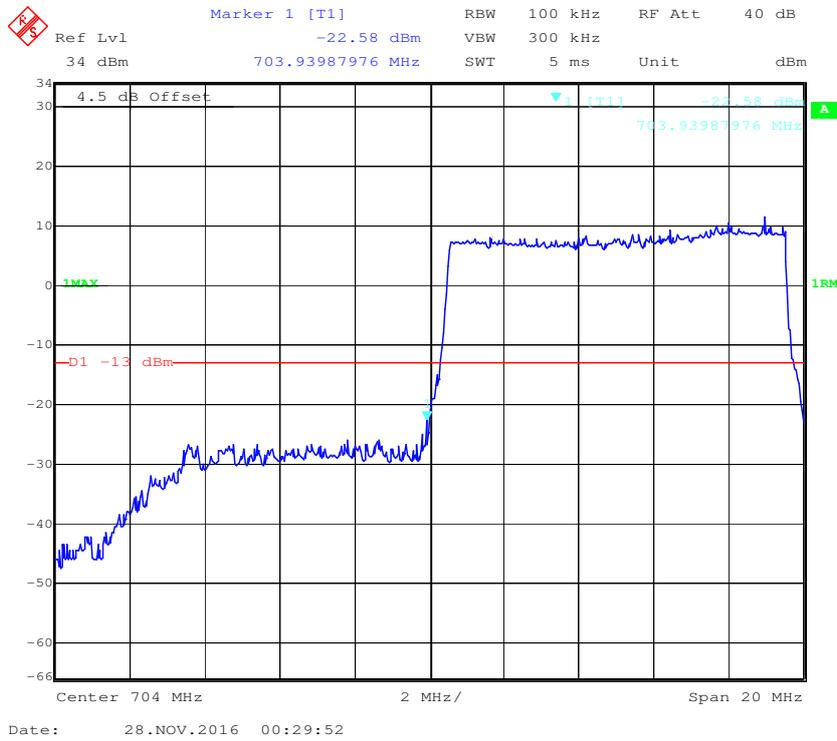


### QPSK (10.0 MHz, FULL RB) - Right Band Edge

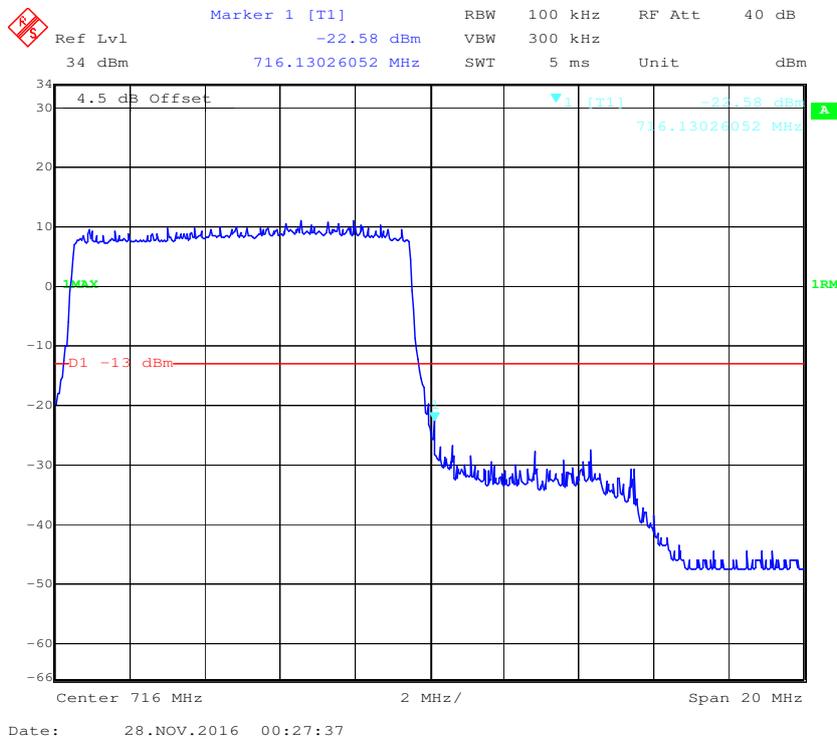

**16-QAM (10.0 MHz, FULL RB) - Left Band Edge**

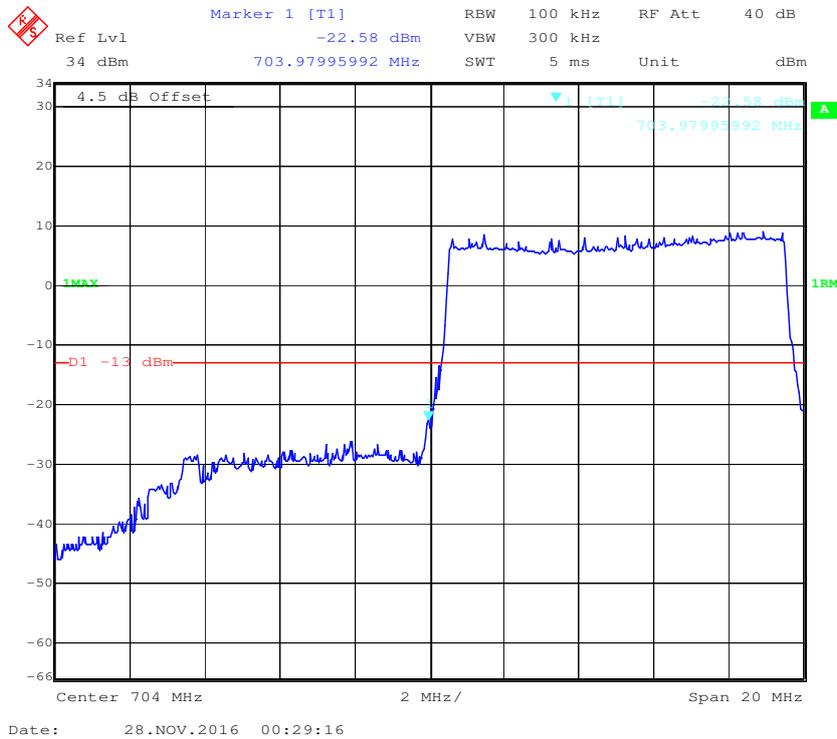

**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

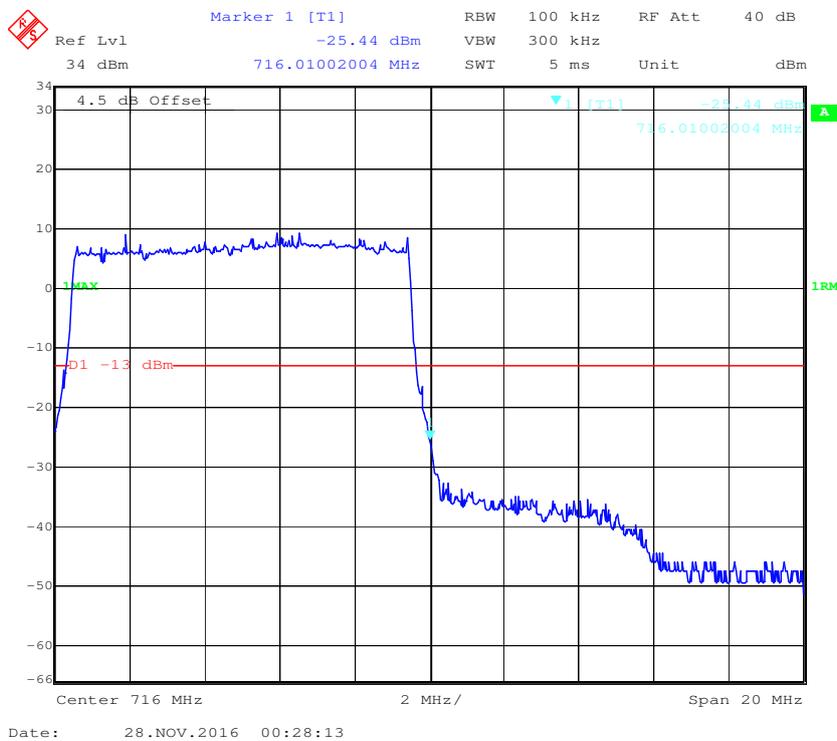

**FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY**

**Applicable Standard**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

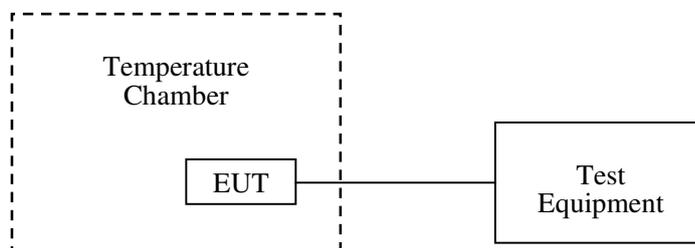

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	101.5 kPa

The testing was performed by Chris Wang on 2016-11-25.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

**Cellular Band (Part 22H)**

**GSM Mode**

Middle Channel, $f_0 = 836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-11	-0.01315	2.5
-20		-12	-0.01434	2.5
-10		-10	-0.01195	2.5
0		2	0.00239	2.5
10		-2	-0.00239	2.5
20		-2	-0.00239	2.5
30		1	0.00120	2.5
40		5	0.00598	2.5
50		10	0.01195	2.5
25		V <sub>min.</sub> = 3.6	12	0.01434
25	V <sub>max.</sub> = 4.2	15	0.01793	2.5

**EDGE Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied ( $V_{DC}$ )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-15	-0.01793	2.5
-20		-8	-0.00956	2.5
-10		-7	-0.00837	2.5
0		2	0.00239	2.5
10		-2	-0.00239	2.5
20		3	0.00359	2.5
30		2	0.00239	2.5
40		5	0.00598	2.5
50		5	0.00598	2.5
25	$V_{min.}= 3.6$	7	0.00837	2.5
25	$V_{max.}= 4.2$	10	0.01195	2.5

**WCDMA Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied ( $V_{DC}$ )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-3	-0.00359	2.5
-20		2	0.00239	2.5
-10		-1	-0.00120	2.5
0		-3	-0.00359	2.5
10		-2	-0.00239	2.5
20		-1	-0.00120	2.5
30		2	0.00239	2.5
40		5	0.00598	2.5
50		5	0.00598	2.5
25	$V_{min.}= 3.6$	7	0.00837	2.5
25	$V_{max.}= 4.2$	9	0.01076	2.5

**PCS Band (Part 24E)**

**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-9	-0.00479	pass
-20		-8	-0.00426	pass
-10		-7	-0.00372	pass
0		-2	-0.00106	pass
10		-2	-0.00106	pass
20		-1	-0.00053	pass
30		0	0.00000	pass
40		1	0.00053	pass
50		2	0.00106	pass
25	V <sub>min.</sub> = 3.6	4	0.00213	pass
25	V <sub>max.</sub> = 4.2	9	0.00479	pass

**EDGE Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-2	-0.00106	pass
-20		2	0.00106	pass
-10		5	0.00266	pass
0		4	0.00213	pass
10		5	0.00266	pass
20		4	0.00213	pass
30		8	0.00426	pass
40		10	0.00532	pass
50		11	0.00585	pass
25	V <sub>min.</sub> = 3.6	14	0.00745	pass
25	V <sub>max.</sub> = 4.2	18	0.00957	pass

**WCDMA Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-10	-0.00532	pass
-20		-5	-0.00266	pass
-10		-7	-0.00372	pass
0		-3	-0.00160	pass
10		-6	-0.00319	pass
20		-4	-0.00213	pass
30		0	0.00000	pass
40		2	0.00106	pass
50		6	0.00319	pass
25		V <sub>min.</sub> = 3.6	6	0.00319
25	V <sub>max.</sub> = 4.2	8	0.00426	pass

**QPSK:**

**LTE Band 4:**

20.0 MHz Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-1	-0.00058	pass
-20		1	0.00058	pass
-10		-1	-0.00058	pass
0		-2	-0.00115	pass
10		2	0.00115	pass
20		1	0.00058	pass
30		-1	-0.00058	pass
40		2	0.00115	pass
50		-2	-0.00115	pass
20		V <sub>min.</sub> = 3.6	2	0.00115
	V <sub>max.</sub> = 4.2	3	0.00173	pass

**LTE Band 7:**

20.0 MHz Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	1	0.00039	pass
-20		3	0.00118	pass
-10		-1	-0.00039	pass
0		2	0.00079	pass
10		1	0.00039	pass
20		1	0.00039	pass
30		-1	-0.00039	pass
40		2	0.00079	pass
50		-1	-0.00039	pass
20	V <sub>min</sub> = 3.6	2	0.00079	pass
	V <sub>max</sub> = 4.2	2	0.00079	pass

**LTE Band 12:**

10.0 MHz Middle Channel, $f_0 = 707$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-1	-0.00141	pass
-20		-1	-0.00141	pass
-10		-2	-0.00283	pass
0		-1	-0.00141	pass
10		-2	-0.00283	pass
20		-1	-0.00141	pass
30		-1	-0.00141	pass
40		2	0.00283	pass
50		-2	-0.00283	pass
20	V <sub>min</sub> = 3.6	-2	-0.00283	pass
	V <sub>max</sub> = 4.2	1	0.00141	pass

**LTE Band 17:**

10.0 MHz Middle Channel, $f_0 = 710$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-1	-0.00141	pass
-20		-1	-0.00141	pass
-10		1	0.00141	pass
0		1	0.00141	pass
10		-1	-0.00141	pass
20		2	0.00282	pass
30		-1	-0.00141	pass
40		1	0.00141	pass
50		2	0.00282	pass
25	V <sub>min</sub> = 3.6	2	0.00282	pass
25	V <sub>max</sub> = 4.2	3	0.00423	pass

**\*\*\*\*\* END OF REPORT \*\*\*\*\***