



Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 26-8 High Channel 5700MHz Band 3 Chain 0

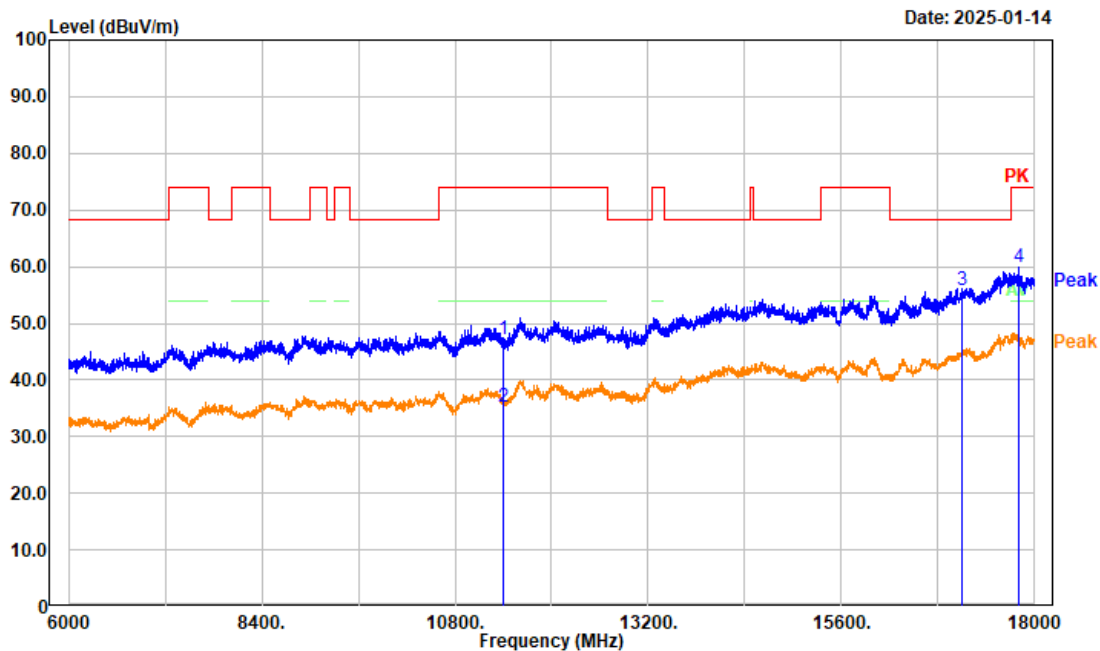


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11400.000	33.58	13.60	47.18	74.00	26.82	Peak
2	11400.000	21.56	13.60	35.16	54.00	18.84	Average
3	17100.000	34.11	21.60	55.71	68.20	12.49	Peak
4	17810.400	34.01	25.76	59.77	74.00	14.23	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 26-17 High Channel 5670MHz Band 3 Chain 0

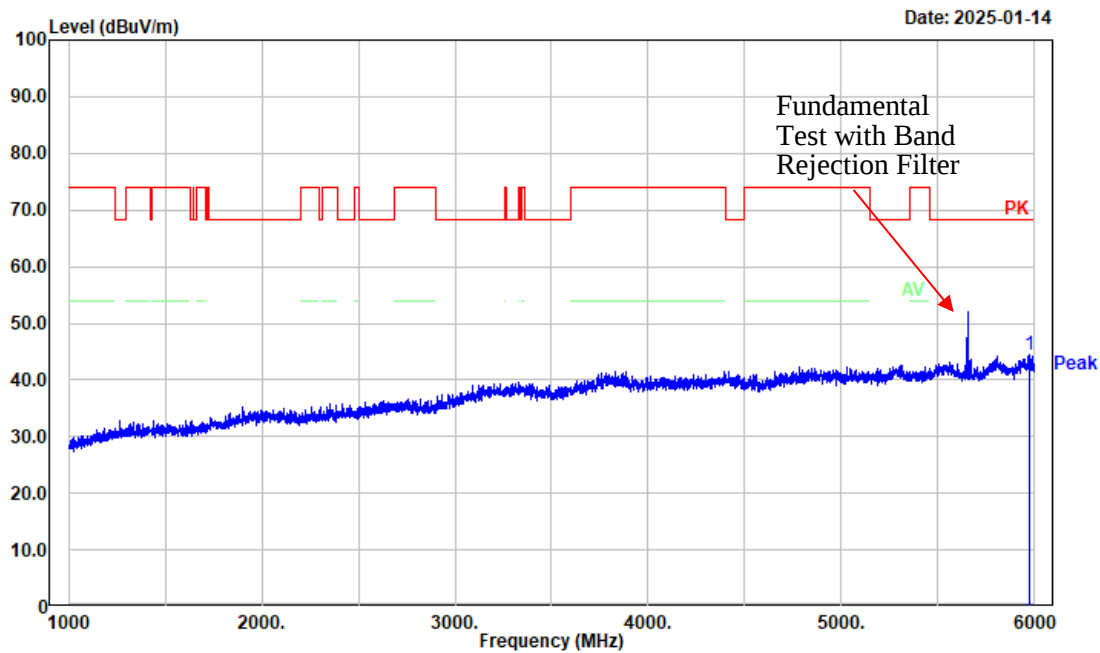


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5973.000	34.38	10.16	44.54	68.20	23.66	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 26-17 High Channel 5670MHz Band 3 Chain 0

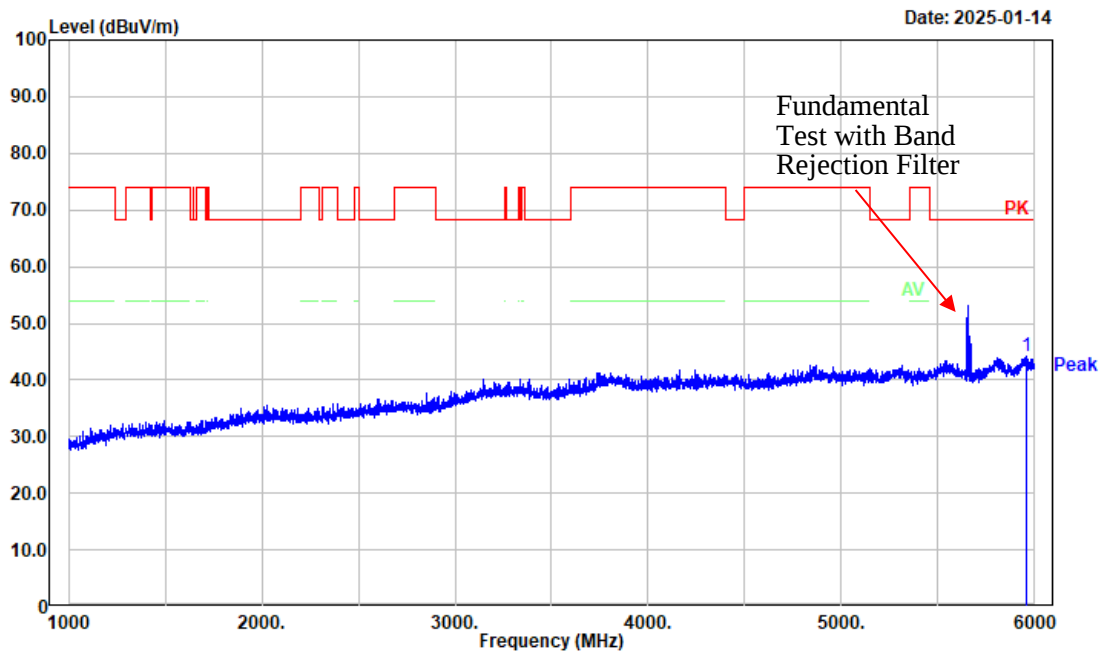


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5956.000	33.97	10.09	44.06	68.20	24.14	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 26-17 High Channel 5670MHz Band 3 Chain 0

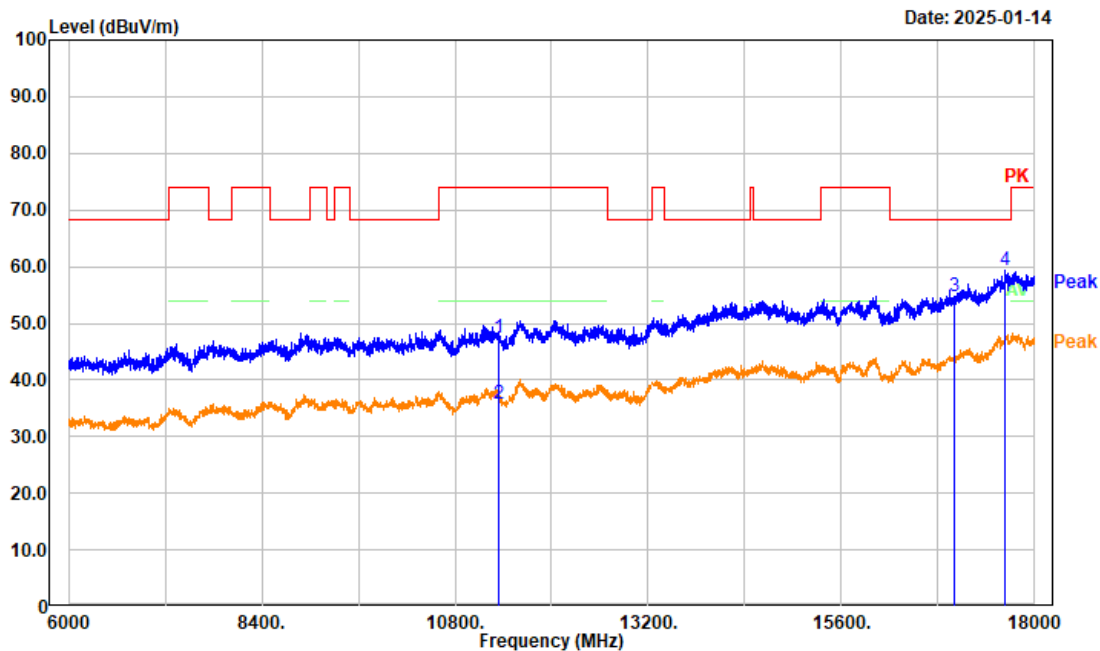


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11340.000	33.15	14.40	47.55	74.00	26.45	Peak
2	11340.000	21.49	14.40	35.89	54.00	18.11	Average
3	17010.000	34.69	20.11	54.80	68.20	13.40	Peak
4	17625.600	34.44	24.82	59.26	68.20	8.94	Peak

Project No.: 2403A43118E-RF
 Tester: Tao Zhu
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax40 26-17 High Channel 5670MHz Band 3 Chain 0

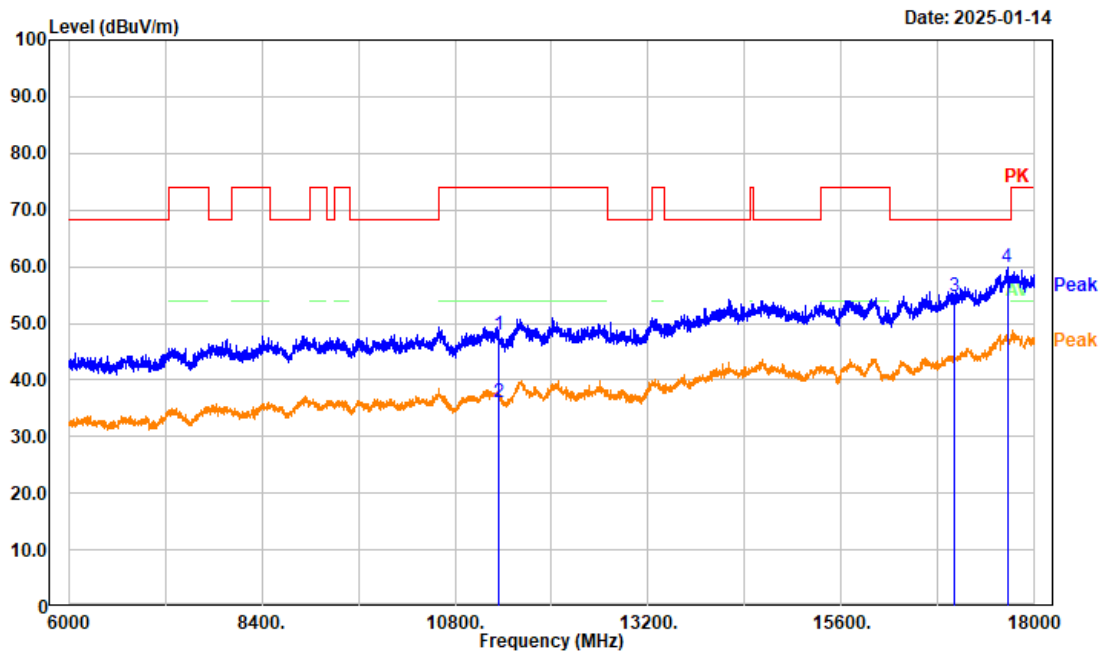


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11340.000	33.52	14.40	47.92	74.00	26.08	Peak
2	11340.000	21.54	14.40	35.94	54.00	18.06	Average
3	17010.000	34.54	20.11	54.65	68.20	13.55	Peak
4	17659.200	34.69	25.31	60.00	68.20	8.20	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 26-0 Low Channel 5530MHz Band 3 Chain 0

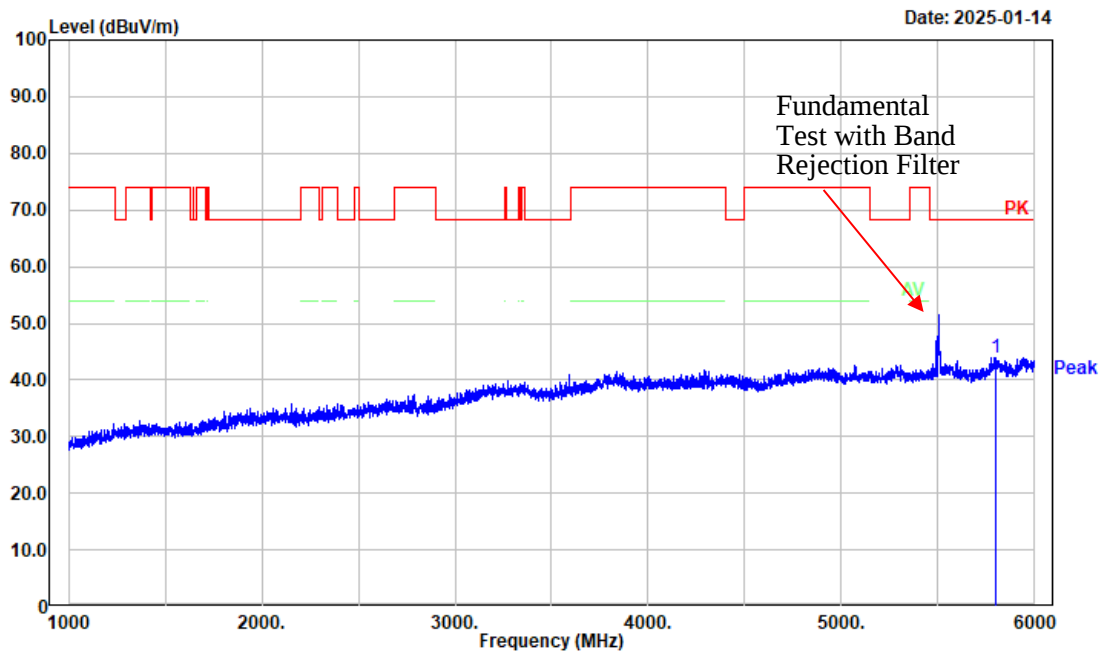


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5798.000	34.48	9.54	44.02	68.20	24.18	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 26-0 Low Channel 5530MHz Band 3 Chain 0

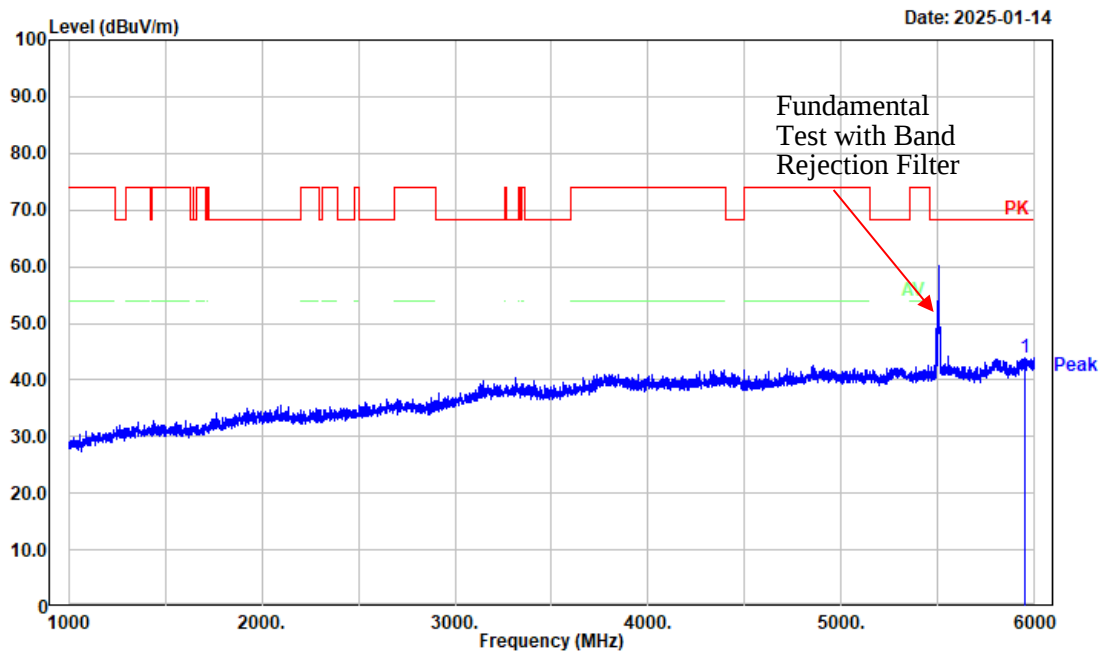


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5947.000	33.88	10.04	43.92	68.20	24.28	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 26-0 Low Channel 5530MHz Band 3 Chain 0

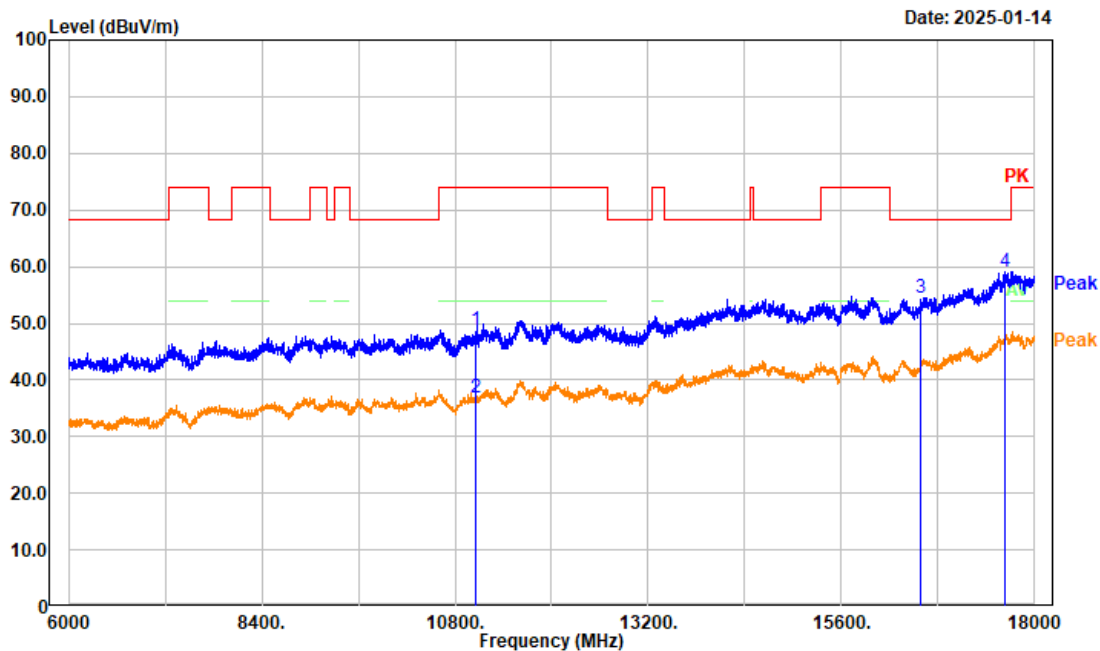


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11060.000	34.50	14.36	48.86	74.00	25.14	Peak
2	11060.000	22.41	14.36	36.77	54.00	17.23	Average
3	16590.000	35.16	19.18	54.34	68.20	13.86	Peak
4	17630.400	34.19	24.89	59.08	68.20	9.12	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax80 26-0 Low Channel 5530MHz Band 3 Chain 0

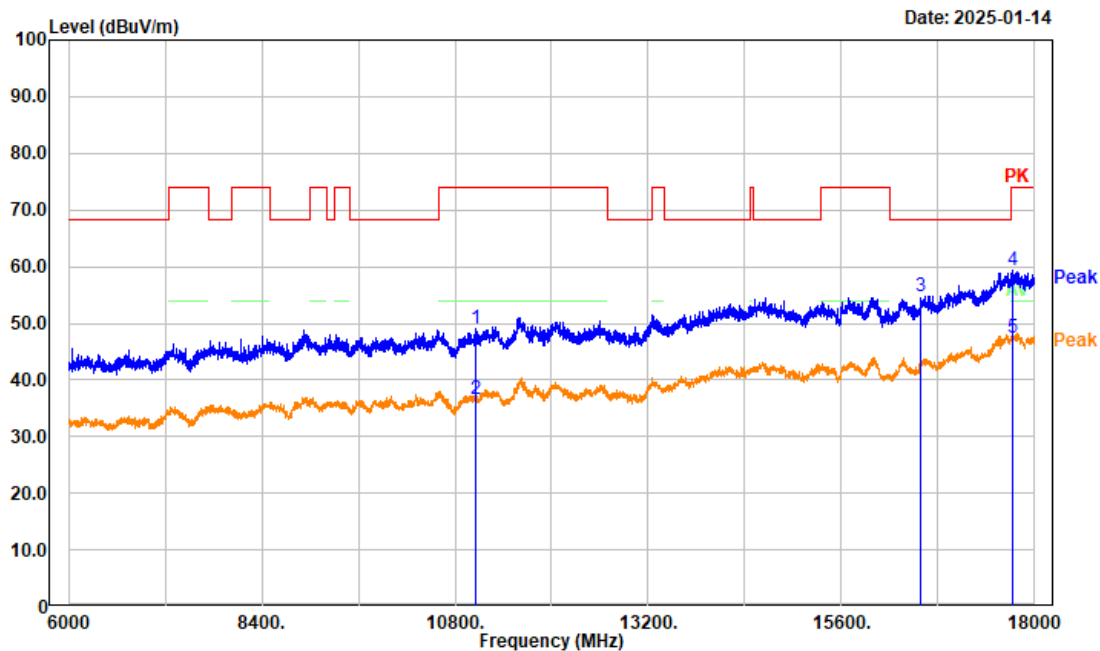


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11060.000	34.56	14.36	48.92	74.00	25.08	Peak
2	11060.000	22.36	14.36	36.72	54.00	17.28	Average
3	16590.000	35.47	19.18	54.65	68.20	13.55	Peak
4	17721.600	33.60	25.87	59.47	74.00	14.53	Peak
5	17721.600	21.60	25.87	47.47	54.00	6.53	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a Low Channel 5745MHz Band 4 Chain 0

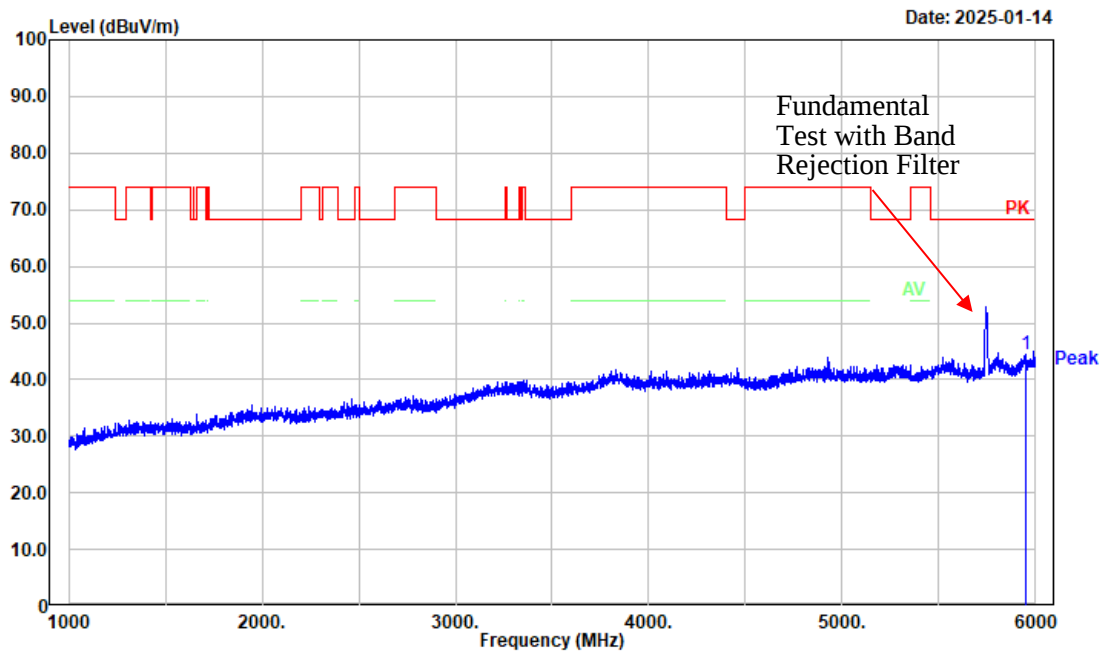


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5946.000	34.51	10.02	44.53	68.20	23.67	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a Low Channel 5745MHz Band 4 Chain 0

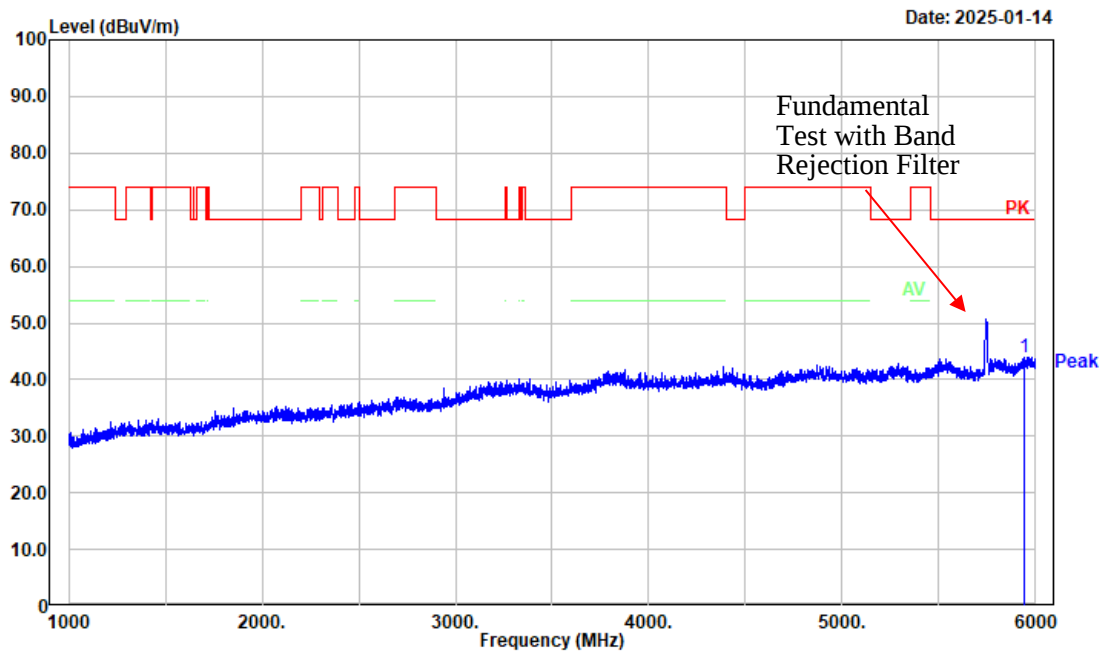


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5940.000	34.01	9.97	43.98	68.20	24.22	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: a Low Channel 5745MHz Band 4 Chain 0

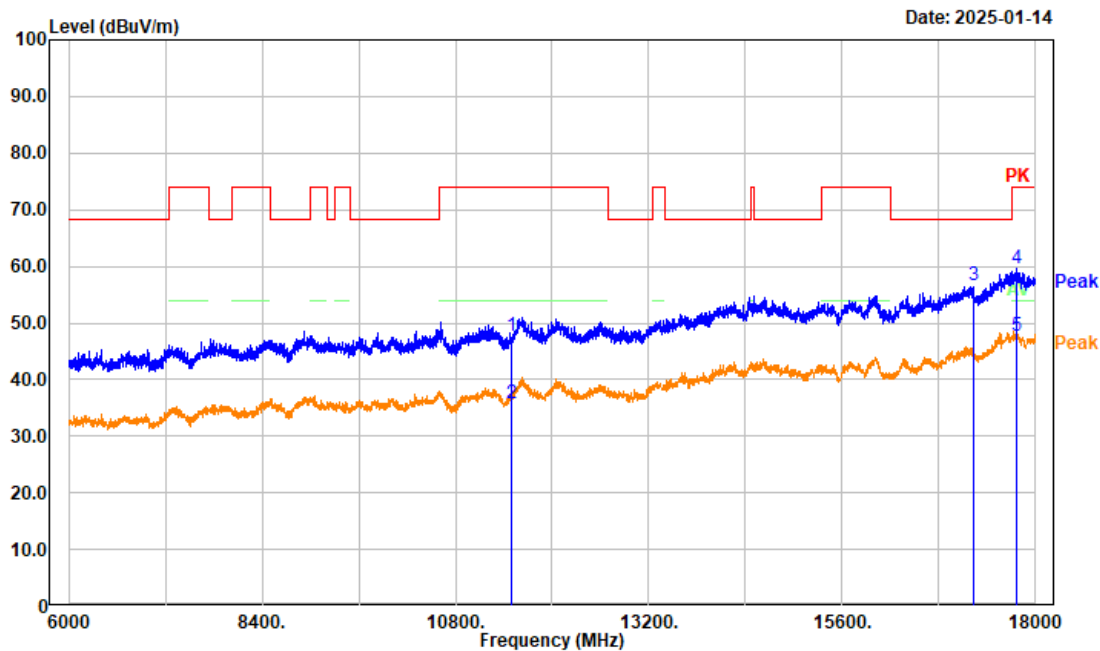


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	33.60	14.06	47.66	74.00	26.34	Peak
2	11490.000	21.58	14.06	35.64	54.00	18.36	Average
3	17235.000	35.22	21.38	56.60	68.20	11.60	Peak
4	17760.000	33.78	25.83	59.61	74.00	14.39	Peak
5	17760.000	21.76	25.83	47.59	54.00	6.41	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a Low Channel 5745MHz Band 4 Chain 0

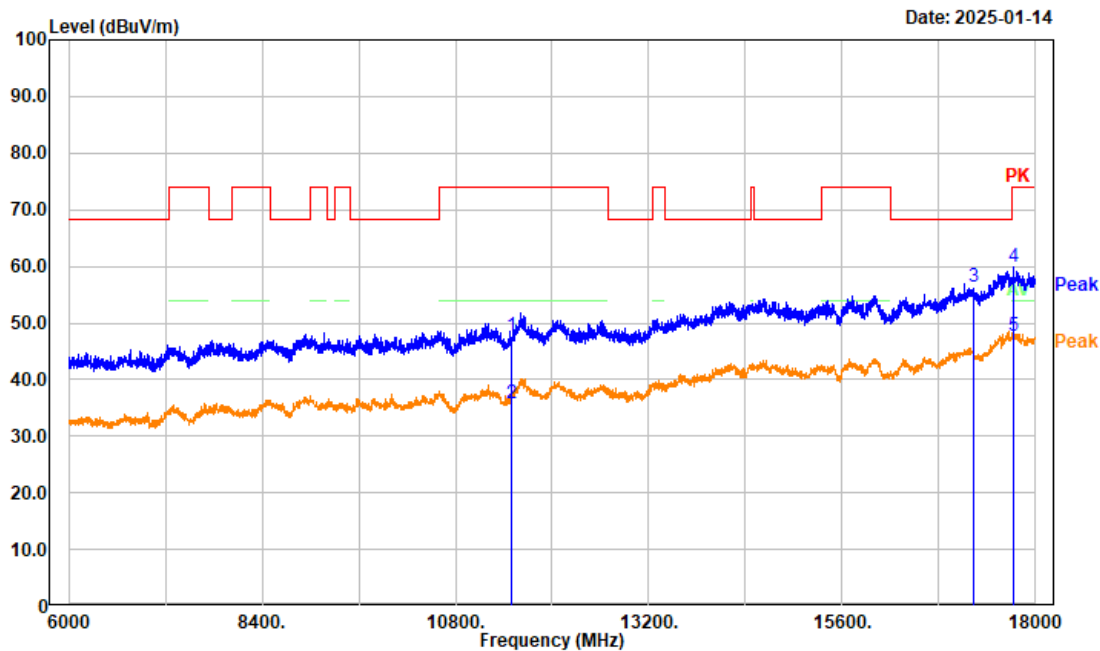


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	33.69	14.06	47.75	74.00	26.25	Peak
2	11490.000	21.68	14.06	35.74	54.00	18.26	Average
3	17235.000	35.11	21.38	56.49	68.20	11.71	Peak
4	17731.200	34.06	25.87	59.93	74.00	14.07	Peak
5	17731.200	21.77	25.87	47.64	54.00	6.36	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n20 Low Channel 5745MHz Band 4 Chain 0

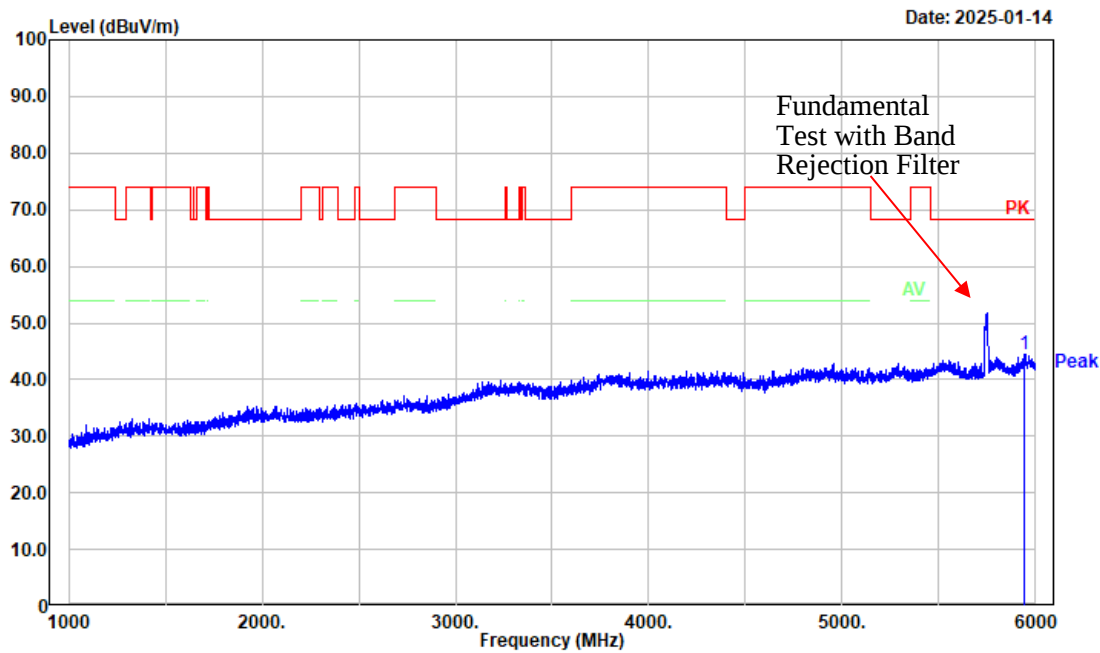


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5939.000	34.56	9.97	44.53	68.20	23.67	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n20 Low Channel 5745MHz Band 4 Chain 0

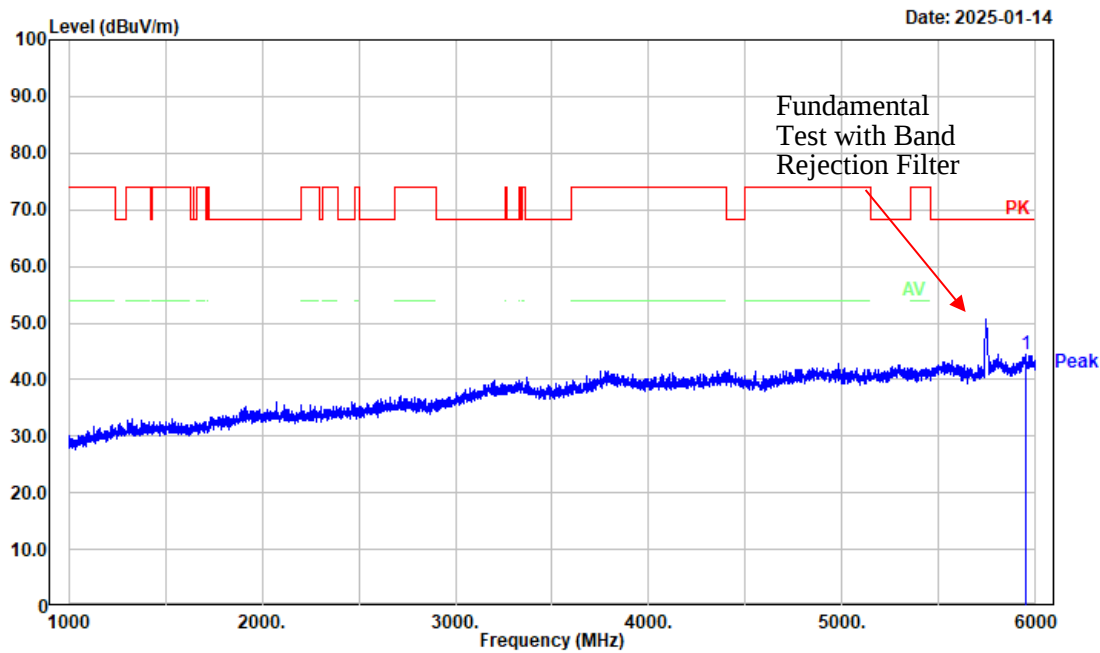


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5946.000	34.39	10.02	44.41	68.20	23.79	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n20 Low Channel 5745MHz Band 4 Chain 0

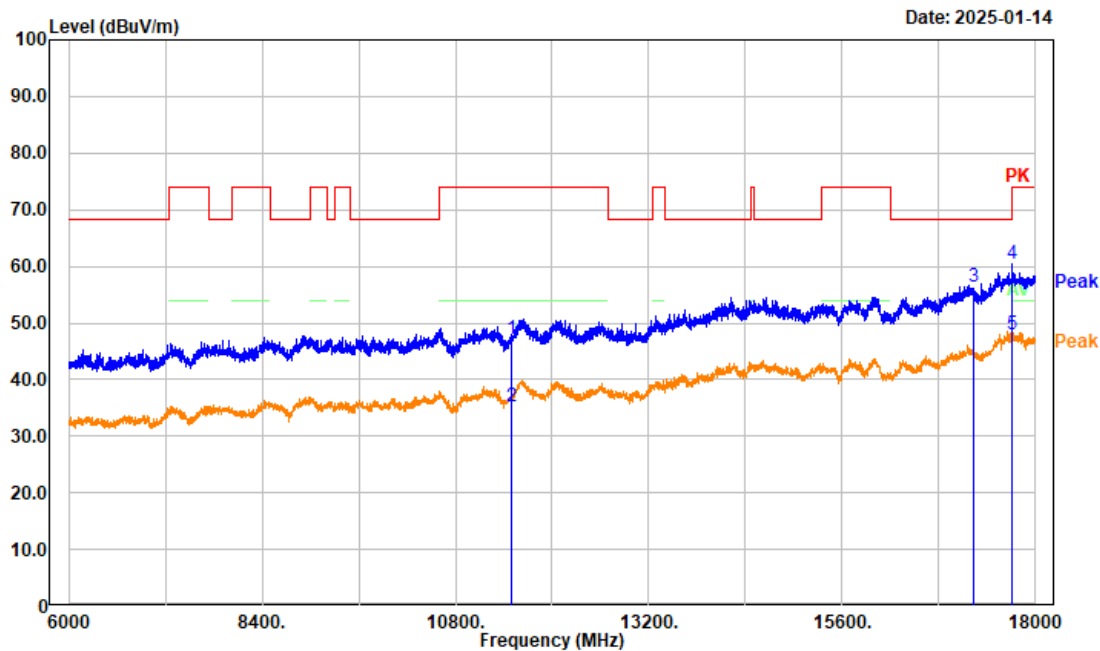


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	33.04	14.06	47.10	74.00	26.90	Peak
2	11490.000	21.28	14.06	35.34	54.00	18.66	Average
3	17235.000	35.01	21.38	56.39	68.20	11.81	Peak
4	17709.600	34.48	25.89	60.37	74.00	13.63	Peak
5	17709.600	21.99	25.89	47.88	54.00	6.12	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n20 Low Channel 5745MHz Band 4 Chain 0

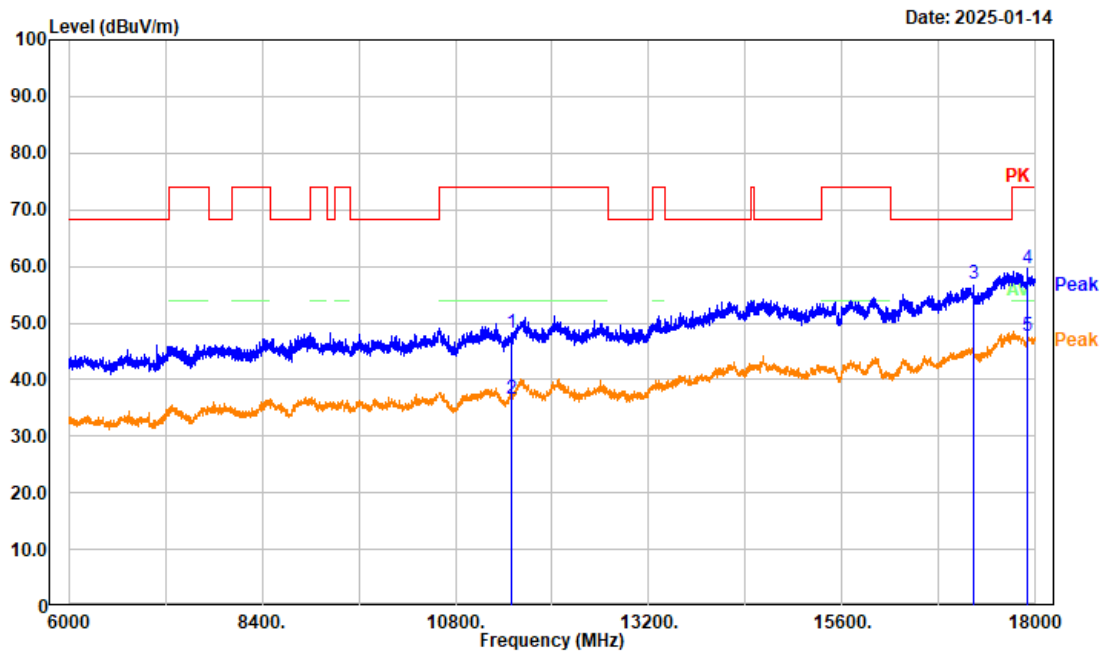


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	34.12	14.06	48.18	74.00	25.82	Peak
2	11490.000	22.41	14.06	36.47	54.00	17.53	Average
3	17235.000	35.66	21.38	57.04	68.20	11.16	Peak
4	17906.400	34.01	25.61	59.62	74.00	14.38	Peak
5	17906.400	22.03	25.61	47.64	54.00	6.36	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n40 Low Channel 5755MHz Band 4 Chain 0

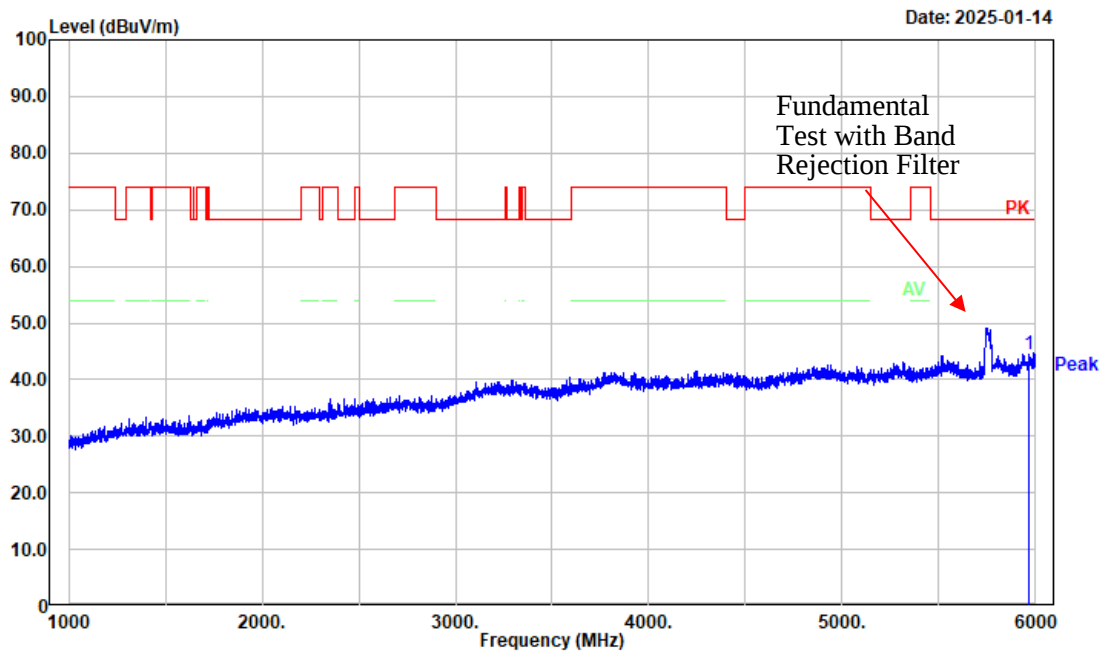


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5968.000	34.21	10.14	44.35	68.20	23.85	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n40 Low Channel 5755MHz Band 4 Chain 0

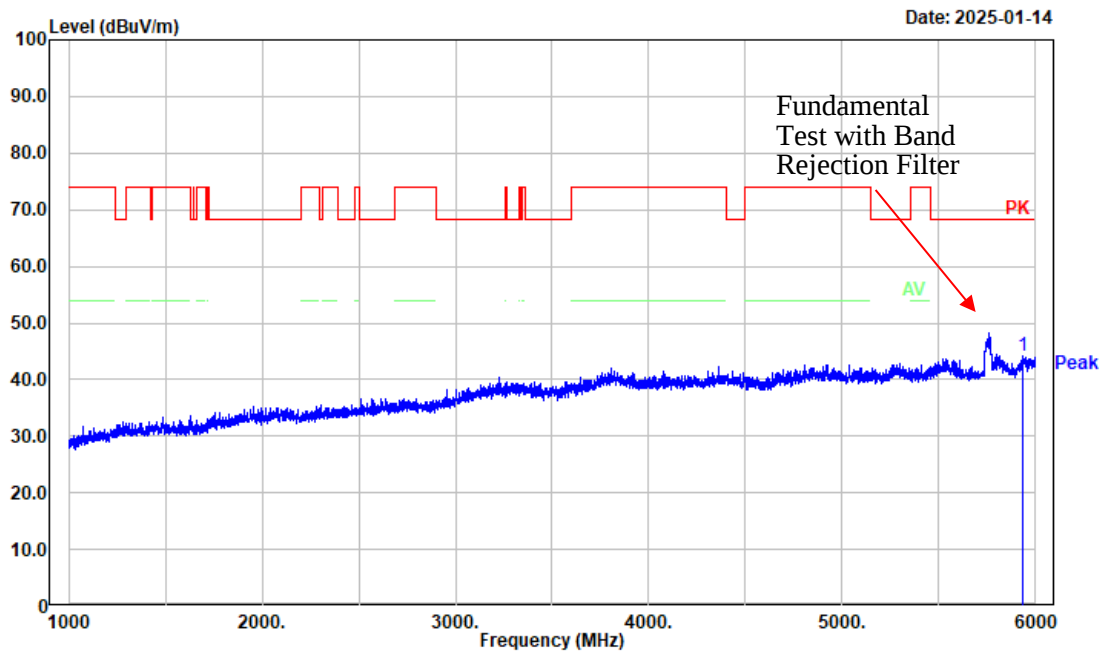


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5930.000	34.24	9.88	44.12	68.20	24.08	Peak

Project No.: 2403A43118E-RF
 Tester: Tao Zhu
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: n40 Low Channel 5755MHz Band 4 Chain 0

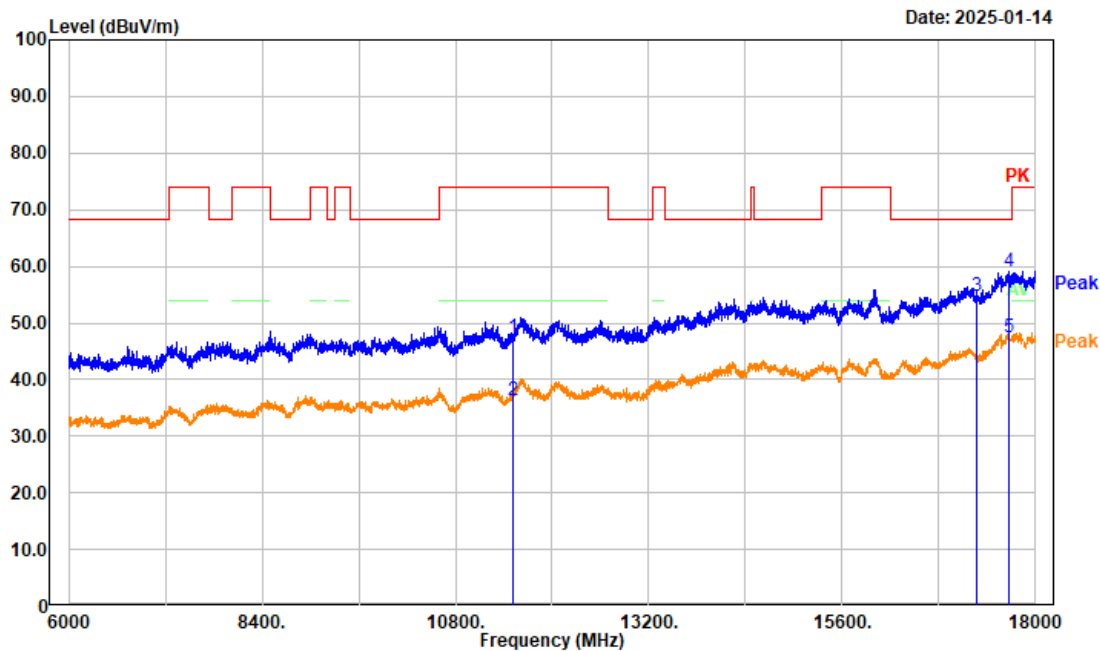


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11510.000	33.23	14.30	47.53	74.00	26.47	Peak
2	11510.000	21.88	14.30	36.18	54.00	17.82	Average
3	17265.000	33.58	21.25	54.83	68.20	13.37	Peak
4	17676.000	33.65	25.56	59.21	68.20	8.99	Peak
5	17676.000	21.96	25.56	47.52	-----	-----	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n40 Low Channel 5755MHz Band 4 Chain 0

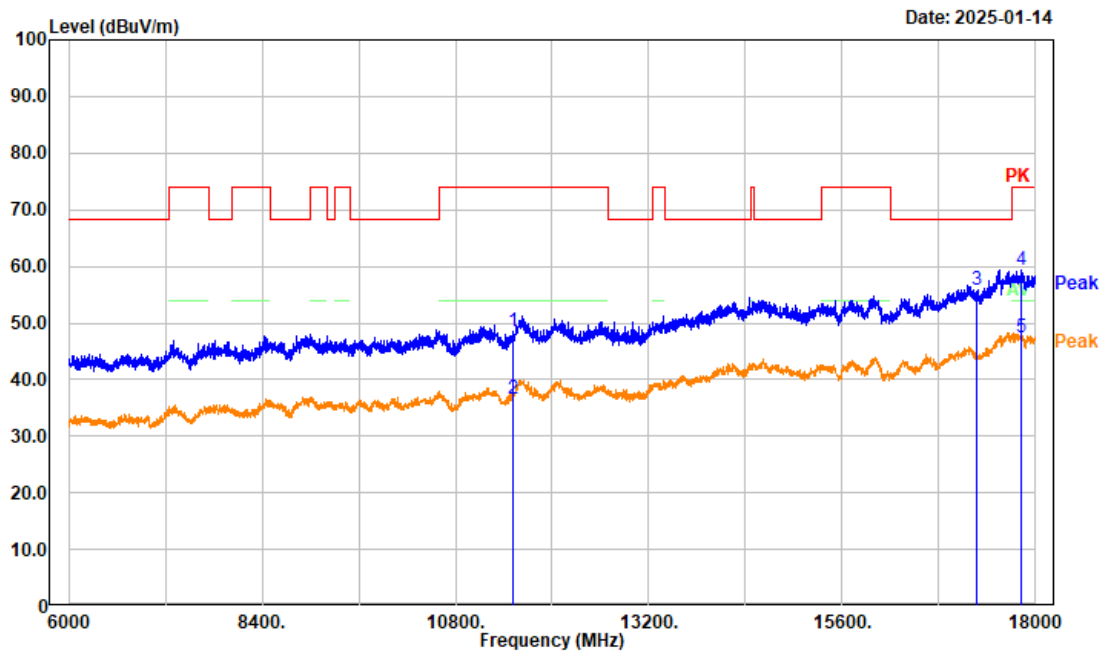


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11510.000	34.10	14.30	48.40	74.00	25.60	Peak
2	11510.000	22.21	14.30	36.51	54.00	17.49	Average
3	17265.000	34.52	21.25	55.77	68.20	12.43	Peak
4	17829.600	33.69	25.72	59.41	74.00	14.59	Peak
5	17829.600	21.83	25.72	47.55	54.00	6.45	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ac80 Middle Channel 5775MHz Band 4 Chain 0

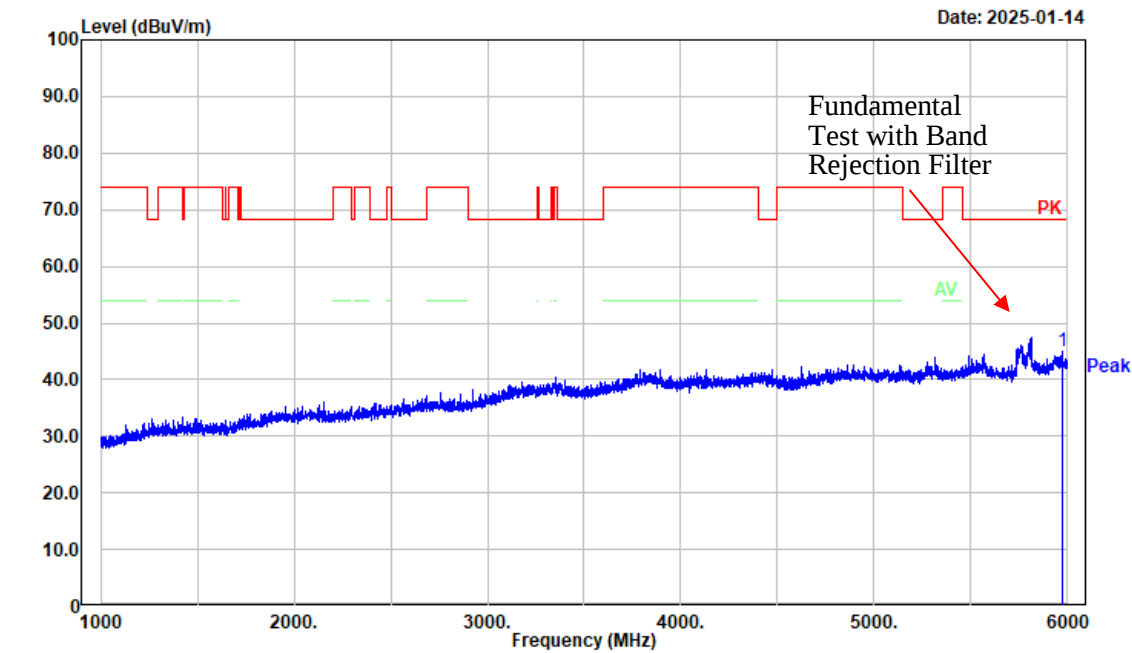


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5974.000	34.71	10.16	44.87	68.20	23.33	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ac80 Middle Channel 5775MHz Band 4 Chain 0

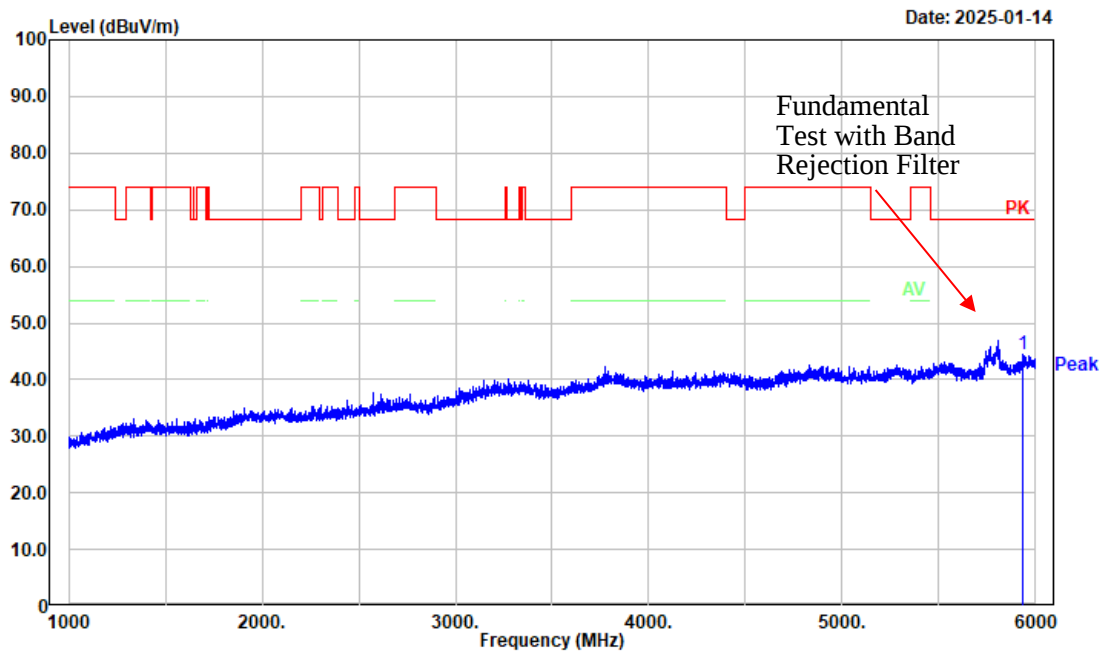


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5937.000	34.49	9.94	44.43	68.20	23.77	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ac80 Middle Channel 5775MHz Band 4 Chain 0

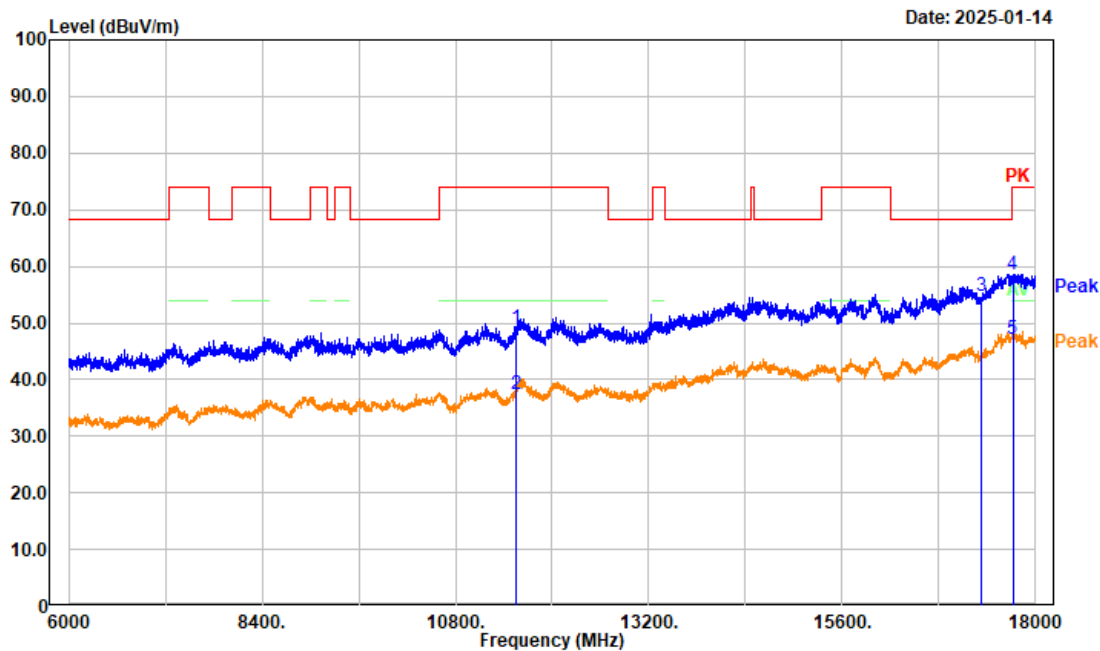


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.11	15.07	49.18	74.00	24.82	Peak
2	11550.000	22.21	15.07	37.28	54.00	16.72	Average
3	17325.000	33.36	21.27	54.63	68.20	13.57	Peak
4	17716.800	32.69	25.89	58.58	74.00	15.42	Peak
5	17716.800	21.32	25.89	47.21	54.00	6.79	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ac80 Middle Channel 5775MHz Band 4 Chain 0

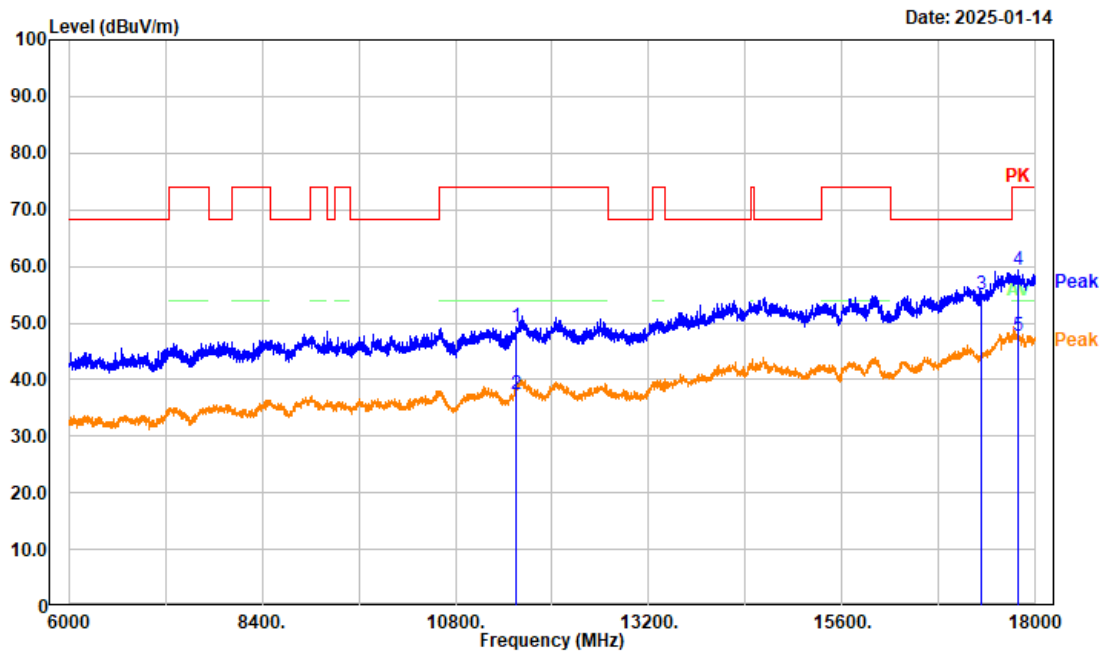


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.25	15.07	49.32	74.00	24.68	Peak
2	11550.000	22.28	15.07	37.35	54.00	16.65	Average
3	17325.000	33.85	21.27	55.12	68.20	13.08	Peak
4	17776.800	33.49	25.80	59.29	74.00	14.71	Peak
5	17776.800	21.89	25.80	47.69	54.00	6.31	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 Full Low Channel 5745MHz Band 4 Chain 0

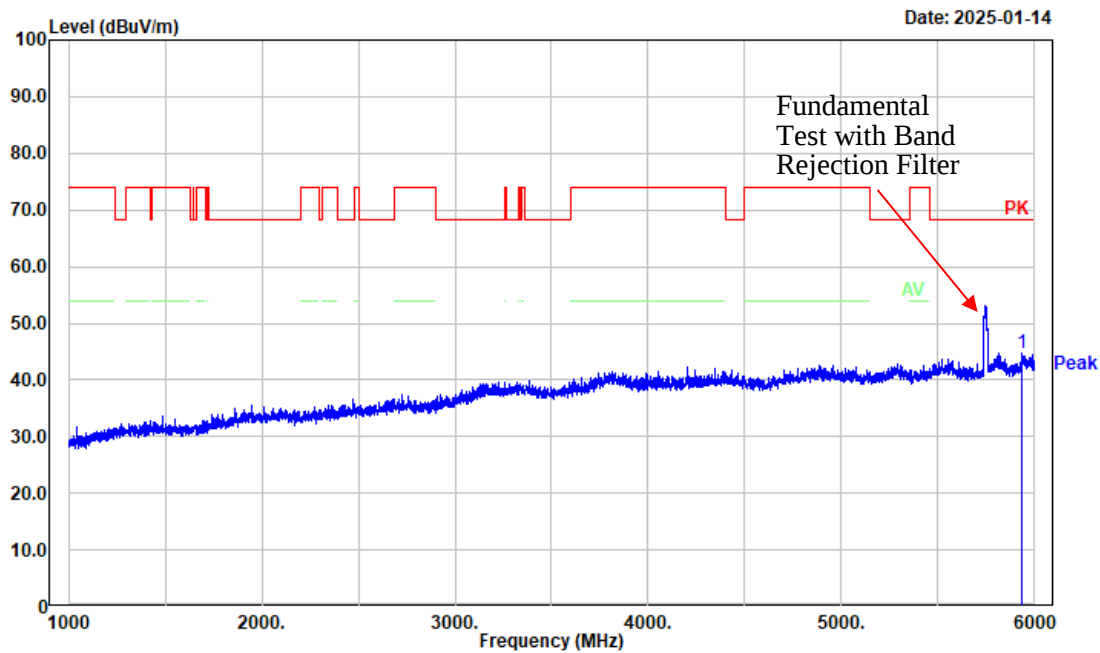


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5935.000	34.84	9.92	44.76	68.20	23.44	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 Full Low Channel 5745MHz Band 4 Chain 0

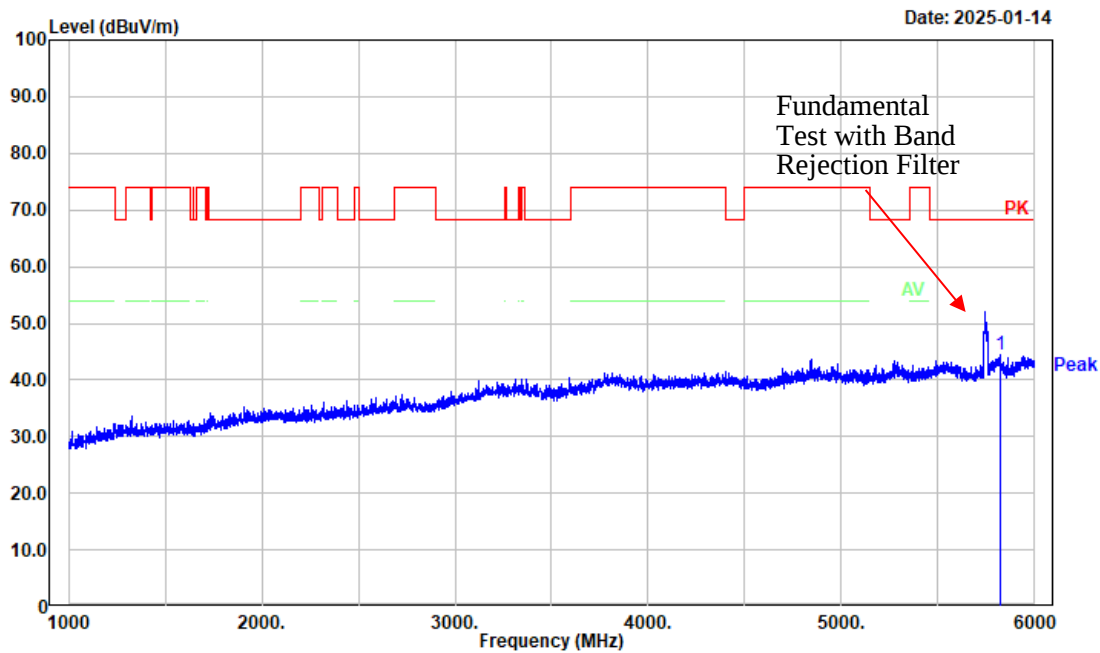


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5819.000	34.87	9.45	44.32	68.20	23.88	Peak

Project No.: 2403A43118E-RF
 Tester: Tao Zhu
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ax20 Full Low Channel 5745MHz Band 4 Chain 0

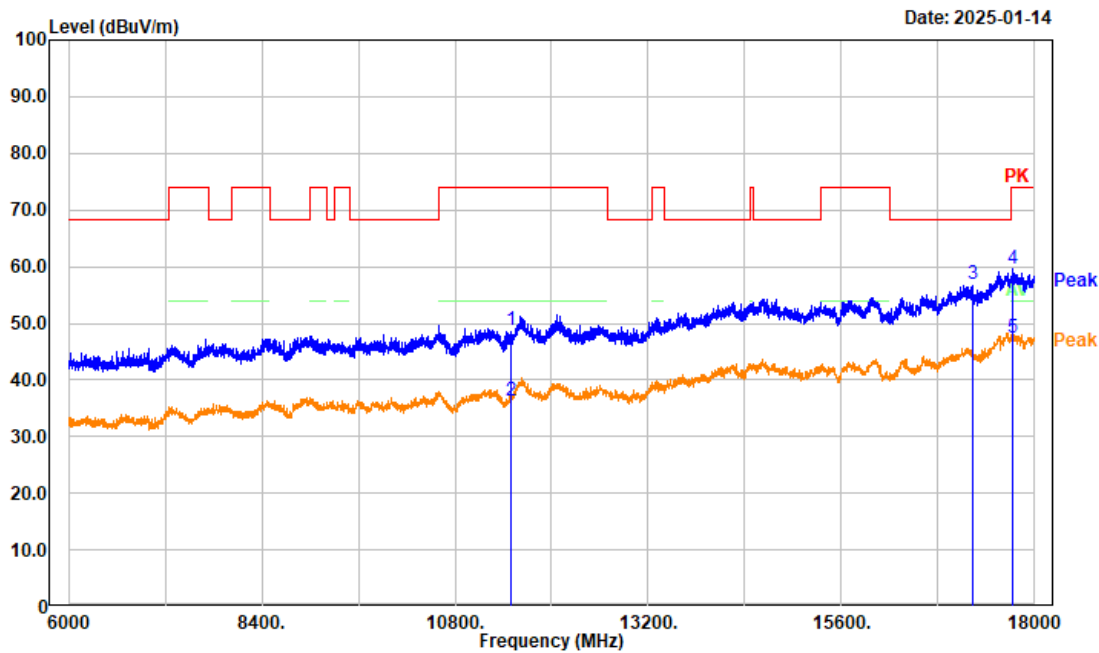


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	34.73	14.06	48.79	74.00	25.21	Peak
2	11490.000	22.25	14.06	36.31	54.00	17.69	Average
3	17235.000	35.60	21.38	56.98	68.20	11.22	Peak
4	17719.200	33.64	25.89	59.53	74.00	14.47	Peak
5	17719.200	21.66	25.89	47.55	54.00	6.45	Average

Project No.: 2403A43118E-RF
 Tester: Tao Zhu
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax20 Full Low Channel 5745MHz Band 4 Chain 0

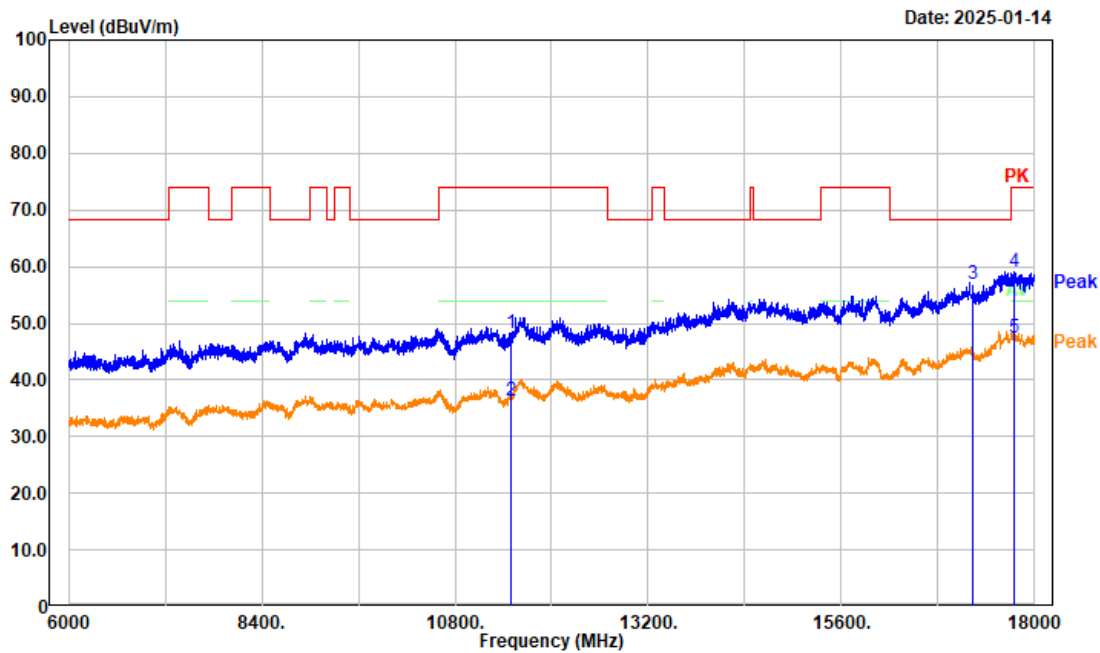


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11490.000	34.25	14.06	48.31	74.00	25.69	Peak
2	11490.000	22.28	14.06	36.34	54.00	17.66	Average
3	17235.000	35.41	21.38	56.79	68.20	11.41	Peak
4	17750.400	33.24	25.84	59.08	74.00	14.92	Peak
5	17750.400	21.60	25.84	47.44	54.00	6.56	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 Full High Channel 5795MHz Band 4 Chain 0

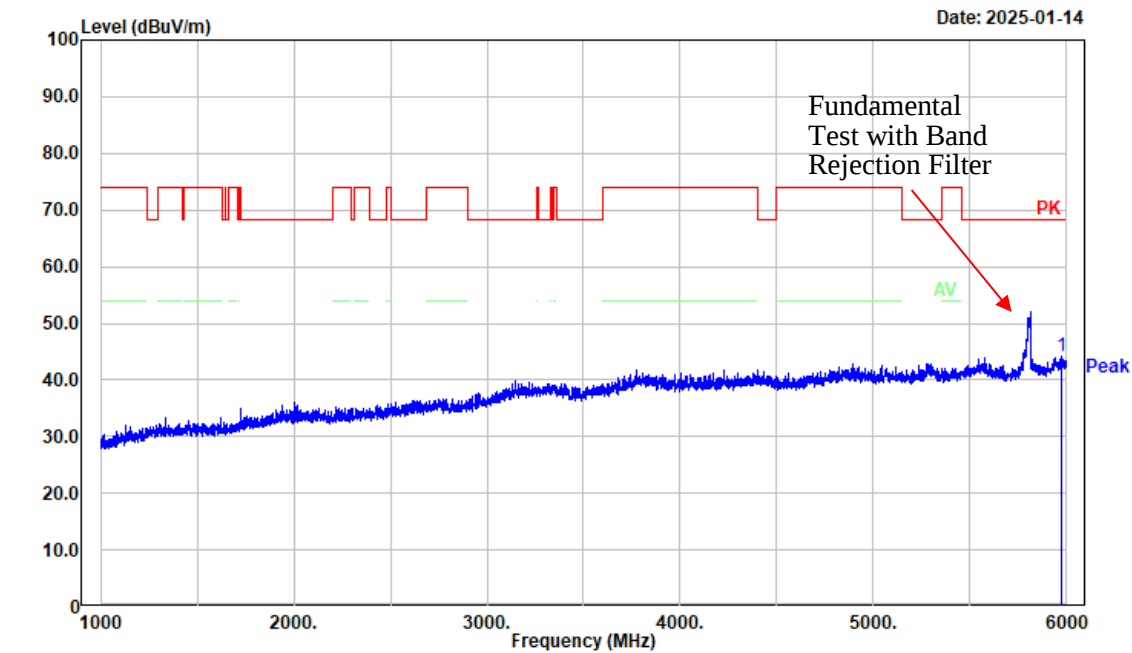


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5973.000	33.94	10.16	44.10	68.20	24.10	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 Full High Channel 5795MHz Band 4 Chain 0

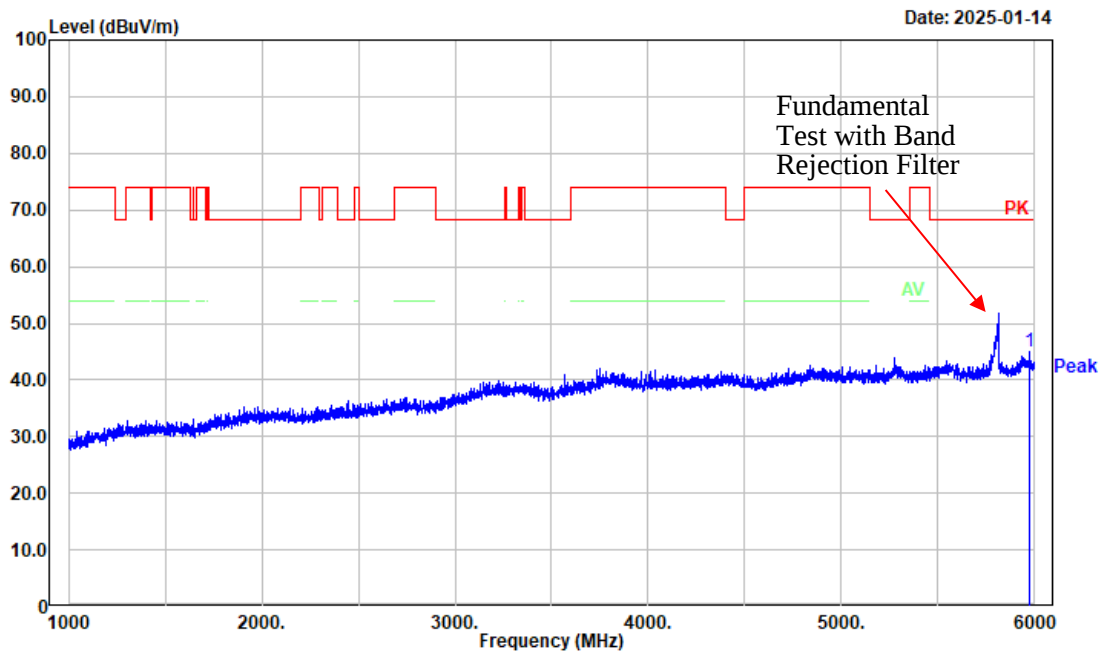


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5976.000	34.84	10.17	45.01	68.20	23.19	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 Full High Channel 5795MHz Band 4 Chain 0

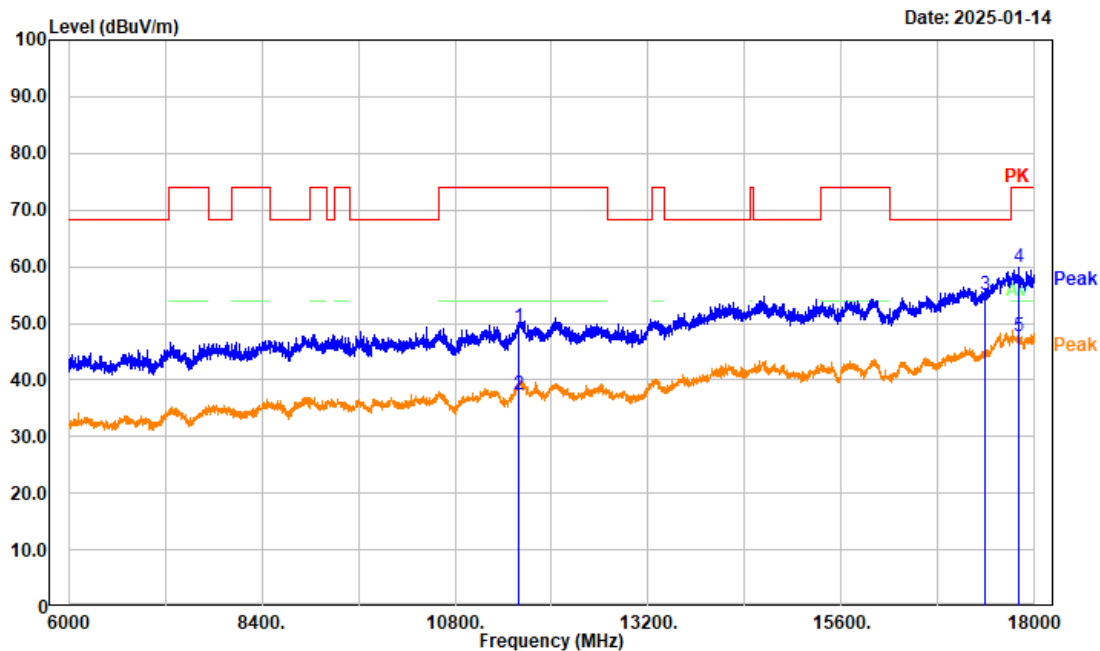


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	33.45	15.84	49.29	74.00	24.71	Peak
2	11590.000	21.58	15.84	37.42	54.00	16.58	Average
3	17385.000	33.20	21.68	54.88	68.20	13.32	Peak
4	17808.000	34.13	25.76	59.89	74.00	14.11	Peak
5	17808.000	21.83	25.76	47.59	54.00	6.41	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax40 Full High Channel 5795MHz Band 4 Chain 0

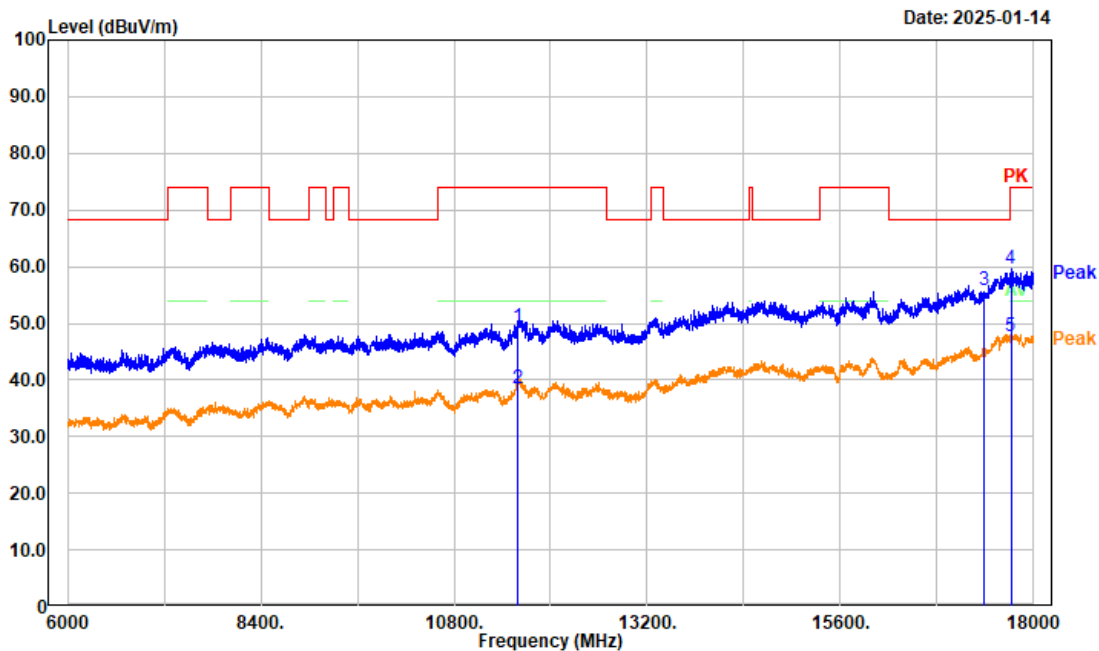


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	33.58	15.84	49.42	74.00	24.58	Peak
2	11590.000	22.59	15.84	38.43	54.00	15.57	Average
3	17385.000	34.13	21.68	55.81	68.20	12.39	Peak
4	17716.800	33.79	25.89	59.68	74.00	14.32	Peak
5	17716.800	21.75	25.89	47.64	54.00	6.36	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 Full Middle Channel 5775MHz Band 4 Chain 0

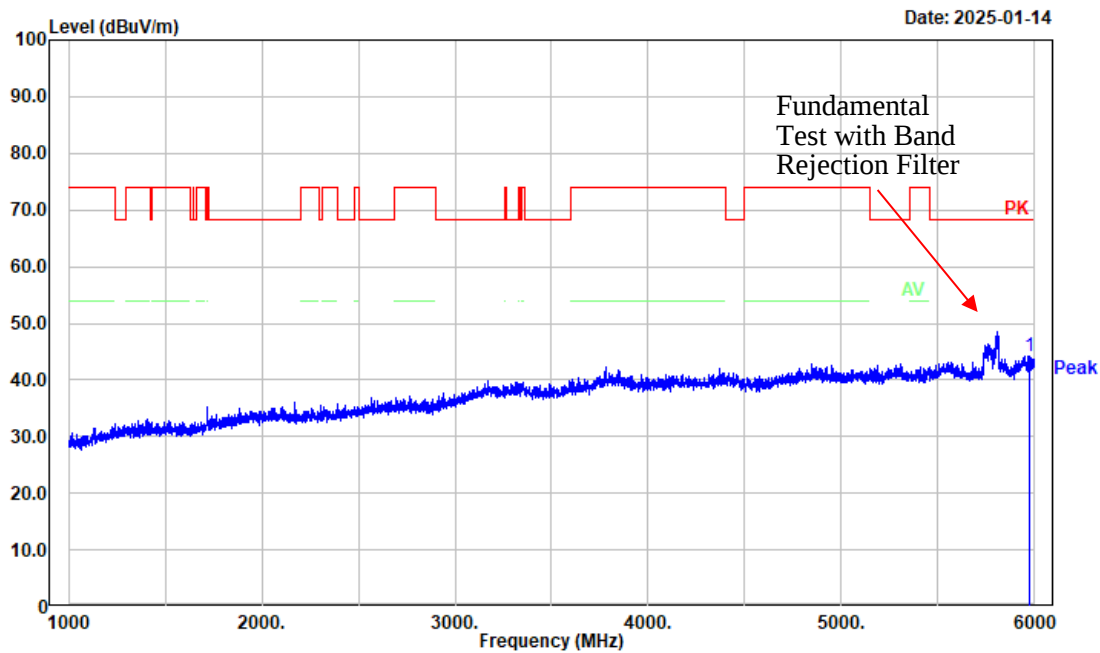


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5970.000	34.12	10.14	44.26	68.20	23.94	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 Full Middle Channel 5775MHz Band 4 Chain 0

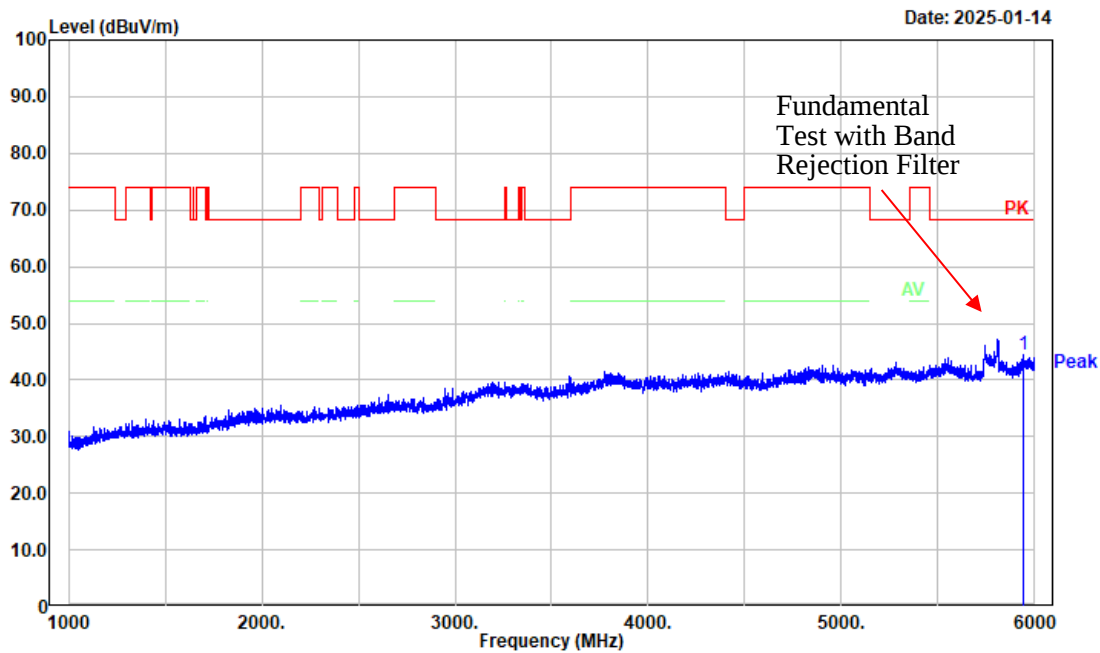


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5941.000	34.38	9.97	44.35	68.20	23.85	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 Full Middle Channel 5775MHz Band 4 Chain 0

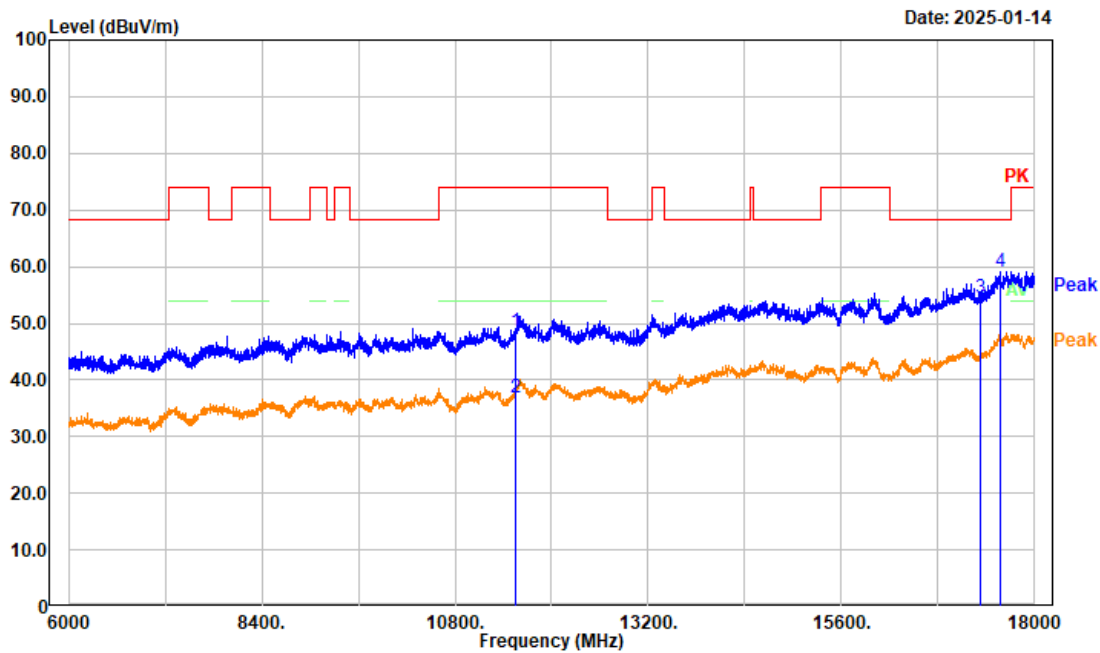


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	33.54	15.07	48.61	74.00	25.39	Peak
2	11550.000	21.74	15.07	36.81	54.00	17.19	Average
3	17325.000	33.29	21.27	54.56	68.20	13.64	Peak
4	17565.600	35.30	23.87	59.17	68.20	9.03	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax80 Full Middle Channel 5775MHz Band 4 Chain 0

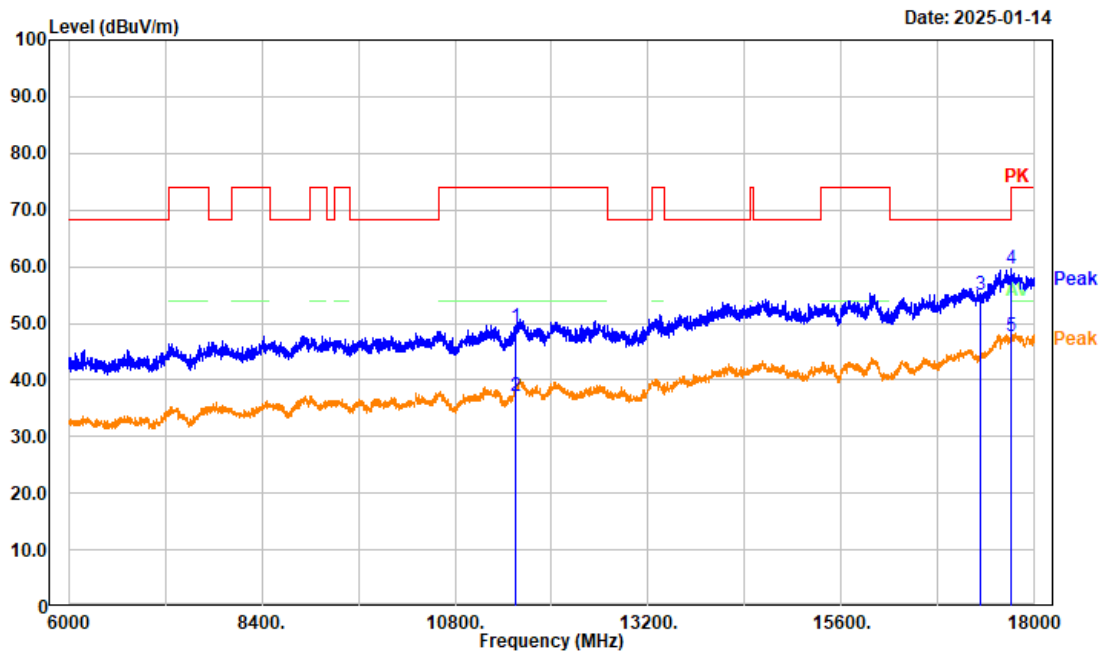


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.18	15.07	49.25	74.00	24.75	Peak
2	11550.000	22.10	15.07	37.17	54.00	16.83	Average
3	17325.000	33.69	21.27	54.96	68.20	13.24	Peak
4	17707.200	33.82	25.89	59.71	74.00	14.29	Peak
5	17707.200	21.68	25.89	47.57	54.00	6.43	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

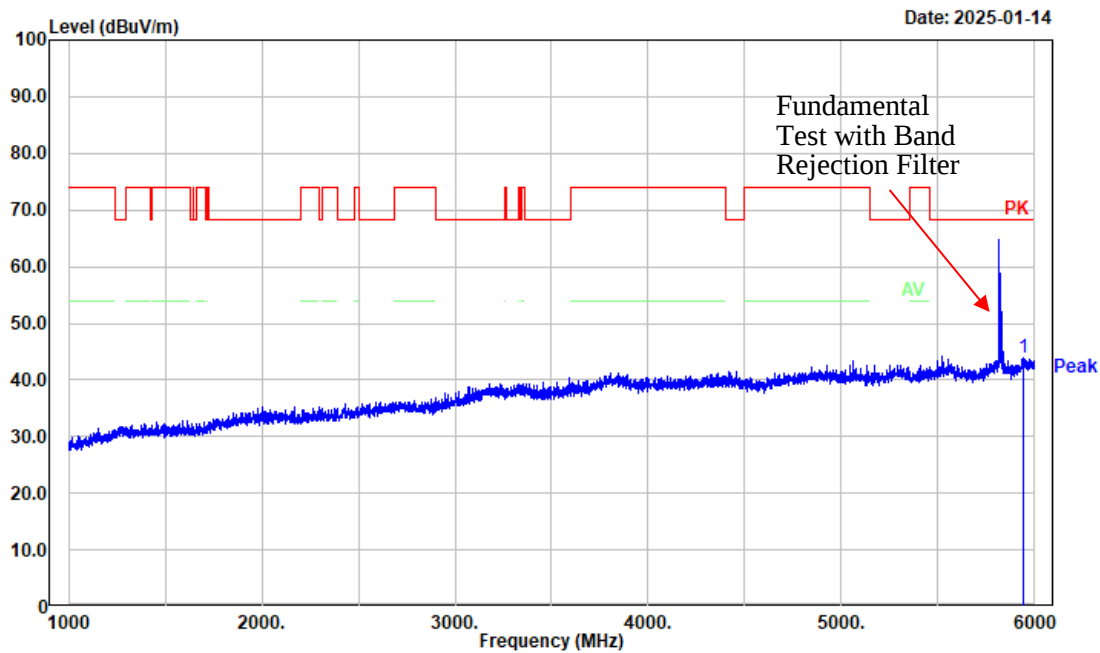


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5943.000	33.87	9.99	43.86	68.20	24.34	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

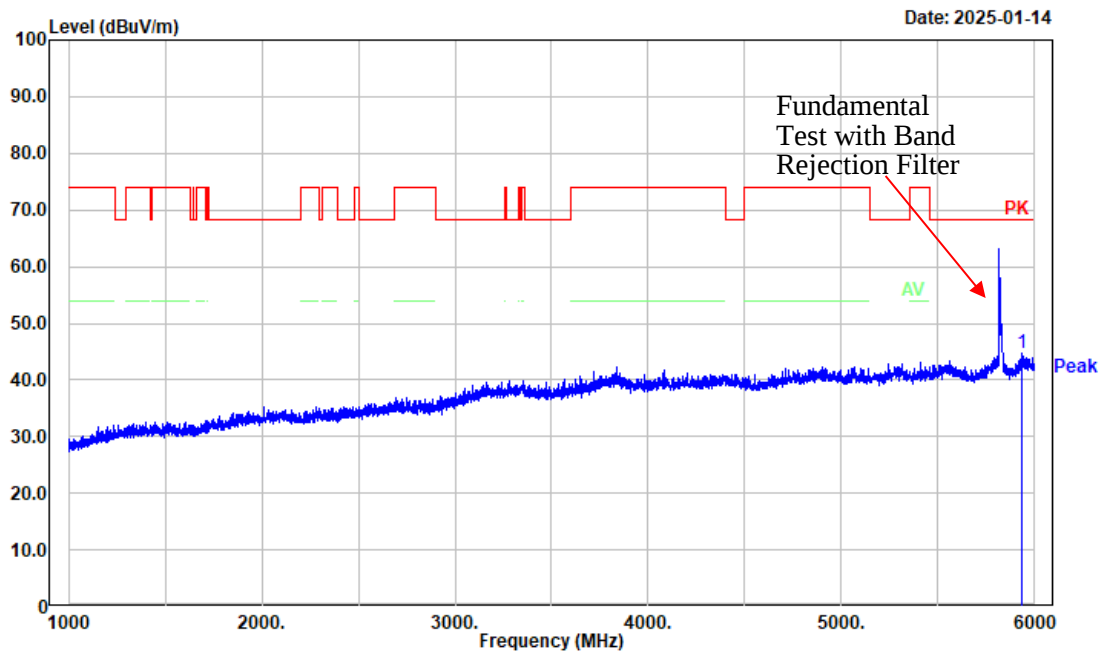


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5933.000	34.81	9.90	44.71	68.20	23.49	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

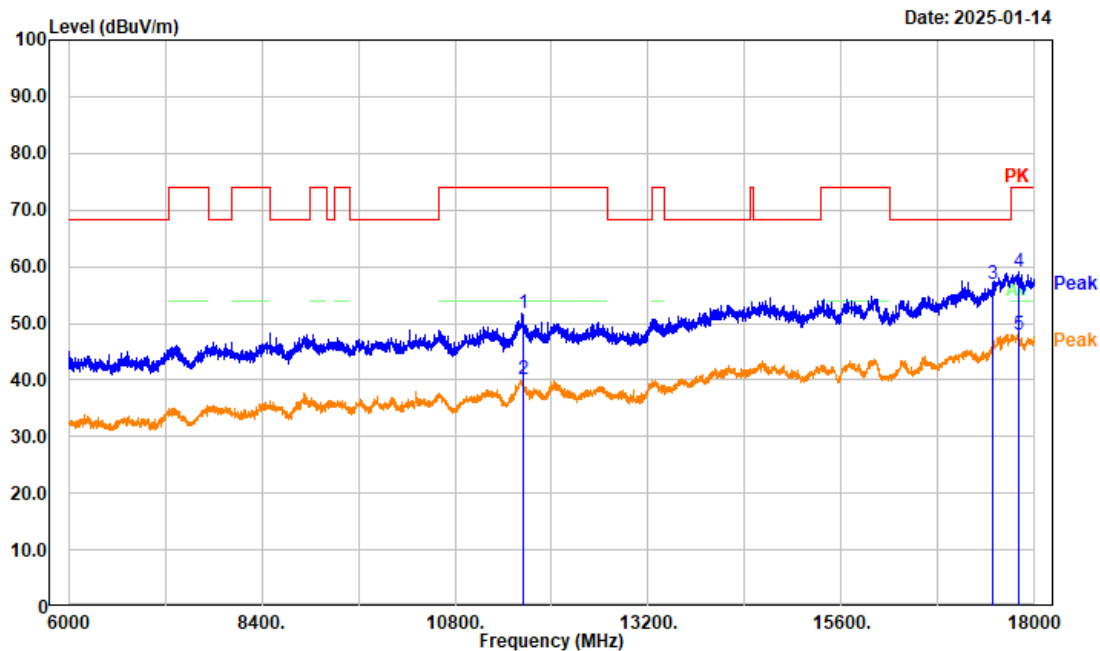


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	36.12	15.54	51.66	74.00	22.34	Peak
2	11650.000	24.54	15.54	40.08	54.00	13.92	Average
3	17475.000	34.39	22.53	56.92	68.20	11.28	Peak
4	17805.600	33.32	25.76	59.08	74.00	14.92	Peak
5	17805.600	22.09	25.76	47.85	54.00	6.15	Average

Project No.: 2403A43118E-RF
 Tester: Tao Zhu
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

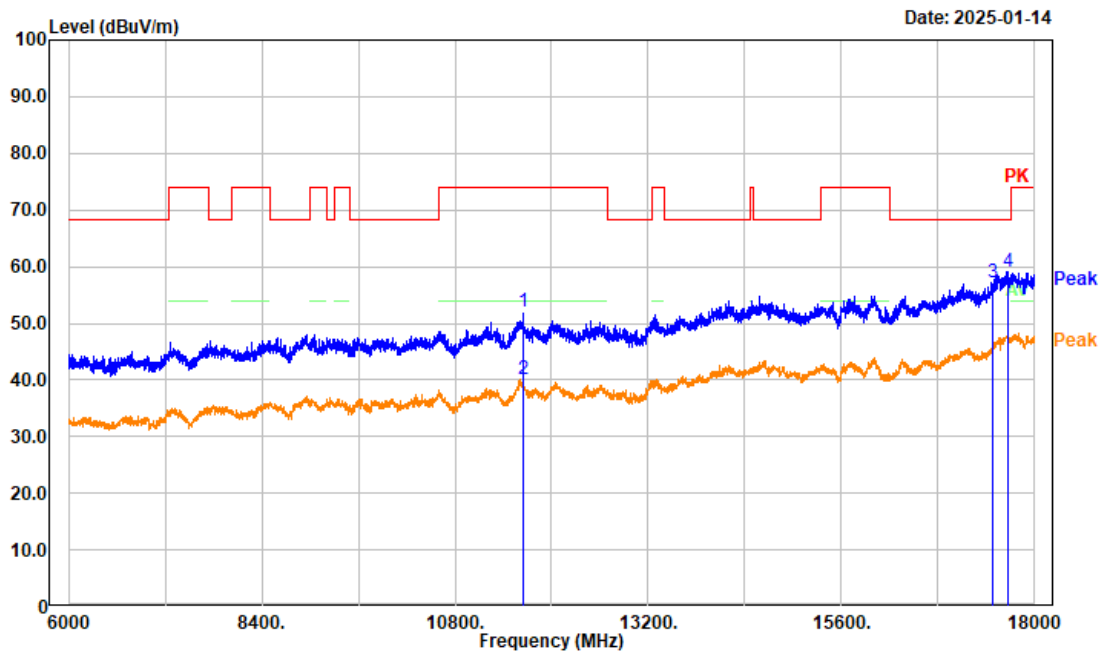


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	36.45	15.54	51.99	74.00	22.01	Peak
2	11650.000	24.57	15.54	40.11	54.00	13.89	Average
3	17475.000	34.52	22.53	57.05	68.20	11.15	Peak
4	17664.000	33.76	25.39	59.15	68.20	9.05	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

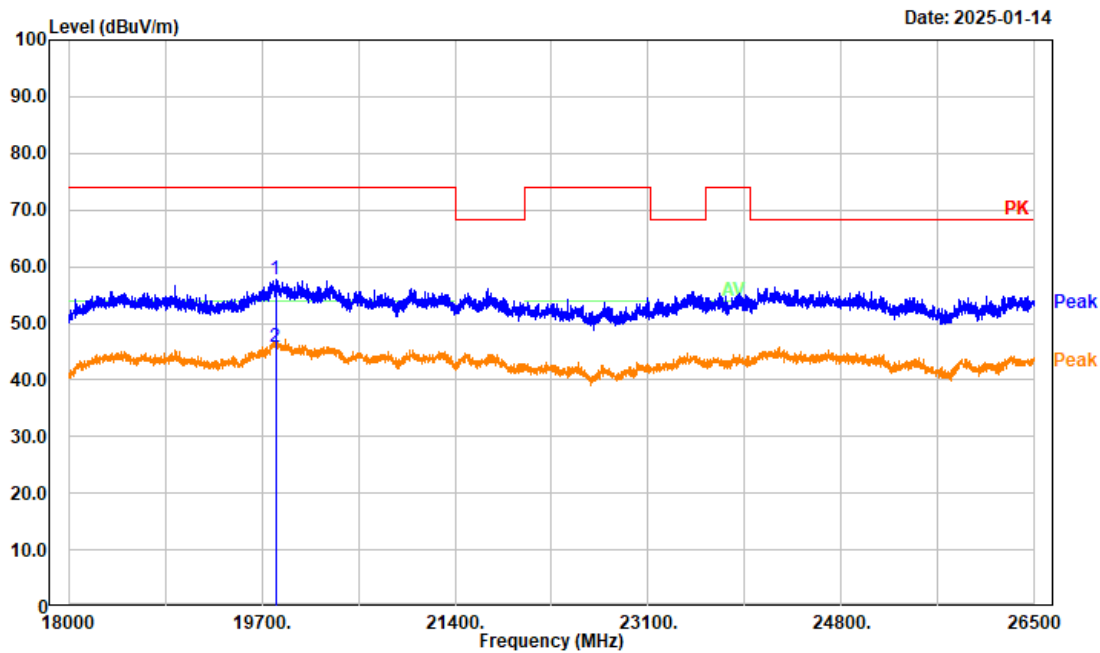


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19820.700	49.70	7.95	57.65	74.00	16.35	Peak
2	19820.700	37.94	7.95	45.89	54.00	8.11	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

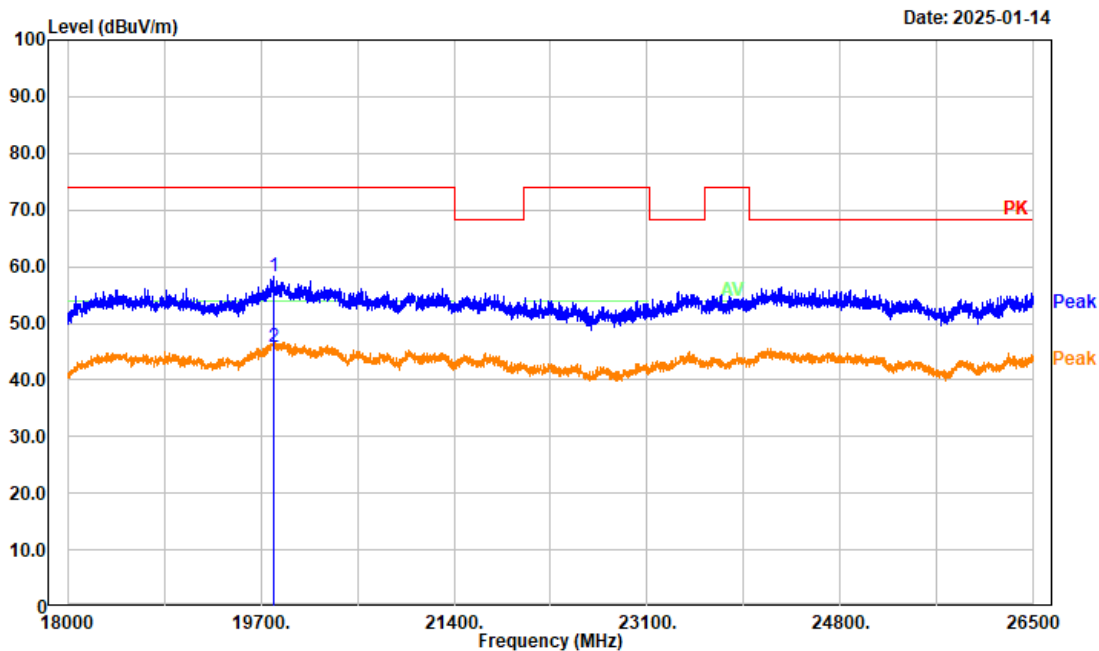


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19808.800	50.38	7.95	58.33	74.00	15.67	Peak
2	19808.800	37.96	7.95	45.91	54.00	8.09	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

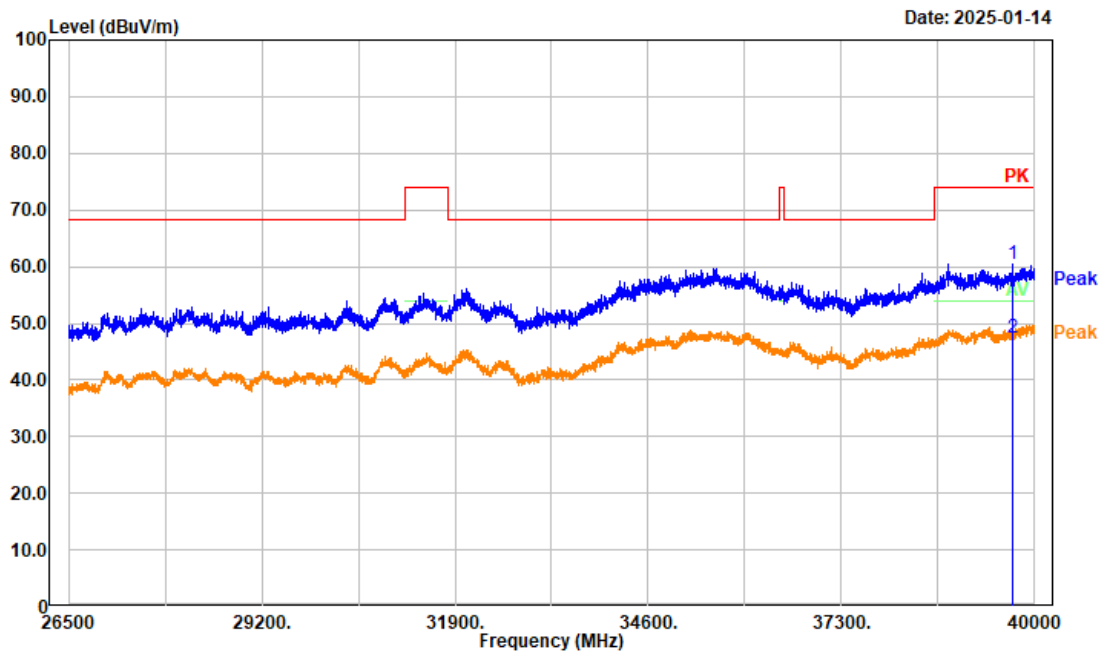


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39694.900	53.04	7.52	60.56	74.00	13.44	Peak
2	39694.900	39.80	7.52	47.32	54.00	6.68	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 26-8 High Channel 5825MHz Band 4 Chain 0

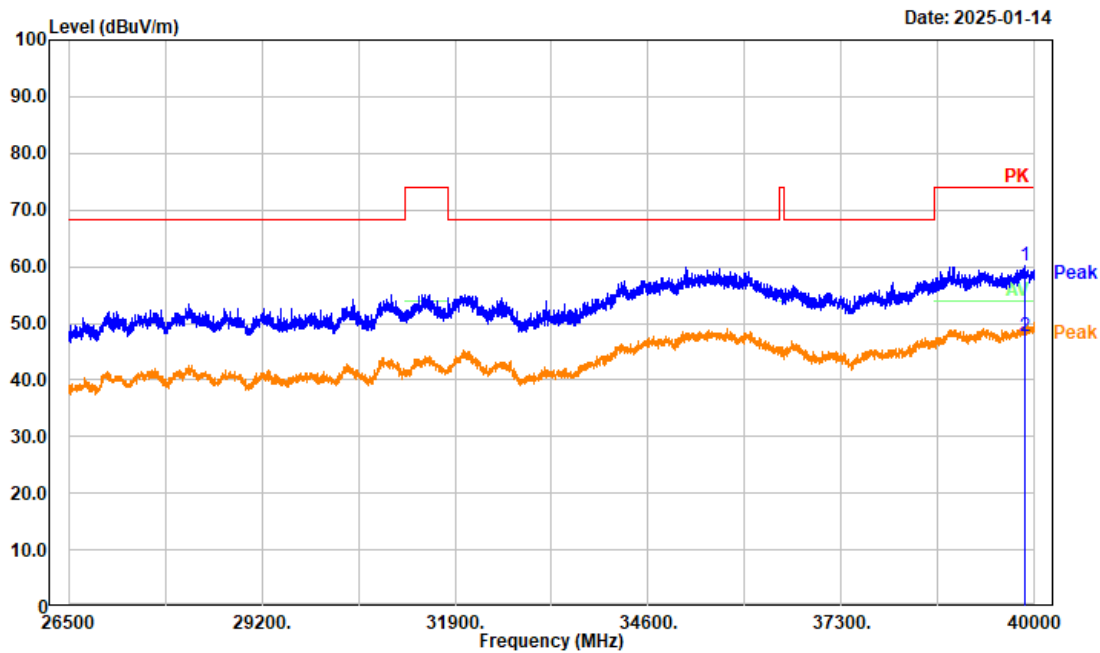


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39856.900	52.81	7.26	60.07	74.00	13.93	Peak
2	39856.900	40.43	7.26	47.69	54.00	6.31	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 26-17 High Channel 5795MHz Band 4 Chain 0

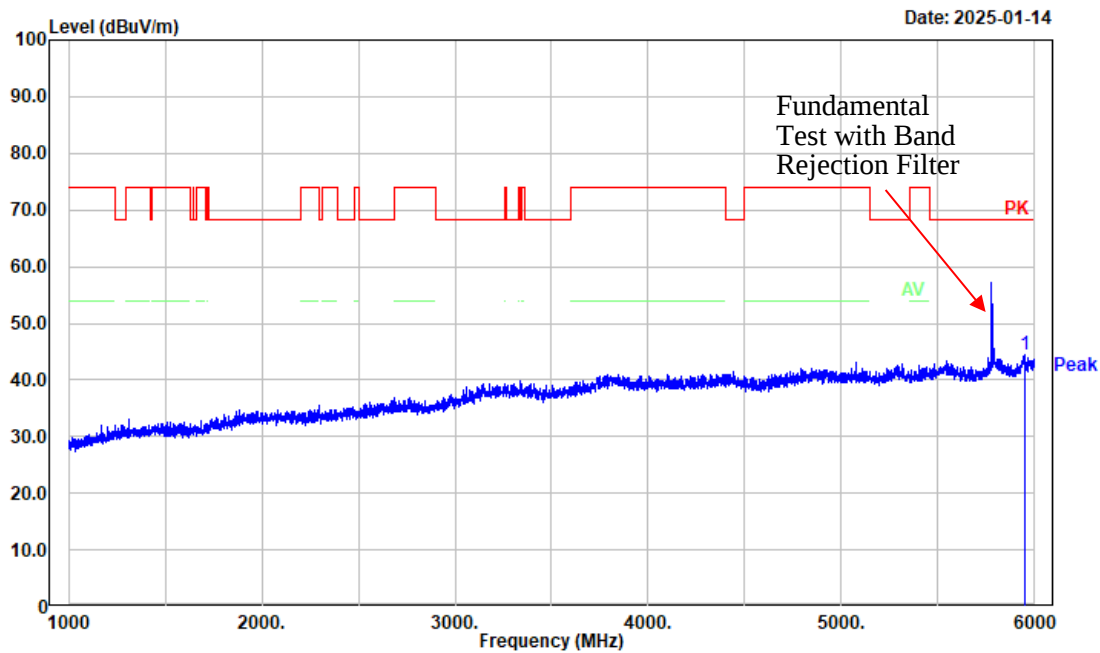


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5951.000	34.35	10.06	44.41	68.20	23.79	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 26-17 High Channel 5795MHz Band 4 Chain 0

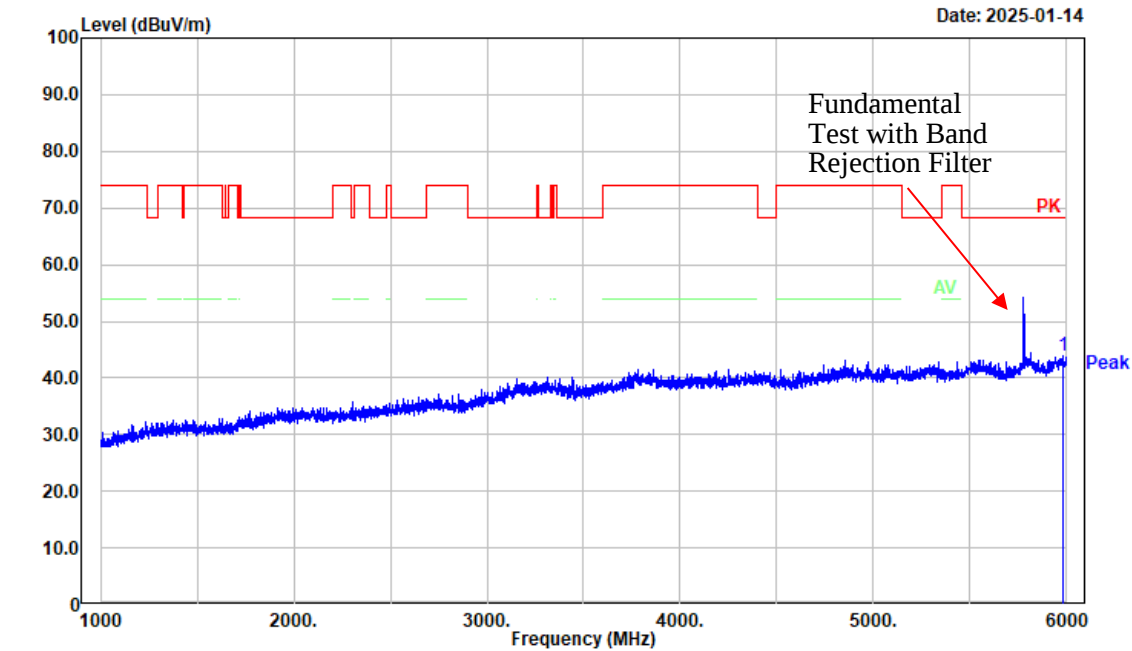


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5980.000	33.66	10.19	43.85	68.20	24.35	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 26-17 High Channel 5795MHz Band 4 Chain 0

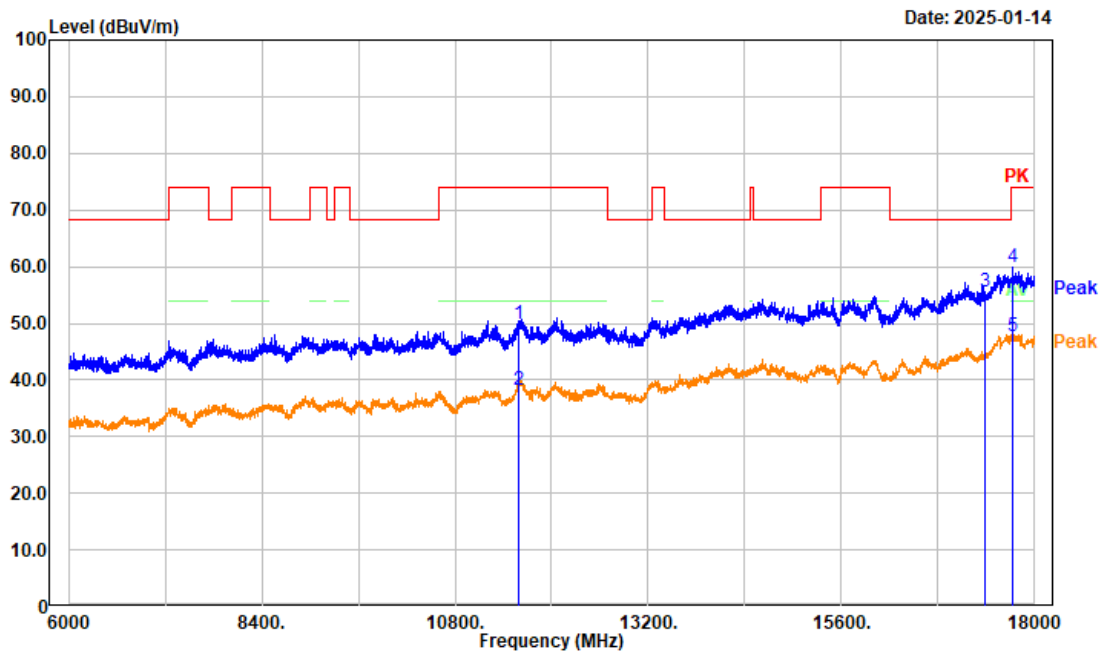


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.10	15.84	49.94	74.00	24.06	Peak
2	11590.000	22.47	15.84	38.31	54.00	15.69	Average
3	17385.000	33.79	21.68	55.47	68.20	12.73	Peak
4	17724.000	33.97	25.87	59.84	74.00	14.16	Peak
5	17724.000	21.82	25.87	47.69	54.00	6.31	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax40 26-17 High Channel 5795MHz Band 4 Chain 0

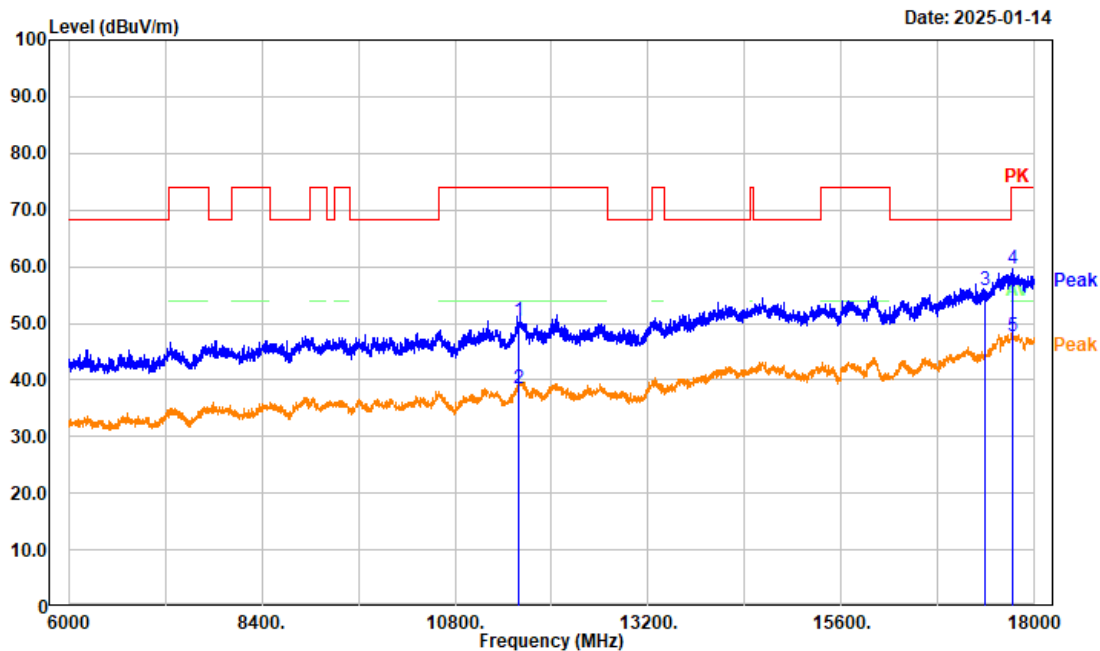


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.55	15.84	50.39	74.00	23.61	Peak
2	11590.000	22.53	15.84	38.37	54.00	15.63	Average
3	17385.000	34.10	21.68	55.78	68.20	12.42	Peak
4	17724.000	33.75	25.87	59.62	74.00	14.38	Peak
5	17724.000	21.82	25.87	47.69	54.00	6.31	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 26-0 Middle Channel 5775MHz Band 4 Chain 0

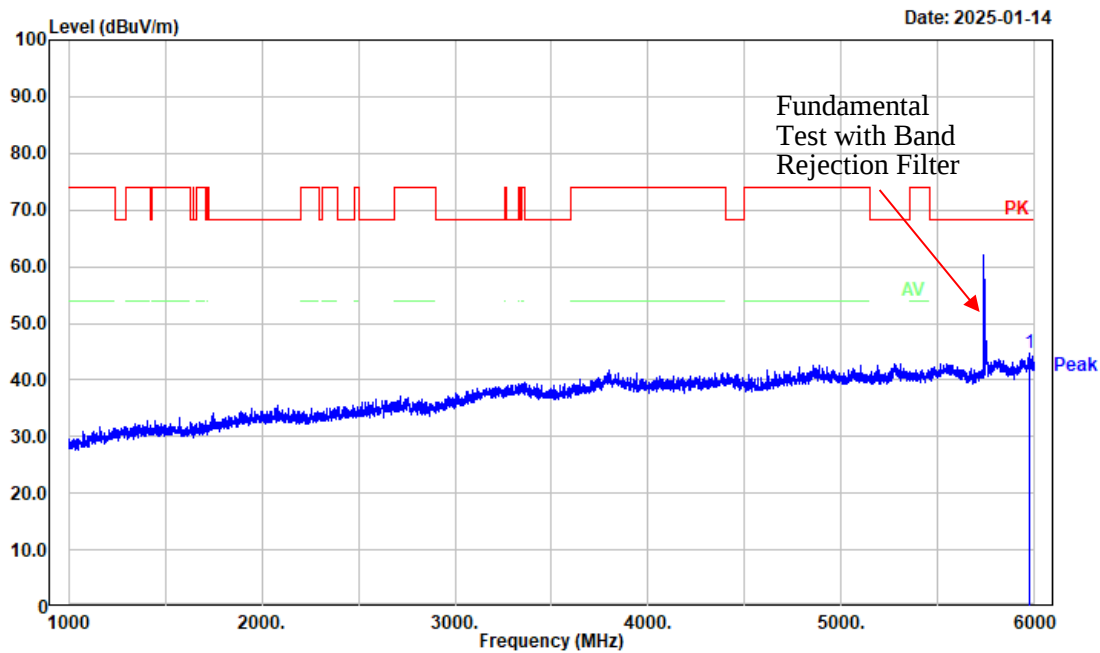


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5973.000	34.64	10.16	44.80	68.20	23.40	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 26-0 Middle Channel 5775MHz Band 4 Chain 0

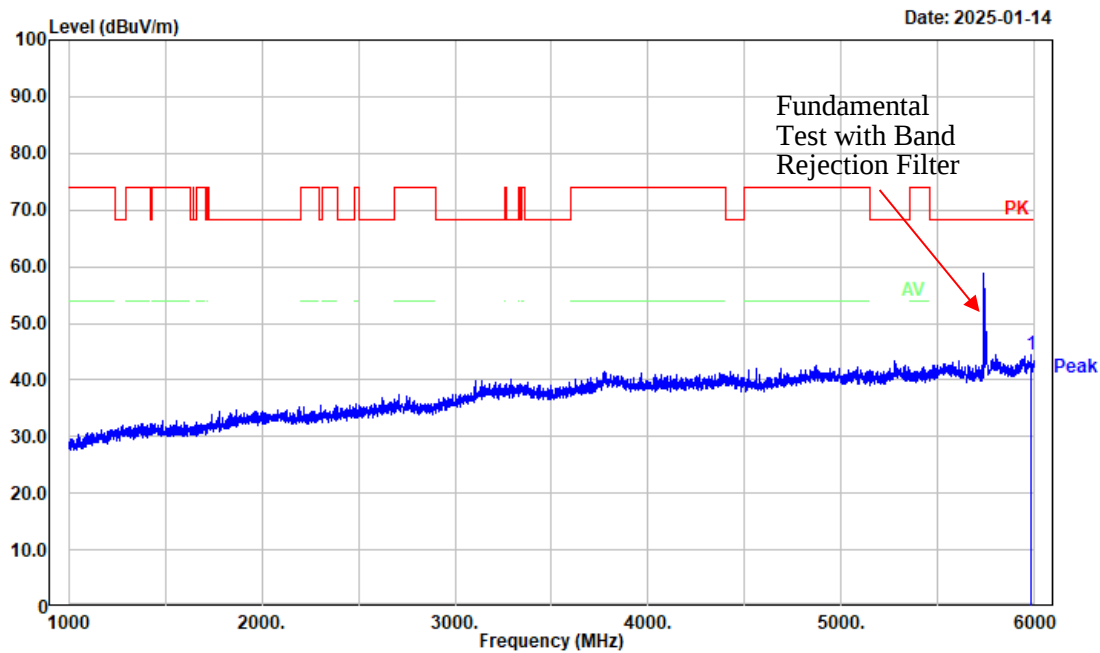


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5981.000	34.17	10.19	44.36	68.20	23.84	Peak

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 26-0 Middle Channel 5775MHz Band 4 Chain 0

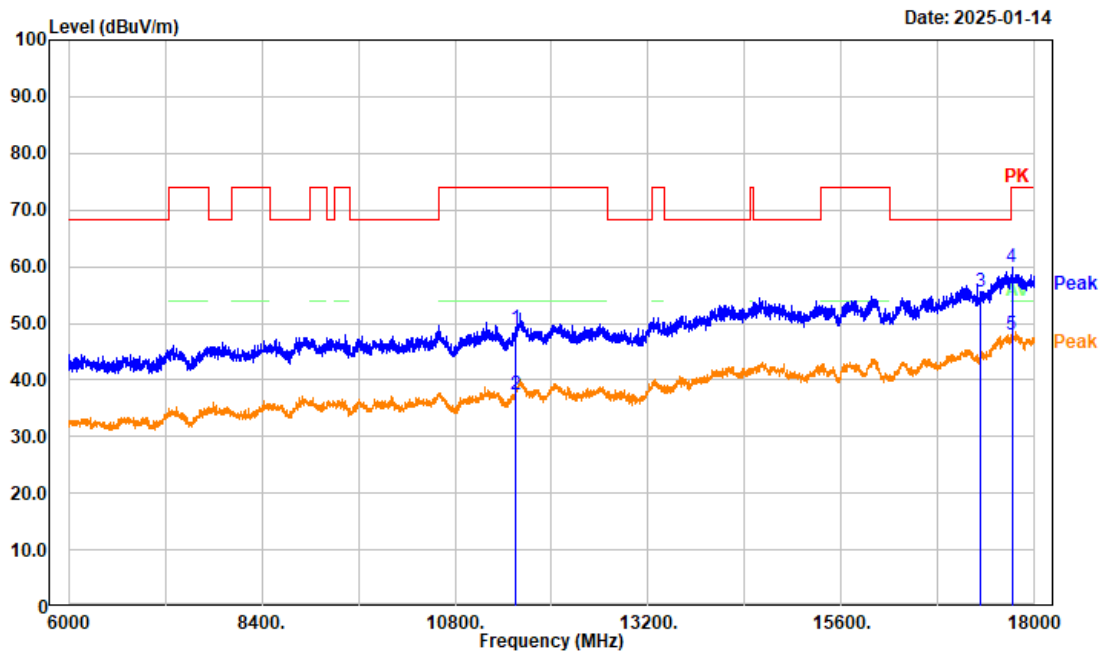

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.05	15.07	49.12	74.00	24.88	Peak
2	11550.000	22.28	15.07	37.35	54.00	16.65	Average
3	17325.000	34.22	21.27	55.49	68.20	12.71	Peak
4	17716.800	33.93	25.89	59.82	74.00	14.18	Peak
5	17716.800	21.99	25.89	47.88	54.00	6.12	Average

Project No.: 2403A43118E-RF
Tester: Tao Zhu
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax80 26-0 Middle Channel 5775MHz Band 4 Chain 0

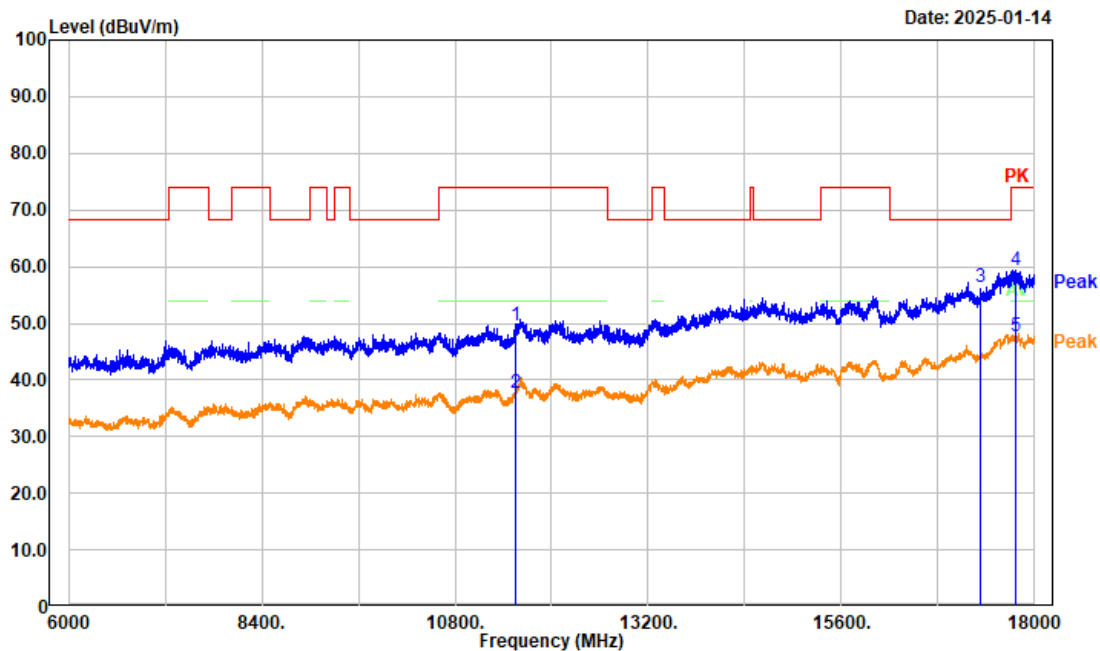

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.45	15.07	49.52	74.00	24.48	Peak
2	11550.000	22.58	15.07	37.65	54.00	16.35	Average
3	17325.000	35.22	21.27	56.49	68.20	11.71	Peak
4	17769.600	33.46	25.81	59.27	74.00	14.73	Peak
5	17769.600	21.93	25.81	47.74	54.00	6.26	Average

4.3 Maximum Conducted Output Power

Serial Number:	2VG2-2	Test Date:	2025/1/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	47	ATM Pressure: (kPa)	101.6
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eatsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Agilent	USB Average Power Sensor	U2001H	MY50000380	2024/4/1	2025/3/31

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	RU Config.	Max. Conducted Average Output Power (dBm)	
			Result	Limit
802.11a	5180	/	9.16	24.00
	5200	/	9.11	24.00
	5240	/	9.38	24.00
802.11n ht20	5180	/	9.20	24.00
	5200	/	9.21	24.00
	5240	/	9.37	24.00
802.11n ht40	5190	/	9.06	24.00
	5230	/	9.13	24.00
802.11ac vht80	5210	/	8.99	24.00
802.11ax hew20	5180	26/0	9.25	24.00
		52/37	9.18	24.00
		106/53	9.23	24.00
		Full	9.16	24.00
	5200	26/0	9.17	24.00
		52/37	9.09	24.00
		106/53	9.15	24.00
		Full	9.12	24.00
	5240	26/8	9.38	24.00
		52/40	9.41	24.00
		106/54	9.34	24.00
		Full	9.37	24.00
802.11ax hew40	5190	26/0	9.25	24.00
		52/37	9.28	24.00
		106/53	9.23	24.00
		242/61	9.29	24.00
		Full	9.27	24.00
	5230	26/17	9.36	24.00
		52/44	9.28	24.00
		106/56	9.31	24.00
		242/62	9.32	24.00
		Full	9.34	24.00
802.11ax hew80	5210	26/0	9.07	24.00
		52/37	9.03	24.00
		106/53	9.11	24.00
		242/61	9.06	24.00
		484/65	9.01	24.00
		Full	9.06	24.00

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	RU Config.	Max. Conducted Average Output Power (dBm)	
			Result	Limit
802.11a	5260	/	9.25	24.00
	5280	/	9.63	24.00
	5320	/	9.73	24.00
802.11n ht20	5260	/	9.25	24.00
	5280	/	9.50	24.00
	5320	/	9.72	24.00
802.11n ht40	5270	/	9.31	24.00
	5310	/	9.62	24.00
802.11ac vht80	5290	/	9.37	24.00
802.11ax hew20	5260	26/0	9.41	24.00
		52/37	9.36	24.00
		106/53	9.29	24.00
		Full	9.32	24.00
	5280	26/0	9.43	24.00
		52/37	9.46	24.00
		106/53	9.39	24.00
		Full	9.44	24.00
	5320	26/8	9.56	24.00
		52/40	9.51	24.00
		106/54	9.53	24.00
		Full	9.52	24.00
802.11ax hew40	5270	26/0	9.35	24.00
		52/37	9.41	24.00
		106/53	9.37	24.00
		242/61	9.33	24.00
		Full	9.38	24.00
	5310	26/17	9.62	24.00
		52/44	9.54	24.00
		106/56	9.53	24.00
		242/62	9.61	24.00
		Full	9.56	24.00
802.11ax hew80	5290	26/0	9.52	24.00
		52/37	9.43	24.00
		106/53	9.39	24.00
		242/61	9.41	24.00
		484/65	9.44	24.00
		Full	9.46	24.00

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	RU Config.	Max. Conducted Average Output Power (dBm)	
			Result	Limit
802.11a	5500	/	7.07	24.00
	5580	/	7.24	24.00
	5700	/	7.22	24.00
	5720	/	7.36	24.00
802.11n ht20	5500	/	7.24	24.00
	5580	/	7.28	24.00
	5700	/	7.31	24.00
	5720	/	7.34	24.00
802.11n ht40	5510	/	7.02	24.00
	5550	/	7.13	24.00
	5670	/	6.97	24.00
	5710	/	7.09	24.00
802.11ac vht80	5530	/	7.00	24.00
	5610	/	6.82	24.00
	5690	/	7.04	24.00
802.11ax hew20	5500	26/0	6.99	24.00
		52/37	6.95	24.00
		106/53	6.93	24.00
		Full	6.97	24.00
	5580	26/0	7.03	24.00
		52/37	6.98	24.00
		106/53	6.95	24.00
		Full	7.01	24.00
	5700	26/8	6.81	24.00
		52/40	6.85	24.00
		106/54	6.79	24.00
		Full	6.84	24.00
	5720	26/8	6.94	24.00
		52/40	6.93	24.00
		106/54	6.89	24.00
		Full	6.95	24.00
802.11ax hew40	5510	26/0	7.15	24.00
		52/37	7.19	24.00
		106/53	7.21	24.00
		242/61	7.18	24.00
		Full	7.19	24.00
	5550	26/17	7.26	24.00
		52/44	7.21	24.00
		106/56	7.28	24.00
		242/62	7.23	24.00
		Full	7.25	24.00
	5670	26/17	7.02	24.00
		52/44	7.08	24.00
		106/56	7.04	24.00

		242/62	7.01	24.00
		Full	7.06	24.00
	5710	26/17	7.18	24.00
		52/44	7.12	24.00
		106/56	7.21	24.00
		242/62	7.16	24.00
		Full	7.15	24.00
802.11ax hew80	5530	26/0	6.95	24.00
		52/37	7.08	24.00
		106/53	7.04	24.00
		242/61	6.99	24.00
		484/65	7.03	24.00
		Full	7.02	24.00
	5610	26/0	6.98	24.00
		52/37	6.95	24.00
		106/53	7.01	24.00
		242/61	7.06	24.00
		484/65	7.02	24.00
		Full	7.03	24.00
	5690	26/0	7.11	24.00
		52/37	7.13	24.00
		106/53	7.05	24.00
		242/61	7.02	24.00
		484/65	7.12	24.00
		Full	7.08	24.00

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	RU Config.	Max. Conducted Average Output Power (dBm)	
			Chain 0	Limit
802.11a	5745	/	7.69	30.00
	5785	/	8.27	30.00
	5825	/	7.98	30.00
802.11n ht20	5745	/	8.13	30.00
	5785	/	8.35	30.00
	5825	/	7.99	30.00
802.11n ht40	5755	/	7.87	30.00
	5795	/	7.95	30.00
802.11ac vht80	5775	/	8.02	30.00
802.11ax hew20	5745	26/0	7.99	30.00
		52/37	8.01	30.00
		106/53	7.89	30.00
		Full	7.94	30.00
	5785	26/0	8.12	30.00
		52/37	8.17	30.00
		106/53	8.09	30.00
		Full	8.14	30.00
	5825	26/8	7.85	30.00
		52/40	7.76	30.00
		106/54	7.81	30.00
		Full	7.82	30.00
802.11ax hew40	5755	26/0	8.11	30.00
		52/37	8.12	30.00
		106/53	8.03	30.00
		242/61	7.95	30.00
		Full	8.07	30.00
	5795	26/17	8.32	30.00
		52/44	8.26	30.00
		106/56	8.19	30.00
		242/62	8.21	30.00
		Full	8.24	30.00
802.11ax hew80	5775	26/0	8.36	30.00
		52/37	8.33	30.00
		106/53	8.27	30.00
		242/61	8.35	30.00
		484/65	8.36	30.00
		Full	8.31	30.00

4.4 Other RF Conducted Data

Please refer to Annex "2403A43118E-RF-00D Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2403A43118E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and
2403A43118E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2403A43118E-RF-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====