
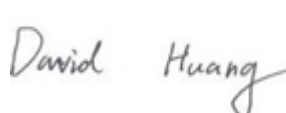



RF TEST REPORT



Report No.: 18070621-FCC-R2

Supersede Report No.: N/A

Applicant	TECNO MOBILE LIMITED	
Product Name	Mobile Phone	
Model No.	F4	
Serial No.	N/A	
Test Standard	FCC Part 15.247, ANSI C63.10: 2013	
Test Date	June 17 to July 01, 2018	
Issue Date	July 02, 2018	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Aaron Liang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	18070621-FCC-R2
Page	3 of 54

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE & RESTRICTED BAND	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED EMISSIONS & RESTRICTED BAND	42
ANNEX A. TEST INSTRUMENT.....	49
ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT.....	50
ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY.....	54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
18070621-FCC-R2	NONE	Original	July 02, 2018

2. Customer information

Applicant Name	TECNO MOBILE LIMITED
Applicant Add	ROOMS 05-15, 13A/F., SOUTH TOWER, WORLD FINANCE CENTRE, HARBOUR CITY, 17 CANTON ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG
Manufacturer	SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Manufacturer Add	1/-4/TH FLOOR,7TH FLOOR, 3RD BUILDING, PACIFIC INDUSTRIAL PARK, NO.2088, SHENYAN ROAD, YANTIAN DISTRICT, SHENZHEN , GUANGDONG ,CHINA

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	F4
Serial Model:	N/A
Date EUT received:	June 16, 2018
Test Date(s):	June 17 to July 01, 2018
Equipment Category :	DSS
Antenna Gain:	Bluetooth: 2dBi
Antenna Type:	PIFA antenna
Type of Modulation:	Bluetooth: GFSK, π /4DQPSK, 8DPSK
RF Operating Frequency (ies):	Bluetooth: 2402-2480 MHz
Max. Output Power:	-1.068dBm
Number of Channels:	Bluetooth: 79CH
Port:	Please refer to the user' s manual
Input Power:	Adapter : Model: A8-501000 Input: AC100-240V~50/60Hz,200mA Output: DC 5.0V, 1.0A Battery : Model: BL-30VT Rating: 3.85V, 3000mAh/3050mAh (min/typ) 11.55Wh/11.74Wh (min/typ)

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIF/GPS, the gain is 2dBi for Bluetooth/BLE/WIF/GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS/LTE Band II/IV/V/VII, the gain is -2.3dBi for GSM850, -0.9dBi for PCS1900, -2.3dBi for UMTS-FDD Band V, -0.8dBi for UMTS-FDD Band II, -0.8dBi for UMTS-FDD Band IV, the gain is -0.8dBi for LTE Band II, -0.8dBi for LTE Band IV, -2.3dBi for LTE Band V, -0.6dBi for LTE Band VII.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

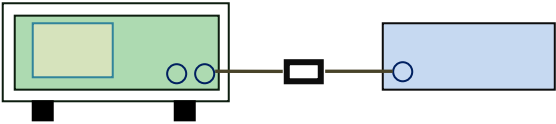Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.686	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.681	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.684	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.859	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.876	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.875	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.864	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.865	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.871	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

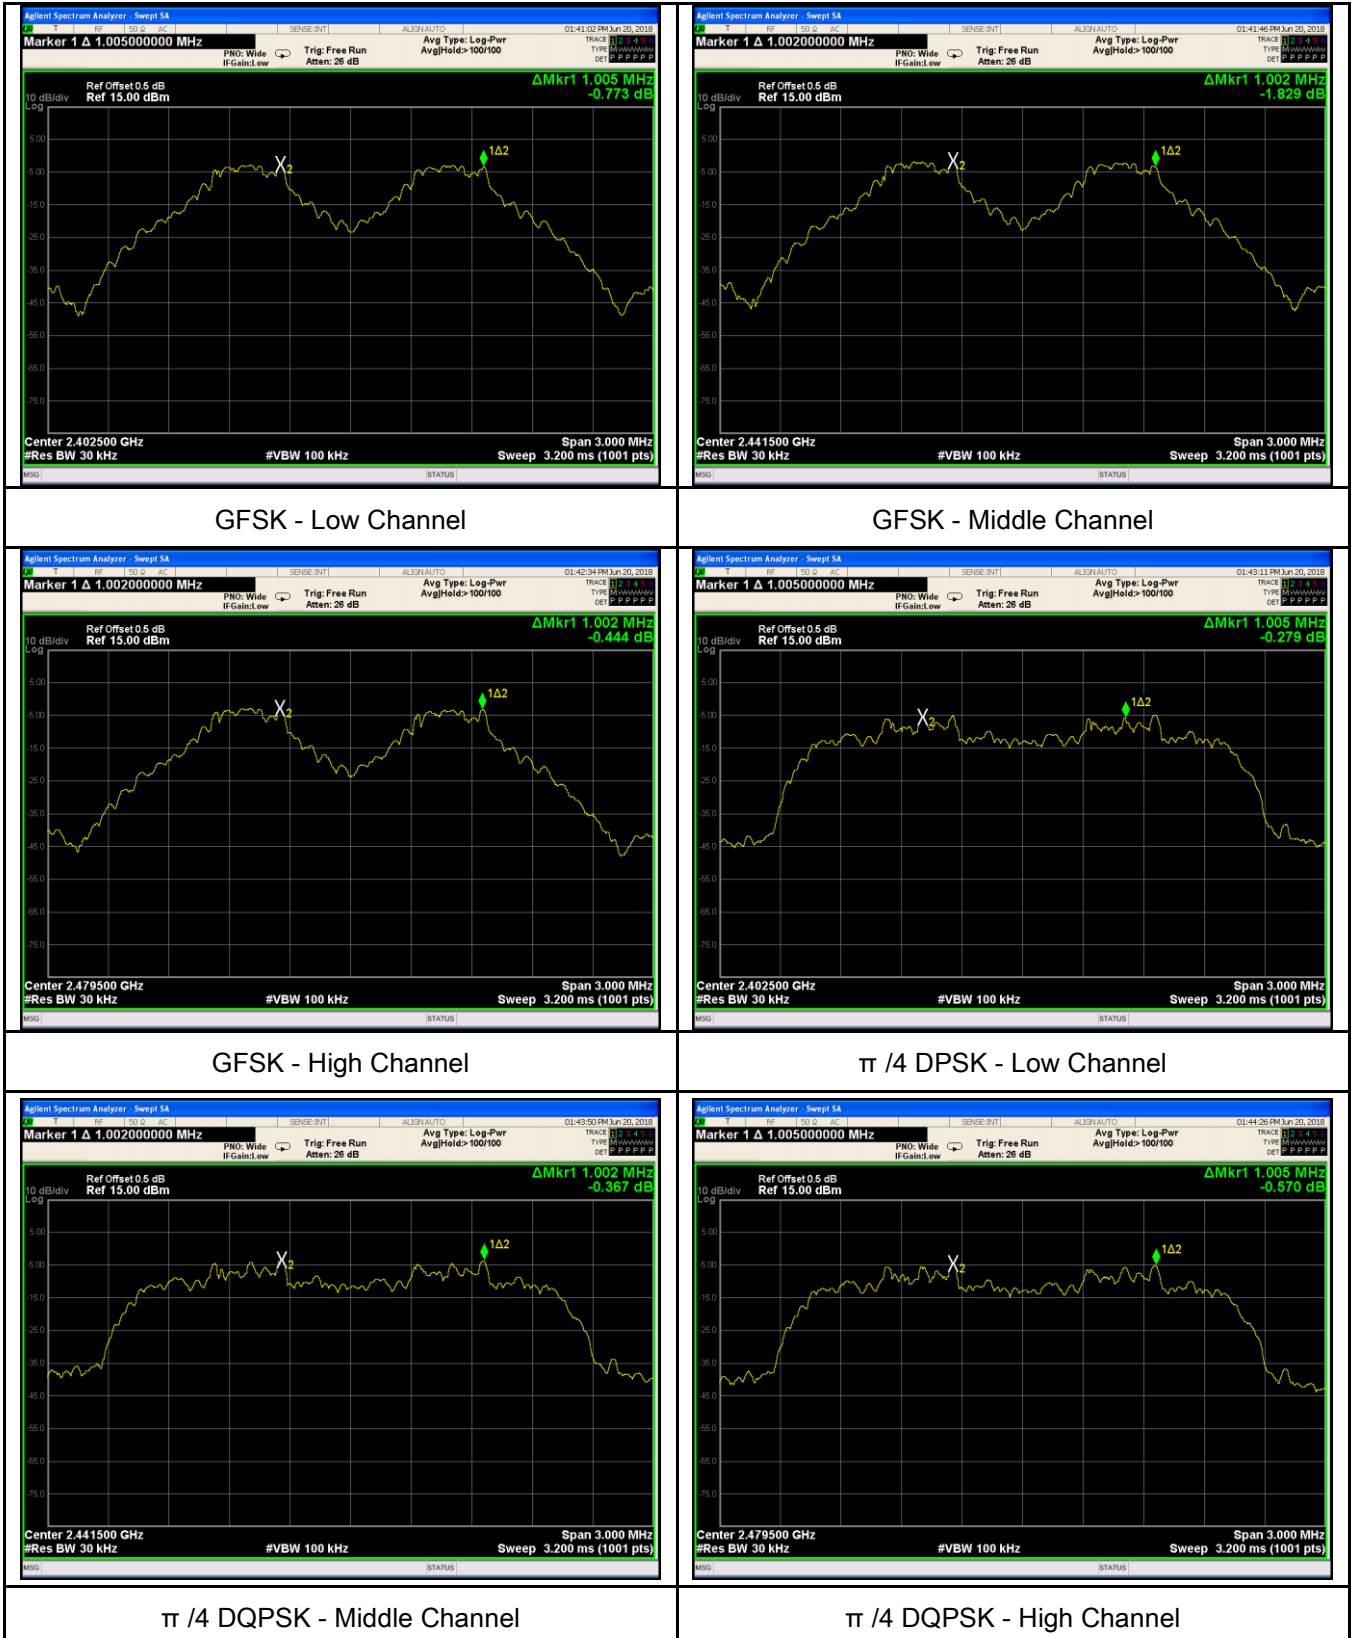




8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

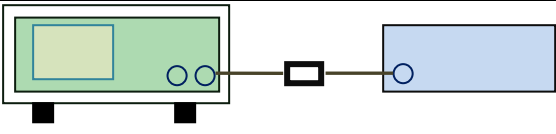Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.029	0.941
	Mid	2441	1.022	0.901
	High	2480	1.026	0.887
$\pi/4$ DQPSK	Low	2402	1.289	1.1716
	Mid	2441	1.314	1.1813
	High	2480	1.312	1.1824
8-DPSK	Low	2402	1.296	1.1855
	Mid	2441	1.298	1.1990
	High	2480	1.306	1.2019

Test Plots


20dB Bandwidth measurement result

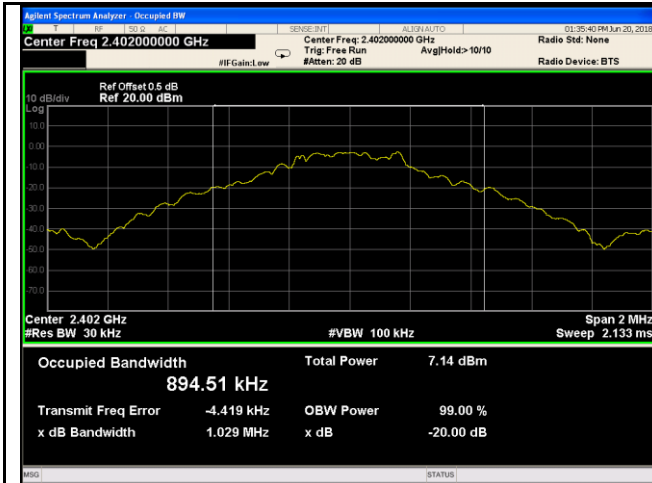


GFSK - Low Channel

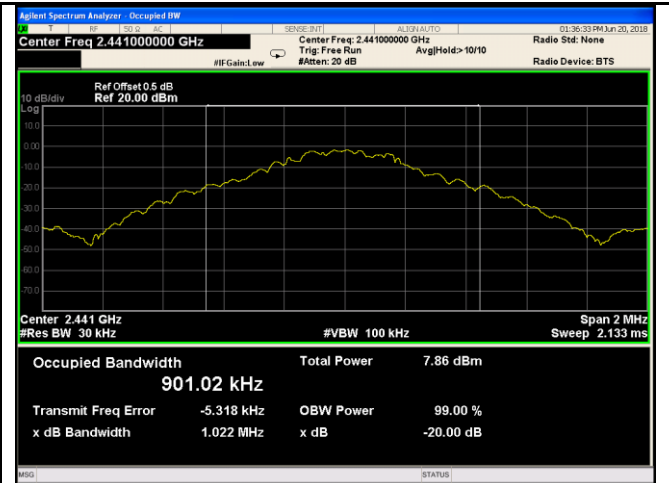


GFSK - Middle Channel

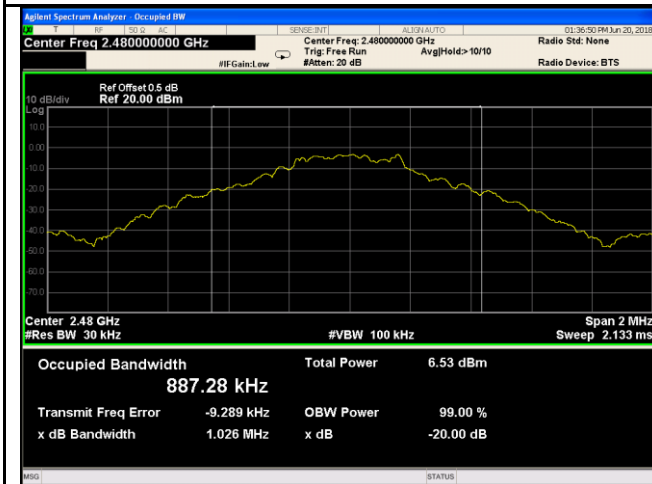


GFSK - High Channel

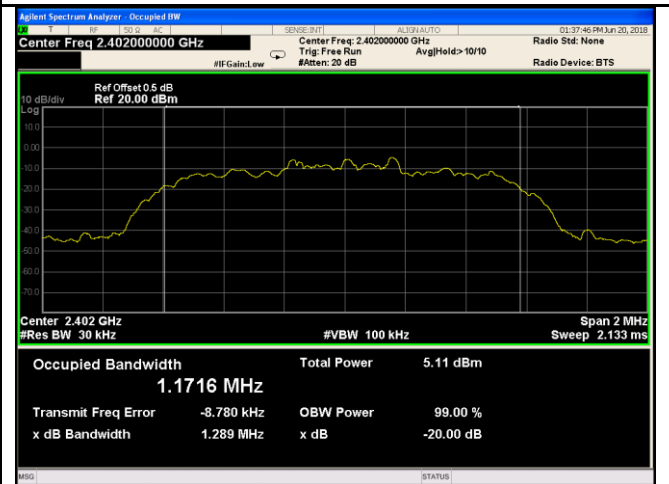


$\pi/4$ DPSK - Low Channel

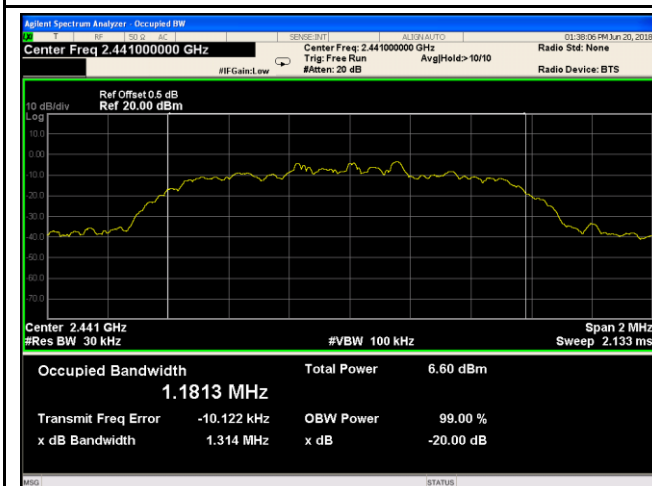


$\pi/4$ DQPSK - Middle Channel

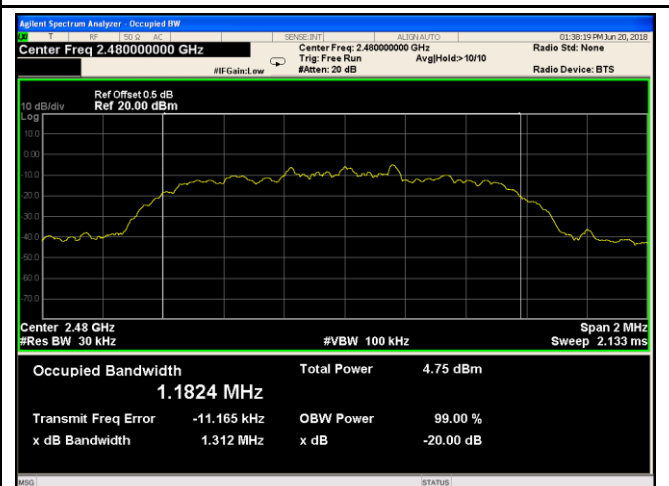


$\pi/4$ DQPSK - High Channel

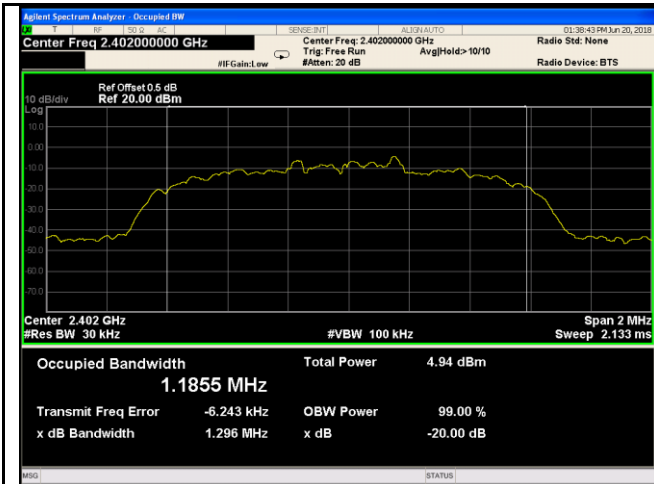

8DPSK - Low Channel

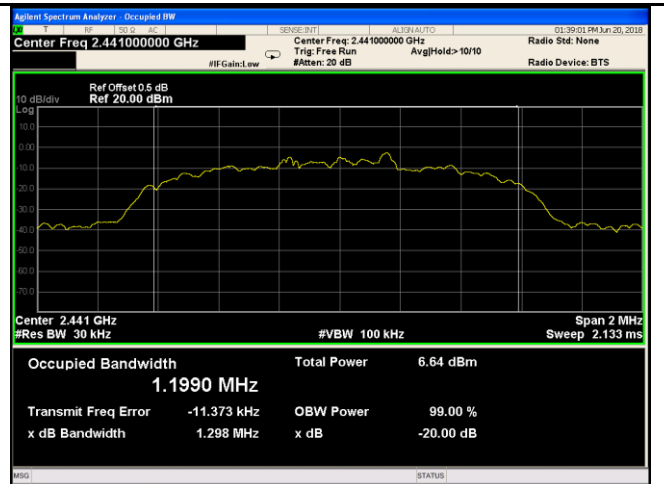

8DPSK - Middle Channel

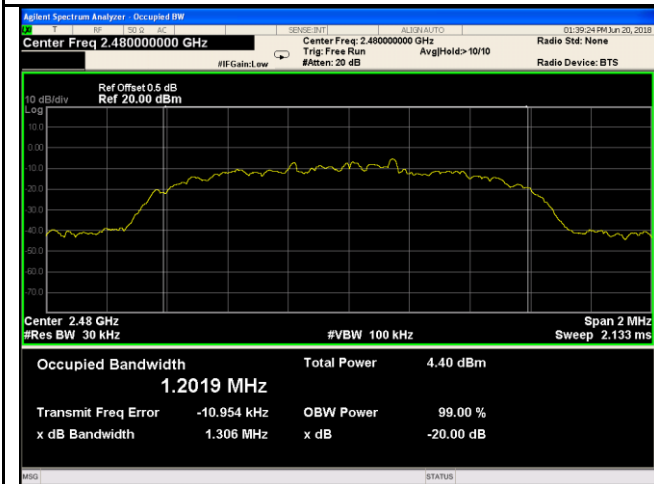


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	June 19, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

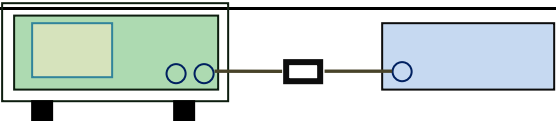Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	--

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Peak Output Power measurement result


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-1.404	125	Pass
		Mid	2441	-1.068	125	Pass
		High	2480	-2.179	125	Pass
	$\pi/4$ DQPSK	Low	2402	-2.171	125	Pass
		Mid	2441	-1.630	125	Pass
		High	2480	-2.837	125	Pass
	8-DPSK	Low	2402	-2.096	125	Pass
		Mid	2441	-1.457	125	Pass
		High	2480	-2.548	125	Pass

Test Plots


Output Power measurement result

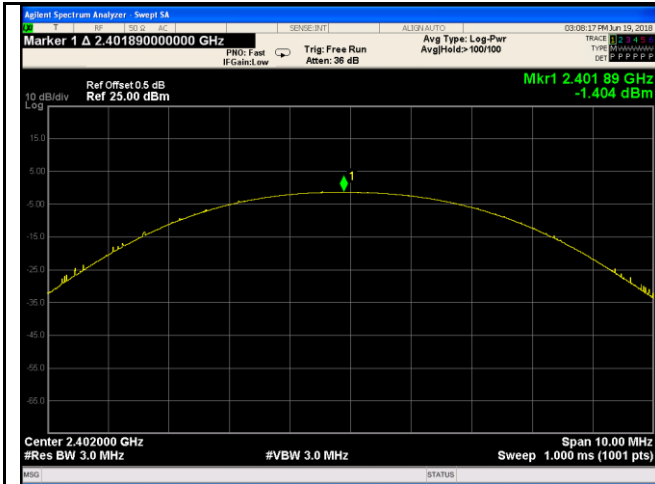


GFSK Output power - Low CH 2402

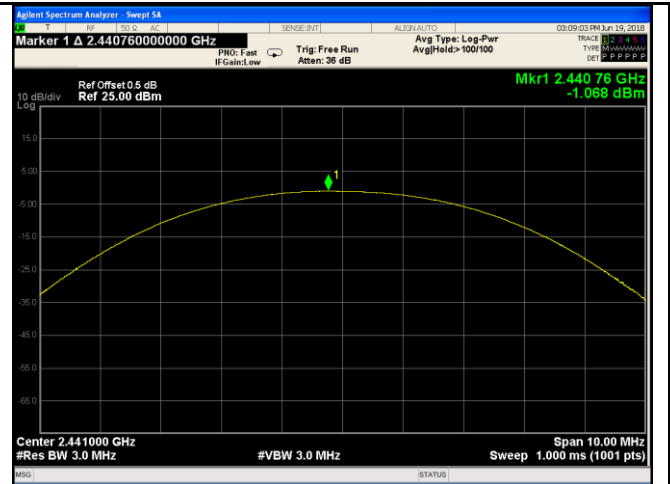


GFSK Output power - Mid CH 2441

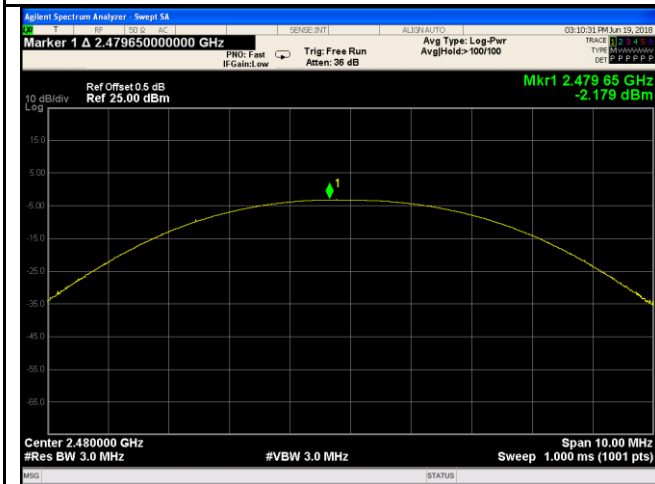


GFSK Output power - High CH 2480

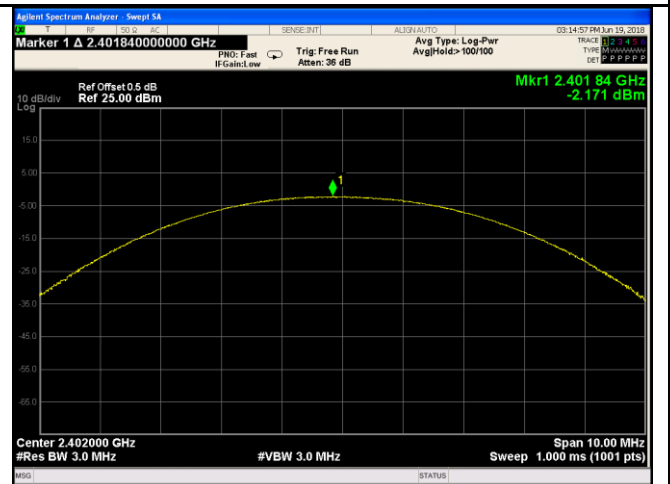


$\pi/4$ DQPSK Output power - Low CH 2402

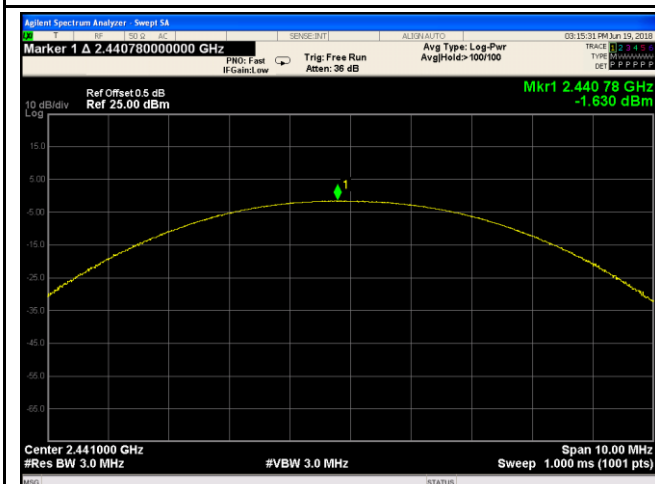


$\pi/4$ DQPSK Output power - Mid CH 2441

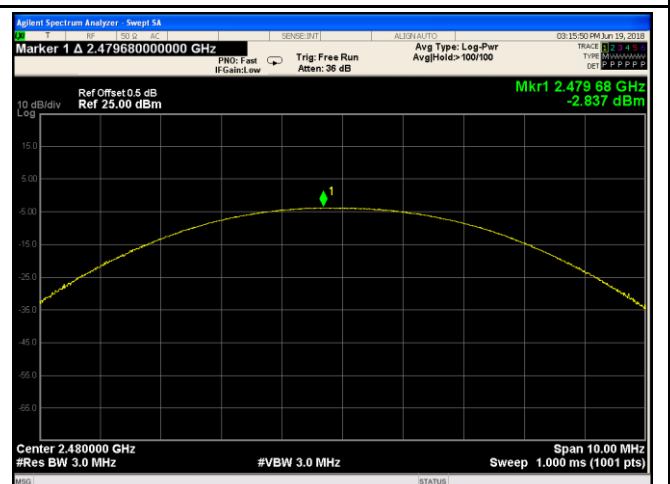


$\pi/4$ DQPSK Output power - High CH 2480

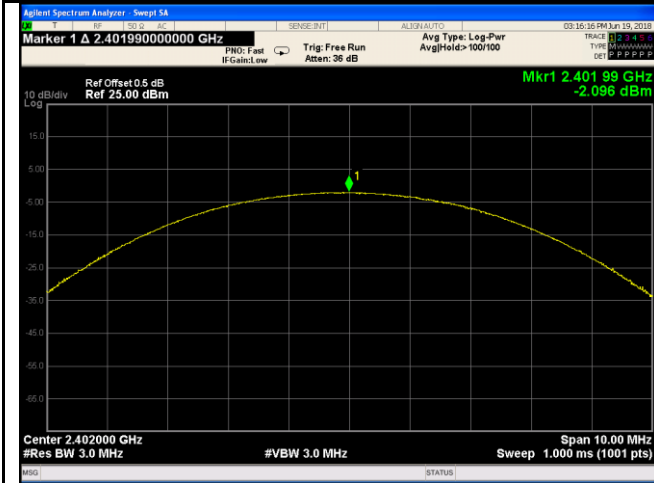


8DPSK Output power - Low CH 2402

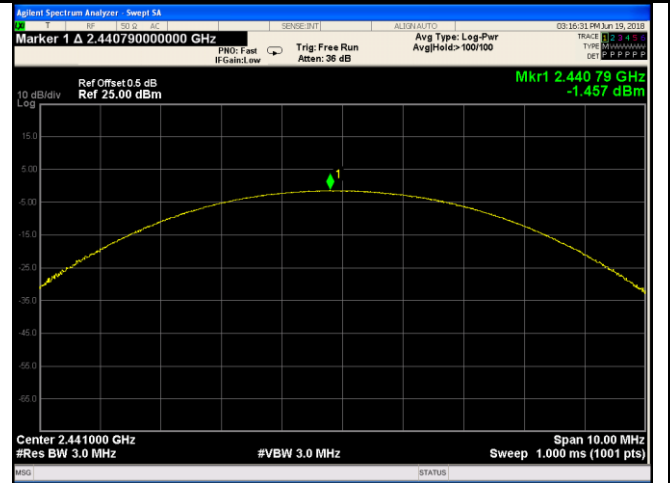

8DPSK Output power - Mid CH 2441

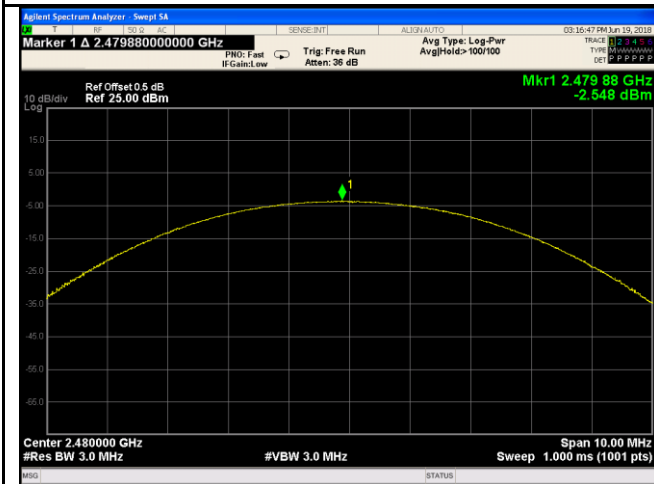


8DPSK Output power - High CH 2480



6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

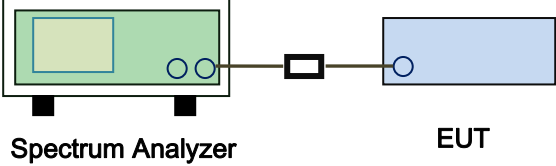Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

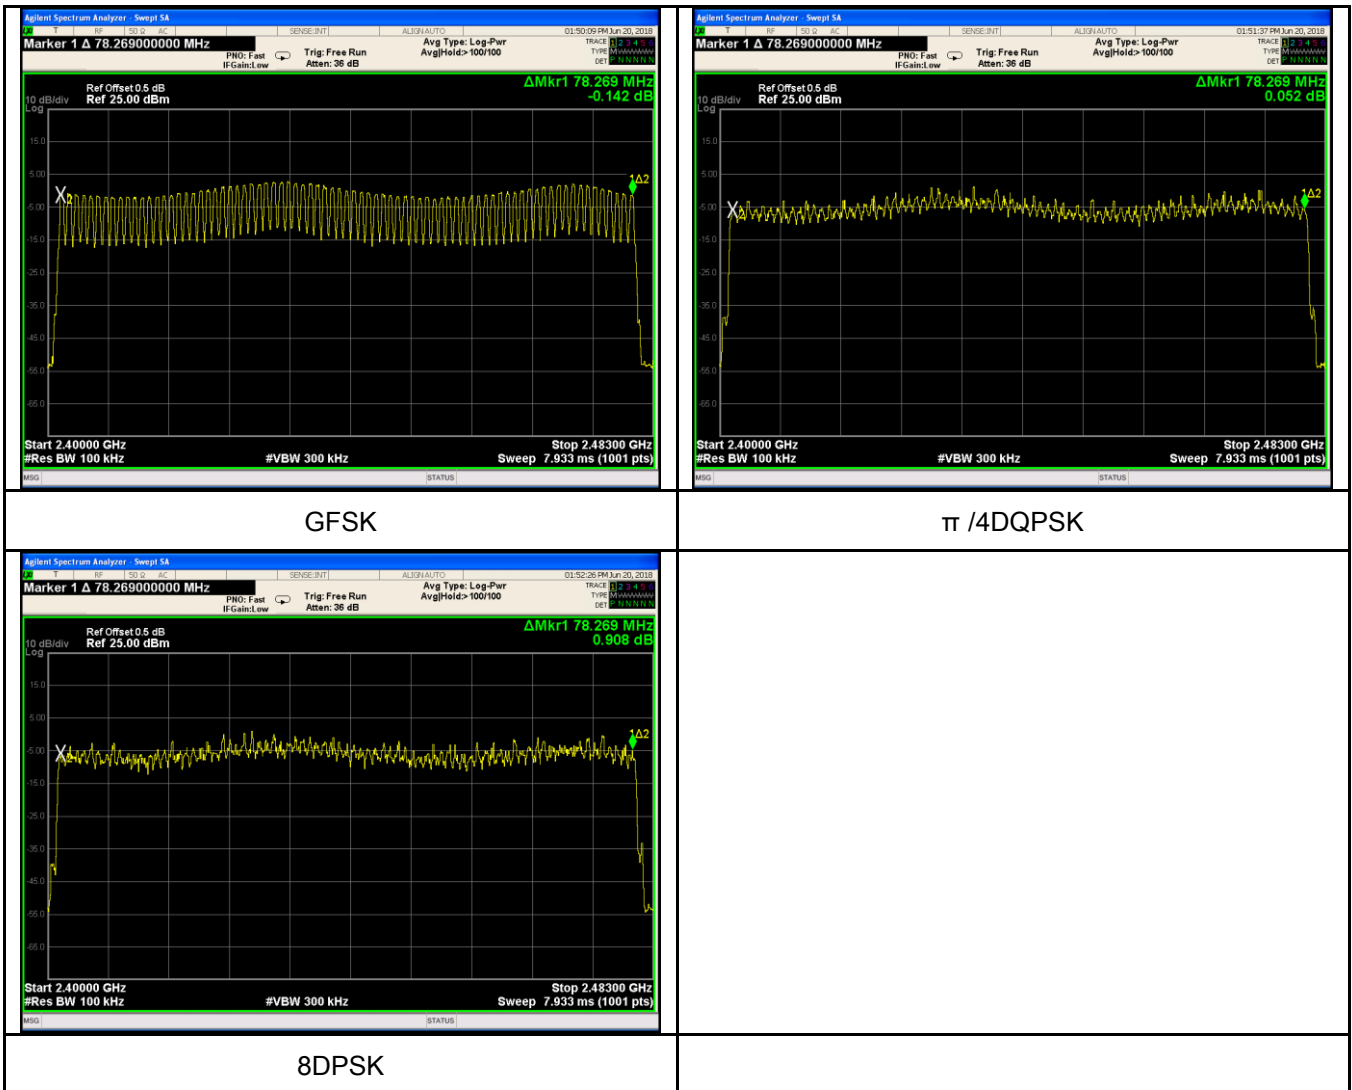

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

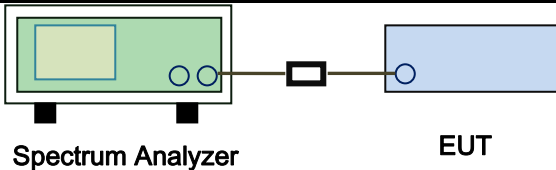Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.940	313.600	400	Pass
		Mid	2.920	311.467	400	Pass
		High	2.930	312.533	400	Pass
	π /4 DQPSK	Low	2.920	311.467	400	Pass
		Mid	2.970	316.800	400	Pass
		High	3.000	320.000	400	Pass
	8-DPSK	Low	2.950	314.667	400	Pass
		Mid	2.960	315.733	400	Pass
		High	2.930	312.533	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result

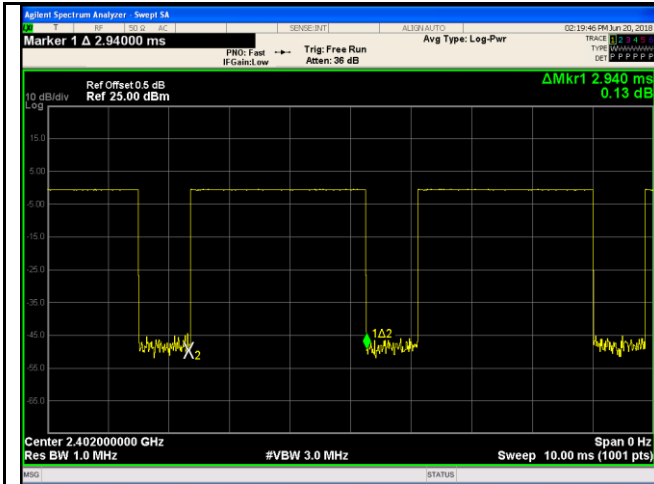


GFSK - Low CH 2402

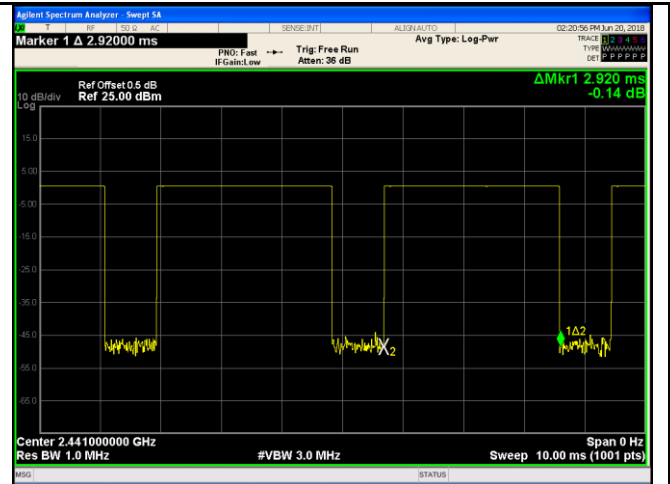


GFSK - Mid CH 2441

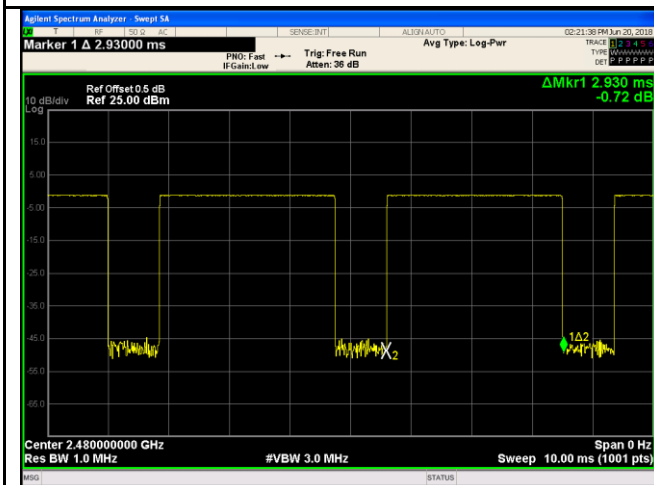


GFDK - High CH 2480

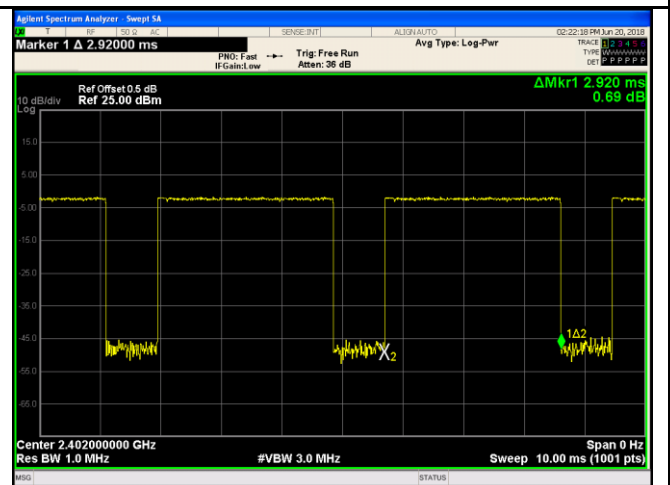


$\pi/4$ DQPSK - Low CH 2402

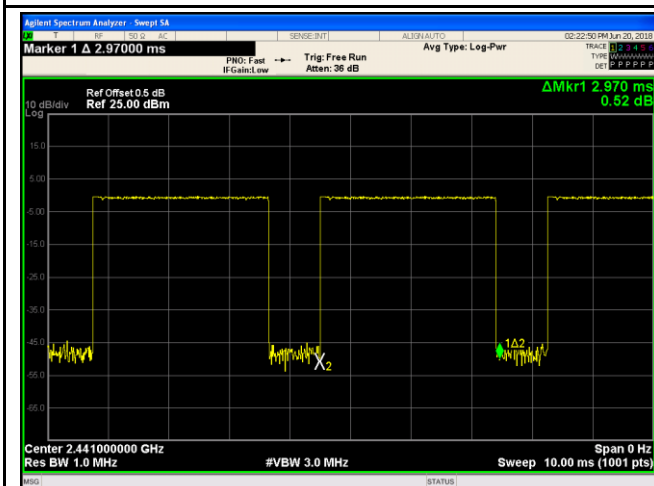


$\pi/4$ DQPSK - Mid CH 2441

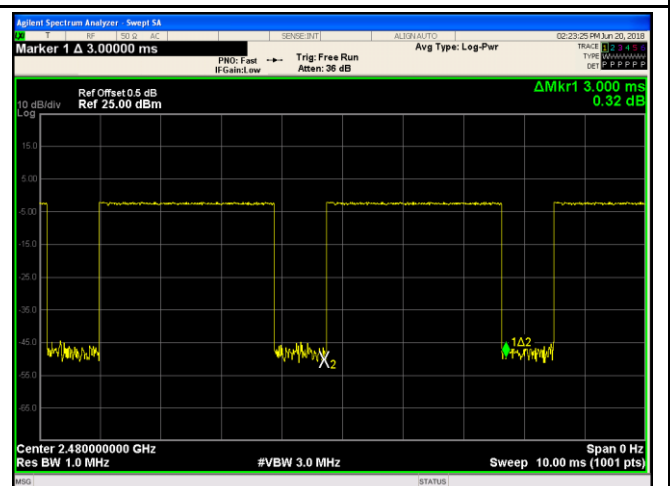


$\pi/4$ DQPSK - High CH 2480

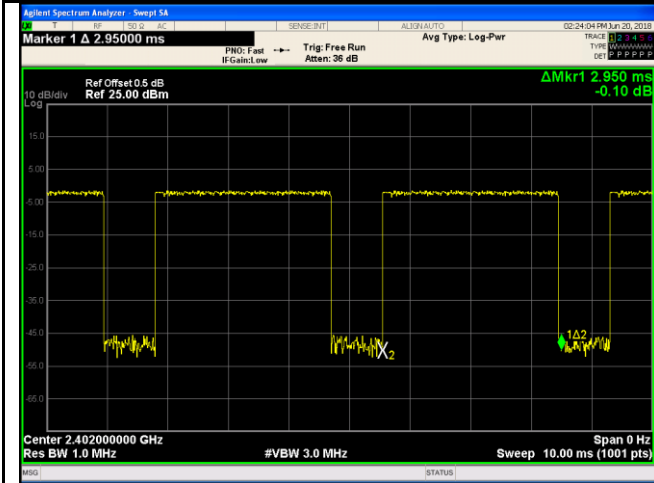


8DPSK - Low CH 2402

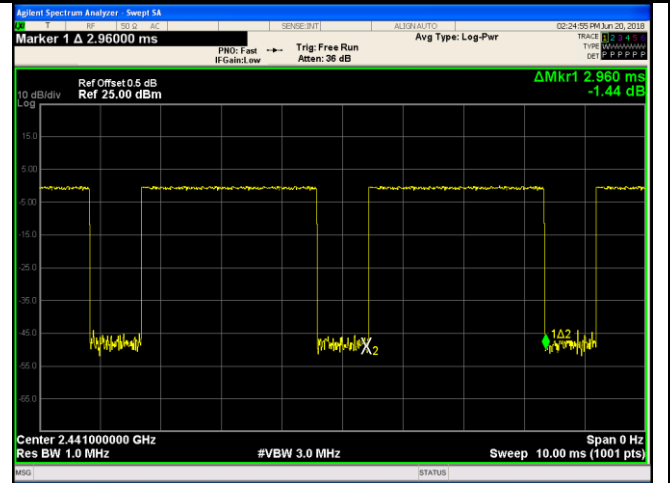

8DPSK - Mid CH 2441

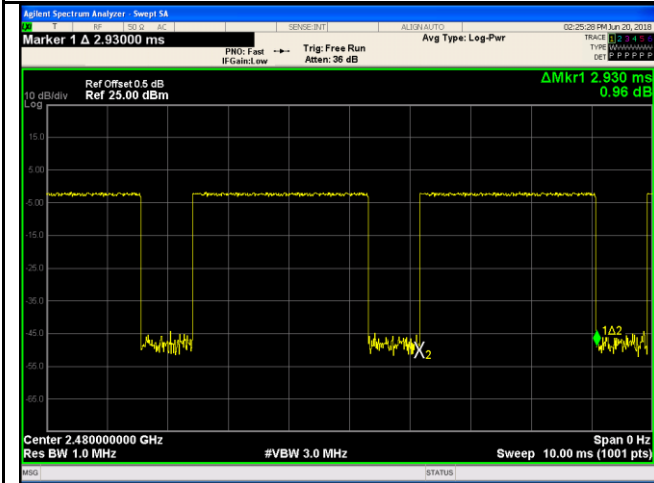

8DPSK - High CH 2480




6.7 Band Edge & Restricted Band

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1018mbar
Test date :	June 21, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

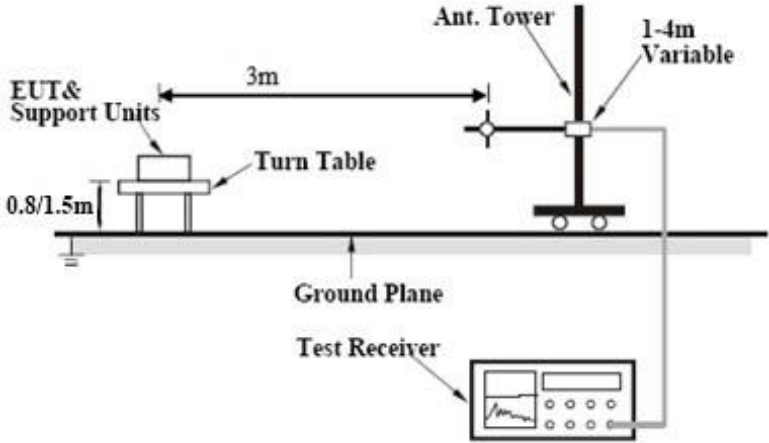Test Setup	
------------	--



Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots


GFSK Mode:

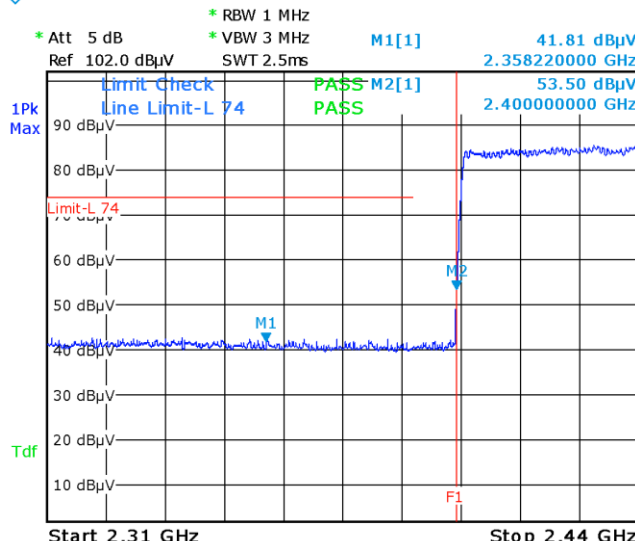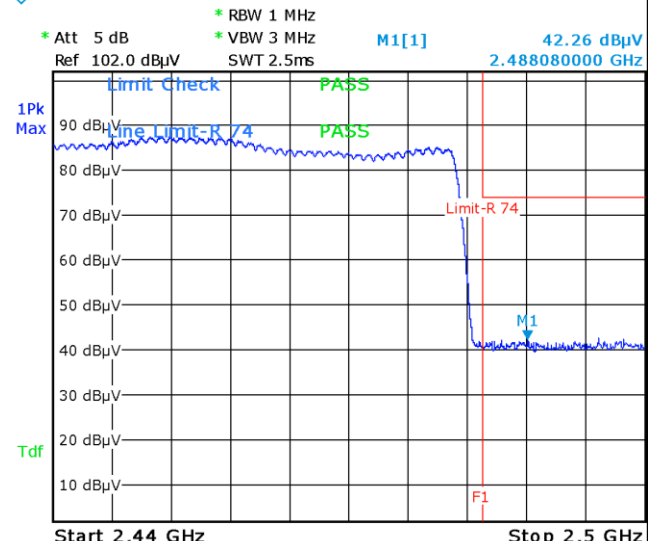 <p>* Att 5 dB * RBW 1 MHz * VBW 3 MHz * SWT 2.5ms Ref 102.0 dBµV M1[1] 41.81 dBµV 2.358220000 GHz M2[1] 53.50 dBµV 2.400000000 GHz Limit-L 74 Limit-L 74 M1 M2 F1 Start 2.31 GHz Stop 2.44 GHz Date: 21.JUN.2018 00:57:14</p>	 <p>* Att 5 dB * RBW 1 MHz * VBW 3 MHz * SWT 2.5ms Ref 102.0 dBµV M1[1] 42.26 dBµV 2.488080000 GHz Limit-R 74 Limit-R 74 M1 F1 Start 2.44 GHz Stop 2.5 GHz Date: 21.JUN.2018 00:58:46</p>
<p align="center">GFSK-Hopping Left Side-PK Note: F1 is frequency 2400MHz</p>	<p align="center">GFSK-Hopping Right Side-PK Note: F1 is frequency 2483.5MHz</p>
<p align="center">Note: (no need if PK value less than the AV limit)</p>	<p align="center">Note: (no need if PK value less than the AV limit)</p>
<p align="center">GFSK-Hopping Left Side-AV</p>	<p align="center">GFSK-Hopping Right Side-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

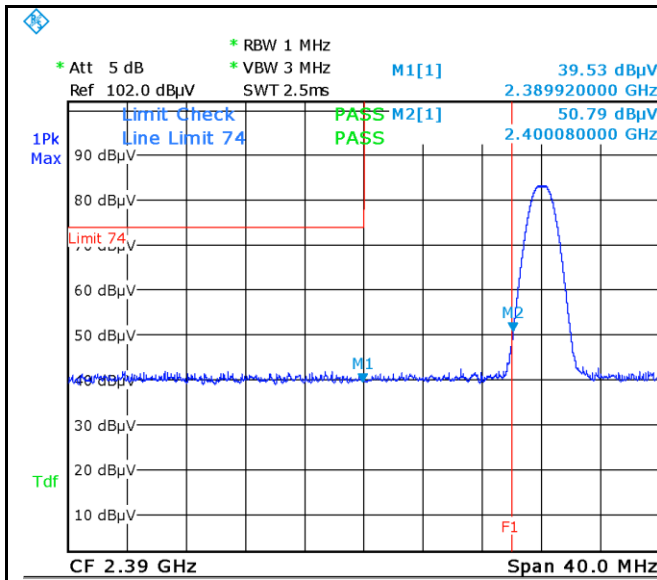

Date: 21.JUN.2018 00:45:27

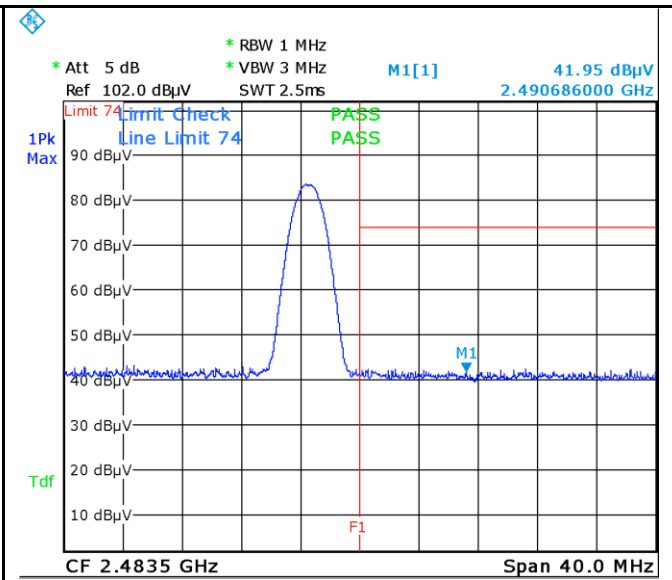

Date: 21.JUN.2018 00:48:39

GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)



Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV



GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

π / 4 DQPSK Mode:

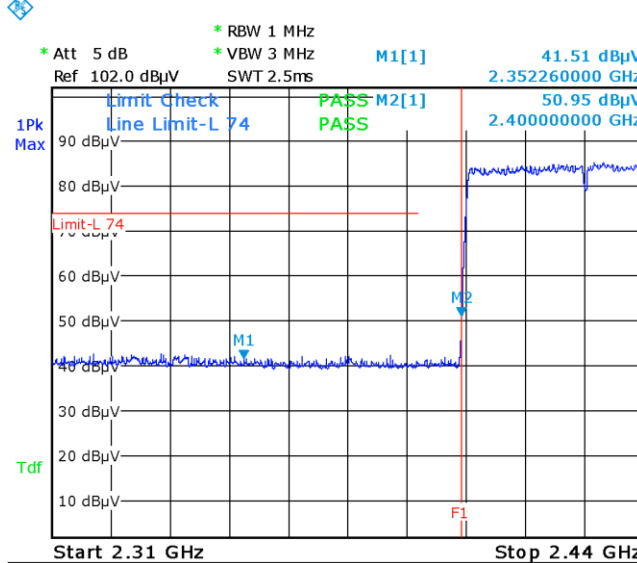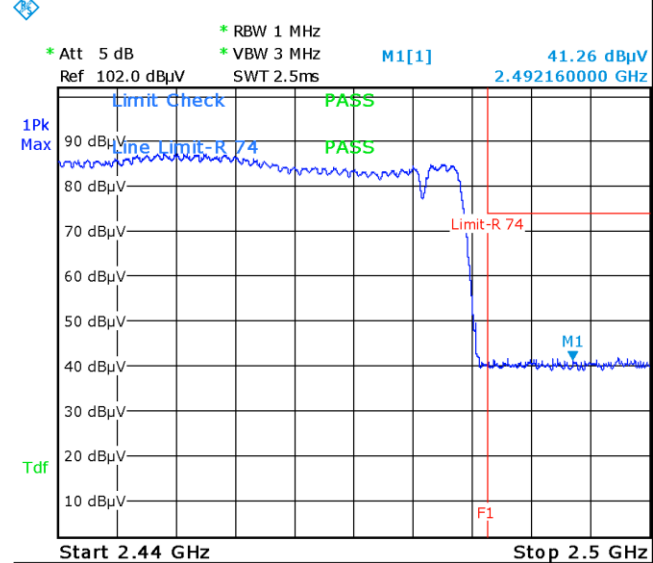 <p>* Att 5 dB * RBW 1 MHz * VBW 3 MHz M1[1] 41.51 dBμV Ref 102.0 dBμV SWT 2.5ms 2.352260000 GHz Limit Check Line Limit-L 74 PASS M2[1] 50.95 dBμV PASS 2.400000000 GHz 1Pk Max 90 dBμV 80 dBμV Limit-L 74 60 dBμV 50 dBμV M1 40 dBμV Tdf 30 dBμV 20 dBμV 10 dBμV Start 2.31 GHz Stop 2.44 GHz Date: 21.JUN.2018 00:57:32</p>	 <p>* Att 5 dB * RBW 1 MHz * VBW 3 MHz M1[1] 41.26 dBμV Ref 102.0 dBμV SWT 2.5ms 2.492160000 GHz Limit Check Line Limit-R 74 PASS 1Pk Max 90 dBμV 80 dBμV Limit-R 74 70 dBμV 60 dBμV 74 M1 40 dBμV Tdf 30 dBμV 20 dBμV 10 dBμV Start 2.44 GHz Stop 2.5 GHz Date: 21.JUN.2018 00:58:57</p>
<p>π / 4 DQPSK-Hopping Left Side-PK Note: F1 is frequency 2400MHz</p>	<p>π / 4 DQPSK-Hopping Right Side-PK Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>π / 4 DQPSK-Hopping Left-AV</p>	<p>π / 4 DQPSK-Hopping Right-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

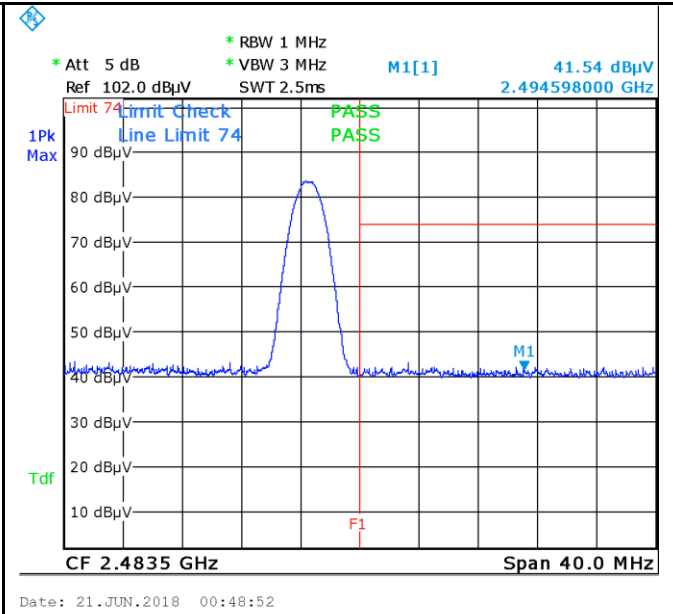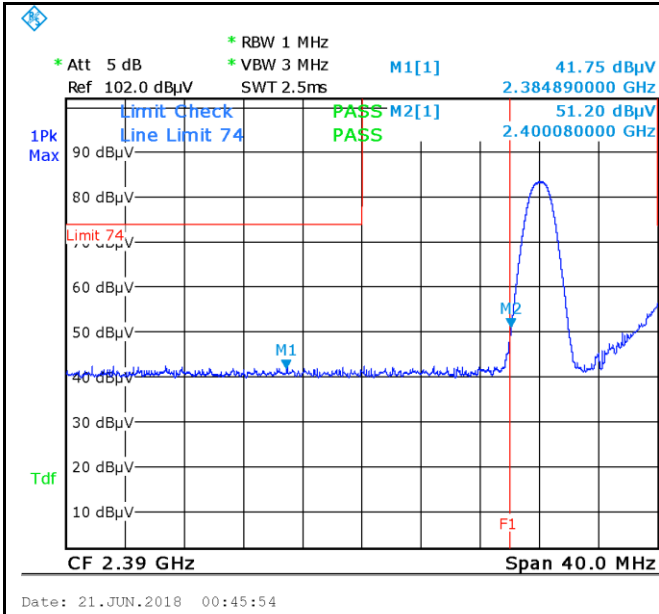

π /4 DQPSK-Left Side-PK
Note: F1 is frequency 2400MHz

π /4 DQPSK-Right Side-PK
Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)



Note: (no need if PK value less than the AV limit)

π /4 DQPSK-Left Side-AV


π /4 DQPSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.


8-DPSK Mode:

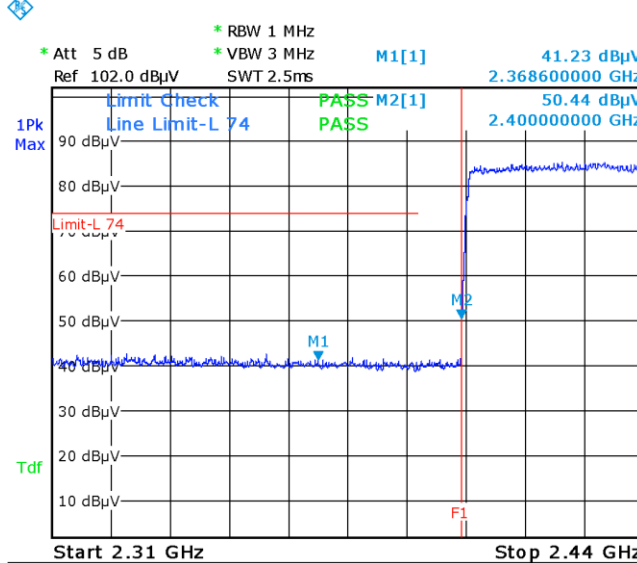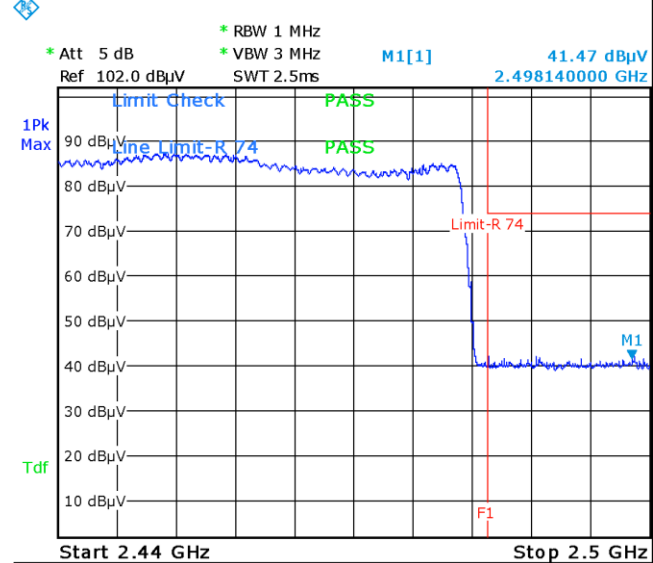 <p> * RBW 1 MHz * VBW 3 MHz * Att 5 dB Ref 102.0 dBµV SWT 2.5ms M1[1] 41.23 dBµV 2.368600000 GHz 50.44 dBµV 2.400000000 GHz Limit-L 74 Line Limit-L 74 PASS M2[1] PASS Start 2.31 GHz Stop 2.44 GHz Date: 21.JUN.2018 00:57:52 </p>	 <p> * RBW 1 MHz * VBW 3 MHz * Att 5 dB Ref 102.0 dBµV SWT 2.5ms M1[1] 41.47 dBµV 2.498140000 GHz Limit-R 74 Line Limit-R 74 PASS Start 2.44 GHz Stop 2.5 GHz Date: 21.JUN.2018 00:59:12 </p>
<p align="center">8DPSK-Hopping Left Side-PK Note: F1 is frequency 2400MHz</p>	<p align="center">8DPSK-Hopping Right Side-PK Note: F1 is frequency 2483.5MHz</p>
<p align="center">Note: (no need if PK value less than the AV limit)</p>	<p align="center">Note: (no need if PK value less than the AV limit)</p>
<p align="center">8DPSK-Hopping Left-AV</p>	<p align="center">8DPSK-Hopping Right-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

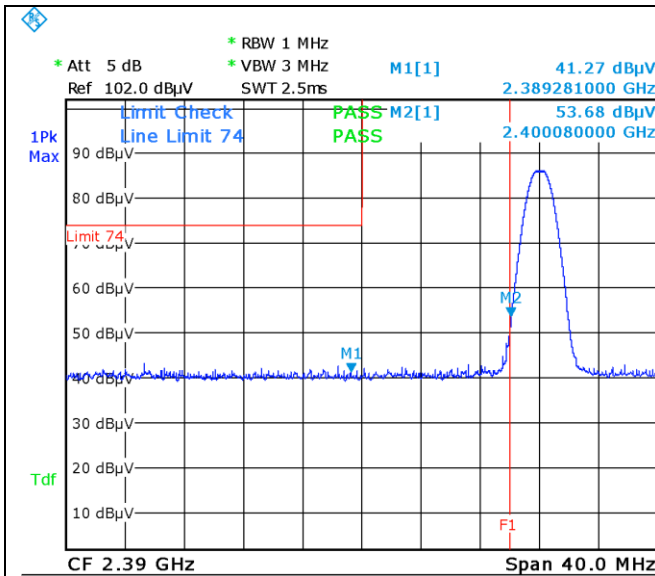

Date: 21.JUN.2018 00:46:23

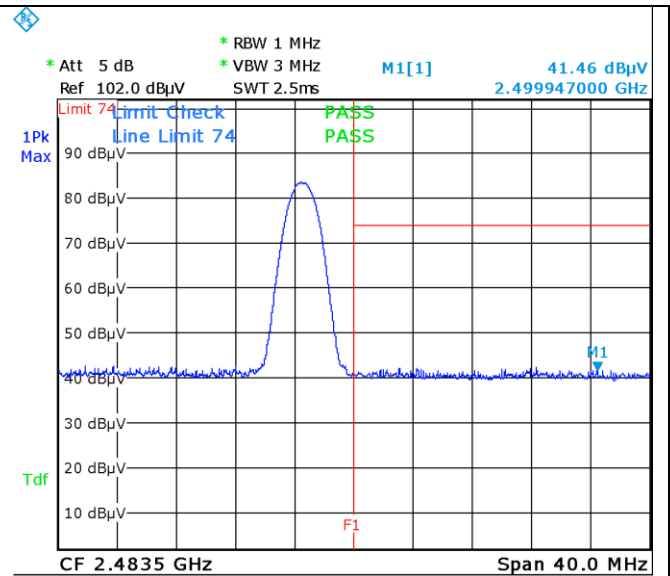

Date: 21.JUN.2018 00:49:05

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

6.8 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dB μ V)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

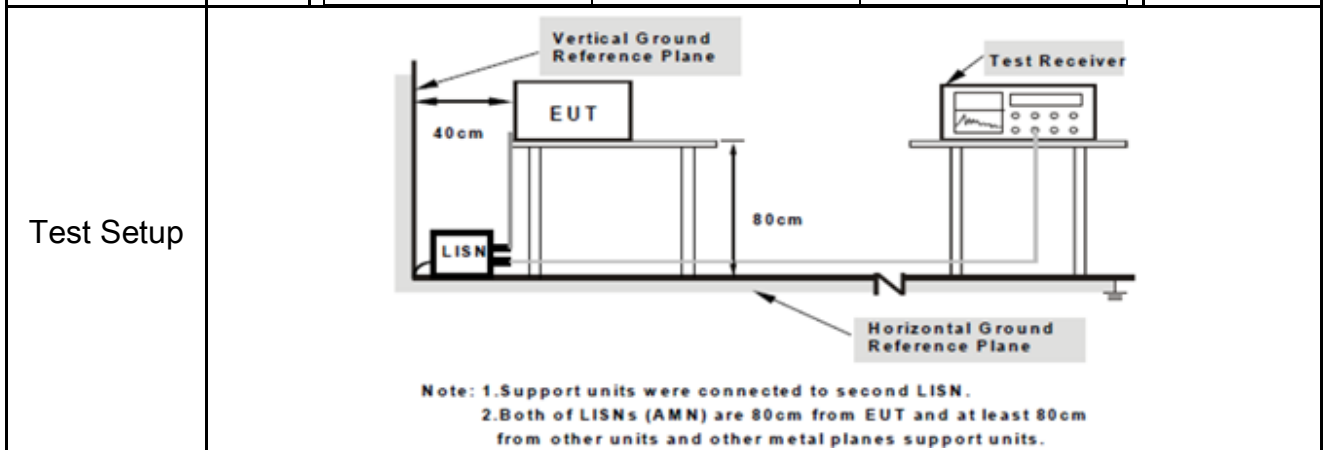


Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

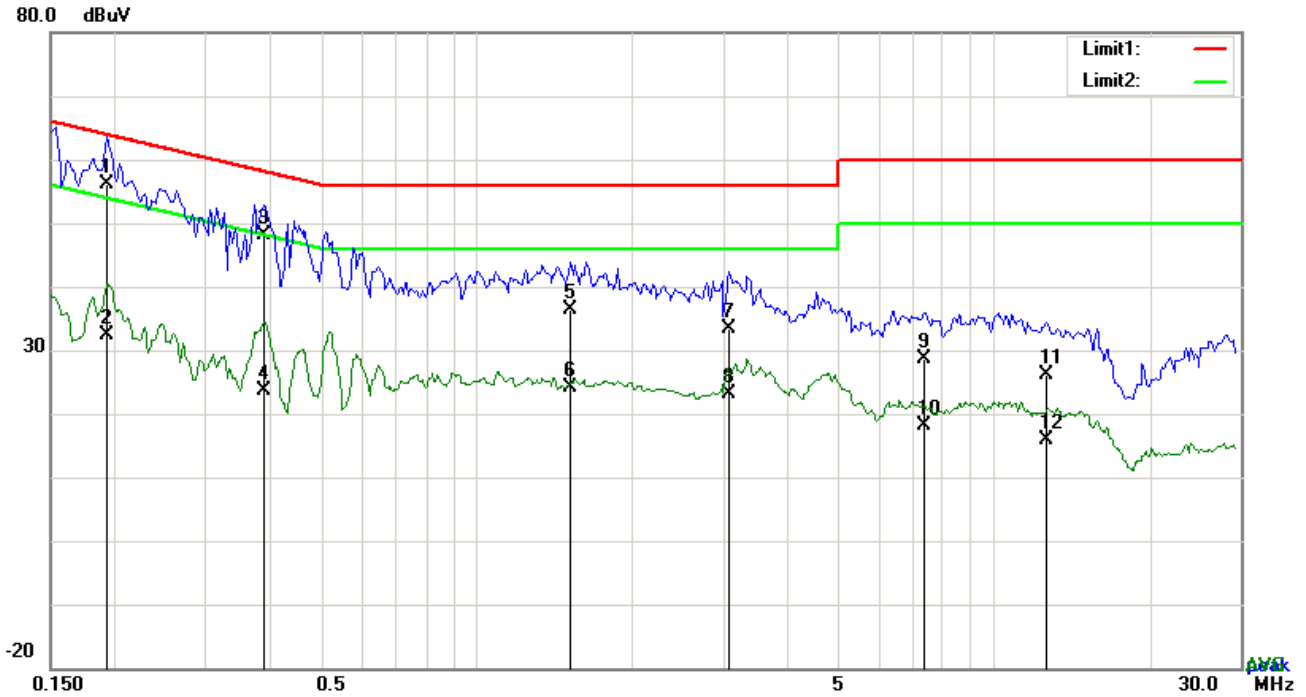


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1929	46.08	QP	10.03	56.11	63.91	-7.80
2	L1	0.1929	22.31	AVG	10.03	32.34	53.91	-21.57
3	L1	0.3879	38.13	QP	10.03	48.16	58.11	-9.95
4	L1	0.3879	13.65	AVG	10.03	23.68	48.11	-24.43
5	L1	1.5189	26.46	QP	10.04	36.50	56.00	-19.50
6	L1	1.5189	14.00	AVG	10.04	24.04	46.00	-21.96
7	L1	3.0819	23.33	QP	10.06	33.39	56.00	-22.61
8	L1	3.0819	12.95	AVG	10.06	23.01	46.00	-22.99
9	L1	7.3602	18.52	QP	10.11	28.63	60.00	-31.37
10	L1	7.3602	7.95	AVG	10.11	18.06	50.00	-31.94
11	L1	12.6447	16.04	QP	10.19	26.23	60.00	-33.77
12	L1	12.6447	5.58	AVG	10.19	15.77	50.00	-34.23

Test Mode:	Bluetooth Mode
-------------------	-----------------------

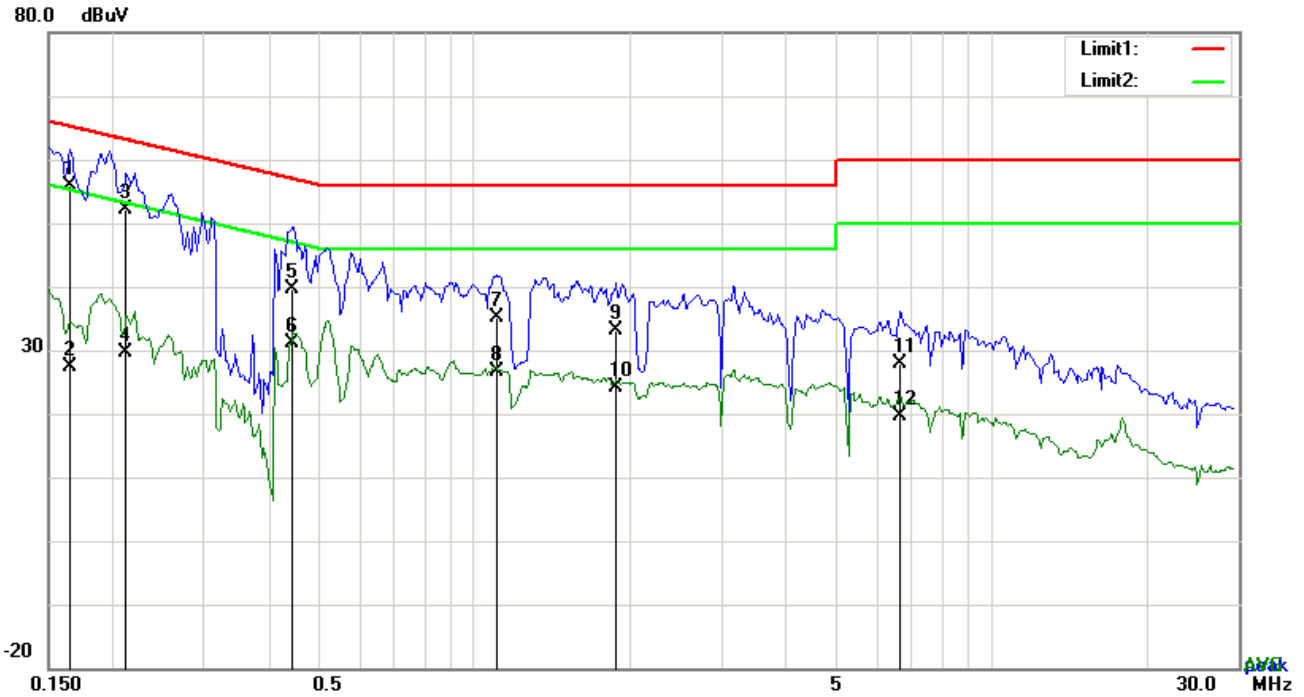


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1656	45.80	QP	10.02	55.82	65.18	-9.36
2	N	0.1656	17.38	AVG	10.02	27.40	55.18	-27.78
3	N	0.2124	42.13	QP	10.02	52.15	63.11	-10.96
4	N	0.2124	19.56	AVG	10.02	29.58	53.11	-23.53
5	N	0.4464	29.64	QP	10.02	39.66	56.94	-17.28
6	N	0.4464	21.14	AVG	10.02	31.16	46.94	-15.78
7	N	1.1094	25.17	QP	10.03	35.20	56.00	-20.80
8	N	1.1094	16.53	AVG	10.03	26.56	46.00	-19.44
9	N	1.8816	22.98	QP	10.04	33.02	56.00	-22.98
10	N	1.8816	14.18	AVG	10.04	24.22	46.00	-21.78
11	N	6.6543	17.78	QP	10.09	27.87	60.00	-32.13
12	N	6.6543	9.53	AVG	10.09	19.62	50.00	-30.38

Test Mode:	Bluetooth Mode
-------------------	-----------------------

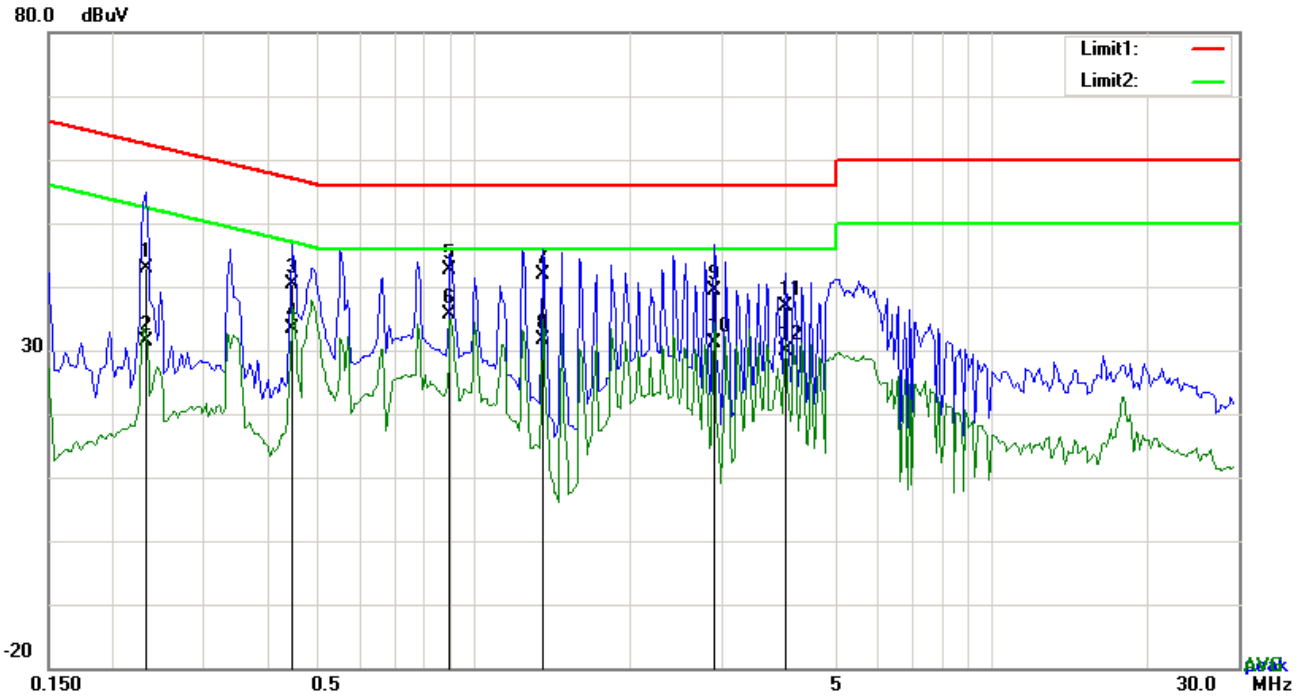


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2319	32.97	QP	10.03	43.00	62.38	-19.38
2	L1	0.2319	21.43	AVG	10.03	31.46	52.38	-20.92
3	L1	0.4425	30.38	QP	10.03	40.41	57.01	-16.60
4	L1	0.4425	23.29	AVG	10.03	33.32	47.01	-13.69
5	L1	0.8988	32.52	QP	10.03	42.55	56.00	-13.45
6	L1	0.8988	25.65	AVG	10.03	35.68	46.00	-10.32
7	L1	1.3551	31.77	QP	10.03	41.80	56.00	-14.20
8	L1	1.3551	21.59	AVG	10.03	31.62	46.00	-14.38
9	L1	2.9112	29.41	QP	10.05	39.46	56.00	-16.54
10	L1	2.9112	21.01	AVG	10.05	31.06	46.00	-14.94
11	L1	3.9984	26.93	QP	10.07	37.00	56.00	-19.00
12	L1	3.9984	19.78	AVG	10.07	29.85	46.00	-16.15

Test Mode:	Bluetooth Mode
-------------------	-----------------------

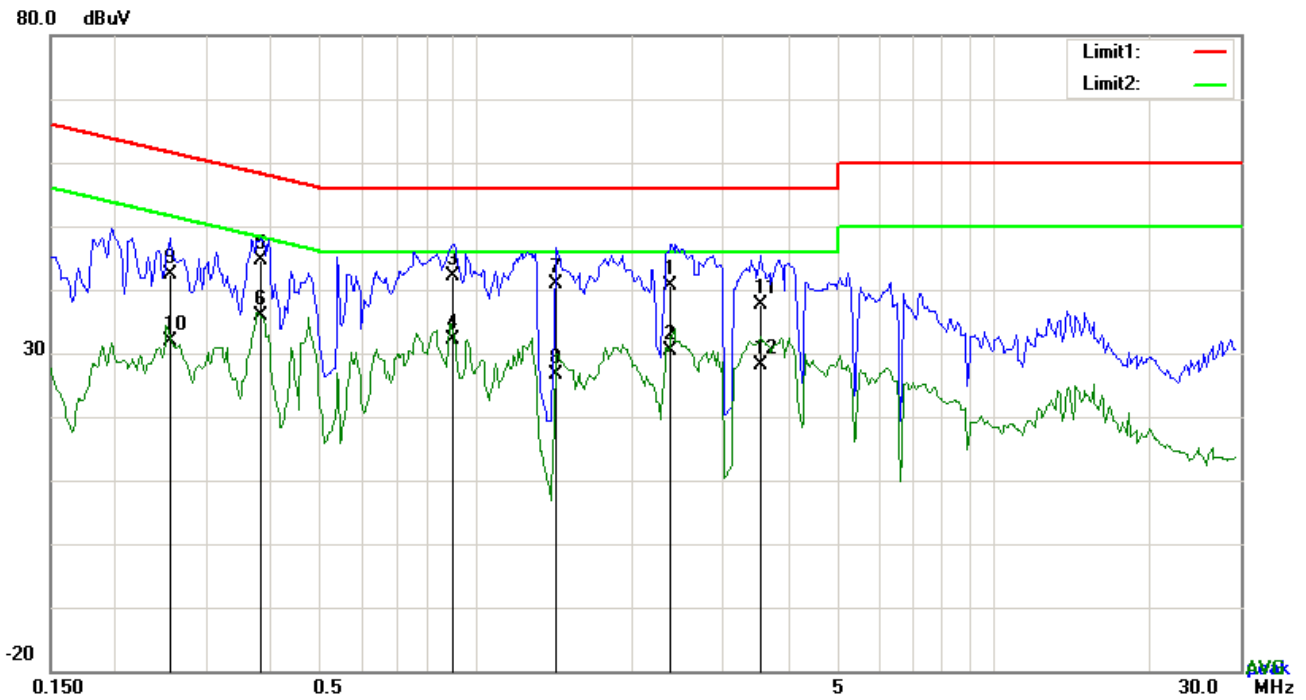

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2553	32.42	QP	10.02	42.44	61.58	-19.14
2	N	0.2553	21.78	AVG	10.02	31.80	51.58	-19.78
3	N	0.3840	34.57	QP	10.02	44.59	58.19	-13.60
4	N	0.3840	25.79	AVG	10.02	35.81	48.19	-12.38
5	N	0.9027	32.18	QP	10.03	42.21	56.00	-13.79
6	N	0.9027	22.00	AVG	10.03	32.03	46.00	-13.97
7	N	1.4253	30.94	QP	10.03	40.97	56.00	-15.03
8	N	1.4253	16.50	AVG	10.03	26.53	46.00	-19.47
9	N	2.3808	30.54	QP	10.04	40.58	56.00	-15.42
10	N	2.3808	20.31	AVG	10.04	30.35	46.00	-15.65
11	N	3.5460	27.69	QP	10.06	37.75	56.00	-18.25
12	N	3.5460	18.02	AVG	10.06	28.08	46.00	-17.92


6.9 Radiated Emissions & Restricted Band

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1014mbar
Test date :	June 20, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>																
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ($\mu\text{V}/\text{m}$)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
216 960	200																		
Above 960	500																		

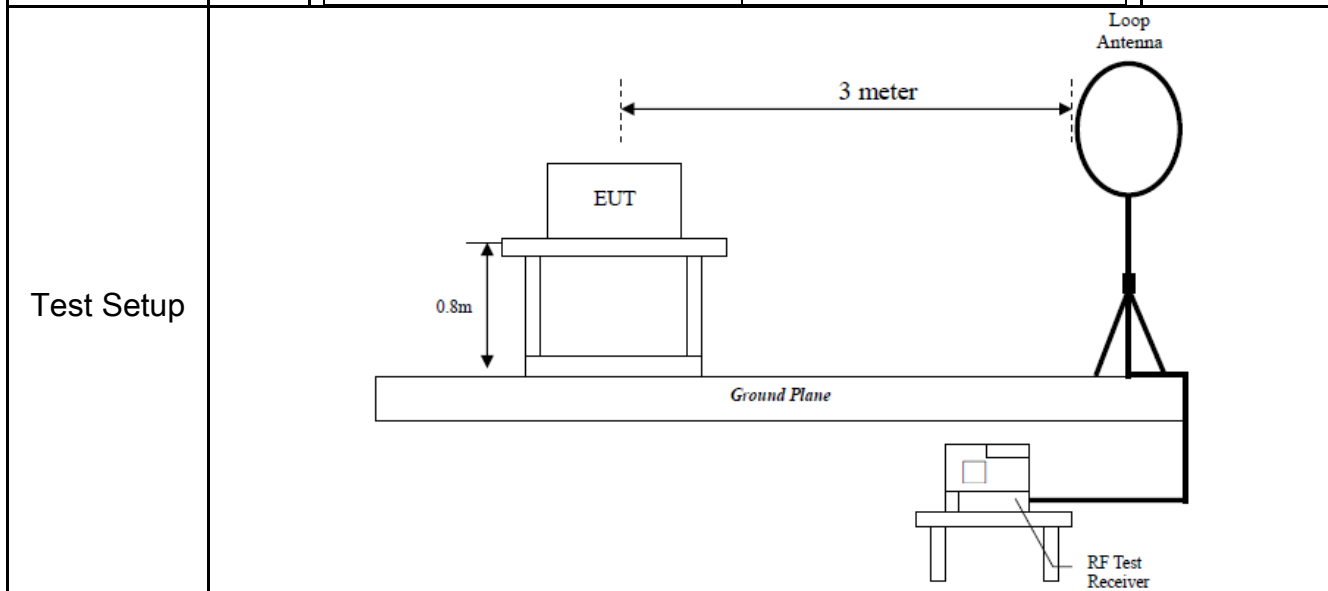

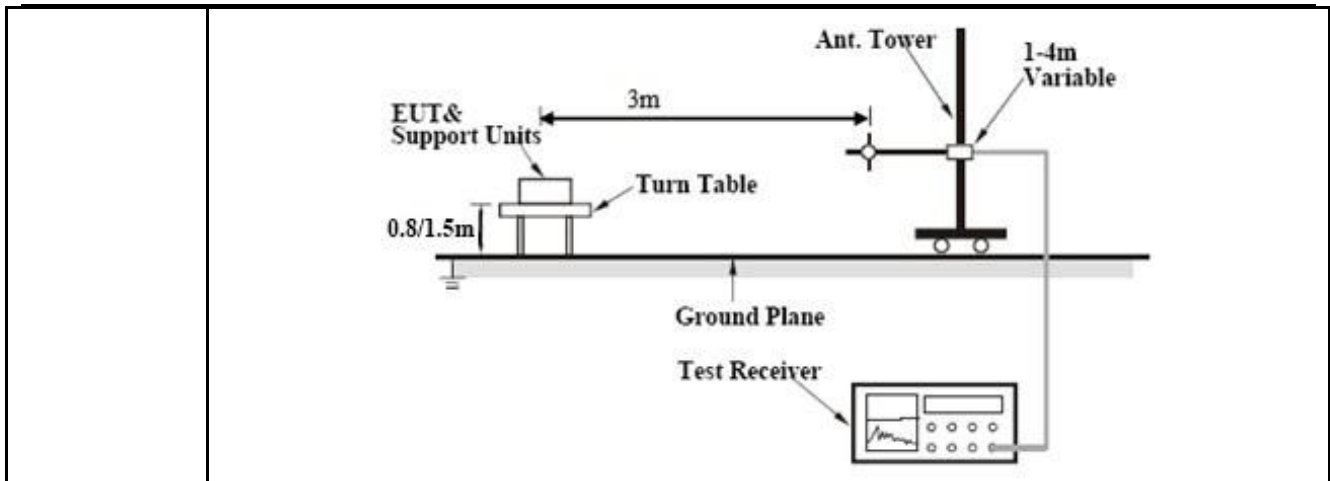

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Remark

Result Pass Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Result:

Test Mode:	Transmitting Mode
-------------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode: Bluetooth Mode

30MHz -1GHz

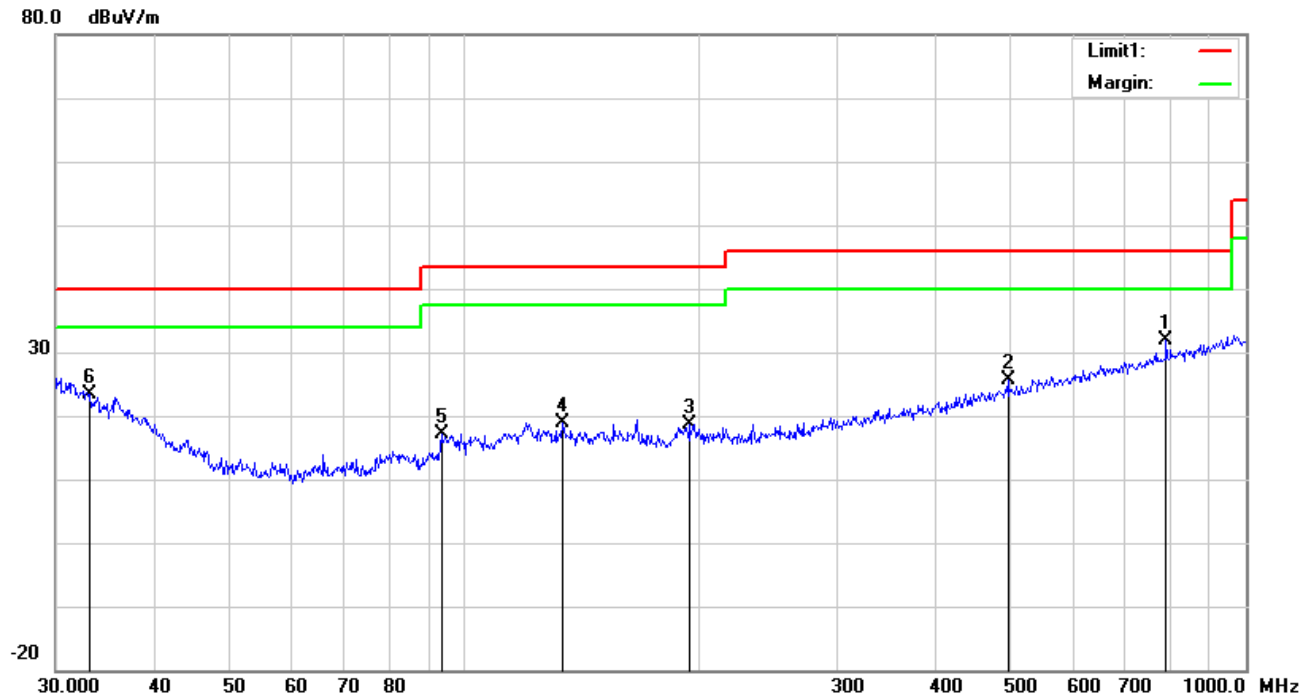


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	H	790.6188	28.78	peak	21.29	21.17	2.94	31.84	46.00	-14.16	100	10
2	H	495.9344	27.54	peak	17.62	21.82	2.40	25.74	46.00	-20.26	200	189
3	H	194.4534	27.64	peak	11.79	22.34	1.54	18.63	43.50	-24.87	100	239
4	H	133.6188	27.11	peak	13.01	22.39	1.23	18.96	43.50	-24.54	100	186
5	H	93.4402	29.53	peak	8.83	22.32	0.98	17.02	43.50	-26.48	100	249
6	H	33.2112	25.95	peak	18.93	22.26	0.71	23.33	40.00	-16.67	100	199

30MHz -1GHz

80.0 dBuV/m

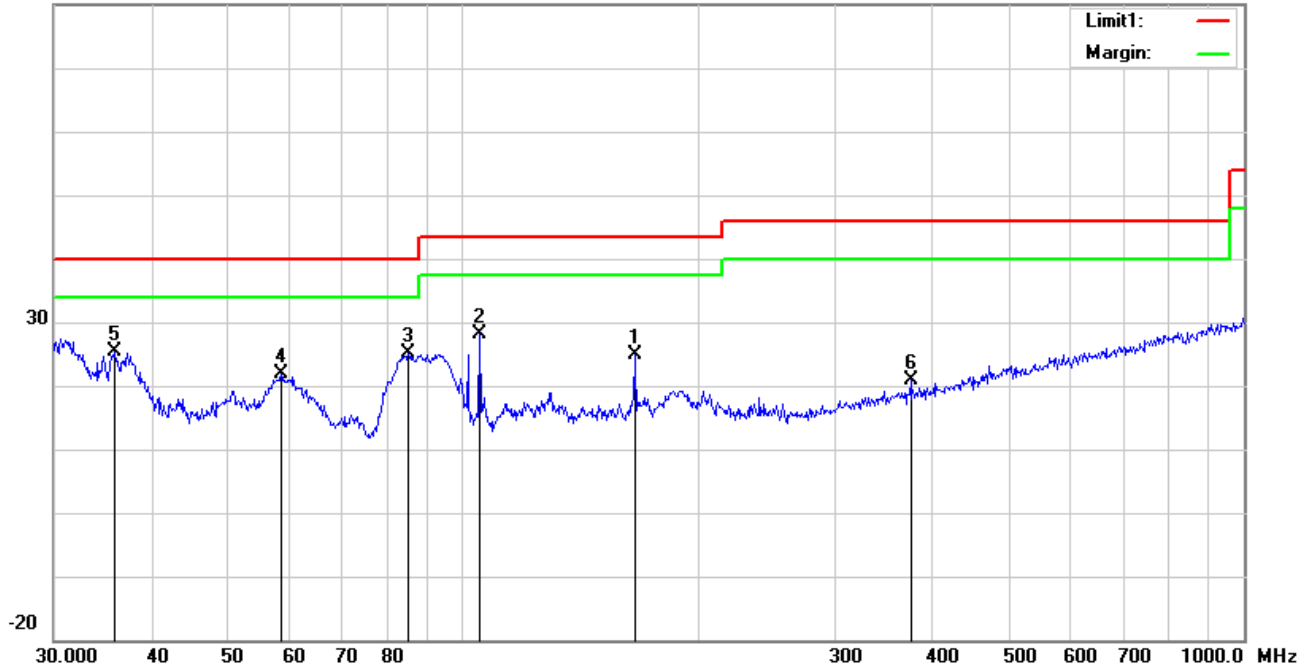

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	V	166.0680	33.61	peak	12.11	22.26	1.37	24.83	43.50	-18.67	200	23
2	V	105.2718	38.05	peak	11.32	22.33	1.15	28.19	43.50	-15.31	100	99
3	V	85.2981	38.52	peak	7.81	22.37	1.06	25.02	40.00	-14.98	100	13
4	V	58.6126	36.18	peak	7.45	22.41	0.76	21.98	40.00	-18.02	100	29
5	V	35.8747	29.87	peak	16.91	22.26	0.77	25.29	40.00	-14.71	100	282
6	V	374.6226	25.85	peak	15.17	22.08	2.03	20.97	46.00	-25.03	100	42

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	47.63	AV	V	33.39	7.22	48.46	39.78	54	-14.22
4804	43.81	AV	H	33.39	7.22	48.46	35.96	54	-18.04
4804	70.06	PK	V	33.39	7.22	48.46	62.21	74	-11.79
4804	63.4	PK	H	33.39	7.22	48.46	55.55	74	-18.45
12914	20.64	AV	V	41.21	14.5	47.51	28.84	54	-25.16
12914	22.4	AV	H	41.21	14.5	47.51	30.6	54	-23.4
12914	45.05	PK	V	41.21	14.5	47.51	53.25	74	-20.75
12914	43.28	PK	H	41.21	14.5	47.51	51.48	74	-22.52

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	43.52	AV	V	33.62	7.53	48.36	36.31	54	-17.69
4882	46.52	AV	H	33.62	7.53	48.36	39.31	54	-14.69
4882	66.56	PK	V	33.62	7.53	48.36	59.35	74	-14.65
4882	64.96	PK	H	33.62	7.53	48.36	57.75	74	-16.25
12168	23.63	AV	V	40.2	13.76	45.99	31.6	54	-22.4
12168	18.32	AV	H	40.2	13.76	45.99	26.29	54	-27.71
12168	47.03	PK	V	40.2	13.76	45.99	55	74	-19
12168	48.31	PK	H	40.2	13.76	45.99	56.28	74	-17.72

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	44.05	AV	V	33.89	7.86	48.31	37.49	54	-16.51
4960	47.02	AV	H	33.89	7.86	48.31	40.46	54	-13.54
4960	66.42	PK	V	33.89	7.86	48.31	59.86	74	-14.14
4960	62.29	PK	H	33.89	7.86	48.31	55.73	74	-18.27
17948	8.35	AV	43.87	19.57	45.01	32.38	40.55	54	-13.45
17948	7.06	AV	43.87	19.57	45.01	32.38	39.26	54	-14.74
17948	26.32	PK	43.87	19.57	45.01	32.38	58.52	74	-15.48
17948	31.22	PK	43.87	19.57	45.01	32.38	63.42	74	-10.58

Note:

- 1, The testing has been conformed to $10 \times 2480 \text{MHz} = 24,800 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/23/2017	09/22/2018	<input type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/17/2017	11/16/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/22/2018	03/21/2019	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/12/2017	10/11/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>


Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

Annex B.i. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

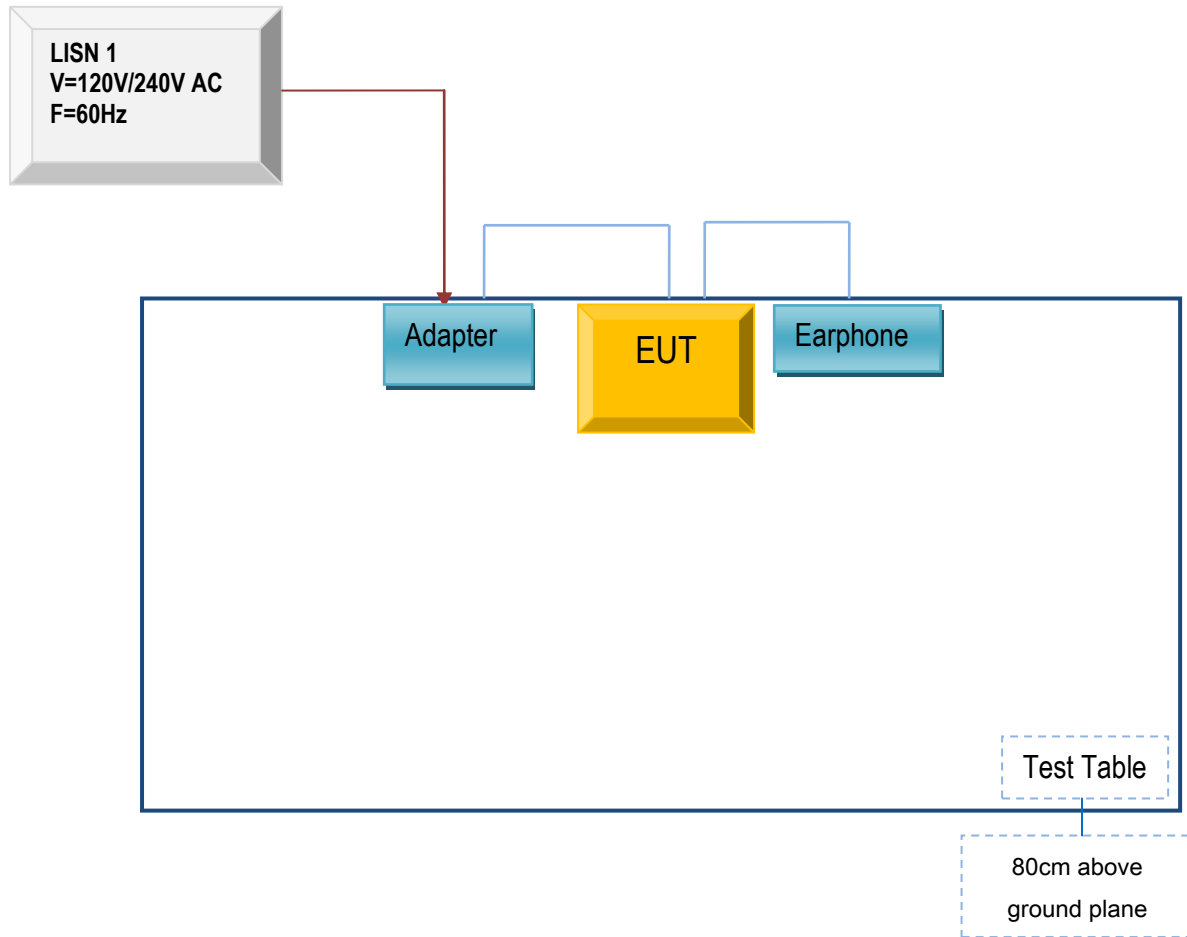

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

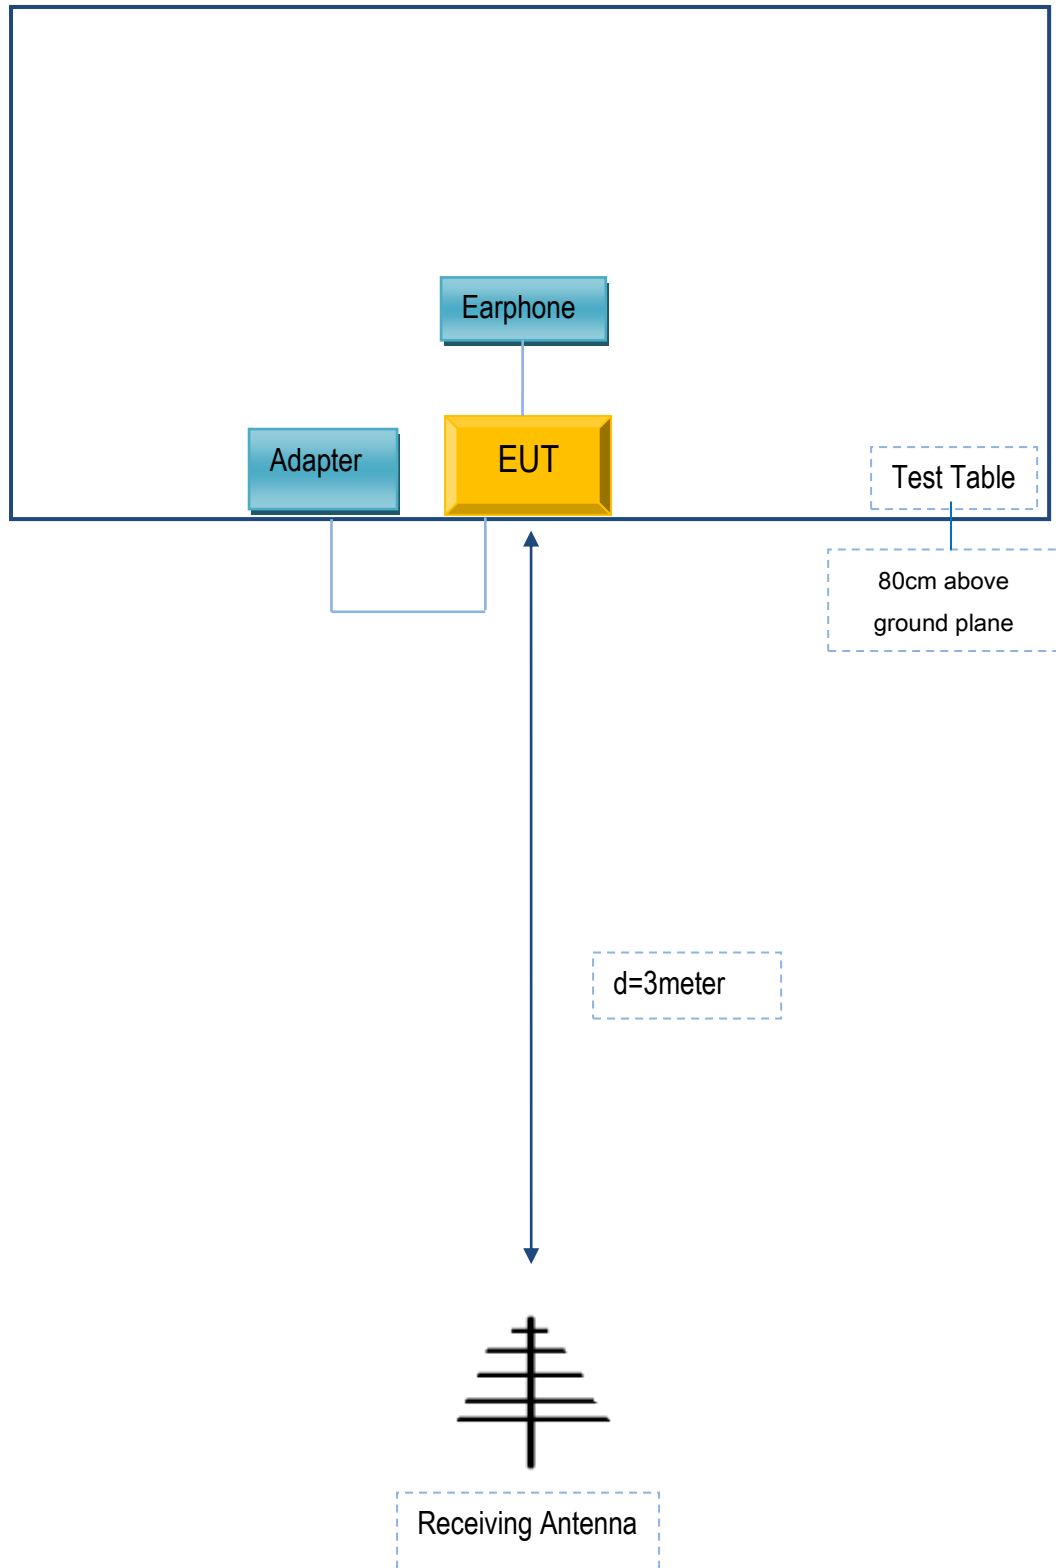

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

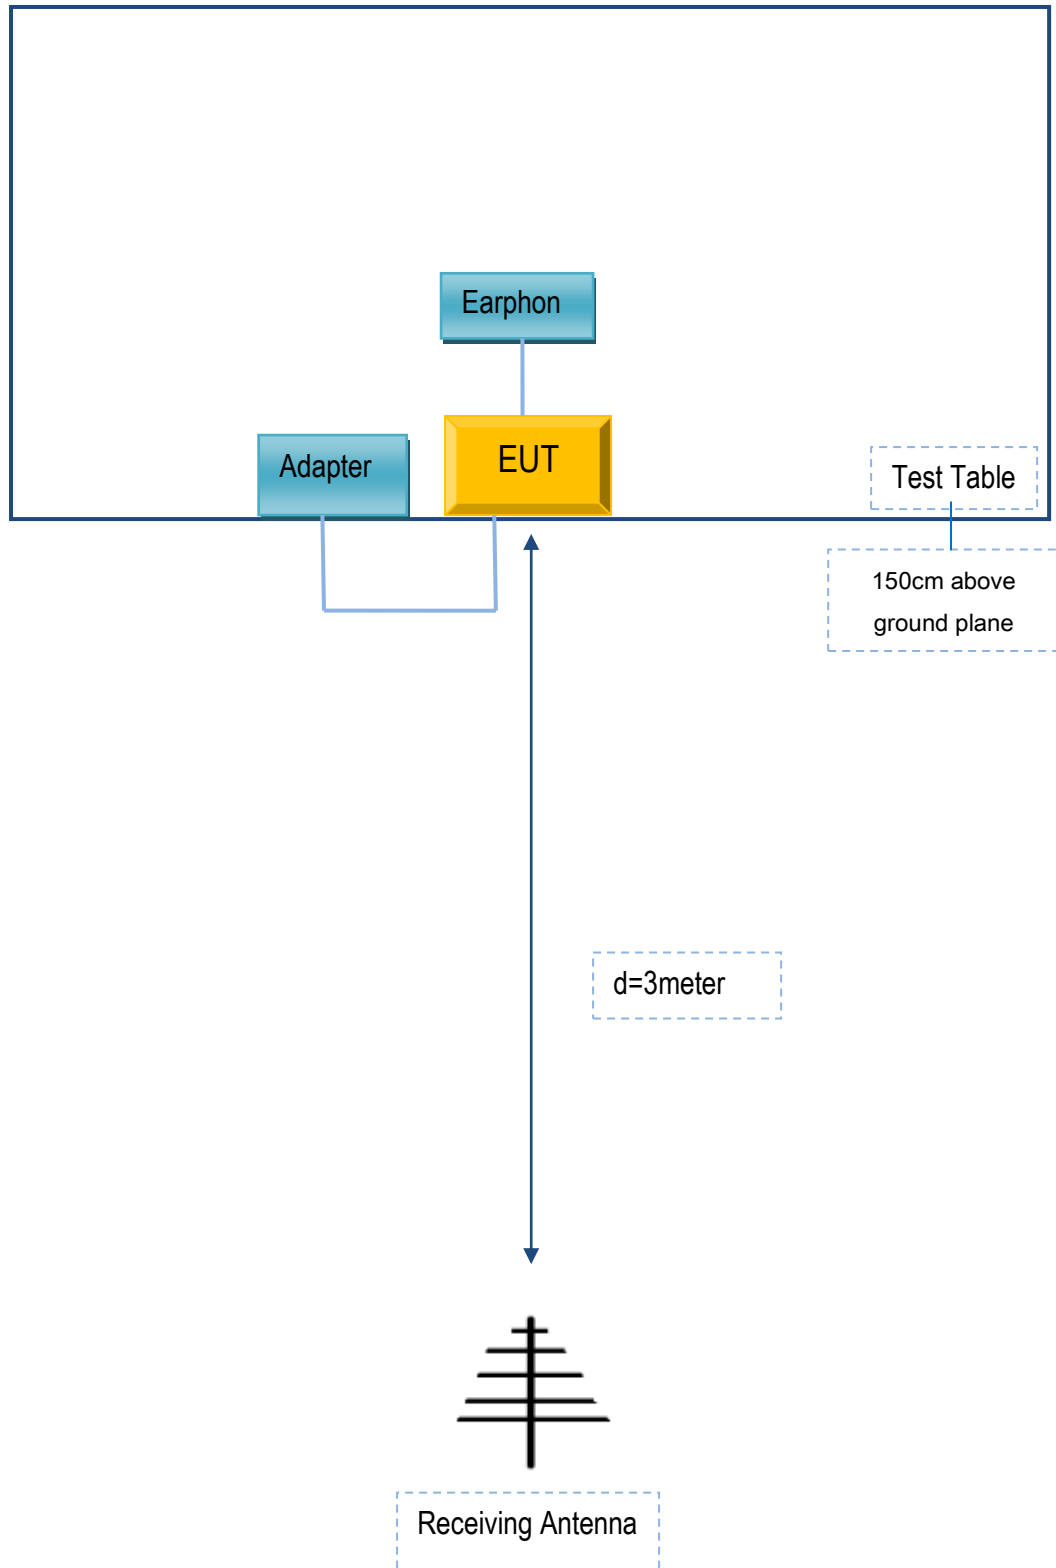

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
TECNO MOBILE LIMITED	Adapter	A8-501000	N/A
TECNO MOBILE LIMITED	Earphone	F4	N/A
Agilent	Wireless Connectivity Test Set	N4010A	N/A
OEM	omnidirectional antenna	AntSuck	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Test Report	18070621-FCC-R2
Page	54 of 54

**Annex C. User Manual / Block Diagram / Schematics / Partlist/
DECLARATION OF SIMILARITY**

Please see the attachment