



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: TECNO MOBILE LIMITED

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG

FCC ID: 2ADYY-KJ5

Product Name: Mobile Phone

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230848964-00DM1

Date Of Issue: 2023/10/10

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS.....	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS.....	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH.....	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	21
3.5 MAXIMUM POWER SPECTRAL DENSITY	22
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	22
3.5.3 Test Procedure	23
3.7 DUTY CYCLE	24
3.7.1 EUT Setup.....	24
3.7.2 Test Procedure	24
3.8 ANTENNA REQUIREMENT.....	25

3.8.1 Applicable Standard.....	25
3.8.2 Judgment.....	25
4. Test DATA AND RESULTS.....	26
4.1 AC LINE CONDUCTED EMISSIONS.....	26
4.2 RADIATION SPURIOUS EMISSIONS.....	29
4.3 EMISSION BANDWIDTH:	68
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	82
4.5 MAXIMUM POWER SPECTRAL DENSITY:	84
4.6 DUTY CYCLE:.....	92
5. EUT PHOTOGRAPHS	94
6. TEST SETUP PHOTOGRAPHS	95

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230848964-00D	Original Report	2023/9/16
2.0	CR230848964-00DM1	Update Section 4.2	2023/10/10

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	Mobile Phone
Trade Name:	TECNO
EUT Model:	KJ5
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	12.20dBm (5150-5250 MHz) 11.16dBm (5725-5850 MHz)
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 3.85V form battery or DC 5/7.5V form adapter
Serial Number:	RF Conducted Test: 2A93-1 Conducted & Radiated emissions: 2A93-5
EUT Received Date:	2023/8/23
EUT Received Status:	Good

1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

For 802.11ac vht80:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

1.1.3 Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5.15~5.25GHz	-1.1 dBi
		5.725~5.85GHz	-1.1 dBi

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	TECNO	U180TSA	Input: AC 100-240V~50/60Hz, 0.6A Output: 5.0V 2.4A or 7.5V, 2.4A, 18.0W Max

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:		The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:		No		
EUT Exercise Software:		Engineering mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	16
	Middle	5200	6Mbps	16
	Highest	5240	6Mbps	16
802.11ac vht20	Lowest	5180	MCS0	16
	Middle	5200	MCS0	16
	Highest	5240	MCS0	16
802.11ac vht40	Lowest	5190	MCS0	16
	Highest	5230	MCS0	16
802.11ac vht80	Middle	5210	MCS0	15
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	16
	Middle	5785	6Mbps	16
	Highest	5825	6Mbps	16
802.11ac vht20	Lowest	5745	MCS0	16
	Middle	5785	MCS0	16
	Highest	5825	MCS0	16
802.11ac vht40	Lowest	5755	MCS0	16
	Highest	5795	MCS0	16
802.11ac vht80	Middle	5775	MCS0	16
Note:				
The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80, the 802.11n ht20 and ht40 were reduced since the identical parameters with 802.11 ac vht20/vht40.				
The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.				

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TECNO	Adapter	U180TSA	BJ070184937061
TECNO	Earphone	Unknown	Unknown

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	NO	NO	1	Adapter	EUT
Earphone Cable	NO	NO	1.5	Earphone	EUT

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

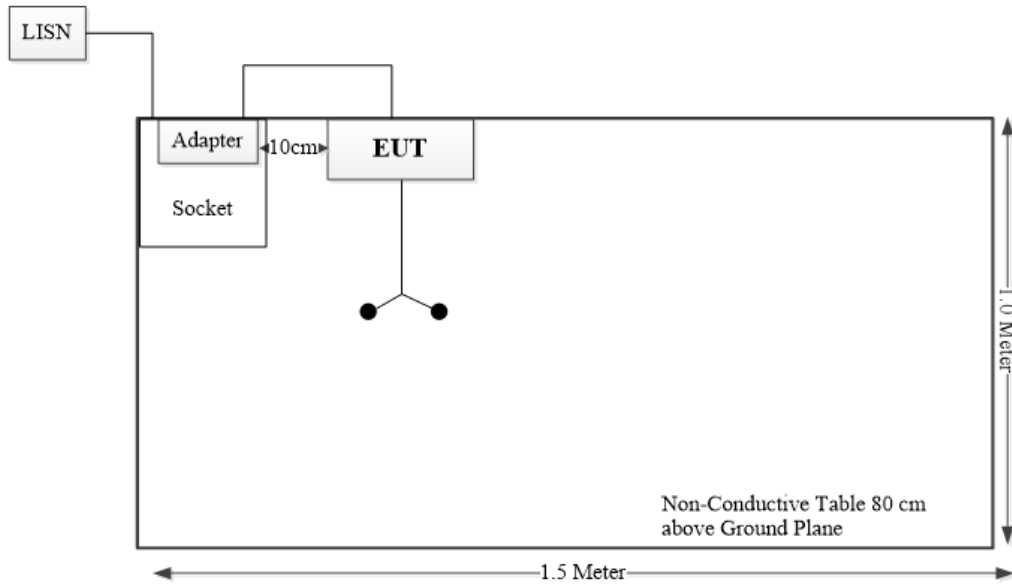

Spurious emissions:

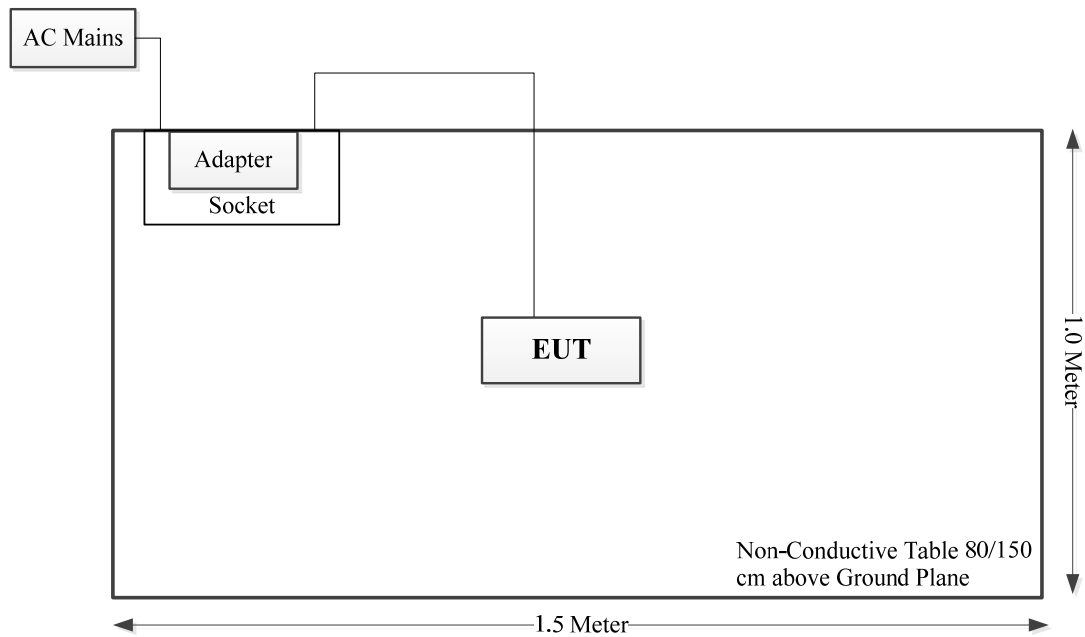

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:

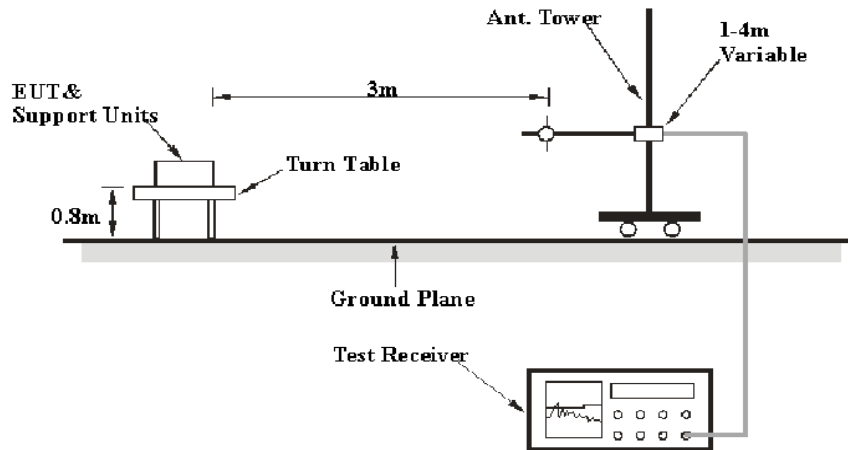

1-40 GHz:

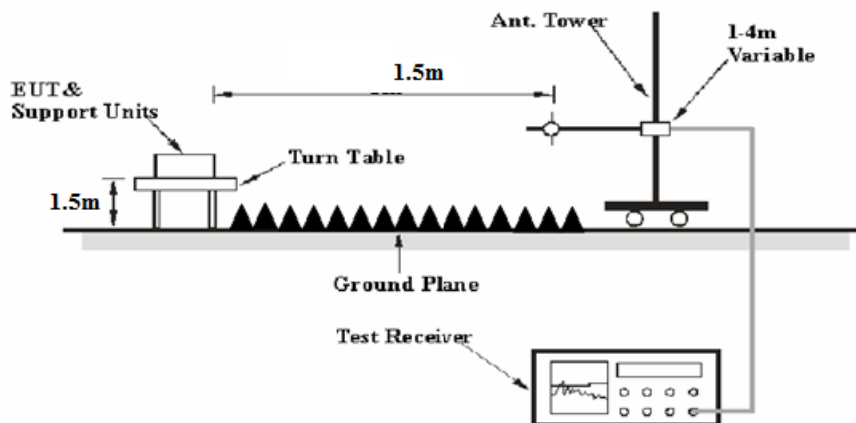

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m
Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

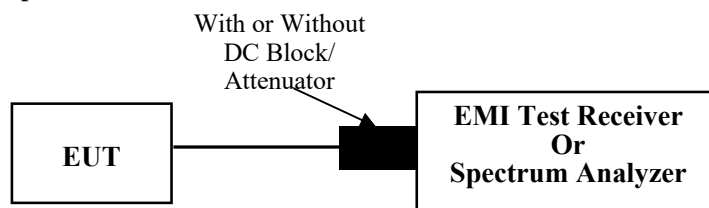

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

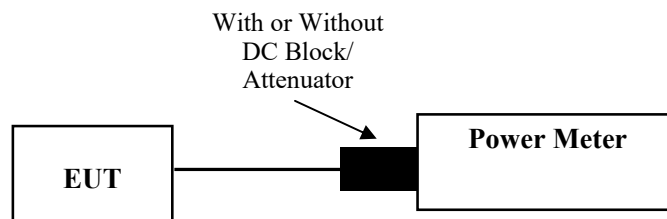

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

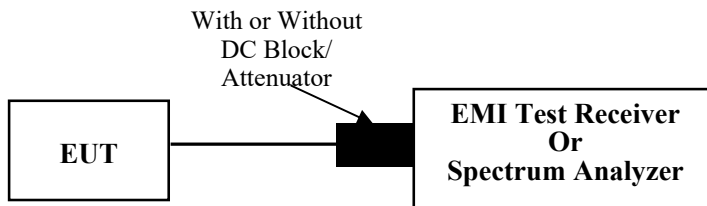

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle

3.7.1 EUT Setup

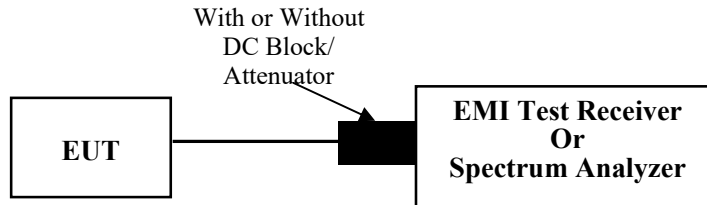

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2A93-5	Test Date:	2023/9/11
Test Site:	CE	Test Mode:	Transmitting (802.11ac vht20 5200MHz was the worst)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5	Relative Humidity: (%)	54	ATM Pressure: (kPa)	100.1
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR230848964-RF
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-11

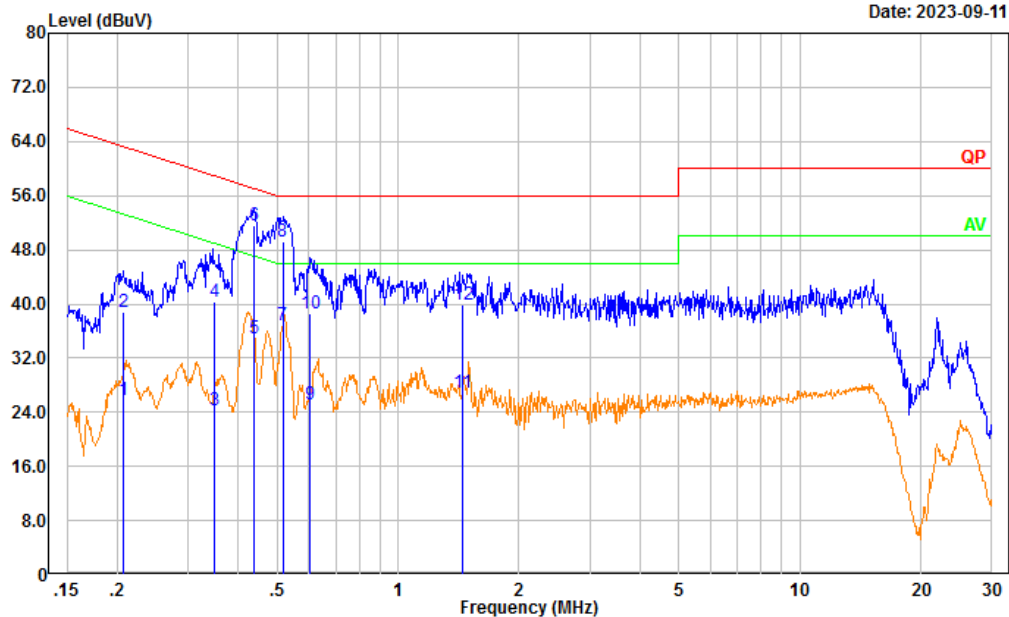

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.207	16.15	9.61	25.76	53.31	27.55	Average
2	0.207	29.17	9.61	38.78	63.31	24.53	QP
3	0.350	14.78	9.61	24.39	48.97	24.58	Average
4	0.350	30.71	9.61	40.32	58.97	18.65	QP
5	0.439	25.31	9.61	34.92	47.08	12.16	Average
6	0.439	42.01	9.61	51.62	57.08	5.46	QP
7	0.516	27.22	9.61	36.83	46.00	9.17	Average
8	0.516	39.61	9.61	49.22	56.00	6.78	QP
9	0.605	15.49	9.62	25.11	46.00	20.89	Average
10	0.605	29.03	9.62	38.65	56.00	17.35	QP
11	1.445	17.23	9.62	26.85	46.00	19.15	Average
12	1.445	30.27	9.62	39.89	56.00	16.11	QP

Project No.: CR230848964-RF
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-11

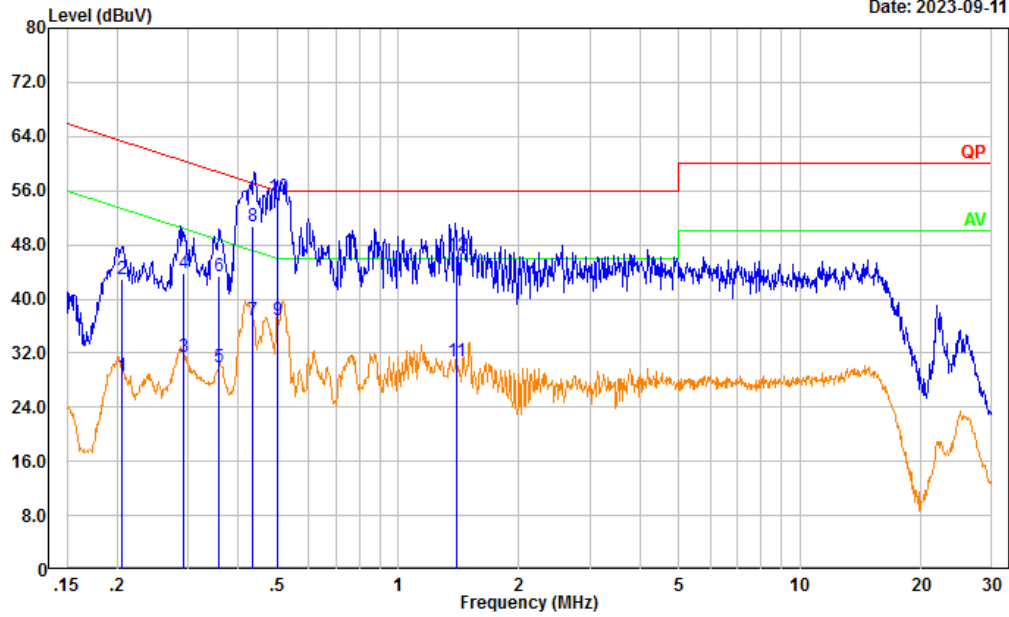

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.205	19.07	9.61	28.68	53.40	24.72	Average
2	0.205	33.34	9.61	42.95	63.40	20.45	QP
3	0.293	21.86	9.61	31.47	50.44	18.97	Average
4	0.293	34.15	9.61	43.76	60.44	16.68	QP
5	0.359	20.38	9.61	29.99	48.74	18.75	Average
6	0.359	33.72	9.61	43.33	58.74	15.41	QP
7	0.435	27.17	9.61	36.78	47.16	10.38	Average
8	0.435	41.05	9.61	50.66	57.16	6.50	QP
9	0.501	27.24	9.61	36.85	46.00	9.15	Average
10	0.501	45.35	9.61	54.96	56.00	1.04	QP
11	1.396	21.15	9.62	30.77	46.00	15.23	Average
12	1.396	36.85	9.62	46.47	56.00	9.53	QP

4.2 Radiation Spurious Emissions

Serial Number:	2A93-5	Test Date:	2023/9/10~2023/9/11
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Hugo Huo, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5~25	Relative Humidity: (%)	53~63	ATM Pressure: (kPa)	100.1~100.8
----------------------	---------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1- 1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1- 2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536- JO	15964001005	2022/9/16	2023/9/15
Quinstar	Preamplifier	QLW-18405536- JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362- 200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 30MHz-1GHz
(802.11ac vht20 5180MHz)

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

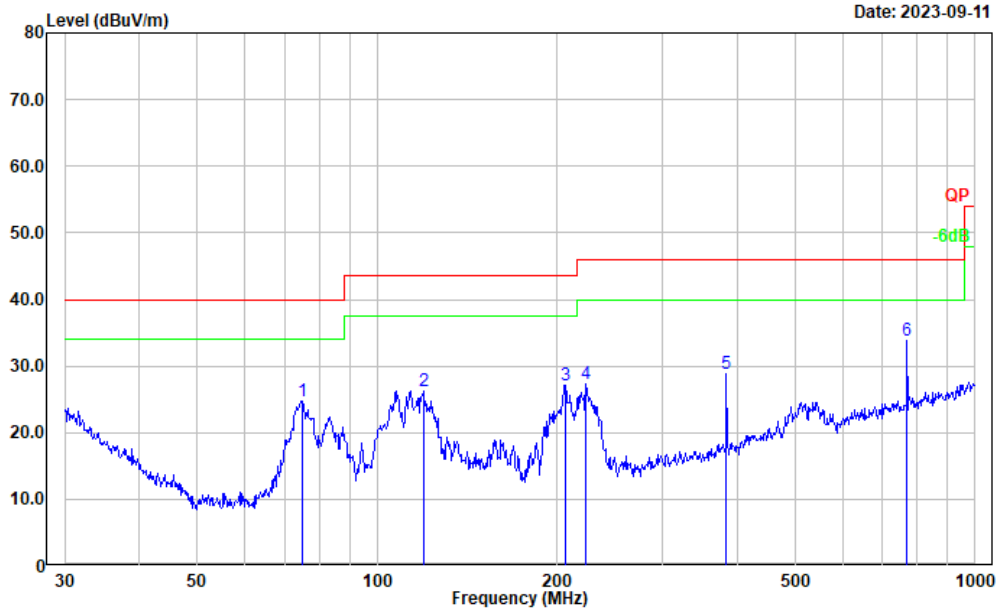

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	74.919	41.67	-16.92	24.75	40.00	15.25	Peak
2	119.436	37.81	-11.49	26.32	43.50	17.18	Peak
3	206.398	39.59	-12.39	27.20	43.50	16.30	Peak
4	223.733	40.06	-12.85	27.21	46.00	18.79	Peak
5	383.932	37.76	-9.03	28.73	46.00	17.27	Peak
6	768.748	36.36	-2.61	33.75	46.00	12.25	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

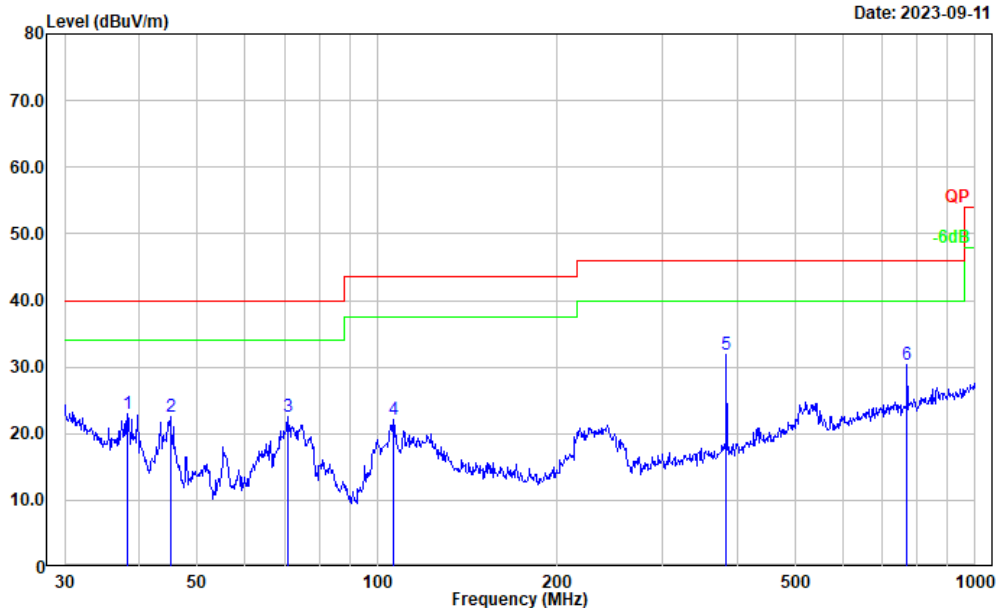


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.212	32.84	-9.91	22.93	40.00	17.07	Peak
2	45.058	36.82	-14.25	22.57	40.00	17.43	Peak
3	70.832	39.14	-16.55	22.59	40.00	17.41	Peak
4	106.385	35.21	-13.07	22.14	43.50	21.36	Peak
5	383.932	40.94	-9.03	31.91	46.00	14.09	Peak
6	768.748	33.06	-2.61	30.45	46.00	15.55	Peak

(802.11ac vht20 5200MHz)

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

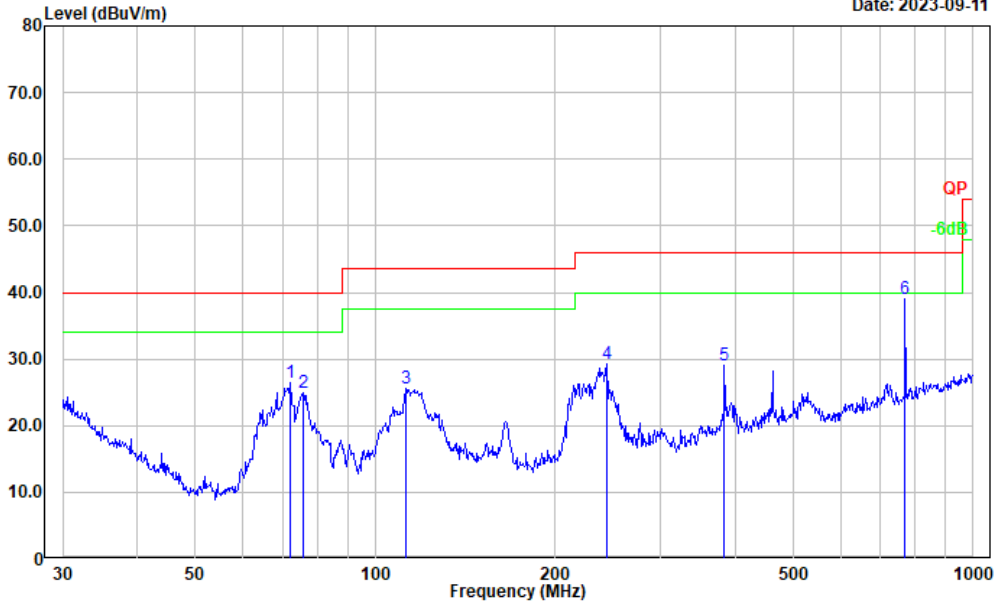

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	72.084	43.18	-16.69	26.49	40.00	13.51	Peak
2	75.711	41.98	-16.99	24.99	40.00	15.01	Peak
3	112.524	37.69	-12.11	25.58	43.50	17.92	Peak
4	243.377	42.21	-12.99	29.22	46.00	16.78	Peak
5	383.932	38.18	-9.03	29.15	46.00	16.85	Peak
6	768.748	41.66	-2.61	39.05	46.00	6.95	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

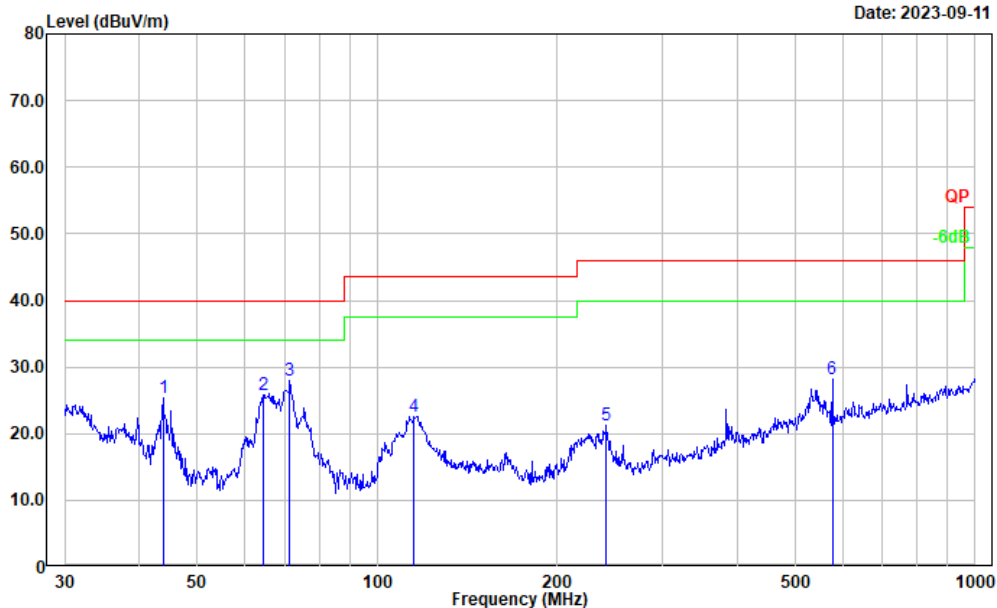


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	43.812	38.98	-13.56	25.42	40.00	14.58	Peak
2	64.433	42.91	-17.00	25.91	40.00	14.09	Peak
3	71.330	44.63	-16.61	28.02	40.00	11.98	Peak
4	115.321	34.44	-11.87	22.57	43.50	20.93	Peak
5	241.676	34.33	-13.00	21.33	46.00	24.67	Peak
6	576.644	33.76	-5.58	28.18	46.00	17.82	Peak

(802.11ac vht20 5240MHz)

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

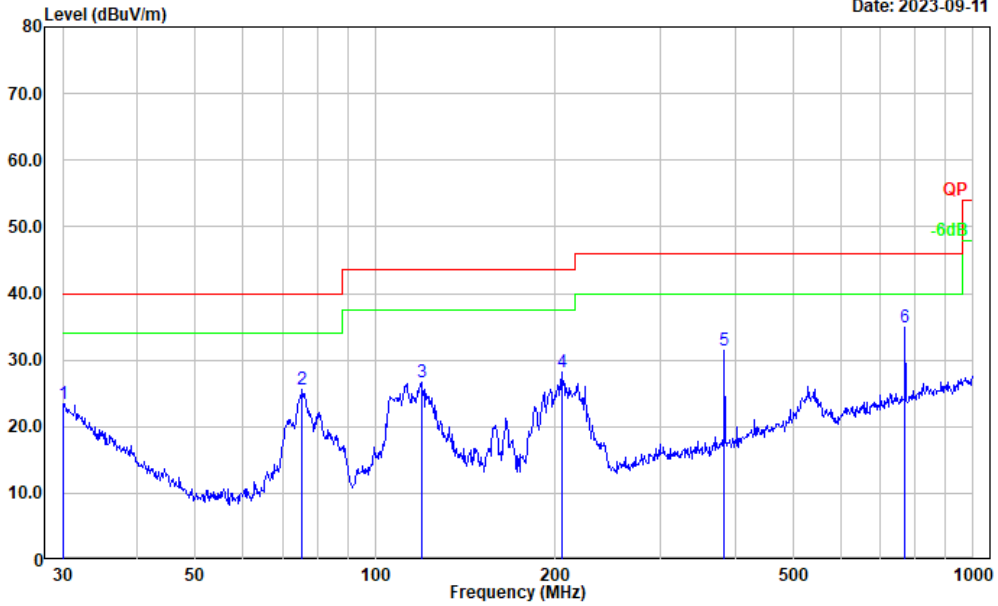

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.19	-3.68	23.51	40.00	16.49	Peak
2	75.446	42.51	-16.97	25.54	40.00	14.46	Peak
3	119.436	38.22	-11.49	26.73	43.50	16.77	Peak
4	204.955	40.54	-12.36	28.18	43.50	15.32	Peak
5	383.932	40.56	-9.03	31.53	46.00	14.47	Peak
6	768.748	37.43	-2.61	34.82	46.00	11.18	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

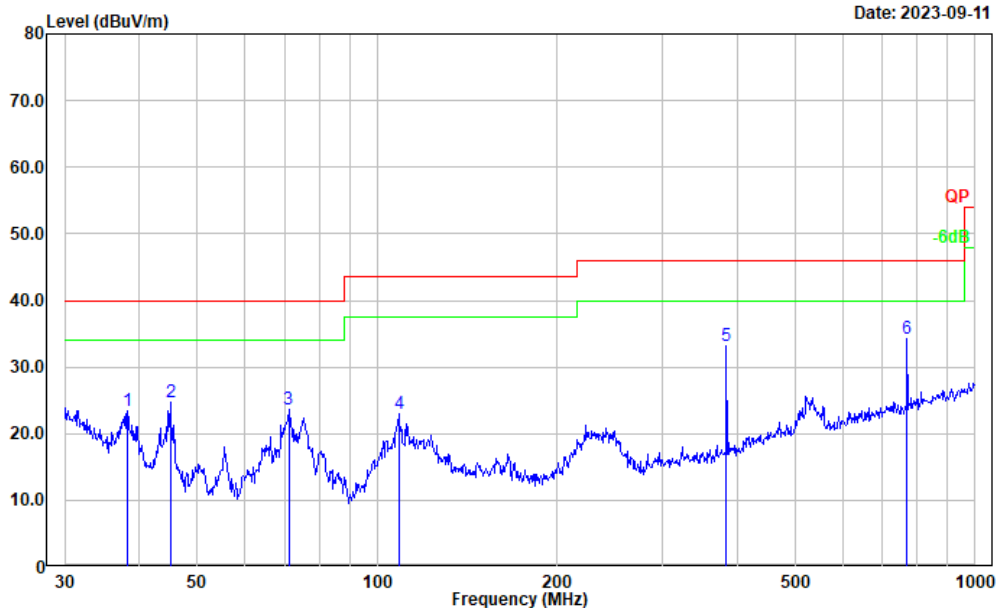


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.212	33.35	-9.91	23.44	40.00	16.56	Peak
2	45.058	38.98	-14.25	24.73	40.00	15.27	Peak
3	71.080	40.31	-16.59	23.72	40.00	16.28	Peak
4	108.647	35.54	-12.54	23.00	43.50	20.50	Peak
5	383.932	42.28	-9.03	33.25	46.00	12.75	Peak
6	768.748	36.85	-2.61	34.24	46.00	11.76	Peak

802.11ac vht20 5745MHz

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

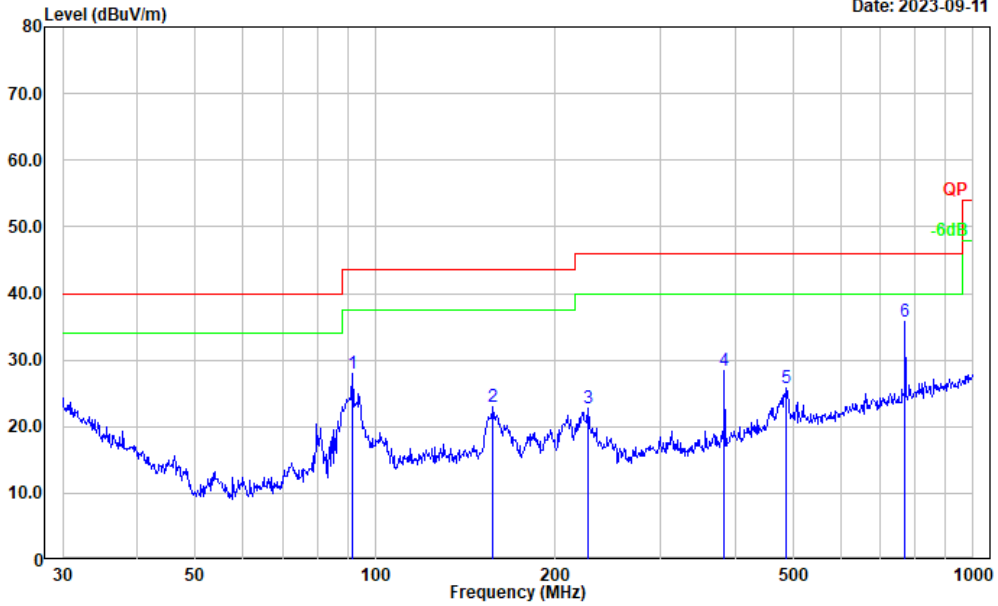

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	91.495	44.60	-16.57	28.03	43.50	15.47	Peak
2	157.559	35.04	-12.05	22.99	43.50	20.51	Peak
3	226.894	35.65	-12.91	22.74	46.00	23.26	Peak
4	383.932	37.37	-9.03	28.34	46.00	17.66	Peak
5	487.315	32.15	-6.27	25.88	46.00	20.12	Peak
6	768.748	38.37	-2.61	35.76	46.00	10.24	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

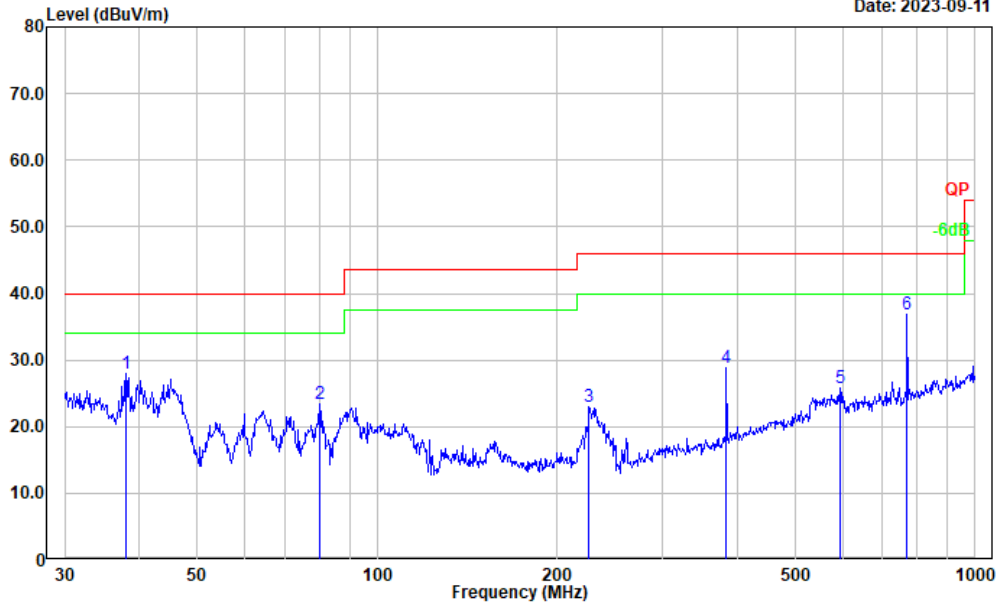


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	37.945	37.64	-9.69	27.95	40.00	12.05	Peak
2	80.081	40.98	-17.46	23.52	40.00	16.48	Peak
3	226.099	35.76	-12.89	22.87	46.00	23.13	Peak
4	383.932	37.93	-9.03	28.90	46.00	17.10	Peak
5	593.050	31.00	-5.21	25.79	46.00	20.21	Peak
6	768.748	39.56	-2.61	36.95	46.00	9.05	Peak

802.11ac vht20 5785MHz

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

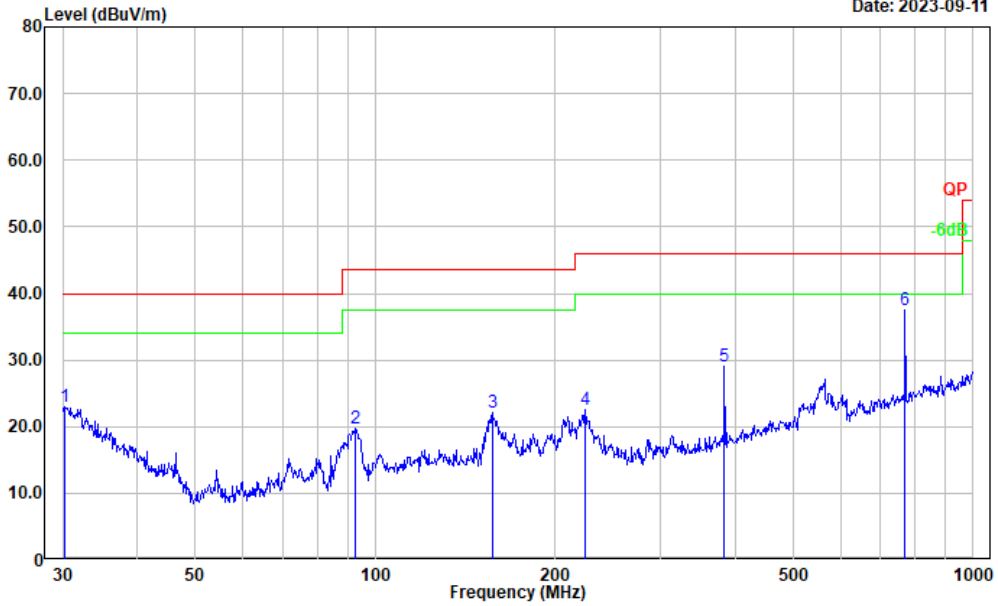

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	26.77	-3.85	22.92	40.00	17.08	Peak
2	92.787	36.04	-16.22	19.82	43.50	23.68	Peak
3	157.007	34.20	-12.04	22.16	43.50	21.34	Peak
4	224.519	35.30	-12.85	22.45	46.00	23.55	Peak
5	383.932	38.03	-9.03	29.00	46.00	17.00	Peak
6	768.748	40.17	-2.61	37.56	46.00	8.44	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

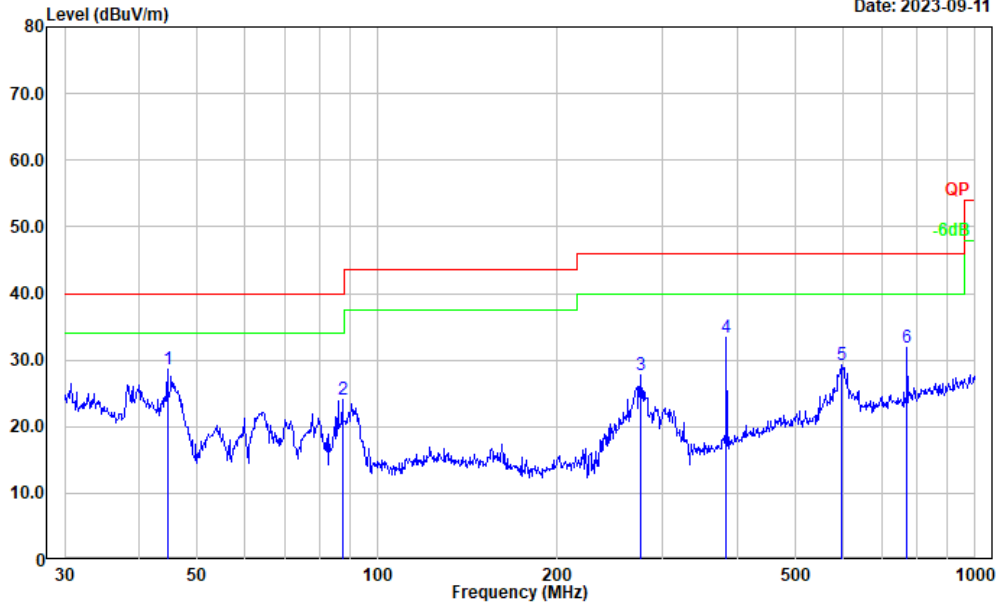


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	44.587	42.72	-14.00	28.72	40.00	11.28	Peak
2	87.418	41.10	-17.07	24.03	40.00	15.97	Peak
3	276.124	39.58	-11.84	27.74	46.00	18.26	Peak
4	383.932	42.44	-9.03	33.41	46.00	12.59	Peak
5	599.321	34.31	-5.10	29.21	46.00	16.79	Peak
6	768.748	34.46	-2.61	31.85	46.00	14.15	Peak

802.11ac vht20 5825MHz

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: horizontal
 Note:


Date: 2023-09-11

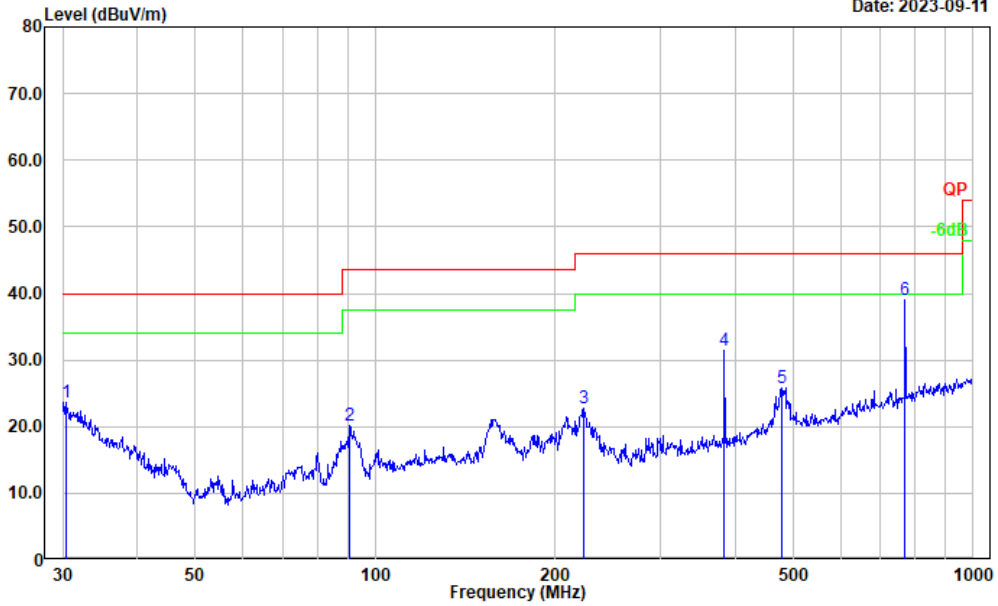

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	27.60	-3.93	23.67	40.00	16.33	Peak
2	90.537	36.86	-16.80	20.06	43.50	23.44	Peak
3	223.733	35.57	-12.85	22.72	46.00	23.28	Peak
4	383.932	40.49	-9.03	31.46	46.00	14.54	Peak
5	478.846	32.00	-6.26	25.74	46.00	20.26	Peak
6	768.748	41.60	-2.61	38.99	46.00	7.01	Peak

Project No.: CR230848964-RF
 Tester: Hugo Huo
 Polarization: vertical
 Note:

Date: 2023-09-11

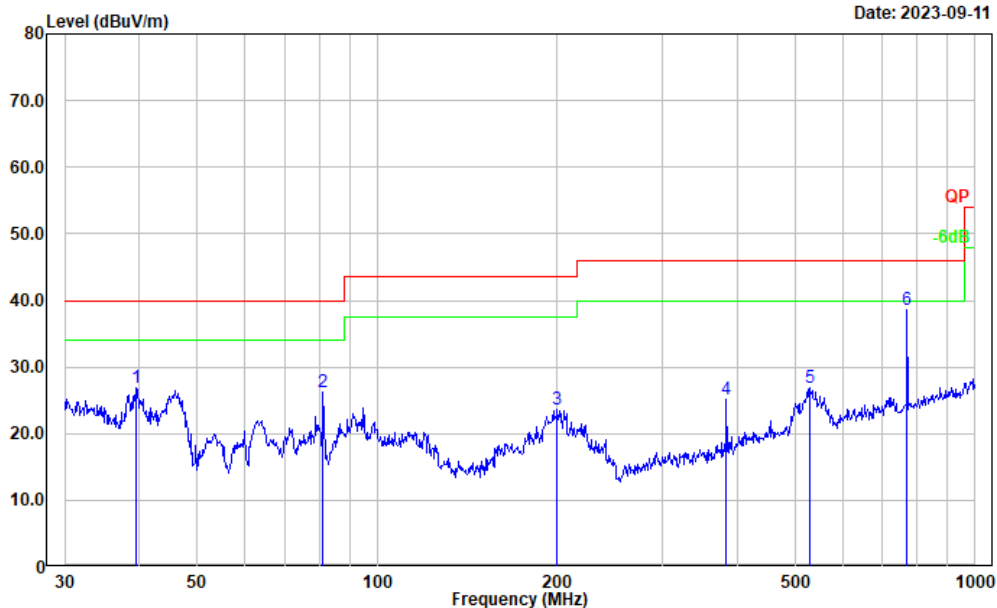

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39.437	37.84	-10.87	26.97	40.00	13.03	Peak
2	81.212	43.61	-17.38	26.23	40.00	13.77	Peak
3	199.986	35.76	-12.21	23.55	43.50	19.95	Peak
4	383.932	34.09	-9.03	25.06	46.00	20.94	Peak
5	530.101	32.90	-5.95	26.95	46.00	19.05	Peak
6	768.748	41.19	-2.61	38.58	46.00	7.42	Peak

2) 1GHz-40GHz:**5150-5250MHz:****802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5150.000	30.67	PK	H	32.62	63.29	74.00	10.71
5150.000	16.35	AV	H	32.62	48.97	54.00	5.03
10360.000	45.28	PK	H	13.16	58.44	68.20	9.76
Middle Channel: 5200 MHz							
10400.000	44.87	PK	H	13.14	58.01	68.20	10.19
High Channel: 5240 MHz							
5350.000	30.24	PK	H	33.01	63.25	74.00	10.75
5350.000	16.54	AV	H	33.01	49.55	54.00	4.45
10480.000	44.61	PK	H	12.84	57.45	68.20	10.75

802.11ac vht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5150.000	31.40	PK	H	32.62	64.02	74.00	9.98
5150.000	16.98	AV	H	32.62	49.60	54.00	4.40
10360.000	45.70	PK	H	13.16	58.86	68.20	9.34
Middle Channel: 5200 MHz							
10400.000	45.35	PK	H	13.14	58.49	68.20	9.71
High Channel: 5240 MHz							
5350.000	30.11	PK	H	33.01	63.12	74.00	10.88
5350.000	16.58	AV	H	33.01	49.59	54.00	4.41
10480.000	45.11	PK	H	12.84	57.95	68.20	10.25

802.11ac vht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5190 MHz							
5150.000	32.01	PK	H	32.62	64.63	74.00	9.37
5150.000	17.02	AV	H	32.62	49.64	54.00	4.36
10380.000	44.16	PK	H	13.15	57.31	68.20	10.89
High Channel: 5230 MHz							
5350.000	30.54	PK	H	33.01	63.55	74.00	10.45
5350.000	16.54	AV	H	33.01	49.55	54.00	4.45
10460.000	43.63	PK	H	12.92	56.55	68.20	11.65

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Middle Channel: 5210 MHz							
5150.000	34.69	PK	H	32.62	67.31	74.00	6.69
5150.000	18.38	AV	H	32.62	51.00	54.00	3.00
5350.000	32.33	PK	H	33.01	65.34	74.00	8.66
5350.000	16.97	AV	H	33.01	49.98	54.00	4.02
10420.000	43.30	PK	H	13.07	56.37	68.20	11.83

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.02 dB

5725-5850MHz:**802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
11490.000	43.58	PK	H	14.65	58.23	74.00	15.77
11490.000	30.77	AV	H	14.65	45.42	54.00	8.58
Middle Channel: 5785 MHz							
11570.000	44.44	PK	H	14.80	59.24	74.00	14.76
11570.000	31.75	AV	H	14.80	46.55	54.00	7.45
High Channel: 5825 MHz							
11650.000	45.15	PK	H	15.04	60.19	74.00	13.81
11650.000	32.11	AV	H	15.04	47.15	54.00	6.85

802.11ac vht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
11490.000	44.10	PK	H	14.65	58.75	74.00	15.25
11490.000	31.98	AV	H	14.65	46.63	54.00	7.37
Middle Channel: 5785 MHz							
11570.000	44.81	PK	H	14.80	59.61	74.00	14.39
11570.000	31.08	AV	H	14.80	45.88	54.00	8.12
High Channel: 5825 MHz							
11650.000	45.75	PK	H	15.04	60.79	74.00	13.21
11650.000	32.00	AV	H	15.04	47.04	54.00	6.96

802.11ac vht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
11510.000	41.68	PK	H	14.65	56.33	74.00	17.67
11510.000	28.15	AV	H	14.65	42.80	54.00	11.20
High Channel: 5795 MHz							
11590.000	42.68	PK	H	14.85	57.54	74.00	16.46
11590.000	30.99	AV	H	14.85	45.85	54.00	8.15

802.11ac vht80 Mode:


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
11550.000	41.15	PK	H	14.75	55.91	74.00	18.09
11550.000	28.27	AV	H	14.75	43.03	54.00	10.97

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = 20 log (specific distance [3m]/test distance [1.5m]) dB = 6.02 dB

Band Edge Measurements (Radiated)

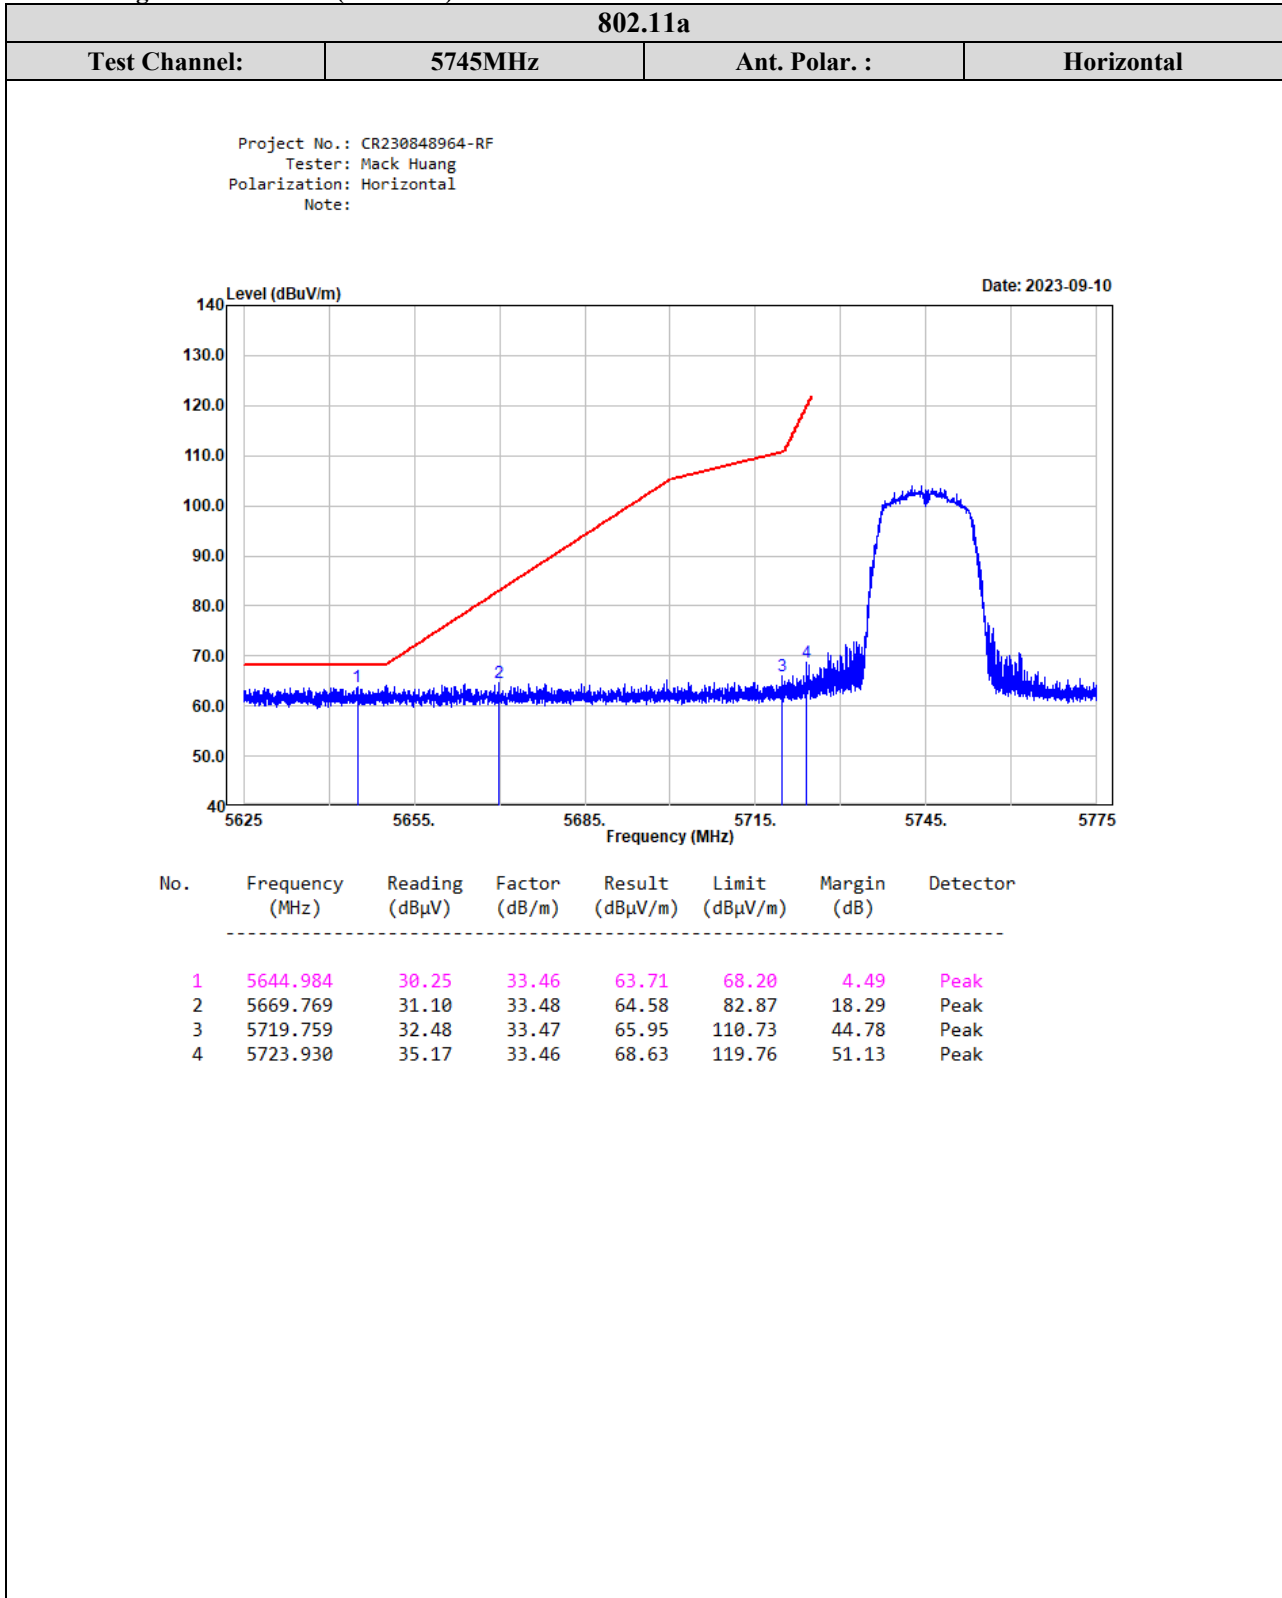


802.11a


Test Channel:	5745MHz	Ant. Polar. :	Vertical
----------------------	----------------	----------------------	-----------------


Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

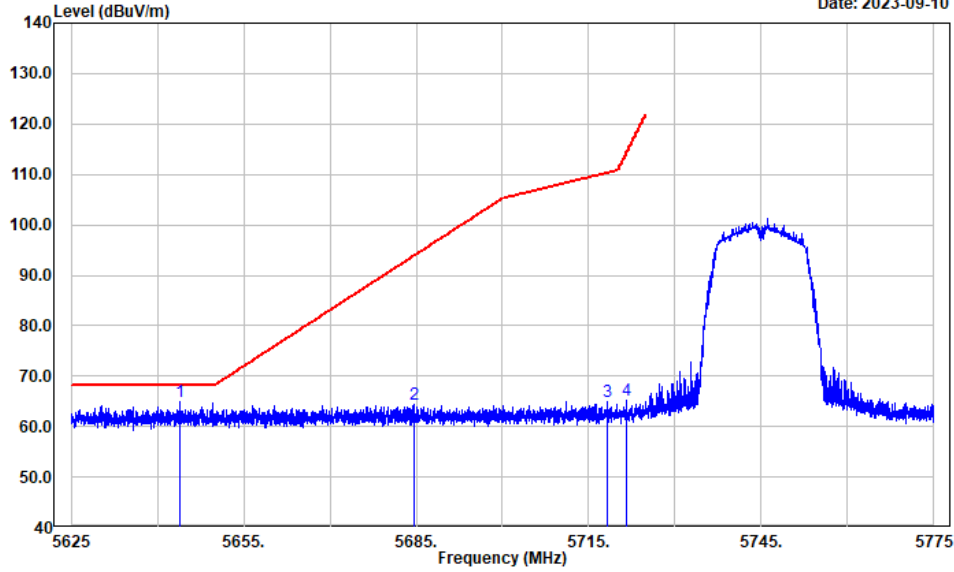

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5644.024	31.41	33.46	64.87	68.20	3.33	Peak
2	5684.622	30.85	33.48	64.33	93.86	29.53	Peak
3	5718.229	31.54	33.47	65.01	110.30	45.29	Peak
4	5721.619	31.72	33.47	65.19	114.49	49.30	Peak

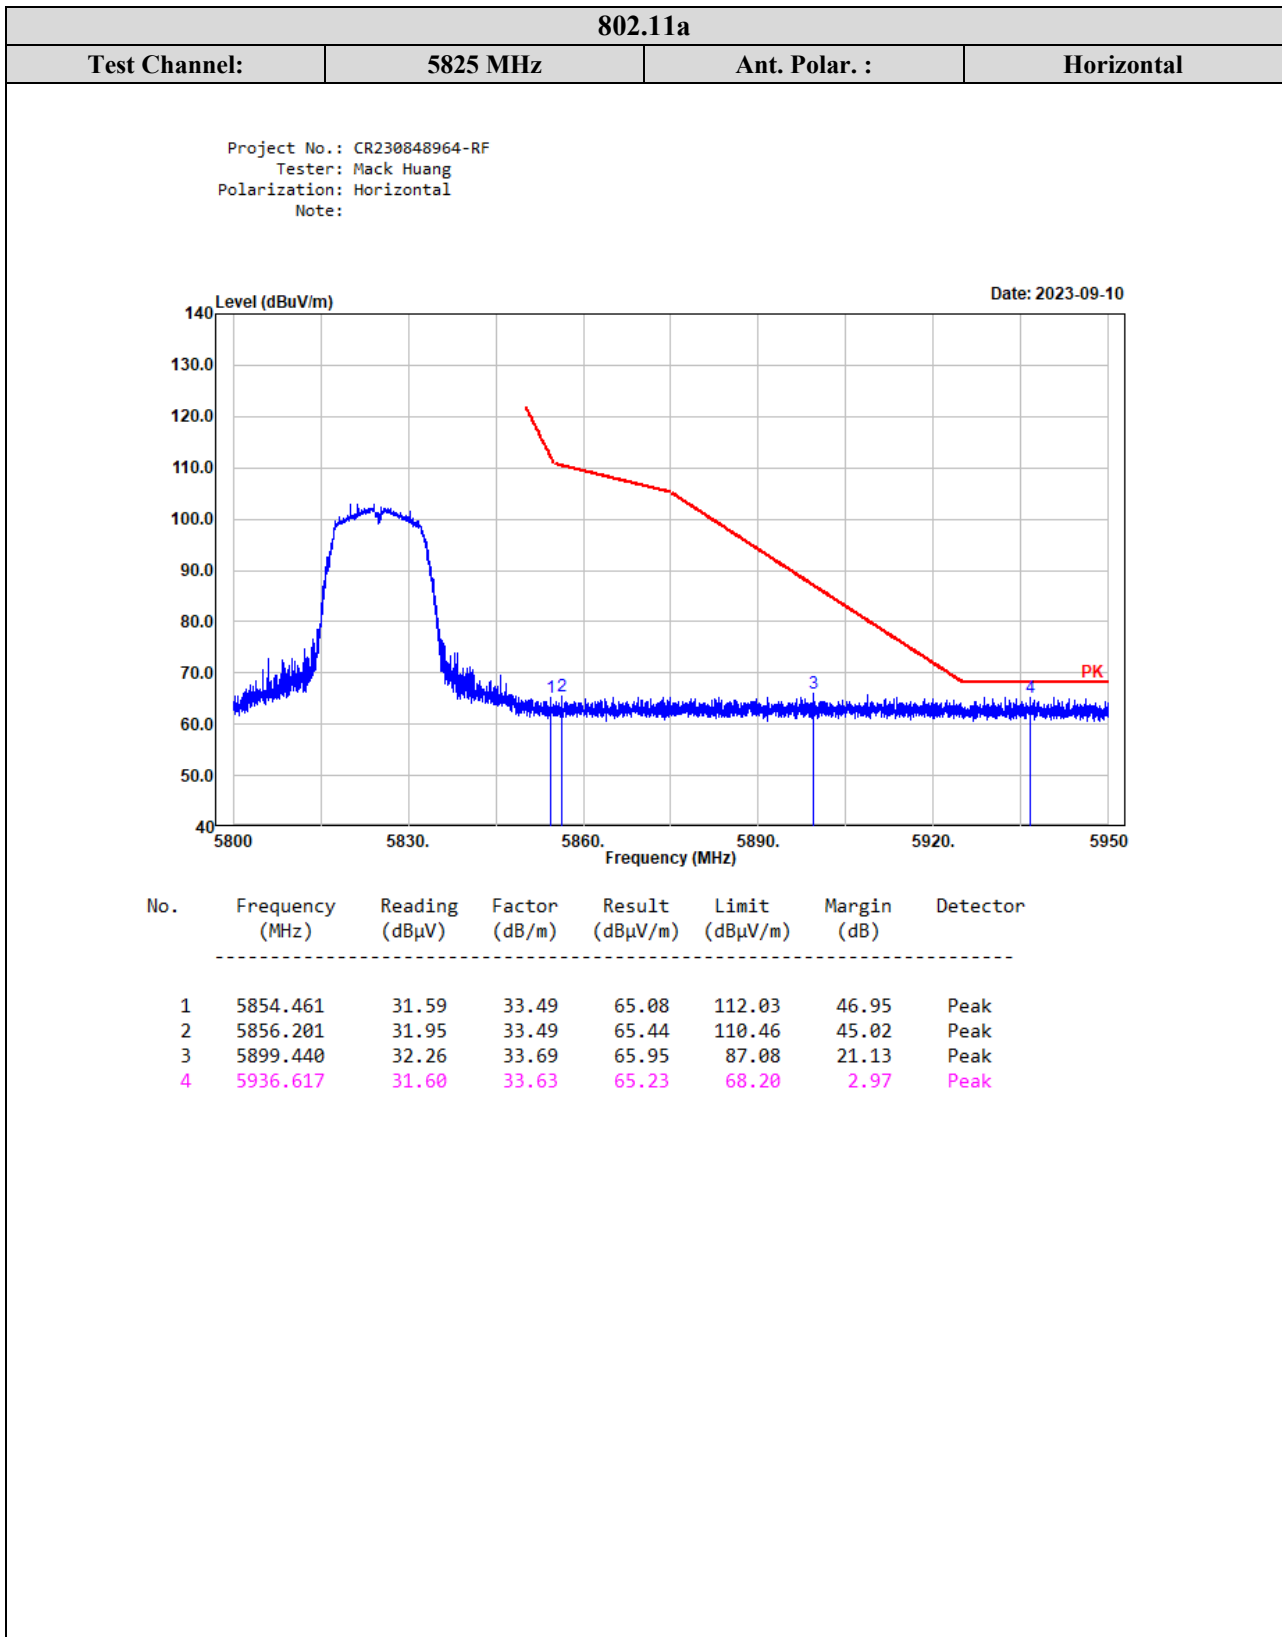

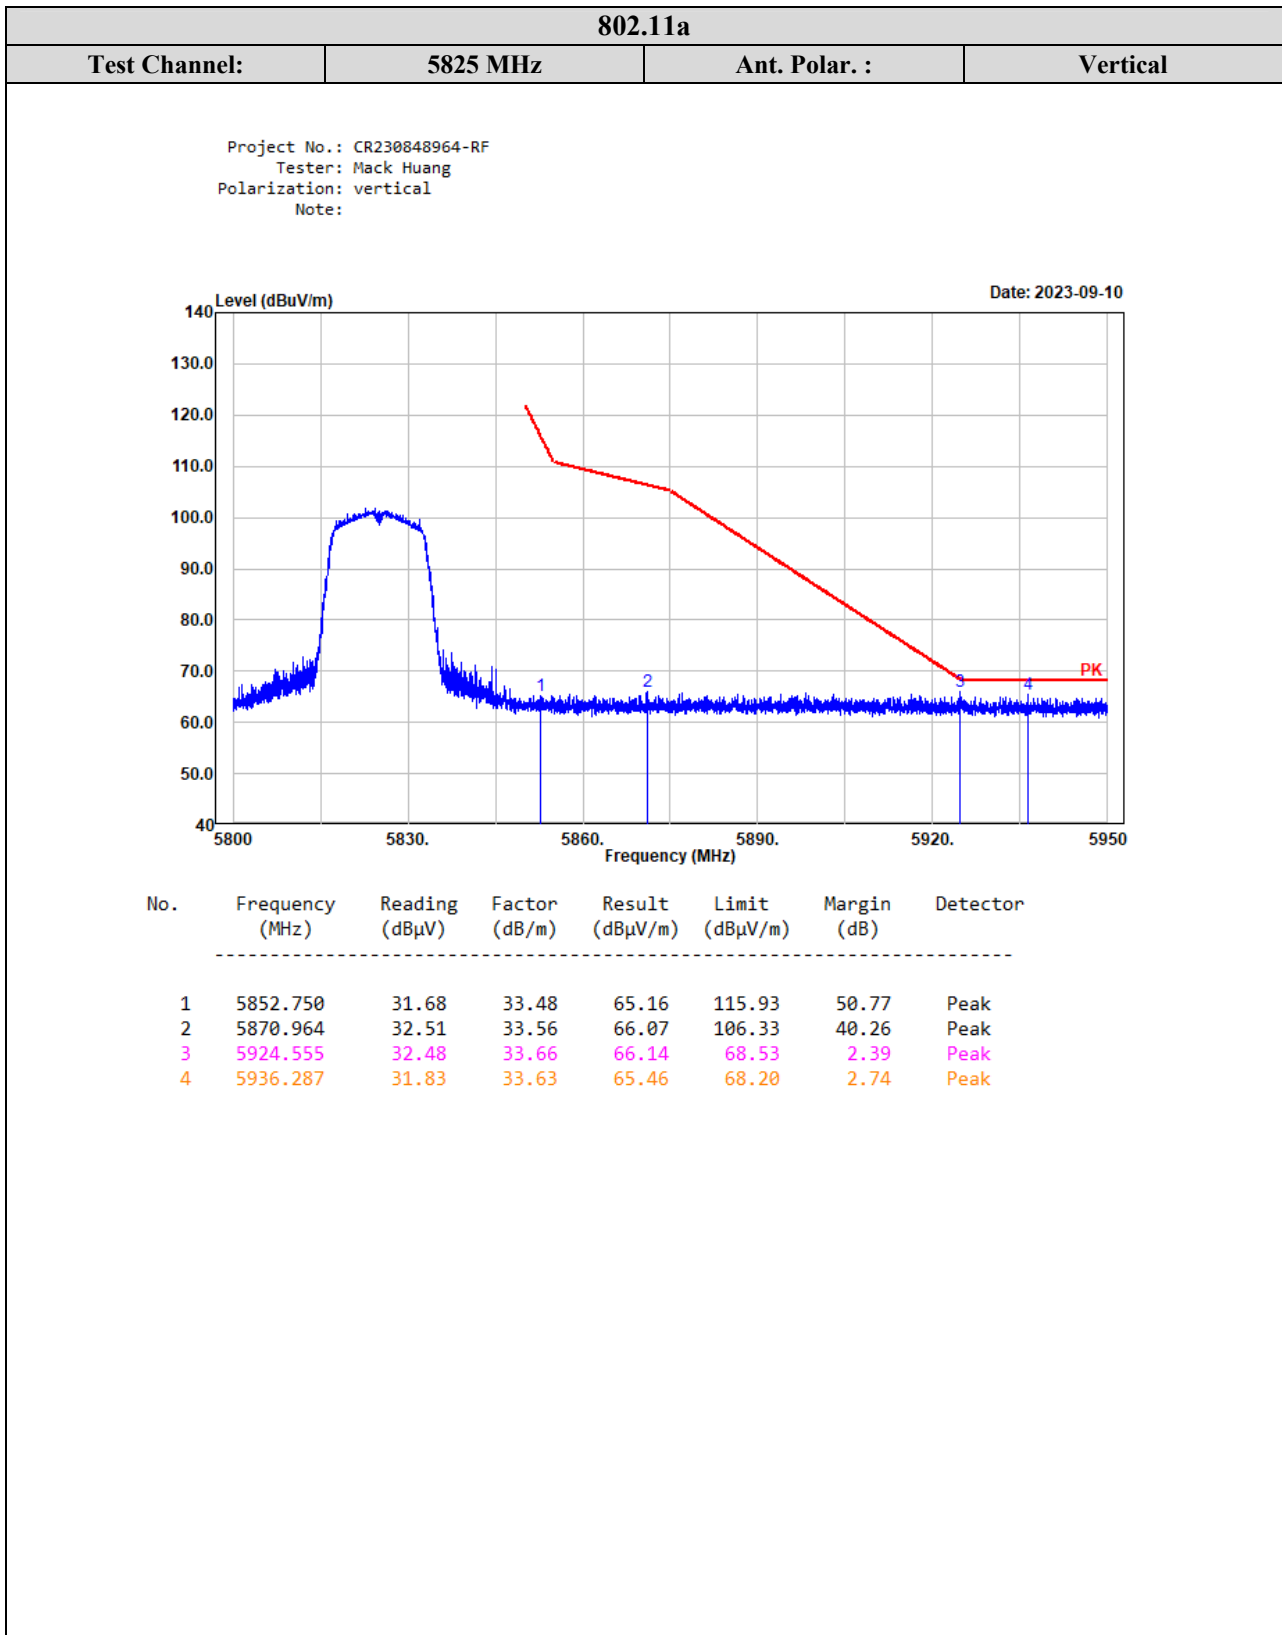


802.11ac vht20

Test Channel: 5745 MHz Ant. Polar. : Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-10-13

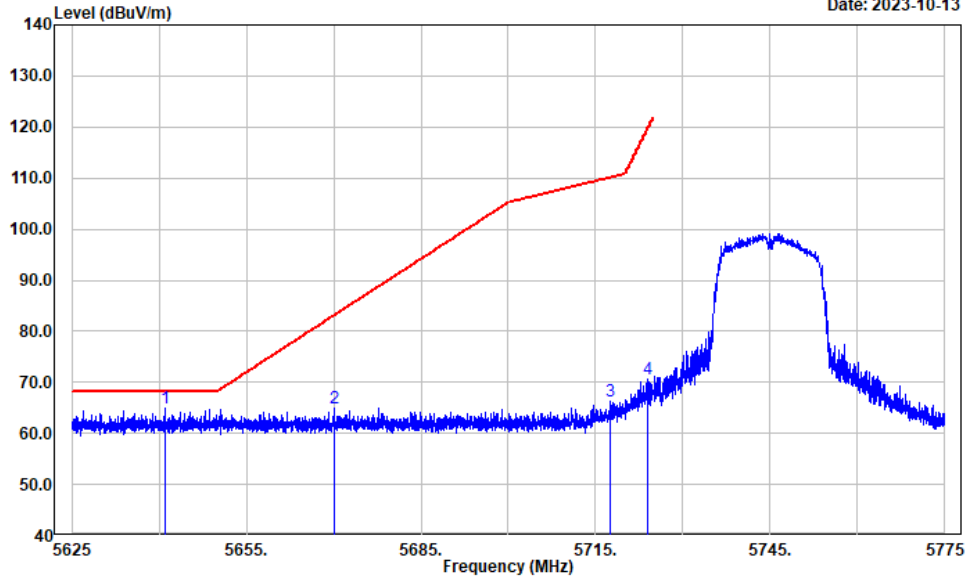


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5641.083	31.45	33.46	64.91	68.20	3.29	Peak
2	5670.129	31.40	33.48	64.88	83.13	18.25	Peak
3	5717.449	32.72	33.47	66.19	110.09	43.90	Peak
4	5724.050	37.29	33.46	70.75	120.03	49.28	Peak

802.11ac vht20

Test Channel:	5745 MHz	Ant. Polar. :	Vertical
----------------------	-----------------	----------------------	-----------------

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

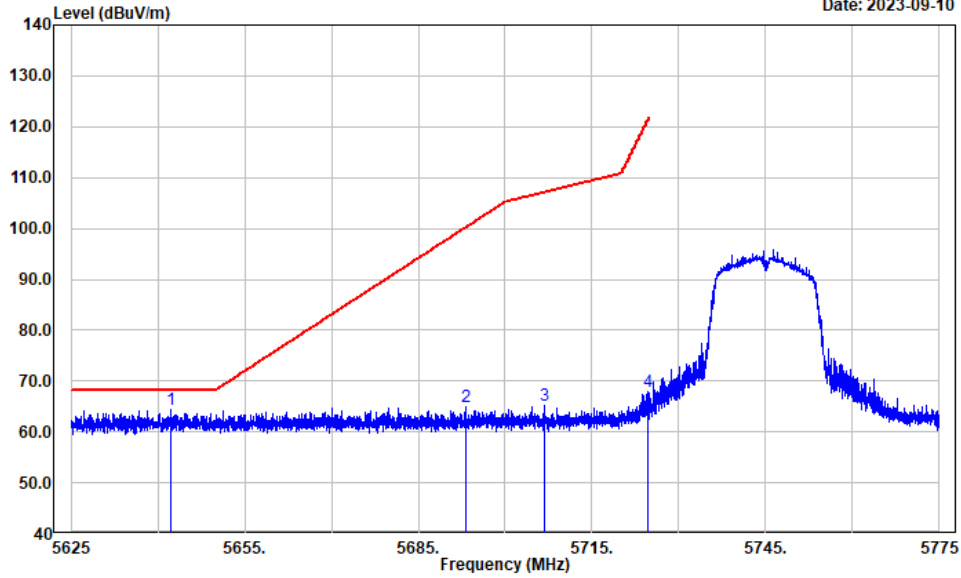


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5642.224	30.99	33.46	64.45	68.20	3.75	Peak
2	5693.114	31.43	33.49	64.92	100.12	35.20	Peak
3	5706.707	31.70	33.48	65.18	107.08	41.90	Peak
4	5724.680	34.48	33.46	67.94	121.47	53.53	Peak

802.11ac vht20

Test Channel: 5825 MHz Ant. Polar. : Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

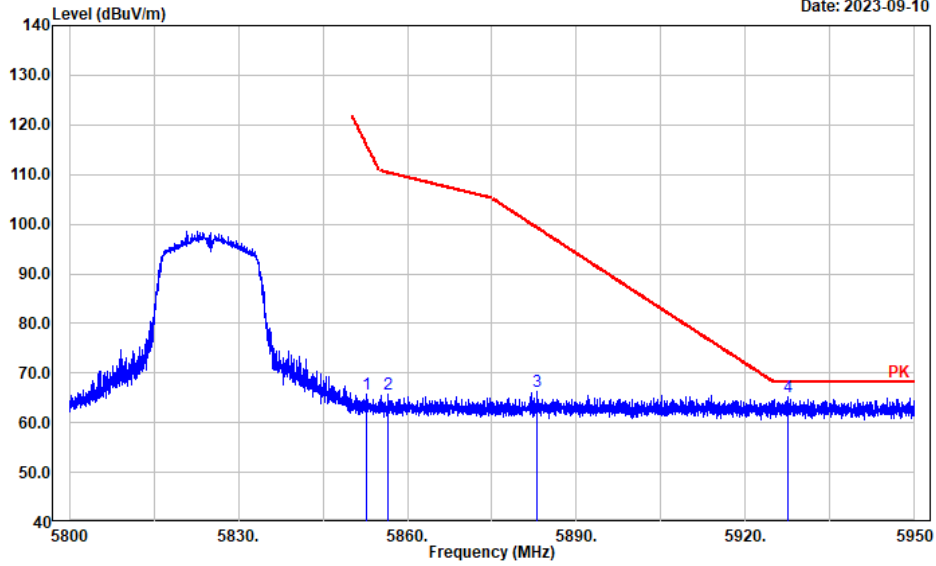


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5852.721	32.37	33.48	65.85	116.00	50.15	Peak
2	5856.562	32.28	33.50	65.78	110.36	44.58	Peak
3	5883.086	32.59	33.61	66.20	99.19	32.99	Peak
4	5927.585	31.45	33.65	65.10	68.20	3.10	Peak

802.11ac vht20

Test Channel: 5825 MHz Ant. Polar. : Vertical

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

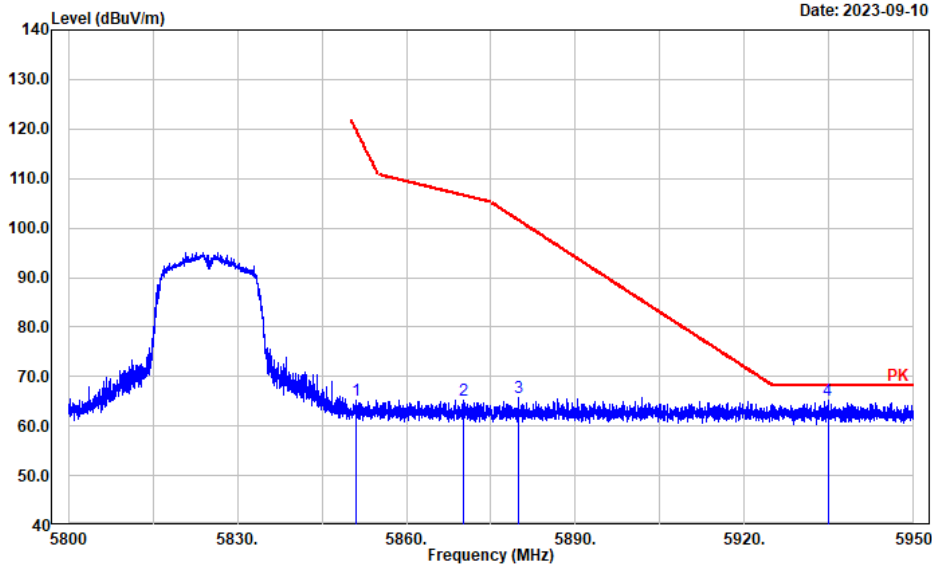


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.010	31.66	33.47	65.13	119.90	54.77	Peak
2	5870.094	31.65	33.56	65.21	106.57	41.36	Peak
3	5879.846	32.18	33.60	65.78	101.60	35.82	Peak
4	5934.787	31.60	33.64	65.24	68.20	2.96	Peak

802.11ac vht40

Test Channel: 5755 MHz Ant. Polar. : Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

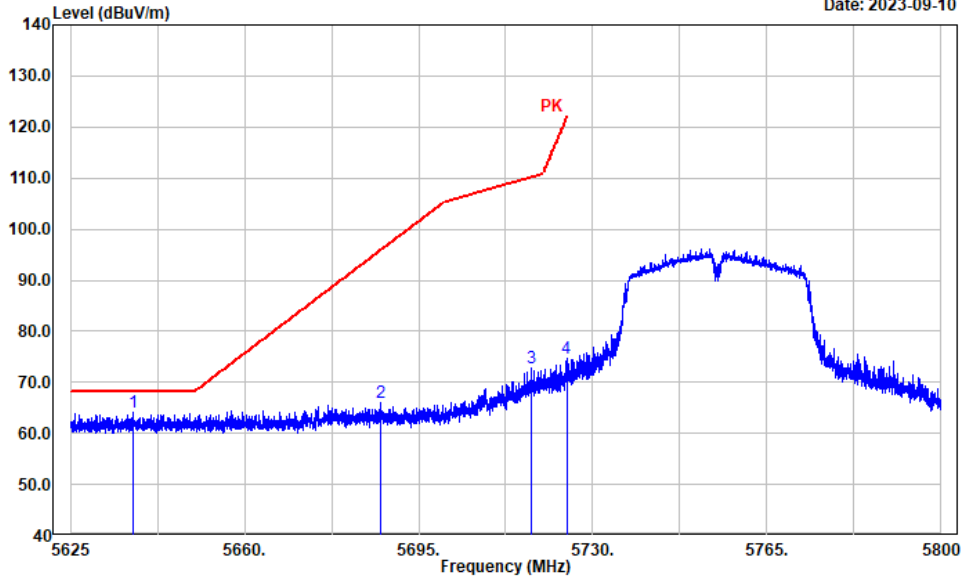


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5637.498	30.73	33.44	64.17	68.20	4.03	Peak
2	5687.243	32.63	33.48	66.11	95.79	29.68	Peak
3	5717.699	39.28	33.47	72.75	110.16	37.41	Peak
4	5724.735	41.10	33.46	74.56	121.60	47.04	Peak

802.11ac vht40

Test Channel:	5755 MHz	Ant. Polar. :	Vertical
----------------------	-----------------	----------------------	-----------------

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

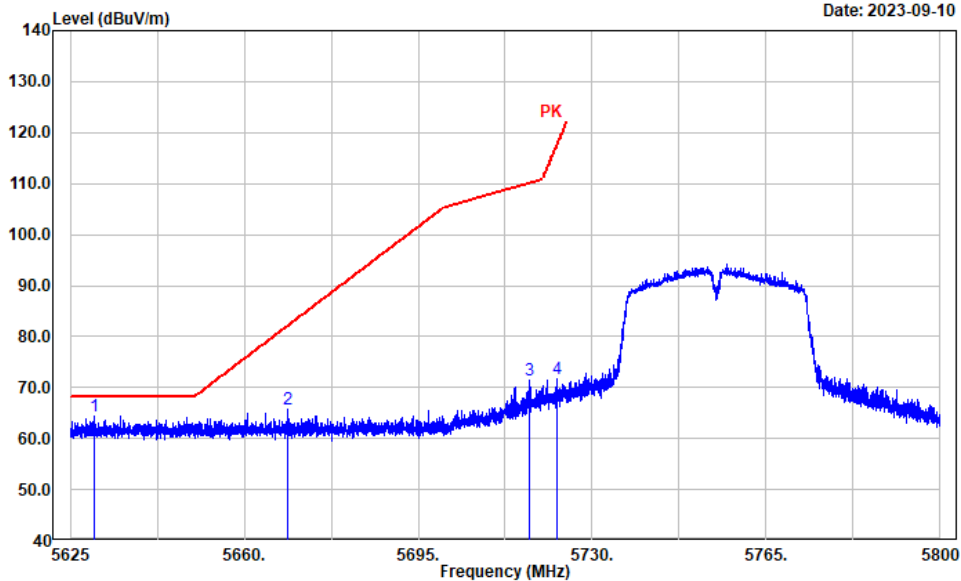


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5629.971	31.03	33.44	64.47	68.20	3.73	Peak
2	5668.864	32.17	33.48	65.65	82.20	16.55	Peak
3	5717.244	37.89	33.47	71.36	110.03	38.67	Peak
4	5722.984	38.19	33.46	71.65	117.61	45.96	Peak

802.11ac vht40

Test Channel: 5795 MHz Ant. Polar. : Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

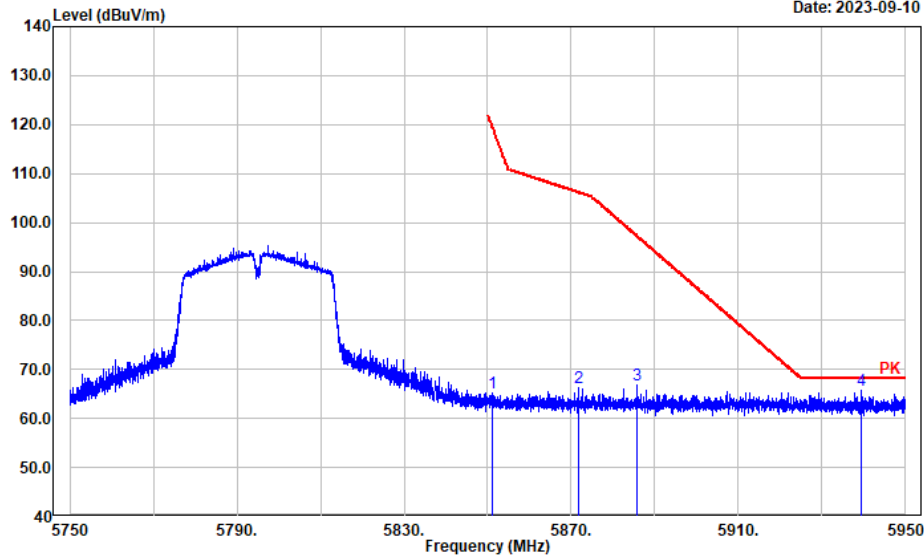


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.180	31.70	33.47	65.17	119.51	54.34	Peak
2	5871.744	32.80	33.57	66.37	106.11	39.74	Peak
3	5885.827	33.26	33.62	66.88	97.16	30.28	Peak
4	5939.518	32.05	33.64	65.69	68.20	2.51	Peak

802.11ac vht40


Test Channel: 5795 MHz Ant. Polar. : Vertical


Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

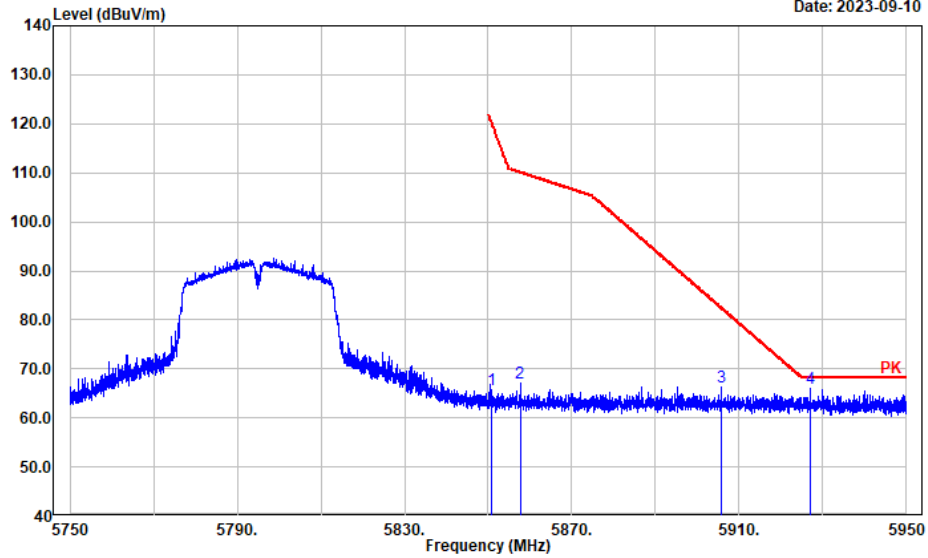


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.900	32.17	33.47	65.64	120.15	54.51	Peak
2	5857.622	33.65	33.50	67.15	110.06	42.91	Peak
3	5905.631	32.73	33.68	66.41	82.50	16.09	Peak
4	5927.036	32.34	33.65	65.99	68.20	2.21	Peak

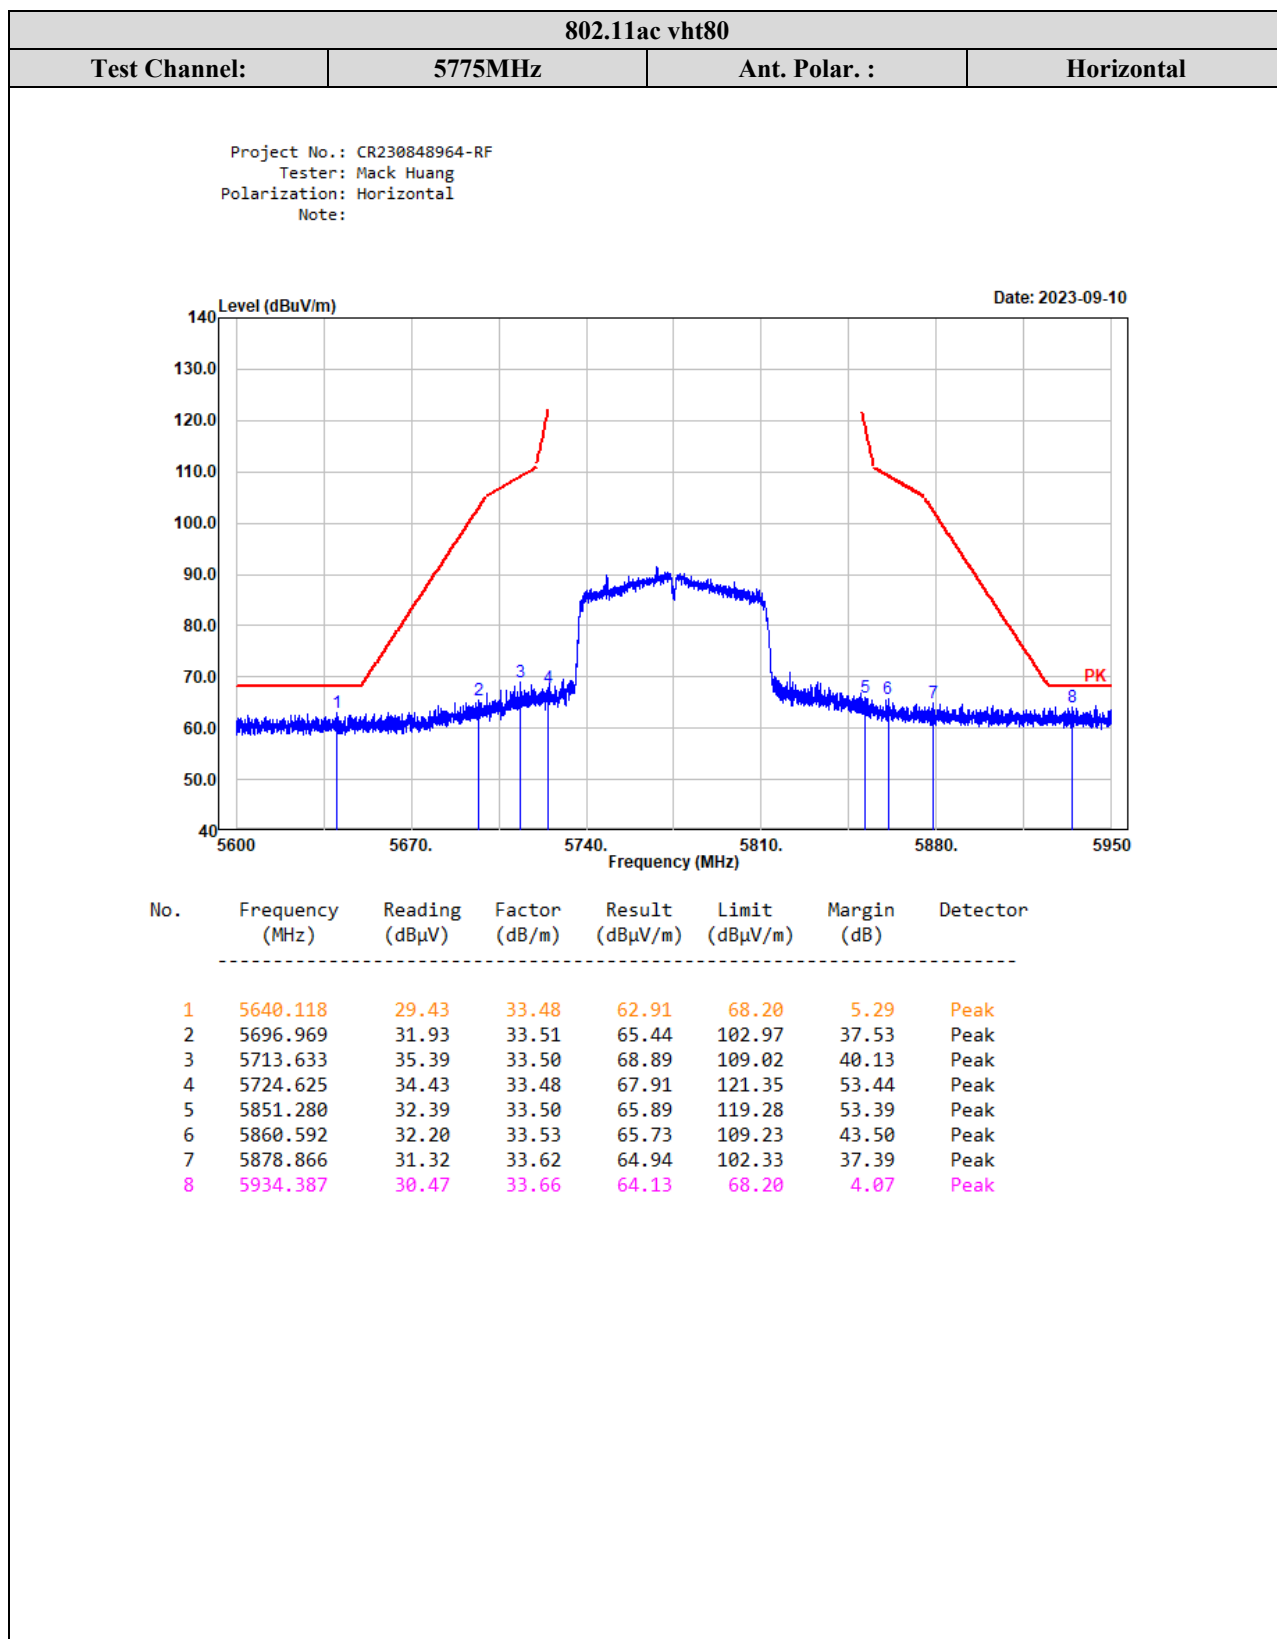

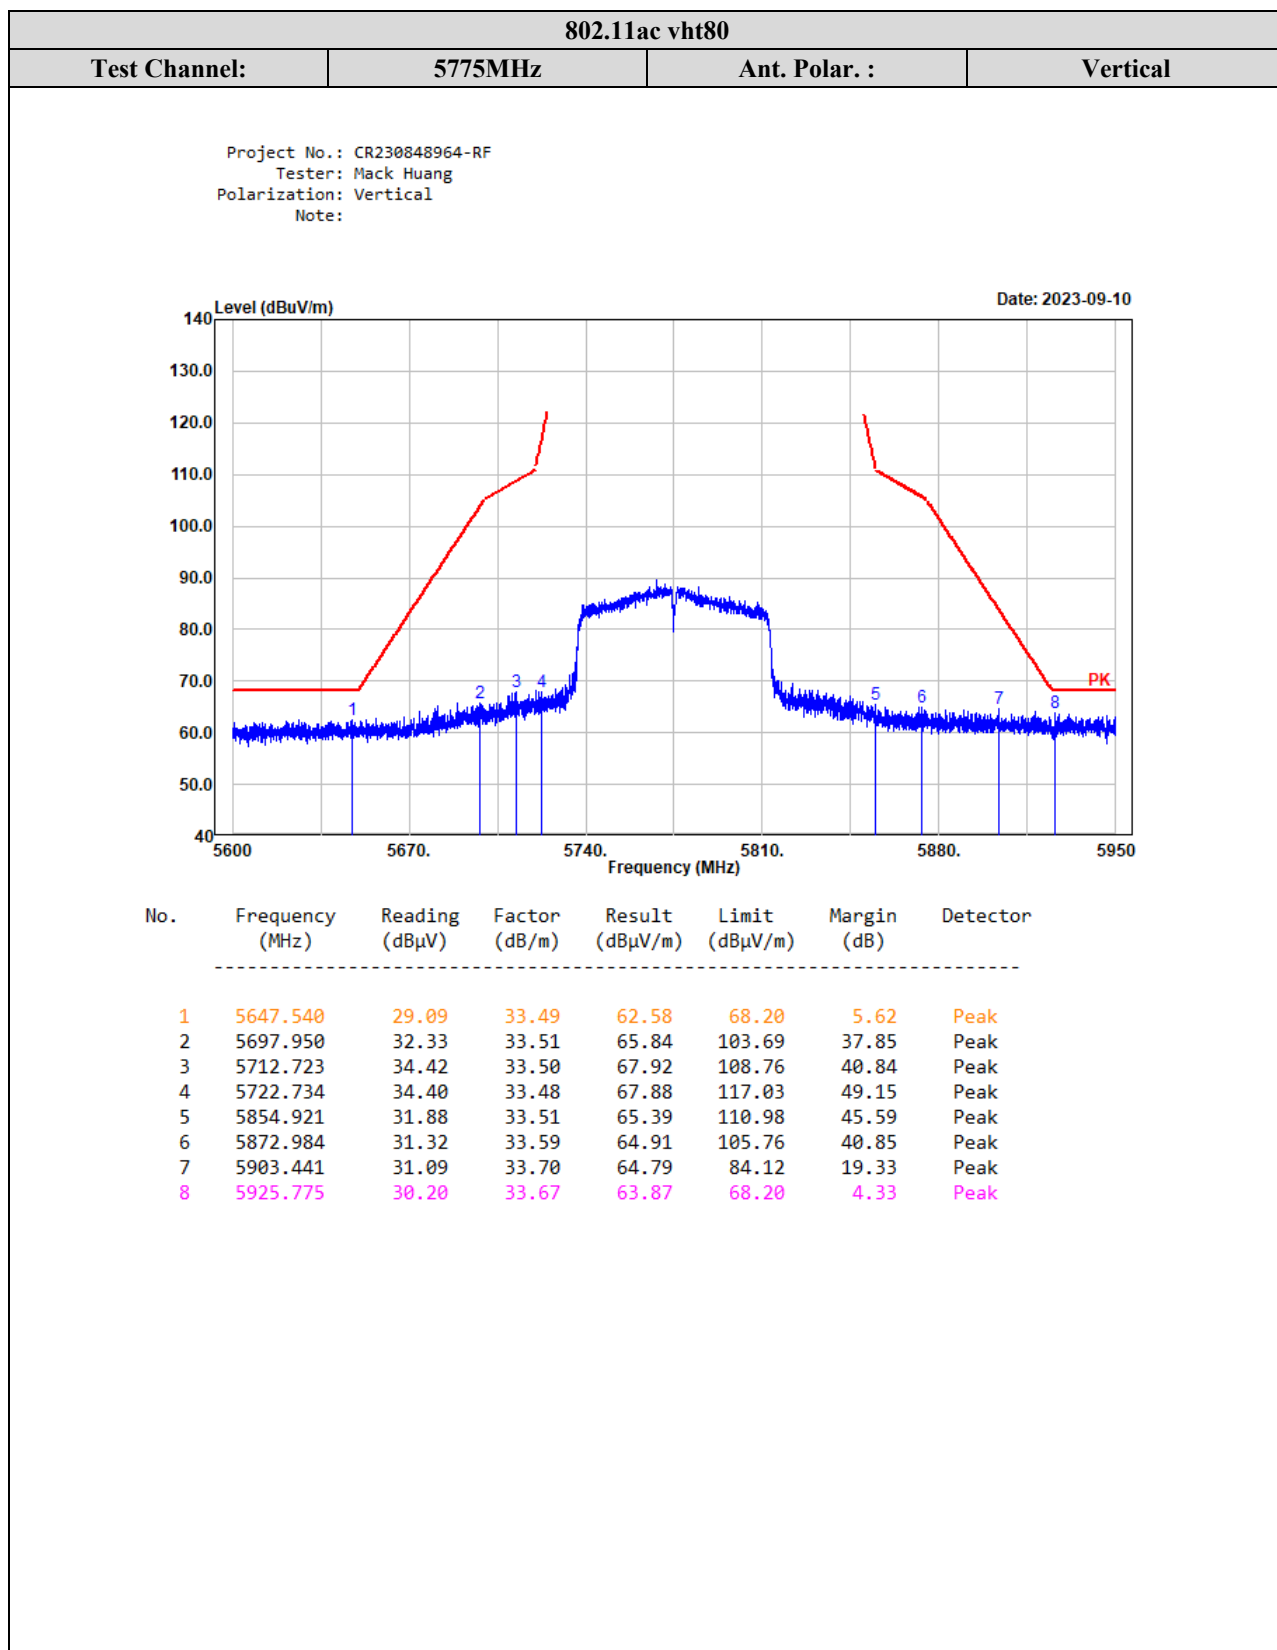


Worst Test plots for Harmonic Margin (802.11a 5825MHz)

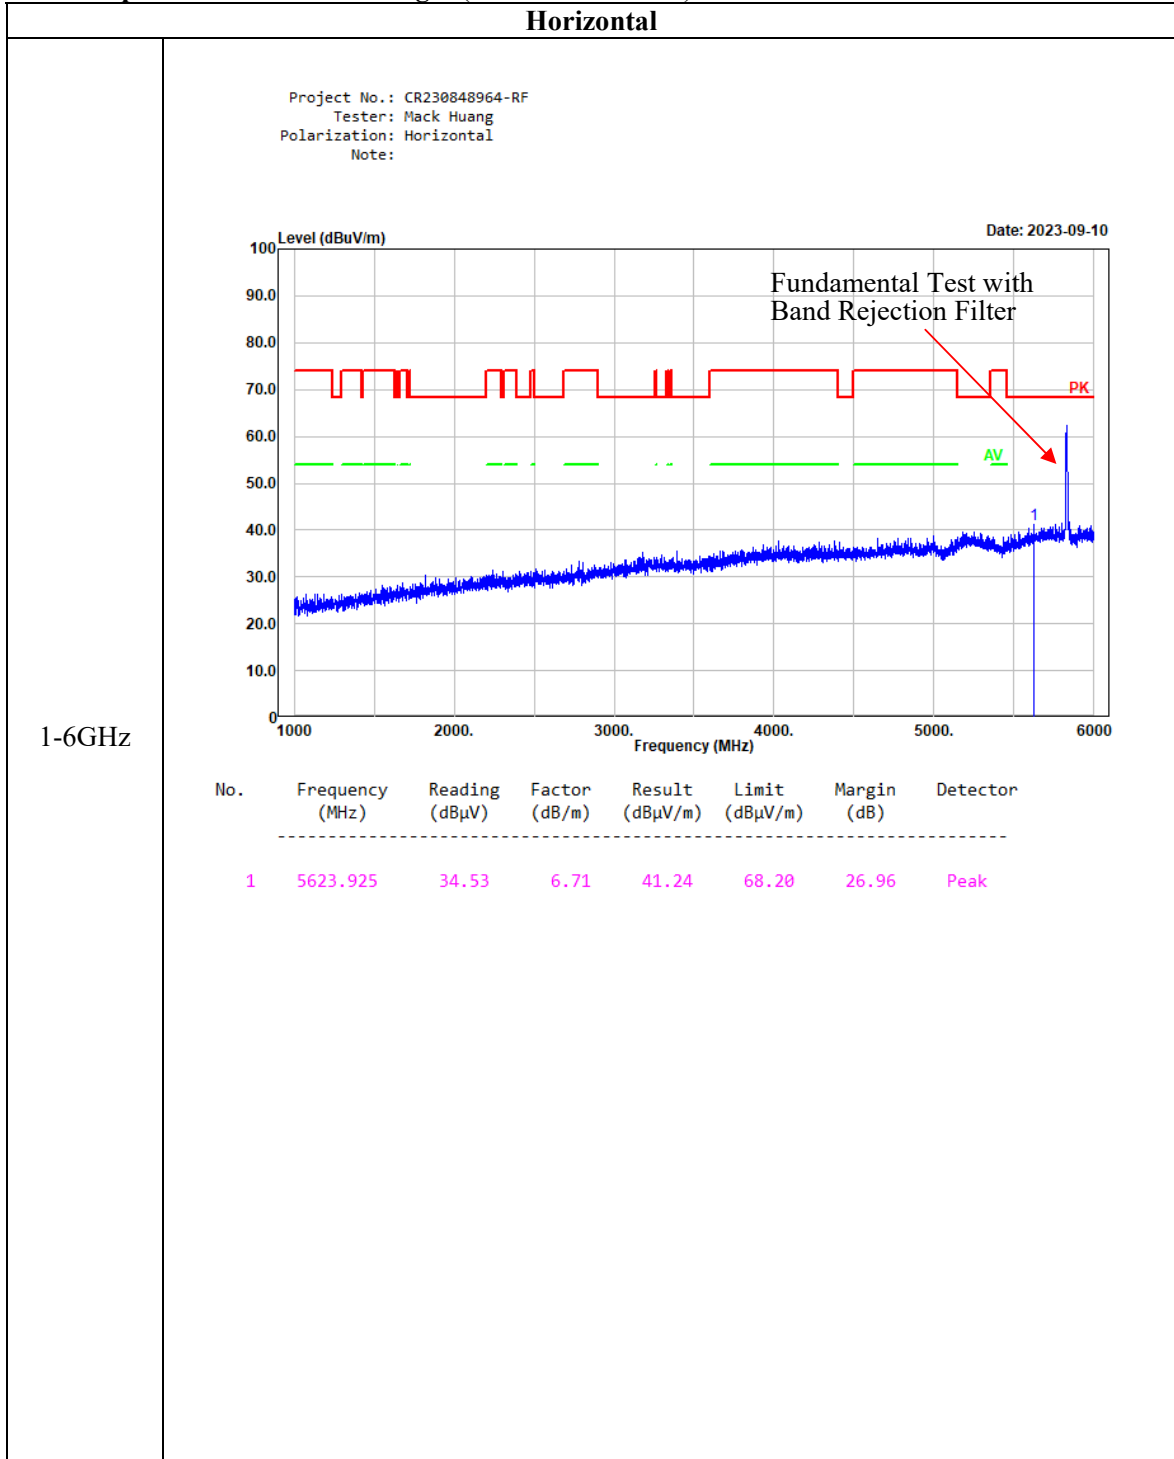

Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

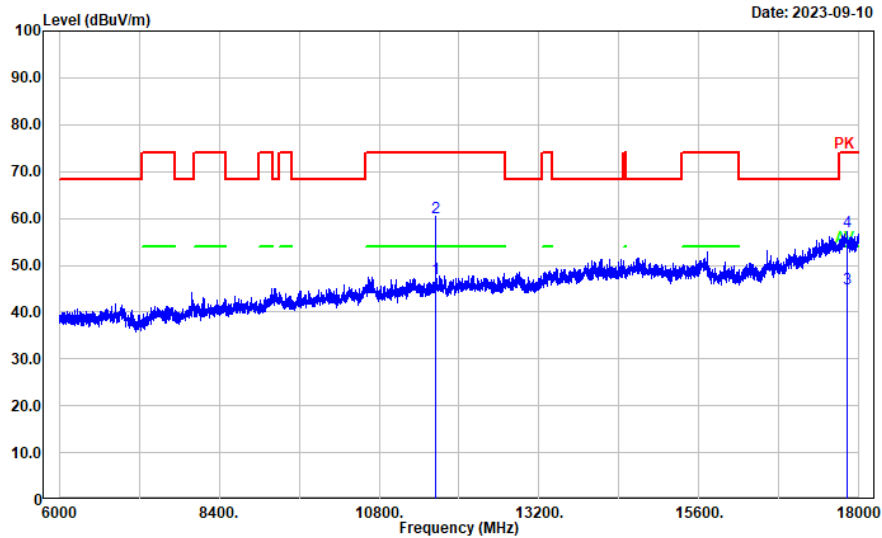


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	32.11	15.04	47.15	54.00	6.85	Average
2	11650.000	45.15	15.04	60.19	74.00	13.81	Peak
3	17815.160	20.03	24.93	44.96	54.00	9.04	Average
4	17815.160	32.37	24.93	57.30	74.00	16.70	Peak

Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

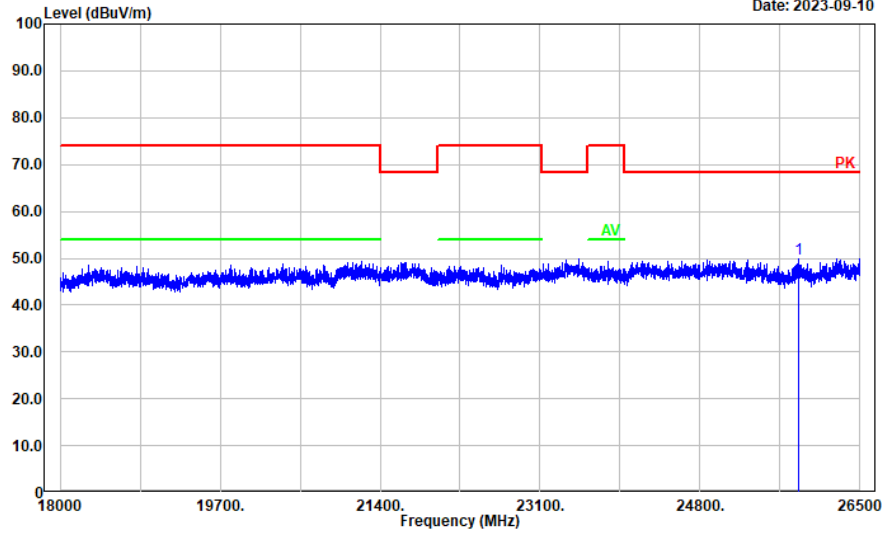


18-26.5GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	25852.170	49.64	0.23	49.87	68.20	18.33	Peak

Horizontal

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Horizontal
 Note:

Date: 2023-09-10

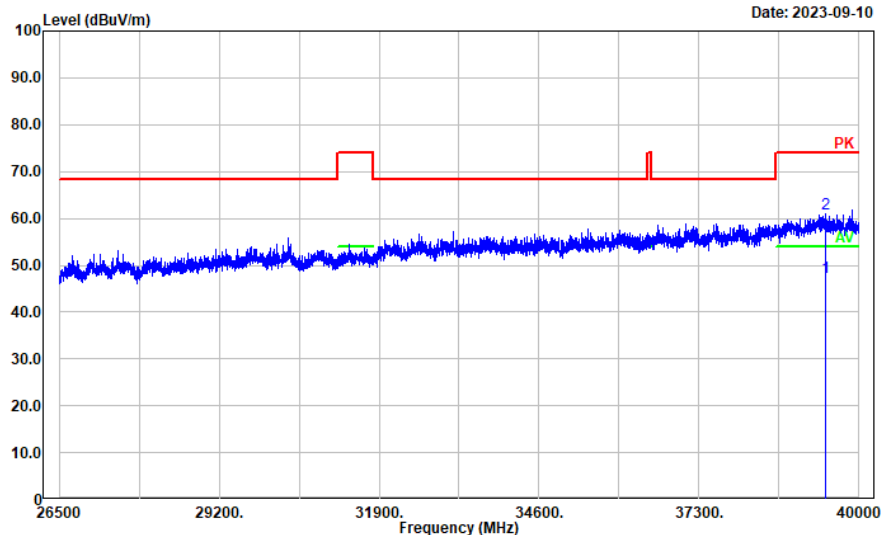


26.5-40GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39424.790	37.31	10.17	47.48	54.00	6.52	Average
2	39424.790	50.80	10.17	60.97	74.00	13.03	Peak

Vertical

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Vertical
 Note:

Date: 2023-09-10

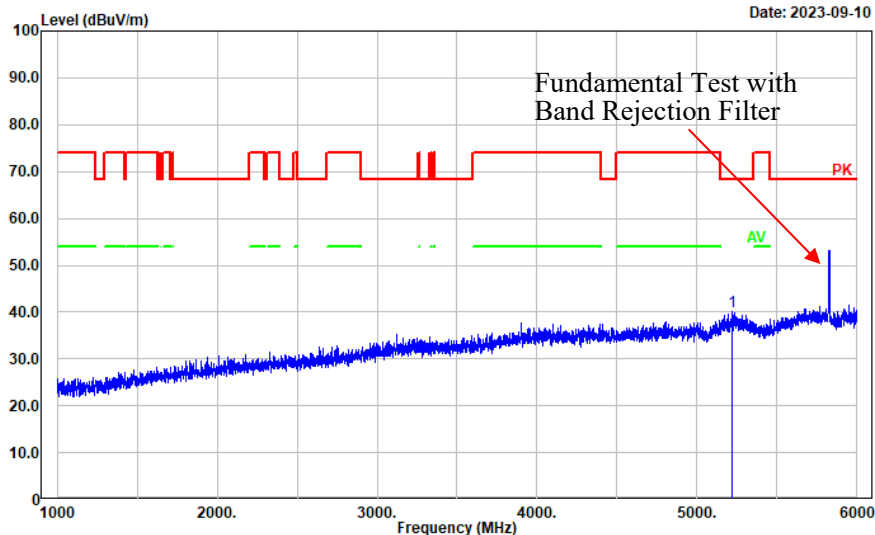


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5220.844	34.50	5.70	40.20	68.20	28.00	Peak

Vertical

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: Vertical
 Note:

Date: 2023-09-10

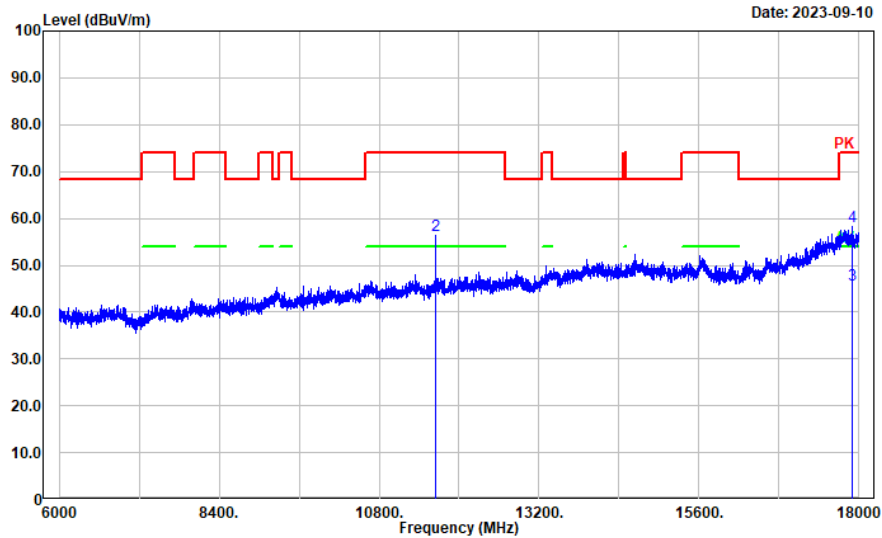


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	28.21	15.04	43.25	54.00	10.75	Average
2	11650.000	41.41	15.04	56.45	74.00	17.55	Peak
3	17903.980	20.34	25.55	45.89	54.00	8.11	Average
4	17903.980	32.82	25.55	58.37	74.00	15.63	Peak

Vertical

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

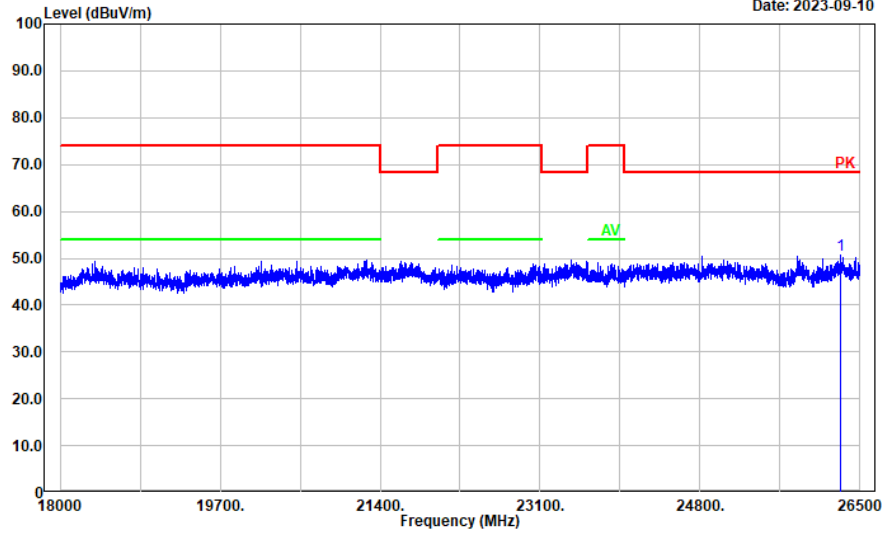


18-26.5GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	26290.860	49.75	0.92	50.67	68.20	17.53	Peak

Vertical

Project No.: CR230848964-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-09-10

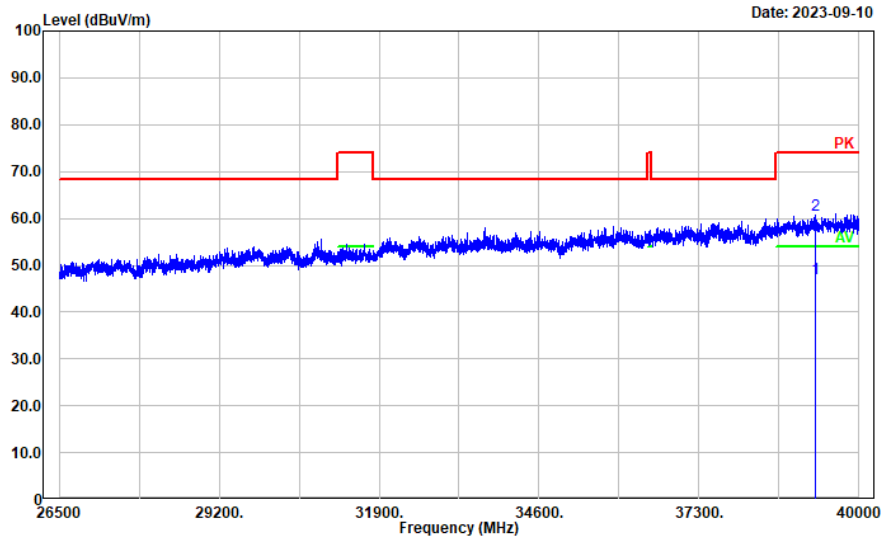

26.5-40GHz

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	39268.150	37.11	10.17	47.28	54.00	6.72	Average
2	39268.150	50.41	10.17	60.58	74.00	13.42	Peak

4.3 Emission Bandwidth:

Serial Number:	2A93-1	Test Date:	2023/09/04~2023/09/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~29	Relative Humidity: (%)	43~58	ATM Pressure: (kPa)	101
----------------------	---------	------------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	27.20	17.16
	5200	25.32	17.16
	5240	24.40	17.04
802.11ac vht20	5180	29.56	18.08
	5200	28.04	18.04
	5240	27.20	18.04
802.11ac vht40	5190	56.08	36.56
	5230	54.96	36.48
802.11ac vht80	5210	82.88	75.52

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth




5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	15.20	17.24
	5785	15.40	17.32
	5825	15.40	17.36
802.11ac vht20	5745	15.20	18.36
	5785	15.20	18.24
	5825	15.20	18.32
802.11ac vht40	5755	35.28	36.80
	5795	35.38	36.64
802.11ac vht80	5775	75.36	76.32
Note:6dB Emission Bandwidth Limit: ≥ 0.5 MHz the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			

5150-5250MHz:

26dB Emission Bandwidth	
<p>802.11a Lowest Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:41:08</p>
<p>802.11a Middle Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:45:31</p>
<p>802.11a Highest Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:48:53</p>




26dB Emission Bandwidth
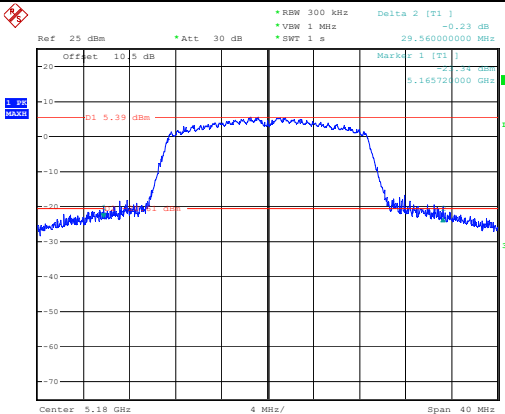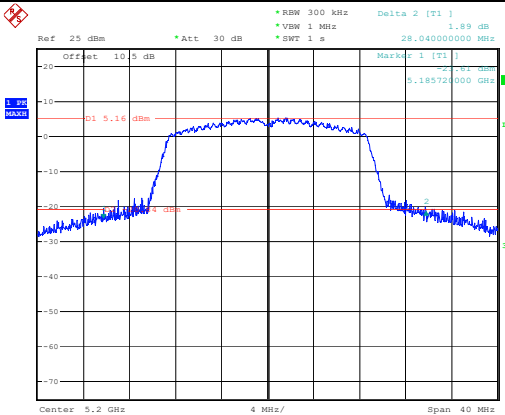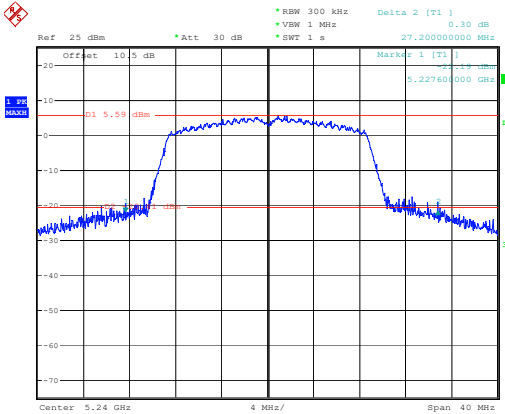
<p>802.11ac vht20 Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:11:12</p>
<p>802.11ac vht20 Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:15:19</p>
<p>802.11ac vht20 Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:20:25</p>




26dB Emission Bandwidth

<p>802.11ac vht40 Lowest Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:39:51</p>
<p>802.11ac vht40 Highest Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:42:57</p>
<p>802.11ac vht80 Middle Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:06:26</p>




99% Emission Bandwidth
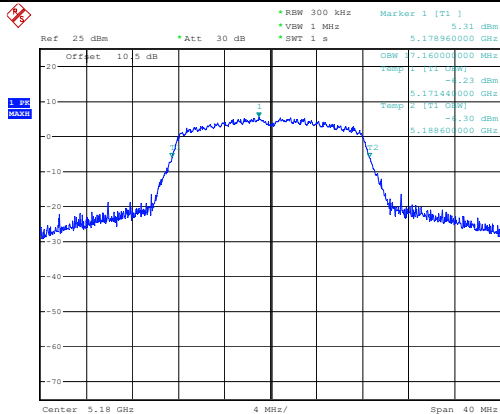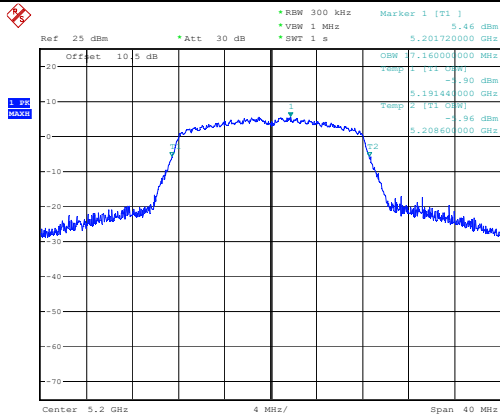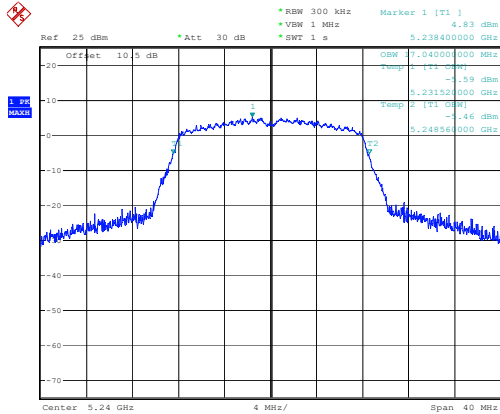
<p>802.11a Lowest Channel</p>	 <p>Ref: 25 dBm *Att: 30 dB *RBW: 300 kHz *VMW: 1 MHz *SWT: 1 s Marker 1 [T1] 5.17896000 GHz</p> <table border="1"> <thead> <tr> <th>Offset</th> <th>Att</th> <th>RBW</th> <th>VMW</th> <th>SWT</th> <th>Marker</th> <th>Level</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>1</td> <td>0.00 dBm</td> </tr> <tr> <td>10</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>2</td> <td>-1.23 dBm</td> </tr> <tr> <td>20</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>3</td> <td>-4.30 dBm</td> </tr> </tbody> </table> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:40:21</p>	Offset	Att	RBW	VMW	SWT	Marker	Level	0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm	10	30 dB	300 kHz	1 MHz	1 s	2	-1.23 dBm	20	30 dB	300 kHz	1 MHz	1 s	3	-4.30 dBm
Offset	Att	RBW	VMW	SWT	Marker	Level																							
0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm																							
10	30 dB	300 kHz	1 MHz	1 s	2	-1.23 dBm																							
20	30 dB	300 kHz	1 MHz	1 s	3	-4.30 dBm																							
<p>802.11a Middle Channel</p>	 <p>Ref: 25 dBm *Att: 30 dB *RBW: 300 kHz *VMW: 1 MHz *SWT: 1 s Marker 1 [T1] 5.20172000 GHz</p> <table border="1"> <thead> <tr> <th>Offset</th> <th>Att</th> <th>RBW</th> <th>VMW</th> <th>SWT</th> <th>Marker</th> <th>Level</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>1</td> <td>0.00 dBm</td> </tr> <tr> <td>10</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>2</td> <td>-1.90 dBm</td> </tr> <tr> <td>20</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>3</td> <td>-3.96 dBm</td> </tr> </tbody> </table> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:44:56</p>	Offset	Att	RBW	VMW	SWT	Marker	Level	0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm	10	30 dB	300 kHz	1 MHz	1 s	2	-1.90 dBm	20	30 dB	300 kHz	1 MHz	1 s	3	-3.96 dBm
Offset	Att	RBW	VMW	SWT	Marker	Level																							
0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm																							
10	30 dB	300 kHz	1 MHz	1 s	2	-1.90 dBm																							
20	30 dB	300 kHz	1 MHz	1 s	3	-3.96 dBm																							
<p>802.11a Highest Channel</p>	 <p>Ref: 25 dBm *Att: 30 dB *RBW: 300 kHz *VMW: 1 MHz *SWT: 1 s Marker 1 [T1] 5.23840000 GHz</p> <table border="1"> <thead> <tr> <th>Offset</th> <th>Att</th> <th>RBW</th> <th>VMW</th> <th>SWT</th> <th>Marker</th> <th>Level</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>1</td> <td>0.00 dBm</td> </tr> <tr> <td>10</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>2</td> <td>-1.59 dBm</td> </tr> <tr> <td>20</td> <td>30 dB</td> <td>300 kHz</td> <td>1 MHz</td> <td>1 s</td> <td>3</td> <td>-3.46 dBm</td> </tr> </tbody> </table> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:47:53</p>	Offset	Att	RBW	VMW	SWT	Marker	Level	0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm	10	30 dB	300 kHz	1 MHz	1 s	2	-1.59 dBm	20	30 dB	300 kHz	1 MHz	1 s	3	-3.46 dBm
Offset	Att	RBW	VMW	SWT	Marker	Level																							
0	30 dB	300 kHz	1 MHz	1 s	1	0.00 dBm																							
10	30 dB	300 kHz	1 MHz	1 s	2	-1.59 dBm																							
20	30 dB	300 kHz	1 MHz	1 s	3	-3.46 dBm																							

99% Emission Bandwidth
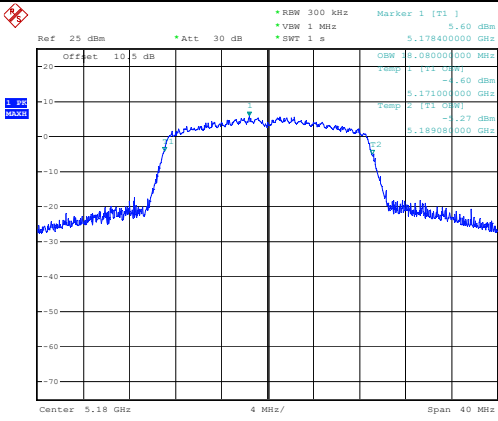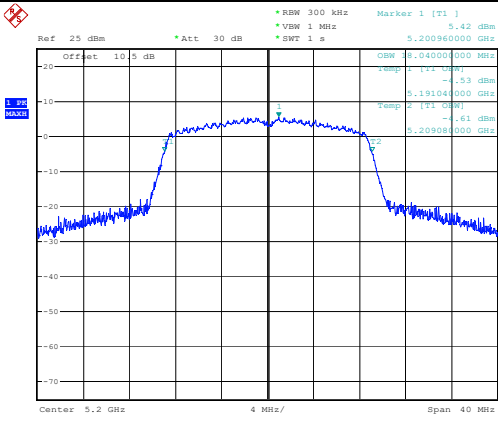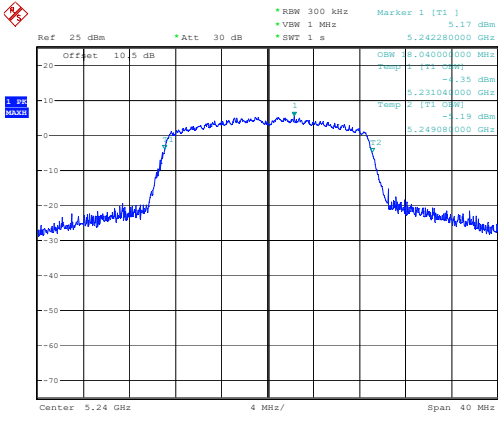
<p>802.11ac vht20 Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:10:24</p>
<p>802.11ac vht20 Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:14:20</p>
<p>802.11ac vht20 Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:19:37</p>

99% Emission Bandwidth
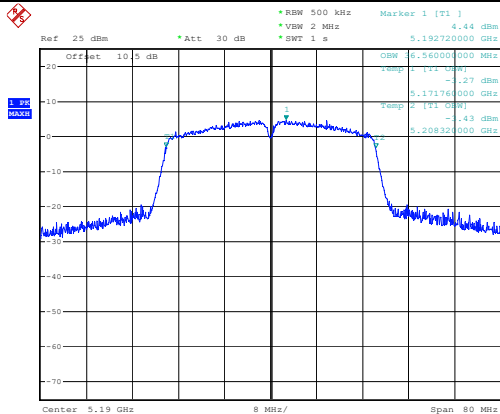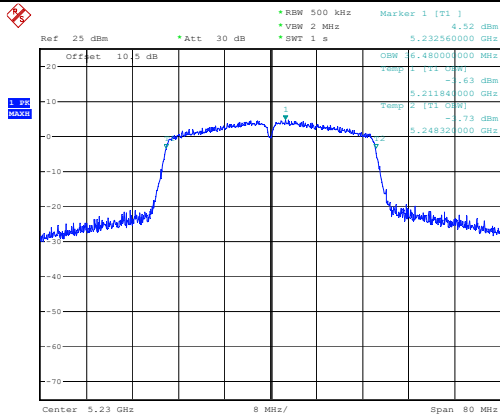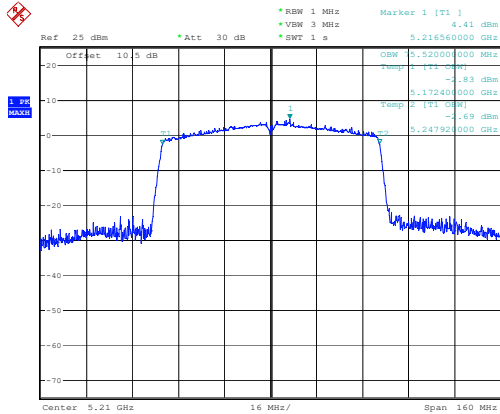
<p>802.11ac vht40 Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:39:03</p>
<p>802.11ac vht40 Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:42:15</p>
<p>802.11ac vht80 Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:05:28</p>

5725-5850MHz:

6dB Emission Bandwidth	
802.11a Lowest Channel	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:54:34</p>
802.11a Middle Channel	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:58:34</p>
802.11a Highest Channel	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:03:11</p>


6dB Emission Bandwidth	
802.11ac vht20 Lowest Channel	<p> *RBW 100 kHz Delta 2 [T1] 0.96 dB *VSW 300 kHz 15.20000000 MHz *SWT 1 s </p> <p> Ref 25 dBm *Att 30 dB Offset 10.5 dB Markers 1 [T1] 5.73740000 GHz -10.96 dBm </p> <p> D1 0.76 dBm D2 -12.24 dBm </p> <p> Center 5.745 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:23:18 </p>
802.11ac vht20 Middle Channel	<p> *RBW 100 kHz Delta 2 [T1] 1.27 dB *VSW 300 kHz 15.20000000 MHz *SWT 1 s </p> <p> Ref 25 dBm *Att 30 dB Offset 10.5 dB Markers 1 [T1] 5.77740000 GHz -10.27 dBm </p> <p> D1 8.88 dBm D2 -15.02 dBm </p> <p> Center 5.785 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:26:54 </p>
802.11ac vht20 Highest Channel	<p> *RBW 100 kHz Delta 2 [T1] 0.31 dB *VSW 300 kHz 15.20000000 MHz *SWT 1 s </p> <p> Ref 25 dBm *Att 30 dB Offset 10.5 dB Markers 1 [T1] 5.81740000 GHz -10.31 dBm </p> <p> D1 0.3 dBm D2 -15.39 dBm </p> <p> Center 5.825 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:29:47 </p>

6dB Emission Bandwidth	
802.11ac vht40 Lowest Channel	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:46:19</p>
802.11ac vht40 Highest Channel	<p>ProjectNo.:CR230848964 Tester:Rod Luo Date: 11.SEP.2023 17:24:13</p>
802.11ac vht80 Middle Channel	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:13:12</p>

99% Emission Bandwidth	
802.11a Lowest Channel	<p> *RBW 300 kHz Marker 1 [T1] *VSW 1 MHz *SWT 1 s Ref 25 dBm *Att 30 dB 5.745440000 GHz Offset 10.5 dB Center 5.745 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:53:59 </p>
802.11a Middle Channel	<p> *RBW 300 kHz Marker 1 [T1] *VSW 1 MHz *SWT 1 s Ref 25 dBm *Att 30 dB 5.783360000 GHz Offset 10.5 dB Center 5.785 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:57:59 </p>
802.11a Highest Channel	<p> *RBW 300 kHz Marker 1 [T1] *VSW 1 MHz *SWT 1 s Ref 25 dBm *Att 30 dB 5.824000000 GHz Offset 10.5 dB Center 5.825 GHz 4 MHz/ Span 40 MHz </p> <p> ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:02:36 </p>


99% Emission Bandwidth

802.11ac vht20
Lowest Channel

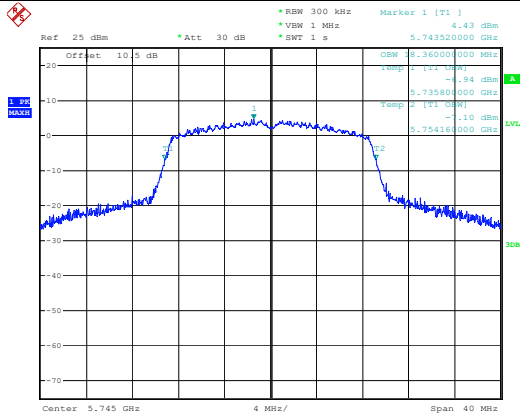


ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:22:56

802.11ac vht20
Middle Channel

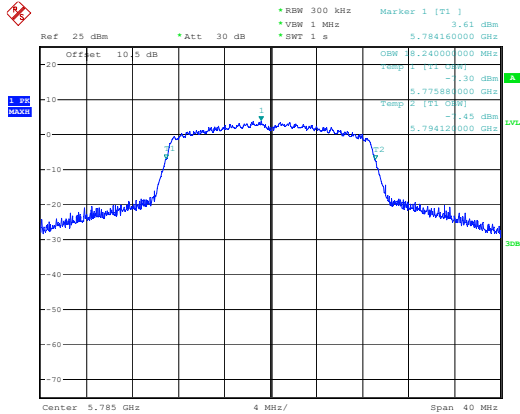

ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:26:19

802.11ac vht20
Highest Channel

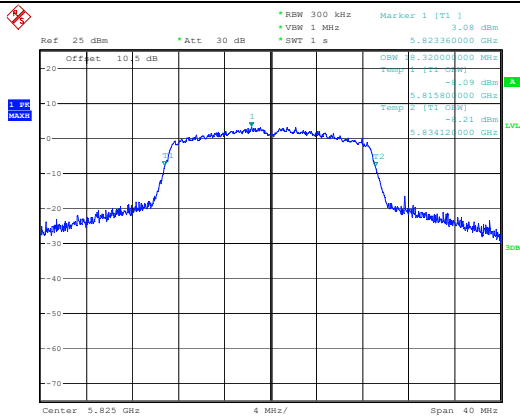

ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:29:23

99% Emission Bandwidth

<p>802.11ac vht40 Lowest Channel</p>	<p>ProjectNo.:CR230848964 Tester:Rod Luo Date: 11.SEP.2023 17:28:45</p>
<p>802.11ac vht40 Highest Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:49:30</p>
<p>802.11ac vht80 Middle Channel</p>	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:12:38</p>

4.4 Maximum Conducted Output Power:

Serial Number:	2A93-1	Test Date:	2023/09/04~2023/09/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~29	Relative Humidity: (%)	43~58	Temperature: (°C)	101
----------------------	---------	------------------------------	-------	----------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	12.01	24
	5200	12.08	24
	5240	11.53	24
802.11ac vht20	5180	12.17	24
	5200	12.2	24
	5240	12.08	24
802.11ac vht40	5190	11.88	24
	5230	11.95	24
802.11ac vht80	5210	10.5	24

Note: The device is a client device.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	10.56	30
	5785	9.82	30
	5825	9.3	30
802.11ac vht20	5745	11.16	30
	5785	10.4	30
	5825	9.8	30
802.11ac vht40	5755	10.22	30
	5795	10.72	30
802.11ac vht80	5775	10.1	30

4.5 Maximum power spectral density:

Serial Number:	2A93-1	Test Date:	2023/09/04
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	58	Temperature: (°C)	101
----------------------	------	------------------------------	----	----------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	1.89	0.15	2.04	11
	5200	1.77	0.15	1.92	11
	5240	1.27	0.15	1.42	11
802.11ac vht20	5180	1.60	0.16	1.76	11
	5200	1.61	0.16	1.77	11
	5240	1.50	0.16	1.66	11
802.11ac vht40	5190	-1.59	0.28	-1.31	11
	5230	-1.34	0.28	-1.06	11
802.11ac vht80	5210	-6.33	0.56	-5.77	11

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-2.62	0.15	-2.47	30
	5785	-3.27	0.15	-3.12	30
	5825	-3.88	0.15	-3.73	30
802.11ac vht20	5745	-2.31	0.16	-2.15	30
	5785	-3.06	0.16	-2.90	30
	5825	-3.59	0.16	-3.43	30
802.11ac vht40	5755	-6.19	0.28	-5.91	30
	5795	-6.79	0.28	-6.51	30
802.11ac vht80	5775	-9.43	0.56	-8.87	30

Note:

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.




Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.

Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.

For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.


5150-5250MHz:

Maximum power spectral density
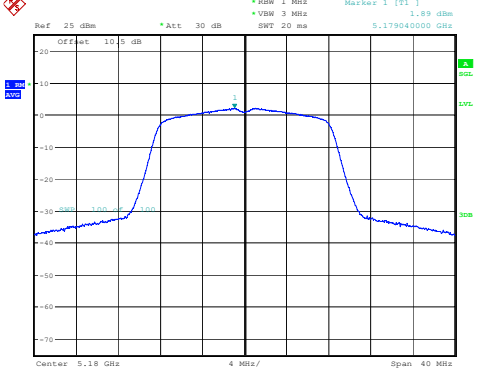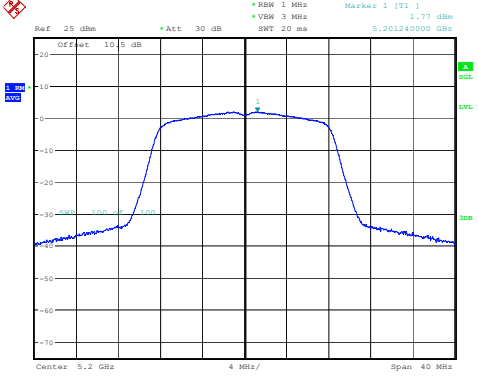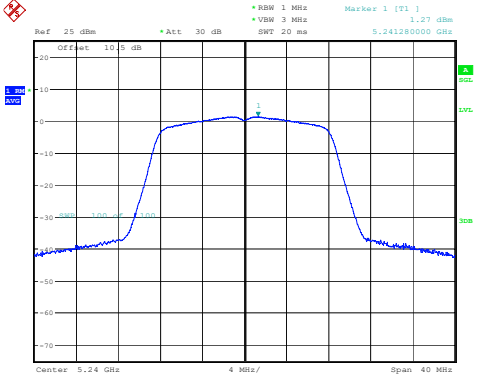
<p>802.11a Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:41:23</p>
<p>802.11a Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:45:46</p>
<p>802.11a Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 14:49:08</p>


Maximum power spectral density

802.11ac vht20
Lowest Channel

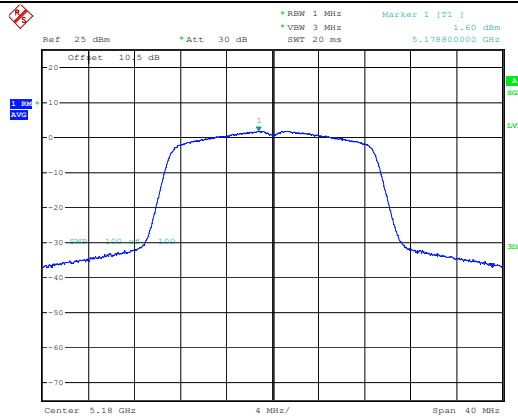


ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:11:27

802.11ac vht20
Middle Channel

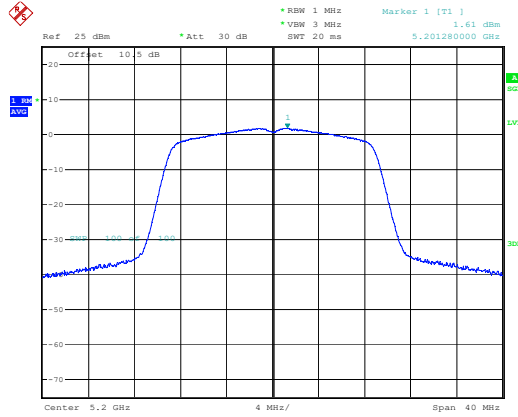




ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:15:33

802.11ac vht20
Highest Channel

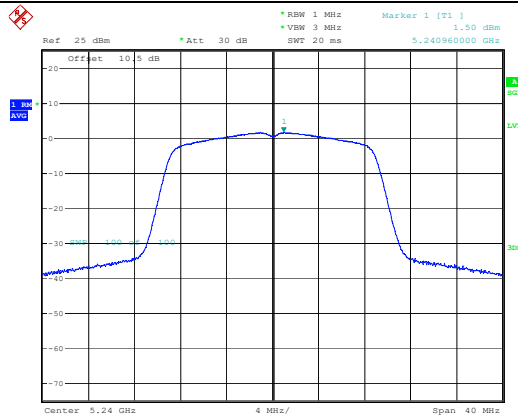




ProjectNo.:CR230848964-RF Tester:Rod Luo
Date: 4.SEP.2023 15:20:40

Maximum power spectral density

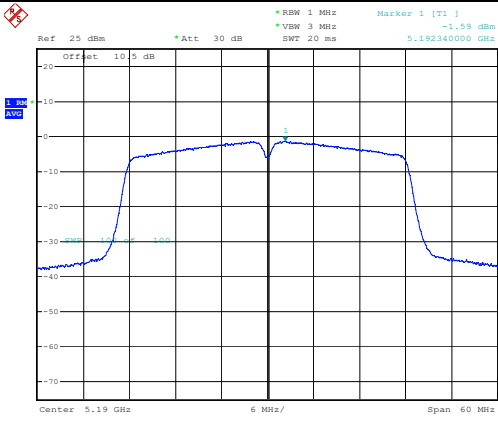
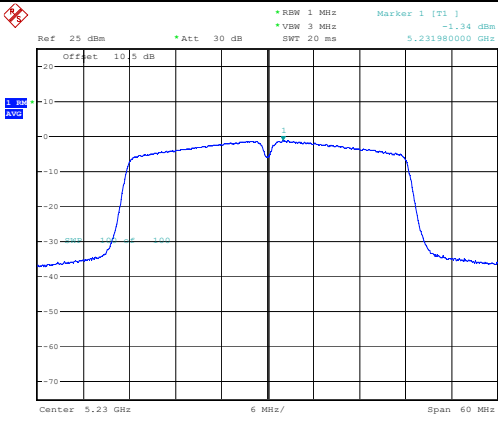
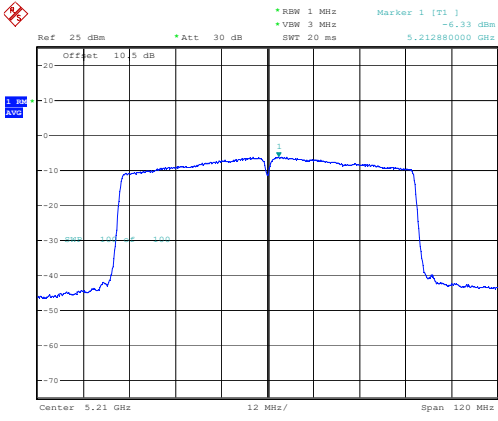
<p>802.11ac vht40 Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:40:07</p>
<p>802.11ac vht40 Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:43:16</p>
<p>802.11ac vht80 Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:06:46</p>

5725-5850MHz

Maximum power spectral density

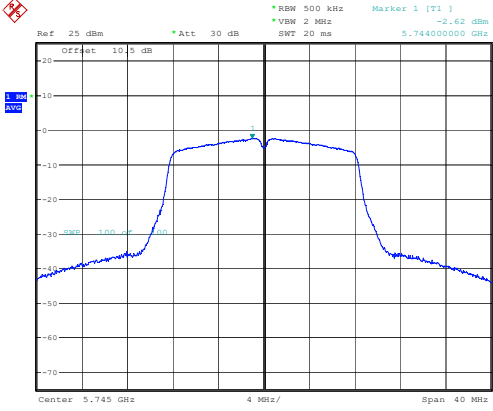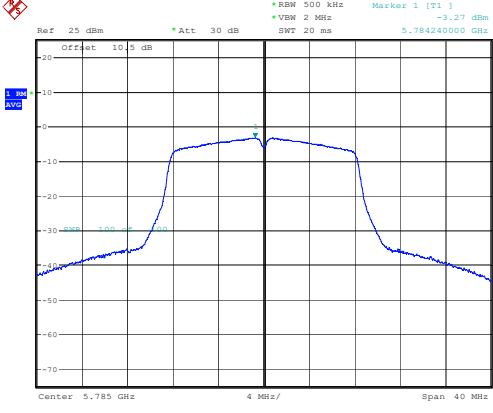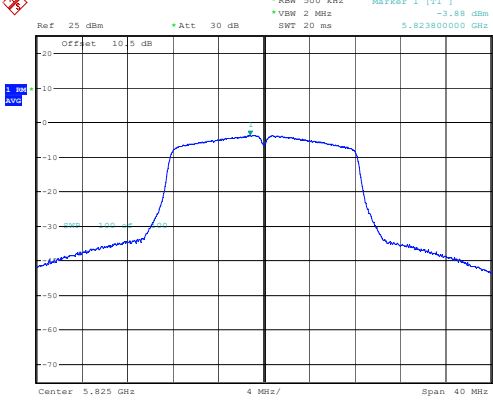
<p>802.11a Lowest Channel</p>	 <p>Ref 25 dBm *Att 30 dB *RBW 500 kHz *VMW 2 MHz *SWT 20 ms *Marker 1 (F1) -3.62 dBm 5.744000000 GHz</p> <p>Offset 10.5 dB</p> <p>Center: 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR230848964-RP Tester:Rod Luo Date: 4.SEP.2023 14:54:49</p>
<p>802.11a Middle Channel</p>	 <p>Ref 25 dBm *Att 30 dB *RBW 500 kHz *VMW 2 MHz *SWT 20 ms *Marker 1 (F1) -3.27 dBm 5.782400000 GHz</p> <p>Offset 10.5 dB</p> <p>Center: 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR230848964-RP Tester:Rod Luo Date: 4.SEP.2023 14:58:49</p>
<p>802.11a Highest Channel</p>	 <p>Ref 25 dBm *Att 30 dB *RBW 500 kHz *VMW 2 MHz *SWT 20 ms *Marker 1 (F1) -3.88 dBm 5.823800000 GHz</p> <p>Offset 10.5 dB</p> <p>Center: 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR230848964-RP Tester:Rod Luo Date: 4.SEP.2023 15:03:26</p>

Maximum power spectral density
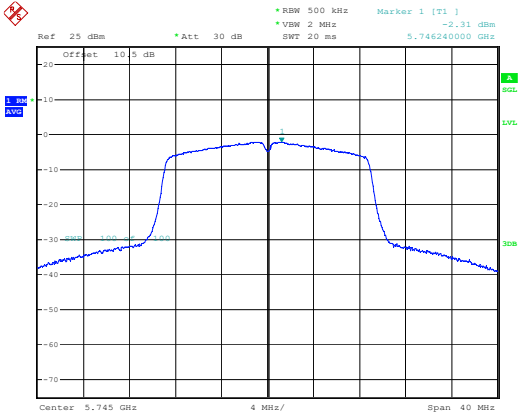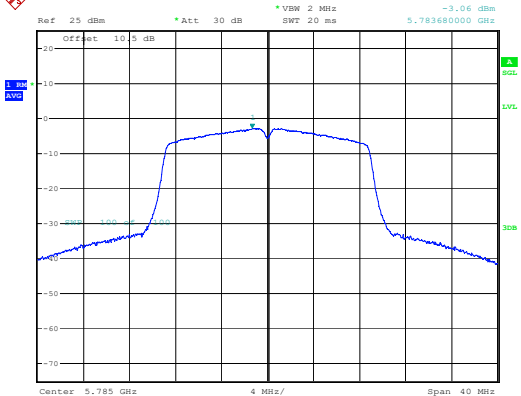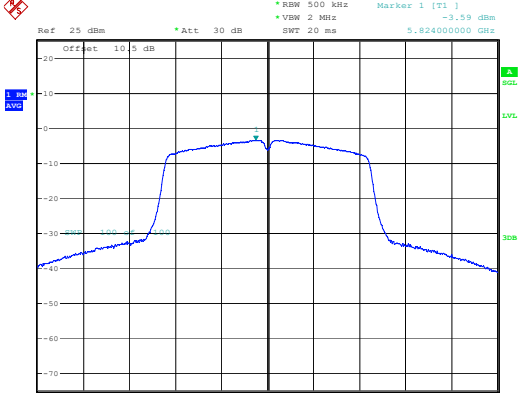
<p>802.11ac vht20 Lowest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:23:33</p>
<p>802.11ac vht20 Middle Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:27:10</p>
<p>802.11ac vht20 Highest Channel</p>	 <p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:30:01</p>


Maximum power spectral density

802.11ac vht40
Lowest Channel

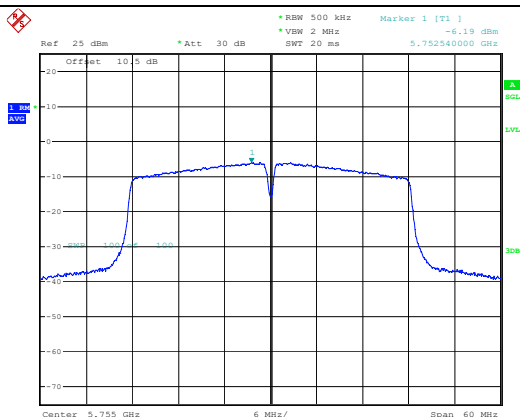


ProjectNo.:CR230848964-RF Tester:Rod Luo
 Date: 4.SEP.2023 15:46:41

802.11ac vht40
Highest Channel

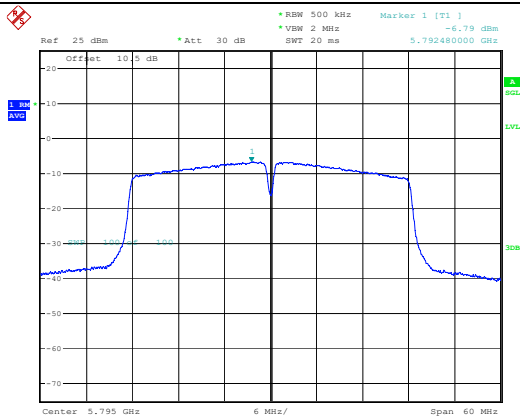

ProjectNo.:CR230848964-RF Tester:Rod Luo
 Date: 4.SEP.2023 15:50:31

802.11ac vht80
Middle Channel

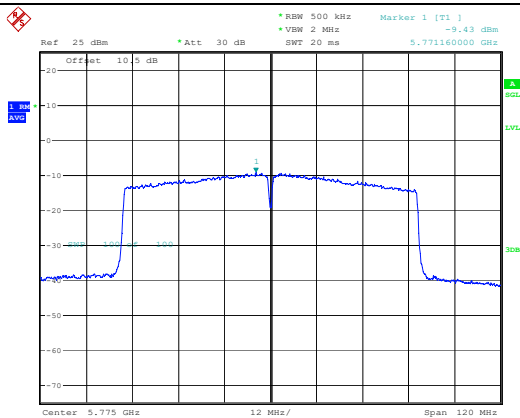

ProjectNo.:CR230848964-RF Tester:Rod Luo
 Date: 4.SEP.2023 16:13:35

4.6 Duty Cycle:

Serial Number:	2A93-1	Test Date:	2023/09/04
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	58	Temperature: (°C)	101
----------------------	------	---------------------------	----	----------------------	-----


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Cycle Factor (dB)	VBW Setting (kHz)
802.11a	1.39	1.44	96.53	719	0.15	1
802.11ac vht20	1.31	1.36	96.32	763	0.16	1
802.11ac vht40	0.653	0.697	93.69	1531	0.28	3
802.11ac vht80	0.324	0.369	87.80	3086	0.56	10

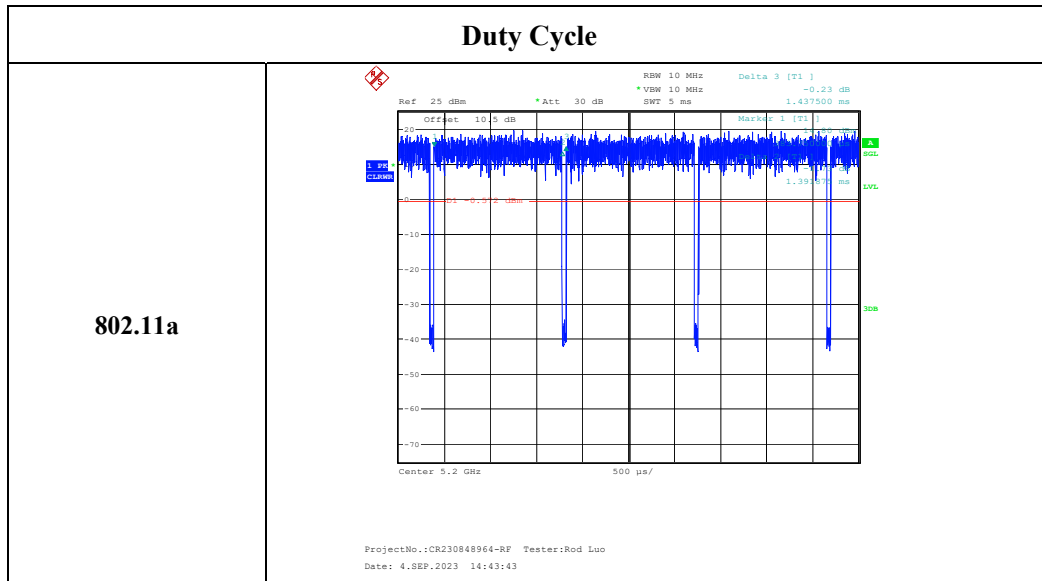

Duty Cycle	
802.11ac vht20	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:13:07</p>
802.11ac vht40	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 15:41:12</p>
802.11ac vht80	<p>ProjectNo.:CR230848964-RF Tester:Rod Luo Date: 4.SEP.2023 16:04:27</p>

5. EUT PHOTOGRAPHS

Please refer to the attachment CR230848964-EXP EUT EXTERNAL PHOTOGRAPHS and CR230848964-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230848964-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====