

FCC REPORT (GSM)

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: LE8

Trade mark: TECNO

FCC ID: 2ADYY-LE8

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E

Date of sample receipt: 14 Sep., 2021

Date of Test: 14 Sep., to 18 Oct., 2021

Date of report issued: 18 Oct., 2021

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 18 Oct., 2021 | Original |
| | | |
| | | |
| | | |
| | | |

Tested by: Mike.ou **Date:** 18 Oct., 2021
Test Engineer

Reviewed by: Winner Zhang **Date:** 18 Oct., 2021
Project Engineer

3. Contents

Page

| | | |
|-----|--------------------------------------------------------------|----|
| 1. | COVER PAGE..... | 1 |
| 2. | VERSION..... | 2 |
| 3. | CONTENTS..... | 3 |
| 4. | TEST SUMMARY..... | 4 |
| 5. | GENERAL INFORMATION..... | 5 |
| 5.1 | CLIENT INFORMATION..... | 5 |
| 5.2 | GENERAL DESCRIPTION OF E.U.T..... | 5 |
| 5.3 | TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS | 6 |
| 5.4 | DESCRIPTION OF TEST AUXILIARY EQUIPMENT..... | 6 |
| 5.5 | MEASUREMENT UNCERTAINTY..... | 6 |
| 5.6 | ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD..... | 6 |
| 5.7 | LABORATORY FACILITY..... | 6 |
| 5.8 | LABORATORY LOCATION | 7 |
| 5.9 | TEST INSTRUMENTS LIST..... | 8 |
| 6. | TEST RESULTS..... | 9 |
| 6.1 | CONDUCTED OUTPUT POWER, ERP AND EIRP | 9 |
| 6.2 | PEAK-TO-AVERAGE POWER RATIO | 10 |
| 6.3 | OCCUPY BANDWIDTH | 11 |
| 6.4 | MODULATION CHARACTERISTIC..... | 12 |
| 6.5 | OUT OF BAND EMISSION AT ANTENNA TERMINALS | 12 |
| 6.6 | FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT..... | 13 |
| 6.7 | FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT..... | 16 |
| 6.8 | FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT | 17 |
| 7 | TEST SETUP PHOTO..... | 18 |
| 8 | EUT CONSTRUCTIONAL DETAILS | 19 |

4. Test Summary

| Test Item | Section in CFR 47 | Result |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------|
| RF Exposure (SAR) | Part 1.1307 Part 2.1093 | Pass (Please refer to SAR Report) |
| RF Output Power | Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) | Appendix A – GSM |
| Peak-to-Average Power Ratio | Part 24.232 (d) | Appendix B – GSM |
| Modulation Characteristics | Part 2.1047 | Pass |
| 99% & -26 dB Occupied Bandwidth | Part 2.1049 Part 22.917(b) Part 24.238(b) | Appendix C – GSM |
| Out of band emission at antenna terminals | Part 2.1053 Part 22.917 (a) Part 24.238 (a) | Appendix D – GSM Appendix E – GSM |
| Field strength of spurious radiation | Part 22.917 (a) Part 24.238 (a) | Pass |
| Frequency stability vs. temperature | Part 22.355 Part 24.235 Part 2.1055(a)(1)(b) | Appendix F – GSM |
| Frequency stability vs. voltage | Part 22.355 Part 24.235 Part 2.1055(d)(2) | Appendix F – GSM |
| <p>Remark:</p> <ol style="list-style-type: none"> 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB(Fundamental Frequency below 1GHz)/1.0dB(Fundamental Frequency above 1GHz) (provided by the customer). | | |
| Test Method: | ANSI/TIA-603-E-2016 ANSI C63.26-2015 | |

5. General Information

5.1 Client Information

| | |
|---------------|------------------------------------------------------------------------------------------------------------------------|
| Applicant: | TECNO MOBILE LIMITED |
| Address: | FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT |
| Manufacturer: | TECNO MOBILE LIMITED |
| Address: | FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT |
| Factory: | SHENZHEN TECNO TECHNOLOGY CO., LTD. |
| Address: | 101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China |

5.2 General Description of E.U.T.

| | |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name: | Mobile Phone |
| Model No.: | LE8 |
| Operation Frequency range: | GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz |
| Modulation type: | 2G <input checked="" type="checkbox"/> Voice(GMSK) <input checked="" type="checkbox"/> GPRS(GMSK) <input checked="" type="checkbox"/> EGPRS(GMSK, 8PSK) |
| Antenna type: | Internal Antenna |
| Antenna gain: | GSM 850: -1.5 dBi(declare by Applicant) PCS 1900: -0.5 dBi(declare by Applicant) |
| Power supply: | Rechargeable Li-ion Battery DC3.85V, 5850mAh |
| AC adapter: | Model: U180TSA Input: AC100-240V, 50/60Hz, 0.6A Output: DC 5.0V~9.0V, 2.0A DC 9.0V~12.0V, 1.5A |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

Operation Frequency List:

| GSM 850 | | PCS1900 | |
|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 128 | 824.20 | 512 | 1850.20 |
| 129 | 824.40 | 513 | 1850.40 |
| | | | |
| 189 | 836.40 | 660 | 1879.80 |
| 190 | 836.60 | 661 | 1880.00 |
| 191 | 836.80 | 662 | 1880.20 |
| ... | ... | ... | ... |
| 250 | 848.60 | 809 | 1909.60 |
| 251 | 848.80 | 810 | 1909.80 |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| GSM850 | | | PCS1900 | | |
|---------|----------------|--------|---------|----------------|---------|
| Channel | Frequency(MHz) | | Channel | Frequency(MHz) | |
| Lowest | 128 | 824.20 | Lowest | 512 | 1850.20 |
| Middle | 190 | 836.60 | Middle | 661 | 1880.00 |
| Highest | 251 | 848.80 | Highest | 810 | 1909.80 |

5.3 Test environment and mode, and test samples plans

| Operating Environment: | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Temperature: | Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C |
| Humidity: | 20 % ~ 75 % RH |
| Atmospheric Pressure: | 1008 mbar |
| Voltage: | Nominal: 3.85Vdc, Extreme: Low 3.5 Vdc, High 4.4 Vdc |
| Test mode: | |
| GSM mode | Keep the EUT communication with simulated station in GSM mode |
| GPRS mode | Keep the EUT communication with simulated station in GPRS mode |
| EGPRS mode | Keep the EUT communication with simulated station in EGPRS mode |
| Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report. | |
| Test Samples Plans: | |
| Samples Number | Used for Test Items |
| 2#&4# | Conducted measurements test method |
| 1# | Radiated measurements test method |
| 1# | EUT constructional details |
| Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month. | |

5.4 Description of Test Auxiliary Equipment

| Test Equipment | Manufacturer | Model No. | Serial No. |
|-------------------|--------------|-----------|------------|
| Simulated Station | Anritsu | MT8820C | 6201026545 |

5.5 Measurement Uncertainty

| Parameter | Expanded Uncertainty (Confidence of 95%) |
|------------------------------------------------------------|------------------------------------------|
| Radiated Emission (9kHz ~ 30MHz electric field) for 3m SAC | 3.13 dB |
| Radiated Emission (9kHz ~ 30MHz magnetic field) for 3m SAC | 3.13 dB |
| Radiated Emission (30MHz ~ 1GHz) for 3m SAC | 4.45 dB |
| Radiated Emission (1GHz ~ 18GHz) for 3m SAC | 5.34 dB |
| Radiated Emission (18GHz ~ 40GHz) for 3m SAC | 5.34 dB |

5.6 Additions to, deviations, or exclusions from the method

| |
|----|
| No |
|----|

5.7 Laboratory Facility

| |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

5.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://www.ccis-cb.com>

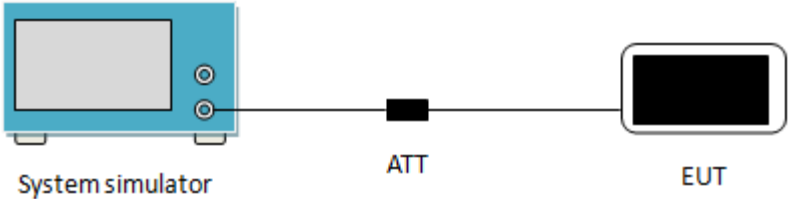
5.9 Test Instruments list

| Radiated Emission: | | | | | |
|---------------------------|---------------------|------------------|-------------------|----------------------------|--------------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 3m SAC | ETS | RFD-100 | Q1984 | 04-14-2021 | 04-13-2024 |
| Loop Antenna | SCHWARZBECK | FMZB 1519 B | 1519B-044 | 03-07-2021 | 03-06-2022 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 9163-1246 | 03-07-2021 | 03-06-2022 |
| Biconical Antenna | SCHWARZBECK | VUBA 9117 | 9117#359 | 06-17-2021 | 06-17-2022 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 912D-916 | 03-07-2021 | 03-06-2022 |
| Broad-Band Horn Antenna | SCHWARZBECK | BBHA9170 | 1067 | 04-02-2021 | 04-01-2022 |
| Broad-Band Horn Antenna | SCHWARZBECK | BBHA9170 | 1068 | 04-02-2021 | 04-01-2022 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-03-2021 | 03-02-2022 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-03-2021 | 03-02-2022 |
| Spectrum analyzer | Keysight | N9010B | MY60240202 | 11-27-2020 | 11-26-2021 |
| Simulated Station | Anritsu | MT8820C | 6201026545 | 03-03-2021 | 03-02-2022 |
| Low Pre-amplifier | SCHWARZBECK | BBV9743B | 00305 | 03-07-2021 | 03-06-2022 |
| High Pre-amplifier | SKET | LNPA_0118G-50 | MF280208233 | 03-07-2021 | 03-06-2022 |
| Cable | Qualwave | JYT3M-1G-NN-8M | JYT3M-1 | 03-07-2021 | 03-06-2022 |
| Cable | Qualwave | JYT3M-18G-NN-8M | JYT3M-2 | 03-07-2021 | 03-06-2022 |
| Cable | Qualwave | JYT3M-1G-BB-5M | JYT3M-3 | 03-07-2021 | 03-06-2022 |
| Cable | Bost | JYT3M-40G-SS-8M | JYT3M-4 | 04-02-2021 | 04-01-2022 |
| EMI Test Software | Tonscend | TS+ | Version:3.0.0.1 | | |

| Conducted method: | | | | | |
|--------------------------|---------------------|------------------|---------------------|-----------------------------|---------------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| Spectrum Analyzer | Keysight | N9020B | MY57431500 | 07-02-2021 | 07-01-2022 |
| Simulated Station | Rohde & Schwarz | CMW500 | 108209 | 07-02-2021 | 07-01-2022 |
| RF Control Unit | Tonscend | JS0806-1 | N/A | N/A | N/A |
| Band Reject Filter Group | Tonscend | JS0806-F | 21A8060360 | N/A | N/A |
| Test Software | Tonscend | TS+ | Version: 2.6.9.0526 | | |

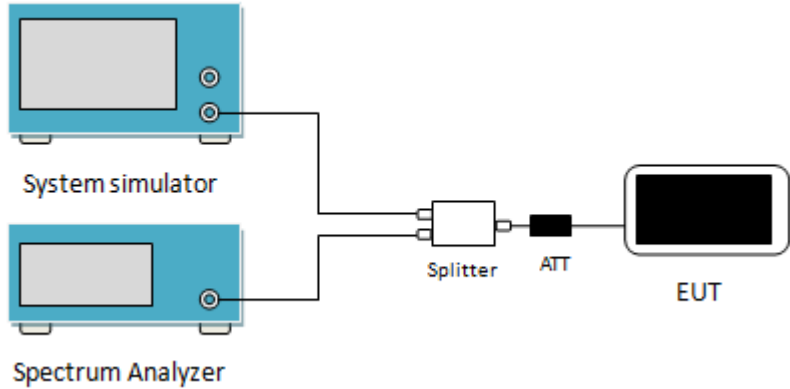
6. Test results

6.1 Conducted Output Power, ERP and EIRP

| | |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a)(5), FCC part 24.232(c) |
| Limit: | GSM 850: 7W, PCS 1900: 2W |
| Test setup: |  <p>The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A line connects it to a black 'ATT' (attenuator) block. Another line connects the 'ATT' to a black 'EUT' (Equipment Under Test) device.</p> |
| Test Procedure: | The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm. |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

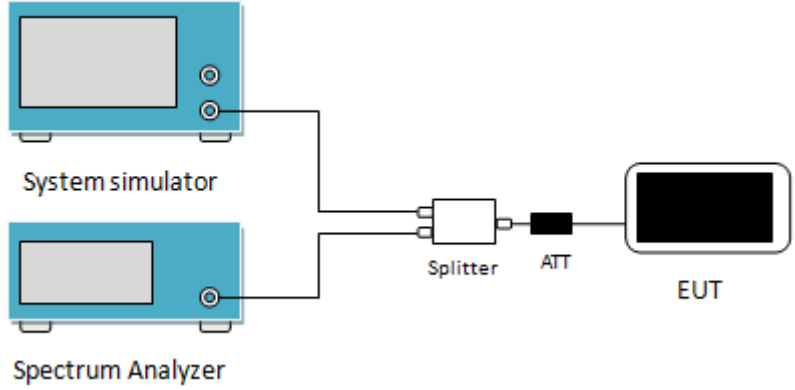
Measurement Data: Refer to Appendix A – GSM

6.2 Peak-to-Average Power Ratio

| | |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 24.232(d) |
| Limit: | The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |
| Test setup: |  <p>The diagram shows a test setup for measuring PAR. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two circular ports on the right side. A single cable connects the top port of the System simulator to the top port of the Spectrum Analyzer. From the bottom port of the System simulator, a cable goes to the left input of a white rectangular 'Splitter'. From the right output of the Splitter, a cable goes to a black rectangular 'ATT' (Attenuator). From the right output of the ATT, a cable goes to the left side of a white rectangular 'EUT' (Equipment Under Test) which has a black screen.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations. |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix B – GSM

6.3 Occupy Bandwidth

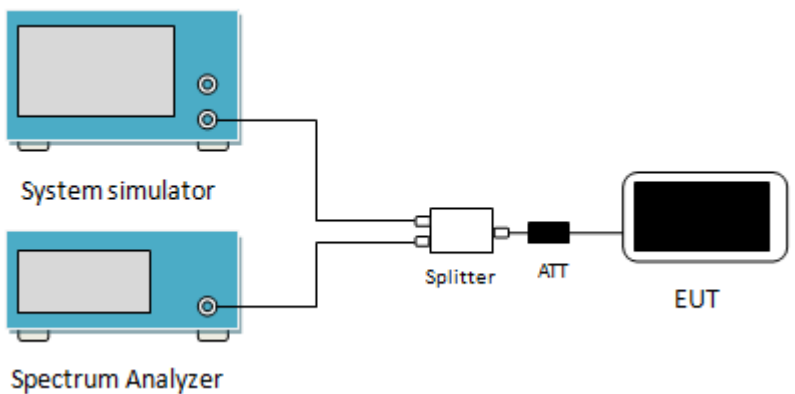
| | |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(b), FCC part 24.238(b) |
| Test setup: |  <p>The diagram shows a test setup. On the left, there are two blue rectangular devices: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single circular port on their right side. These two ports are connected to a white rectangular 'Splitter' box. From the right side of the Splitter, a line goes to a black rectangular 'ATT' (Attenuator) box. From the right side of the ATT, a line goes to a white rectangular 'EUT' (Equipment Under Test) device with a black screen.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace. |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix C – GSM

6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.5 Out of band emission at antenna terminals

| | |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a) |
| Limit: | -13dBm |
| Test setup: |  <p>The diagram illustrates the test setup for out-of-band emission measurement. It shows a System simulator connected to a Spectrum Analyzer. The output of the System simulator is split by a Splitter, with one path going to the Spectrum Analyzer and the other path going through an Attenuator (ATT) to the EUT (Equipment Under Test).</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 For the out of band: For GSM850&WCDMA850 set the RBW=100 kHz, VBW=300 kHz and for PCS1900 & WCDMA1900 set the RBW=1MHz, VBW=3MHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 3 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data:

Band edge emission: Refer to Appendix D – GSM

Spurious emission: Refer to Appendix E – GSM

6.6 Field strength of spurious radiation measurement

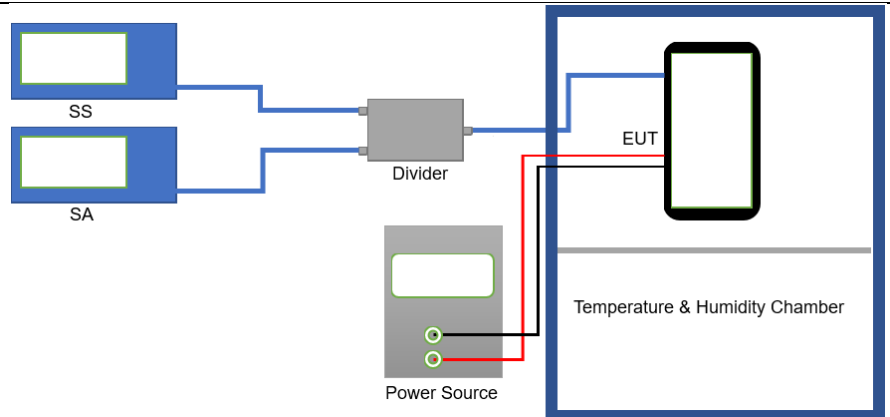
| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a) |
| Limit: | -13dBm |
| Test setup: | <p>Below 1GHz</p> <p>Above 1GHz</p> |
| Test Procedure: | <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$ |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details. |
| Test results: | Passed |

Measurement Data (worst case):

| GSM850 | | | | | | |
|--------------------------------------------------------------------------------------------------|-------------------------------|-------------|----------------------------------|------------------|-------------|--------------|
| Lowest channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 1648.40 | -52.56 | -9.89 | -62.45 | -13.00 | 49.45 | Vertical |
| 2472.60 | -16.87 | -5.57 | -22.44 | -13.00 | 9.44 | Vertical |
| 3296.80 | -50.49 | -2.14 | -52.63 | -13.00 | 39.63 | Vertical |
| 1648.40 | -46.09 | -9.89 | -55.98 | -13.00 | 42.98 | Horizontal |
| 2472.60 | -17.63 | -5.57 | -23.20 | -13.00 | 10.20 | Horizontal |
| 3296.80 | -50.41 | -2.14 | -52.55 | -13.00 | 39.55 | Horizontal |
| Middle channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 1673.20 | -51.91 | -9.88 | -61.79 | -13.00 | 48.79 | Vertical |
| 2509.80 | -17.34 | -5.29 | -22.63 | -13.00 | 9.63 | Vertical |
| 3346.40 | -50.70 | -2.05 | -52.75 | -13.00 | 39.75 | Vertical |
| 1673.20 | -45.82 | -9.88 | -55.70 | -13.00 | 42.70 | Horizontal |
| 2509.80 | -17.33 | -5.29 | -22.62 | -13.00 | 9.62 | Horizontal |
| 3346.40 | -50.67 | -2.05 | -52.72 | -13.00 | 39.72 | Horizontal |
| Highest channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 1697.60 | -52.36 | -9.87 | -62.23 | -13.00 | 49.23 | Vertical |
| 2546.40 | -17.11 | -5.13 | -22.24 | -13.00 | 9.24 | Vertical |
| 3395.20 | -50.86 | -1.97 | -52.83 | -13.00 | 39.83 | Vertical |
| 1697.60 | -45.74 | -9.87 | -55.61 | -13.00 | 42.61 | Horizontal |
| 2546.40 | -17.17 | -5.13 | -22.30 | -13.00 | 9.30 | Horizontal |
| 3395.20 | -50.32 | -1.97 | -52.29 | -13.00 | 39.29 | Horizontal |
| <i>Remark:</i> | | | | | | |
| 1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report. | | | | | | |

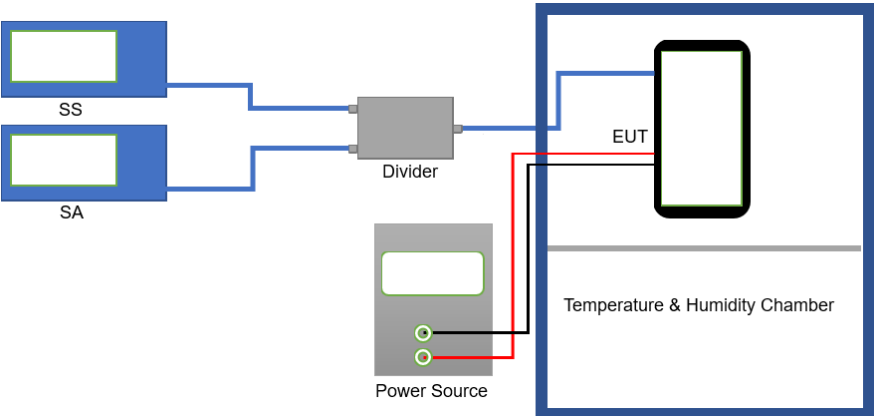
| PCS1900 | | | | | | |
|--------------------------------------------------------------------------------------------------|-------------------------------|-------------|----------------------------------|------------------|-------------|--------------|
| Lowest channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 3700.40 | -47.32 | -1.40 | -48.72 | -13.00 | 35.72 | Vertical |
| 5550.60 | -48.23 | 5.27 | -42.96 | -13.00 | 29.96 | Vertical |
| 3700.40 | -47.94 | -1.40 | -49.34 | -13.00 | 36.34 | Horizontal |
| 5550.60 | -48.87 | 5.27 | -43.60 | -13.00 | 30.60 | Horizontal |
| Middle channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 3760.00 | -47.57 | -1.03 | -48.60 | -13.00 | 35.60 | Vertical |
| 5640.00 | -48.19 | 6.06 | -42.13 | -13.00 | 29.13 | Vertical |
| 3760.00 | -47.73 | -1.03 | -48.76 | -13.00 | 35.76 | Horizontal |
| 5640.00 | -48.60 | 6.06 | -42.54 | -13.00 | 29.54 | Horizontal |
| Highest channel | | | | | | |
| Frequency (MHz) | Spurious Emission level (dBm) | Factor (dB) | Level at antenna terminals (dBm) | Limit Line (dBm) | Margin (dB) | Polarization |
| 3819.60 | -47.76 | -0.83 | -48.59 | -13.00 | 35.59 | Vertical |
| 5729.40 | -48.32 | 6.82 | -41.50 | -13.00 | 28.50 | Vertical |
| 3819.60 | -47.78 | -0.83 | -48.61 | -13.00 | 35.61 | Horizontal |
| 5729.40 | -48.98 | 6.82 | -42.16 | -13.00 | 29.16 | Horizontal |
| <i>Remark:</i> | | | | | | |
| 1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report. | | | | | | |

6.7 Frequency stability V.S. Temperature measurement

| | |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(a)(1)(b) |
| Limit: | ±2.5 ppm for GSM 850 Within authorized band for PCS 1900 |
| Test setup: |  |
| Test procedure: | <ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix F – GSM

6.8 Frequency stability V.S. Voltage measurement

| | |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(d)(2) |
| Limit: | ±2.5 ppm for GSM 850 Within authorized band for PCS 1900 |
| Test setup: |  |
| Test procedure: | <ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change. |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix F – GSM