




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.973	30	Pass
NVNT	BLE	2442	Ant1	-5.379	30	Pass
NVNT	BLE	2480	Ant1	-7.332	30	Pass



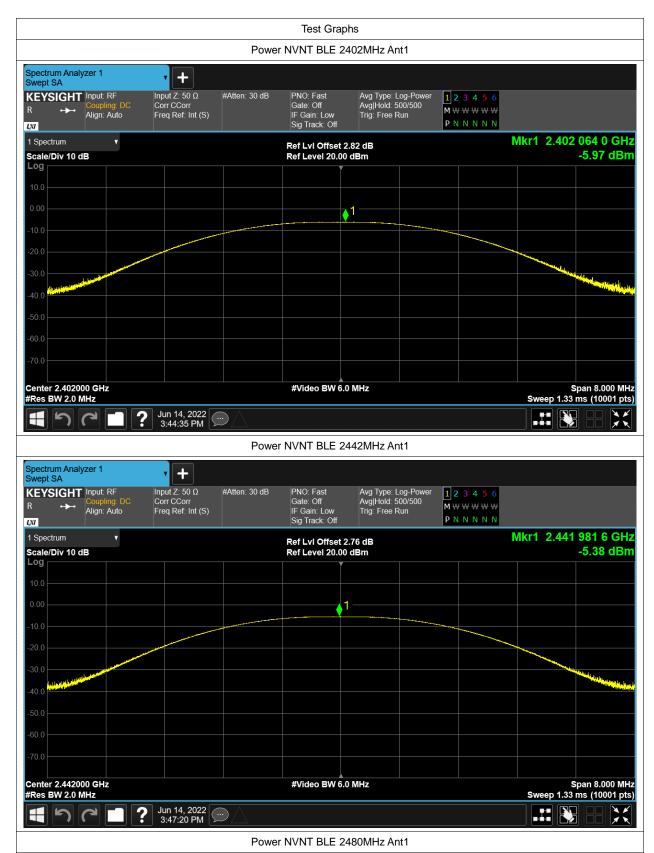



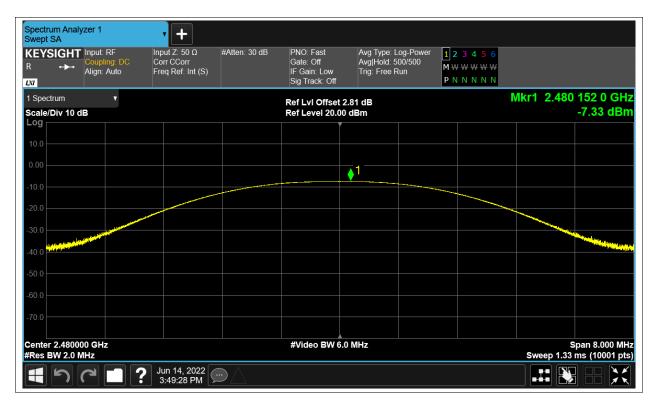






-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.685	0.5	Pass
NVNT	BLE	2442	Ant1	0.684	0.5	Pass
NVNT	BLE	2480	Ant1	0.683	0.5	Pass







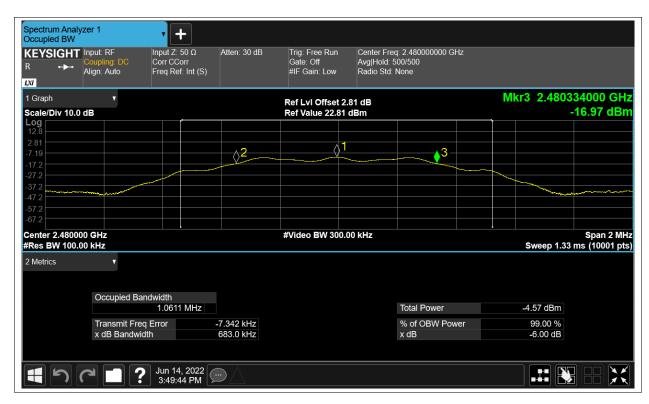





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.052167211	
NVNT	BLE	2442	Ant1	1.059434168	
NVNT	BLE	2480	Ant1	1.057044314	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-12.366	8	Pass
NVNT	BLE	2442	Ant1	-11.252	8	Pass
NVNT	BLE	2480	Ant1	-13.196	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-38.79	-20	Pass
NVNT	BLE	2480	Ant1	-37.48	-20	Pass



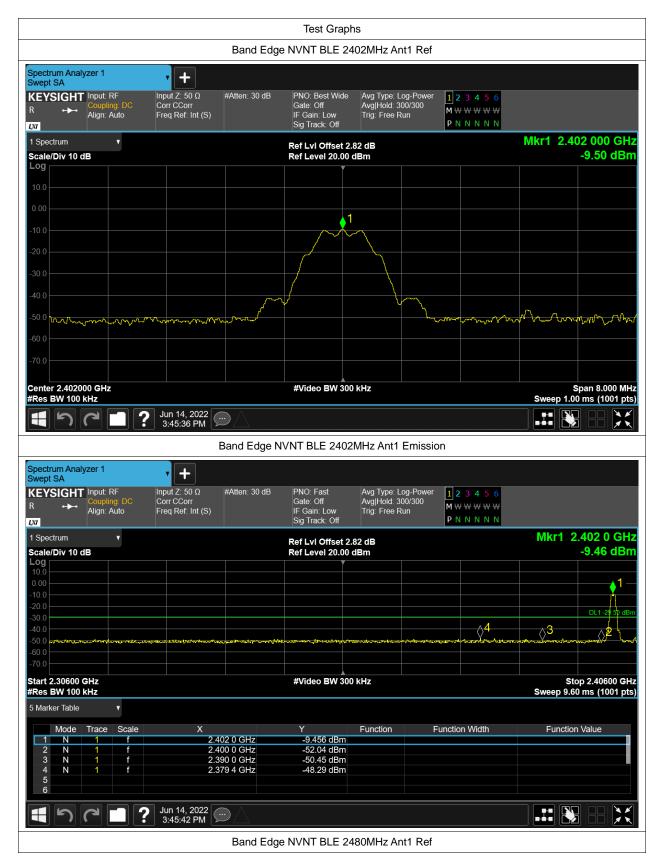



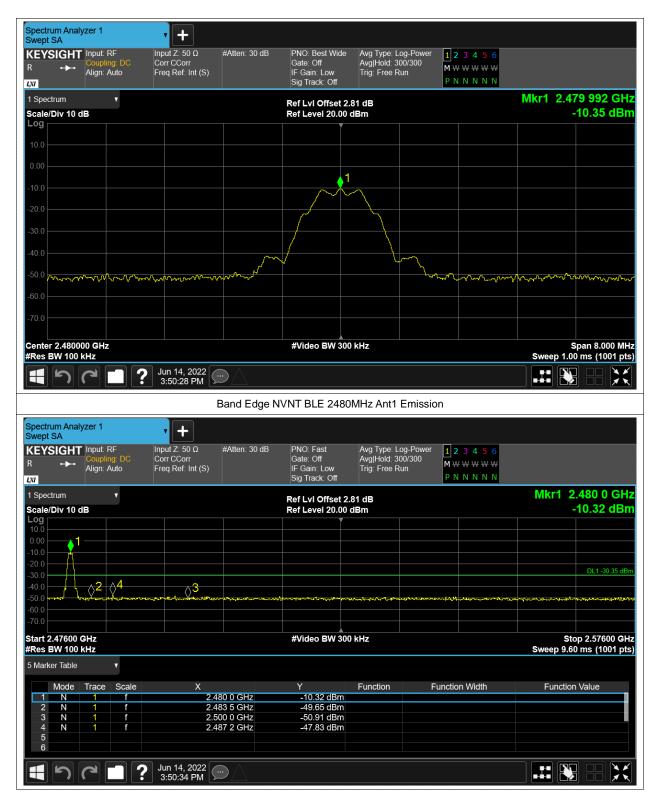





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-34.58	-20	Pass
NVNT	BLE	2442	Ant1	-35.78	-20	Pass
NVNT	BLE	2480	Ant1	-33.46	-20	Pass











