




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.455	30	Pass
NVNT	BLE	2442	Ant1	-3.234	30	Pass
NVNT	BLE	2480	Ant1	-3.24	30	Pass



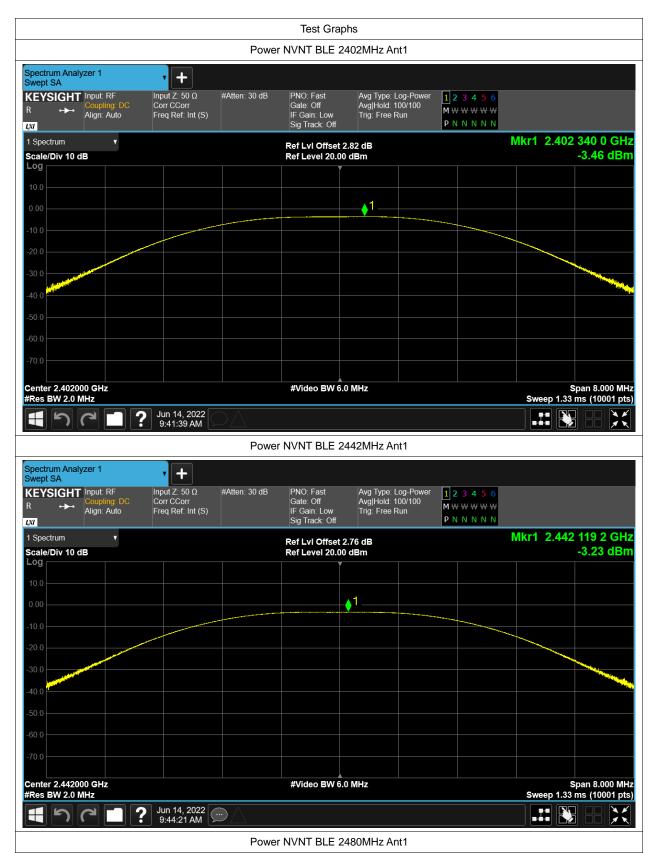



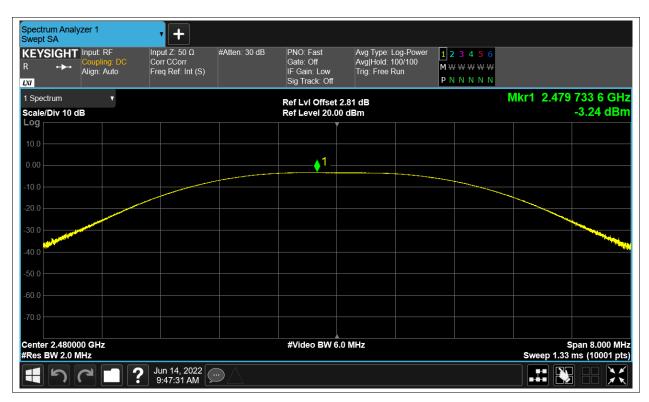

Tel: +86-755-23118282, Fax: +86-755-23116366





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.974	0.5	Pass
NVNT	BLE	2442	Ant1	1.329	0.5	Pass
NVNT	BLE	2480	Ant1	1.221	0.5	Pass









Tel: +86-755-23118282, Fax: +86-755-23116366





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.076820107	
NVNT	BLE	2442	Ant1	2.08351754	
NVNT	BLE	2480	Ant1	2.084051018	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-22.168	8	Pass
NVNT	BLE	2442	Ant1	-21.895	8	Pass
NVNT	BLE	2480	Ant1	-22.038	8	Pass









Tel: +86-755-23118282, Fax: +86-755-23116366





Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.56	-20	Pass
NVNT	BLE	2480	Ant1	-47.19	-20	Pass













Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.8	-20	Pass
NVNT	BLE	2442	Ant1	-41.93	-20	Pass
NVNT	BLE	2480	Ant1	-41.11	-20	Pass



