



Test Data

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.225	30	Pass
NVNT	BLE	2442	Ant1	-3.891	30	Pass
NVNT	BLE	2480	Ant1	-3.387	30	Pass

Project No.: JYTSZR2206004







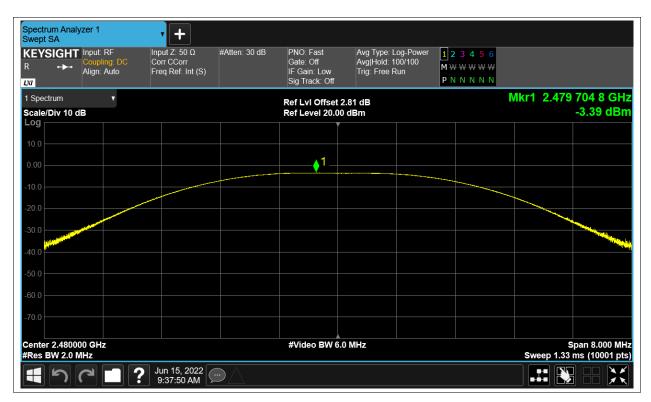





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.326	0.5	Pass
NVNT	BLE	2442	Ant1	1.36	0.5	Pass
NVNT	BLE	2480	Ant1	1.407	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.079771125	
NVNT	BLE	2442	Ant1	2.083212711	
NVNT	BLE	2480	Ant1	2.079039113	














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-23.11	8	Pass
NVNT	BLE	2442	Ant1	-22.607	8	Pass
NVNT	BLE	2480	Ant1	-22.142	8	Pass



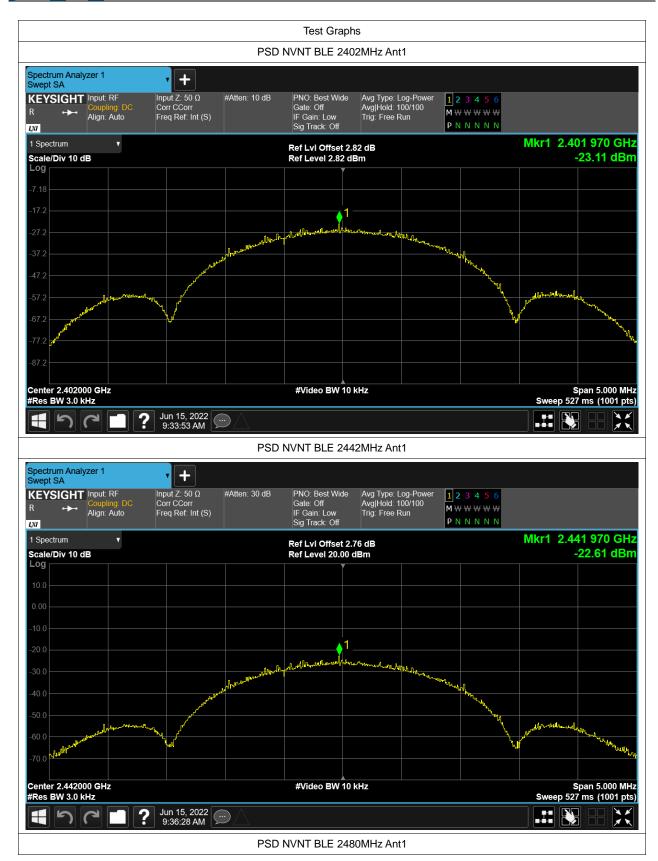










Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.99	-20	Pass
NVNT	BLE	2480	Ant1	-46.88	-20	Pass







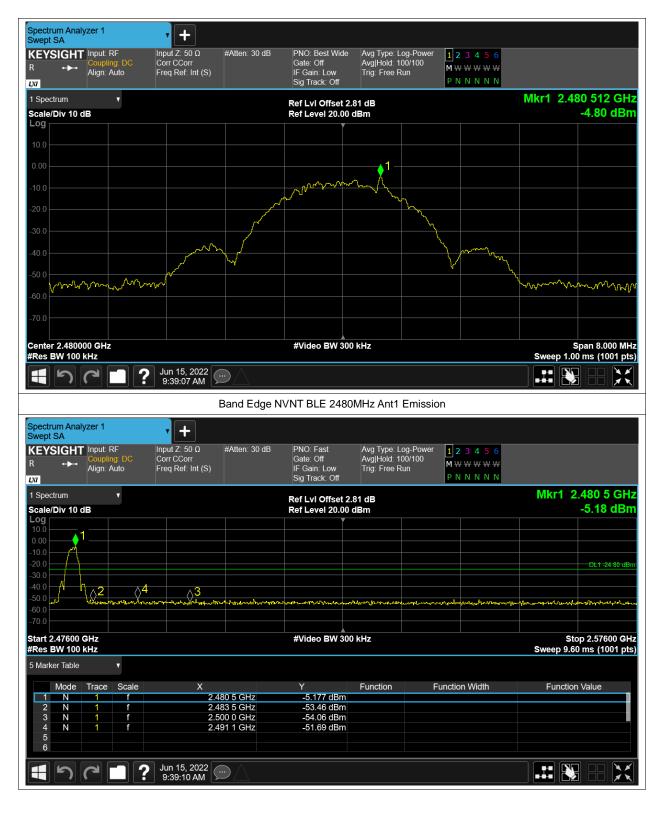





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-40.82	-20	Pass
NVNT	BLE	2442	Ant1	-41.69	-20	Pass
NVNT	BLE	2480	Ant1	-41.35	-20	Pass



