



# TEST REPORT

FCC ID: 2ADYY-T16MA

Product: Laptop Computer

Model No.: T16MA

Trade Mark: TECNO

Report No.: WSCT-A2LA-R&E240300013A-15B

Issued Date: 16 April 2024

Issued for:

**TECNO MOBILE LIMITED**

**FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI  
STREET FOTAN NT HONGKONG**

Issued By:

**World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.**

**Building A-B, Baoshi Science & Technology Park, Baoshi Road,  
Bao'an District, Shenzhen, Guangdong, China**

**TEL: +86-755-26996192**

**FAX: +86-755-86376605**



*Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.*





# TABLE OF CONTENTS

- 1. Test Certification..... 3
- 2. GENERAL DESCRIPTION OF EUT..... 4
- 3. Test Result Summary ..... 5
- 4. TEST METHODOLOGY ..... 6
  - 4.1. CONFIGURATION OF SYSTEM UNDER TEST..... 7
  - 4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)..... 8
- 5. MEASUREMENT INSTRUMENTS..... 9
- 6. Facilities and Accreditations ..... 10
  - 6.1. FACILITIES ..... 10
  - 6.2. ACCREDITATIONS ..... 10
  - 6.3. MEASUREMENT UNCERTAINTY ..... 11
- 7. EMC EMISSION TEST ..... 12
  - 7.1. CONDUCTED EMISSION MEASUREMENT ..... 12
  - 7.2. RADIATED EMISSION MEASUREMENT ..... 16





Report No.: WSCT-A2LA-R&E240300013A-15B

Certificate #5768.01

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

# 1. Test Certification

**Product:** Laptop Computer

**Model No.:** T16MA

**Trade Mark:** TECNO

**Applicant:** TECNO MOBILE LIMITED

**Address:** FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25  
SHAN MEI STREET FOTAN NT HONGKONG

**Manufacturer:** TECNO MOBILE LIMITED

**Address:** FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25  
SHAN MEI STREET FOTAN NT HONGKONG

**Date of Test:** 02 April 2024 to 16 April 2024

**Applicable Standards:** FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Tested By:** Wang Xiang  
(Wang Xiang)

**Checked By:** Chen Xu  
(Chen Xu)

**Approved By:** Liu Fuxin  
(Liu Fuxin)

**Date:** 16 April 2024





Report No.: WSCT-A2LA-R&amp;E240300013A-15B

Certificate #5768.01

 For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 2. GENERAL DESCRIPTION OF EUT

<b>Equipment Type:</b>	Laptop Computer
<b>Test Model:</b>	T16MA
<b>Trade Mark</b>	TECNO
<b>Operating Voltage:</b>	Adapter1: TCW-A61S-65W Input: 100-240V~50/60Hz 1.5A Max Output: PD:5V---3A 9V---3A 12V---3A 15V---3A 20V---3.25A PPS:3.3-11V---5A Max Rechargeable Li-ion Battery: 528282-3S1P Rated Voltage: 11.61V Rated Capacity: 6460mAh/75Wh Typical Capacity: 6550mAh/76.04Wh Limited Charge Voltage: 13.35V
<b>Remark:</b>	N/A.

Configuration differences

Configuration/ Processor	Camera	LCD	Touchpad
T16MA (i5)	CK2B2B	P160NH41P-R4	AMR13489-PCT1336U-8-240116
T16MA (i7)	KANC792	GY160WUXGM-N33-B	SP1503T_V10

Note: The prototypes of both configurations have been tested, and the T16MA (i7) has the worst test result, which is the main test model reported



### 3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.





## 4. TEST METHODOLOGY


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Video Recording
Model 2	Video Playing
Mode 3	Transferring with USB Disk (the worst case)
Mode 4	TF Card Playing




### 4.1. CONFIGURATION OF SYSTEM UNDER TEST

Mode 1&2&4

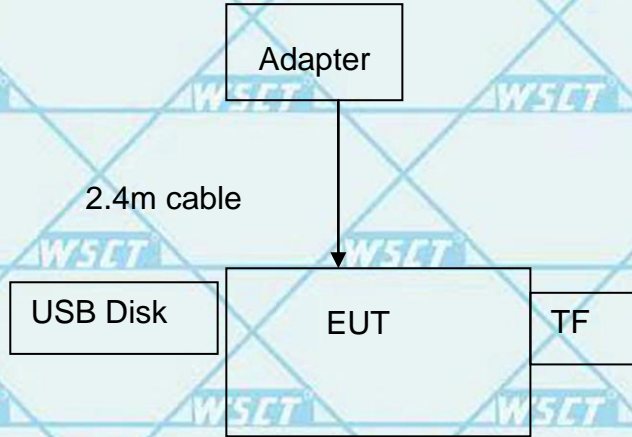

Mode 3:



(EUT: Laptop Computer)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Power	1	2.4m cable, unshielded	1
USB cable	1	1.8m USB cable, unshielded	1





## 4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	TF	Kingston	DTX/64GB	/	/
2	keyboard	DELL	KB522	/	/
3	Mouse	DELL	MS116	/	/
4	Adapter	/	TCW-A61S-65W	/	/
5	USB Disk	Kingston	/	/	/

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.





## 5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	11/05/2023	11/04/2024
LISN	AFJ	LS16	16010222119	11/05/2023	11/04/2024
LISN(EUT)	Mastic	AN3016	04/10040	11/05/2023	11/04/2024
pre-amplifier	CDSI	PAP-1G18-38	--	11/05/2023	11/04/2024
System Controller	CT	SC100	-	11/05/2023	11/04/2024
Bi-log Antenna	Chase	CBL6111C	2576	11/05/2023	11/04/2024
Spectrum analyzer	R&S	FSU26	200409	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	9120D	1141	11/05/2023	11/04/2024
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	11/05/2023	11/04/2024
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2023	11/04/2024
9*6*6 Anechoic	--	--	--	11/05/2023	11/04/2024





## 6. Facilities and Accreditations

### 6.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group(Shenzhen) CO., LTD**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

#### CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

#### FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

#### A2LA - Certificate Number: 5768.01

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA).Certification Number: 5768.01



### 6.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2.0\%$





## 7. EMC EMISSION TEST

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### 7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



Report No.: WSCT-A2LA-R&E240300013A-15B


Certificate #5768.01

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

**TEST PROCEDURE**

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**TEST SETUP**

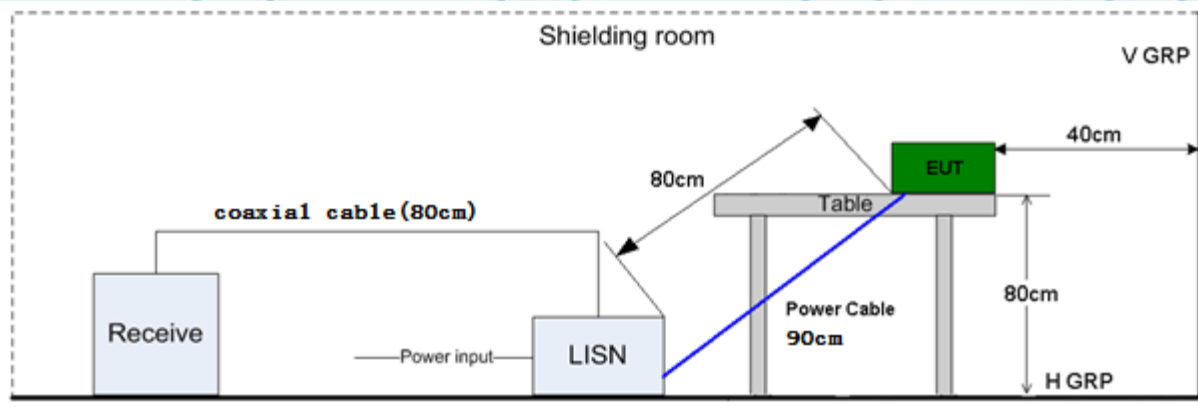




### 7.1.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Adapter: Mode 3(the worst case)

#### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

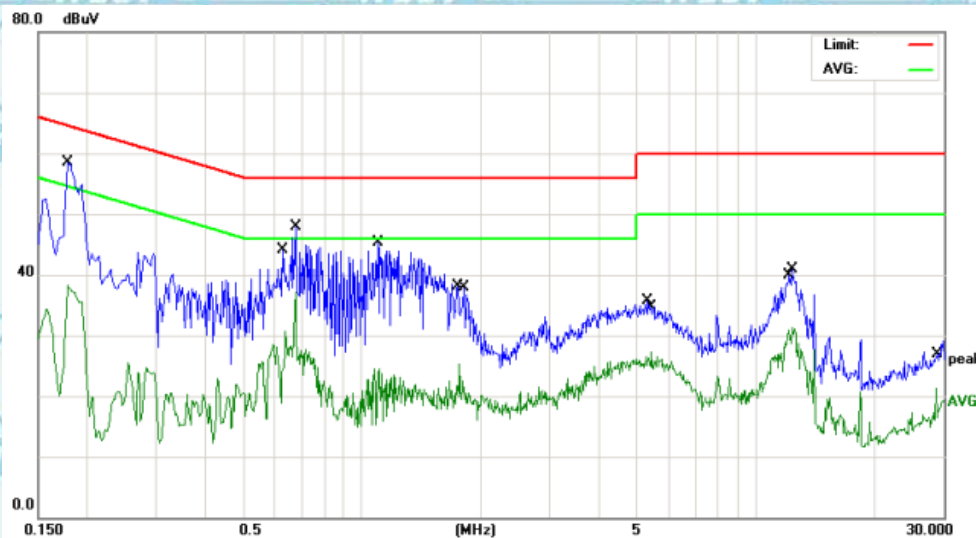

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	*	0.1780	48.05	10.41	58.46	64.57	-6.11	QP
2		0.1780	27.91	10.41	38.32	54.57	-16.25	AVG
3		0.6300	33.55	10.48	44.03	56.00	-11.97	QP
4		0.6780	26.54	10.48	37.02	46.00	-8.98	AVG
5		1.0940	34.70	10.52	45.22	56.00	-10.78	QP
6		1.7660	14.77	10.62	25.39	46.00	-20.61	AVG
7		1.8100	27.37	10.63	38.00	56.00	-18.00	QP
8		5.3100	24.91	10.70	35.61	60.00	-24.39	QP
9		5.4300	16.62	10.70	27.32	50.00	-22.68	AVG
10		12.0860	19.97	10.90	30.87	50.00	-19.13	AVG
11		12.3460	30.02	10.92	40.94	60.00	-19.06	QP
12		28.7220	10.43	10.97	21.40	50.00	-28.60	AVG





### Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1580	42.42	10.41	52.83	65.56	-12.73	QP
2		0.1582	25.11	10.41	35.52	55.55	-20.03	AVG
3		0.2420	33.63	10.42	44.05	62.02	-17.97	QP
4		0.6380	22.07	10.48	32.55	46.00	-13.45	AVG
5	*	0.6620	36.20	10.48	46.68	56.00	-9.32	QP
6		0.6860	23.86	10.48	34.34	46.00	-11.66	AVG
7		1.3460	32.86	10.56	43.42	56.00	-12.58	QP
8		1.7180	15.90	10.62	26.52	46.00	-19.48	AVG
9		4.2100	22.62	10.68	33.30	56.00	-22.70	QP
10		5.0300	13.73	10.69	24.42	50.00	-25.58	AVG
11		12.5820	22.69	10.93	33.62	60.00	-26.38	QP
12		12.7660	13.11	10.94	24.05	50.00	-25.95	AVG

**Note1:**

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.





## 7.2.RADIATED EMISSION MEASUREMENT

### 7.2.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP





Report No.: WSCT-A2LA-R&E240300013A-15B

Certificate #5768.01

For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

## TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.






Report No.: WSCT-A2LA-R&E240300013A-15B

Certificate #5768.01


For Question,  
Please Contact with WSCT  
www.wsct-cert.com

**TEST SETUP**

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

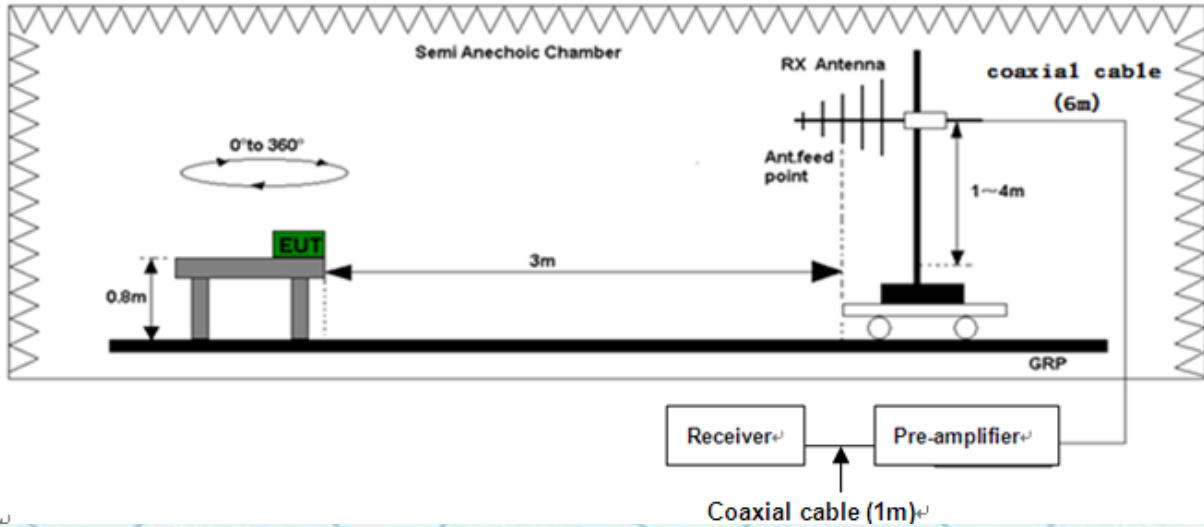

(B) Radiated Emission Test-Up Frequency Above 1GHz

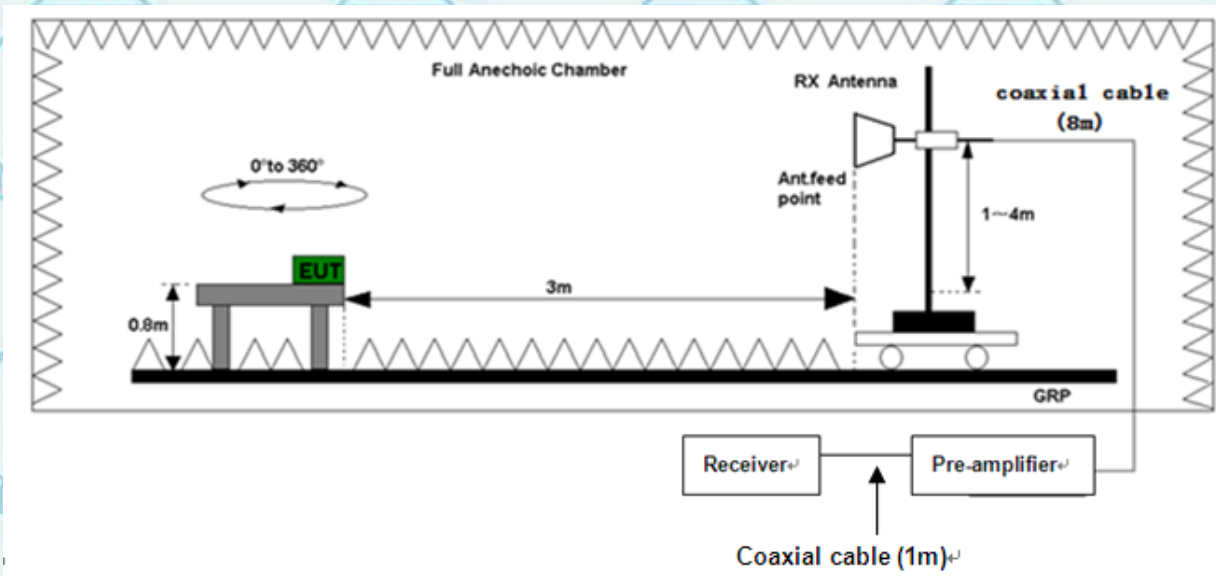



Report No.: WSCT-A2LA-R&E240300013A-15B

Certificate #5768.01

For Question, Please Contact with WSCT  
www.wsct-cert.com


### 7.2.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Adapter: Mode 3(the worst case)

Please refer to following diagram for individual

Below 1GHz

Horizontal:

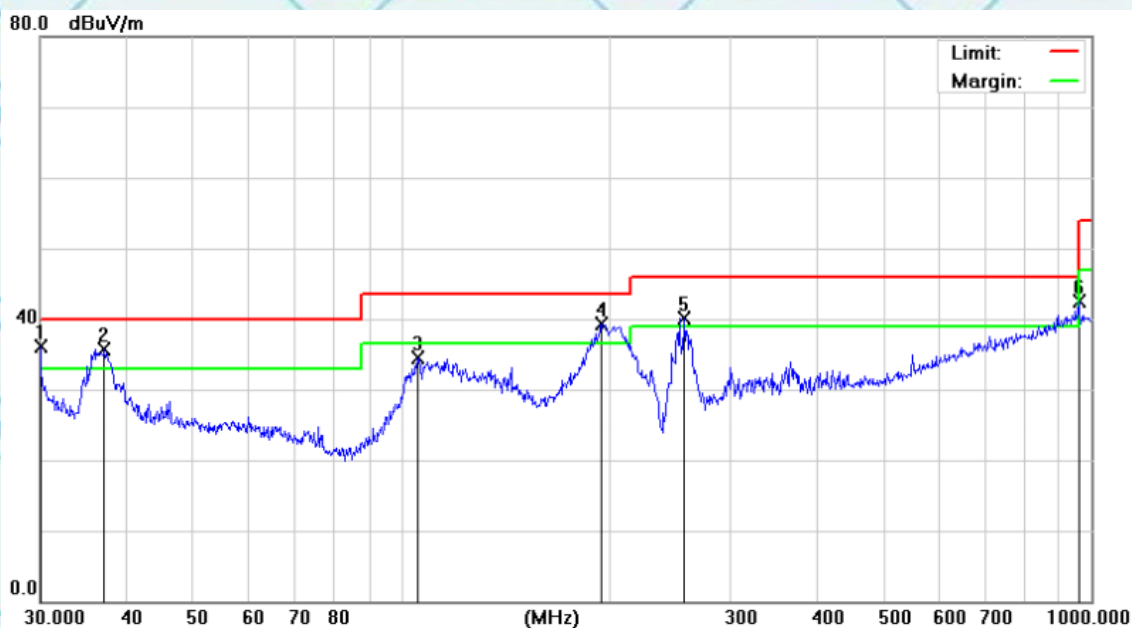

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.0000	37.91	-1.73	36.18	40.00	-3.82	QP
2	!	37.1550	36.73	-0.94	35.79	40.00	-4.21	QP
3		105.6415	38.04	-3.45	34.59	43.50	-8.91	QP
4	!	195.1365	43.18	-3.81	39.37	43.50	-4.13	QP
5	!	257.4222	41.61	-1.49	40.12	46.00	-5.88	QP
6	*	958.7943	28.67	13.92	42.59	46.00	-3.41	QP






Report No.: WSCT-A2LA-R&E240300013A-15B  
Vertical:

Certificate #5768.01

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

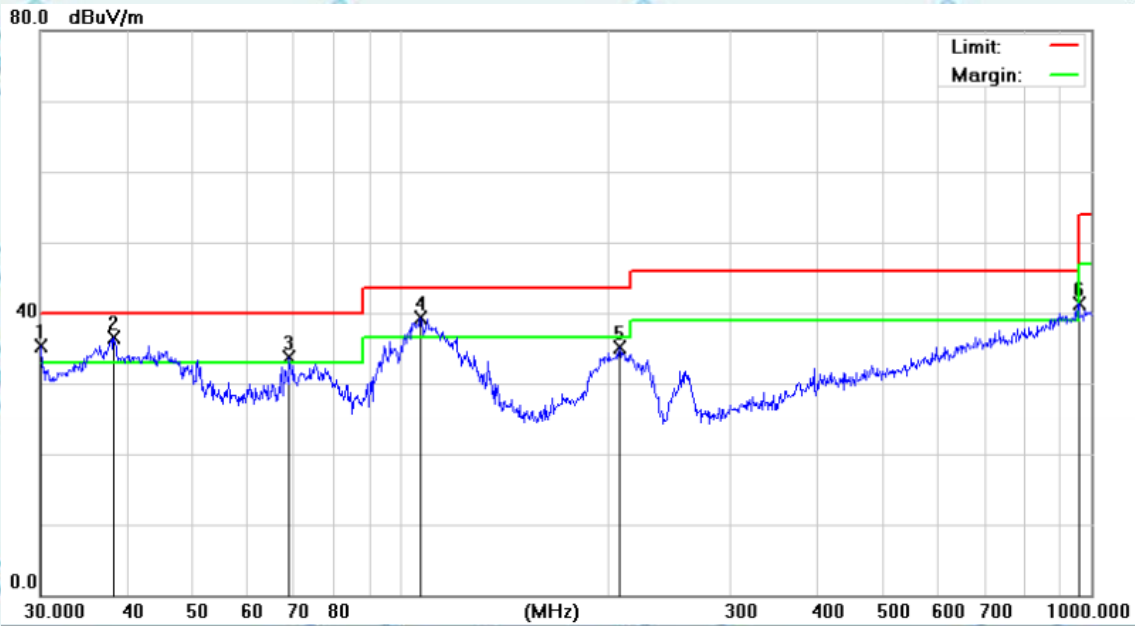

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.1054	36.98	-1.73	35.25	40.00	-4.75	QP
2	*	38.3462	37.15	-0.73	36.42	40.00	-3.58	QP
3	!	68.8721	37.18	-3.57	33.61	40.00	-6.39	QP
4	!	106.7587	42.67	-3.37	39.30	43.50	-4.20	QP
5		207.1226	38.79	-3.66	35.13	43.50	-8.37	QP
6	!	958.7943	27.44	13.92	41.36	46.00	-4.64	QP

Note:

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)





Report No.: WSCT-A2LA-R&E240300013A-15B

Certificate #5768.01

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### TEST RESULTS

Above 1GHz(1~26GHz) :( Adapter:Mode 3—worst case)

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1747.56	V	60.44	41.76	74	54	-13.56	-12.24
2707.94	V	58.75	40.18	74	54	-15.25	-13.82
1670.52	H	59.23	40.73	74	54	-14.77	-13.27
2681.08	H	59.93	40.93	74	54	-14.07	-13.07

**Remark:**

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

**\*\*\*\*\*END OF REPORT\*\*\*\*\***

