

Test Report

Product: Wireless Microphone

Trade Mark:  **HOLLYLAND**

Model Number: M32T1

FCC ID: 2ADZC-6302T

Prepared for

Shenzhen Hollyland Technology Co., Ltd.

8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street,
Baoan District, Shenzhen, 518055 China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1 GENERAL DESCRIPTION	6
1.1 DESCRIPTION OF EUT	6
1.2 TEST MODE.....	6
1.3 OPERATION CHANNEL LIST.....	7
1.4 TEST SETUP	7
1.5 ANCILLARY EQUIPMENT	7
2 SUMMARY OF TEST RESULT	8
3 TEST FACILITIES AND ACCREDITATIONS	9
3.1 TEST LABORATORY	9
3.2 ENVIRONMENTAL CONDITIONS.....	9
3.3 MEASUREMENT UNCERTAINTY	9
3.4 TEST SOFTWARE.....	10
4 LIST OF TEST EQUIPMENT	11
5 TEST ITEM AND RESULTS.....	13
5.1 ANTENNA REQUIREMENT	13
5.1.1 Standard Requirement	13
5.1.2 Test Result.....	13
5.2 CONDUCTED EMISSION.....	14
5.2.1 Limits	14
5.2.2 Test Procedures.....	14
5.2.3 Test Setup.....	15
5.2.4 Test Result.....	15
5.3 RADIATED EMISSION	18
5.3.1 Limits	18
5.3.2 Test Procedures.....	18
5.3.3 Test Setup.....	18
5.3.4 Test Result.....	19
5.3.5 Band Edge - Radiated	23
5.3.6 Spurious emission in restricted band 1000MHz-25000MHz.....	24
5.4 PEAK OUTPUT POWER	25
5.4.1 Limit	25
5.4.2 Test Procedure	25
5.4.3 Test Setup.....	25
5.4.4 Test Results	25
5.5 POWER SPECTRAL DENSITY.....	28
5.5.1 Limit	28
5.5.2 Test Procedure	28
5.5.3 Test Setup.....	28
5.5.4 Test Results	28
5.6 6dB BANDWIDTH.....	31
5.6.1 Limit	31
5.6.2 Test Procedure	31
5.6.3 Test Setup.....	31
5.6.4 Test Results	31
5.7 DUTY CYCLE	34
5.7.1 Limit	34
5.7.2 Test Procedure	34
5.7.3 Test Setup.....	34
5.7.4 Test Results	34
5.8 CONDUCTED BAND EDGE	38
5.8.1 Limit	38

5.8.2	Test Procedure	38
5.8.3	Test Setup.....	38
5.8.4	Test Results	38
5.9	SPURIOUS RF CONDUCTED EMISSIONS	41
5.9.1	Limit	41
5.9.2	Measuring Instruments	41
5.9.3	Test Procedure	41
5.9.4	Test Setup.....	41
5.9.5	Test Results	41
6	PHOTOGRAPHS OF THE TEST SETUP	44
7	PHOTOGRAPHS OF THE EUT.....	45

TEST RESULT CERTIFICATION

Applicant's Name..... : Shenzhen Hollyland Technology Co., Ltd.
Address : 8F, Building 5D, Skyworth Innovation Valley, Tangtou Road,
Shiyan Street, Baoan District, Shenzhen, 518055 China

Manufacturer's Name : Shenzhen Hollyland Technology Co., Ltd.
Address : 8F, Building 5D, Skyworth Innovation Valley, Tangtou Road,
Shiyan Street, Baoan District, Shenzhen, 518055 China

Product description

Product name : Wireless Microphone

Model Number : M32T1

Standards : FCC Part 15.247

Test procedure : IEEE/ANSI C63.10-2020
KDB558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test

Date (s) of performance of tests : Aug. 07, 2024~Aug. 16, 2024

Test Result : **Pass**


Testing Engineer

: 
(Zoe Su)

Technical Manager

: 
(Gary Lu)

Authorized Signatory

: 
(Leo Su)

Revision History

1 General Description

1.1 Description of EUT

Product name:	Wireless Microphone
Model name:	M32T1
Series Model:	N/A
Different of series model:	N/A
Operation frequency:	2402-2480MHz
Modulation type:	GFSK
Bit Rate of transmitter:	1 Mbps, 2 Mbps
Antenna type:	LDS Antenna
Antenna gain:	3.51dBi
Max. output power:	11.51dBm
Hardware version:	V08
Software version:	V1.1.0.4
Battery:	DC 3.87V, 85mAh
Power supply:	DC 5V from adapter AC 120V/60Hz or DC 3.87 from battery
Adapter information:	N/A

1.2 Test Mode

Test Mode	Channel	Frequency (MHz)
2.4GHz 1M	00	2402
2.4GHz 1M	19	2440
2.4GHz 1M	39	2480
2.4GHz 2M	00	2402
2.4GHz 2M	19	2440
2.4GHz 2M	39	2480

1.3 Operation Channel list

Channel No.	Frequency (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Laptop	NbDE-WFH9	XYKPM22A130 01799	Huawei Terminal Co., Ltd
Adapter	TA65B	2S36003438PL 97T09582	Nanjing Bolande Electronic Technology Co., Ltd
Cable	/	/	Shenzhen Hollyland Technology Co., Ltd.

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.247 (b)	Peak Output Power	Pass	
3	15.207	Conducted Emission	Pass	
4	15.247 (d) & 15.209	Radiated Spurious Emission	Pass	
5	15.247 (e)	Power Spectral Density	Pass	
6	15.247 (a)(2)	6dB Bandwidth	Pass	
7	558074 D01 15.247 Meas Guidance v05r02 Chapter 6	Duty Cycle	Pass	
8	15.205	Band Edge Emission	Pass	
9	15.247(d)	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	± 5 %	

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 91270	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-011 8	NYCM1420 102	2024-05-17	2025-05-16
5	HB-E006	Preamplifier	Noyetec	LAN-18 40	NYCM1420 103	2024-05-17	2025-05-16
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2024-05-17	2025-05-16
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM142 0204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2024-05-21	2025-05-20
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A0227 8	2024-05-17	2025-05-16

Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2024-05-17	2025-05-16
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2024-05-17	2025-05-16
3	HB-E016	ZN23201	Noyetec	ZN23201	N/A	2024-05-21	2025-05-20
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2024-05-17	2025-05-16
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2024-05-17	2025-05-16

RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Analog Signal Generator	Agilent	N5181A	MY47070421	2024-05-17	2025-05-16
2	HB-E042	WIDEBAND RADIO COMMUNICA	R&S	CMW500	132108	2024-05-17	2025-05-16

		TION TESTER					
3	HB-E043	MXG Analog Signal Generator	Agilent	N5182A	US46240335	2024-05-17	2025-05-16
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2024-05-17	2025-05-16
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	/	/
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1	N/A	/	/

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is LDS Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission

5.2.1 Limits

Limits – Class B		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Note:

1. the tighter limit applies at the band edges.
2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

a) EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test Setup

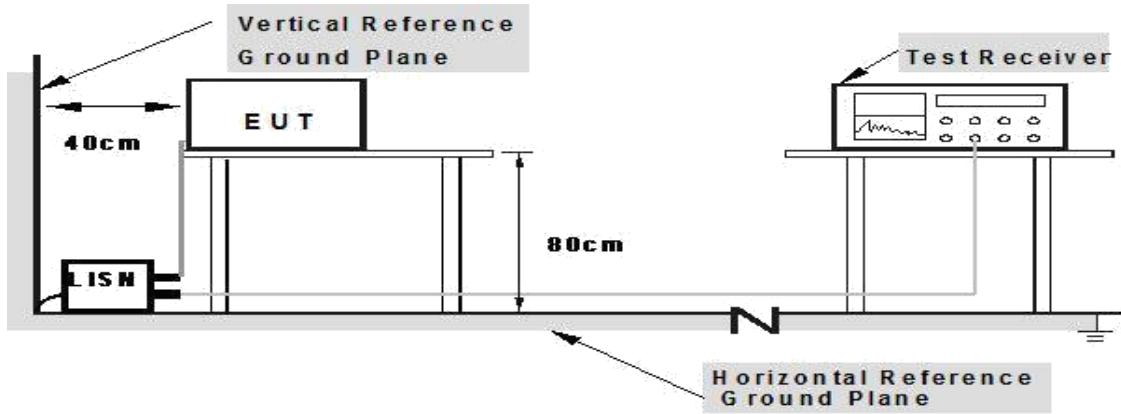


5.2.4 Test Result

EUT:	Wireless Microphone	Model Name:	M32T1
Test Mode:	Charging	Phase:	L
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

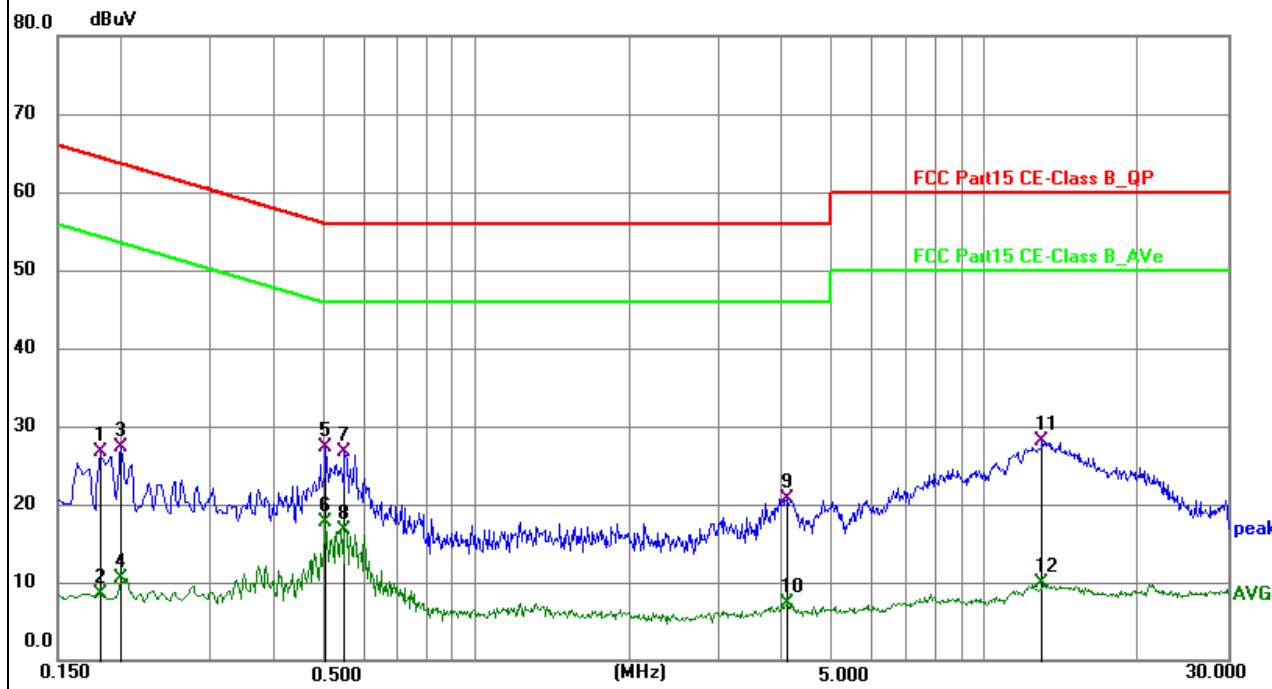

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.181400	16.17	10.48	26.65	64.42	-37.77	QP
2	0.181400	-1.94	10.48	8.54	54.42	-45.88	AVG
3	0.199500	16.81	10.47	27.28	63.63	-36.35	QP
4	0.199500	0.01	10.47	10.48	53.63	-43.15	AVG
5	0.505400	16.73	10.51	27.24	56.00	-28.76	QP
6 *	0.505400	7.24	10.51	17.75	46.00	-28.25	AVG
7	0.550300	16.22	10.51	26.73	56.00	-29.27	QP
8	0.550300	6.12	10.51	16.63	46.00	-29.37	AVG
9	4.083000	10.30	10.42	20.72	56.00	-35.28	QP
10	4.083000	-3.13	10.42	7.29	46.00	-38.71	AVG
11	12.961400	16.87	11.18	28.05	60.00	-31.95	QP
12	12.961400	-1.34	11.18	9.84	50.00	-40.16	AVG

EUT:	Wireless Microphone	Model Name:	M32T1
Test Mode:	Charging	Phase:	N
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

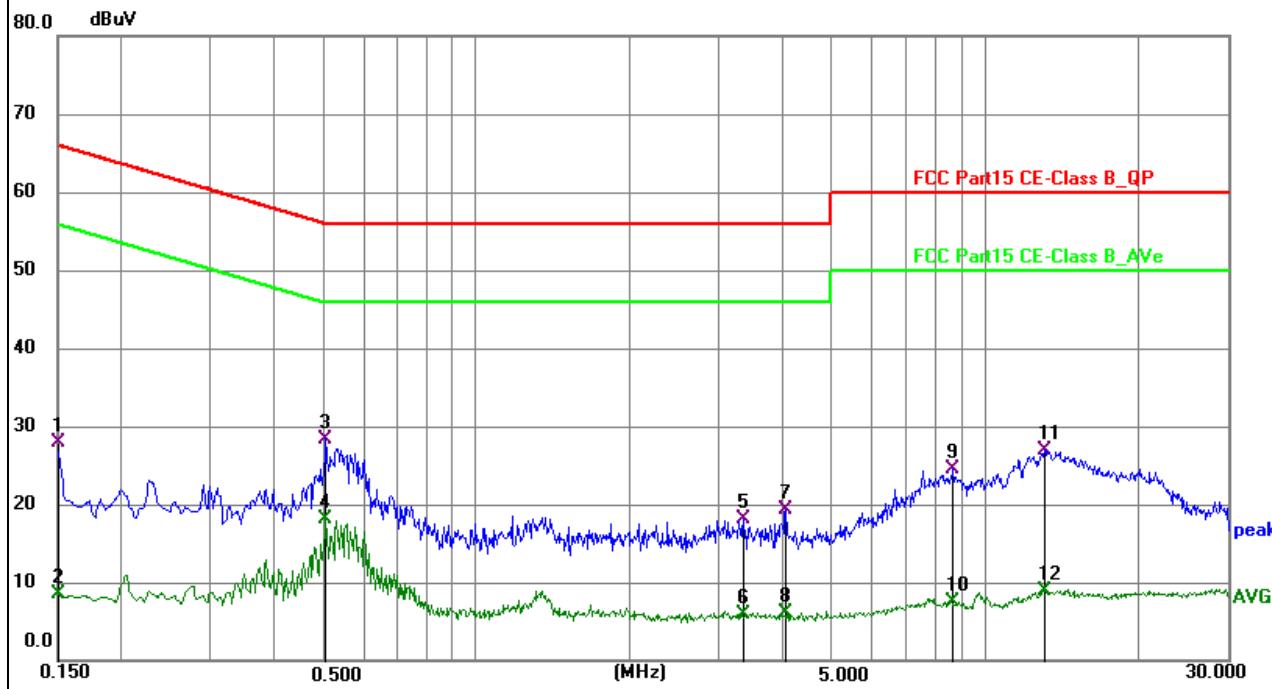

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150000	17.42	10.48	27.90	66.00	-38.10	QP
2	0.150000	-1.94	10.48	8.54	56.00	-47.46	AVG
3 *	0.505400	18.00	10.40	28.40	56.00	-27.60	QP
4	0.505400	7.80	10.40	18.20	46.00	-27.80	AVG
5	3.358400	7.76	10.42	18.18	56.00	-37.82	QP
6	3.358400	-4.52	10.42	5.90	46.00	-40.10	AVG
7	4.065000	8.84	10.37	19.21	56.00	-36.79	QP
8	4.065000	-4.32	10.37	6.05	46.00	-39.95	AVG
9	8.645900	14.02	10.48	24.50	60.00	-35.50	QP
10	8.645900	-2.90	10.48	7.58	50.00	-42.42	AVG
11	13.078500	15.75	11.19	26.94	60.00	-33.06	QP
12	13.078500	-2.26	11.19	8.93	50.00	-41.07	AVG

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- a) The radiated emission tests were performed in the 3 meters.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- e) If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- f) For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup


Radiated Emission Test-Up Frequency Below 30MHz

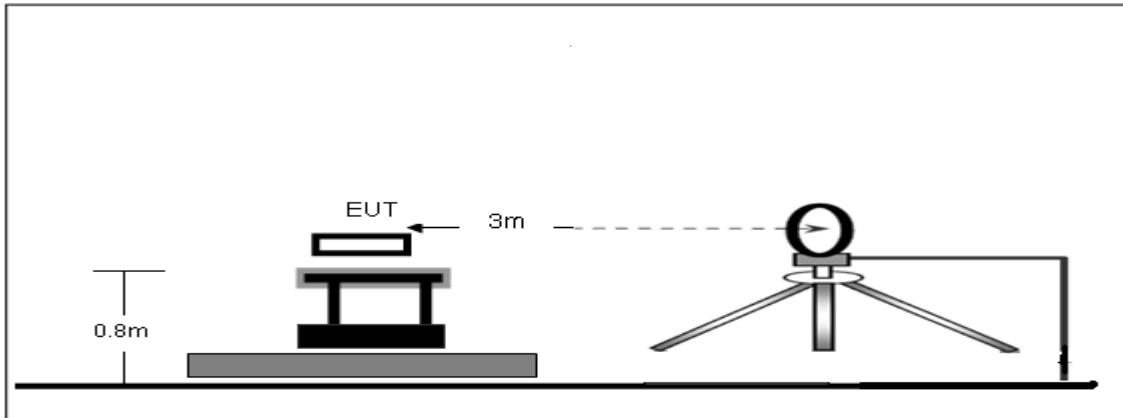

Radiated Emission Test-Up Frequency 30MHz~1GHz

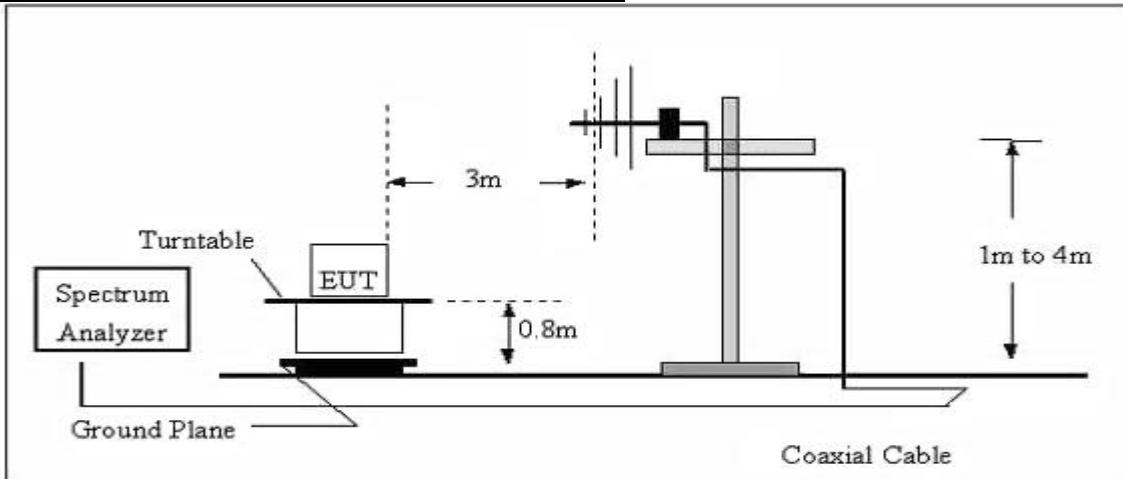

Radiated emission test-up frequency above 1GHz

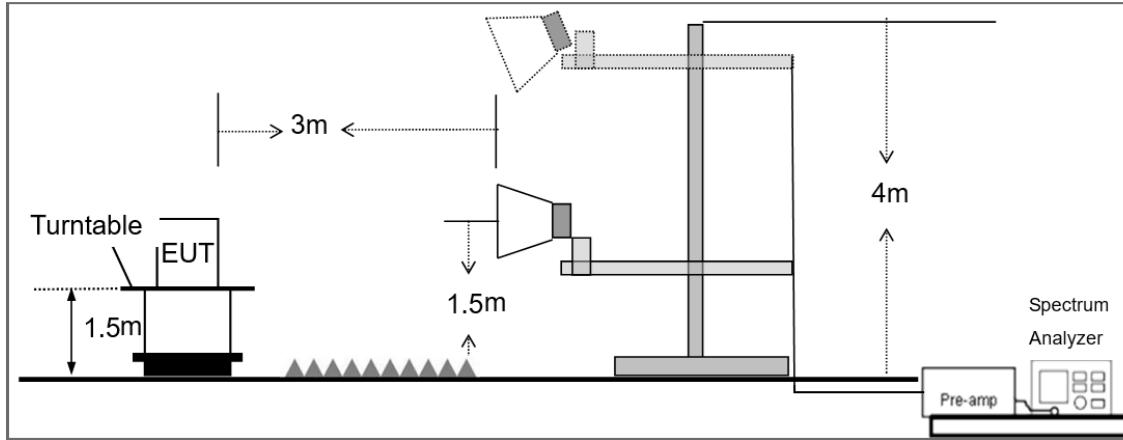

5.3.4 Test Result

Below 30MHz

EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1010 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	TX	Polarization:	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	Pass
--	--	--	--	Pass

Note:

1. For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.


Frequency range (30MHz – 1GHz)

EUT:	Wireless Microphone	Model Name:	M32T1
Test Mode:	TX	Phase:	Vertical
Test Voltage:	DC 3.87V from battery		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.4449	45.54	-14.98	30.56	40.00	-9.44	QP
2	39.2991	43.26	-14.10	29.16	40.00	-10.84	QP
3 *	50.4089	49.20	-14.30	34.90	40.00	-5.10	QP
4	122.8340	41.84	-15.35	26.49	43.50	-17.01	QP
5	134.5592	42.99	-14.45	28.54	43.50	-14.96	QP
6	196.5098	47.17	-16.44	30.73	43.50	-12.77	QP

EUT:	Wireless Microphone	Model Name:	M32T1
Test Mode:	TX	Phase:	Horizontal
Test Voltage:	DC 3.87V from battery		

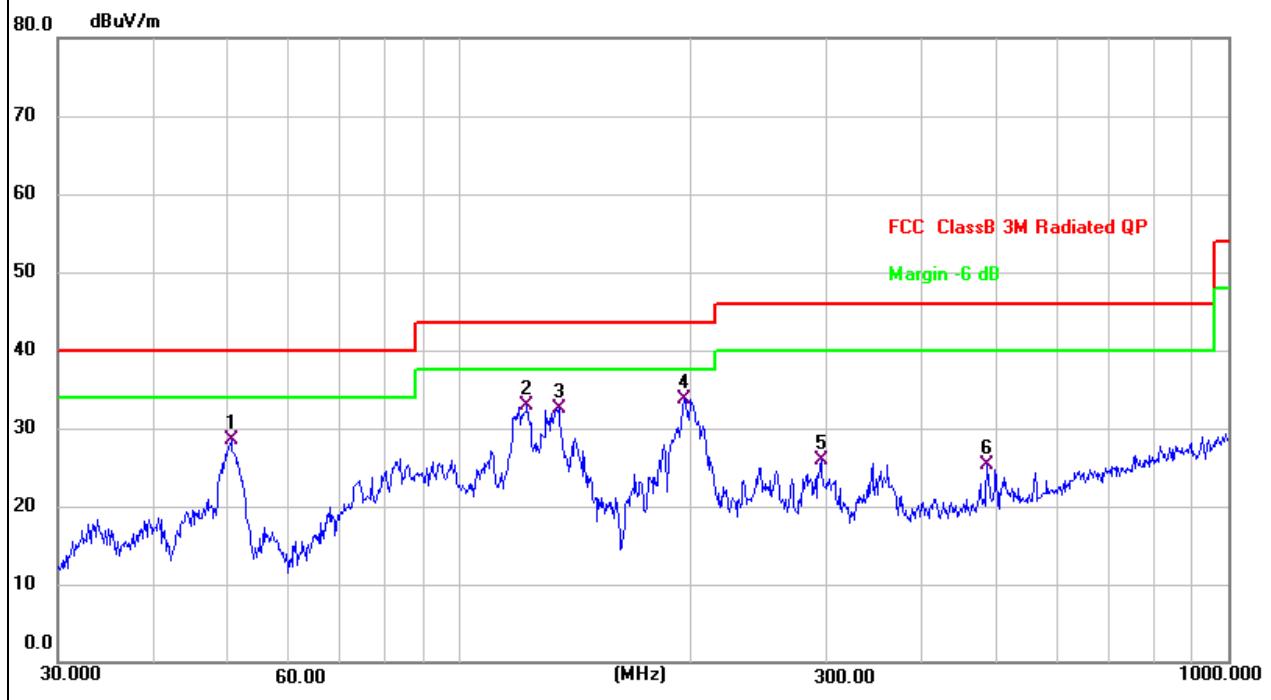

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.4089	42.75	-14.30	28.45	40.00	-11.55	QP
2	122.4040	48.21	-15.31	32.90	43.50	-10.60	QP
3	134.5592	47.01	-14.45	32.56	43.50	-10.94	QP
4 *	195.8220	50.17	-16.39	33.78	43.50	-9.72	QP
5	295.1469	38.75	-12.75	26.00	46.00	-20.00	QP
6	485.6093	33.08	-7.74	25.34	46.00	-20.66	QP

5.3.5 Band Edge - Radiated

Frequency (MHz)	Meter Reading (dB μ V)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dB μ V/ m)	Limits (dB μ V/ m)	Margin (dB)	Detector Type	Comment
GFSK									
2310.00	63.11	2.40	27.70	40.40	52.81	74	-21.19	Pk	Vertical
2310.00	43.68	2.40	27.70	40.40	33.38	54	-20.62	AV	Vertical
2310.00	61.40	2.40	27.70	40.40	51.10	74	-22.90	Pk	Horizontal
2310.00	42.95	2.40	27.70	40.40	32.65	54	-21.35	AV	Horizontal
2390.00	63.93	2.44	28.30	40.10	54.57	74	-19.43	Pk	Vertical
2390.00	43.45	2.44	28.30	40.10	34.09	54	-19.91	AV	Vertical
2390.00	64.36	2.44	28.30	40.10	55.00	74	-19.00	Pk	Horizontal
2390.00	43.01	2.44	28.30	40.10	33.65	54	-20.35	AV	Horizontal
2483.50	61.74	2.48	28.70	39.80	53.12	74	-20.88	Pk	Vertical
2483.50	42.99	2.48	28.70	39.80	34.37	54	-19.63	AV	Vertical
2483.50	64.57	2.48	28.70	39.80	55.95	74	-18.05	Pk	Horizontal
2483.50	44.19	2.48	28.70	39.80	35.57	54	-18.43	AV	Horizontal
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									

5.3.6 Spurious emission in restricted band 1000MHz-25000MHz

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Reading Level (dB μ V)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	63.04	4.36	32.92	45.53	54.79	74.00	-19.21	Pk	Vertical
4804.338	42.27	4.36	32.92	45.53	34.02	54.00	-19.98	AV	Vertical
7206.107	61.30	5.02	37.63	45.56	58.39	74.00	-15.61	Pk	Vertical
7206.107	42.39	5.02	37.63	45.56	39.48	54.00	-14.52	AV	Vertical
4804.169	63.65	4.36	32.92	45.53	55.40	74.00	-18.60	Pk	Horizontal
4804.169	42.08	4.36	32.92	45.53	33.83	54.00	-20.17	AV	Horizontal
7206.214	61.26	5.02	37.63	45.56	58.35	74.00	-15.65	Pk	Horizontal
7206.214	40.81	5.02	37.63	45.56	37.90	54.00	-16.10	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	62.80	4.41	33.01	45.76	54.46	74.00	-19.54	Pk	Vertical
4880.473	43.27	4.41	33.01	45.76	34.93	54.00	-19.07	AV	Vertical
7320.265	64.35	5.02	37.68	45.59	61.46	74.00	-12.54	Pk	Vertical
7320.265	40.77	5.02	37.68	45.59	37.88	54.00	-16.12	AV	Vertical
4880.366	63.58	4.41	33.01	45.76	55.24	74.00	-18.76	Pk	Horizontal
4880.366	40.81	4.41	33.01	45.76	32.47	54.00	-21.53	AV	Horizontal
7320.234	60.70	5.02	37.68	45.59	57.81	74.00	-16.19	Pk	Horizontal
7320.234	43.88	5.02	37.68	45.59	40.99	54.00	-13.01	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	62.77	4.50	33.26	46.07	54.46	74.00	-19.54	Pk	Vertical
4960.482	41.67	4.50	33.26	46.07	33.36	54.00	-20.64	AV	Vertical
7440.131	64.92	5.02	37.78	45.77	61.95	74.00	-12.05	Pk	Vertical
7440.131	49.40	5.02	37.78	45.77	46.43	54.00	-7.57	AV	Vertical
4960.326	62.89	4.50	33.26	46.07	54.58	74.00	-19.42	Pk	Horizontal
4960.326	45.11	4.50	33.26	46.07	36.80	54.00	-17.20	AV	Horizontal
7440.199	63.59	5.02	37.78	45.77	60.62	74.00	-13.38	Pk	Horizontal
7440.199	44.20	5.02	37.78	45.77	41.23	54.00	-12.77	AV	Horizontal
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. 4. All the modulation modes have been tested, and the worst result was report as below.									

5.4 Peak Output Power

5.4.1 Limit

FCC Part15 Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(3)	Peak output power	1 watt or 30dBm	2400-2483.5

5.4.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=2MHz, VBW=10MHz, Detector=Peak
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4.3 Test Setup





5.4.4 Test Results

EUT:	Wireless Microphone	Model Name:	M32T1
Test Mode:	GFSK/ CH00, CH19, CH39	Test Voltage:	DC 3.87V from battery

2.4GHz 1M			
Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	11.43	30
CH19	2440	11.16	30
CH39	2480	11.51	30

2.4GHz 2M			
Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	11.18	30
CH19	2440	10.95	30
CH39	2480	11.32	30

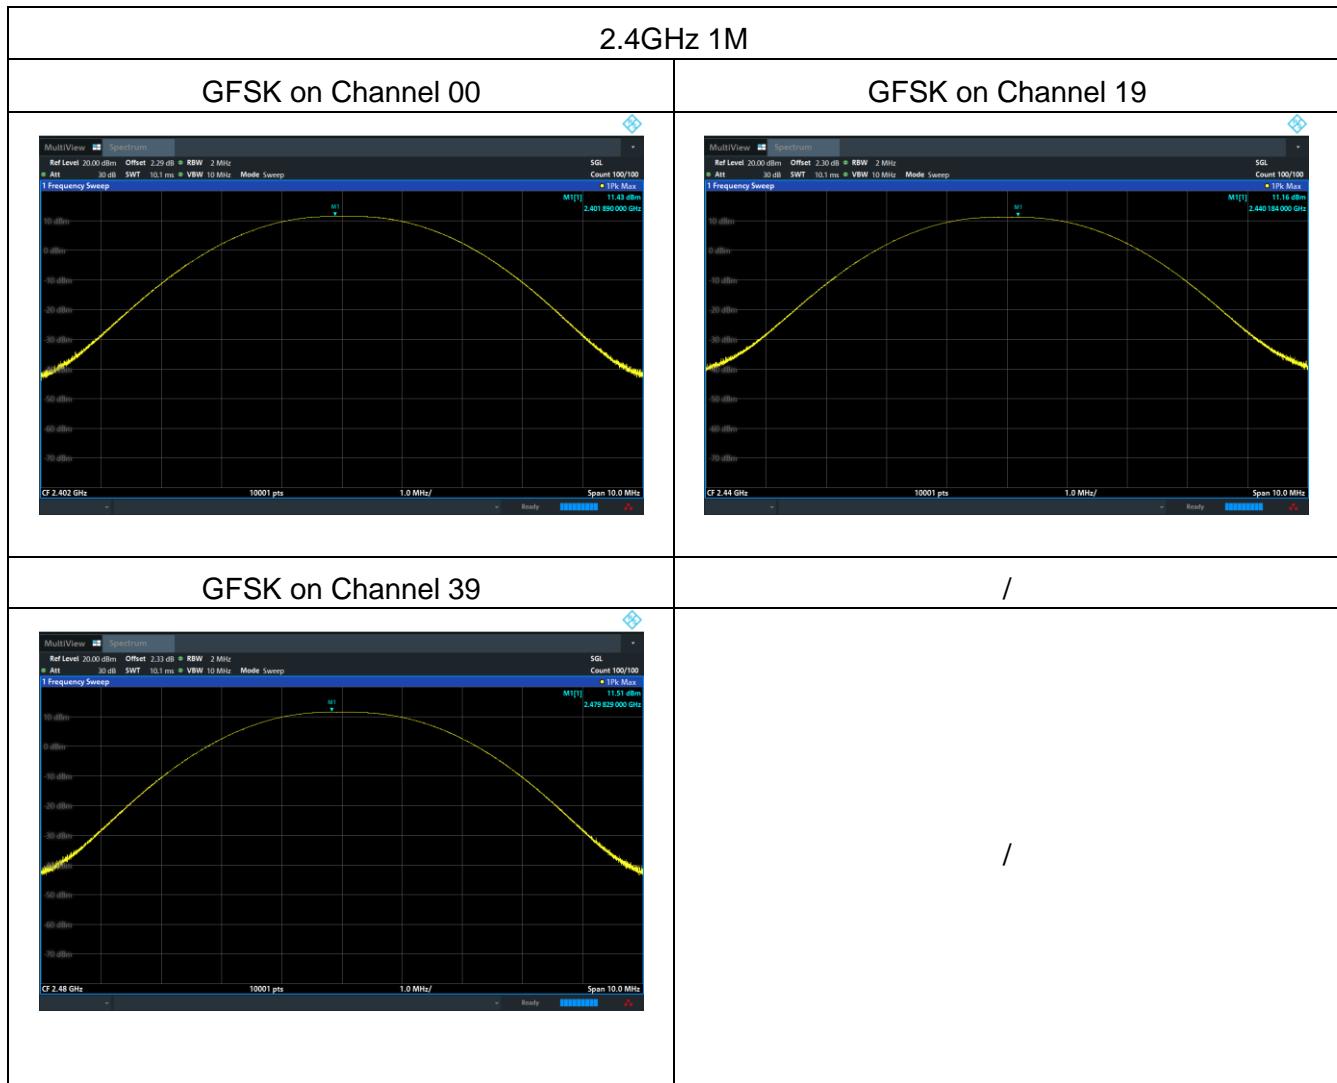

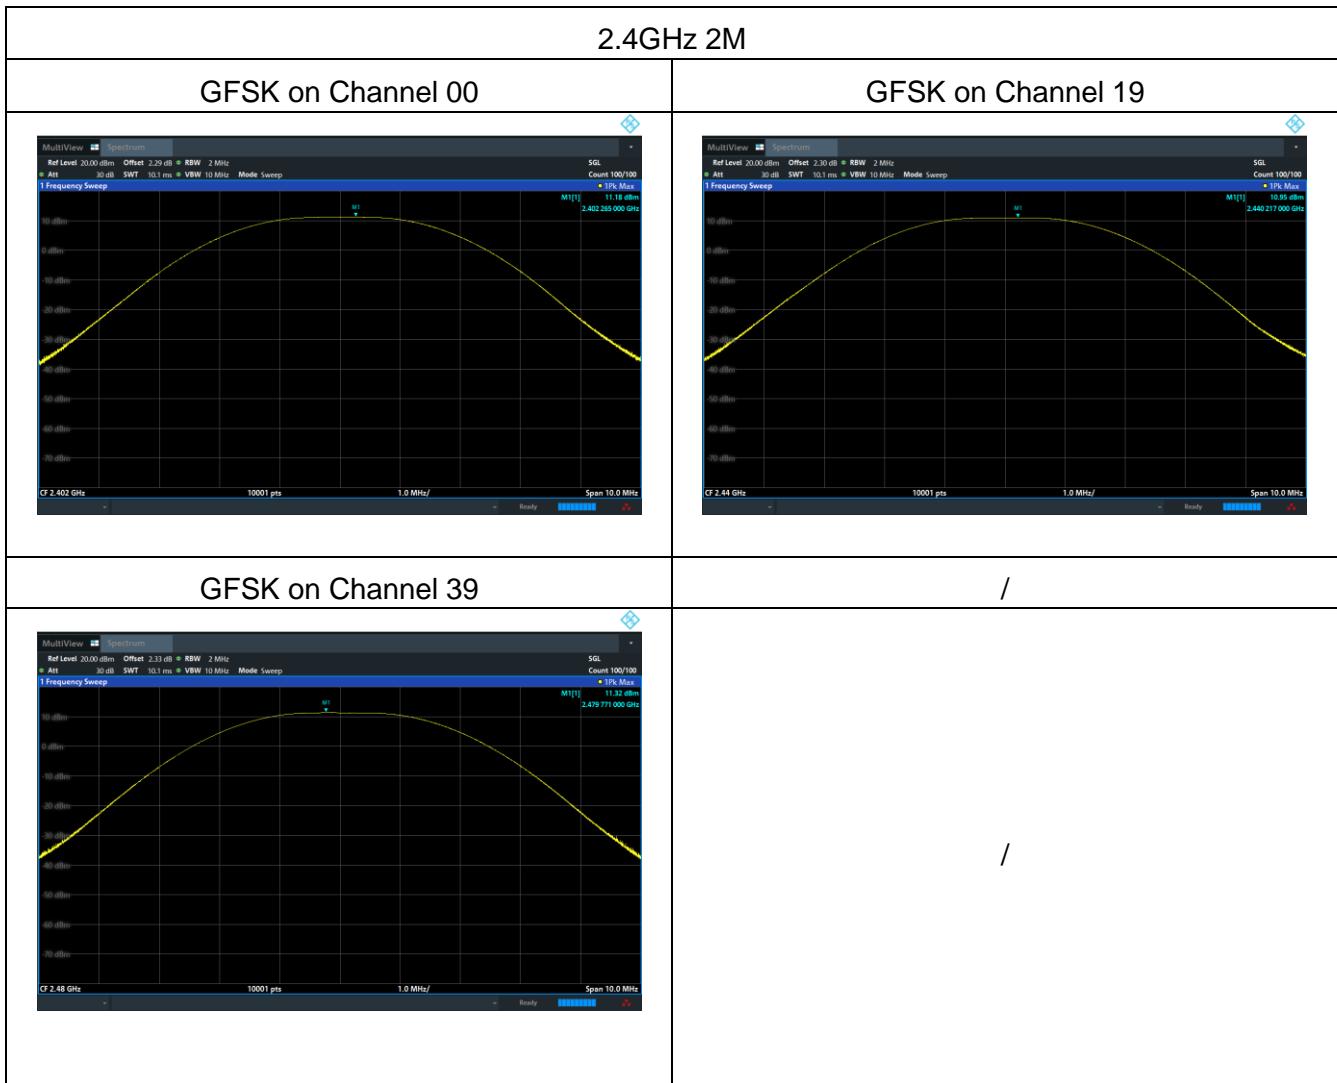

5.5 Power Spectral Density

5.5.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5

5.5.2 Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


5.5.3 Test Setup




5.5.4 Test Results

EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1015 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK/ CH00, CH19, CH39		

2.4GHz 1M			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-4.79	8	Pass
2440 MHz	-4.94	8	Pass
2480 MHz	-4.35	8	Pass

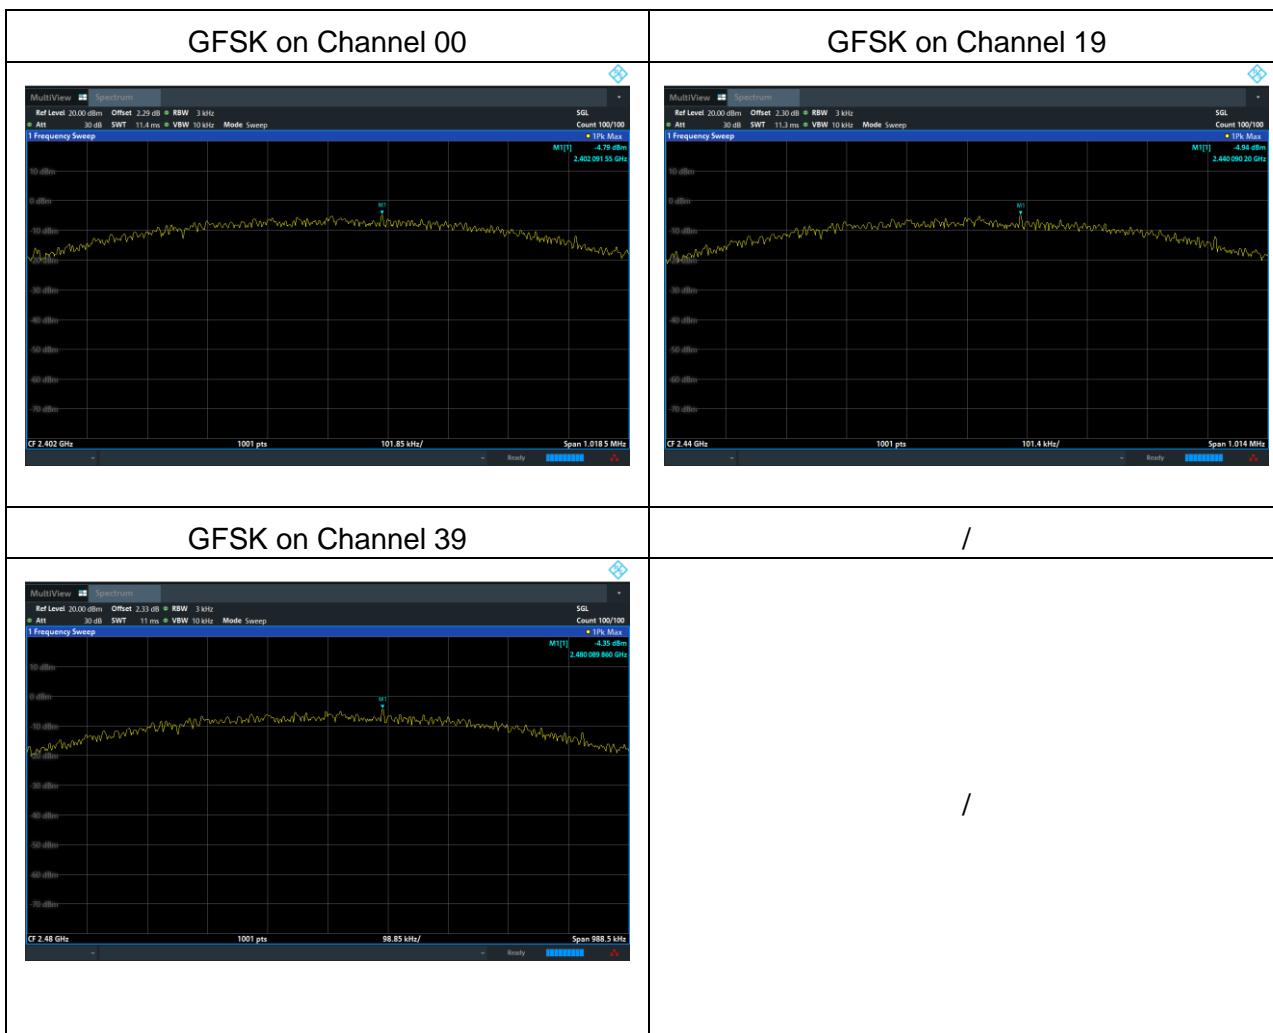

2.4GHz 2M			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-7.85	8	Pass
2440 MHz	-8.31	8	Pass
2480 MHz	-8.25	8	Pass

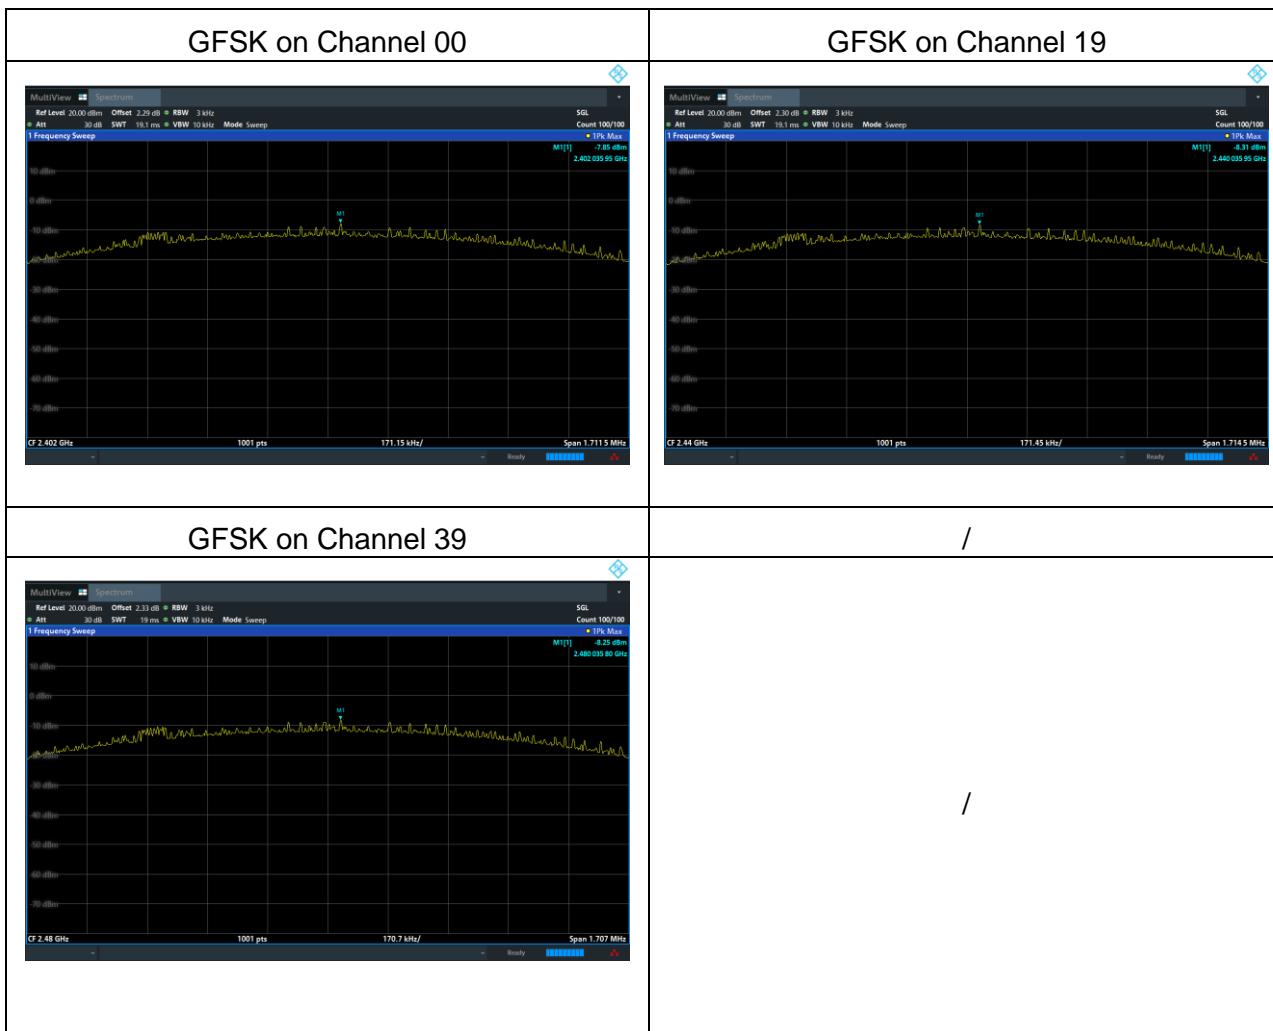

5.6 6dB Bandwidth

5.6.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	>= 500kHz (6dB bandwidth)	2400-2483.5

5.6.2 Test Procedure

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.3 Test Setup




5.6.4 Test Results

EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1012 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK/ CH00, CH19, CH39		


2.4GHz 1M				
Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (MHz)	Result
Low	2402	0.679	0.5	Pass
Middle	2440	0.676	0.5	Pass
High	2480	0.658	0.5	Pass

Test plots

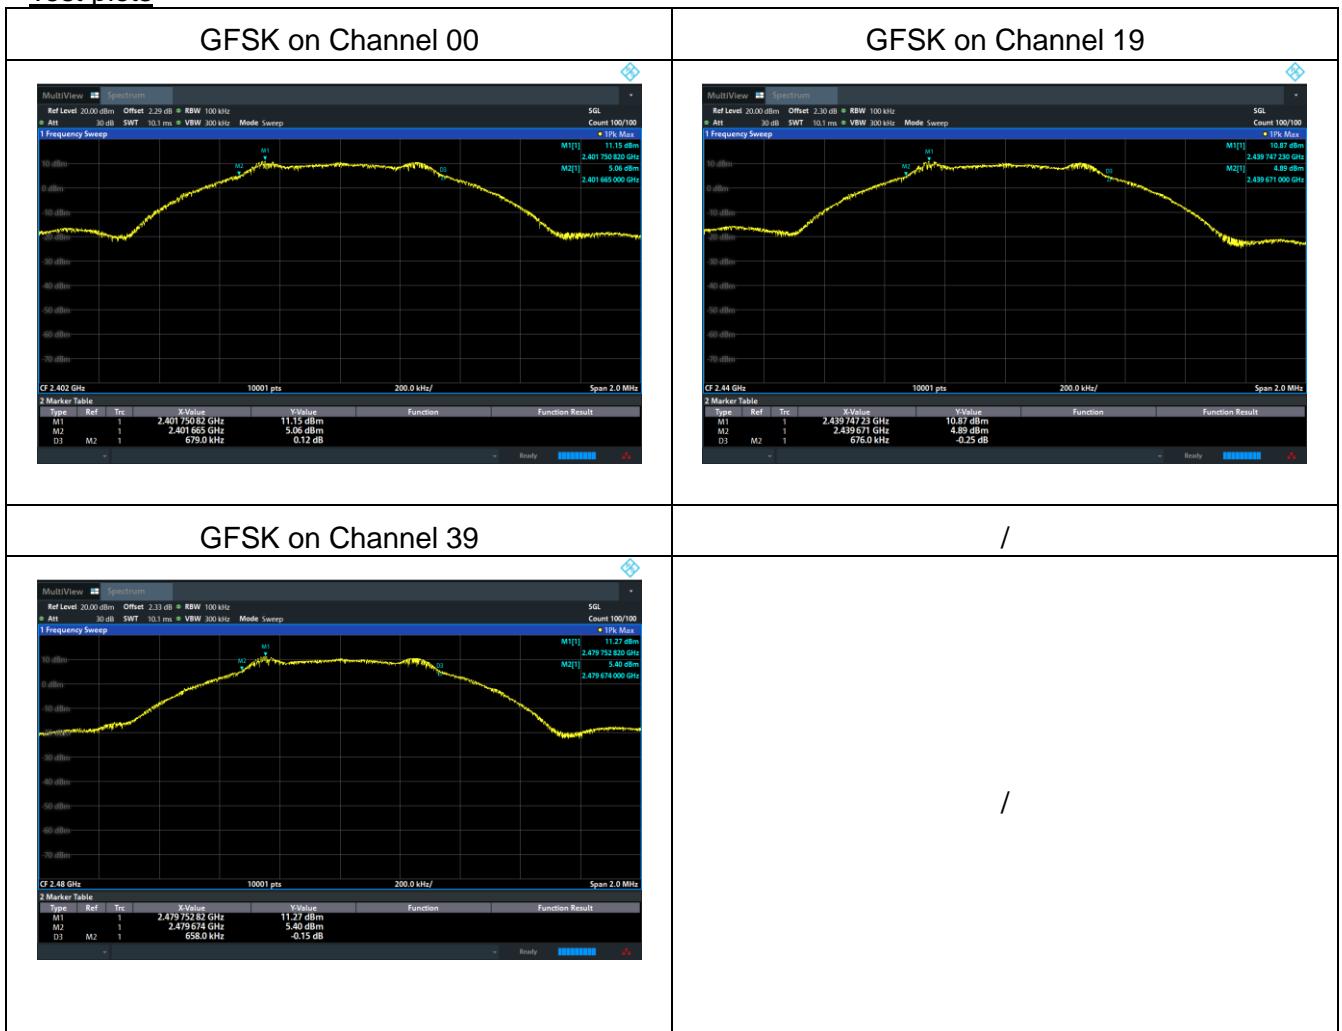

2.4GHz 2M				
Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (MHz)	Result
Low	2402	1.14	0.5	Pass
Middle	2440	1.139	0.5	Pass
High	2480	1.137	0.5	Pass

Test plots

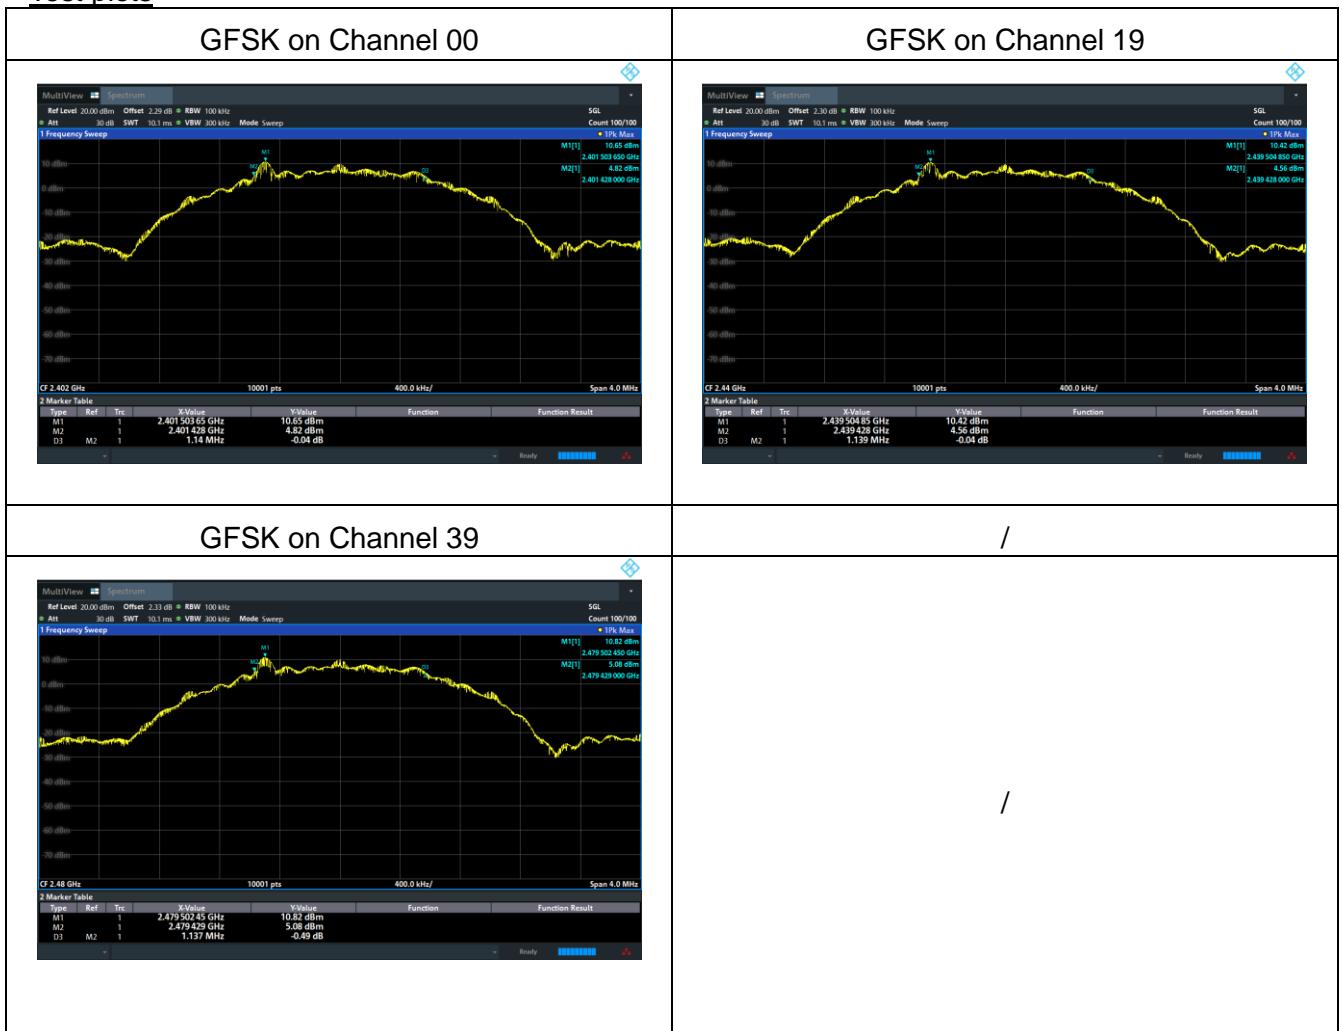

5.7 Duty Cycle

5.7.1 Limit

No limit requirement.

5.7.2 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0(b) in KDB 558074 D01 DTS Meas Guidance v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

$RBW = 10\text{MHz}$ (the largest available value)

$VBW = 10\text{MHz} (\geq RBW)$

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure Total and T_{on}

Calculate Duty Cycle = $T_{on} / Total$


5.7.3 Test Setup




5.7.4 Test Results

2.4GHz 1M			
EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1012 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK/ CH00, CH19, CH39		


Test plots

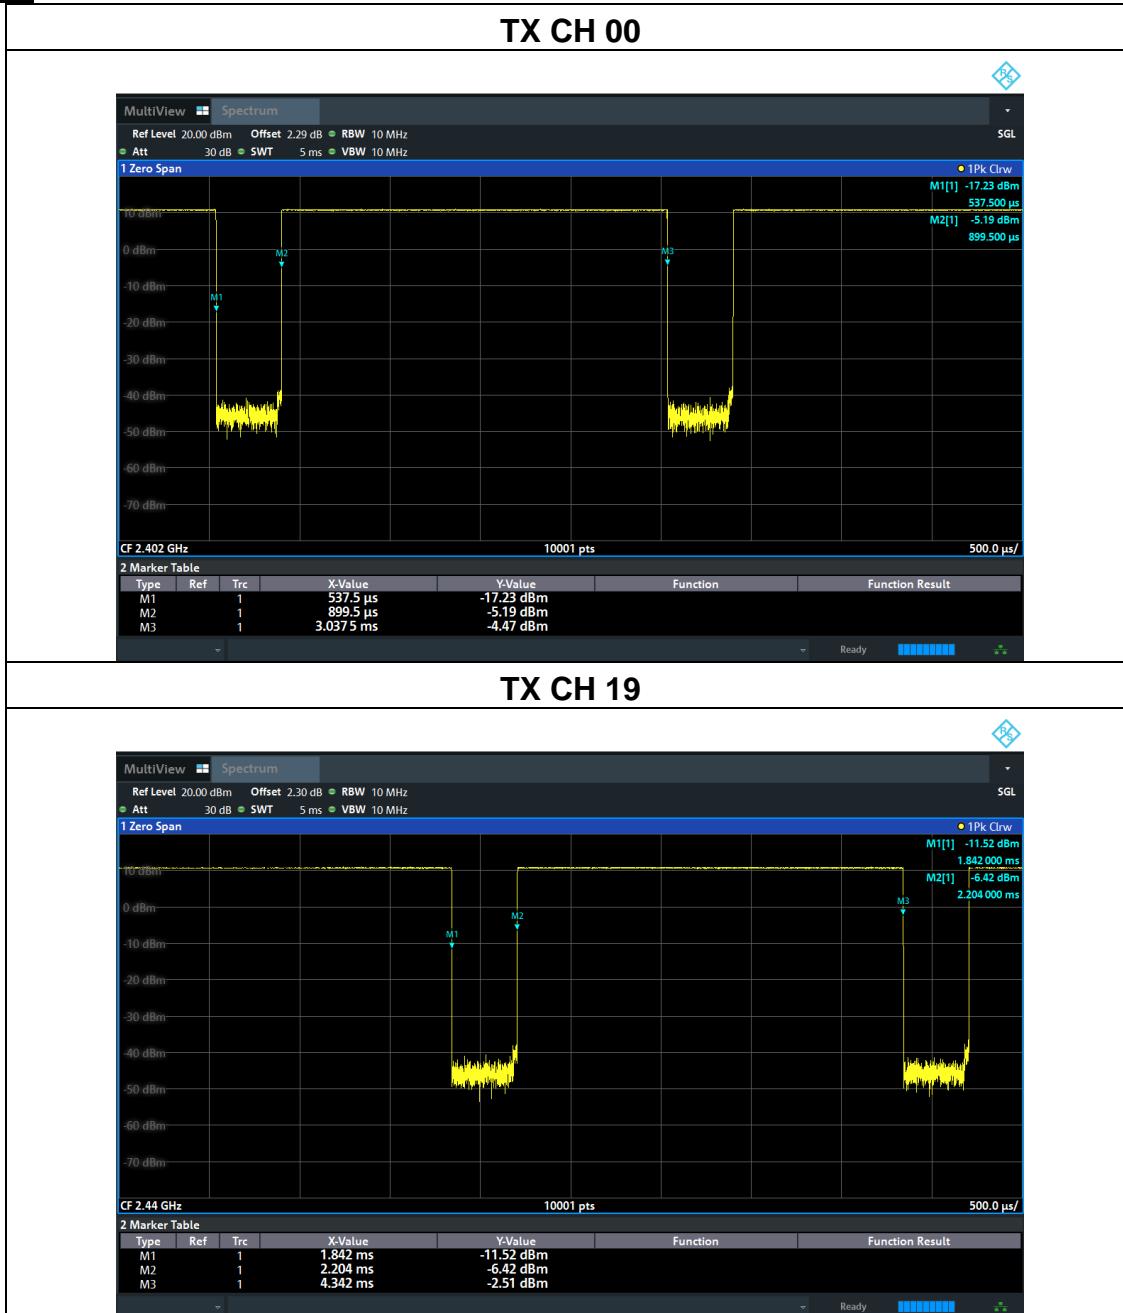


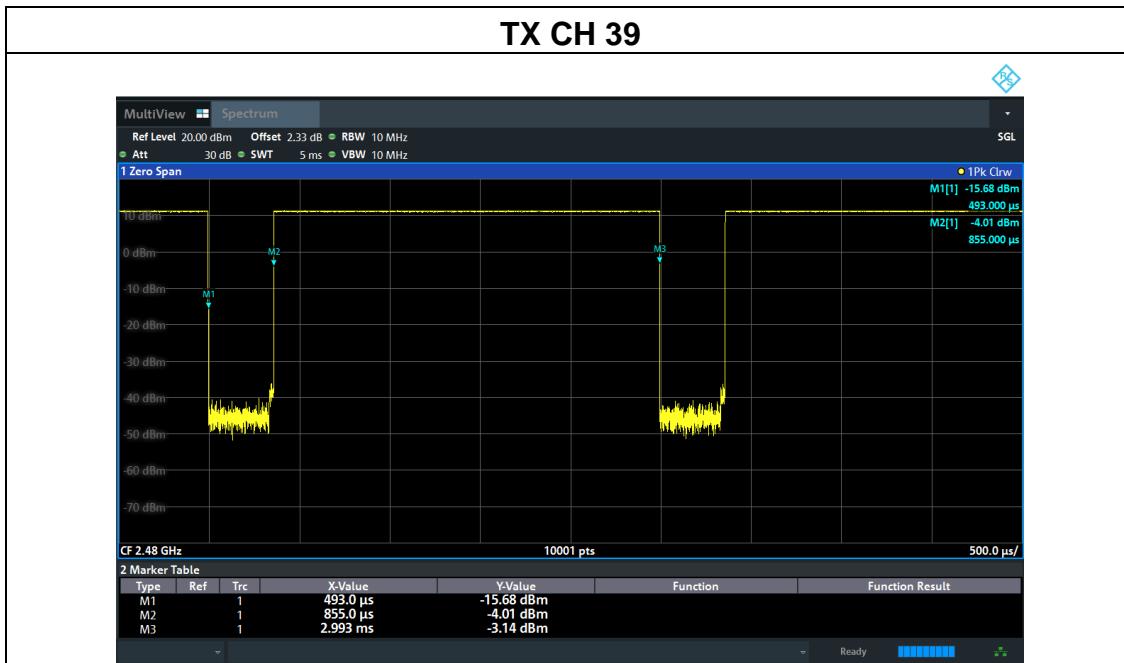

2.4GHz 2M			
EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1012 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK/CH00, CH19, CH39		

Test plots

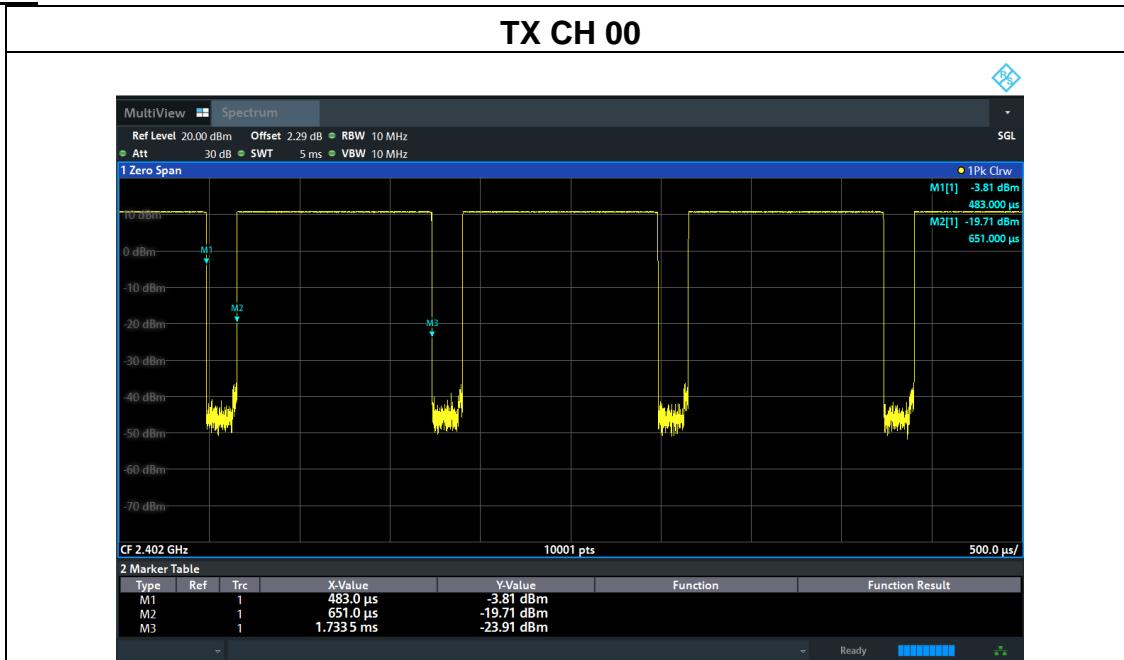

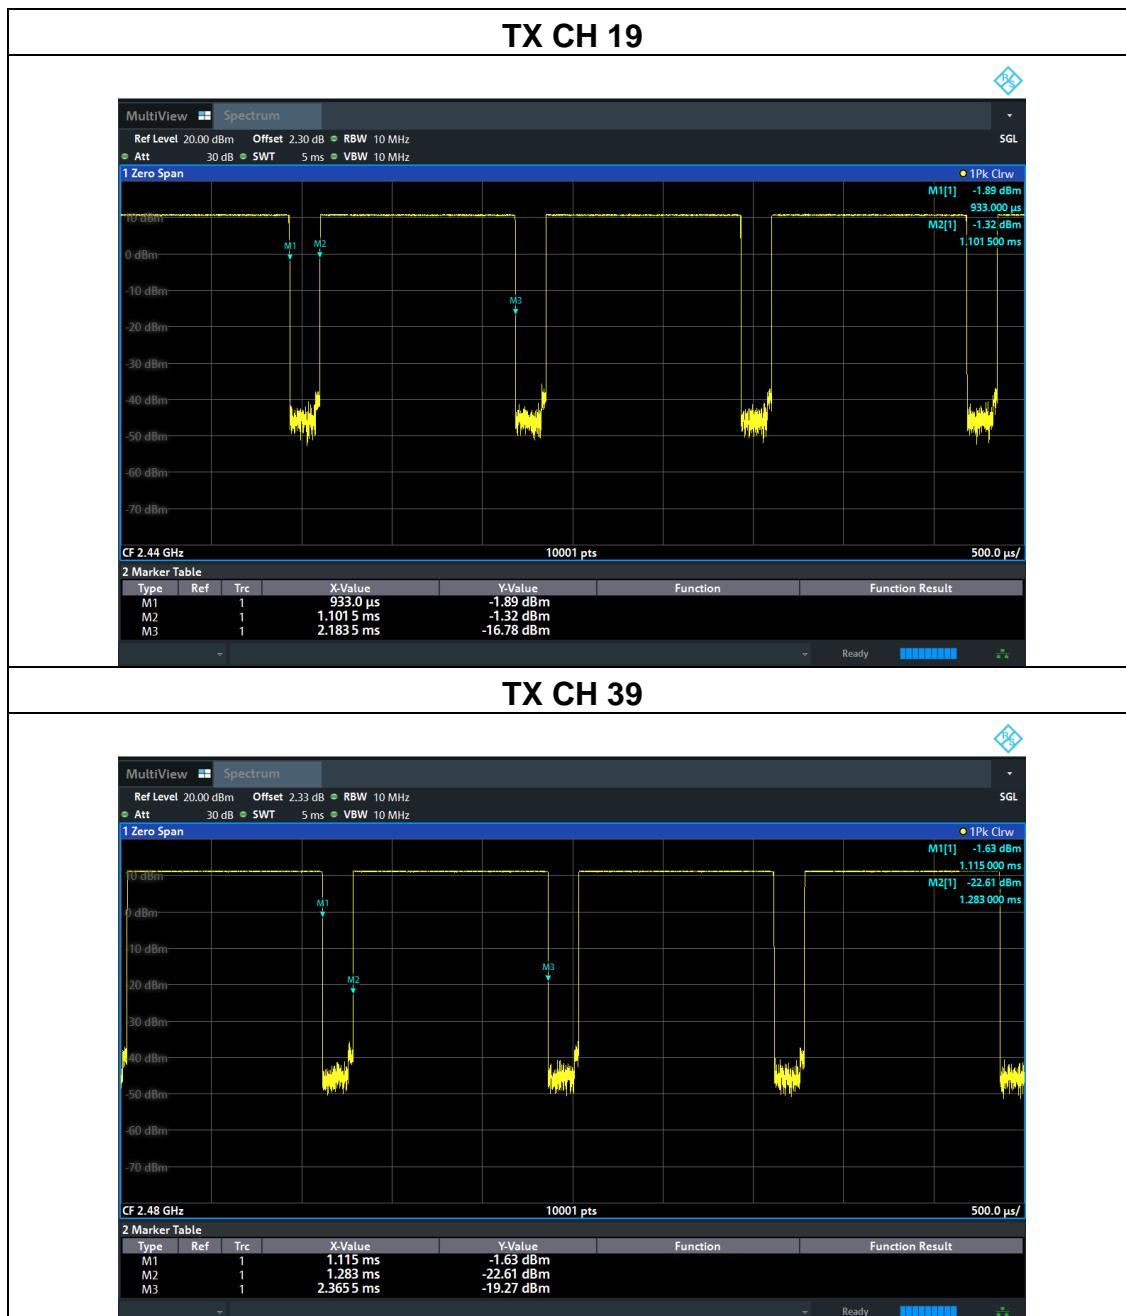

5.8 Conducted Band Edge


5.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Test Procedure


- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

5.8.3 Test Setup



5.8.4 Test Results

EUT:	Wireless Microphone	Model Name:	M32T1
Pressure:	1012 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK /CH00, CH39		

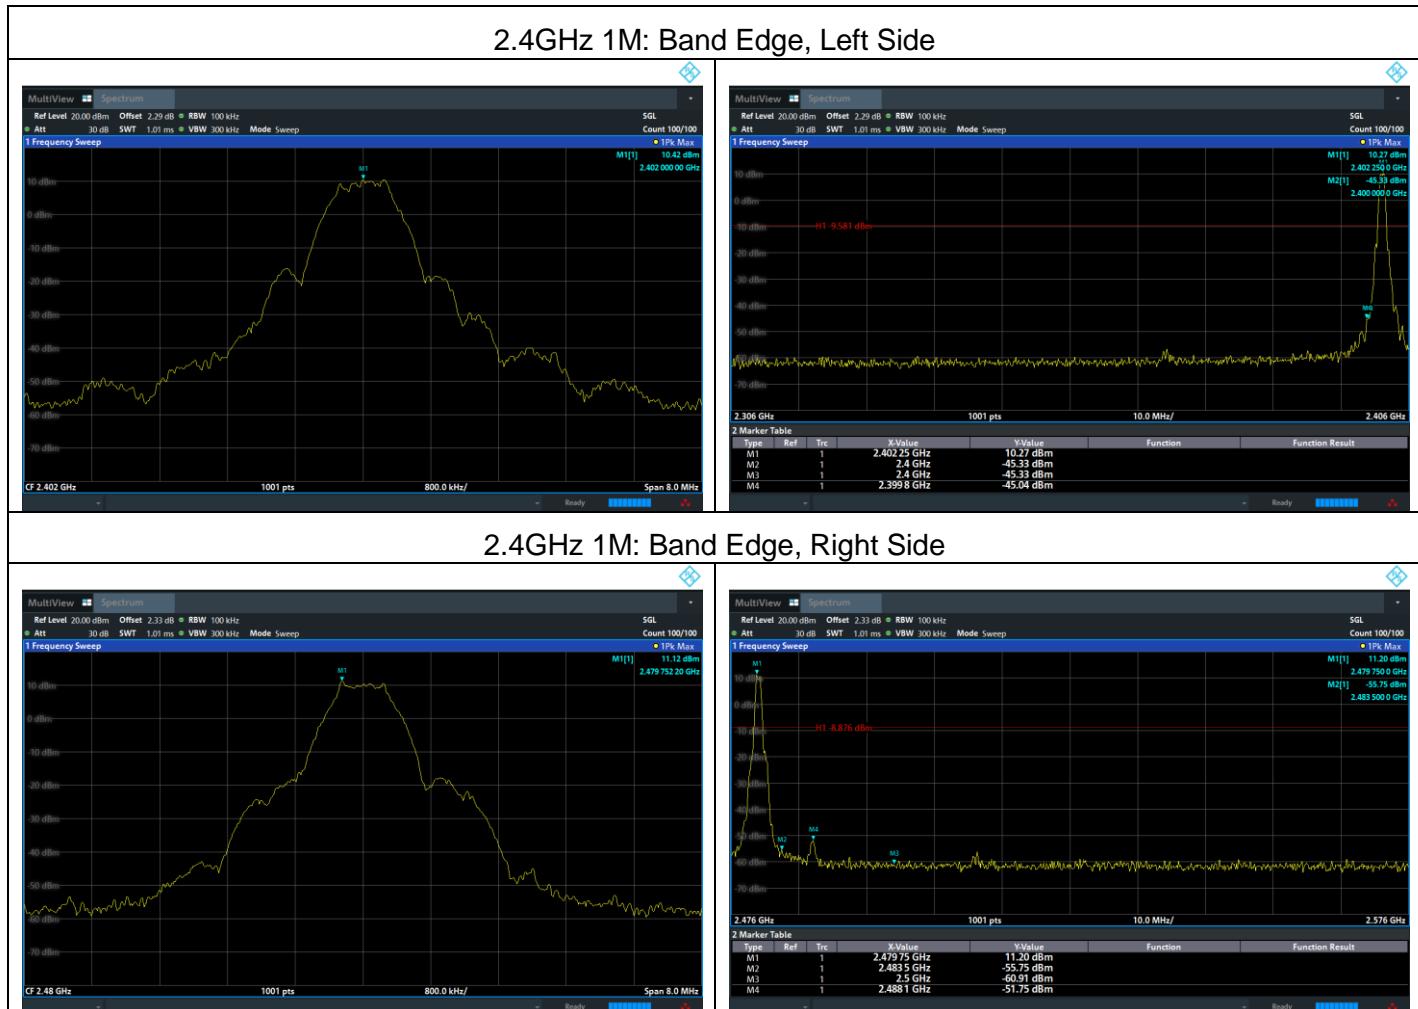

2.4GHz 2M: Band Edge, Left Side



2.4GHz 2M: Band Edge, Right Side



5.9 Spurious RF Conducted Emissions

5.9.1 Limit

Below -20dB of the highest emission level in operating band.


5.9.2 Measuring Instruments

The Measuring equipment is listed in the section 4 of this test report.

5.9.3 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

5.9.4 Test Setup



5.9.5 Test Results


Note:

- 1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

2.4GHz 1M



GFSK on Channel 00

GFSK on Channel 00

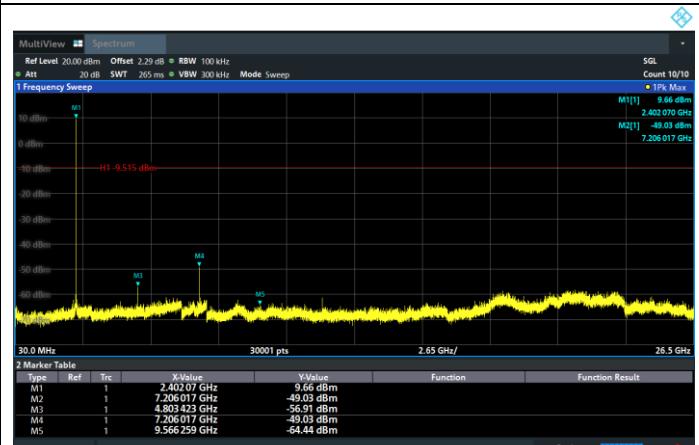



GFSK on Channel 19

GFSK on Channel 19

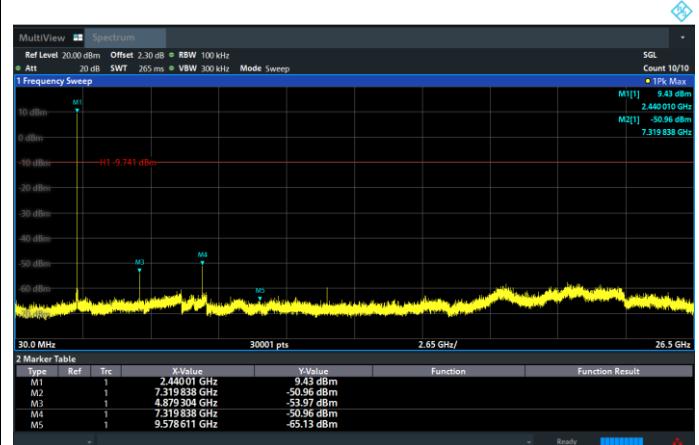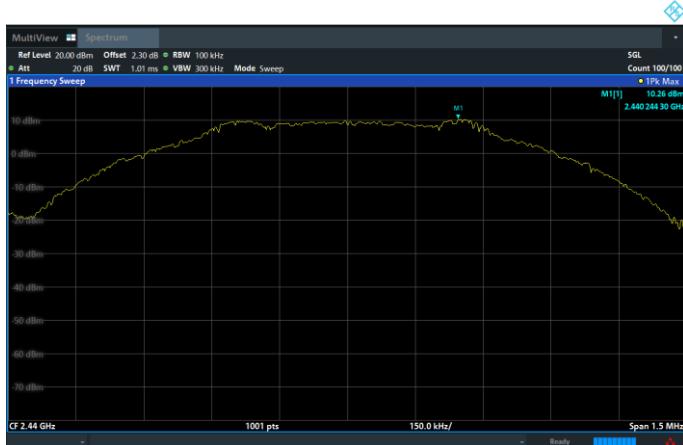

GFSK on Channel 39

GFSK on Channel 39

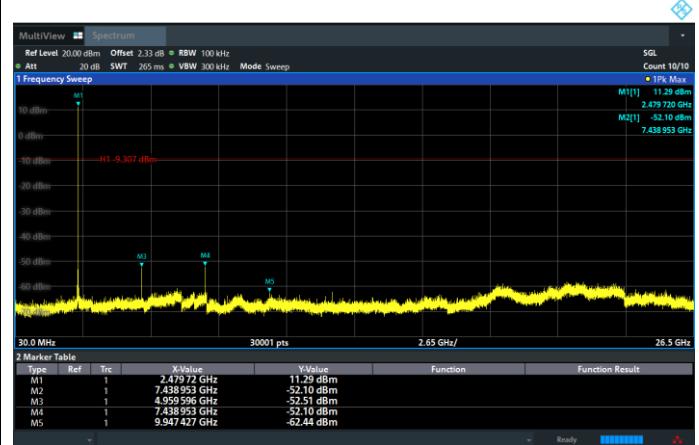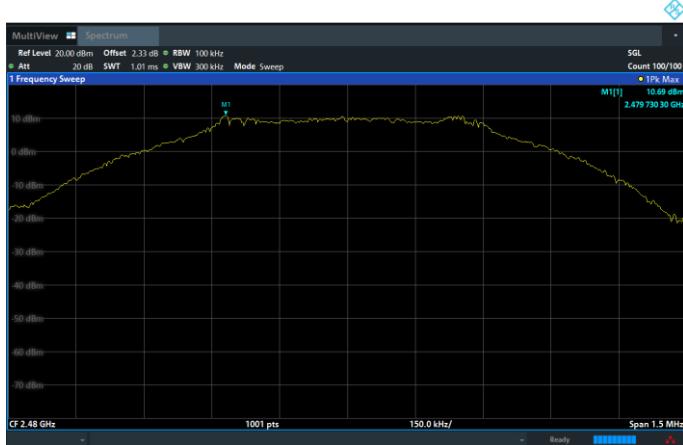


2.4GHz 2M

GFSK on Channel 00




GFSK on Channel 00

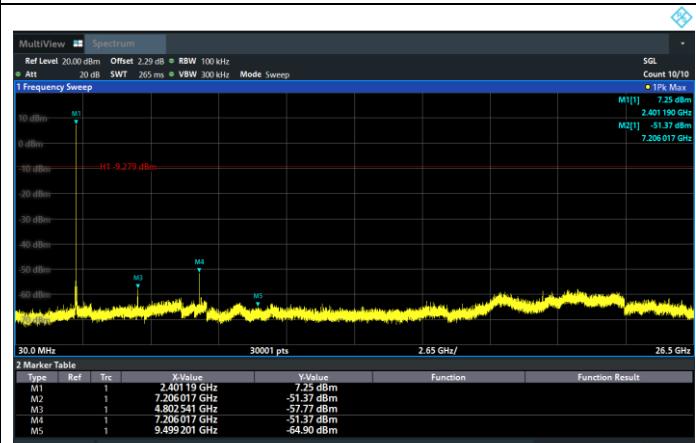

GFSK on Channel 19



GFSK on Channel 19

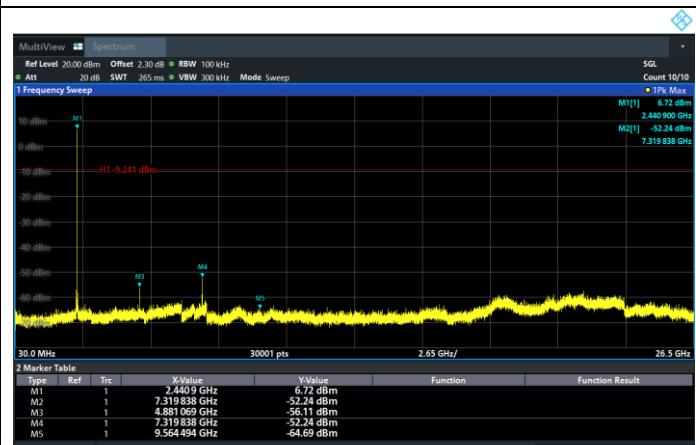

GFSK on Channel 39



GFSK on Channel 39



6 Photographs of the Test Setup

See the Appendix – Test Setup Photos.

7 Photographs of the EUT

See the Appendix - EUT Photos.

***** END OF REPORT *****