
FCC Test Report

Report No.: AGC01097160303FE03

FCC ID : 2ADZIASP-766
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : DUAL TOWER SPEAKERS
BRAND NAME : N/A
MODEL NAME : ASP-766
CLIENT : ATake Digital Technology (Shenzhen) Co., Ltd.
DATE OF ISSUE : Apr.01, 2016
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.01, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCY.....	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM.....	7
5.2. EQUIPMENT USED IN EUT SYSTEM.....	7
5.3. SUMMARY OF TEST RESULTS.....	7
6. TEST FACILITY	8
7. RADIATED EMISSION	10
7.1 TEST LIMIT	10
7.2. MEASUREMENT PROCEDURE	11
7.3. TEST SETUP	13
7.4. TEST RESULT	14
8. BAND EDGE EMISSION	19
8.1. MEASUREMENT PROCEDURE	19
8.2 TEST SETUP	19
8.3 RADIATED TEST RESULT	19
9. 20DB BANDWIDTH	24
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT RESULTS	25
10. FCC LINE CONDUCTED EMISSION TEST	31
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	31
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	31
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	32
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	32
10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	33
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	35
APPENDIX B: PHOTOGRAPHS OF EUT	37


1. VERIFICATION OF CONFORMITY

Applicant	ATake Digital Technology (Shenzhen) Co., Ltd.
Address	15th Building, Changxing Industry Zone, Changzhen Village, Gong Ming, Guang Ming New District, Shenzhen, China
Manufacturer	ATake Digital Technology (Shenzhen) Co., Ltd.
Address	15th Building, Changxing Industry Zone, Changzhen Village, Gong Ming, Guang Ming New District, Shenzhen, China
Product Designation	DUAL TOWER SPEAKERS
Brand Name	N/A
Test Model	ASP-766
Date of test	Mar.29, 2016 to Mar.30, 2016
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested by




Max Zhang(Zhang Yi) Apr.01, 2016

Reviewed by



Rock Huang(Huang Dinglue) Apr.01, 2016

Approved by



Solger Zhang(Zhang Hongyi)
Authorized Officer Apr.01, 2016

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Maximum field strength	88.63dBuV/m(AV)@3m
Bluetooth Version	V3.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR
Antenna Gain	0dBi
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Hardware Version	V1.0
Software Version	N/A
Power Supply	DC5V by adapter
Note: The USB port is only used for transferring data from main speaker to assistant speaker.	

2.2. TABLE OF CARRIER FREQUENCY

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging


Note:

- All the test modes can be supply by adapter, only the result of the worst case was recorded in the report, if no other cases.
- For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure :

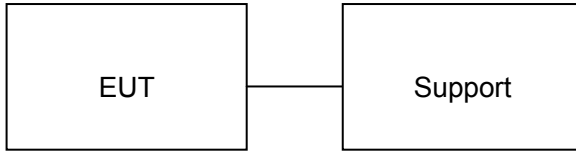

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	DUAL TOWER SPEAKERS	ASP-766	2ADZIASP-766	EUT
2	PC	SONY	E1412AYCW	A.E
3	Control box	N/A	N/A	A.E
4	Temporary Antenna Connector	T10	N/A	A.E.
5	Adapter	XH-UL0520-A1	Input: AC100-240V 50/60Hz Output: DC5V/2A	Marketed

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016

7. RADIATED EMISSION

7.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

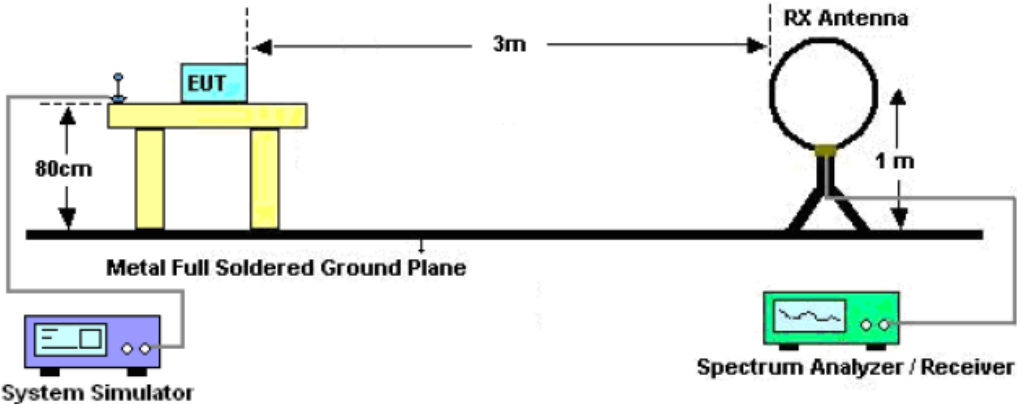

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

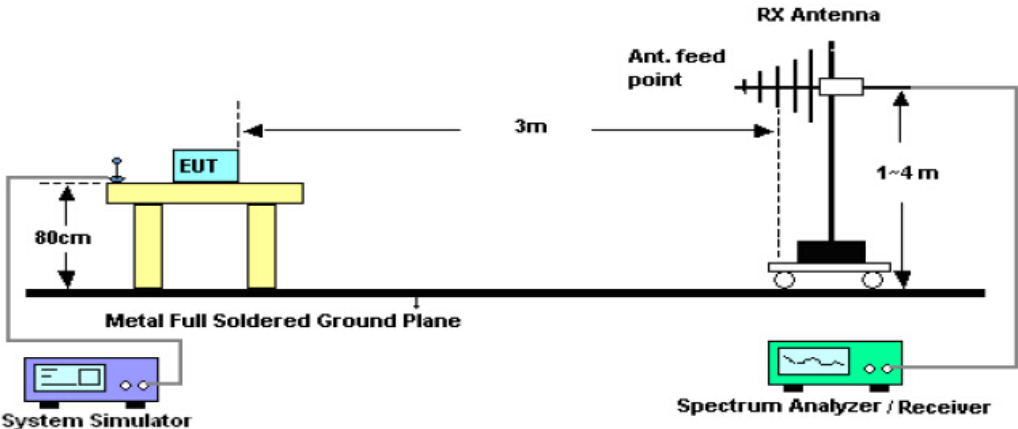

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

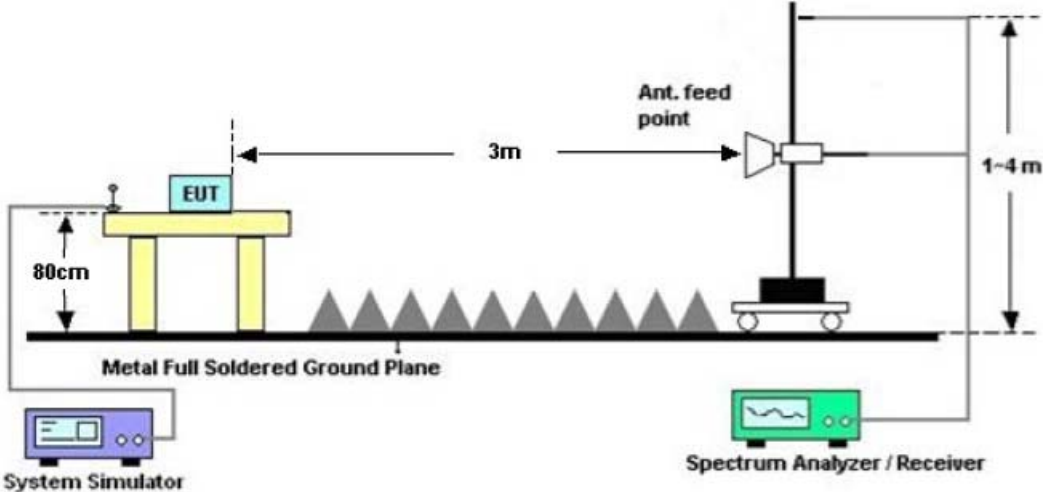


7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION 30MHz- 1GHZ


EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

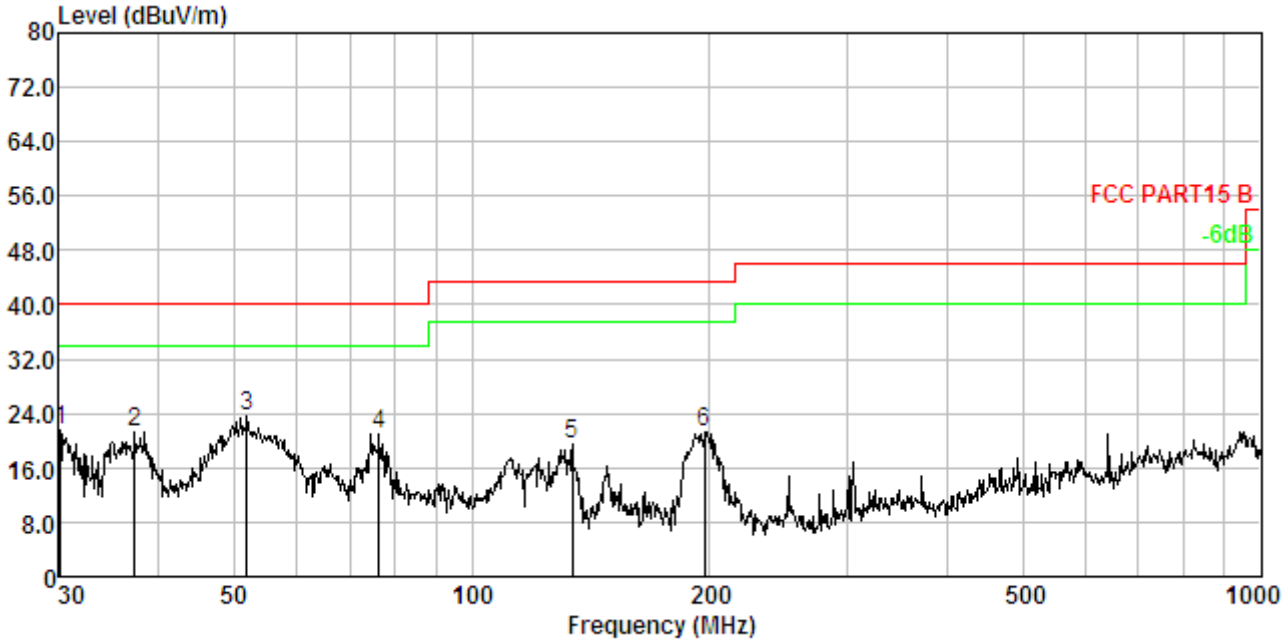

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	30.105	1.06	13.24	37.18	29.97	21.51	40.00	-18.49	Peak
2.	37.416	1.26	13.51	36.60	30.05	21.32	40.00	-18.68	Peak
3.	51.843	1.55	12.13	39.97	30.16	23.49	40.00	-16.51	Peak
4.	76.244	1.90	9.59	39.70	30.29	20.90	40.00	-19.10	Peak
5.	134.088	2.41	12.94	34.63	30.49	19.49	43.50	-24.01	Peak
6.	197.200	2.76	10.58	38.67	30.63	21.38	43.50	-22.12	Peak

RESULT: PASS

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

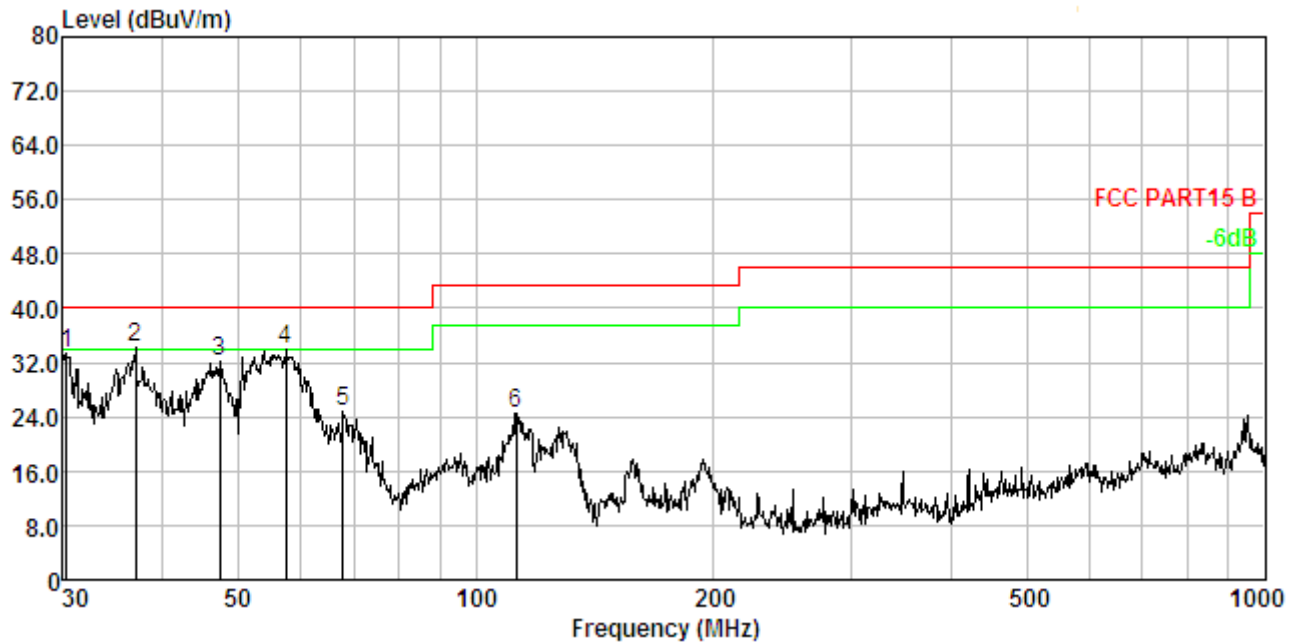

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	30.317	1.06	13.24	48.94	29.97	33.27	40.00	-6.73	Peak
2.	37.025	1.25	13.49	49.46	30.04	34.16	40.00	-5.84	Peak
3.	47.326	1.47	12.78	48.19	30.13	32.31	40.00	-7.69	Peak
4.	57.392	1.64	12.03	50.60	30.20	34.07	40.00	-5.93	Peak
5.	67.913	1.79	10.75	42.37	30.25	24.66	40.00	-15.34	Peak
6.	112.524	2.25	11.32	41.35	30.43	24.49	43.50	-19.01	Peak

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

RADIATED EMISSION ABOVE 1GHZ

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2402.013	98.89	-9.37	89.52	114	-24.48	peak
2402.013	96.54	-9.37	87.17	94	-6.83	AVG
4804.026	49.51	3.74	53.25	74	-20.75	peak
4804.026	44.57	3.74	48.31	54	-5.69	AVG
7206.039	43.51	8.14	51.65	74	-22.35	peak
7206.039	38.24	8.14	46.38	54	-7.62	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2402.013	96.71	-9.37	87.34	114	-26.66	peak
2402.013	94.16	-9.37	84.79	94	-9.21	AVG
4804.026	48.52	3.74	52.26	74	-21.74	peak
4804.026	43.74	3.74	47.48	54	-6.52	AVG
7206.039	43.54	8.14	51.68	74	-22.32	peak
7206.039	37.18	8.14	45.32	54	-8.68	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2441.016	98.41	-9.63	88.78	114	-25.22	peak
2441.016	96.03	-9.63	86.4	94	-7.6	AVG
4882.032	49.41	3.76	53.17	74	-20.83	peak
4882.032	44.79	3.76	48.55	54	-5.45	AVG
7323.048	43.42	8.17	51.59	74	-22.41	peak
7323.048	38.58	8.17	46.75	54	-7.25	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2441.016	96.05	-9.63	86.42	114	-27.58	peak
2441.016	93.84	-9.63	84.21	94	-9.79	AVG
4882.032	48.56	3.76	52.32	74	-21.68	peak
4882.032	43.21	3.76	46.97	54	-7.03	AVG
7323.048	42.08	8.17	50.25	74	-23.75	peak
7323.048	38.12	8.17	46.29	54	-7.71	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2480.021	101.78	-9.61	92.17	114	-21.83	peak
2480.021	98.24	-9.61	88.63	94	-5.37	AVG
4960.042	50.37	3.83	54.2	74	-19.8	peak
4960.042	45.13	3.83	48.96	54	-5.04	AVG
7440.063	42.89	8.21	51.1	74	-22.9	peak
7440.063	37.54	8.21	45.75	54	-8.25	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
2480.021	99.35	-9.61	89.74	114	-24.26	peak
2480.021	96.17	-9.61	86.56	94	-7.44	AVG
4960.042	49.85	3.83	53.68	74	-20.32	peak
4960.042	44.16	3.83	47.99	54	-6.01	AVG
7440.063	42.15	8.21	50.36	74	-23.64	peak
7440.063	37.33	8.21	45.54	54	-8.46	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.
Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
The “Factor” value can be calculated automatically by software of measurement system.
The GFSK modulation was the worst case and only the data of worst recorded in this report.


8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 7.2.

8.2 TEST SETUP

RADIATED EMISSION TEST SETUP

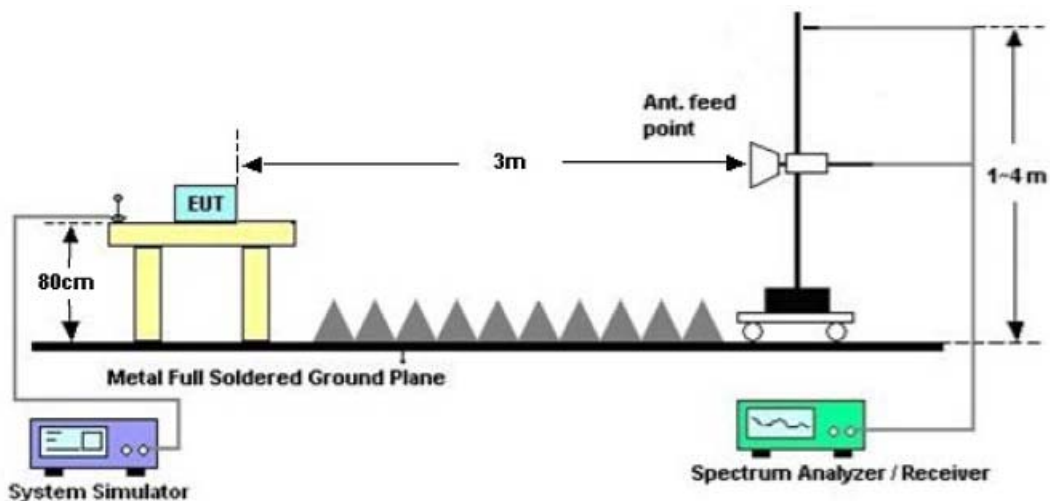

8.3 RADIATED TEST RESULT

Note:


1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.
3. The GFSK modulation was the worst case and only the data of worst recorded in this report.

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Horizontal

PK Value



AV Value

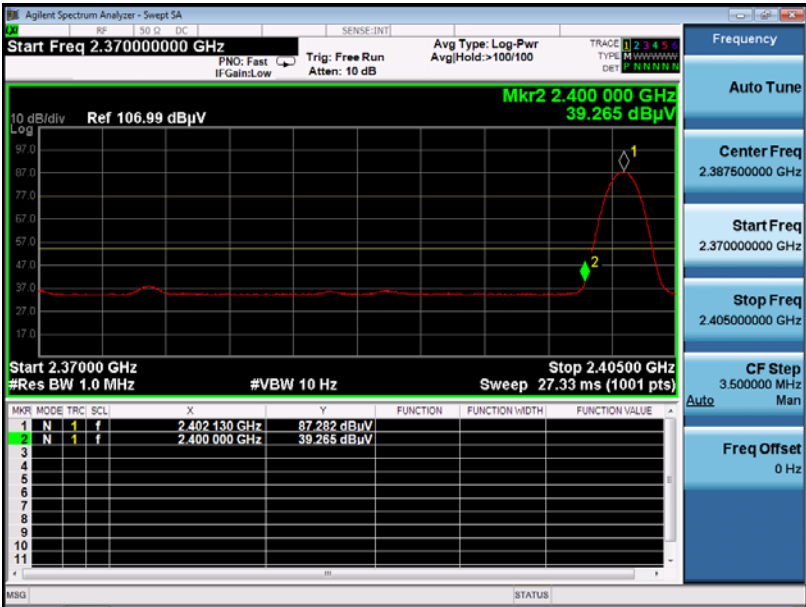


EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Vertical

PK Value



AV Value

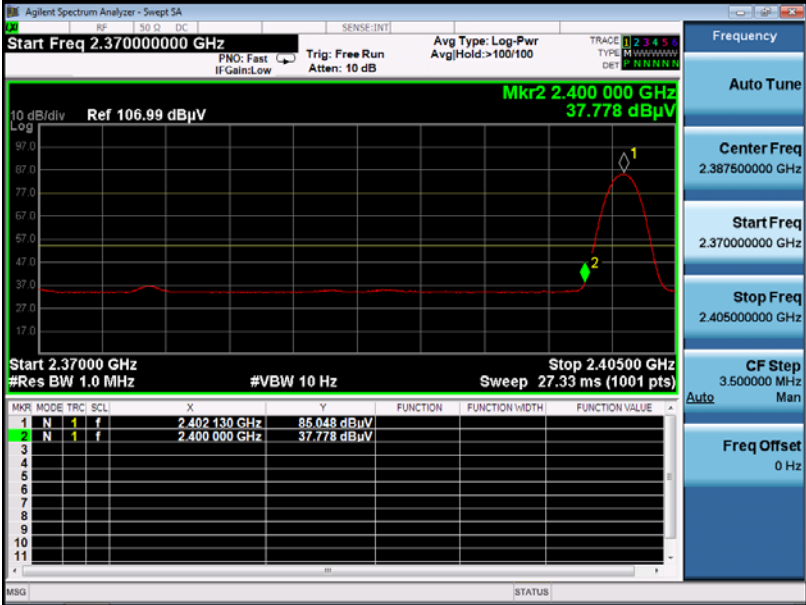


EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Horizontal

PK Value



AV Value

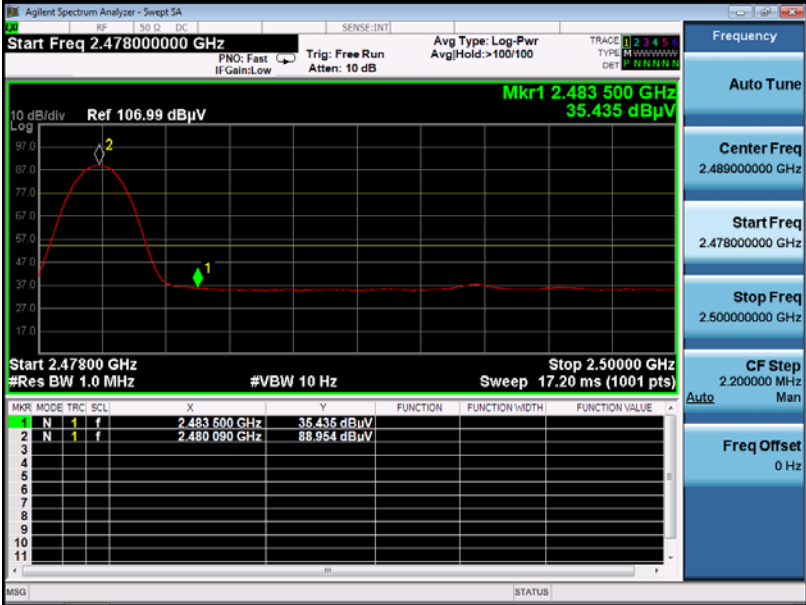

EUT :	DUAL TOWER SPEAKERS	Model Name. :	ASP-766
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Vertical

PK Value



AV Value




9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 1% of SPAN, VBW \geq 3 \times RBW.
4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

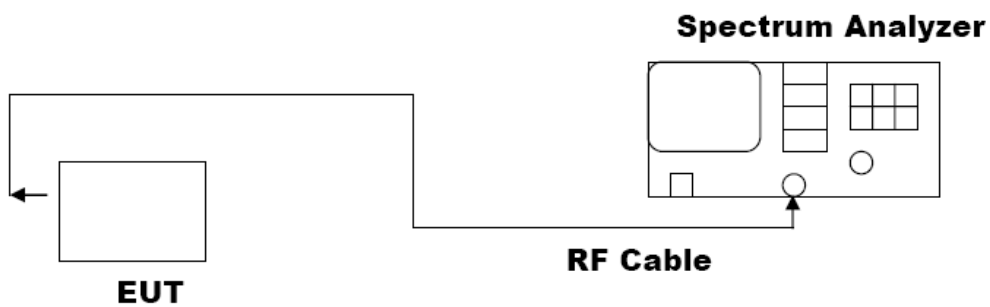


9.3. MEASUREMENT RESULTS


TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK for BR/EDR

Test Data (MHz)		Criteria
Low Channel	1.035	PASS
Middle Channel	1.036	PASS
High Channel	1.038	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

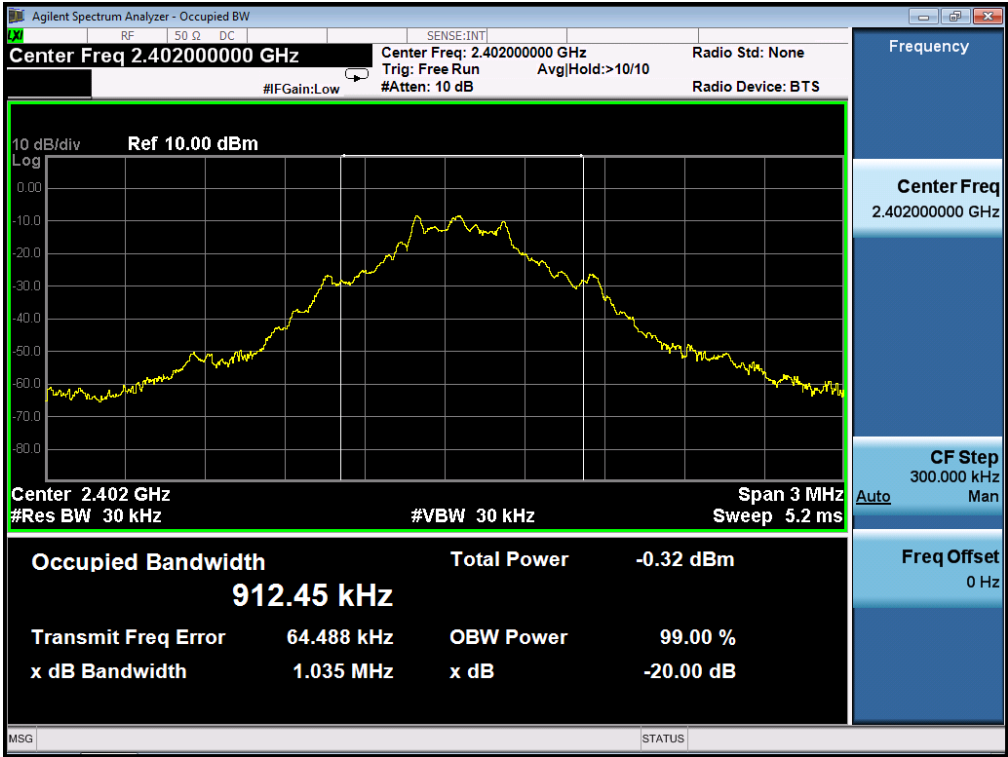

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

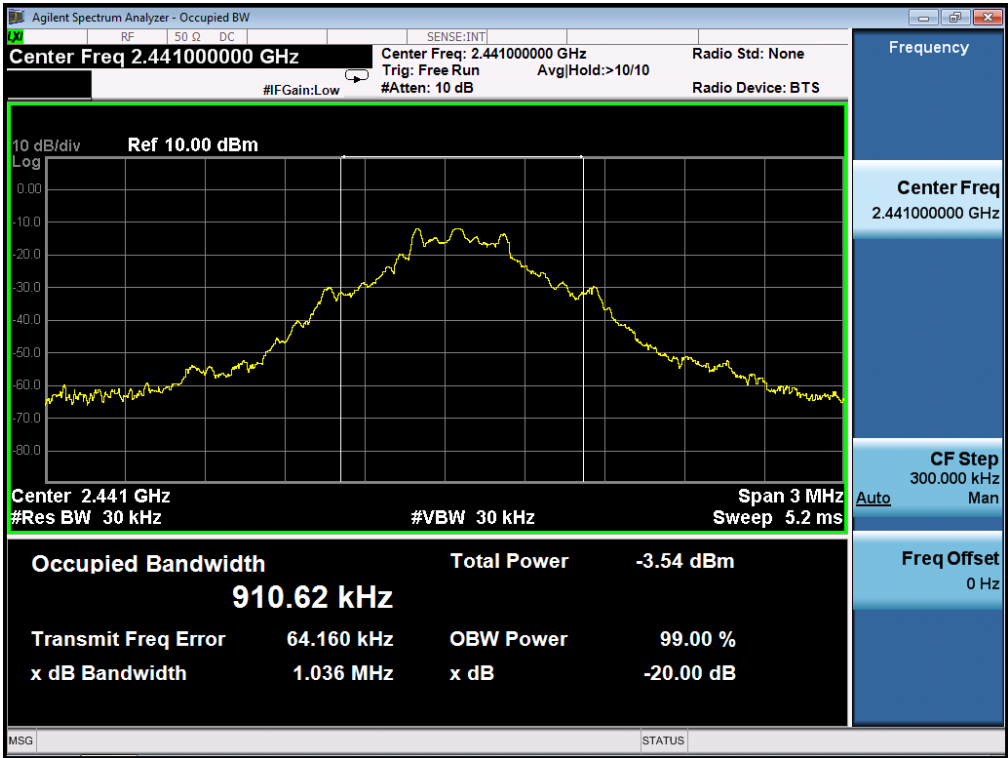


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

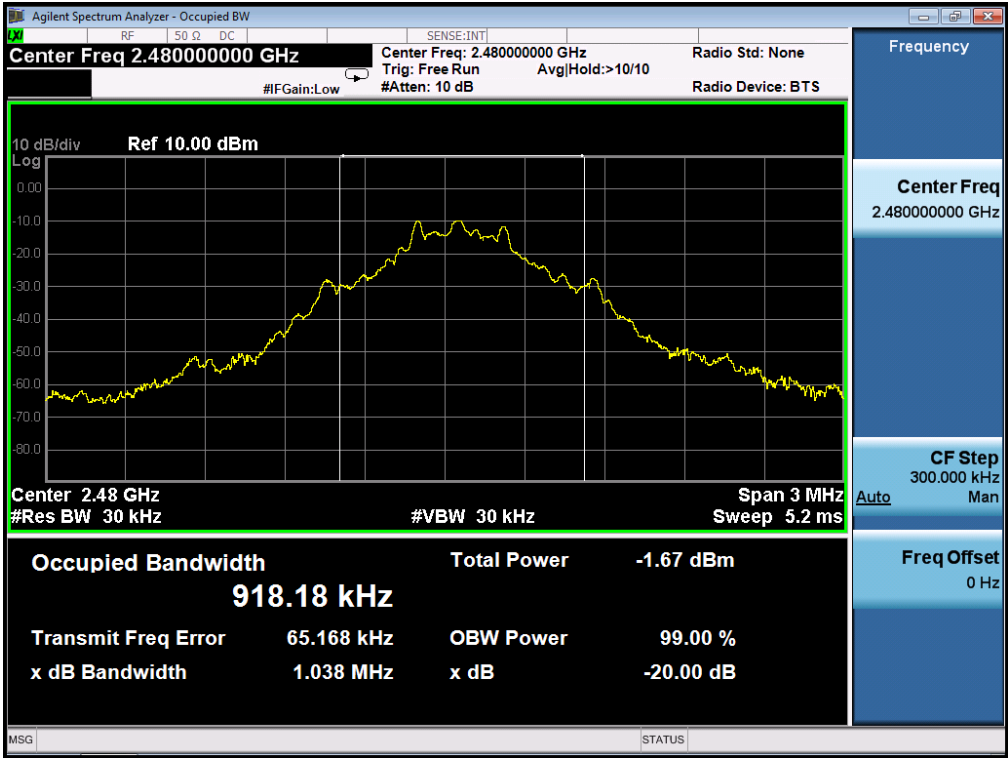


TEST ITEM	20DB BANDWIDTH
TEST MODULATION	π /4-DQPSK for BR/EDR

Test Data (MHz)		Criteria
Low Channel	1.237	PASS
Middle Channel	1.238	PASS
High Channel	1.236	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

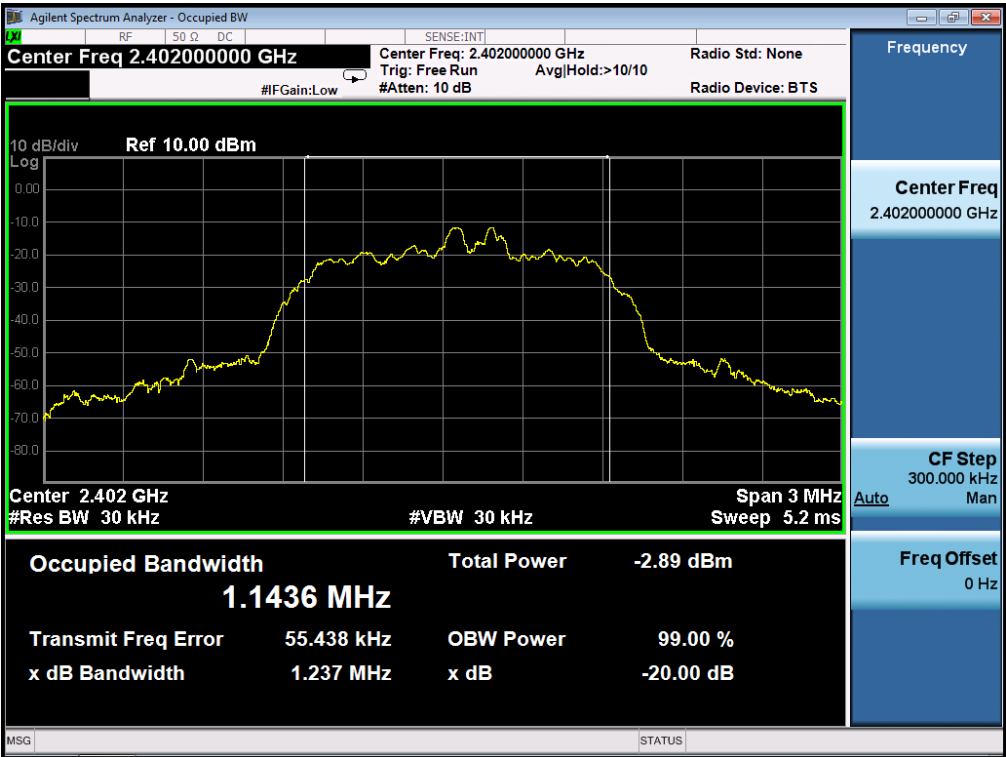

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

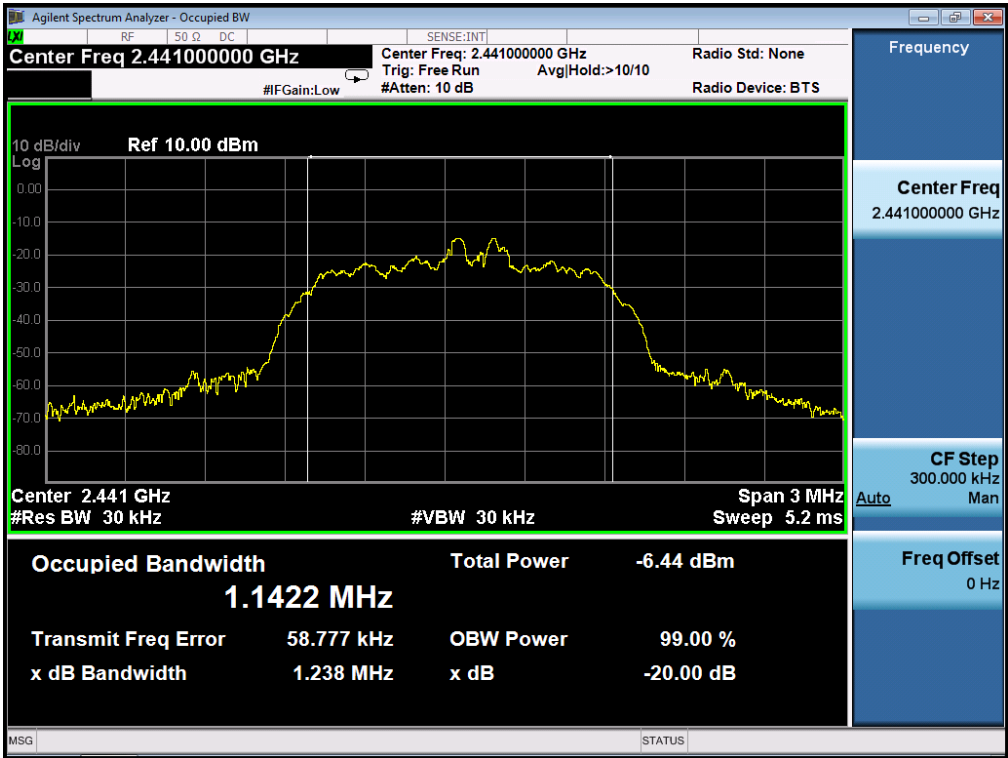


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

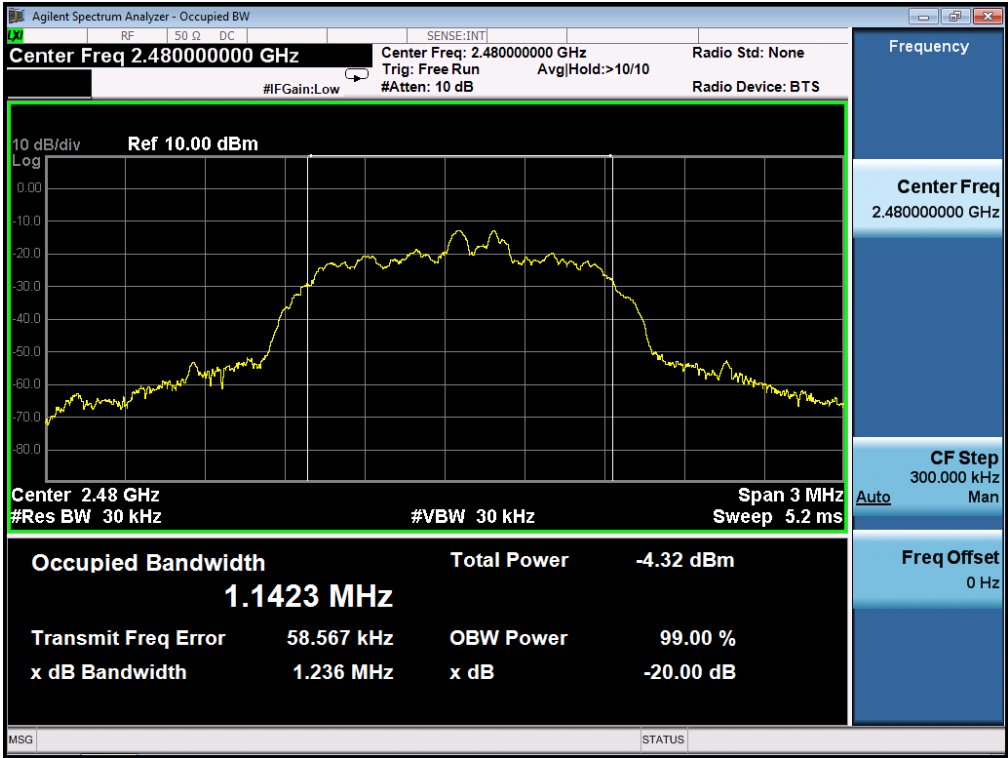


TEST ITEM	20DB BANDWIDTH
TEST MODULATION	8DPSK for BR/EDR

Test Data (MHz)		Criteria
Low Channel	1.243	PASS
Middle Channel	1.243	PASS
High Channel	1.243	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

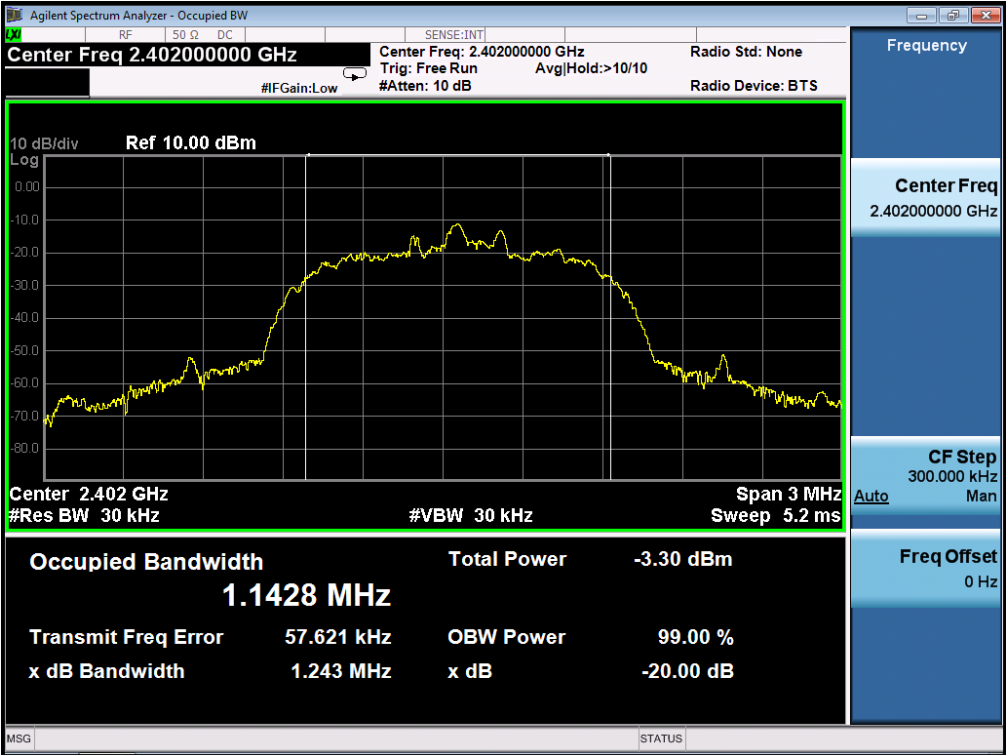

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

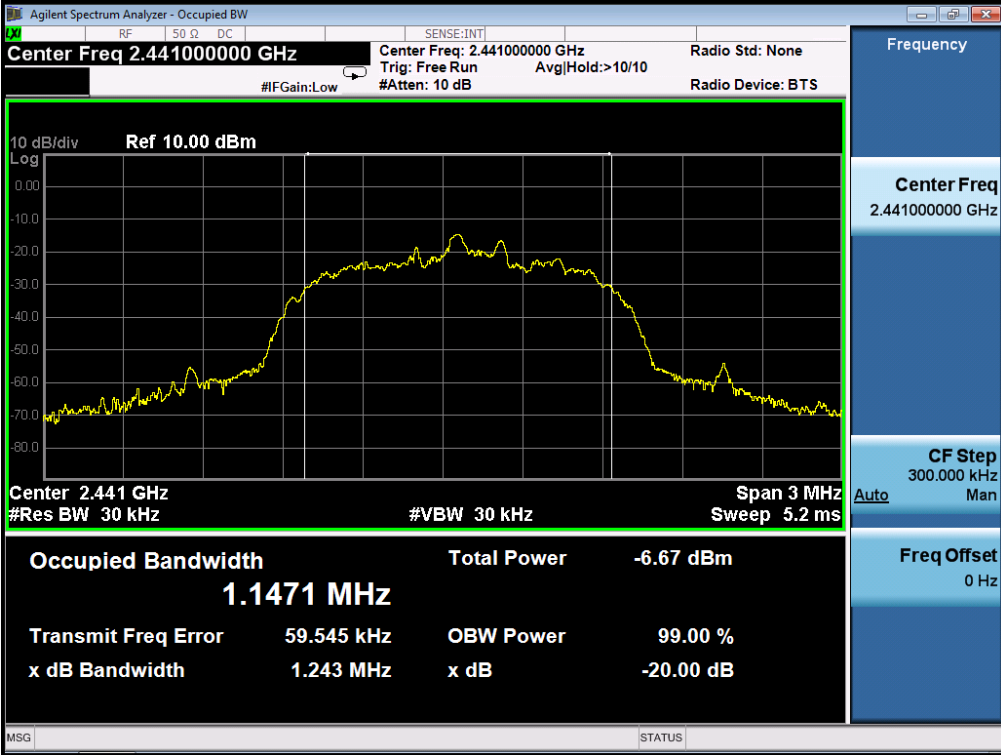

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

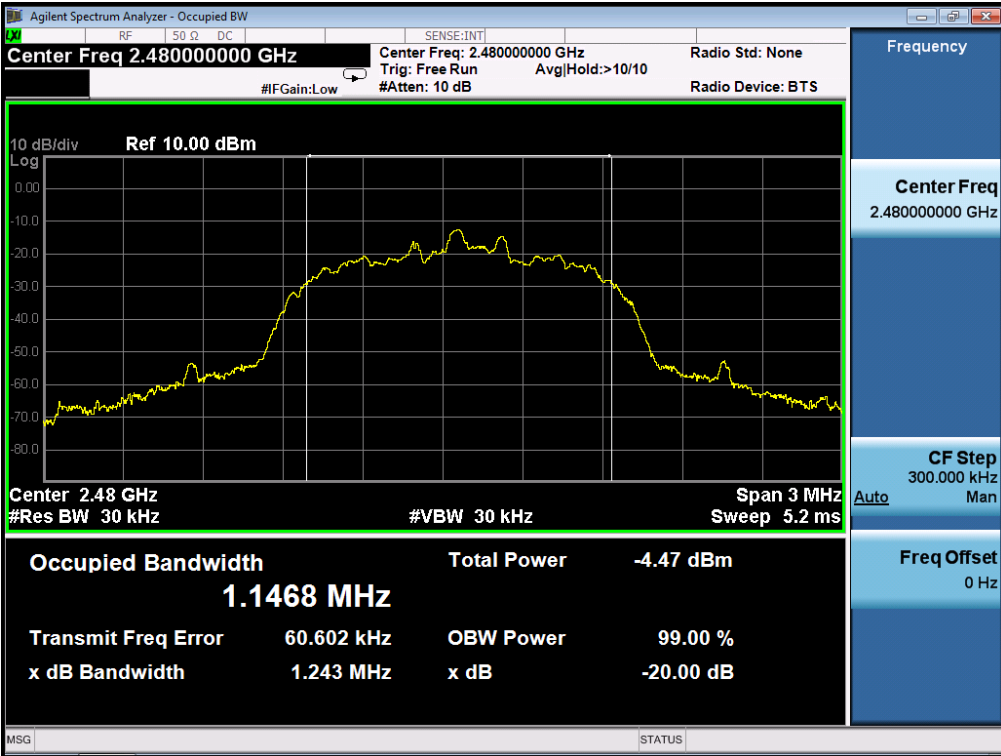

10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

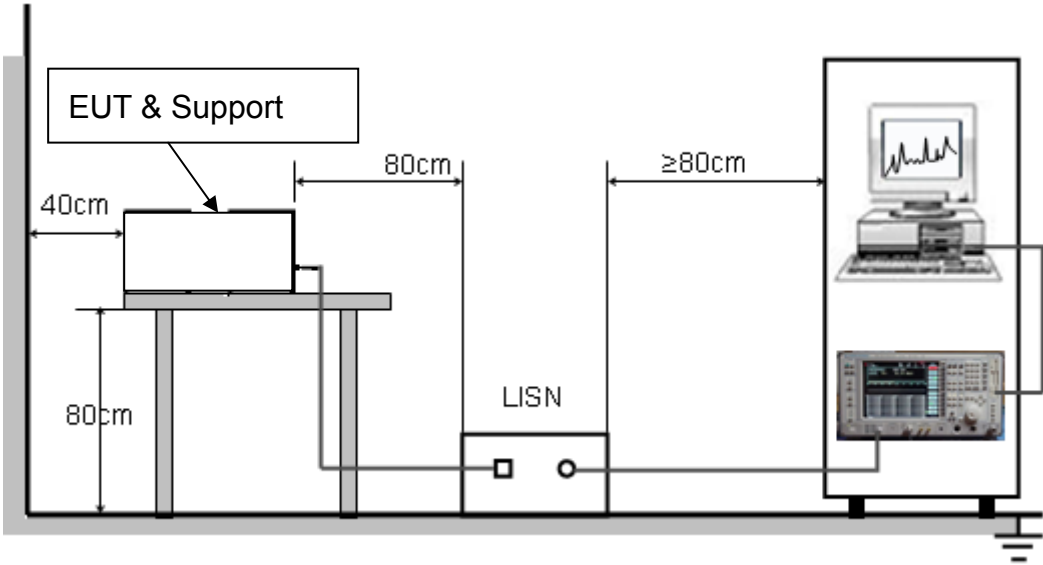

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By Adapter (worst case)


LINE CONDUCTED EMISSION TEST LINE 1-L

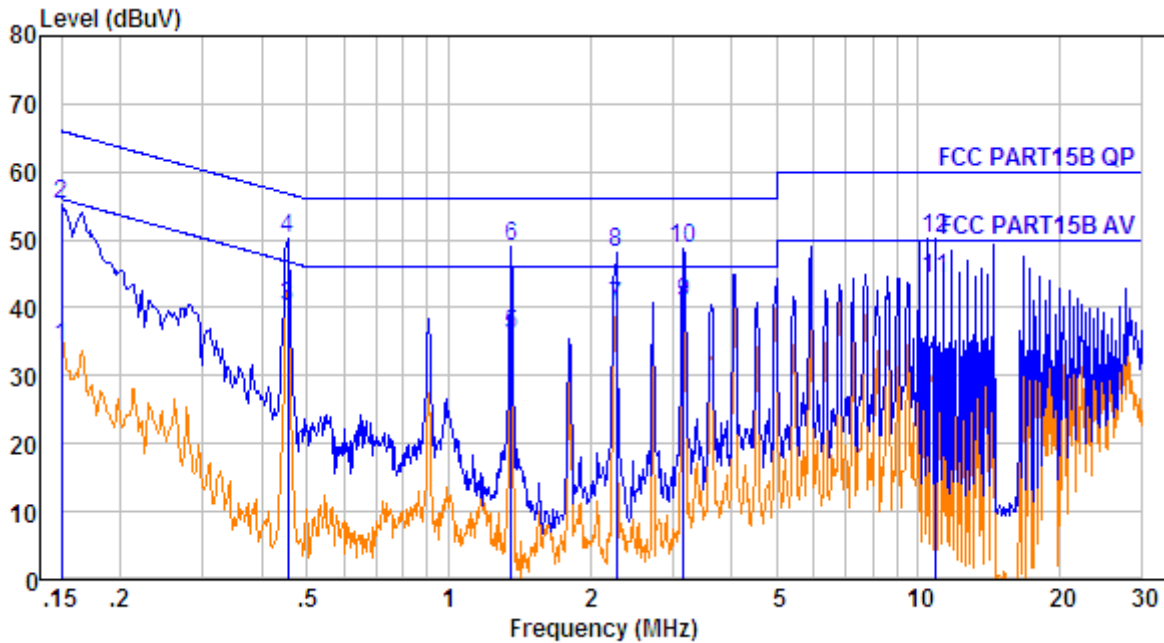

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.150	10.60	0.60	23.12	34.32	56.00	-21.68	Average
2.	0.150	10.60	0.60	44.12	55.32	66.00	-10.68	QP
3.	0.454	10.64	0.60	28.92	40.16	46.80	-6.64	Average
4.	0.454	10.64	0.60	38.92	50.16	56.80	-6.64	QP
5.	1.359	10.68	0.60	24.81	36.09	46.00	-9.91	Average
6.	1.359	10.68	0.60	37.81	49.09	56.00	-6.91	QP
7.	2.273	10.70	0.60	28.95	40.25	46.00	-5.75	Average
8.	2.273	10.70	0.60	36.95	48.25	56.00	-7.75	QP
9.	3.173	10.72	0.60	29.47	40.79	46.00	-5.21	Average
10.	3.173	10.72	0.60	37.47	48.79	56.00	-7.21	QP
11.	10.905	10.76	0.60	32.86	44.22	50.00	-5.78	Average
12.	10.905	10.76	0.60	38.86	50.22	60.00	-9.78	QP

RESULT: PASS



Line Conducted Emission Test Line 2-N

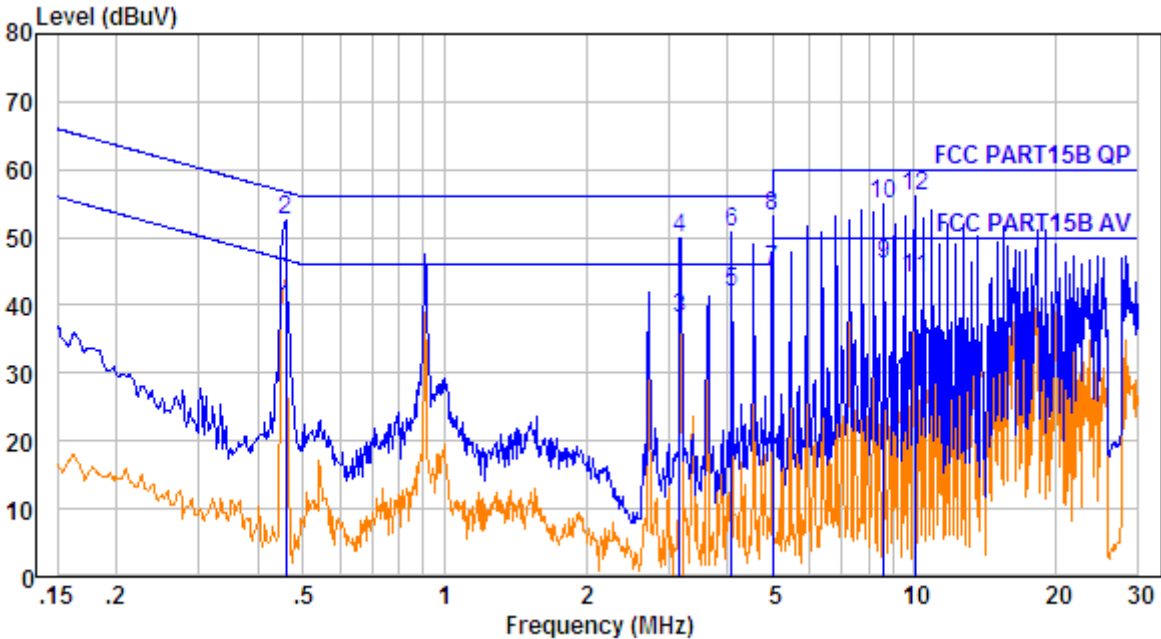

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.459	10.64	0.60	28.39	39.63	46.71	-7.08	Average
2.	0.459	10.64	0.60	41.39	52.63	56.71	-4.08	QP
3.	3.173	10.72	0.60	26.68	38.00	46.00	-8.00	Average
4.	3.173	10.72	0.60	38.68	50.00	56.00	-6.00	QP
5.	4.092	10.72	0.60	30.57	41.89	46.00	-4.11	Average
6.	4.092	10.72	0.60	39.57	50.89	56.00	-5.11	QP
7.	5.005	10.73	0.60	33.88	45.21	50.00	-4.79	Average
8.	5.005	10.73	0.60	41.88	53.21	60.00	-6.79	QP
9.	8.637	10.75	0.60	34.62	45.97	50.00	-4.03	Average
10.	8.637	10.75	0.60	43.62	54.97	60.00	-5.03	QP
11.	10.019	10.76	0.60	32.75	44.11	50.00	-5.89	Average
12.	10.019	10.76	0.60	44.75	56.11	60.00	-3.89	QP

RESULT: PASS

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC RADIATED EMISSION TEST SETUP

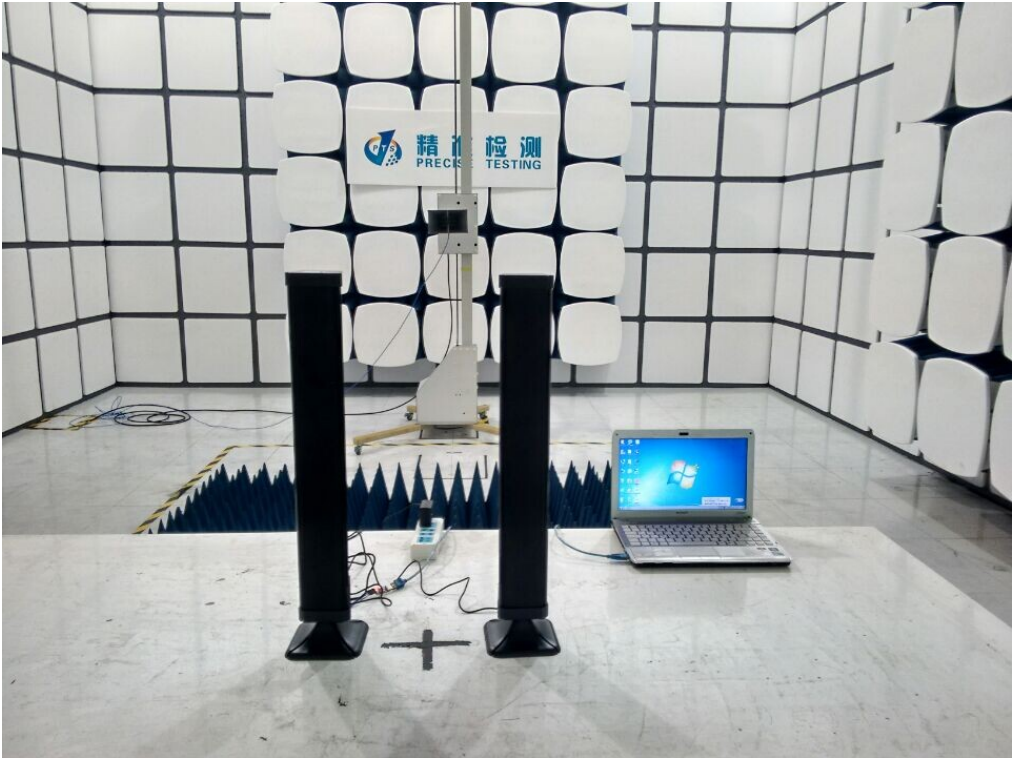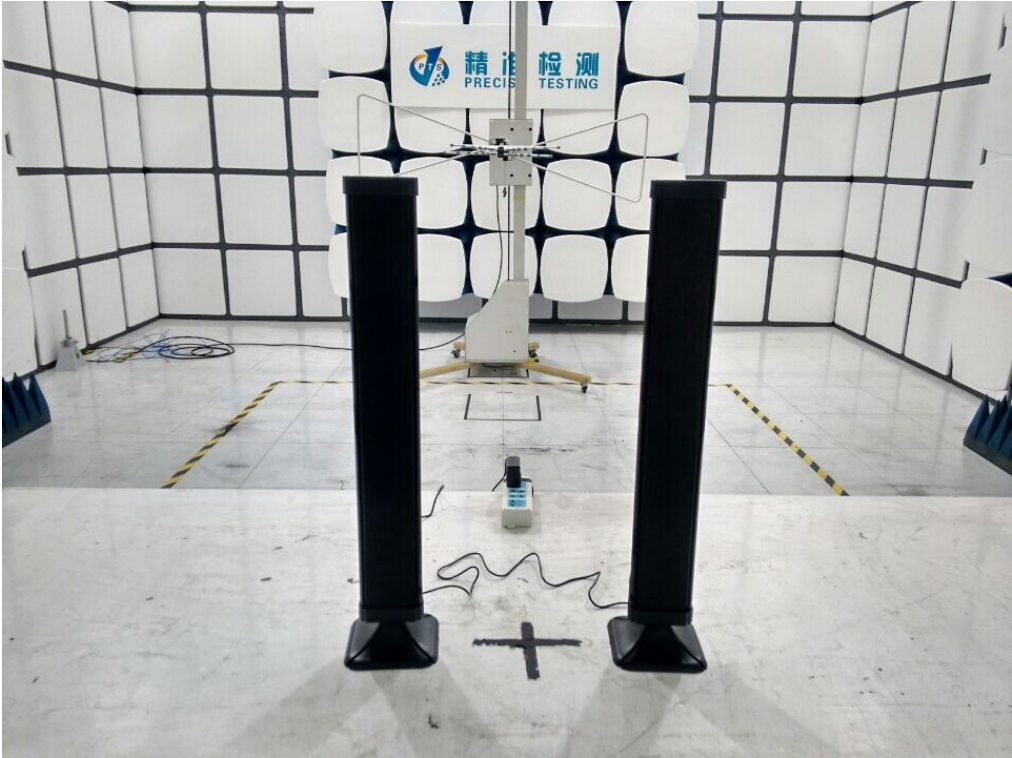


FCC LINE CONDUCTED EMISSION TEST SETUP



APPENDIX B: PHOTOGRAPHS OF EUT
ALL VIEW OF EUT



TOP VIEW OF EUT

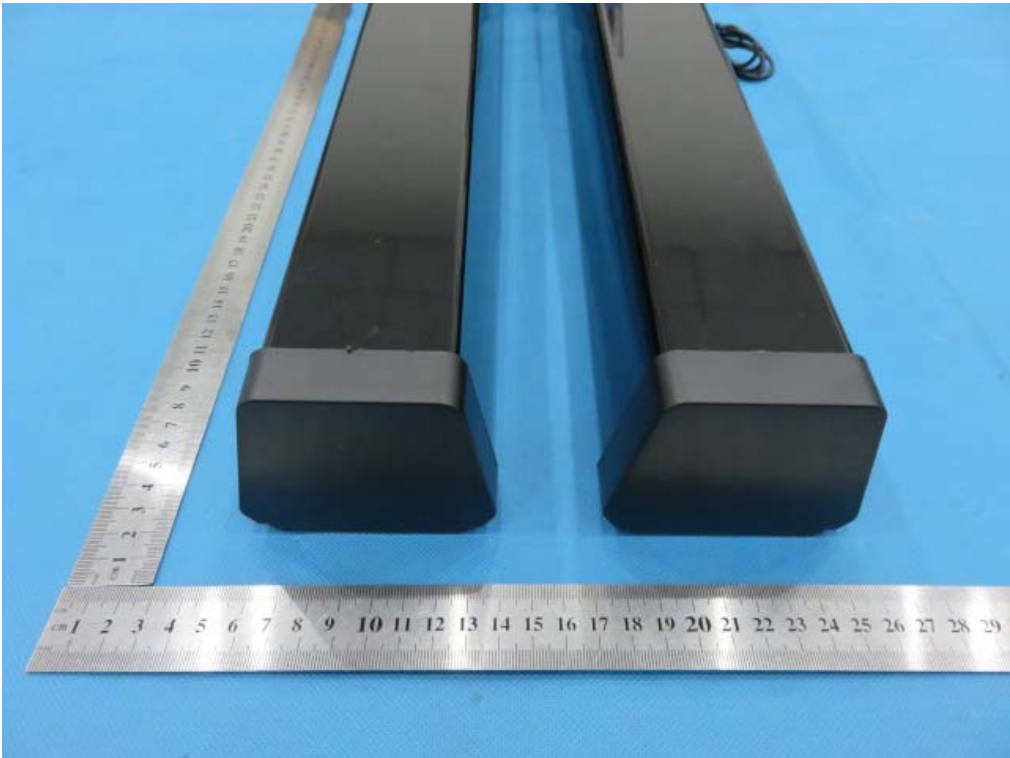

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT



INTERNAL VIEW OF EUT-1

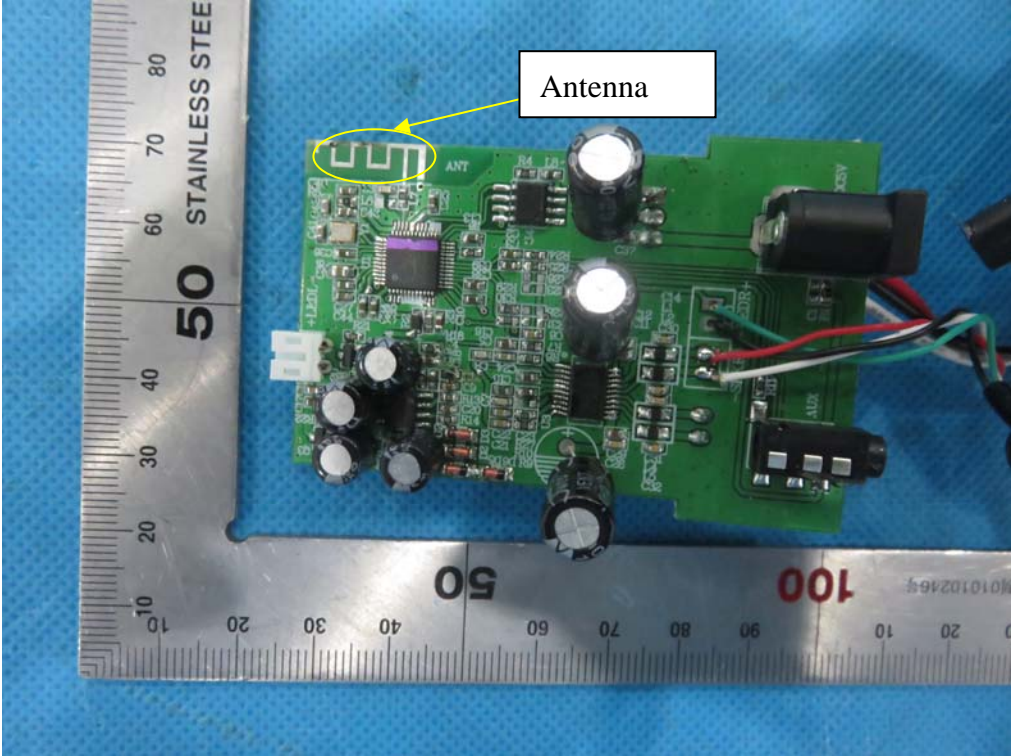

INTERNAL VIEW OF EUT-2

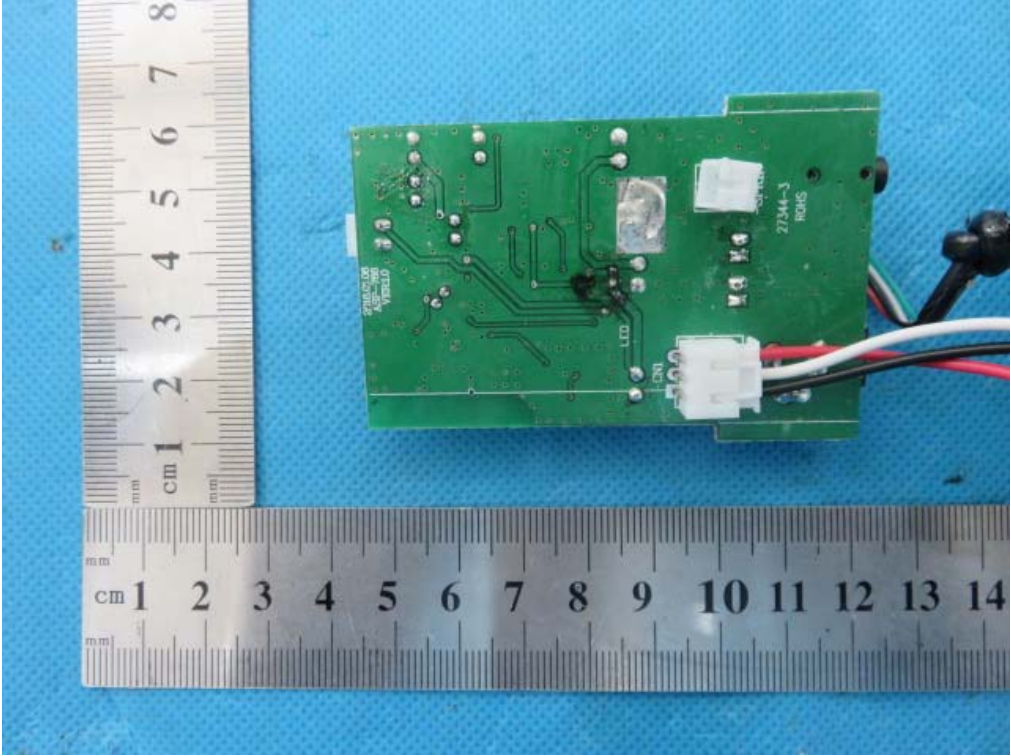

INTERNAL VIEW OF EUT-3---Main PCB Board



INTERNAL VIEW OF EUT-4---Main PCB Board



INTERNAL VIEW OF EUT-5----Assistant PCB Board



INTERNAL VIEW OF EUT-6----Assistant PCB Board



----END OF REPORT----