



FCC RF Test Report

APPLICANT : Nokia Shanghai Bell Co., Ltd.
EQUIPMENT : FastMile 4G Receiver
BRAND NAME : Nokia
MODEL NAME : 4G01-A
FCC ID : 2ADZR34003800FM20
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band Category A and B Devices (CBD)
EQUIPMENT TYPE : CBSD (Category B)

The product was received on Aug. 06, 2020 and completely tested on Oct. 23, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report 3

Summary of Test Result 4

1 General Description..... 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Maximum EIRP Power, Frequency Tolerance, and Emission Designator 6

 1.5 Testing Site..... 6

 1.6 Test Software..... 6

 1.7 Applied Standards..... 7

2 Test Configuration of Equipment Under Test..... 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Support Unit used in test configuration 9

 2.4 Measurement Results Explanation Example..... 9

 2.5 Frequency List of Low/Middle/High Channels 10

3 Conducted Test Items 11

 3.1 Measuring Instruments..... 11

 3.2 Conducted Output Power 12

 3.3 Peak-to-Average Ratio 13

 3.4 EIRP and PSD 14

 3.5 Occupied Bandwidth 16

 3.6 Conducted Band Edge 17

 3.7 Conducted Spurious Emission..... 18

 3.8 Frequency Stability..... 19

4 Radiated Test Items..... 20

 4.1 Measuring Instruments..... 20

 4.2 Test Setup 20

 4.3 Test Result of Radiated Test 20

 4.4 Radiated Spurious Emission..... 21

5 List of Measuring Equipment..... 22

6 Uncertainty of Evaluation..... 23

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of EIRP and Radiated Test

Appendix C. Test Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Pass	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Pass	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 12.44 dB at 14424.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Nokia Shanghai Bell Co., Ltd.

388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

1.2 Manufacturer

Nokia Shanghai Bell Co., Ltd.

388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	FastMile 4G Receiver
Brand Name	Nokia
Model Name	4G01-A
FCC ID	2ADZR34003800FM20
Tx Frequency	LTE Band 48: 3552.5 MHz ~ 3697.5 MHz
Rx Frequency	LTE Band 48: 3552.5 MHz ~ 3697.5 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	23.28 dBm
Type of Modulation	QPSK / 16QAM / 64QAM
HW Version	3FE75113AA
SW Version	FASTMILE2_D020105B60T0101M01E0080.tar
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for 4G01-A. The difference between current and previous is to add LTE Band 48CA. Based on the similarity between current and previous project, only the additional LTE Band 48CA from original report (Sporton Report Number FG9N1515A) were verified for the differences.



1.4 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 48 CA	QPSK			16QAM		
BW (MHz) Frequency (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
20MHz+20MHz (3560 ~ 3690 MHz)	37M9G7D	-	6.2661	37M8W7D	-	6.7298
LTE Band 48 CA	64QAM					
BW (MHz) Frequency (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)		Maximum EIRP(W)		
20MHz+20MHz (3560 ~ 3690 MHz)	37M6W7D	-		2.9376		

Note: The maximum EIRP for CA band is calculated from max output power of 20M+20M and antenna gain, only the maximum EIRP is shown on the report.

1.5 Testing Site

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)							Modulation			RB #			Test Channel			
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H	
Max. Output Power	48C	v	v	v	v	v	v	v	v	v	v	v			v	v	v	
26dB and 99% Bandwidth	48C	v	v	v	v	v	v	v	v	v	v				v	v	v	
Conducted Band Edge	48C	v	v	v	v	v	v	v	v	v	v	v			v	v	v	
Conducted Spurious Emission	48C	v	v	v	v	v	v	v	v	v	v	v				v	v	
E.R.P / I.R.P	48C	v	v	v	v	v	v	v	v	v	v	v				v	v	
Radiated Spurious Emission	48C	Worst Case																v
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with Adapter. Frequency stability only shows the worst case of LTE band 48/48C. LTE band48C only show the maximum power and maximum bandwidth combination in the report. 																	

2.2 Connection Diagram of Test System

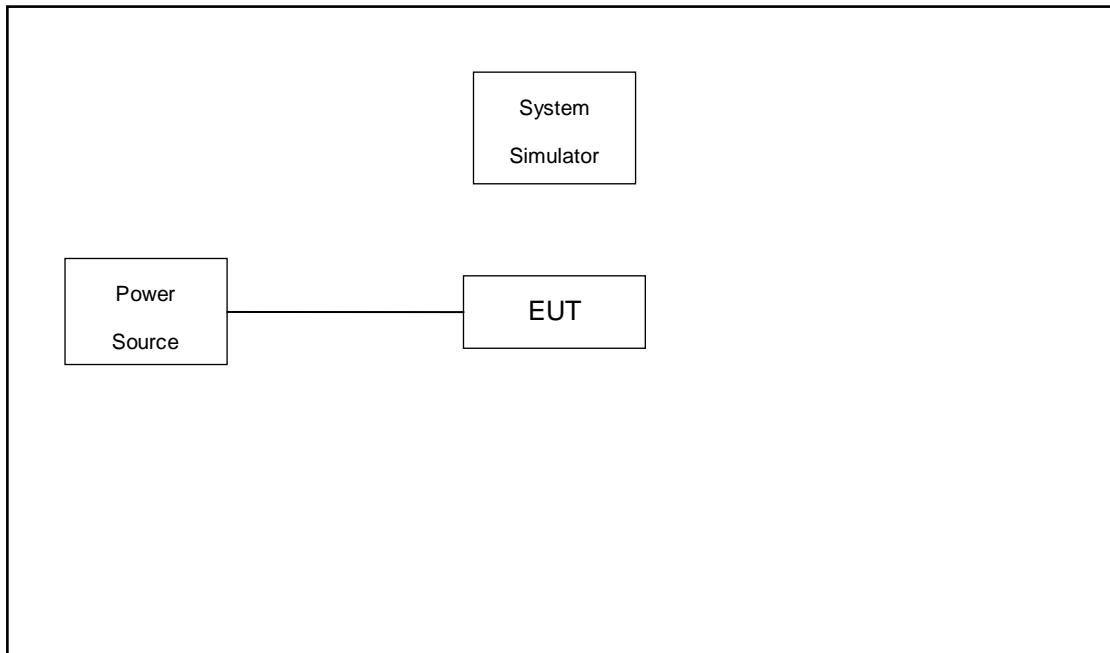

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.92 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 2.92 + 10 = 12.92 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

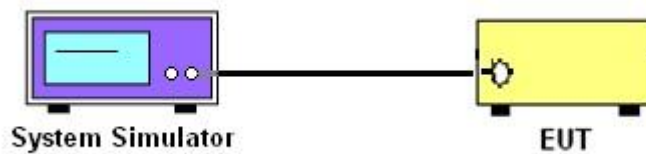

3.1.3 EIRP, Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

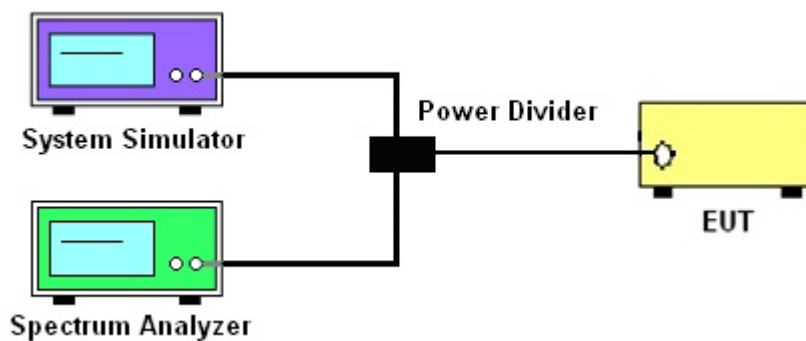

3.1.4 Frequency Stability

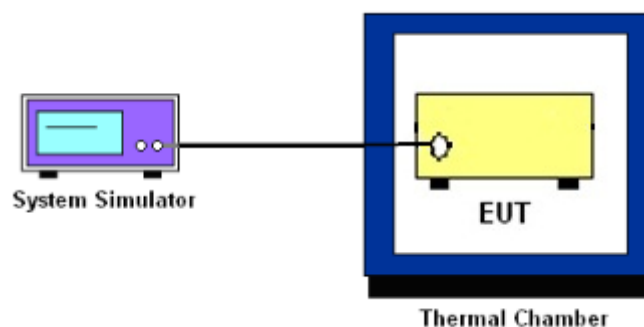

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP and PSD

3.4.1 Description of the EIRP Measurement

EIRP and PSD limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
<input type="checkbox"/>	End User Device	23	n/a
<input type="checkbox"/>	Category A CBSD	30	20
V	Category B CBSD	47	37

Remark: Maximum PSD values are radiated. Measurements can be done conducted and add antenna gain back in.

3.4.2 Test Procedures for EIRP

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.4.3 Test Procedures for EIRP PSD

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 2 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).
10. Determine the EIRP by adding the effective antenna gain to the adjusted power level.
11. Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated emissions from 30MHz to 1GHz

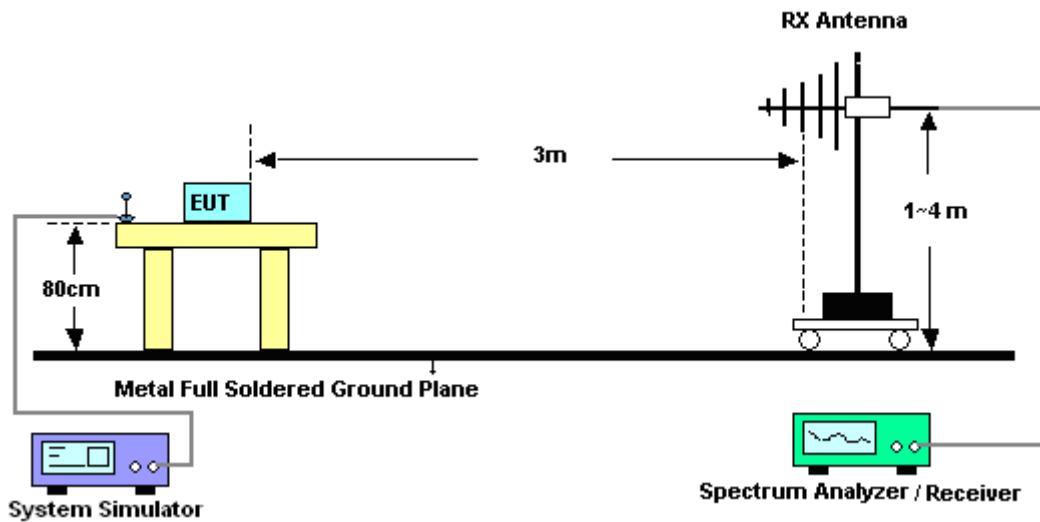

For radiated emissions above 1GHz

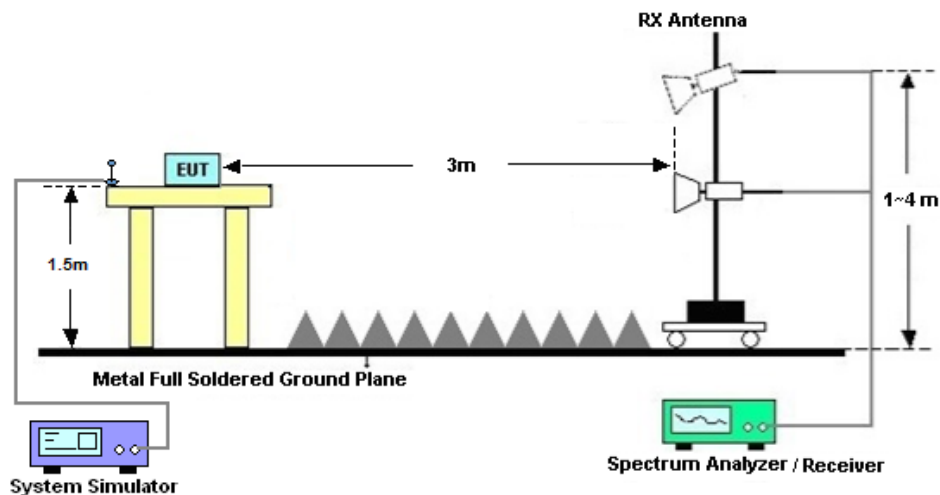

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Oct. 19, 2020~ Oct. 23, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-9605 02	-40~+150°C	Oct. 28, 2019	Oct. 19, 2020~ Oct. 23, 2020	Oct. 27, 2020	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz-44G,MAX 30dB	Apr. 15, 2020	Aug. 28, 2020	Apr. 14, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jan. 03, 2020	Aug. 28, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 20, 2020	Aug. 28, 2020	Apr. 19, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Aug. 28, 2020	Nov. 09, 2020	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 03, 2020	Aug. 28, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 08, 2020	Aug. 28, 2020	Jan. 07, 2021	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jan. 03, 2020	Aug. 28, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY572801 06	500MHz~26.5G Hz	Oct. 14, 2020	Aug. 28, 2020	Oct. 13, 2021	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 28, 2020	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 28, 2020	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 28, 2020	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

CA_48C							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
55340	55538	QPSK	100	0	100	0	12.32
			1	0	1	99	5.82
			2	0	2	98	5.69
			1	99	1	0	14.35
		16QAM	100	0	100	0	12.42
			1	0	1	99	6.22
			2	0	2	98	5.93
			1	99	1	0	14.67
		64QAM	100	0	100	0	9.55
			1	0	1	99	1.01
			2	0	2	98	0.95
			1	99	1	0	11.52
55891	56089	QPSK	100	0	100	0	19.48
			1	0	1	99	12.89
			2	0	2	98	12.77
			1	99	1	0	22.97
		16QAM	100	0	100	0	19.53
			1	0	1	99	13.26
			2	0	2	98	12.98
			1	99	1	0	23.28
		64QAM	100	0	100	0	16.57
			1	0	1	99	5.15
			2	0	2	98	4.93
			1	99	1	0	19.68
56442	56640	QPSK	100	0	100	0	13.77
			1	0	1	99	6.92
			2	0	2	98	6.77



		16QAM	1	99	1	0	15.93
			100	0	100	0	13.74
			1	0	1	99	7.15
			2	0	2	98	6.85
			1	99	1	0	16.22
		64QAM	100	0	100	0	10.95
			1	0	1	99	1.77
			2	0	2	98	1.62
			1	99	1	0	15.33



CA EIRP

LTE Band 48 CA (GT - LC = 15.00 dB) QPSK			
Bandwidth	20M+20M		
Channel PCC	55340	55891	56442
	(Low)	(Mid)	(High)
Channel SCC	55538	56089	56640
	(Low)	(Mid)	(High)
Conducted Power (dBm)	14.35	22.97	15.93
Conducted Power (Watts)	0.0272	0.1982	0.0392
EIRP(dBm)	29.35	37.97	30.93
EIRP(Watts)	0.8610	6.2661	1.2388

LTE Band 48 CA (GT - LC = 15.00 dB) 16QAM			
Bandwidth	20M+20M		
Channel PCC	55340	55891	56442
	(Low)	(Mid)	(High)
Channel SCC	55538	56089	56640
	(Low)	(Mid)	(High)
Conducted Power (dBm)	14.67	23.28	16.22
Conducted Power (Watts)	0.0293	0.2128	0.0419
EIRP(dBm)	29.67	38.28	31.22
EIRP(Watts)	0.9268	6.7298	1.3243



LTE Band 48 CA (GT - LC = 15.00 dB) 64QAM			
Bandwidth	20M+20M		
Channel PCC	55340	55891	56442
	(Low)	(Mid)	(High)
Channel SCC	55538	56089	56640
	(Low)	(Mid)	(High)
Conducted Power (dBm)	11.52	19.68	15.33
Conducted Power (Watts)	0.0142	0.0929	0.0341
EIRP(dBm)	26.52	34.68	30.33
EIRP(Watts)	0.4487	2.9376	1.0789



LTE Band 48C

EIRP Power Density

Full RB0

Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	17.9	17.91	15.23	15.39	13.7	13.55	16.39	16.55	15.74	15.16	13.67	13.63
Middle CH	21.03	21.21	23.35	23.29	16.19	16.66	24.89	25.28	21.63	22.18	16.06	16.24
Highest CH	18.59	19.19	17.28	17.05	15.58	14.98	17.85	17.86	15.96	16.25	14.84	14.66
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	14.77		12.57		11.9		13.6		12.02		10.36	
Middle CH	21.6		22.83		17.01		21.96		18.81		16.21	
Highest CH	16.35		14.57		12.51		14.82		14.32		12.13	
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	20M+20M			-								
Mod.	QPSK	16QAM	64QAM									
Lowest CH	13.01	12.94	10.19									
Middle CH	15.88	15.78	15.81									
Highest CH	14.35	14.32	11.83									
Limit	37dBm /1MHz											
Result	Pass											



1RB0 1RBmax

Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	17.12	17.28	16.84	17.12	16.64	17.39	16.66	17.55	16.98	16.52	16.71	18.21
Middle CH	24.15	24.16	23.88	24.12	24.17	23.60	24.32	24.83	23.75	23.37	23.77	23.44
Highest CH	18.24	19.33	18.49	18.56	18.31	19.03	17.37	18.7	17.12	17.86	18.52	19.28
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	13.04		13.04		13.3		14.29		12.66		11.67	
Middle CH	16.87		16.87		16.22		16.86		16.44		16.53	
Highest CH	12.95		12.95		13.88		13.05		13.29		13.42	
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	20M+20M			-								
Mod.	QPSK	16QAM	64QAM									
Lowest CH	17.39	17.5	13.01									
Middle CH	24.04	24.43	16.44									
Highest CH	18.44	17.87	12.62									
Limit	37dBm /1MHz											
Result	Pass											



1RBmax 1RB0

Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	27.58	28.36	25.69	26.30	25.88	25.53	26.73	27.96	25.60	26.12	26.04	25.32
Middle CH	28.93	28.31	26.81	27.25	26.34	26.90	27.35	27.62	26.38	26.60	25.79	26.49
Highest CH	29.62	29.31	28.30	28.32	27.61	27.36	28.82	28.00	27.52	27.90	27.81	26.79
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	5MHz+20MHz		10MHz+20MHz		15MHz+20MHz		20M+5M		20M+10M		20M+15M	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	27.88		26.11		23.24		27.14		25.65		22.57	
Middle CH	29.14		28.06		26.84		28.13		27.60		27.23	
Highest CH	29.26		26.99		25.38		29.31		27.86		24.38	
Limit	37dBm /1MHz											
Result	Pass											
Mode	LTE Band 48 : Conducted Power Density (dBm/10MHz)											
BW	20M+20M			-								
Mod.	QPSK	16QAM	64QAM									
Lowest CH	25.93	26.42	25.60									
Middle CH	26.73	26.99	27.42									
Highest CH	27.47	26.94	27.52									
Limit	37dBm /1MHz											
Result	Pass											

Note: The results have included the Antenna Gain (15dBi)



26dB Bandwidth

Mode	LTE Band 48C : 26dB BW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	24.78	30.09	34.83	24.93
Middle CH	24.88	29.97	34.76	24.93
Highest CH	24.93	30.09	35.04	24.93
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	30.03	35.04	39.88	-
Middle CH	29.91	34.97	39.64	-
Highest CH	29.85	34.97	39.96	-

Mode	LTE Band 48C : 26dB BW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	24.83	29.91	34.90	24.83
Middle CH	24.88	30.03	34.83	24.73
Highest CH	24.78	29.91	34.90	24.73
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	30.03	34.97	39.88	-
Middle CH	30.03	34.83	39.72	-
Highest CH	29.91	34.83	39.80	-


Mode	LTE Band 48C : 26dB BW(MHz)			
64QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	24.83	30.09	34.97	24.78
Middle CH	24.78	29.91	34.90	24.93
Highest CH	24.68	29.91	35.04	24.88
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	30.09	35.11	39.80	-
Middle CH	30.03	34.90	39.64	-
Highest CH	29.91	34.83	39.80	-



LTE Band 48C


QPSK

Lowest Channel / 5MHz+20MHz

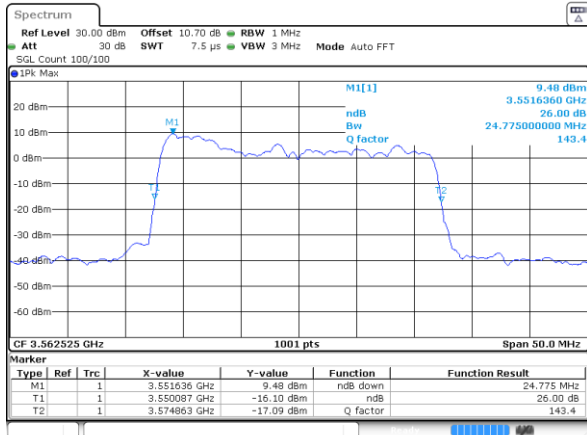


Date: 21.OCT.2020 15:43:08

Lowest Channel / 10MHz+20MHz

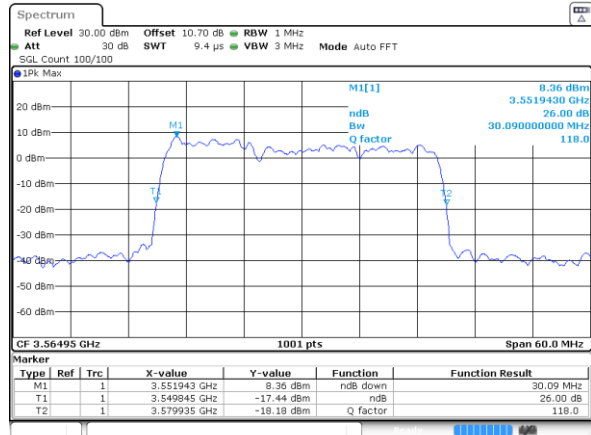


Date: 21.OCT.2020 16:02:32

Middle Channel / 5MHz+20MHz

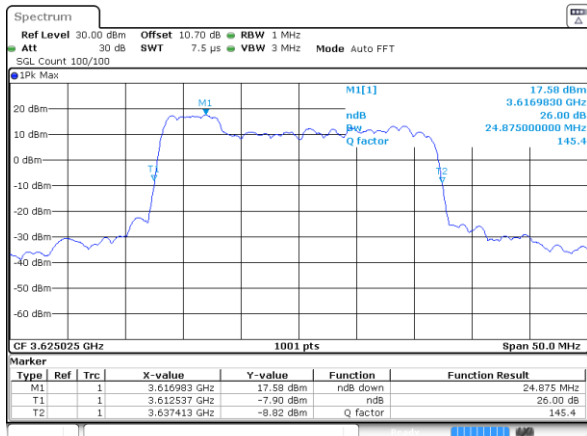


Date: 21.OCT.2020 15:46:27

Middle Channel / 10MHz+20MHz

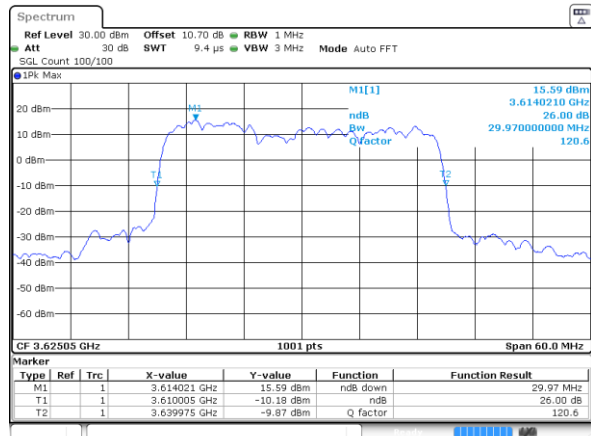


Date: 21.OCT.2020 16:03:28

Highest Channel / 5MHz+20MHz

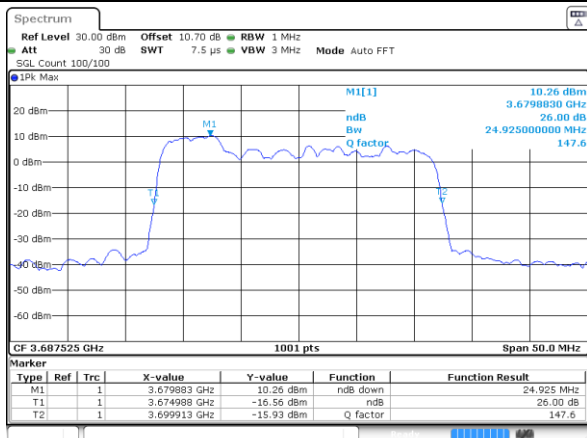

Date: 21.OCT.2020 15:50:51

Highest Channel / 10MHz+20MHz

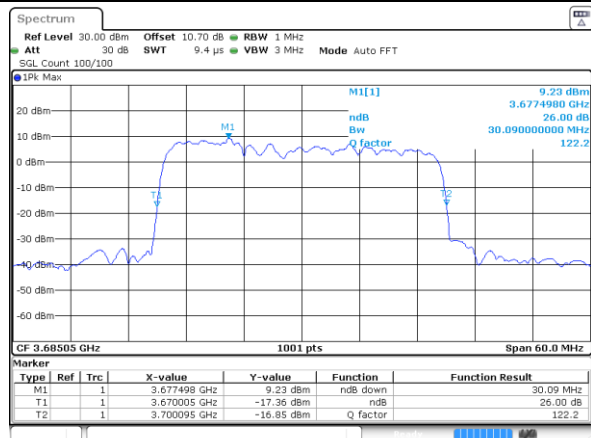


Date: 21.OCT.2020 16:06:19



LTE Band 48C


QPSK

Lowest Channel / 15MHz+20MHz

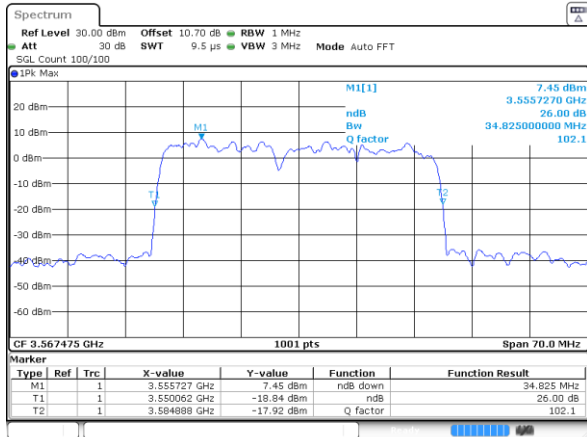


Date: 21.OCT.2020 16:08:27

Lowest Channel / 20MHz+5MHz

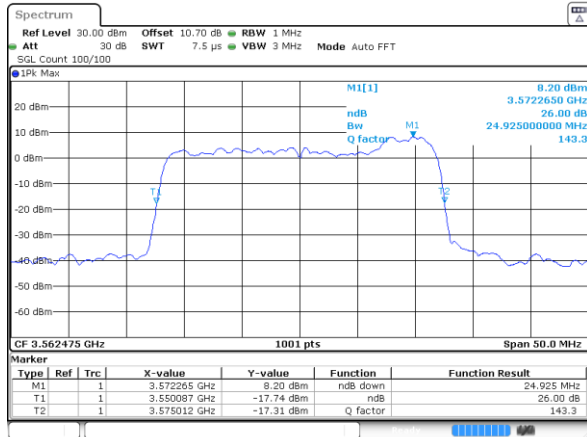


Date: 21.OCT.2020 15:52:55

Middle Channel / 15MHz+20MHz

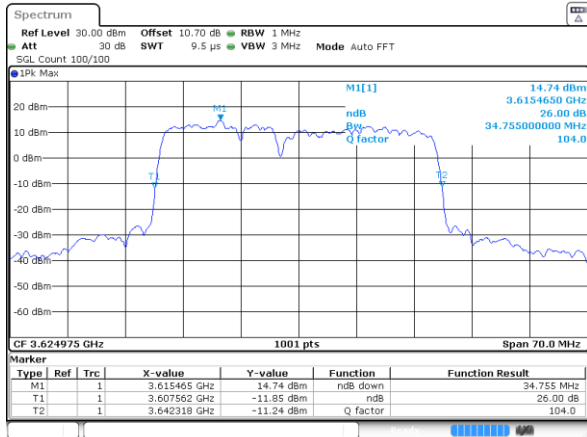


Date: 21.OCT.2020 16:14:29

Middle Channel / 20MHz+5MHz

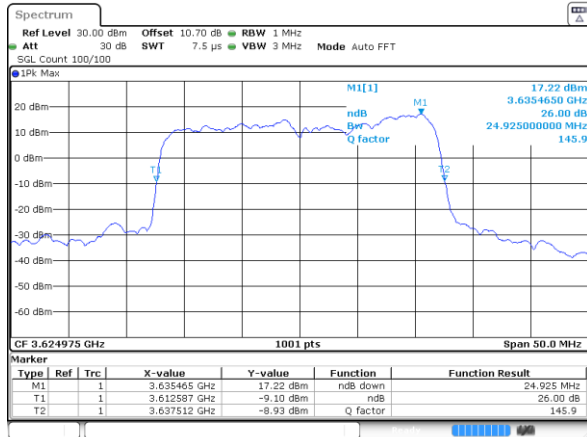


Date: 21.OCT.2020 15:56:27

Highest Channel / 15MHz+20MHz

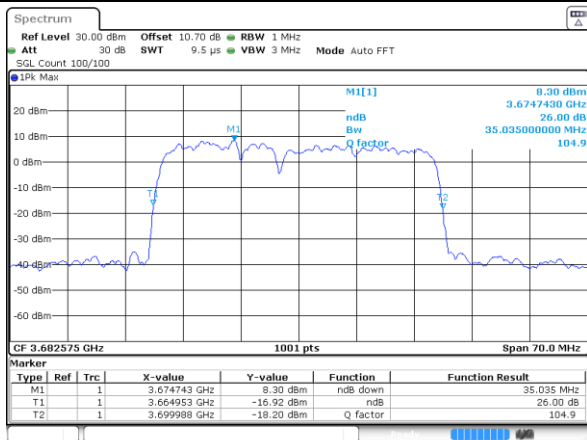

Date: 21.OCT.2020 16:16:00

Highest Channel / 20MHz+5MHz

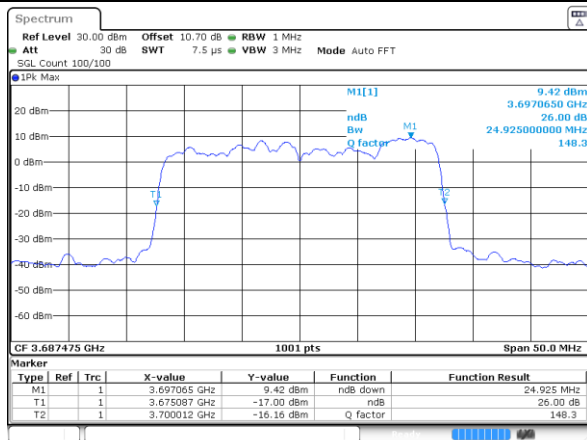


Date: 21.OCT.2020 15:57:36




LTE Band 48C

QPSK


Lowest Channel / 20MHz+10MHz

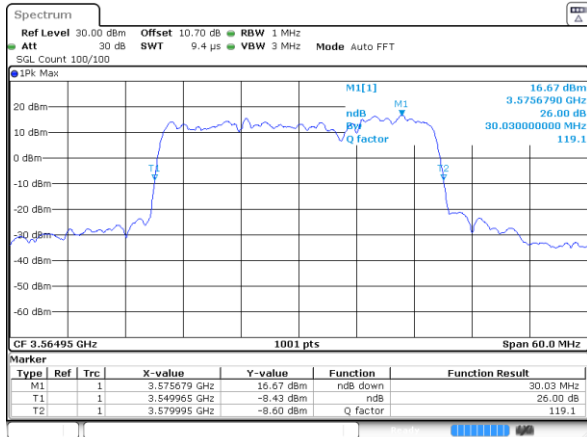


Lowest Channel / 20MHz+15MHz

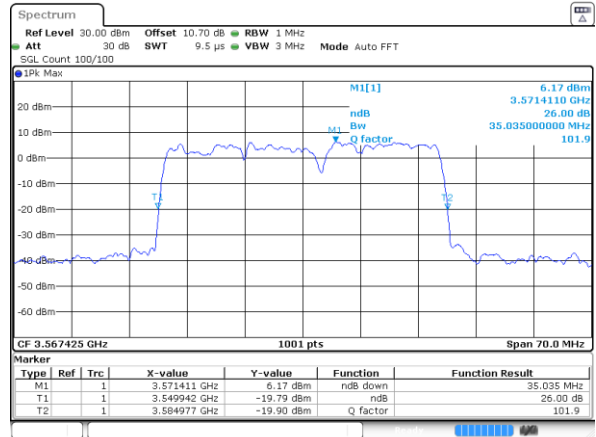


Middle Channel / 20MHz+10MHz

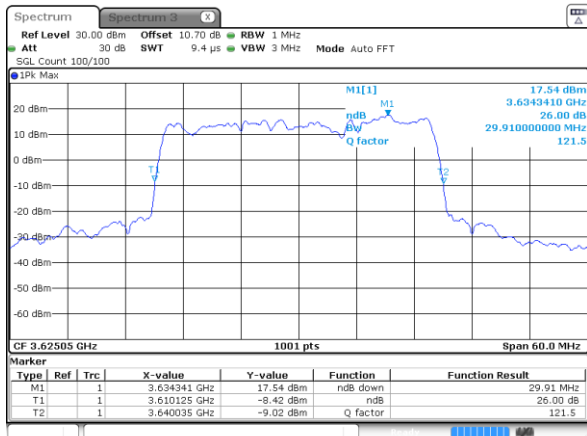


Middle Channel / 20MHz+15MHz

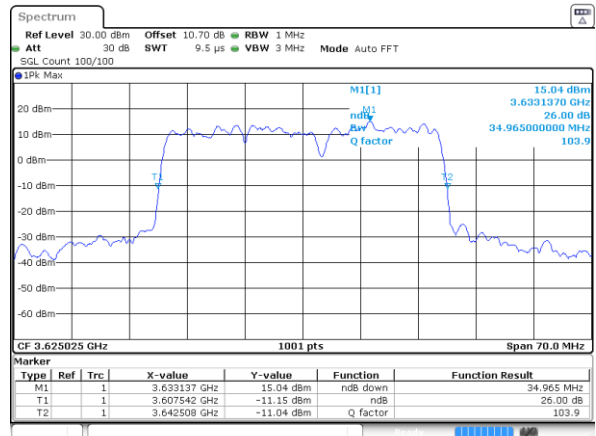


Highest Channel / 20MHz+10MHz

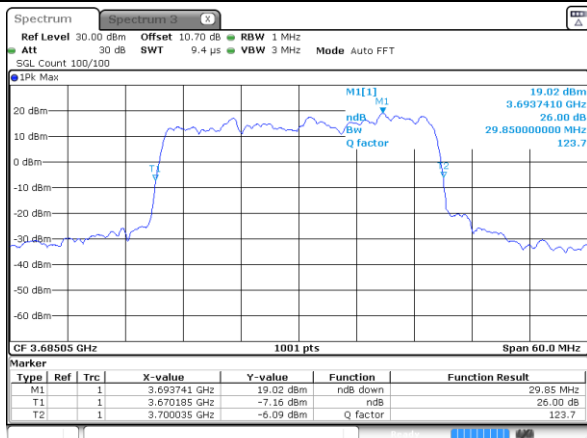

Highest Channel / 20MHz+15MHz

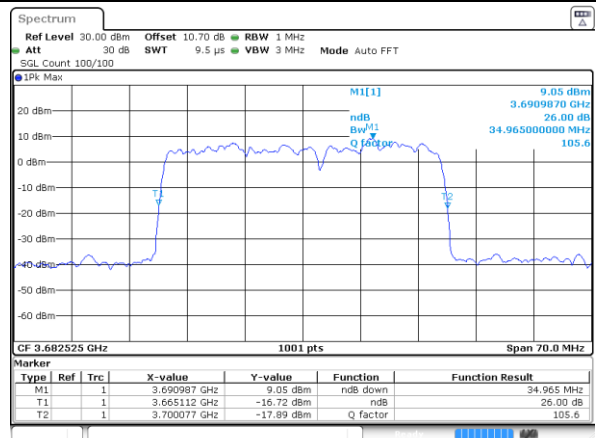

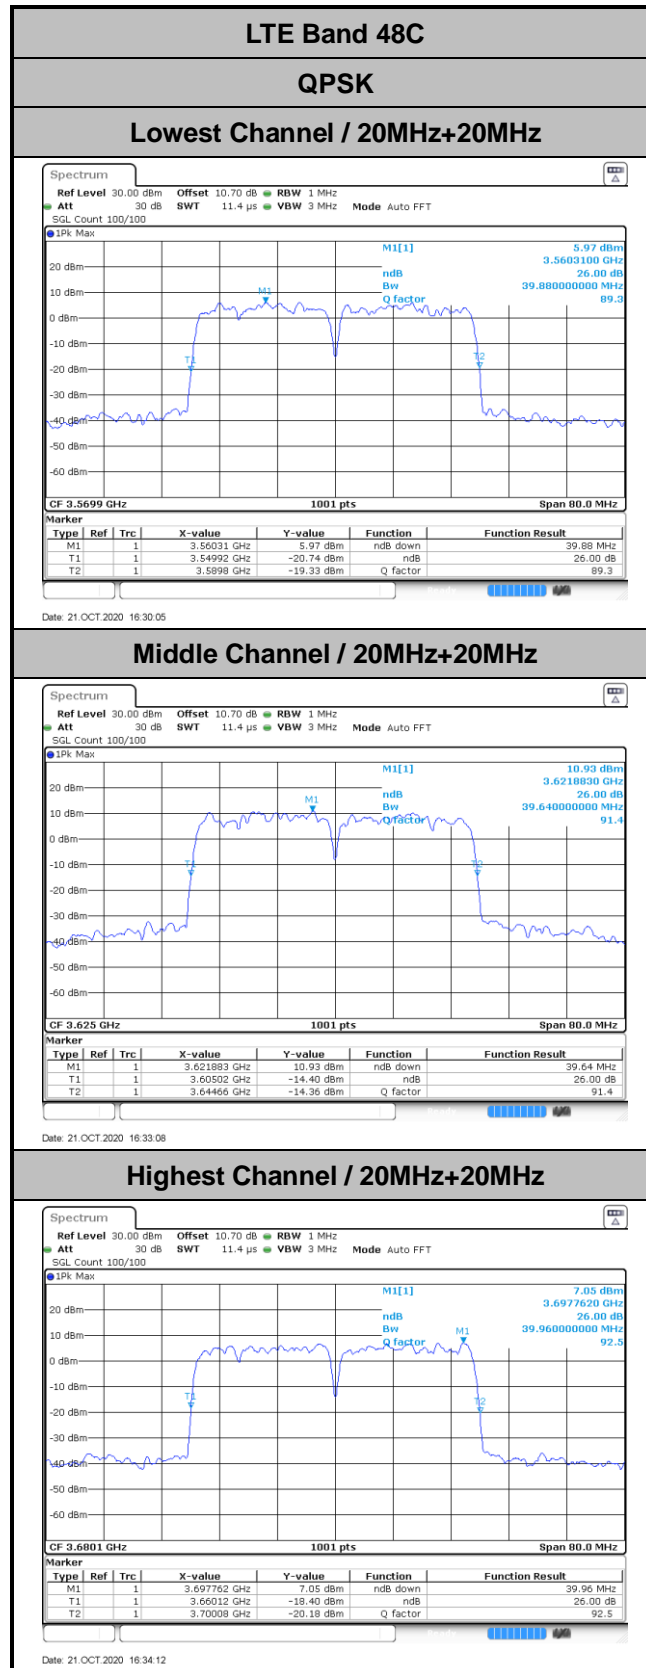




LTE Band 48C


16QAM

Lowest Channel / 5MHz+20MHz

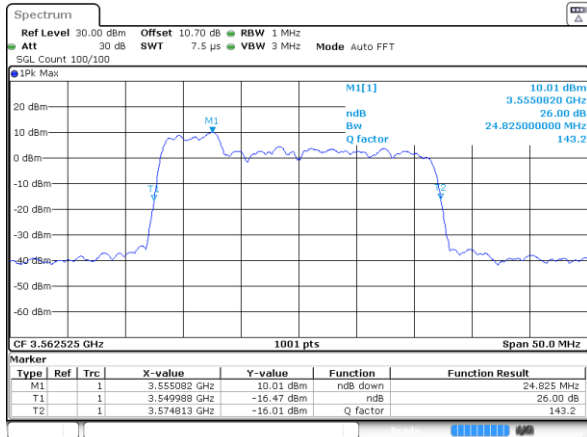


Date: 21.OCT.2020 15:42:40

Lowest Channel / 10MHz+15MHz

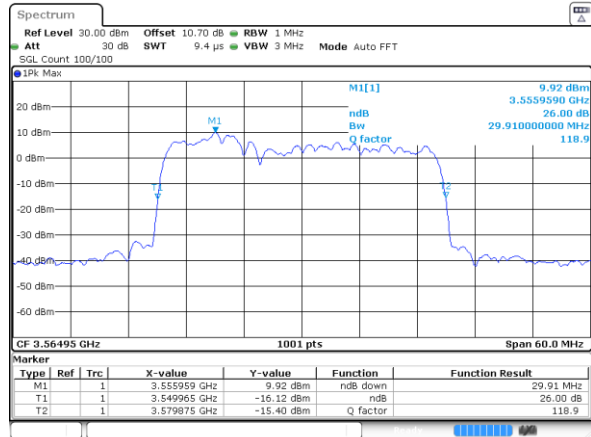


Date: 21.OCT.2020 16:01:53

Middle Channel / 5MHz+20MHz

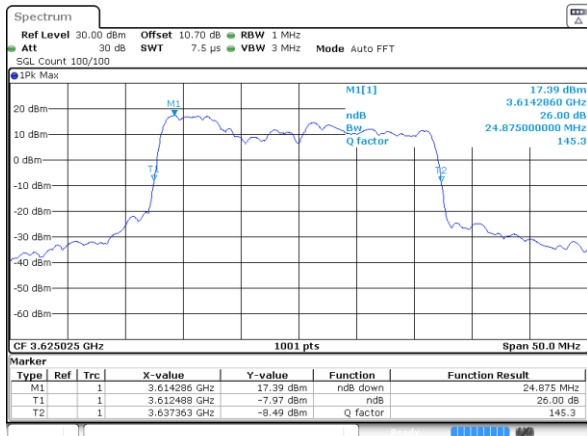


Date: 21.OCT.2020 15:46:58

Middle Channel / 10MHz+20MHz

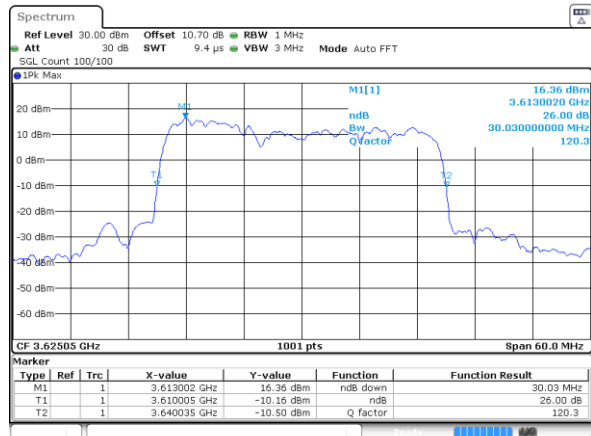


Date: 21.OCT.2020 16:03:55

Highest Channel / 5MHz+20MHz

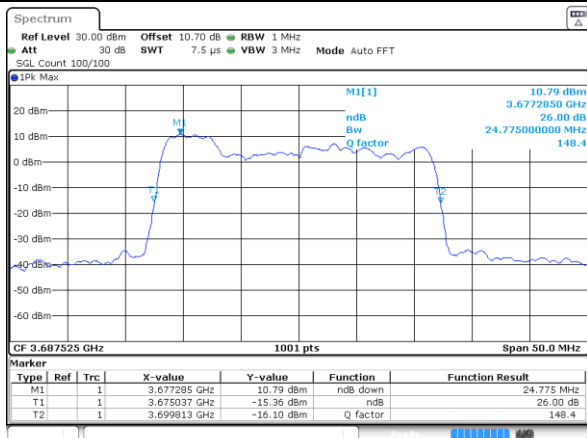

Date: 21.OCT.2020 15:50:03

Highest Channel / 10MHz+20MHz

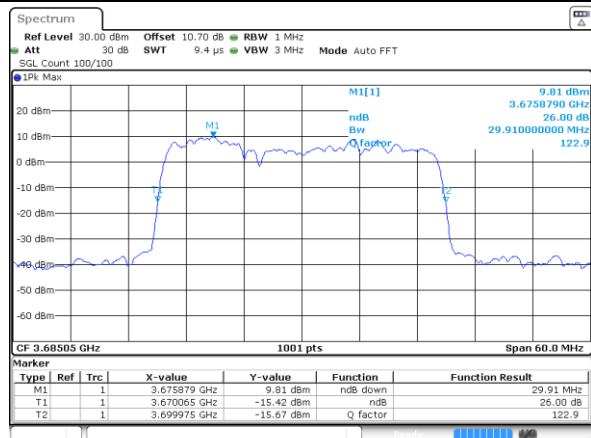


Date: 21.OCT.2020 16:05:50



LTE Band 48C


16QAM

Lowest Channel / 10MHz+20MHz

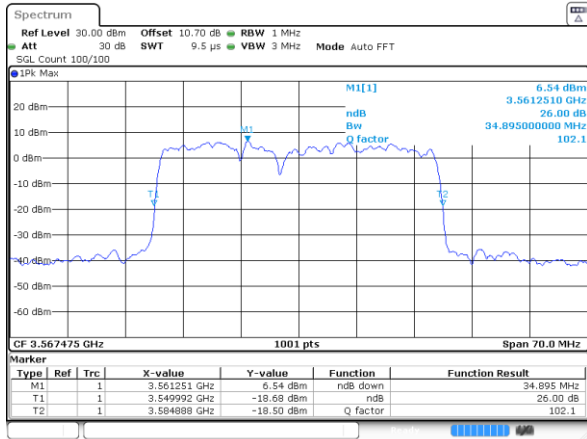


Date: 21.OCT.2020 16:09:03

Lowest Channel / 15MHz+10MHz

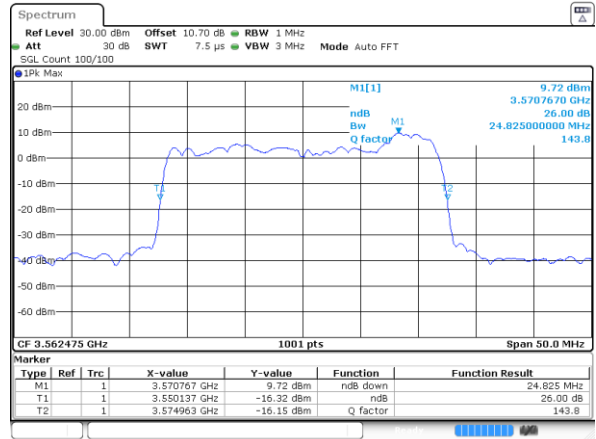


Date: 21.OCT.2020 15:53:25

Middle Channel / 15MHz+20MHz

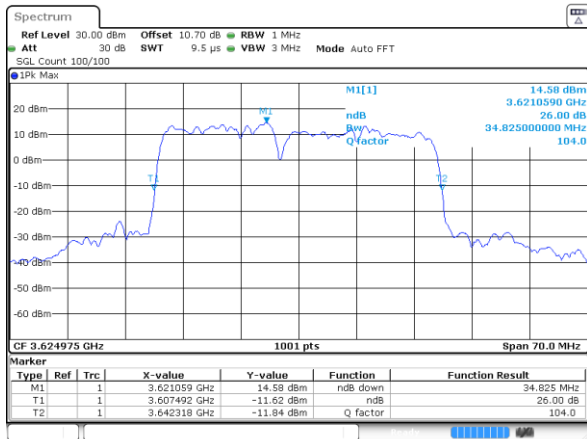


Date: 21.OCT.2020 16:12:23

Middle Channel / 20MHz+5MHz

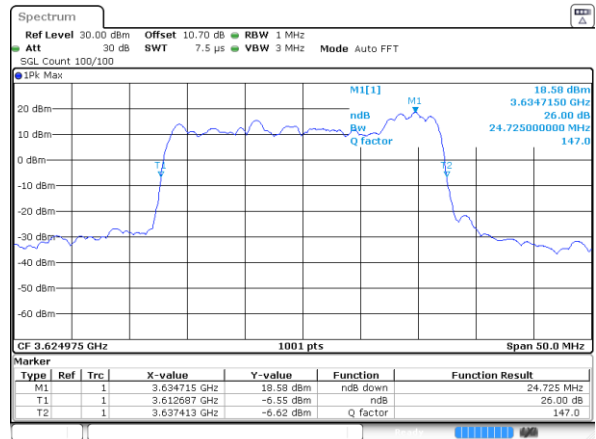


Date: 21.OCT.2020 15:55:51

Highest Channel / 15MHz+20MHz

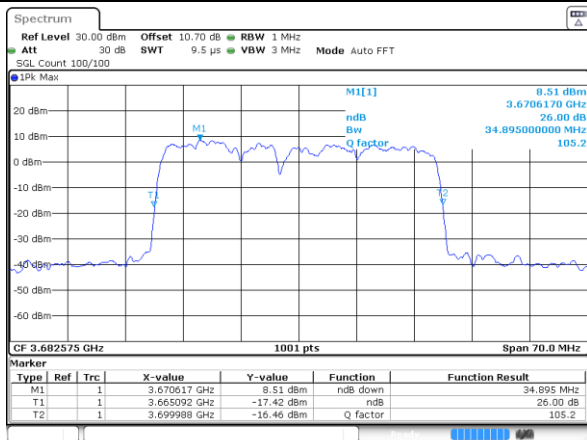

Date: 21.OCT.2020 16:16:25

Highest Channel / 20MHz+5MHz

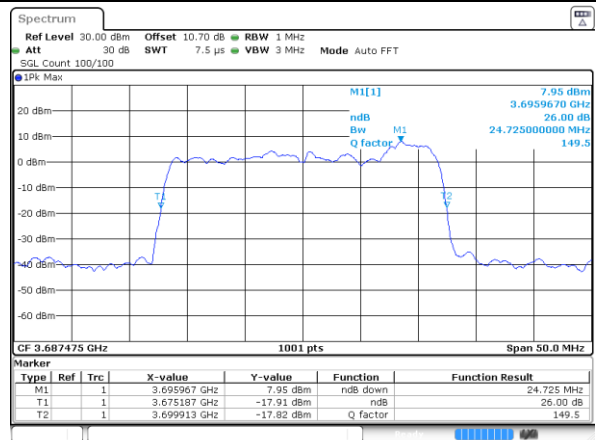


Date: 21.OCT.2020 15:58:37



LTE Band 48C


16QAM

Lowest Channel / 15MHz+15MHz

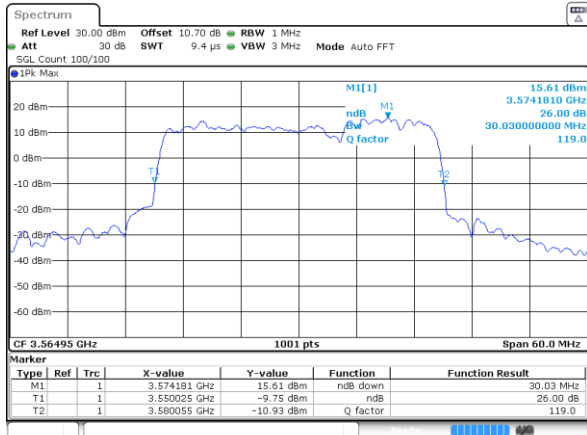


Date: 20.OCT.2020 20:23:10

Lowest Channel / 15MHz+20MHz

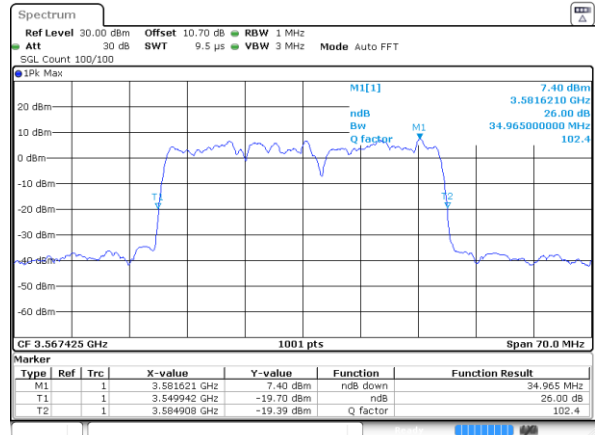


Date: 21.OCT.2020 16:24:00

Middle Channel / 20MHz+10MHz

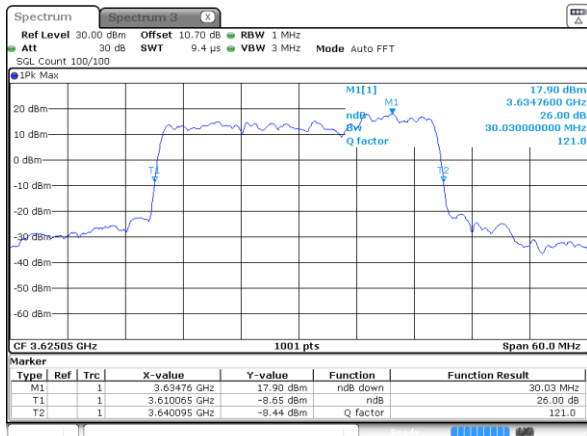


Date: 20.OCT.2020 21:29:24

Middle Channel / 20MHz+15MHz

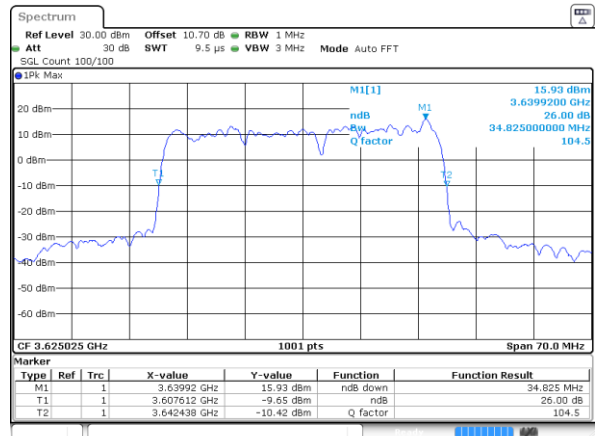


Date: 21.OCT.2020 16:25:44

Highest Channel / 20MHz+10MHz

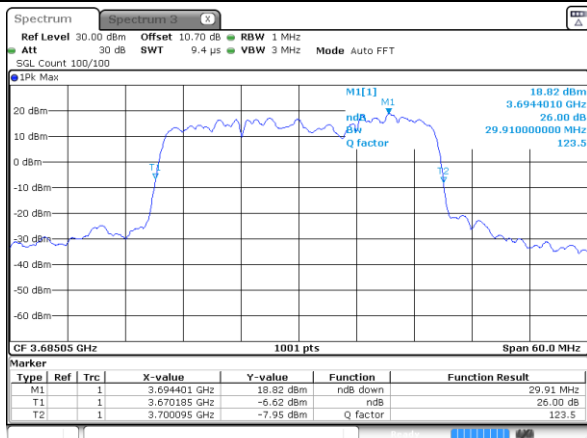


Date: 20.OCT.2020 21:32:16

Highest Channel / 20MHz+15MHz

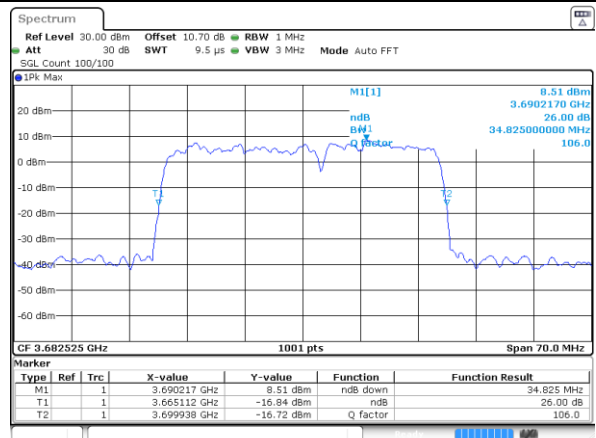

Date: 21.OCT.2020 16:27:39

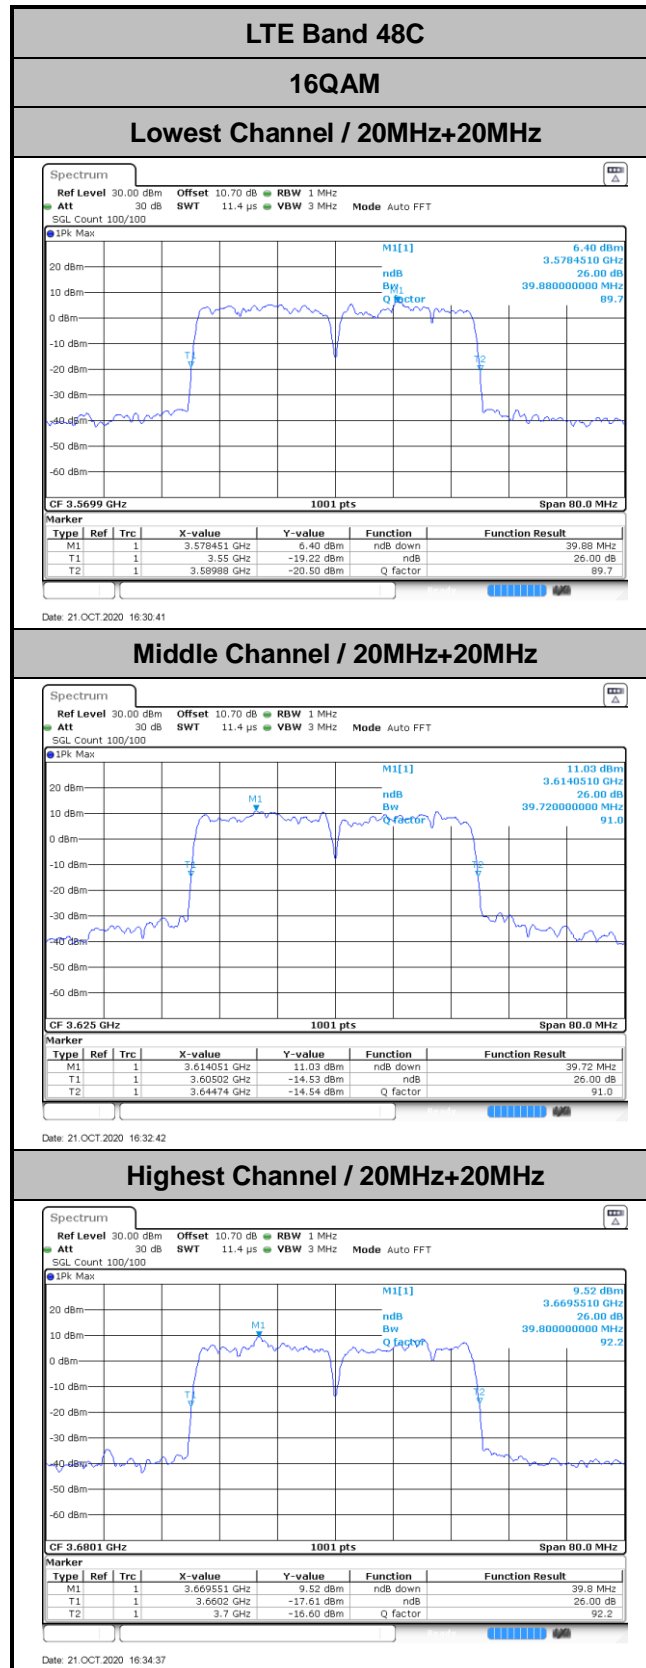




LTE Band 48C


64QAM

Lowest Channel / 5MHz+20MHz

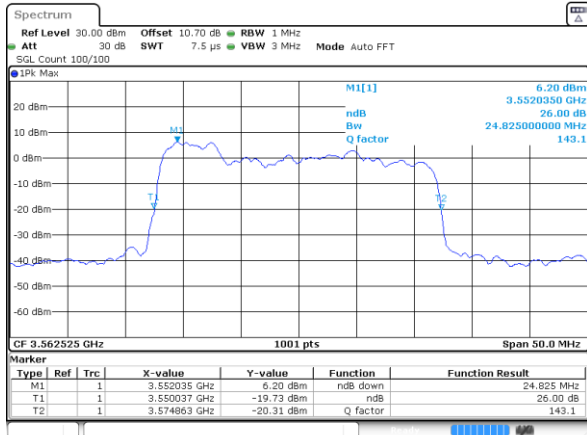


Date: 21.OCT.2020 15:20:35

Lowest Channel / 10MHz+15MHz

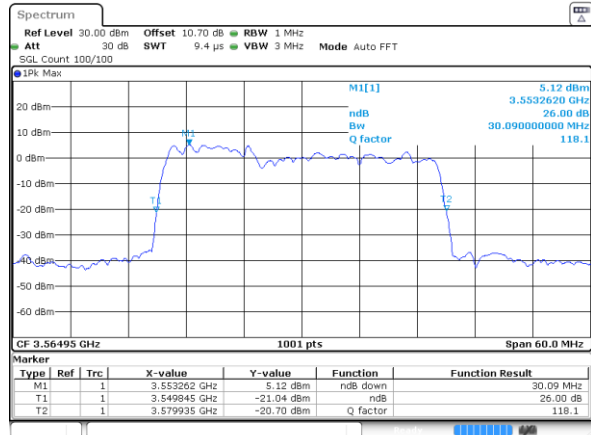


Date: 21.OCT.2020 16:01:27

Middle Channel / 5MHz+20MHz

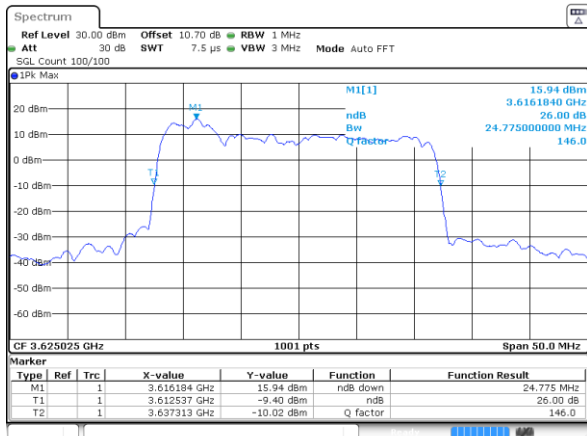


Date: 21.OCT.2020 15:47:27

Middle Channel / 10MHz+20MHz

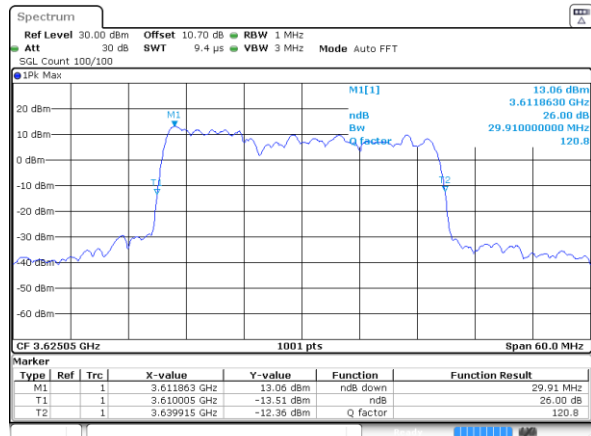


Date: 21.OCT.2020 16:04:19

Highest Channel / 5MHz+20MHz

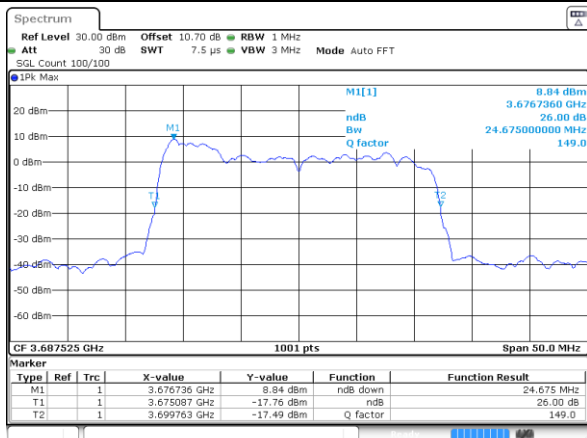

Date: 21.OCT.2020 15:49:38

Highest Channel / 10MHz+20MHz

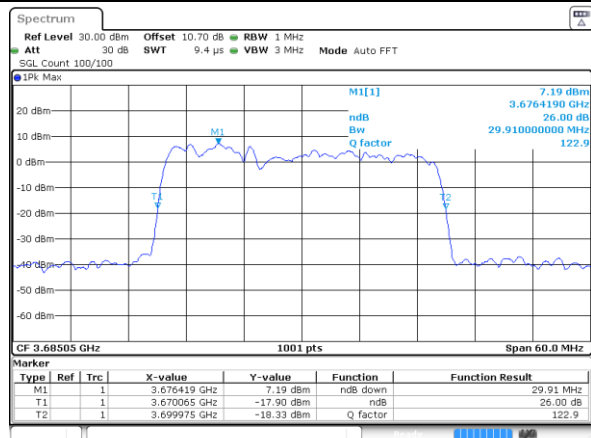


Date: 21.OCT.2020 16:05:26



LTE Band 48C


64QAM

Lowest Channel / 10MHz+20MHz

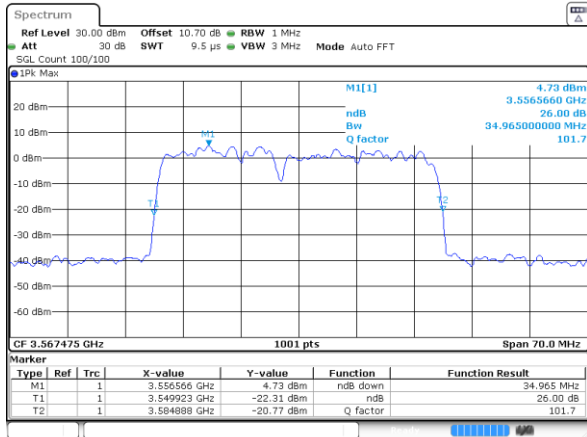


Date: 21.OCT.2020 16:10:53

Lowest Channel / 15MHz+10MHz

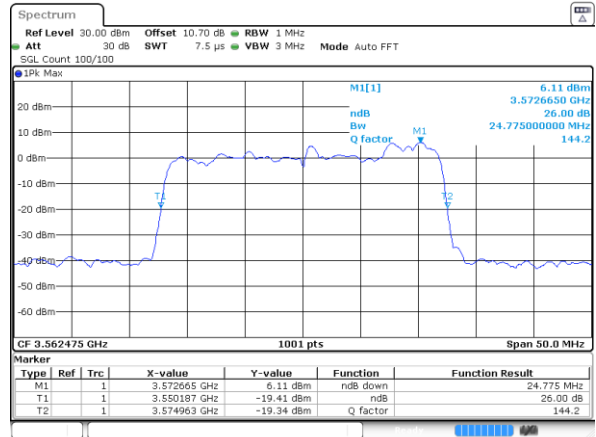


Date: 21.OCT.2020 15:54:02

Middle Channel / 15MHz+20MHz

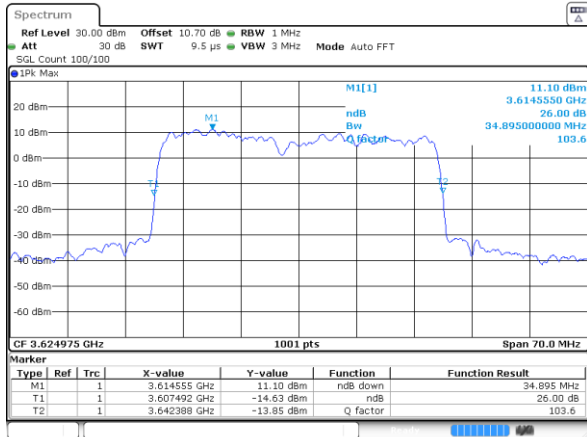


Date: 21.OCT.2020 16:11:55

Middle Channel / 20MHz+5MHz

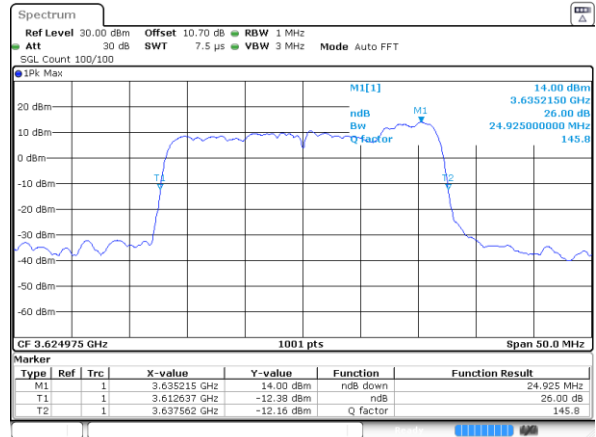


Date: 21.OCT.2020 15:55:27

Highest Channel / 15MHz+20MHz

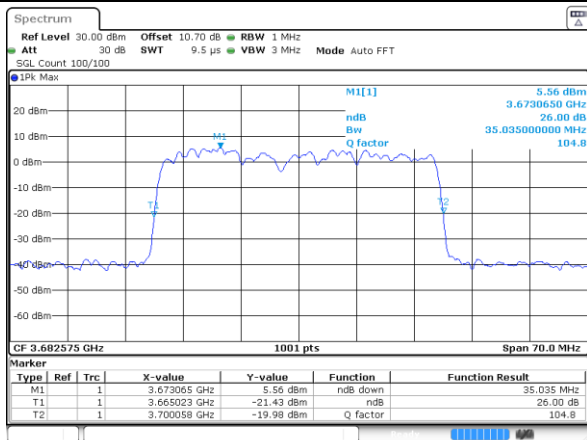

Date: 21.OCT.2020 16:16:50

Highest Channel / 20MHz+5MHz

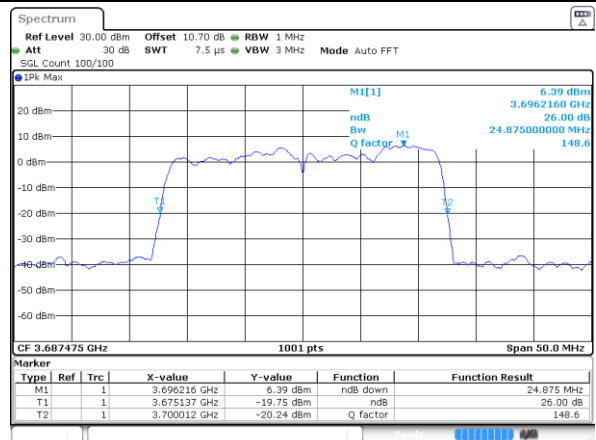


Date: 21.OCT.2020 15:59:10



LTE Band 48C


64QAM

Lowest Channel / 15MHz+15MHz

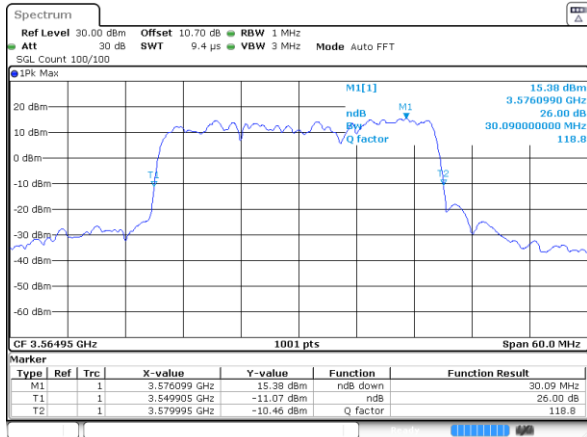


Date: 20.OCT.2020 20:24:16

Lowest Channel / 15MHz+20MHz

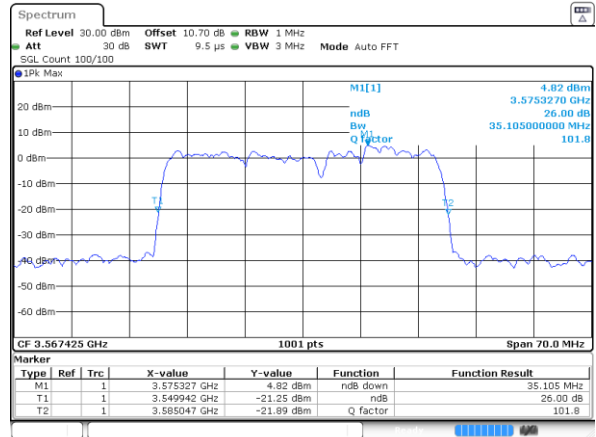


Date: 21.OCT.2020 16:23:30

Middle Channel / 20MHz+10MHz

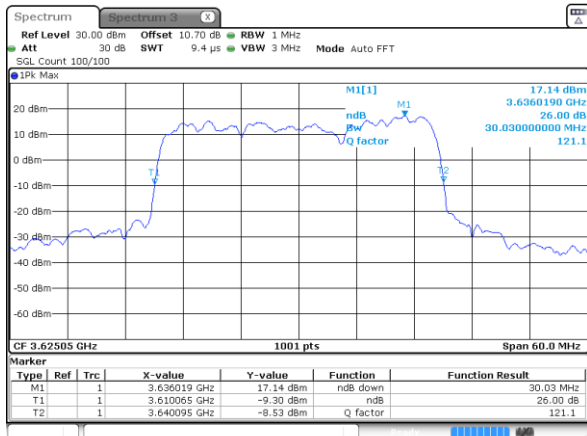


Date: 20.OCT.2020 21:29:50

Middle Channel / 20MHz+15MHz

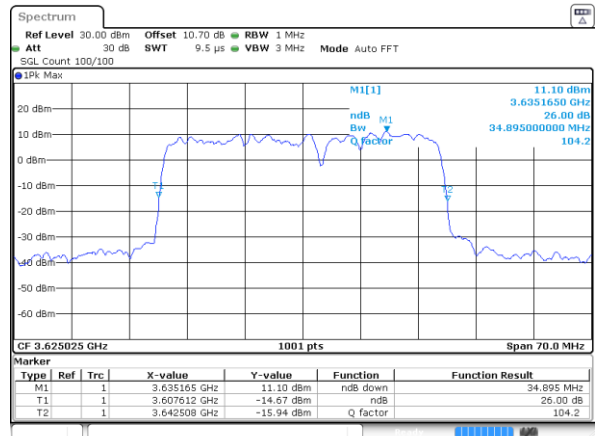


Date: 21.OCT.2020 16:26:18

Highest Channel / 20MHz+10MHz

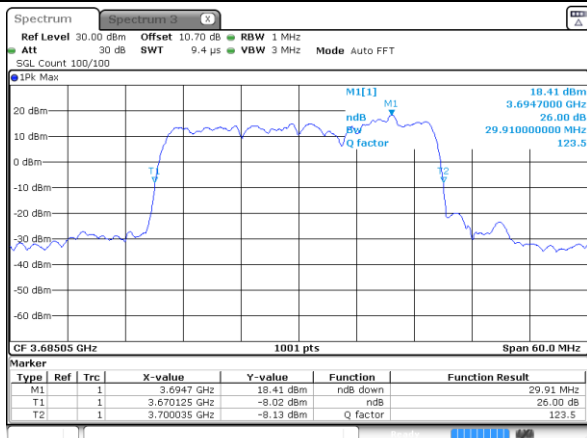


Date: 20.OCT.2020 21:31:53

Highest Channel / 20MHz+15MHz

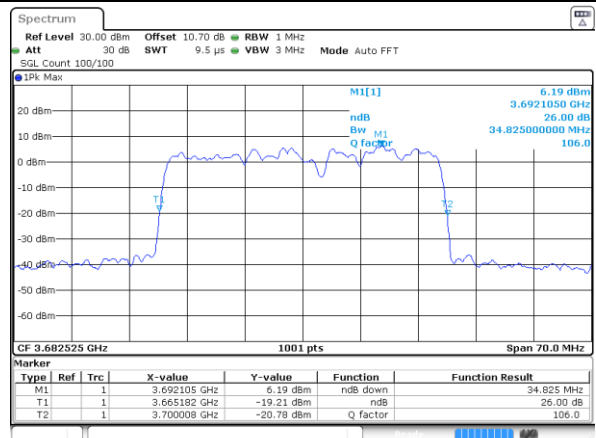

Date: 21.OCT.2020 16:27:06

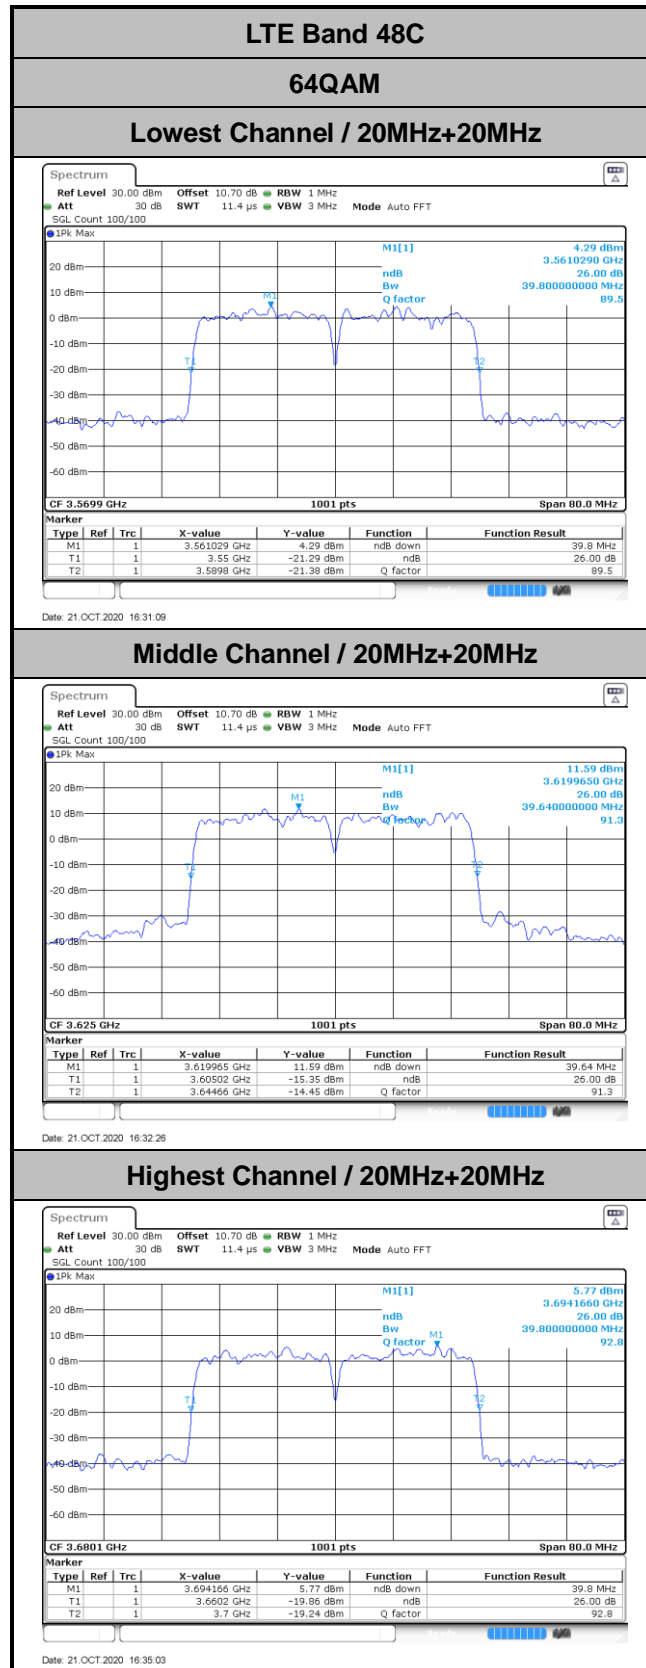



Occupied Bandwidth

Mode	LTE Band 48C : 99%OBW(MHz)			
QPSK				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	23.23	27.99	32.87	23.33
Middle CH	23.38	28.17	32.73	23.23
Highest CH	23.18	27.93	32.80	23.18
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	28.17	33.01	37.64	-
Middle CH	28.05	32.94	37.32	-
Highest CH	27.93	32.73	37.88	-

Mode	LTE Band 48C : 99%OBW(MHz)			
16QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	23.18	27.93	32.80	23.48
Middle CH	23.18	28.05	32.80	23.18
Highest CH	23.23	27.99	32.94	23.18
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	28.05	32.94	37.80	-
Middle CH	28.05	32.87	37.64	-
Highest CH	28.23	32.66	37.72	-


Mode	LTE Band 48C : 99%OBW(MHz)			
64QAM				
BW	5MHz+20MHz	10MHz+20MHz	15MHz+20MHz	20MHz+5MHz
Lowest CH	23.03	27.93	33.01	23.18
Middle CH	23.33	27.99	33.01	23.23
Highest CH	23.23	28.05	32.80	23.33
BW	20MHz+10MHz	20MHz+15MHz	20MHz+20MHz	N/A
Lowest CH	27.99	32.73	37.64	-
Middle CH	28.05	32.80	37.40	-
Highest CH	27.87	33.01	37.48	-



LTE Band 48C


QPSK

Lowest Channel / 5MHz+20MHz

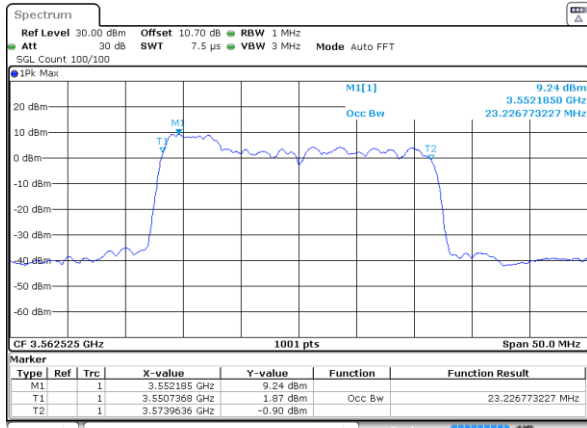


Date: 21.OCT.2020 15:43:01

Lowest Channel / 10MHz+20MHz

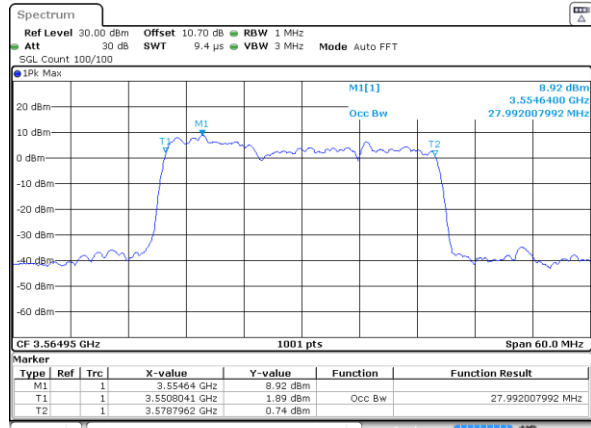


Date: 21.OCT.2020 16:02:12

Middle Channel / 5MHz+20MHz

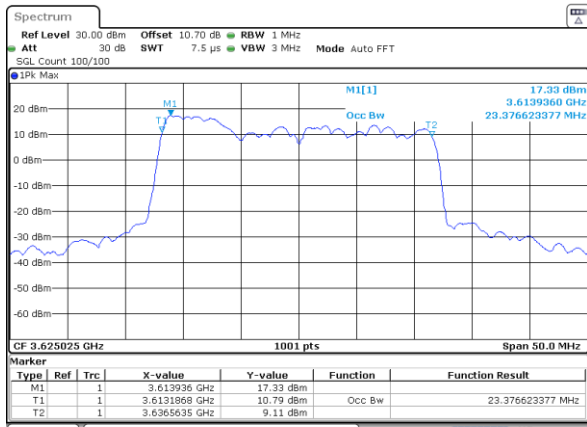


Date: 21.OCT.2020 15:46:20

Middle Channel / 10MHz+20MHz

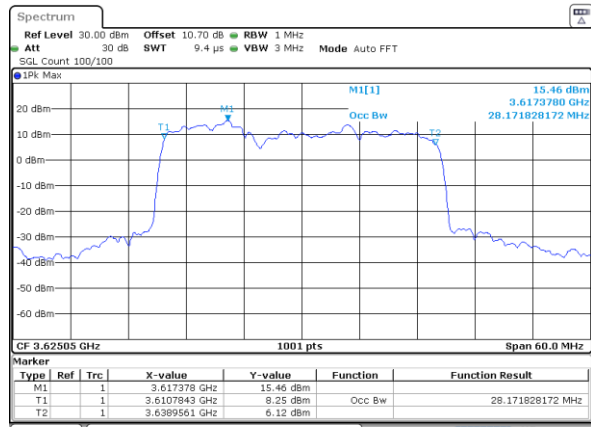


Date: 21.OCT.2020 16:03:19

Highest Channel / 5MHz+20MHz

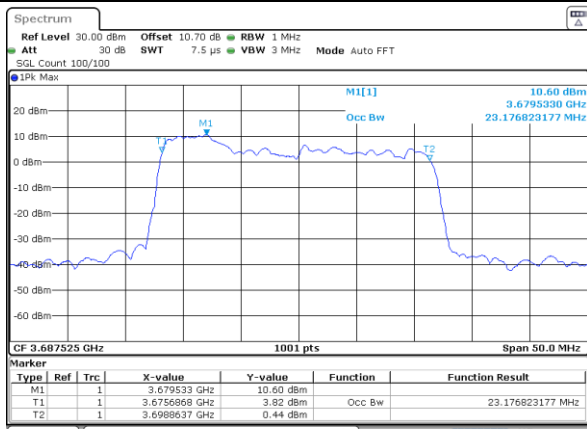

Date: 21.OCT.2020 15:50:20

Highest Channel / 10MHz+20MHz

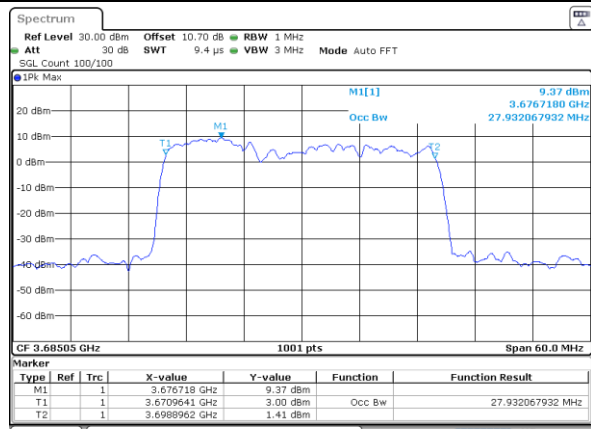


Date: 21.OCT.2020 16:06:09



LTE Band 48C


QPSK

Lowest Channel / 15MHz+20MHz

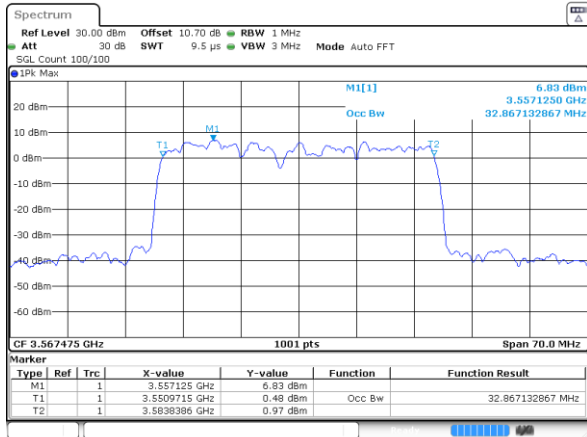


Date: 21.OCT.2020 16:08:18

Lowest Channel / 20MHz+5MHz

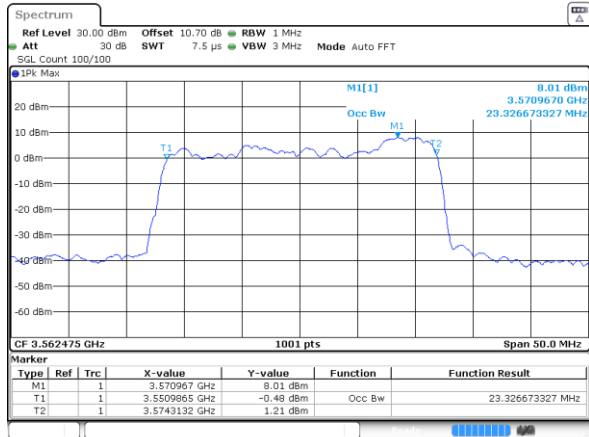


Date: 21.OCT.2020 15:52:47

Middle Channel / 15MHz+20MHz

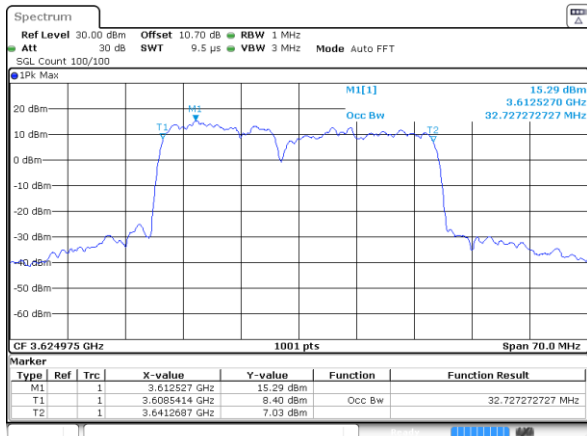


Date: 21.OCT.2020 16:12:39

Middle Channel / 20MHz+5MHz

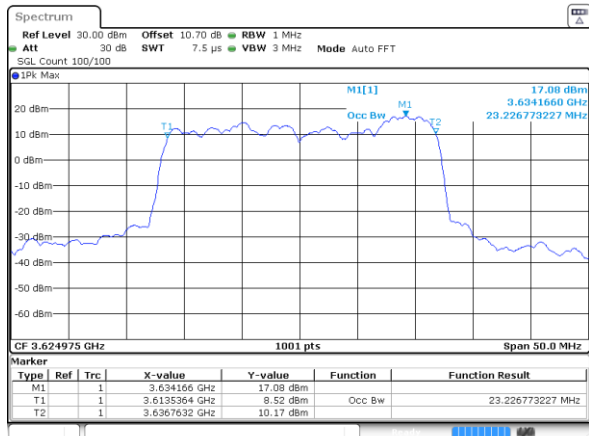


Date: 21.OCT.2020 15:56:19

Highest Channel / 15MHz+20MHz

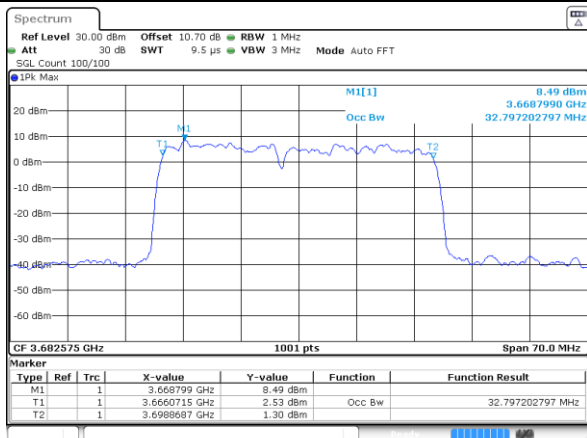

Date: 21.OCT.2020 16:15:53

Highest Channel / 20MHz+5MHz

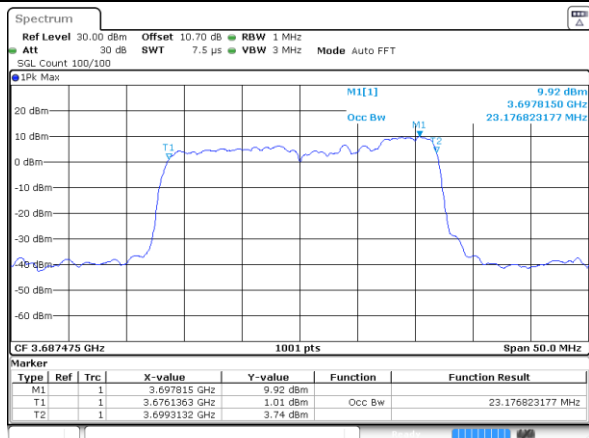


Date: 21.OCT.2020 15:57:27



LTE Band 48C


QPSK

Lowest Channel / 20MHz+10MHz

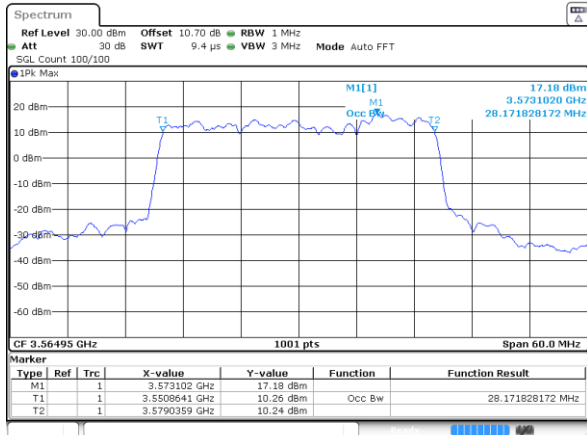


Date: 20.OCT.2020 20:22:42

Lowest Channel / 20MHz+15MHz

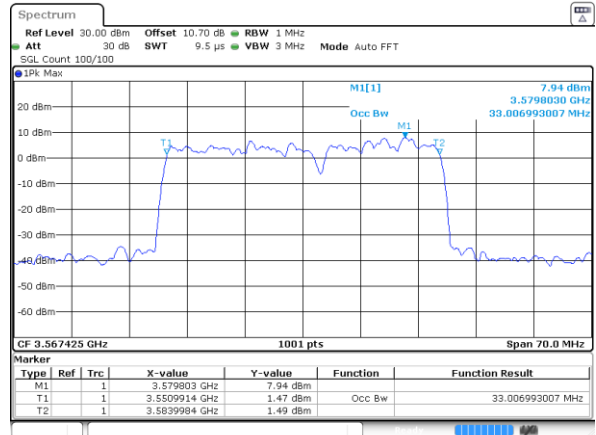


Date: 21.OCT.2020 16:24:16

Middle Channel / 20MHz+10MHz

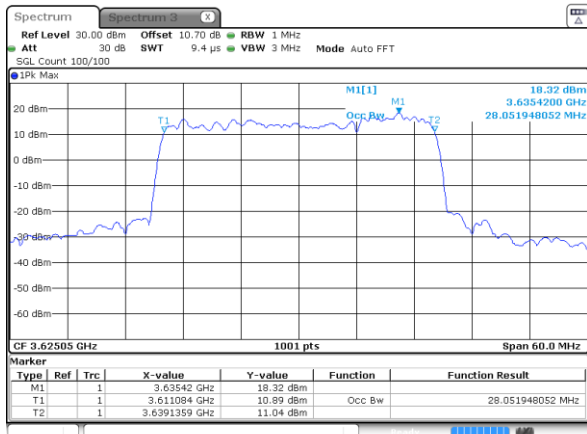


Date: 20.OCT.2020 21:28:54

Middle Channel / 20MHz+15MHz

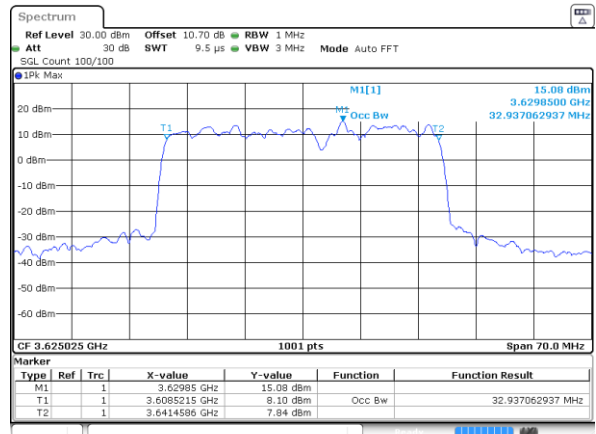


Date: 21.OCT.2020 16:25:10

Highest Channel / 20MHz+10MHz

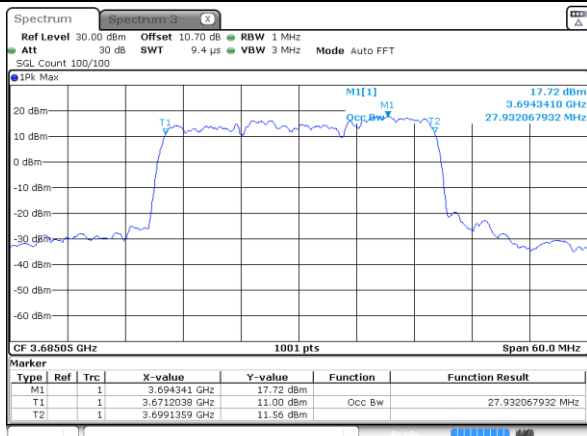


Date: 20.OCT.2020 21:32:30

Highest Channel / 20MHz+15MHz

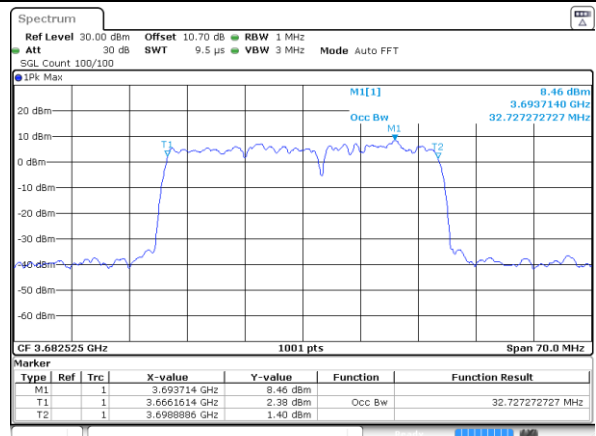

Date: 21.OCT.2020 16:27:59

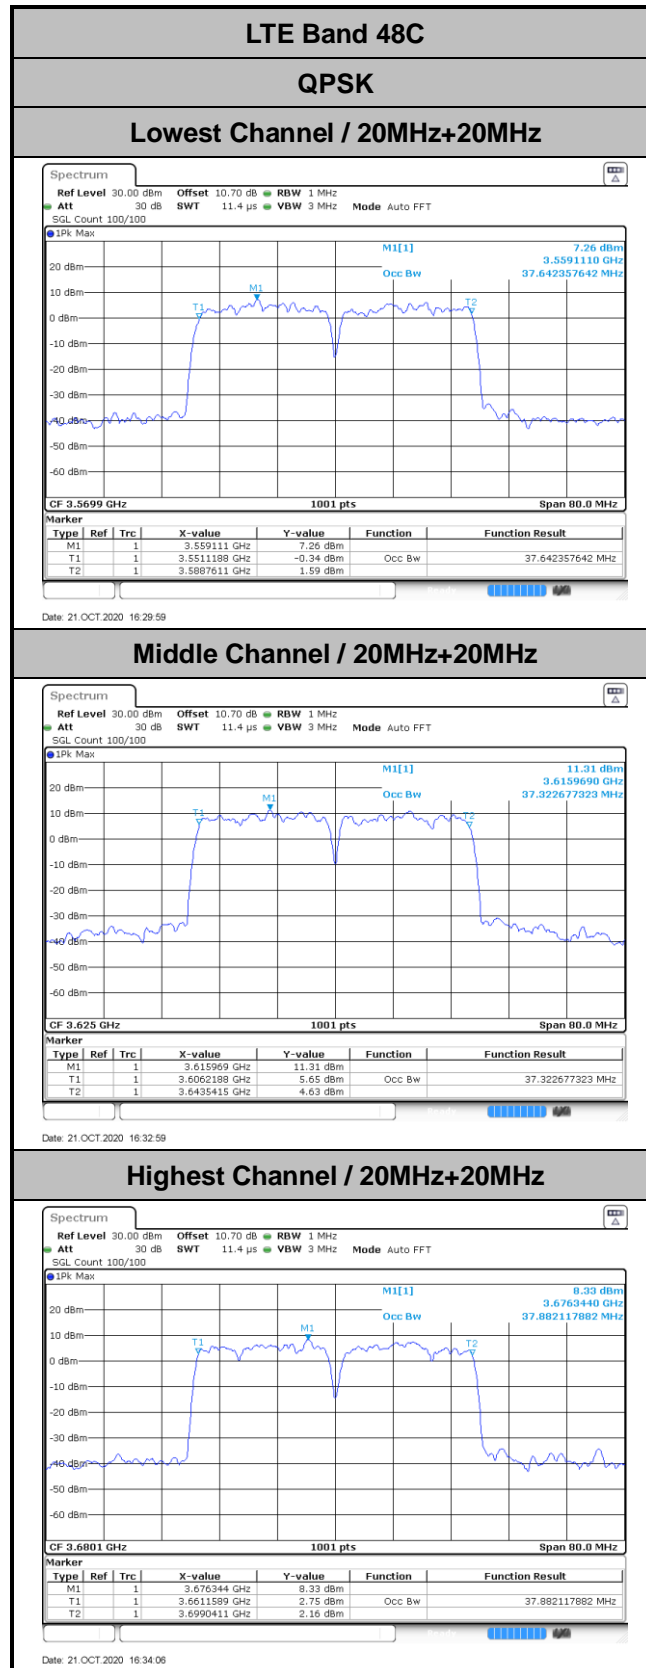




LTE Band 48C


16QAM

Lowest Channel / 5MHz+20MHz

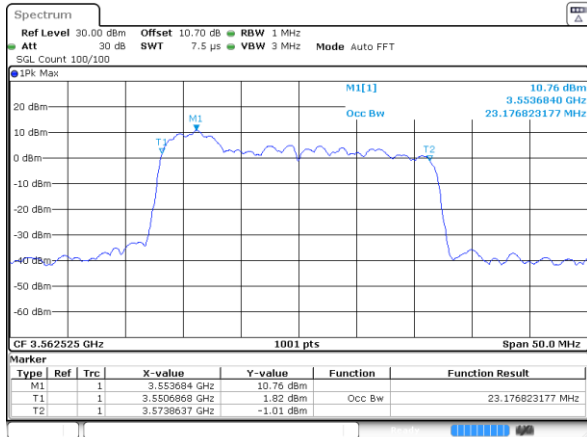


Date: 21.OCT.2020 15:42:33

Lowest Channel / 10MHz+20MHz

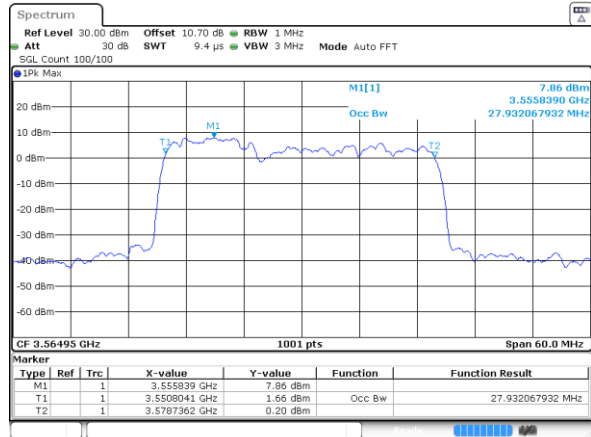


Date: 21.OCT.2020 16:01:44

Middle Channel / 5MHz+20MHz

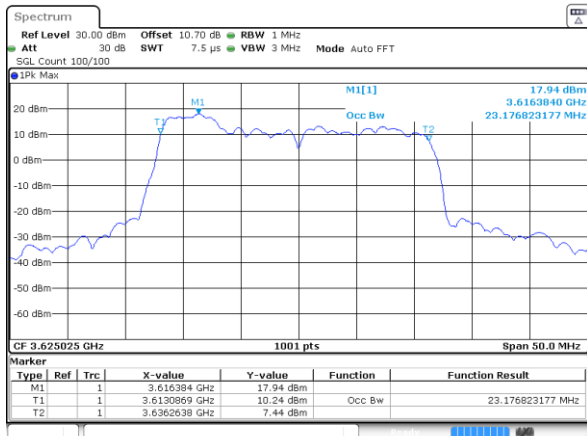


Date: 21.OCT.2020 15:46:51

Middle Channel / 10MHz+20MHz

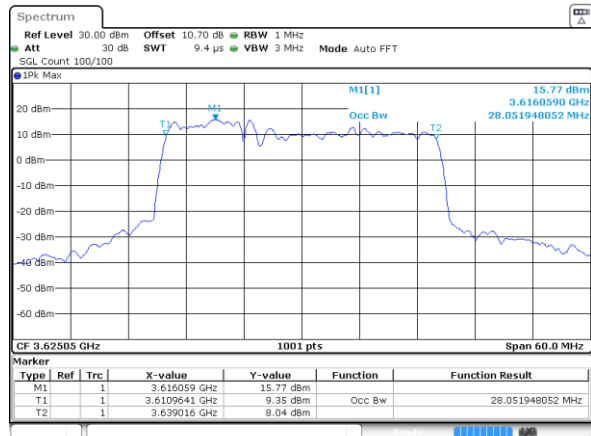


Date: 21.OCT.2020 16:03:49

Highest Channel / 5MHz+20MHz

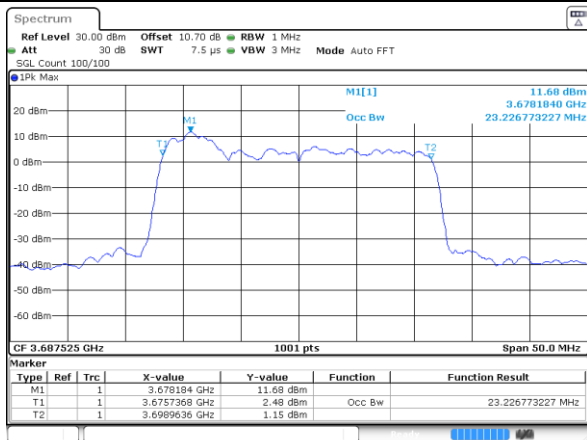

Date: 21.OCT.2020 15:49:56

Highest Channel / 10MHz+20MHz

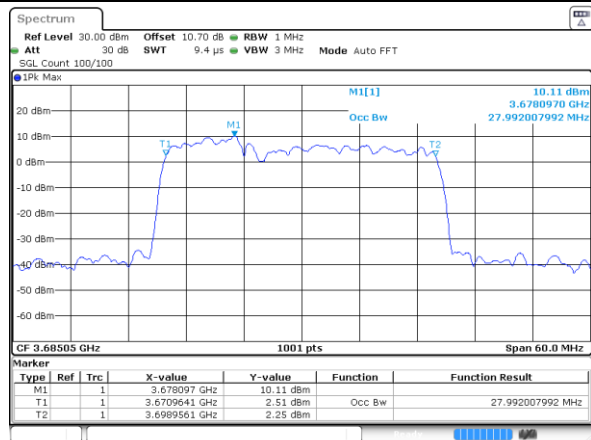


Date: 21.OCT.2020 16:05:44



LTE Band 48C


16QAM

Lowest Channel / 15MHz+20MHz

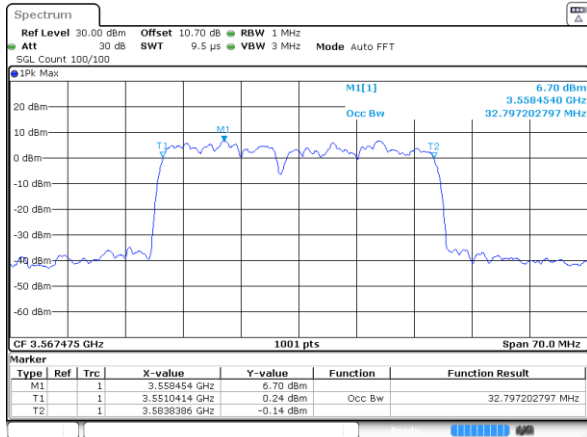


Date: 21.OCT.2020 16:08:50

Lowest Channel / 20MHz+5MHz

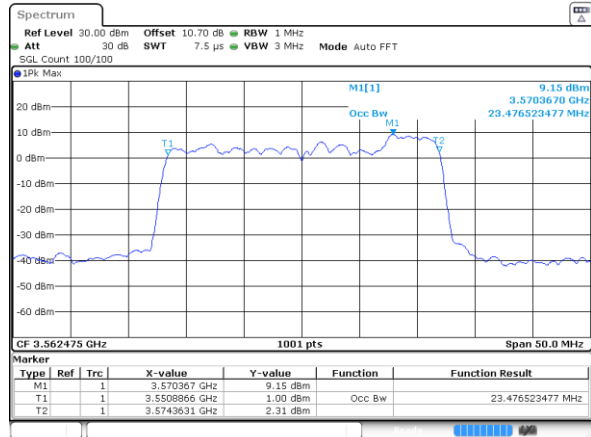


Date: 21.OCT.2020 15:53:17

Middle Channel / 15MHz+20MHz

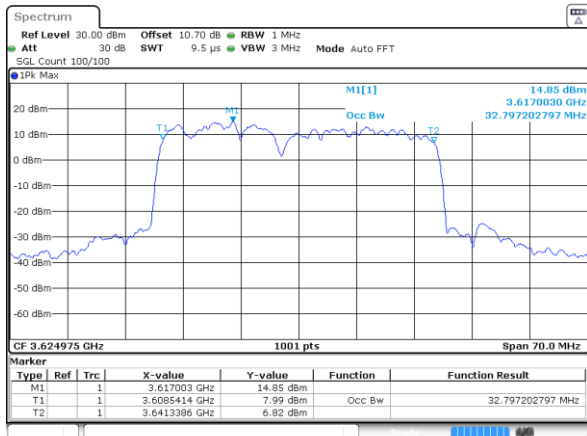


Date: 21.OCT.2020 16:12:15

Middle Channel / 20MHz+5MHz

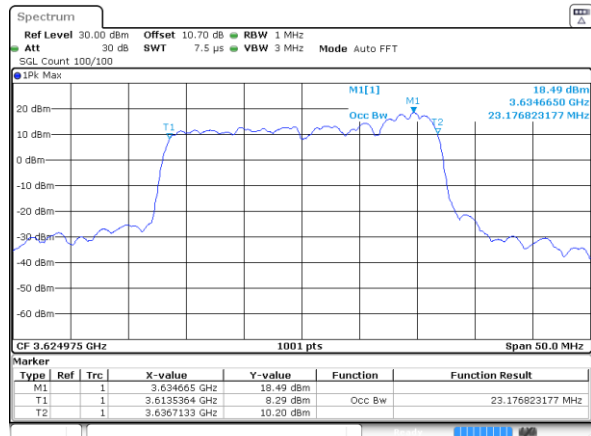


Date: 21.OCT.2020 15:55:45

Highest Channel / 15MHz+20MHz

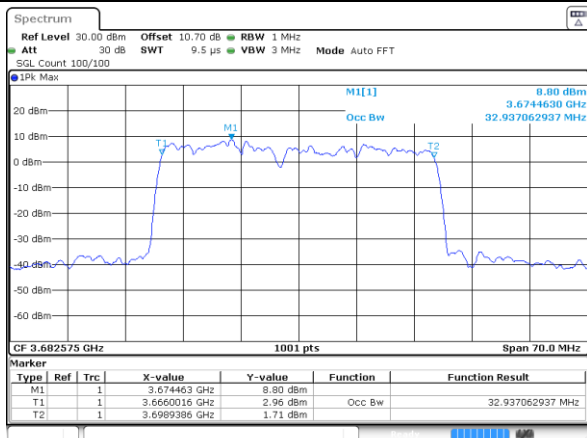

Date: 21.OCT.2020 16:16:19

Highest Channel / 20MHz+5MHz

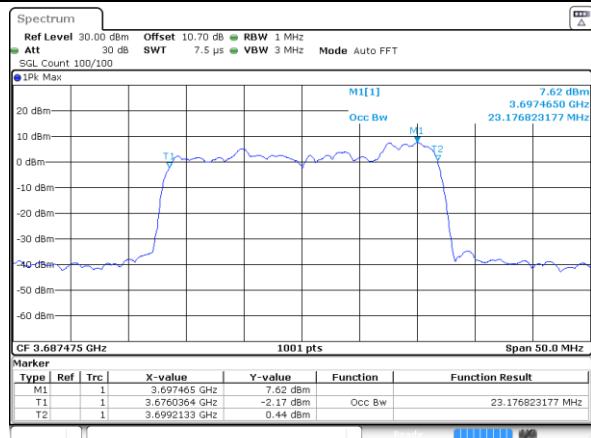


Date: 21.OCT.2020 15:58:14



LTE Band 48C


16QAM

Lowest Channel / 20MHz+10MHz

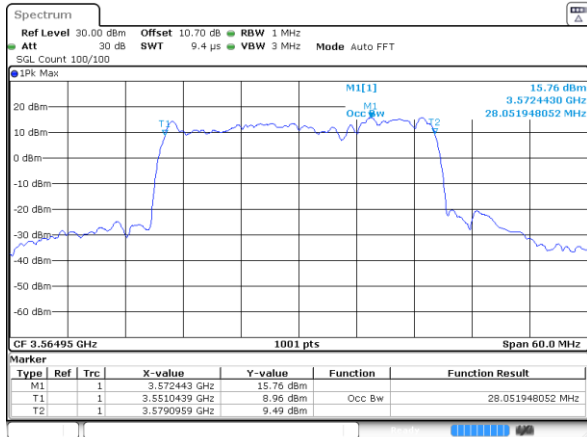


Date: 20.OCT.2020 20:23:04

Lowest Channel / 20MHz+15MHz

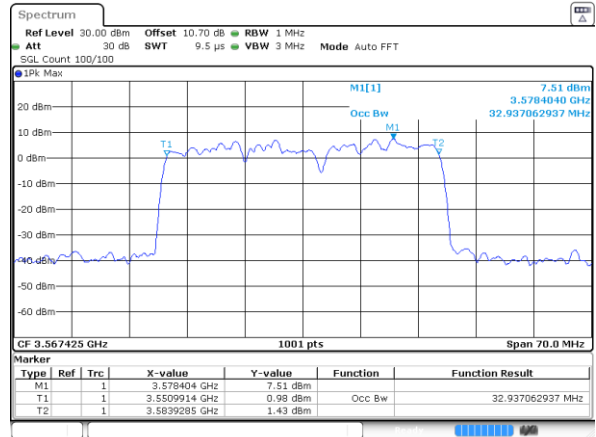


Date: 21.OCT.2020 16:23:52

Middle Channel / 20MHz+10MHz

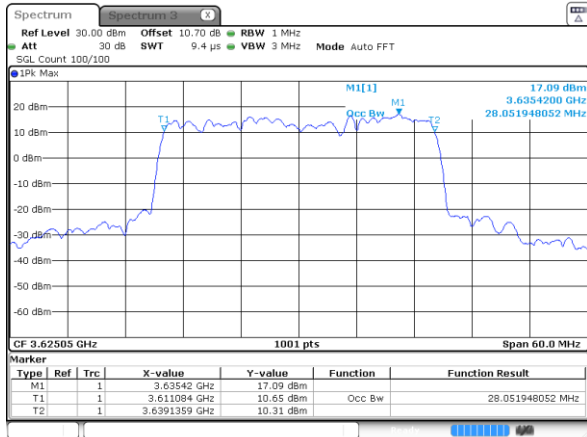


Date: 20.OCT.2020 21:29:16

Middle Channel / 20MHz+15MHz

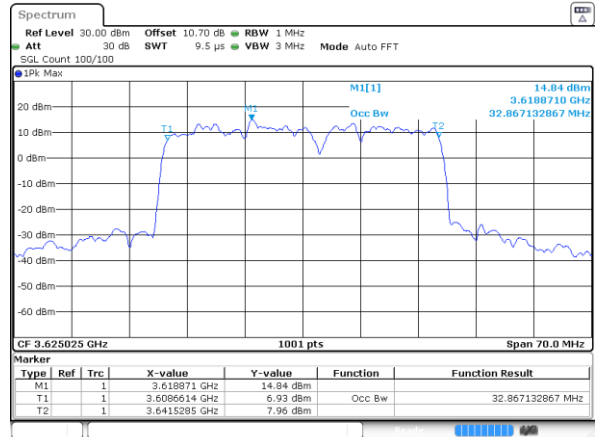


Date: 21.OCT.2020 16:25:37

Highest Channel / 20MHz+10MHz

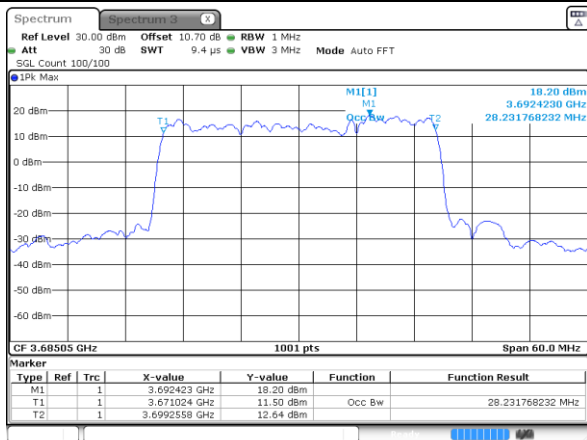


Date: 20.OCT.2020 21:32:09

Highest Channel / 20MHz+15MHz

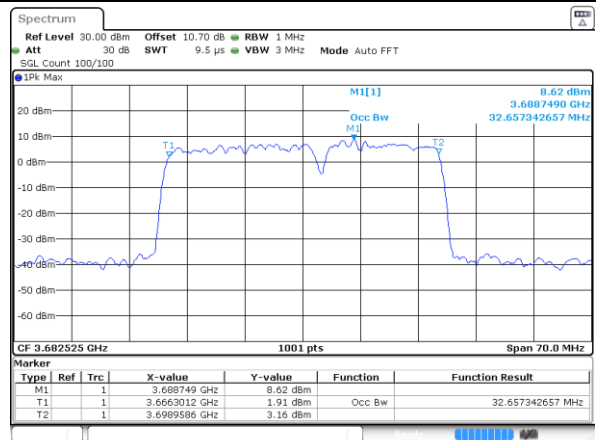

Date: 21.OCT.2020 16:27:25

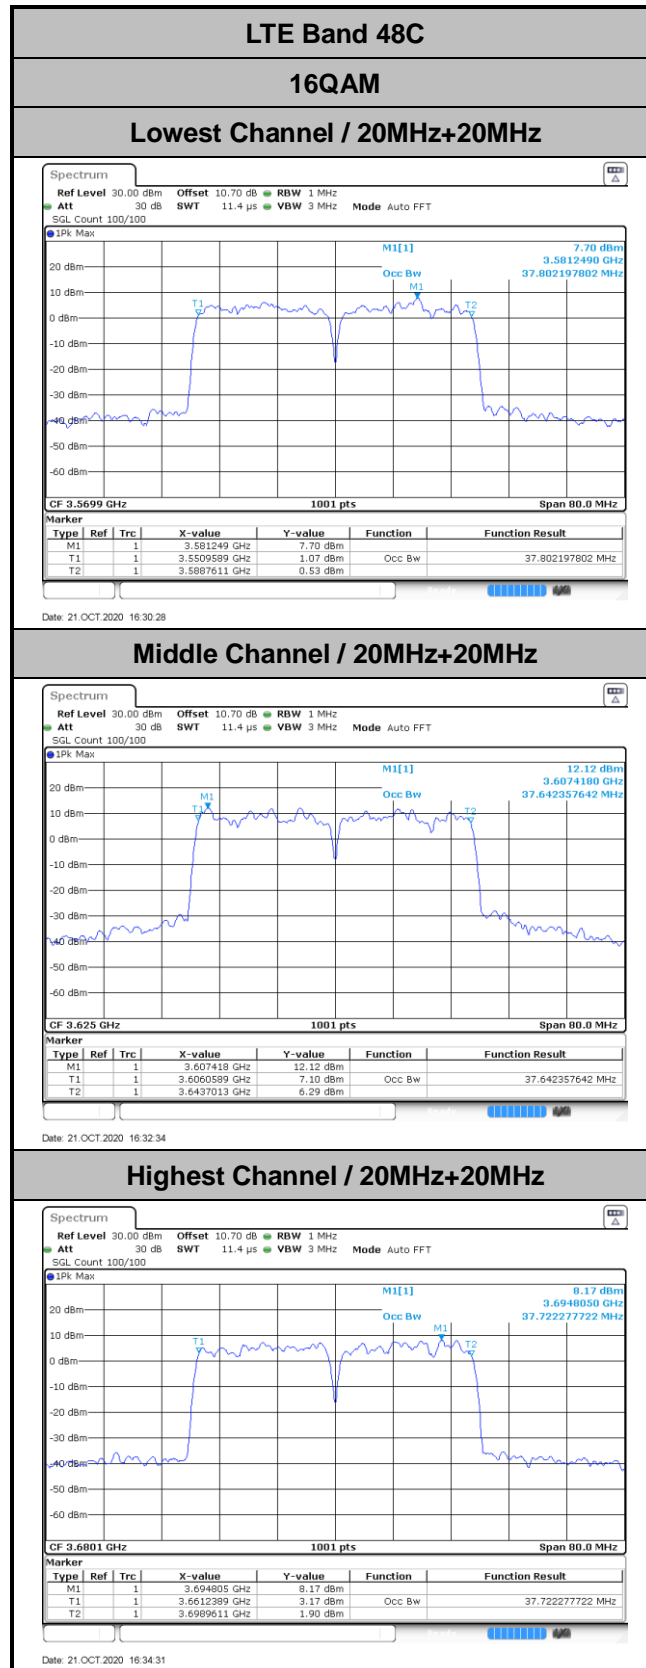




LTE Band 48C


64QAM

Lowest Channel / 5MHz+20MHz

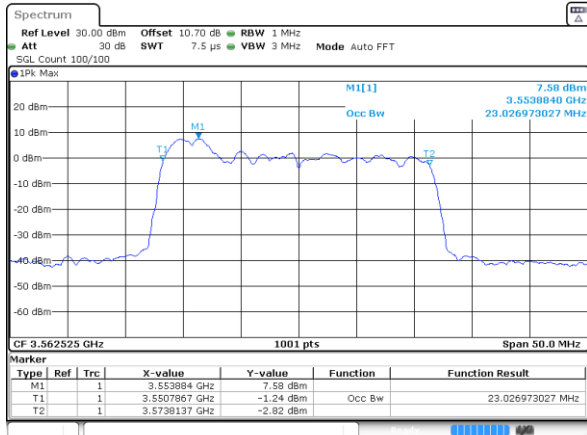


Date: 21.OCT.2020 15:20:18

Lowest Channel / 10MHz+20MHz

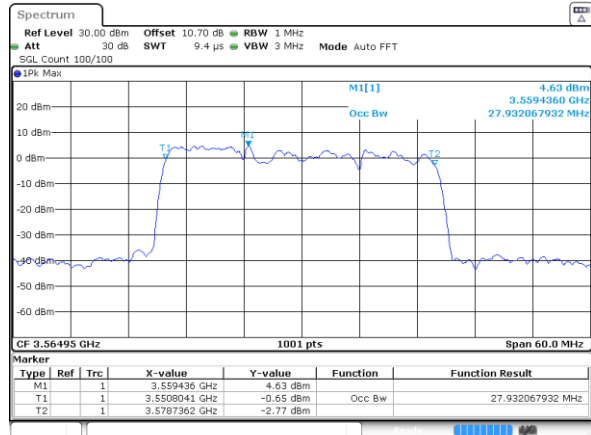


Date: 21.OCT.2020 16:01:17

Middle Channel / 5MHz+20MHz

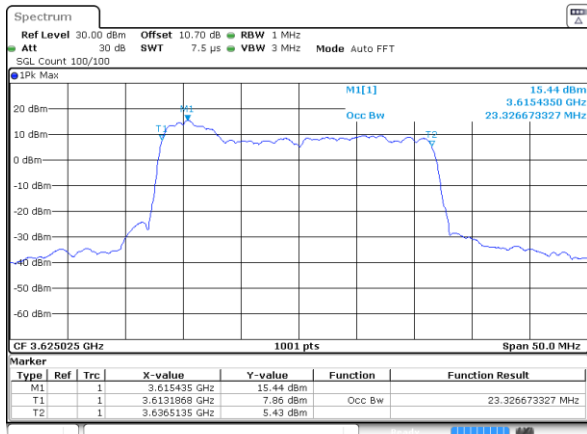


Date: 21.OCT.2020 15:47:19

Middle Channel / 10MHz+20MHz

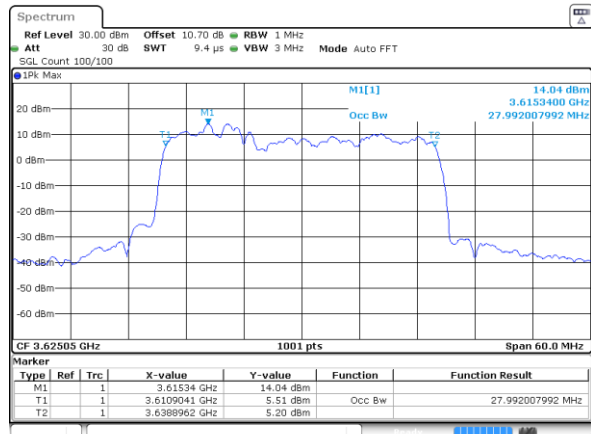


Date: 21.OCT.2020 16:04:12

Highest Channel / 5MHz+20MHz

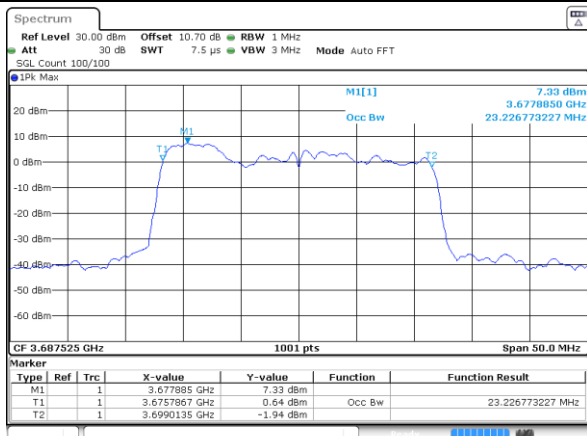

Date: 21.OCT.2020 15:49:30

Highest Channel / 10MHz+20MHz

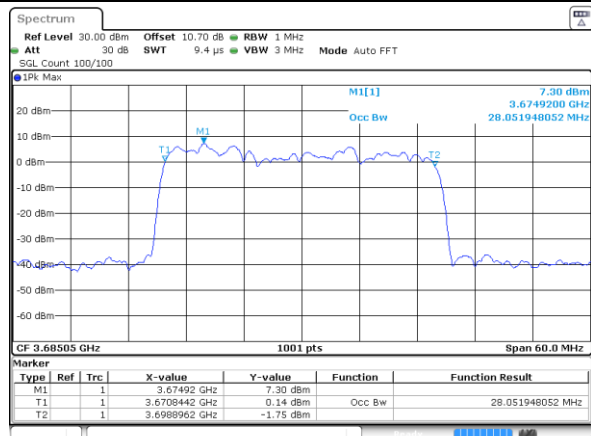


Date: 21.OCT.2020 16:05:20



LTE Band 48C


64QAM

Lowest Channel / 15MHz+20MHz

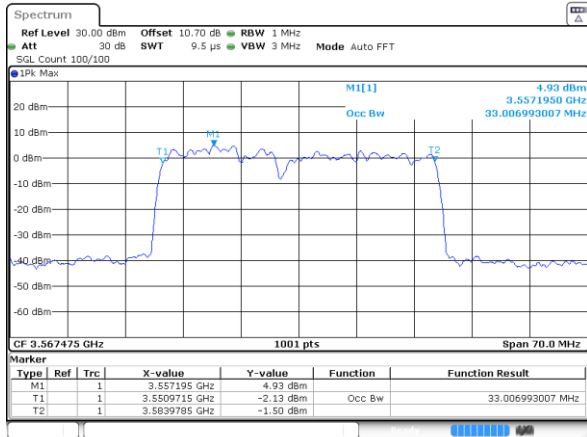


Date: 21.OCT.2020 16:10:22

Lowest Channel / 20MHz+5MHz

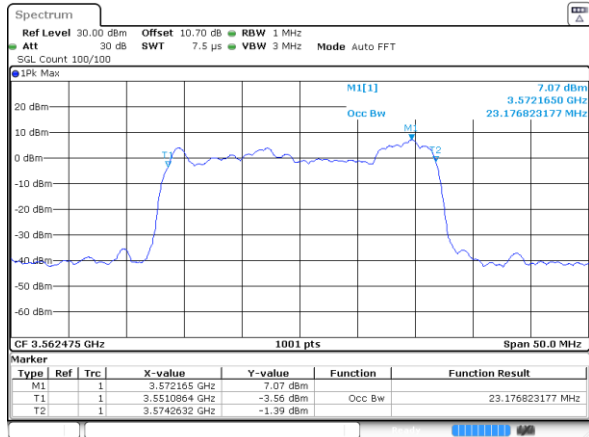


Date: 21.OCT.2020 15:53:55

Middle Channel / 15MHz+20MHz

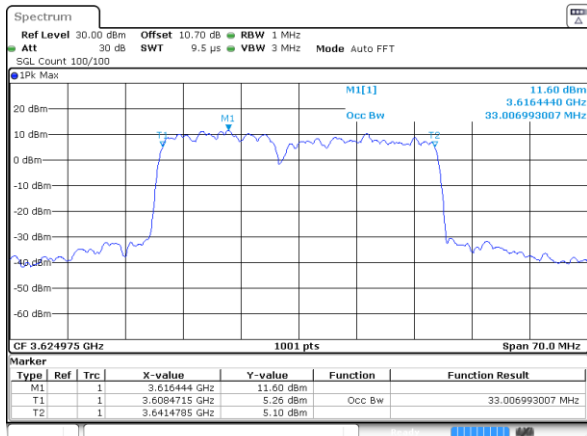


Date: 21.OCT.2020 16:11:50

Middle Channel / 20MHz+5MHz

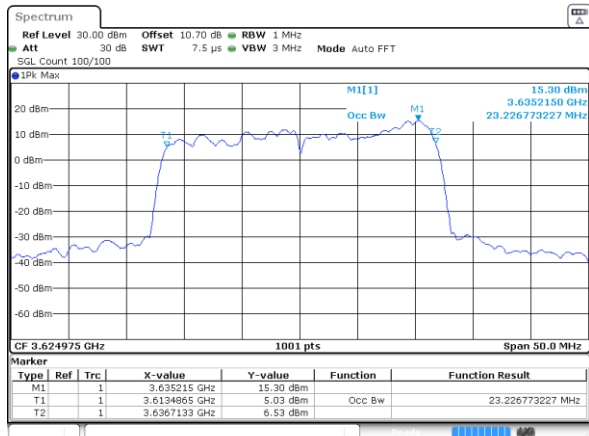


Date: 21.OCT.2020 15:55:21

Highest Channel / 15MHz+20MHz

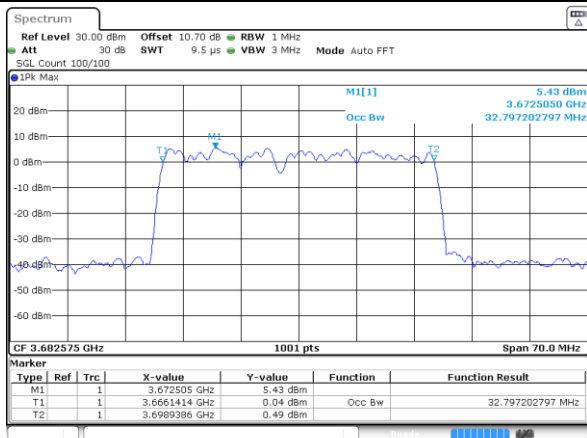

Date: 21.OCT.2020 16:16:42

Highest Channel / 20MHz+5MHz

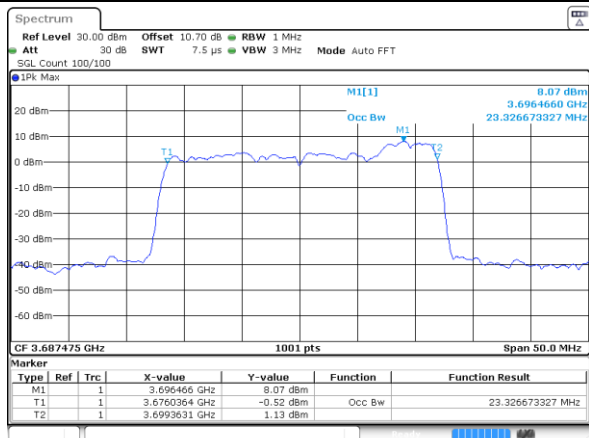

Date: 21.OCT.2020 15:58:58