


FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24


Report Reference No......: MWR150500301

FCC ID.....: **2AE2X688I**

Compiled by
(position+printed name+signature)..: File administrators Martin Ao



Supervised by
(position+printed name+signature)..: Test Engineer Martin Ao



Approved by
(position+printed name+signature)..: Manager Dixon Hao



Date of issue.....: Jun 29, 2015

Representative Laboratory Name. : **Maxwell International Co., Ltd.**

Address.....: Room 509,Hongfacenter building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name.....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address.....: Floor 1-A, Baisha Technology Park, No. 3011, Shahehexi Road, Nanshan,Shenzhen,China

Applicant's name.....: **AMS Communications Inc**

Address.....: 11029 Harry Hines Blvd,Suite B 118,Dallas Tx 75229,USA

Test specification.....:

Standard.....: **FCC Part 22: PUBLIC MOBILE SERVICES**

FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

TRF Originator.....: Maxwell International Co., Ltd.

Master TRF.....: Dated 2011-05

Maxwell International Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material.
Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **2G Smart Phone**

Trade Mark.....: SOHO

Manufacturer.....: **Begin Industrial(HK)CO.,Ltd**

Model/Type reference.....: 688I

Listed Models: /

Ratings.....: DC 3.70V

Modulation: GMSK for GSM/GPRS

GPRS.....: Supported

Hardware version.....: T6_T_V9.18 2015-04-08

Software version: 688I_V1.0

Frequency.....: GSM 850MHz; PCS 1900MHz;

Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR150500301	Jun 29, 2015
		Date of issue

Equipment under Test : **2G Smart Phone**

Model /Type : 688I

Listed Models : /

Applicant : **AMS Communications Inc**

Address : 11029 Harry Hines Blvd,Suite B 118,Dallas Tx 75229,USA

Manufacturer : **Begin Industrial(HK)CO.,Ltd**

Address : 5 floor shanghe community no A111-0022, BAOAN
DISTRICT, SHENZHEN CITY, CHINA

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks.....	5
2.2. Product Description.....	5
2.3. Equipment under Test.....	5
2.4. Short description of the Equipment under Test (EUT).....	6
2.5. Internal Identification of AE and EUT used during the test.....	6
2.6. Normal Accessory setting.....	7
2.7. EUT configuration.....	7
2.8. Related Submittal(s) / Grant (s).....	7
2.9. Modifications.....	7
2.10. General Test Conditions/Configurations.....	7
2.11. Note.....	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory.....	8
3.2. Test Facility.....	8
3.3. Environmental conditions.....	8
3.4. Statement of the measurement uncertainty.....	8
3.5. Test Description.....	9
3.6. Equipments Used during the Test.....	10
4. TEST CONDITIONS AND RESULTS	12
4.1. OUTPUT POWER.....	12
4.2. Radiated Spurious Emssion.....	16
4.3. Occupied Bandwidth And Emission Bandwidth.....	20
4.4. Band Edge Compliance.....	25
4.5. Spurious Emssion on Antenna Port.....	28
4.6. Frequency Stability Test.....	36
5. TEST SETUP PHOTOS OF THE EUT	38

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-12 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-12 Edition\)](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[KDB971168 D01 Power Meas License Digital Systems v02r02](#): Measurement Guidance for Certification of Licensed Digital Transmitters

[FCC Part 2](#): FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[ANSI C63.4:2003](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	May10, 2015
Testing commenced on	:	May11, 2015
Testing concluded on	:	Jun 28, 2015

2.2. Product Description

The **AMS Communications Inc's** Model: 688I or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	2G Smart Phone
Model Number	688I
FCC ID	2AE2X688I
Modulation Type	GMSK for GSM/GPRS;
Antenna Type	Internal
GSM/EDGE/GPRS	Supported GSM/GPRS;
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM Operation Frequency Band	GSM 850MHz/ PCS 1900MHz
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
WLAN	Supported 802.11b/802.11g/802.11n
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
ANT	GSM850: -1.8dbi,PCS1900: -2.3dbi,WIFI:0dBi

Note:

1..The EUT is Dual SIM,But The two SIMs cannot use synchronization and only one can use for each time.and we tested two SIMs and recorded the worst data at SIM1

2.The G sensor cannot use as power reduction instead of proximity sensor, which only used as screen orientation or compass etc

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V

Test frequency list

Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz
Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
GSM1900	TX	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

2.4. Short description of the Equipment under Test (EUT)

2.4.1 General Description

688I is subscriber equipment in the GSM system. The GSM/GPRS frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 and PCS1900 bands test data included in this report. The 2G Smart Phone implements such functions as RF signal receiving/transmitting, GSM/GPRS protocol processing, voice, video MMS service etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides WIFI function.

2.4.2 Technical Specification

Characteristics	Description	
Radio System Type	<input checked="" type="checkbox"/> GSM/ <input type="checkbox"/> UMTS	
Supported Frequency Range	GSM850	Transmission(TX): 824 to 849MHz
		Receiving(RX): 869 to 894MHz
	GSM1900	Transmission(TX): 1850 to 1910MHz
		Receiving(RX): 1930 to 1990MHz
TX and RX Antenna Ports	TX& RX port:	1
Supported Channel Bandwidth Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	GSM system:	200 kHz
	GSM850:	248KGXW
	GSM1900:	247KGXW

2.5. Internal Identification of AE and EUT used during the test

AE ID*	Description
AE1	Adapter

AE1

Model: 688I

INPUT: 100-240V 50/60Hz 0.15A

OUTPUT: DC 5.0V,600mAh

*AE ID: is used to identify the test sample in the lab internally.

IMEI Code	
EUT	354769059067894
	354769059067895

2.6. Normal Accessory setting

Fully charged battery was used during the test.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AE2X688I** filing to comply with FCC Part 22 and Part 24 Rules

2.9. Modifications

No modifications were implemented to meet testing criteria.

2.10. General Test Conditions/Configurations

2.10.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM, GMSK modulation
GSM/TM2	GSM system, GPRS, GMSK modulation

2.10.2 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.4V
	VN	3.7V
	VH	4.2V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature

2.11. Note

1. The EUT is a **2G Smart Phone** with GSM/GPRS and Bluetooth function, The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS	FCC Part 22/FCC Part 24	MWR150500301
WIFI	FCC Part 15 C 15.247	MWR150500302
USB Port	FCC Part 15 B	MWR150500303
SAR	FCC Part 2 §2.1093	MWR150500304

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, Dec 19, 2013

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTL Testing Technology Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 9KHz-30MHz	2.88 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

3.5. Test Description

3.5.1 Cellular Band (824-849MHz paired with 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP $\leq 7W$.	Pass
Conducted Power Output Power	KDB971168§5.0	No limit.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	$\leq -13dBm/1\%EBW$, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: $\leq -13dBm/100kHz$, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: $\leq -13dBm/100kHz$.	Pass
Frequency Stability	§2.1055, §22.355	$\leq \pm 2.5ppm$.	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".			

3.5.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP $\leq 2W$	Pass
Conducted Power Output Power	KDB971168§5.0	No limit.	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC: Limits $\leq 13dB$	N/A
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	$\leq -13dBm/1\%EBW$, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	$\leq -13dBm/1MHz$, from 9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	$\leq -13dBm/1MHz$.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".			

Remark:

- The measurement uncertainty is not included in the test result.
- N/A standfor "Not applicable" or "not required For some reasons" For example, Peak-Average Ratio is not required for that the power is measured by peak "

3.6. Equipments Used during the Test

Output Power(Conducted) & Occupied Bandwidth & Emission Bandwidth & Band Edge Compliance & Conducted Spurious Emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/06/21	2015/06/20
					2015/05/22	2016/05/21
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
3	Splitter	Mini-Circuit	ZAPD-4	400059	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
4	RF cable 1	MURATA	MXHS83QE3000 (9KHz-26.5G)	1420355	2014/10/19	2015/10/18
5	RF cable 2	MURATA	MXHS83QE3000 (9KHz-26.5G)	1420356	2014/10/19	2015/10/18
6	Power meter	Rohde & Schwarz	NRVD	260540	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
7	Power Sensor	Rohde&Schwarz	NRR-Z81	256697	2014/06/21	2015/06/20
					2015/05/20	2016/05/19

Frequency Stability						
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/06/21	2015/06/20
					2015/05/22	2016/05/21
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
3	Climate Chamber	ESPEC	EL-10KA	05107008	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
4	Splitter	Mini-Circuit	ZAPD-4	400059	2014/06/21	2015/06/20
					2015/05/20	2016/05/19
5	RF cable 1	MURATA	MXHS83QE3000 (9KHz-26.5G)	1420355	2014/10/19	2015/10/18

Output Power (Radiated) & Radiated Spurious Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/05/19	2016/05/18
2	Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2015/05/19	2016/05/18
3	EMI TEST Receivcer	Rohde&Schwarz	ESCI3	103710	2014/07/02 2015/06/02	2015/07/01 2016/06/01
4	EMI TEST Software	Audix	E3	N/A	N/A	N/A
5	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A	N/A
6	HORN ANTENNA	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
7	HORN ANTENNA	Sunol Sciences Corp.	DRH-118	A062014	2015/05/19	2016/05/18
8	Amplifer	HP	8447D	3113A07663	2015/05/19	2016/05/18
9	Preamplifier	HP	8349B	3155A00882	2015/05/19	2016/05/18
10	Amplifer	Compliance Direction systems	PAP1-4060	129	2015/05/19	2016/05/18
11	Active Loop Antenna	Daze	ZN30900A	N/A	2015/05/19	2016/05/18
12	TURNTABLE	MATURO	TT2.0	N/A	N/A	N/A
13	ANTENNA MAST	UC	UC3000	----	N/A	N/A
14	Horn Antenna	SCHWARZBECK	BBHA9170	25849	2015/05/19	2016/05/18
15	Horn Antenna	SCHWARZBECK	BBHA9170	25850	2015/05/19	2016/05/18
16	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2015/05/20	2016/05/19
17	Signal Generator	Rohde&Schwarz	SMF100A	101932	2014/06/21 2014/06/21	2015/06/20 2015/06/20
18	UNIVERSAL RADIO COMMUNICATI ON	Rohde&Schwarz	CMU200	112012	2015/05/22	2016/05/21
19	Splitter	Mini-Circuit	ZAPD-4	400062	2014/06/22	2016/05/21
20	Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M (9KHz-26.5G)	10m	2014/10/19	2015/10/18
21	Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M (9KHz-26.5G)	3m	2014/10/19	2015/10/18

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS


4.1. OUTPUT POWER

TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1. Conducted Output Power

TEST CONFIGURATION

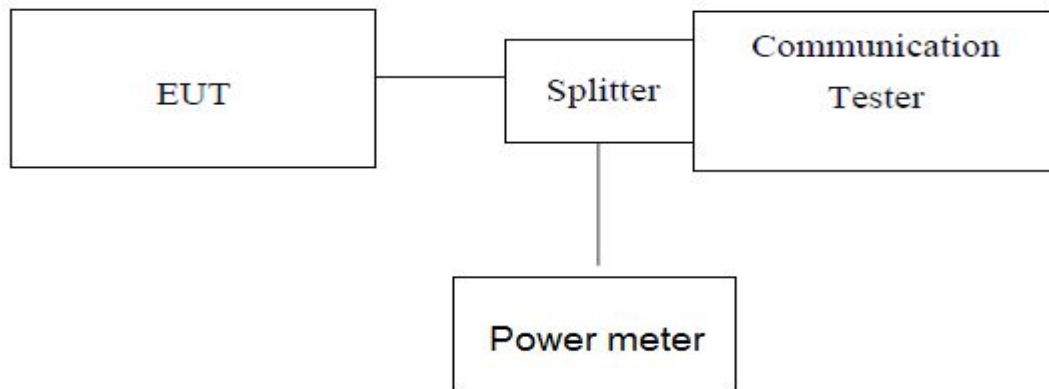

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum PK burst power and maximum Avg. burst power.
6. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST CONDITION

RBW	VBW	Sweep Time	Span
1MHz	3MHz	300ms	10MHz

GSM850			
Function	Power step	Power & Multislot class	Operation class
GSM	5	4	/
GPRS	3	12	B

PCS1900			
Function	Power step	Power & Multislot class	Operation class
GSM	0	1	/
GPRS	3	12	B

TEST RESULTS

GSM/TM1/GSM850(GMSK)			
Frequency (MHz)	Power Step	Peak (dBm)	Burst AV(dBm)
824.20	5	31.45	31.01
836.60	5	32.06	31.56
848.80	5	32.24	31.71

GSM/TM2/GPRS850(GMSK,1Slot)			
Frequency (MHz)	Power Step	Peak (dBm)	Burst AV(dBm)
824.20	3	31.47	31.03
836.60	3	32.01	31.54
848.80	3	32.24	31.69

GSM/TM1/PCS1900(GMSK)			
Frequency (MHz)	Power Step	Peak (dBm)	Burst AV(dBm)
1850.20	0	28.95	28.45
1880.00	0	29.59	29.07
1909.80	0	29.65	29.06

GSM/TM2/GPRS1900(GMSK,1Slot)			
Frequency (MHz)	Power Step	Peak (dBm)	Burst AV(dBm)
1850.20	3	29.03	28.54
1880.00	3	29.56	29.04
1909.80	3	29.57	29.14


4.1.2. Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

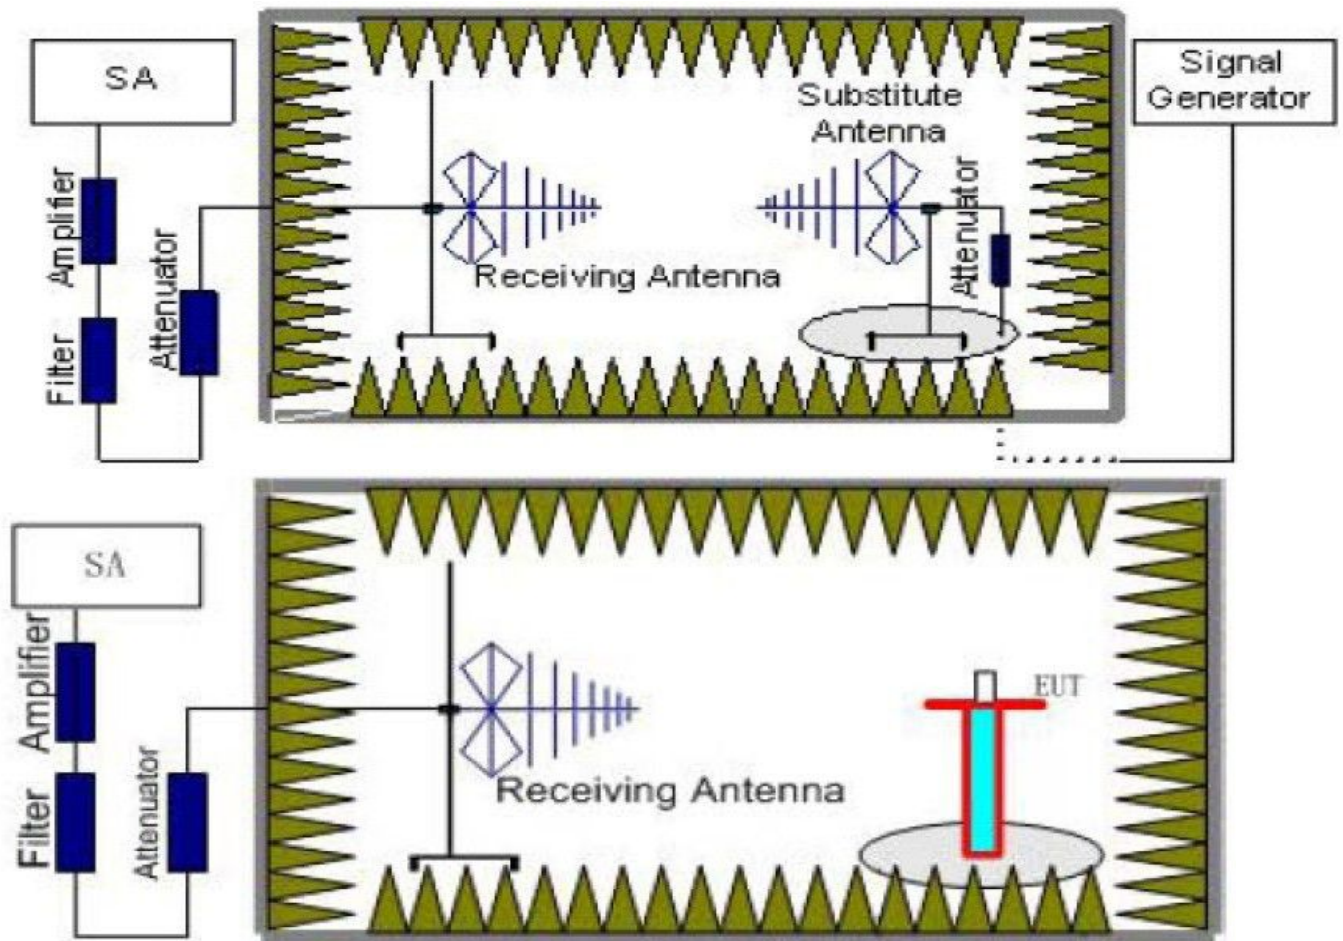

TEST PROCEDURE

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the

frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST LIMIT

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

GSM850(GPRS850,EDGE850)		
Function	Power Step	Burst Peak ERP (dBm)
GSM	5	$\leq 38.45\text{dBm}$ (7W)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)

PCS1900(GPRS1900,EDGE1900)		
Function	Power Step	Burst Peak EIRP (dBm)
GSM	0	$\leq 33\text{dBm}$ (2W)
GPRS	3	$\leq 33\text{dBm}$ (2W)

TEST RESULTS

GSM/TM1/GSM850			GSM/TM2/GPRS850	
Frequency (MHz)	ERP (dBm)	Polarization	ERP (dBm)	Polarization
824.20	27.18	V	27.10	V
836.60	27.51	V	27.45	V
848.80	26.96	V	26.91	V
824.20	18.10	H	17.98	H
836.60	18.75	H	18.06	H
848.80	18.74	H	17.05	H


GSM/TM1/ PCS1900			GSM/TM2/ GPRS1900	
Frequency (MHz)	EIRP (dBm)	Polarization	EIRP (dBm)	Polarization
1850.20	26.04	V	25.97	V
1880.00	26.93	V	26.85	V
1909.80	26.48	V	26.39	V
1850.20	17.68	H	15.97	H
1880.00	18.13	H	16.05	H
1909.80	18.06	H	15.87	H

4.2. Radiated Spurious Emission

TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

TEST CONFIGURATION

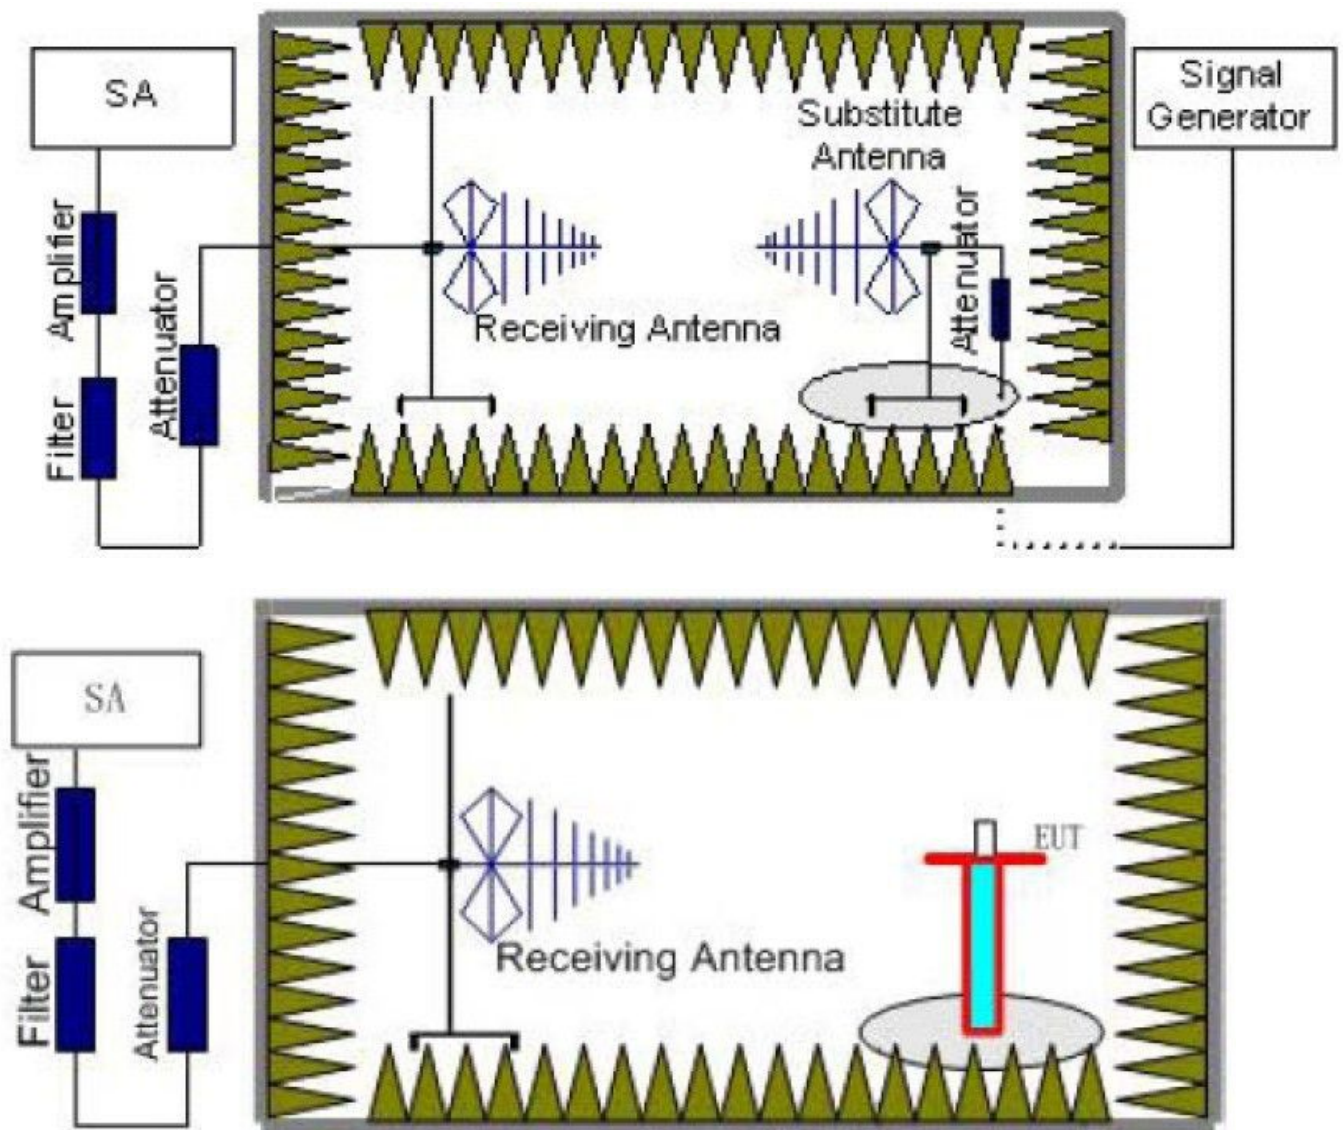

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
TM1/GSM 850	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
TM1/GSM 1900	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0

dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
TM1/GSM 850	Low	9KHz-10GHz	PASS
	Middle	9KHz -10GHz	PASS
	High	9KHz -10GHz	PASS
TM1/GSM 1900	Low	9KHz -20GHz	PASS
	Middle	9KHz -20GHz	PASS
	High	9KHz -20GHz	PASS

GSM/TM1/GSM850							
Channel Number: 128					Test Frequency: 824.20 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction Gain (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1648.40	-38.26	4.32	6.77	2.15	-37.96	-13.00	H
1648.40	-34.97	4.32	6.77	2.15	-34.67	-13.00	V

GSM/TM1/GSM850							
Channel Number: 190					Test Frequency: 836.60 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction Gain (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1673.20	-36.81	4.55	6.77	2.15	-36.74	-13.00	H
1673.20	-34.4	4.55	6.77	2.15	-34.33	-13.00	V

GSM/TM1/GSM850							
Channel Number: 251					Test Frequency: 848.80 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction Gain (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1697.60	-39.67	4.29	6.83	2.15	-39.28	-13.00	H
1697.60	-37.17	4.29	6.83	2.15	-36.78	-13.00	V

GSM/TM1/PCS1900						
Channel Number: 512				Test Frequency: 1850.20 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3700.40	-44.67	4.55	12.34	-36.88	-13.00	H
3700.40	-49.72	4.55	12.34	-41.93	-13.00	V

GSM/TM1/PCS1900						
Channel Number: 661				Test Frequency: 1880.00 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3760.00	-42.64	4.55	12.40	-34.79	-13.00	H
3760.00	-48.77	4.55	12.40	-40.92	-13.00	V

GSM/TM1/PCS1900						
Channel Number: 810				Test Frequency: 1909.80 MHz		
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3819.60	-44.08	4.51	12.43	-36.16	-13.00	H
3819.60	-48.91	4.51	12.43	-40.99	-13.00	V


Note: 1. In general, the worse case attenuation requirement shown above was applied.

4.3. Occupied Bandwidth And Emission Bandwidth

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% BW.

TEST CONFIGURATION

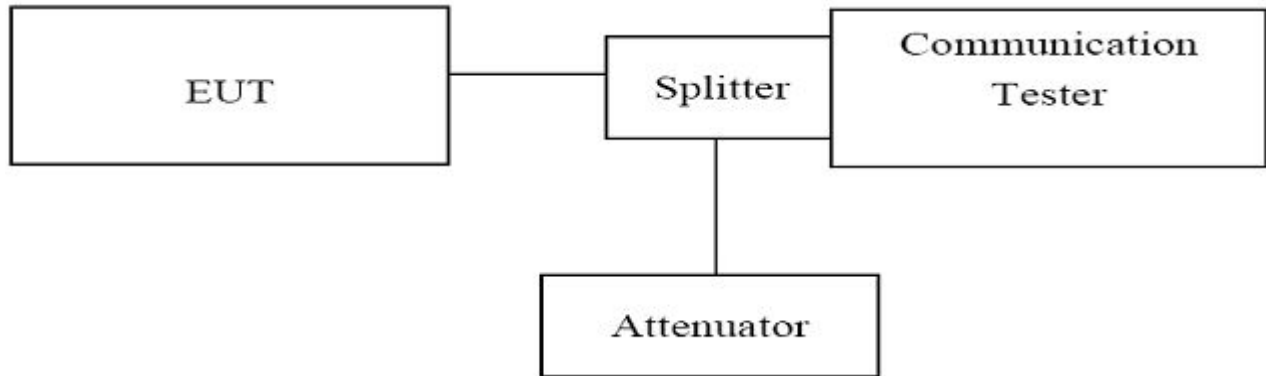

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth and Emission Bandwidth were measured with Spectrum Analyzer FSU26(peak);
3. Set RBW=10KHz,VBW=30KHz,Span=1MHz
4. Set SPA Max hold and View, Set 99% and -26dBc Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).


TEST RESULTS

GSM/TM1/GSM850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (KHz)		Verdict
		99% BW	-26dBc BW	
128	824.20	248.39	317.31	PASS
190	836.60	243.59	312.50	PASS
251	848.80	245.19	314.10	PASS

GSM/TM2/GPRS850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (KHz)		Verdict
		99% BW	-26dBc BW	
128	824.20	245.19	314.10	PASS
190	836.60	241.99	310.90	PASS
251	848.80	246.79	322.12	PASS


GSM/TM1/GSM1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (KHz)		Verdict
		99% BW	-26dBc BW	
512	1850.20	245.19	315.71	PASS
661	1880.00	246.79	314.10	PASS
810	1909.80	245.19	310.90	PASS

GSM/TM2/GPRS1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (KHz)		Verdict
		99% BW	-26dBc BW	
512	1850.20	246.79	314.10	PASS
661	1880.00	245.19	312.50	PASS
810	1909.80	245.19	320.51	PASS

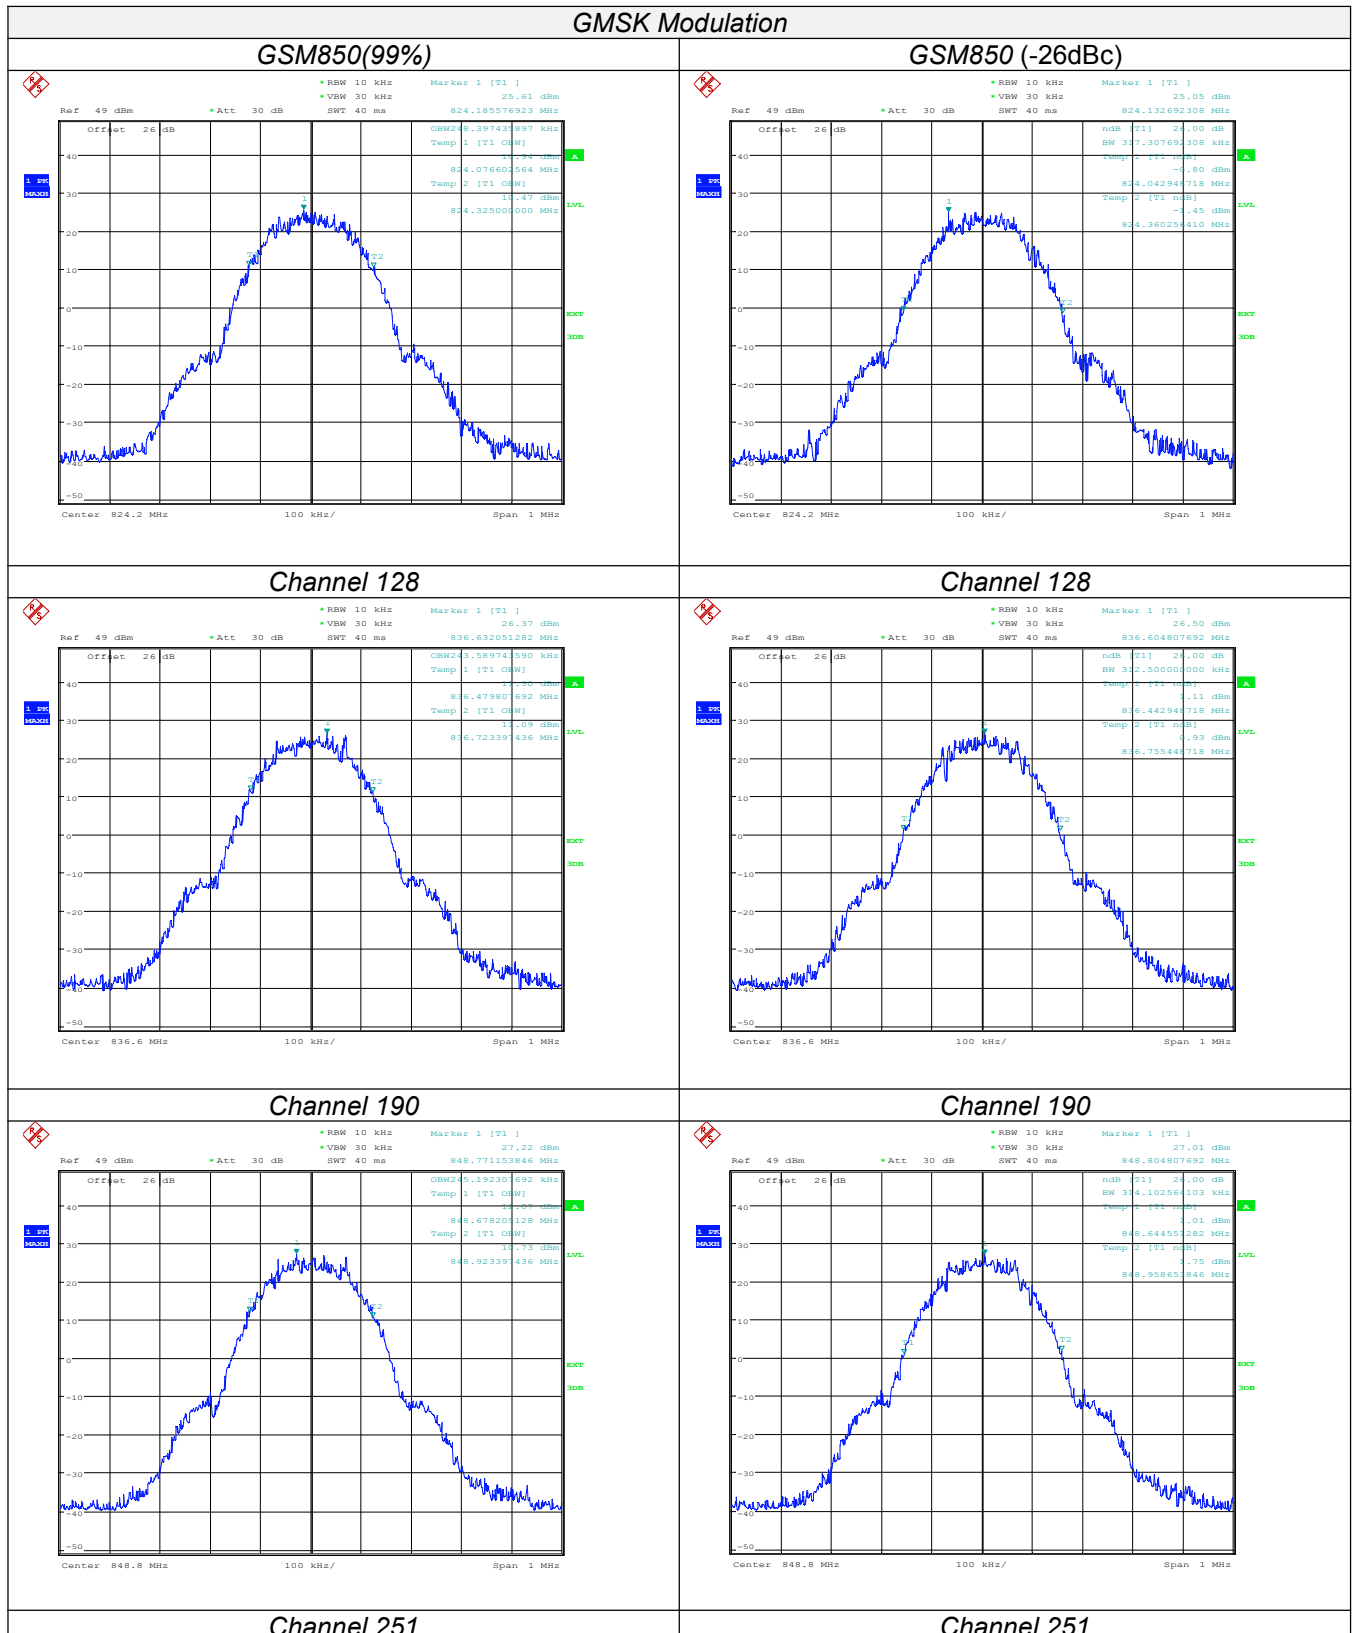


GPRS For GMSK Modulation


GPRS 850(99%)

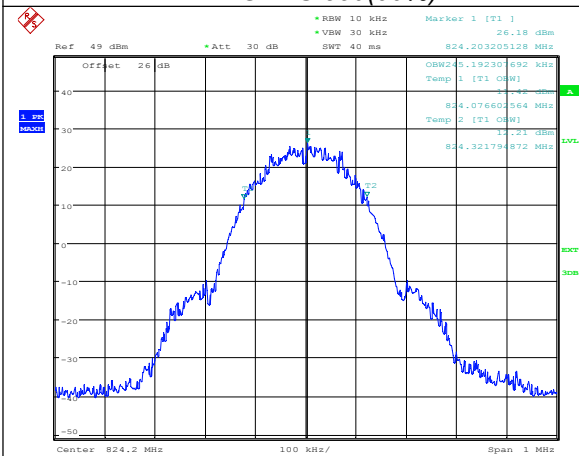


GPRS 850(-26dBc)

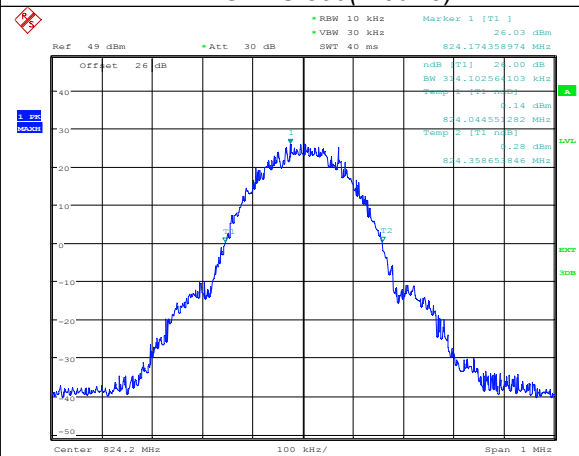


Channel 128

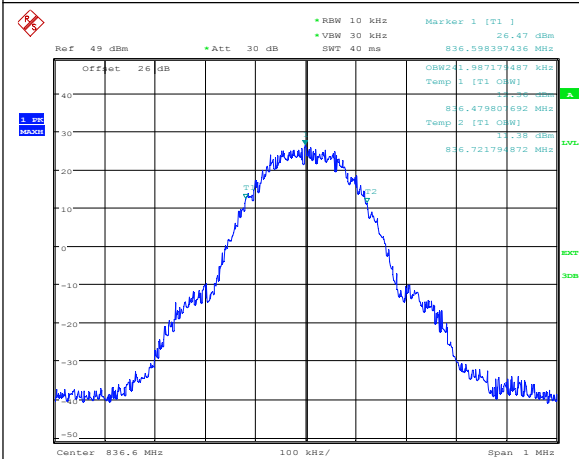


Channel 128

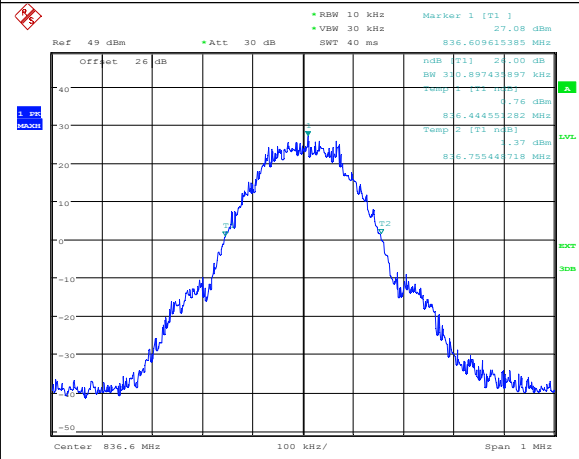

Channel 190

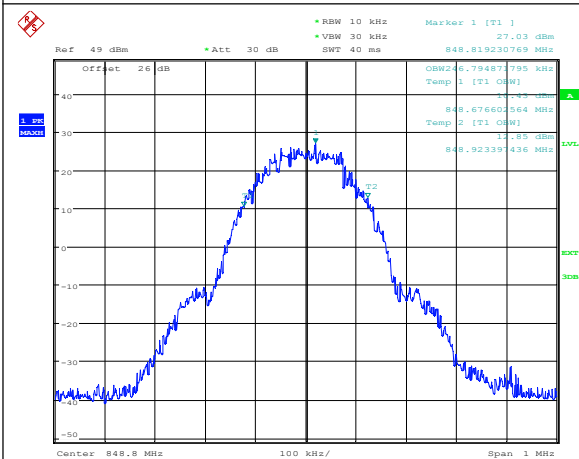

Channel 190

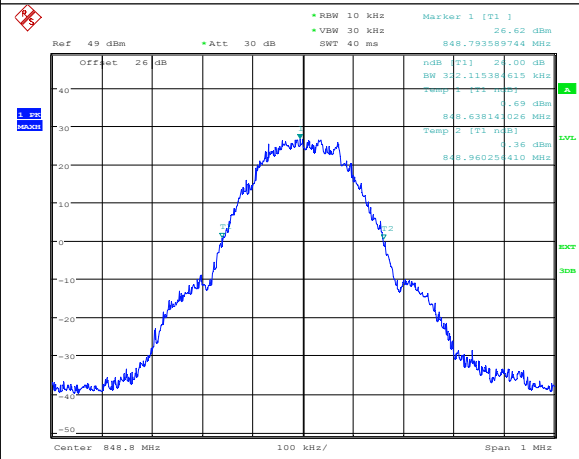


Channel 251


Channel 251

GMSK Modulation


GSM1900(99%)

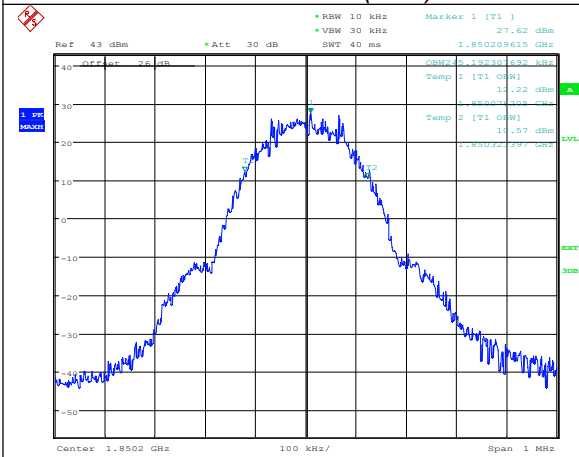


GSM1900(-26dBc)

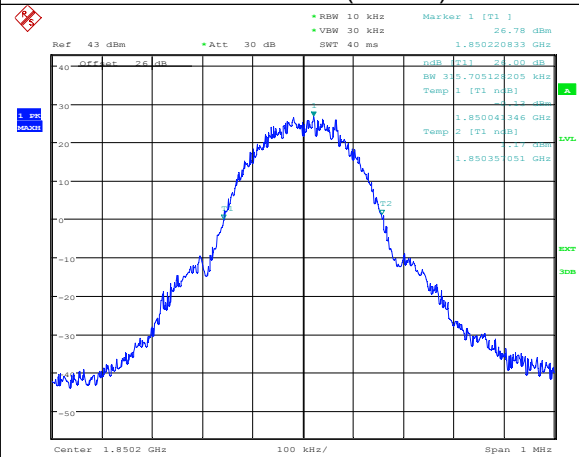


Channel 512

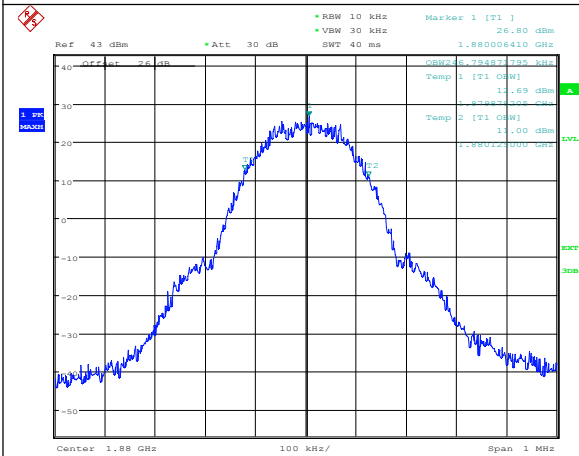


Channel 512

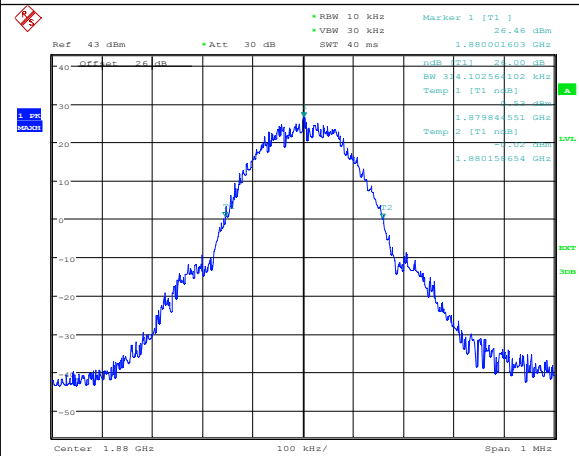

Channel 661

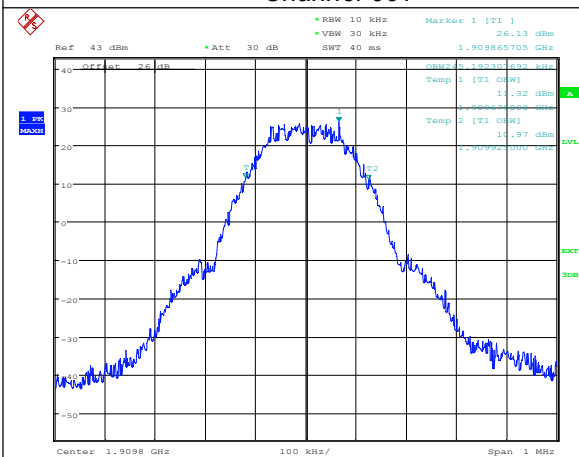

Channel 661

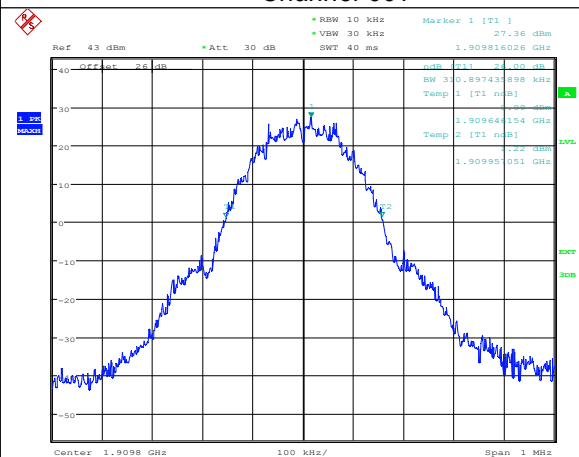


Channel 810


Channel 810

GPRS For GMSK Modulation


GPRS 1900(99%)

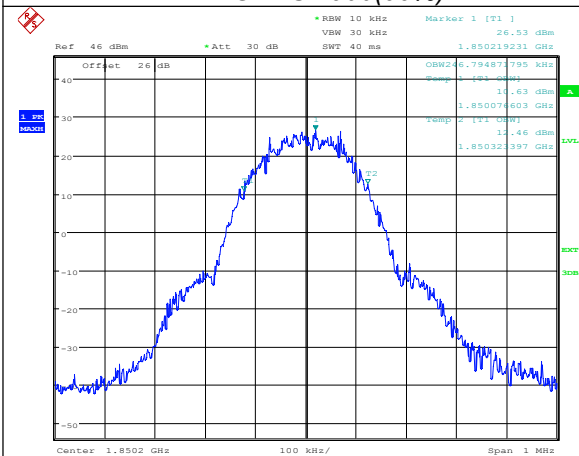


GPRS 1900 (-26dBc)

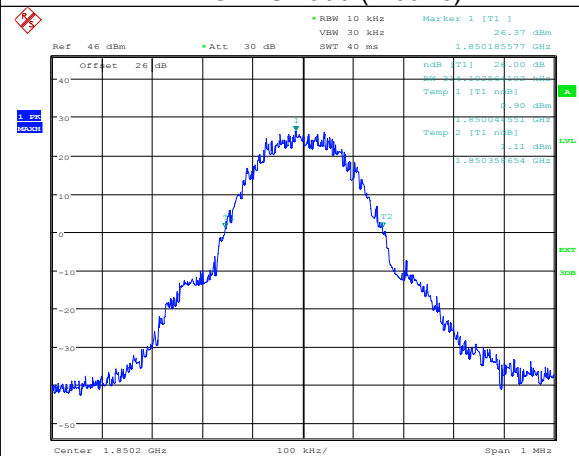


Channel 512

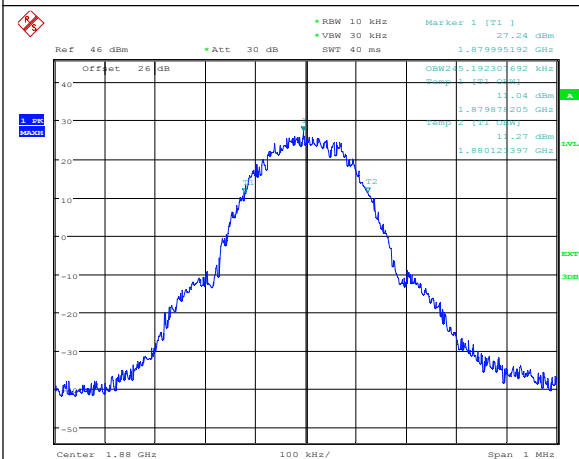


Channel 512

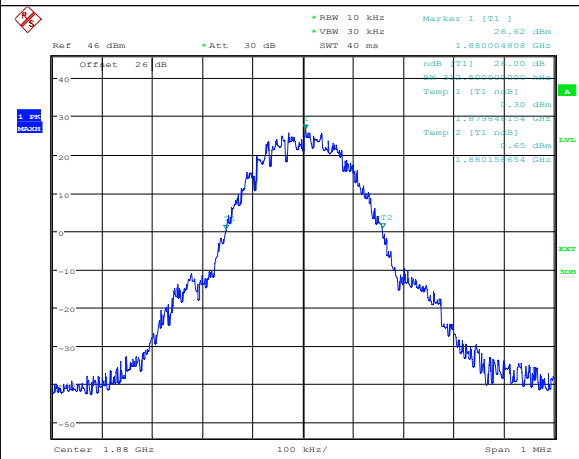

Channel 661

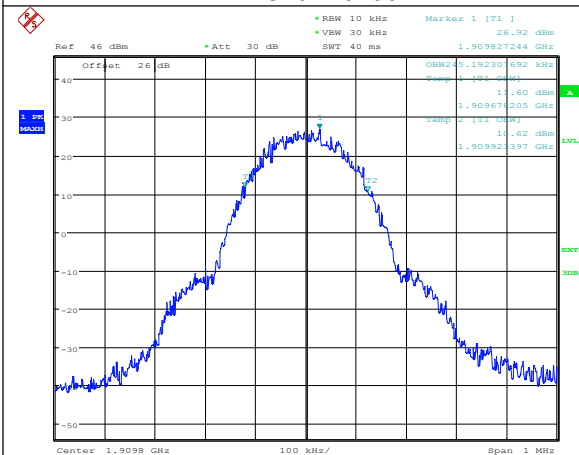

Channel 661

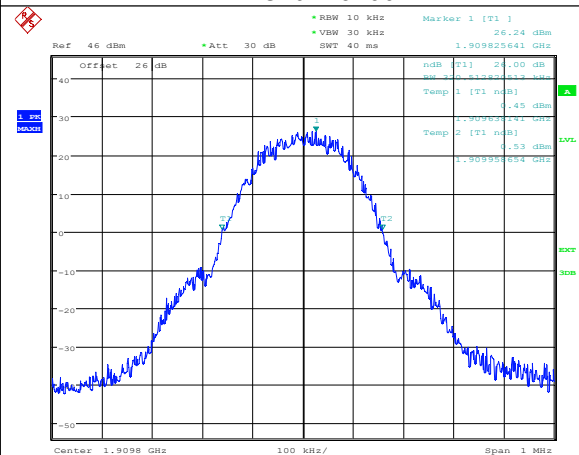

Channel 810


Channel 810

4.4. Band Edge Compliance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation.



TEST CONFIGURATION

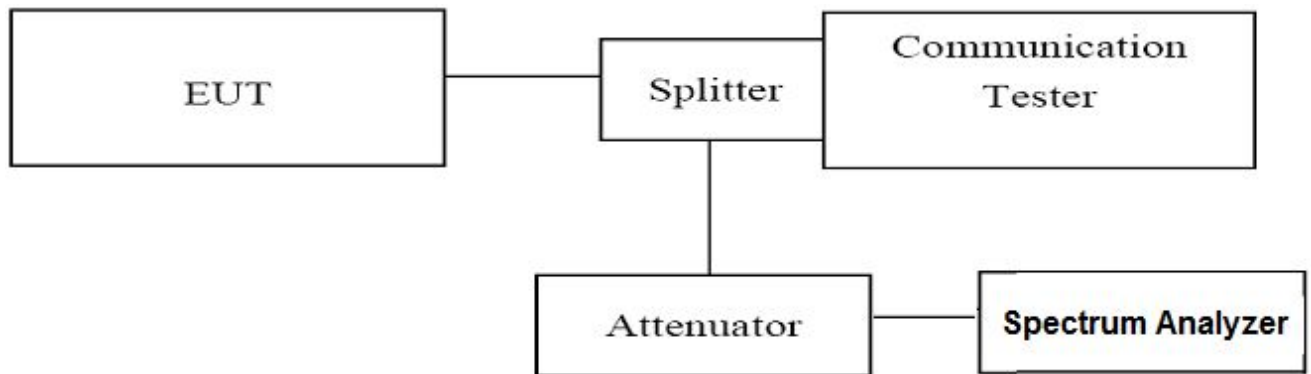


TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Spectrum Analyzer FSU26;
3. Set RBW=5KHz,VBW=10KHz,Span=2MHz;
1. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (bottom, middle and top of operational frequency range).

TEST RESULTS

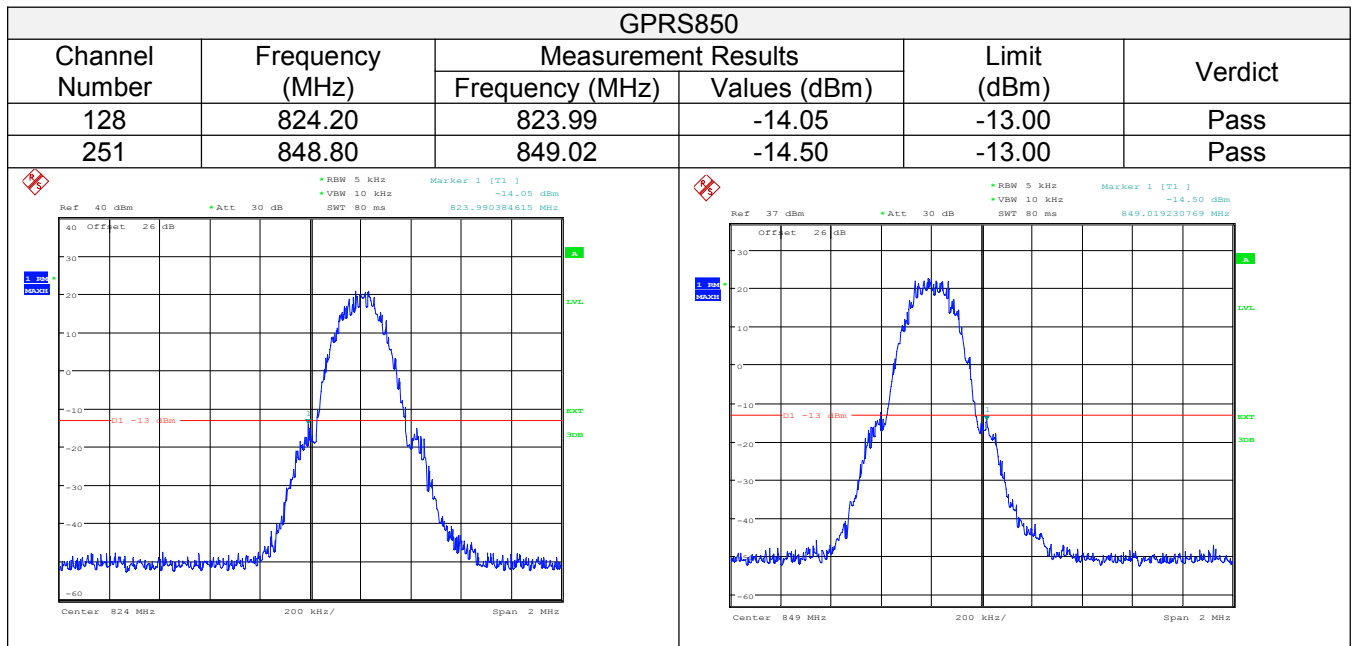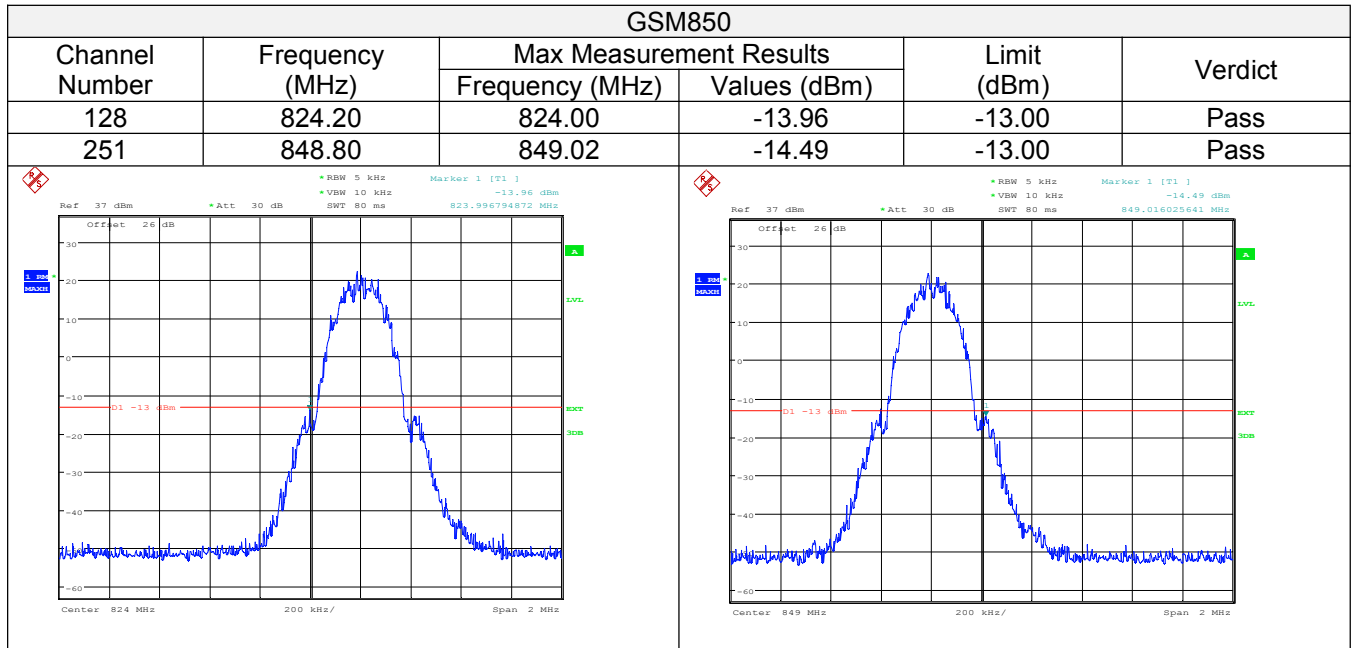

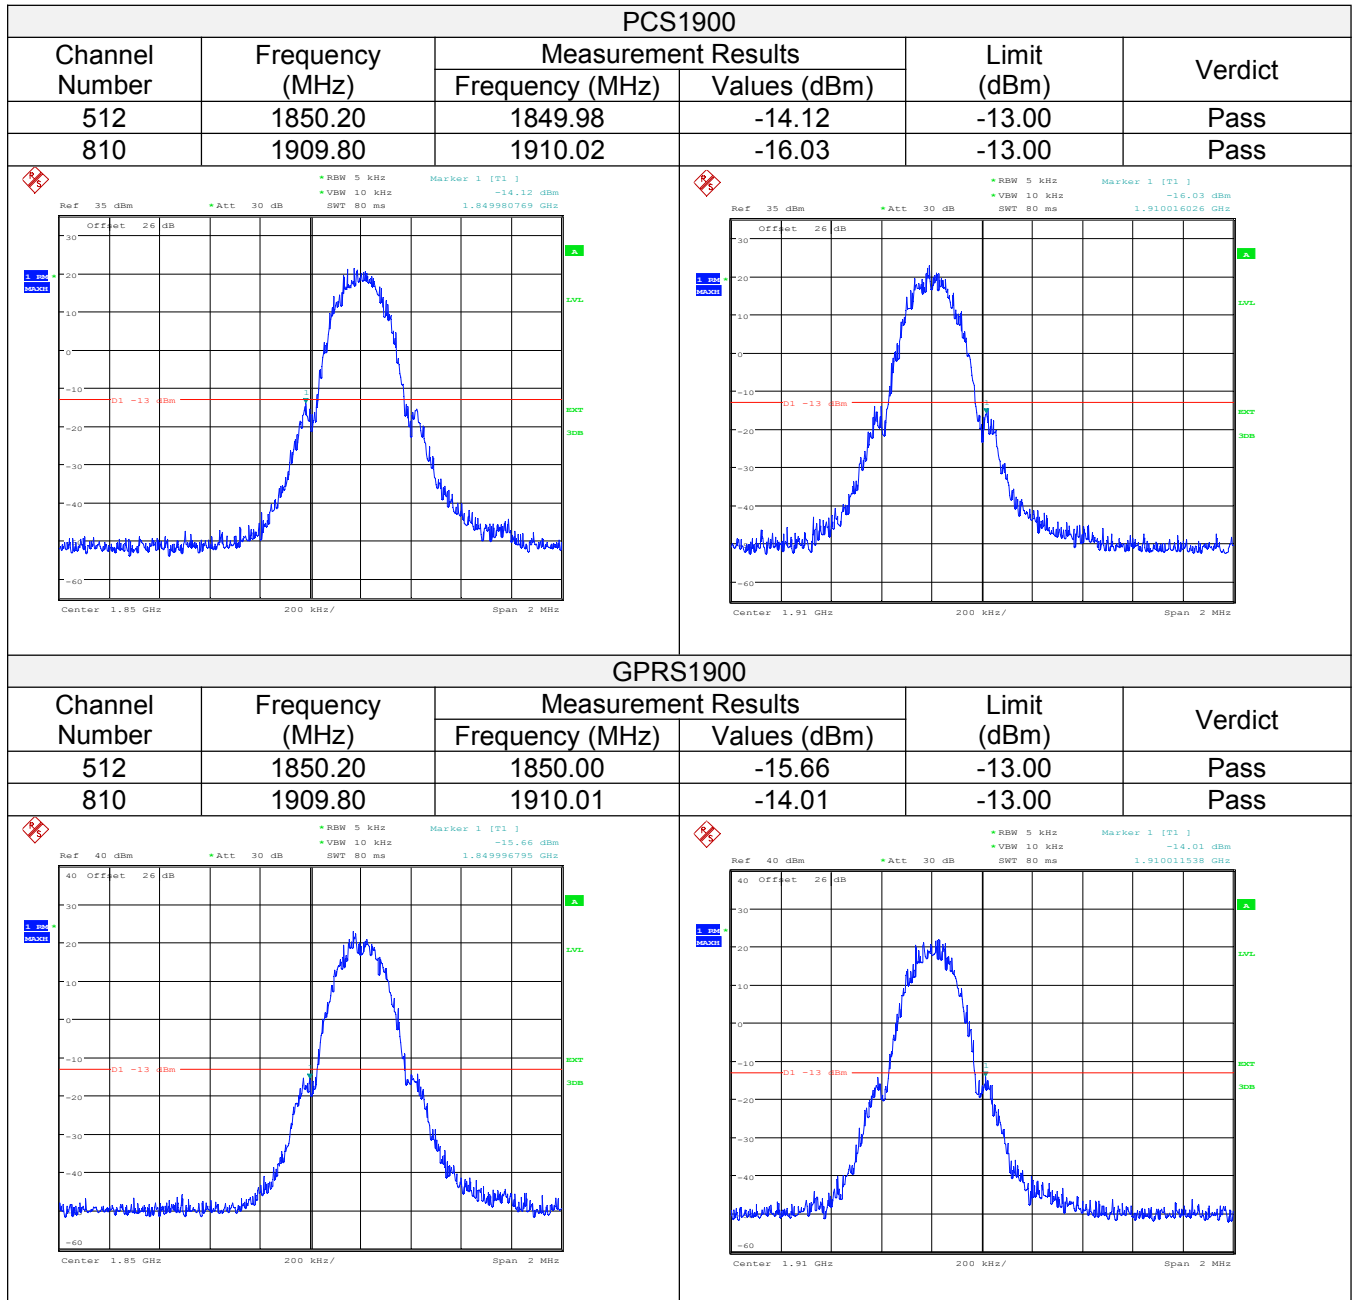


4.5. Spurious Emission on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 12.75 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

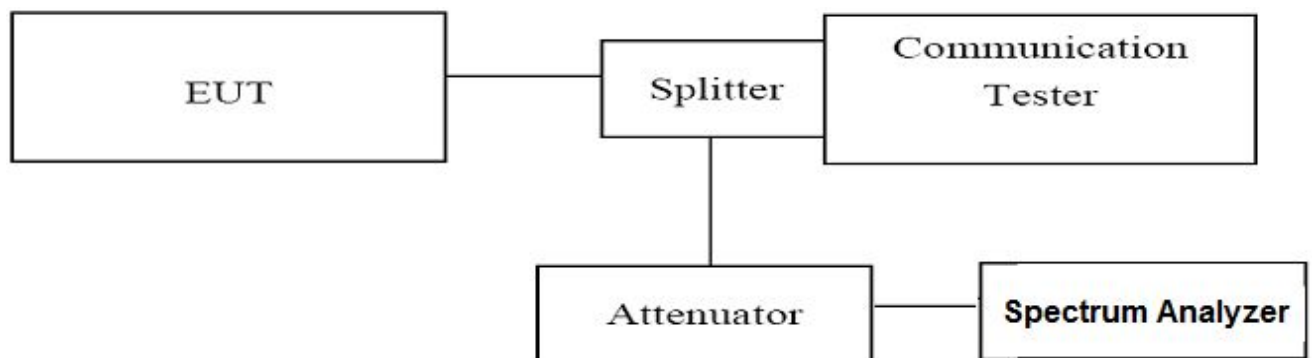

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Spectrum Analyzer FSU26;
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST RESULTS

1.5.1 For GSM850 Test Results


A. Test Verdict


Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
GSM/TM1/GSM850 /128	824.20	30MHz-1GHz	-13.00	PASS
		1GHz-5GHz	-13.00	PASS
		5GHz-10GHz	-13.00	PASS
GSM/TM1/GSM850 /190	836.60	30MHz-1GHz	-13.00	PASS
		1GHz-5GHz	-13.00	PASS
		5GHz-10GHz	-13.00	PASS
GSM/TM1/GSM850 /251	848.80	30MHz-1GHz	-13.00	PASS
		1GHz-5GHz	-13.00	PASS
		5GHz-10GHz	-13.00	PASS


Note: 1. In general, the worse case attenuation requirement shown above was applied.

2."---" means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots

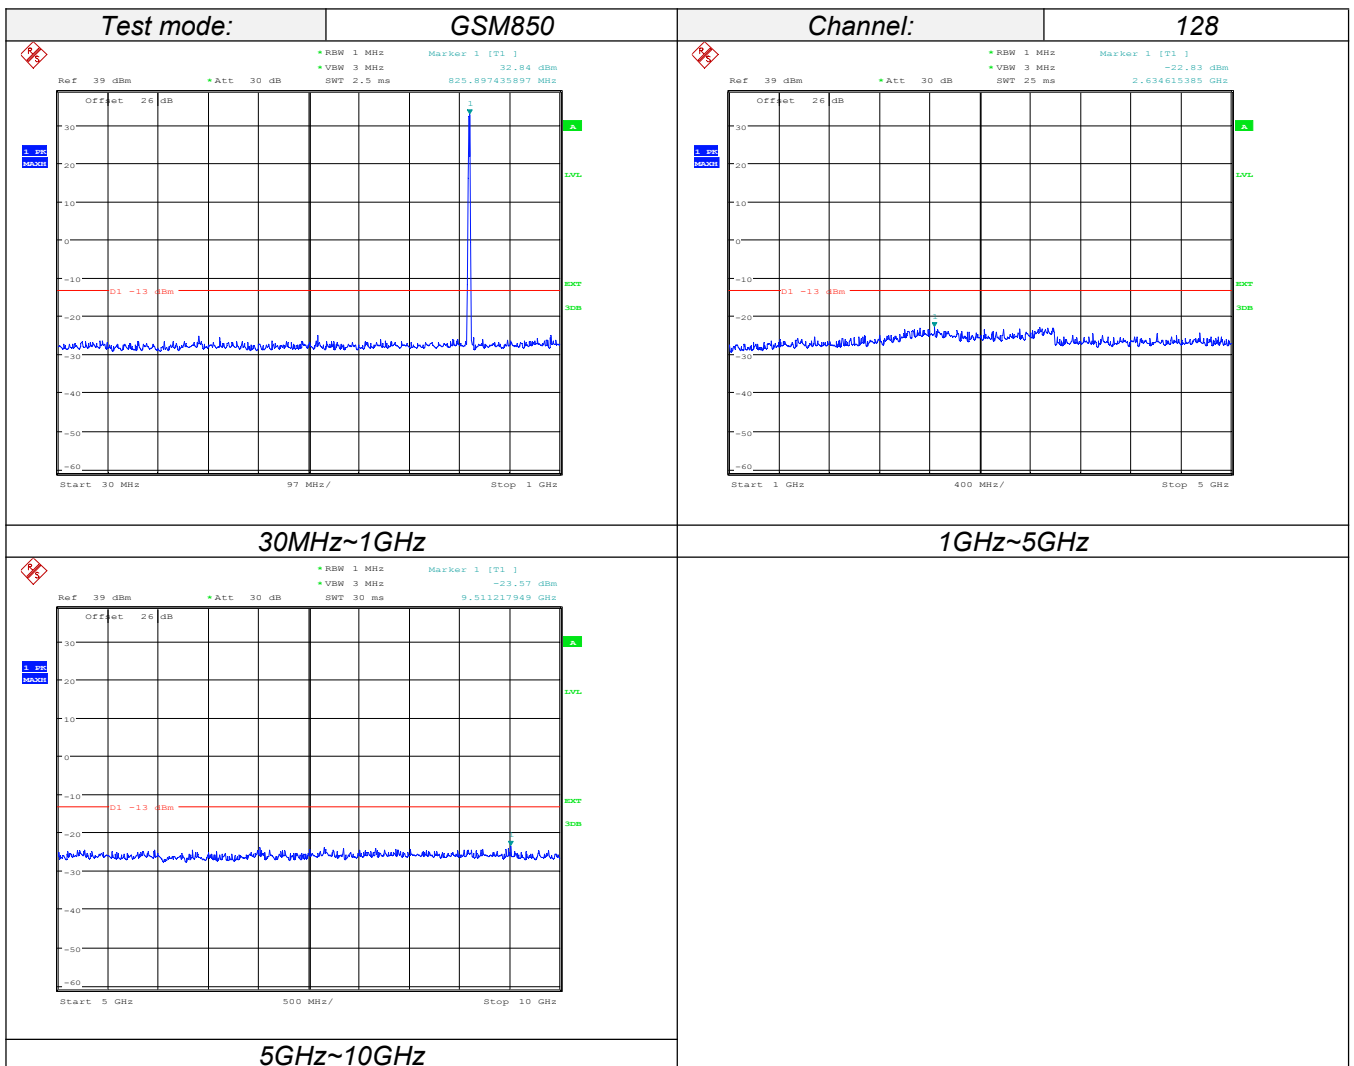

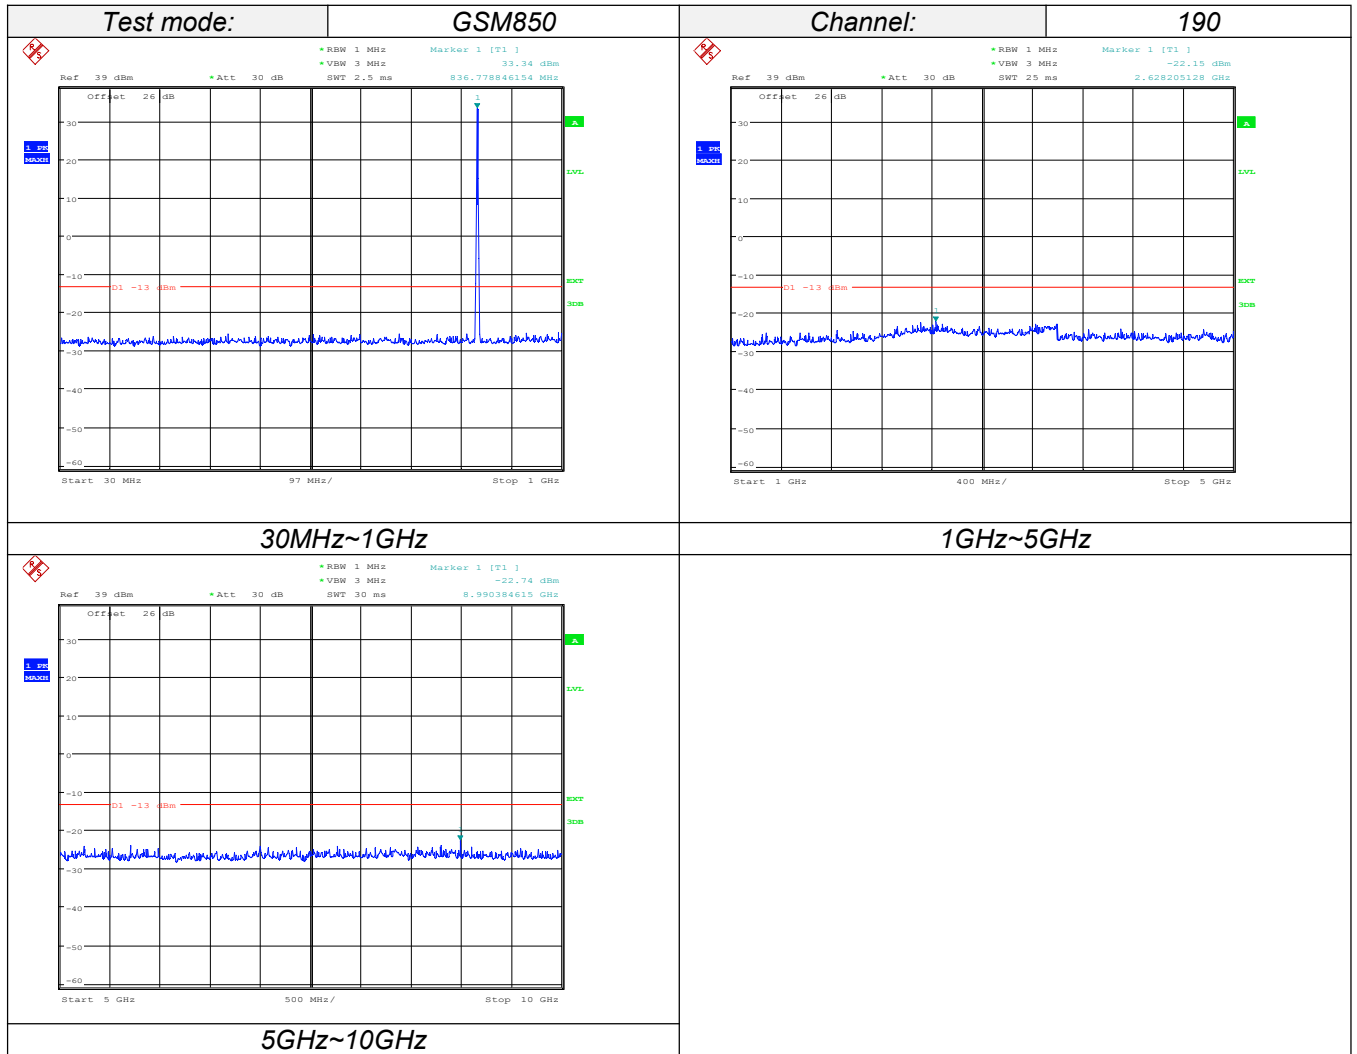

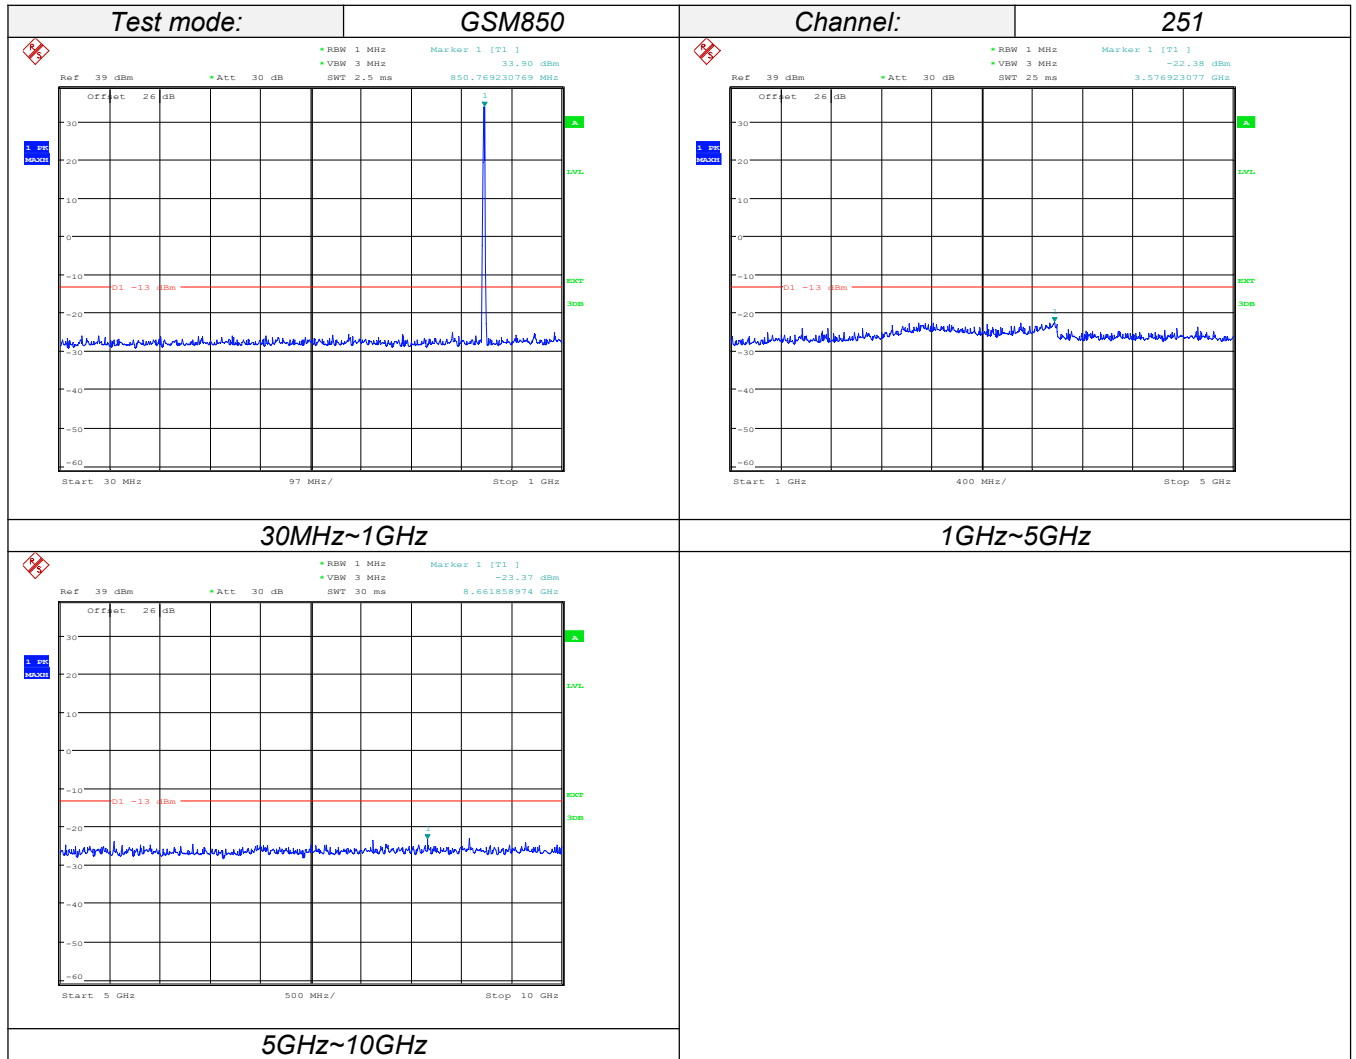

1.5.2 For GSM1900 Test Results


A. Test Verdict


Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
GSM/TM1/GSM1900 /512	1850.20	30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
		2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS
GSM/TM1/GSM1900 /661	1880.00	30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
		2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS
GSM/TM1/GSM1900 /810	1909.80	30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
		2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS


Note: 1. In general, the worse case attenuation requirement shown above was applied.

2."---" means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots

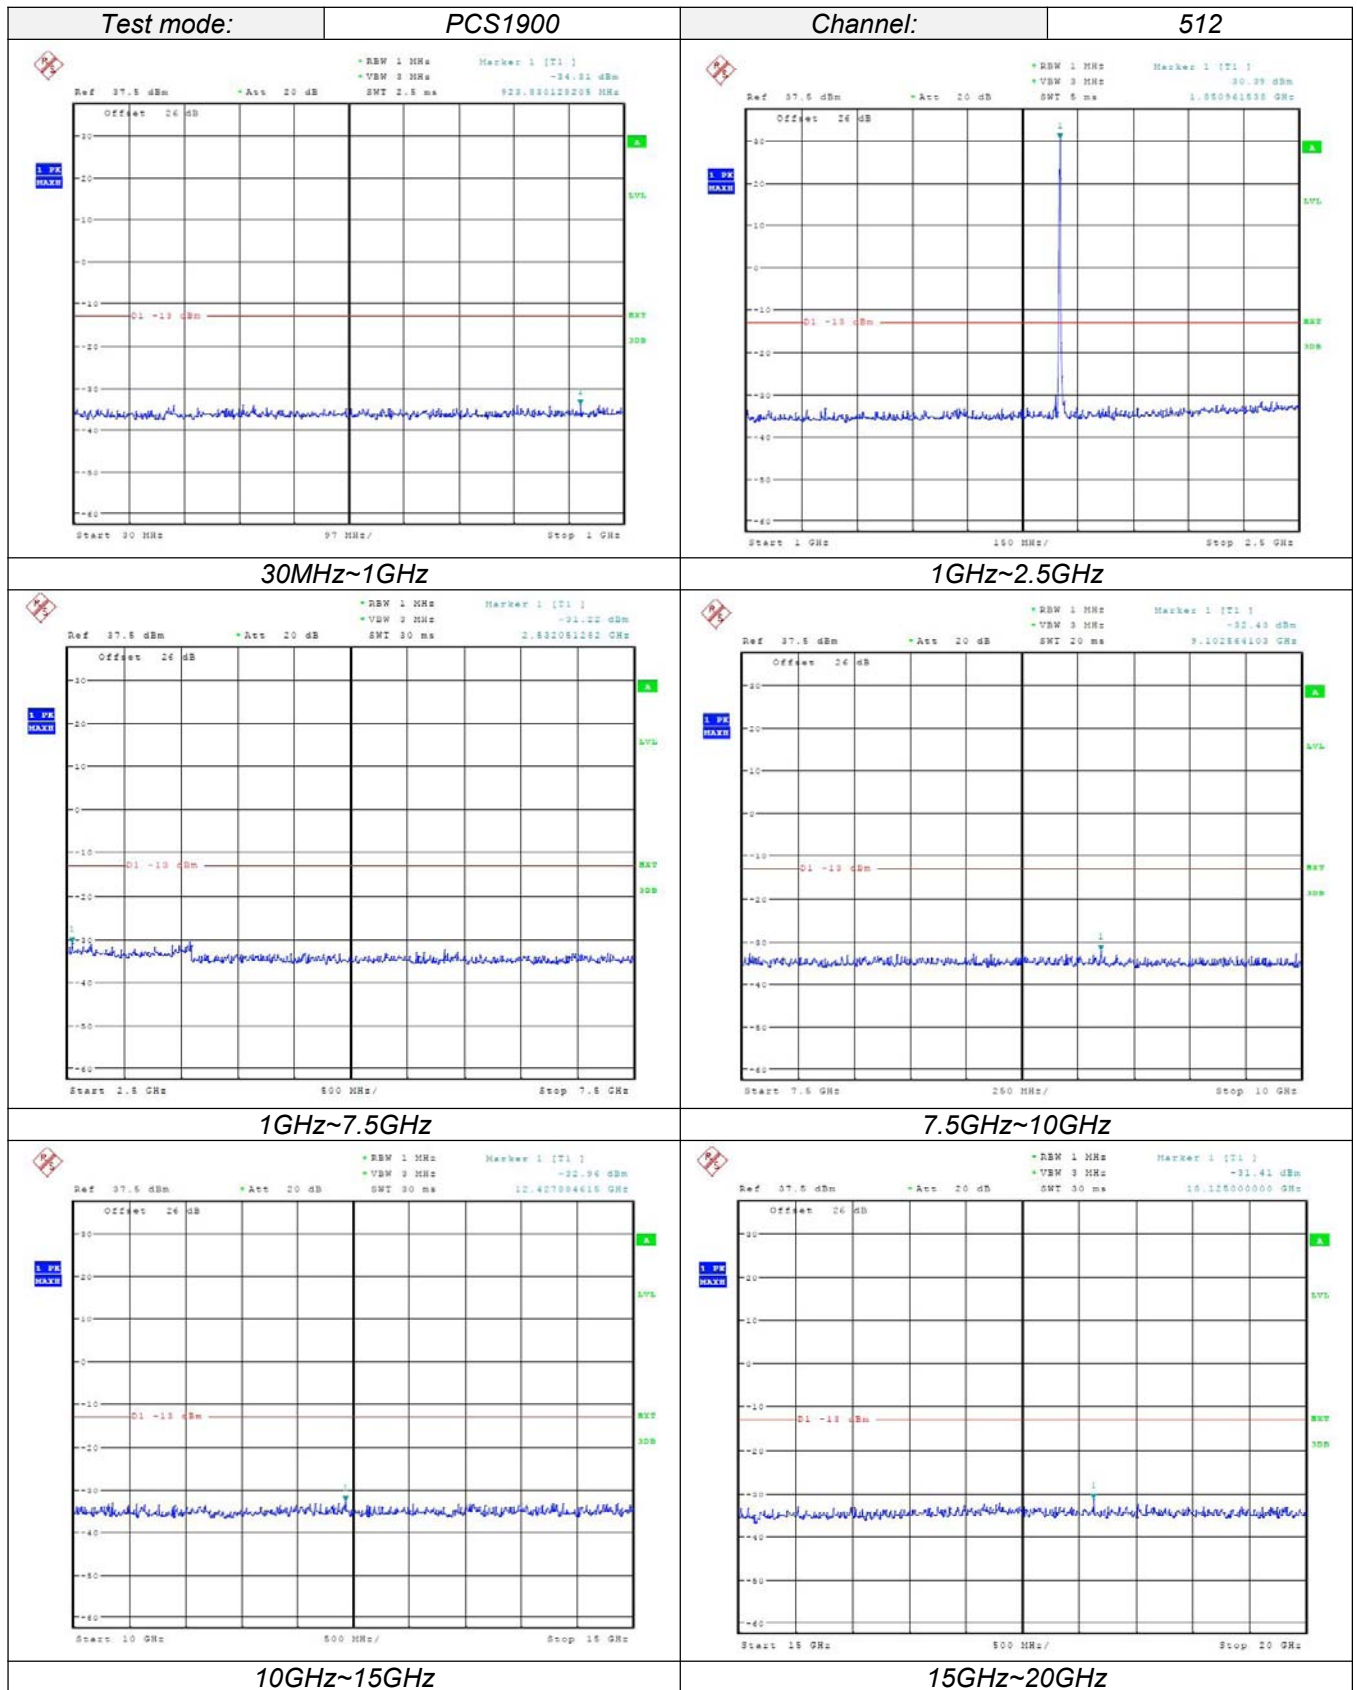

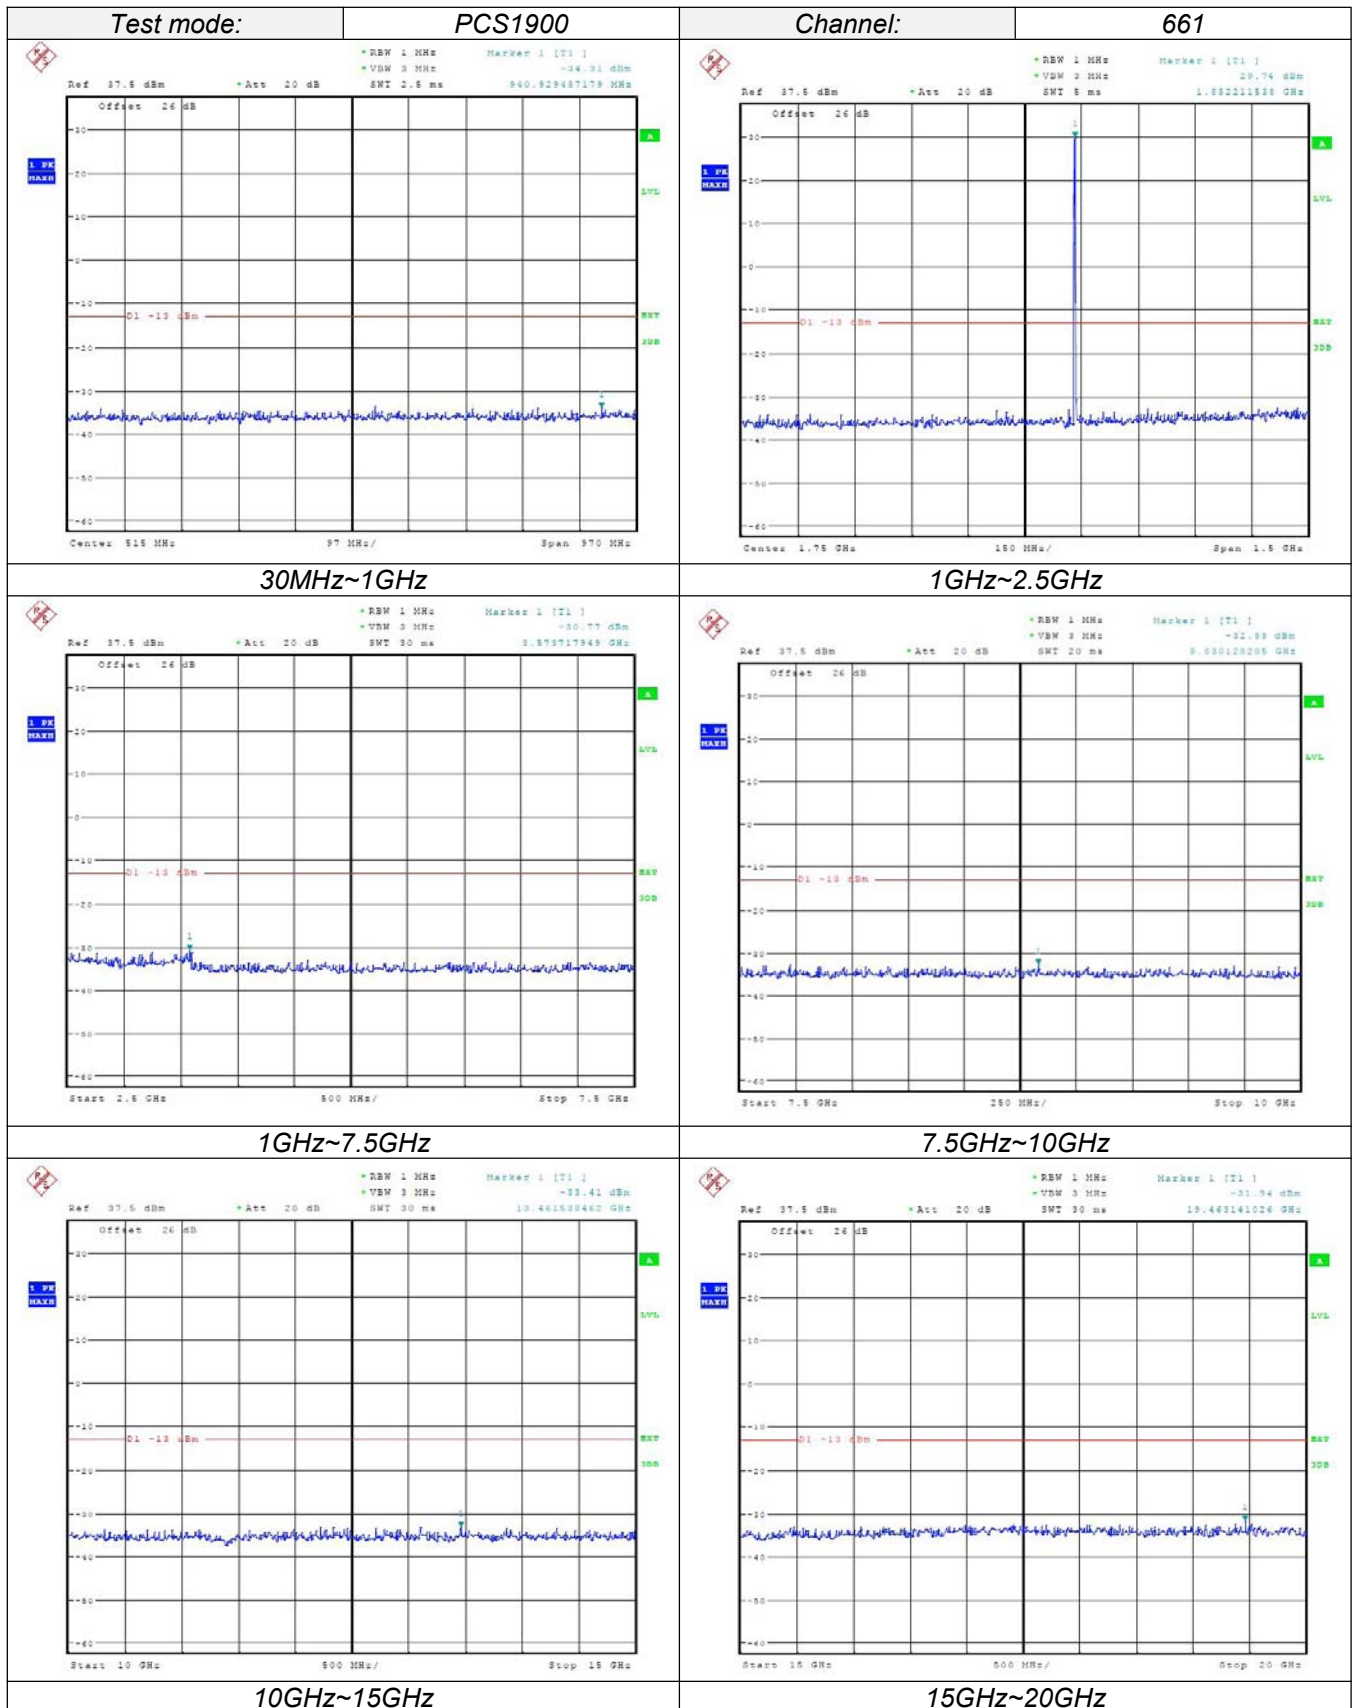

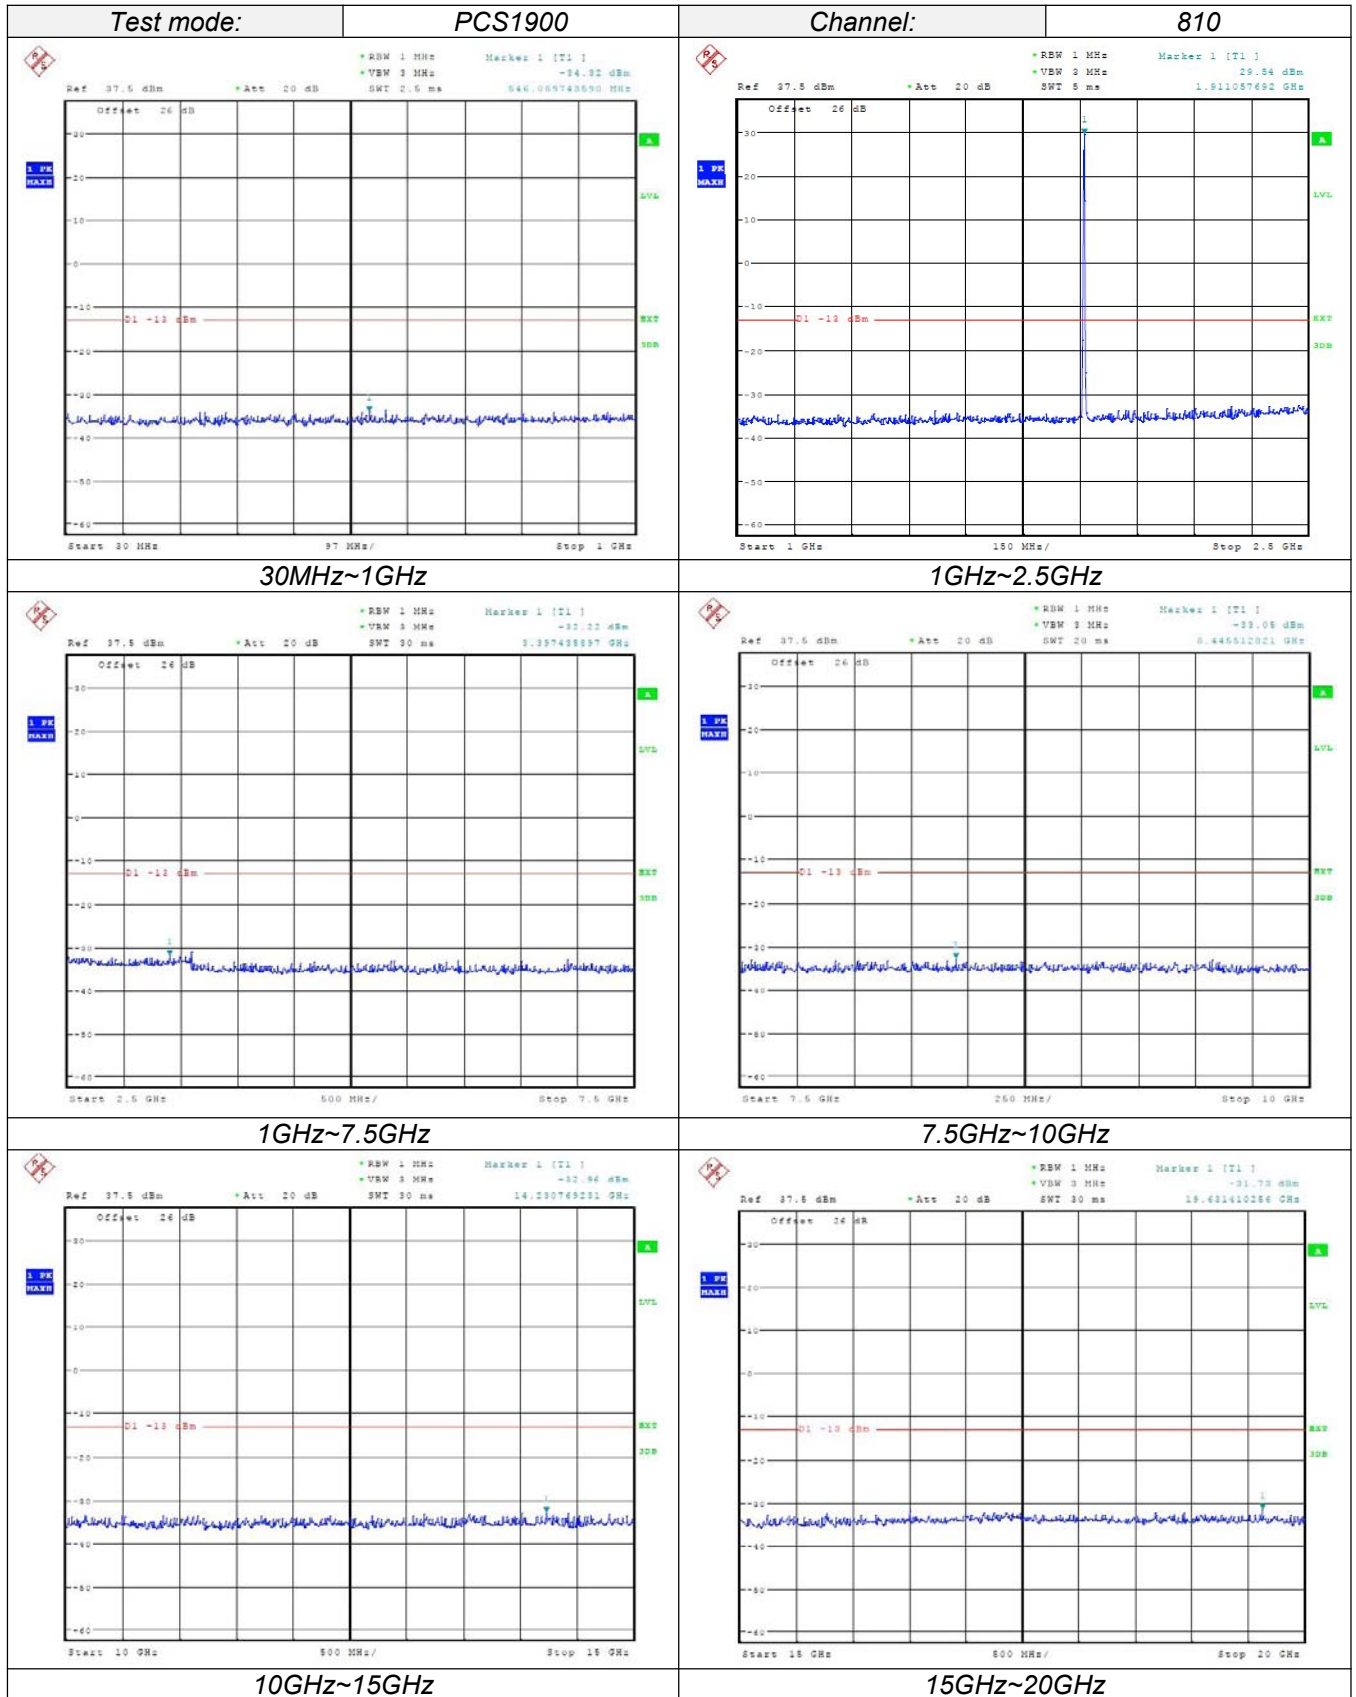

4.6. Frequency Stability Test

TEST APPLICABLE


1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.40V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature;
2. Subject the EUT to overnight soak at -30°C;
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
6. Subject the EUT to overnight soak at +50°C;
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

TEST CONFIGURATION

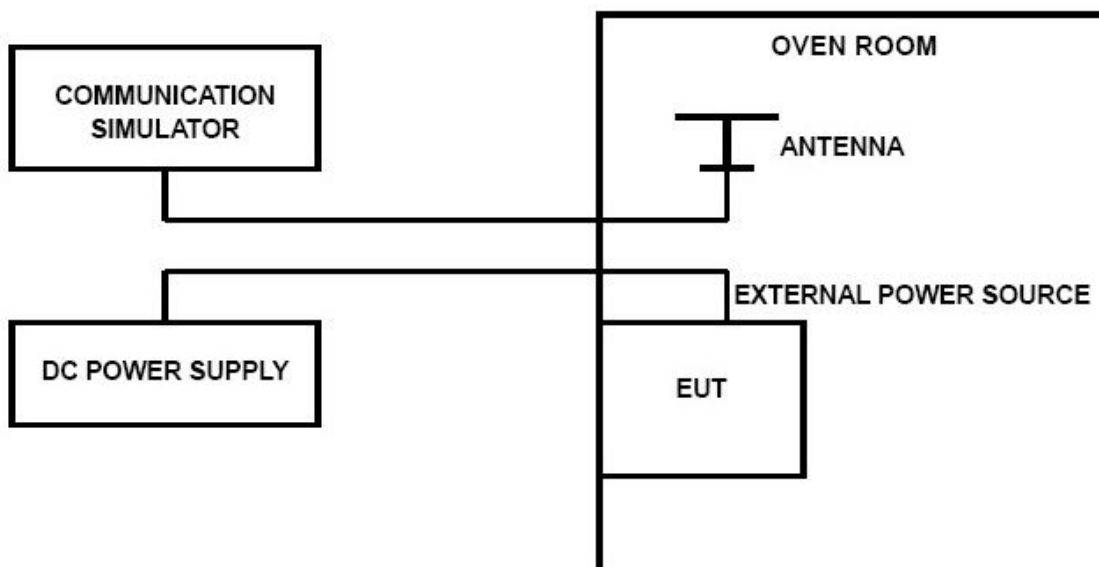

TEST LIMITS

For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.70DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

TEST RESULTS

Remark: We tested GSM and GPRS mode, recorded worst case at GSM mode.

GSM/TM1/GSM850					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	25	19.59	0.02	2.50	PASS
3.70	25	20.21	0.02	2.50	PASS
4.20	25	17.24	0.02	2.50	PASS
3.70	-30	19.57	0.02	2.50	PASS
3.70	-20	19.44	0.02	2.50	PASS
3.70	-10	20.02	0.02	2.50	PASS
3.70	0	19.63	0.02	2.50	PASS
3.70	10	20.02	0.02	2.50	PASS
3.70	20	20.02	0.02	2.50	PASS
3.70	30	19.76	0.02	2.50	PASS
3.70	40	15.63	0.02	2.50	PASS
3.70	50	18.92	0.02	2.50	PASS

GSM/TM1/PCS1900					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	42.42	0.02	2.50	PASS
3.70	20	39.07	0.02	2.50	PASS
4.20	20	45.33	0.02	2.50	PASS
3.70	-30	42.42	0.02	2.50	PASS
3.70	-20	46.43	0.02	2.50	PASS
3.70	-10	52.76	0.03	2.50	PASS
3.70	0	42.62	0.02	2.50	PASS
3.70	10	44.62	0.02	2.50	PASS
3.70	20	33.96	0.02	2.50	PASS
3.70	30	39.39	0.02	2.50	PASS
3.70	40	42.10	0.02	2.50	PASS
3.70	50	42.23	0.02	2.50	PASS

5. Test Setup Photos of the EUT



.....End of Report.....