




TEST REPORT

Report No. : **CHTEW20040145** Report Verification: 

Project No...... : **SHT2004013801EW**

FCC ID..... : **2AE6CEM8100U5**

Applicant's name..... : **Shenzhen Excera Technology Co., Ltd.**

Address..... : 3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China

Manufacturer..... : Shenzhen Excera Technology Co., Ltd.

Address..... : 3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China

Test item description : **Digital Mobile Radio**

Trade Mark : EXCERA

Model/Type reference..... : EM8100 U5

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Apr.07, 2020

Date of testing..... : Apr.07, 2020- Apr.17, 2020

Date of issue..... : Apr.20, 2020

Result..... : **PASS**

Compiled by
 (Position+Printed name+Signature): File administrator Echo Wei 

Supervised by
 (Position+Printed name+Signature): Project Engineer Gaosheng Pan 

Approved by
 (Position+Printed name+Signature): RF Manager Hans Hu 

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	13
5.4.	20 dB Bandwidth	14
5.5.	99% Occupied Bandwidth	15
5.6.	Carrier Frequencies Separation	16
5.7.	Hopping Channel Number	17
5.8.	Dwell Time	18
5.9.	Duty Cycle Correction Factor (DCCF)	19
5.10.	Pseudorandom Frequency Hopping Sequence	20
5.11.	Conducted Band edge and Spurious Emission	21
5.12.	Radiated Band edge Emission	23
5.13.	Radiated Spurious Emission	25
6.	TEST SETUP PHOTOS	30
7.	EXTERANAL AND INTERNAL PHOTOS	31
8.	APPENDIX REPORT	31

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-04-20	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247 (c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247 (b)(1)	PASS
5.4	20 dB Bandwidth	15.247 (a)(1)	PASS
5.5	99% Occupied Bandwidth	-	PASS ^{*1}
5.6	Carrier Frequency Separation	15.247 (a)(1)	PASS
5.7	Hopping Channel Number	15.247 (a)(1)	PASS
5.8	Dwell Time	15.247 (a)(1)	PASS
5.9	Duty Cycle Correction Factor	-	PASS ^{*1}
5.10	Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS
5.11	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.12	Radiated Band Edge Emission	15.205/15.209	PASS
5.13	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen Excera Technology Co., Ltd.
Address:	3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China
Manufacturer:	Shenzhen Excera Technology Co., Ltd.
Address:	3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China

3.2. Product Description

Name of EUT:	Digital Mobile Radio
Trade Mark:	EXCERA
Model No.:	EM8100 U5
Listed Model(s):	-
Power supply:	DC 13.6V
Hardware version:	A
Software version:	1.3.00.11P

3.3. Radio Specification Description

Bluetooth version:	V2.1
Support function ^{*2} :	EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Internal Antenna
Antenna gain:	0 dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates and recorded the RF output power in the clause 5.3

Note:

- 1) The manufacturer declare that the maximum power value of the product is set as a default value in the enter test mode software.
- 2) All the test data for each data rate were verified, found GFSK_Modulation which is worse case mode

4.3. Test mode

For RF test items:			
The engineering test program was provided and enabled to make EUT continuous transmitting.			
Test Item	Modulation / Data Rate		
	GFSK 1Mbps	$\pi/4$ DQPSK 2Mbps	8DPSK 3Mbps
Conducted test item	✓	✓	✓
Radiated test item	✓	-	-
Remark:			
<ul style="list-style-type: none"> - For radiated test item, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests. - The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. 			

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2019/05/27	2020/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2018/10/11	2021/10/10
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
○	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

Passed **Not Applicable**

The antenna type is a PCB antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

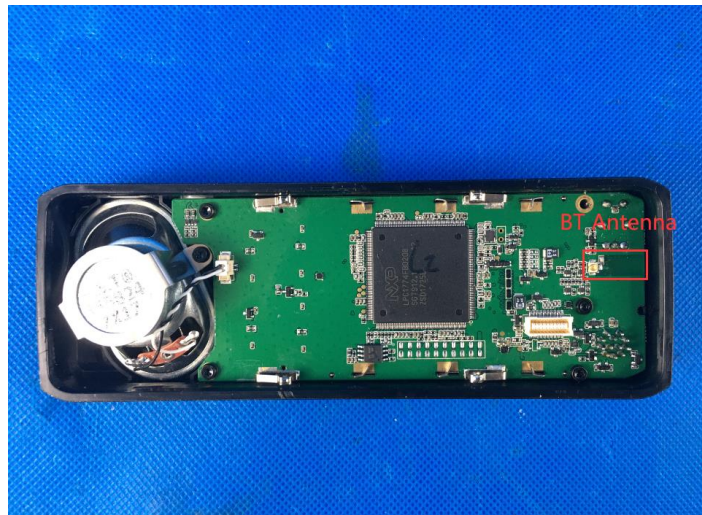

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

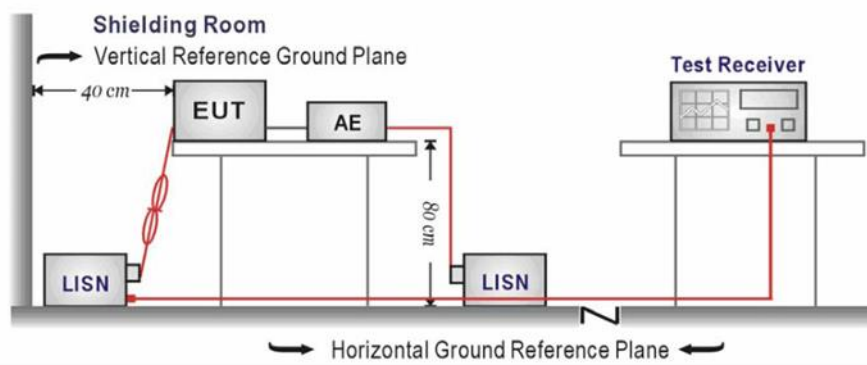

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed Not Applicable


5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

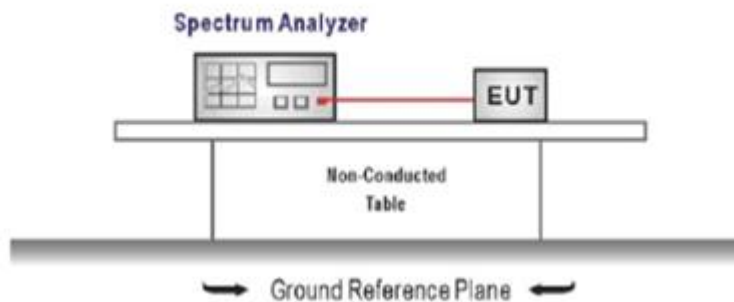

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq the 20 dB bandwidth of the emission being measured, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed Not Applicable

TEST Data


Please refer to appendix A on the appendix report

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

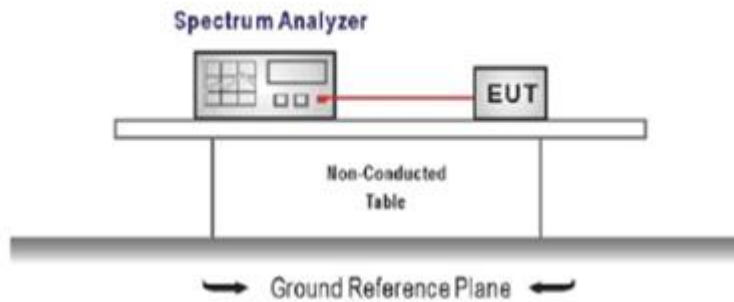

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed Not Applicable

TEST Data


Please refer to appendix B on the appendix report

5.5. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

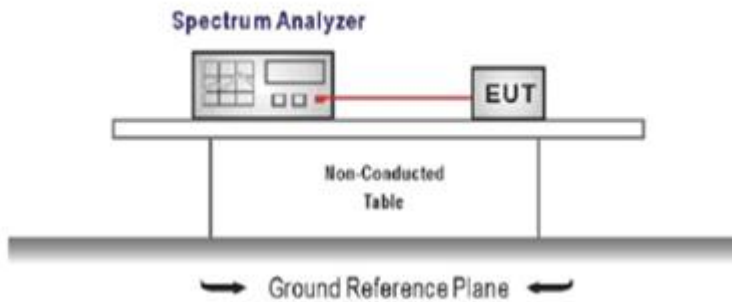

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times$ OBW
RBW = 1%~5%OBW
VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed Not Applicable

TEST Data

Please refer to appendix C on the appendix report


5.6. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

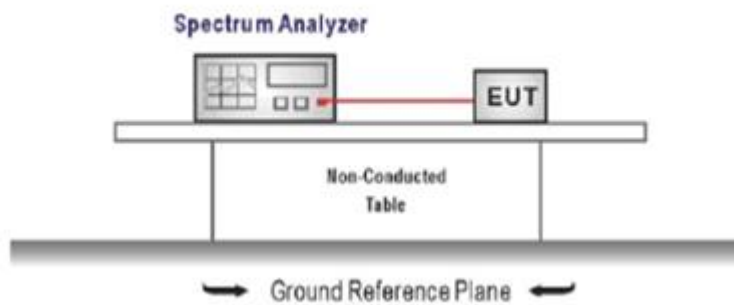

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - RBW \geq 1% of the span, VBW \geq RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

Passed Not Applicable

TEST Data

Please refer to appendix D on the appendix report


5.7. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

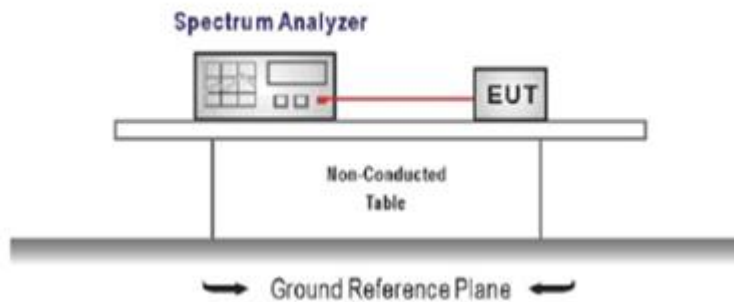

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW \geq 1% of the span, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

Passed Not Applicable

TEST Data


Please refer to appendix E on the appendix report

5.8. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

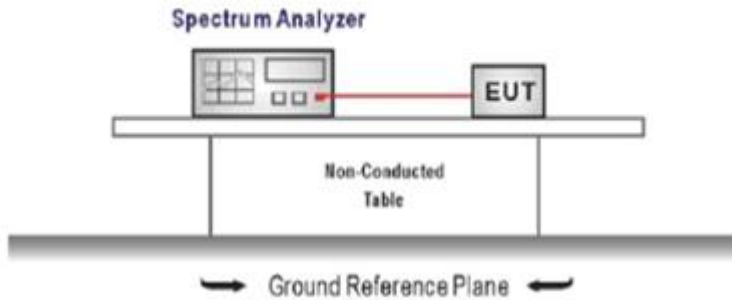

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

Passed Not Applicable

TEST Data


Please refer to appendix F on the appendix report

5.9. Duty Cycle Correction Factor (DCCF)

LIMIT

N/A

TEST CONFIGURATION

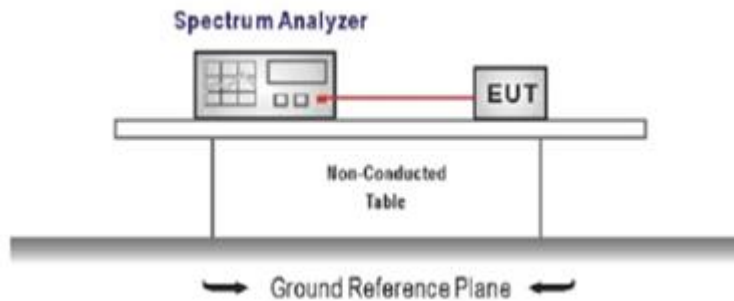

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE:

Please refer to the clause 4.3

TEST Data

Please refer to appendix G on the appendix report

5.10. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

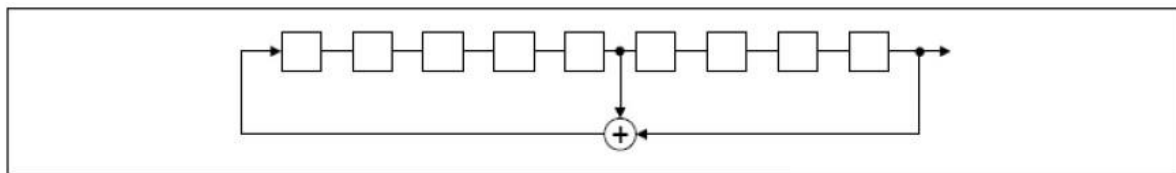

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

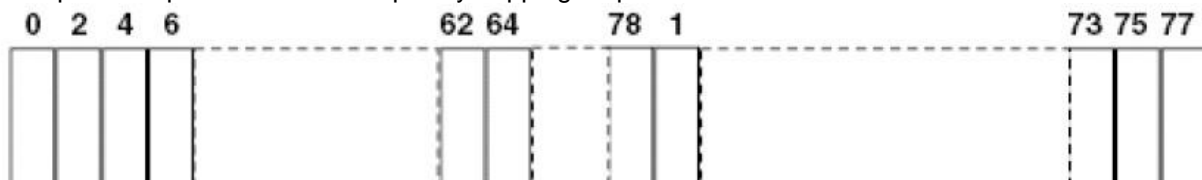


Each frequency used equally on the average by each transmitter. The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

5.11. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

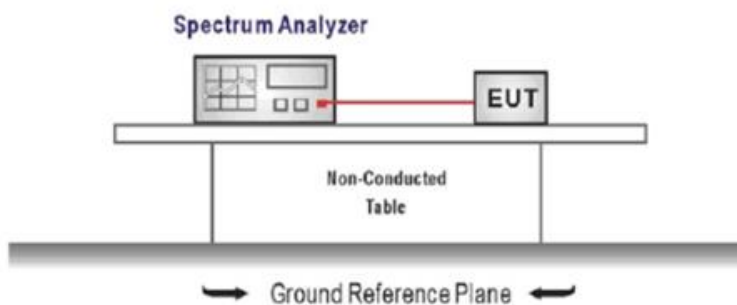

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed **Not Applicable**

TEST Data

Please refer to appendix H on the appendix report


5.12. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

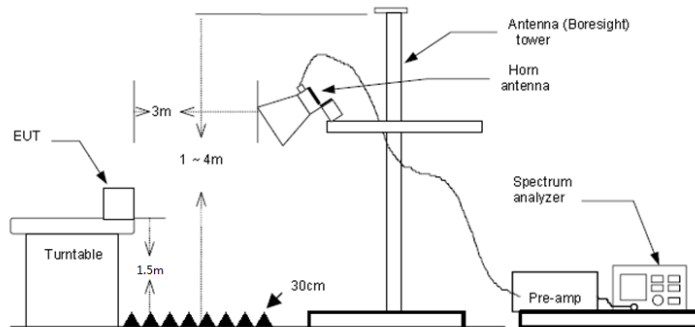

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF)
 Averager level = Peak level + DCCF

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Test channel:		CH00			Polarity		Horizontal	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	2310.000	45.05	-2.34	42.71	74.00	31.29	Horizontal	PK
2	2390.010	44.87	-2.41	42.46	74.00	31.54	Horizontal	PK
Test channel:		CH00			Polarity		Vertical	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	2310.000	43.72	-2.34	41.38	74.00	32.62	Vertical	PK
2	2390.010	44.67	-2.41	42.26	74.00	31.74	Vertical	PK

Test channel:		CH78			Polarity		Horizontal	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	2483.501	44.78	-2.15	42.63	74.00	31.37	Horizontal	PK
2	2500.000	45.27	-2.10	43.17	74.00	30.83	Horizontal	PK
Test channel:		CH78			Polarity		Vertical	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	2483.501	46.92	-2.15	44.77	74.00	29.23	Vertical	PK
2	2500.000	44.40	-2.10	42.30	74.00	31.70	Vertical	PK

5.13. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

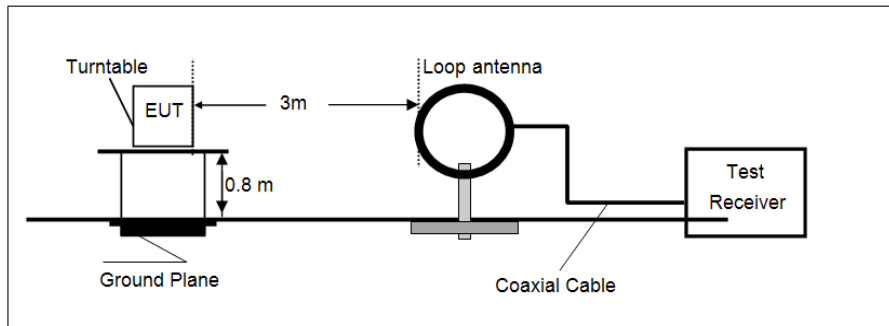

- 30 MHz ~ 1 GHz

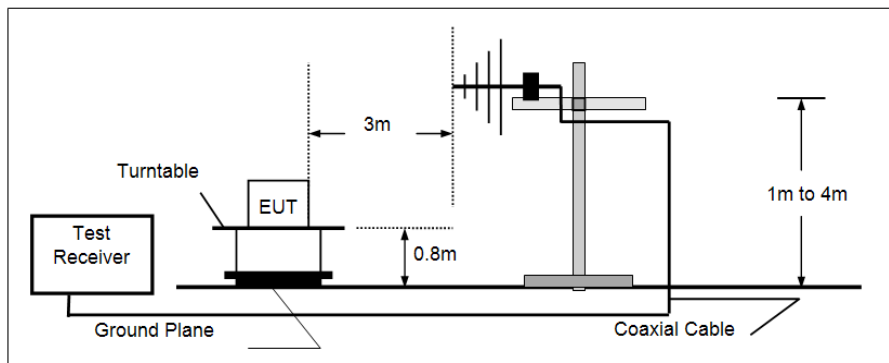

- Above 1 GHz

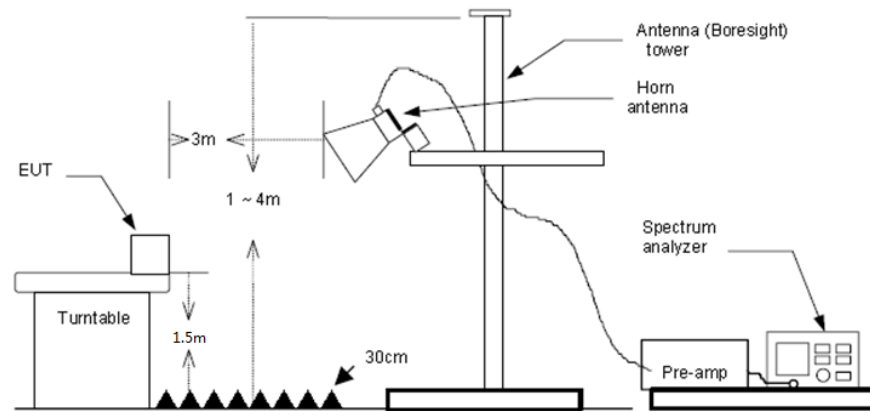

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF)
 Averager level = Peak level + DCCF

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Passed **Not Applicable**

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

TEST DATA FOR 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH39 which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

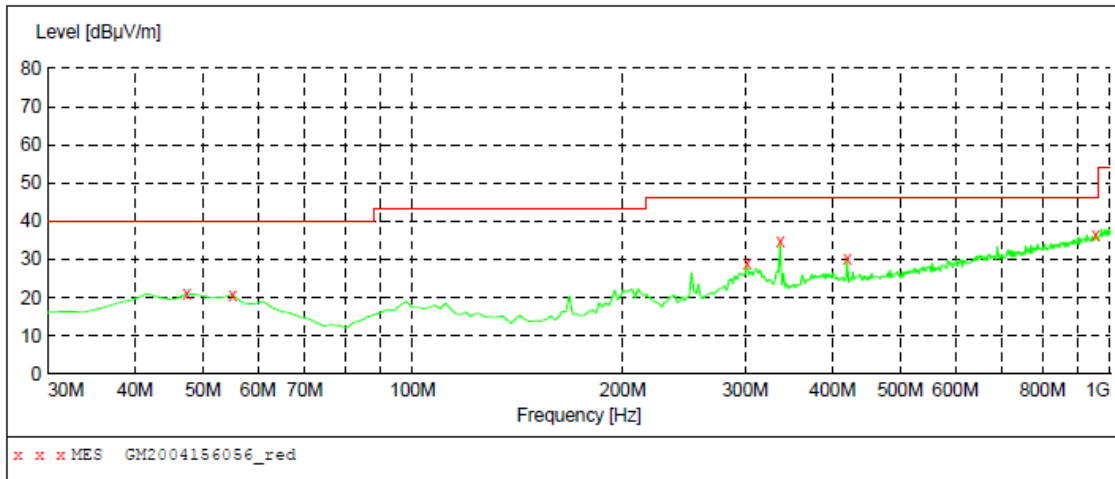


MEASUREMENT RESULT: "GM2004156056_red"

4/15/2020 6:06PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	21.10	-7.5	40.0	18.9	QP	100.0	113.00	HORIZONTAL
55.220000	20.80	-7.1	40.0	19.2	QP	100.0	0.00	HORIZONTAL
301.600000	28.80	-5.6	46.0	17.2	QP	100.0	77.00	HORIZONTAL
336.520000	34.60	-4.5	46.0	11.4	QP	100.0	51.00	HORIZONTAL
419.940000	30.00	-1.9	46.0	16.0	QP	100.0	113.00	HORIZONTAL
953.440000	36.50	9.1	46.0	9.5	QP	300.0	235.00	HORIZONTAL

Polarization:

Vertical

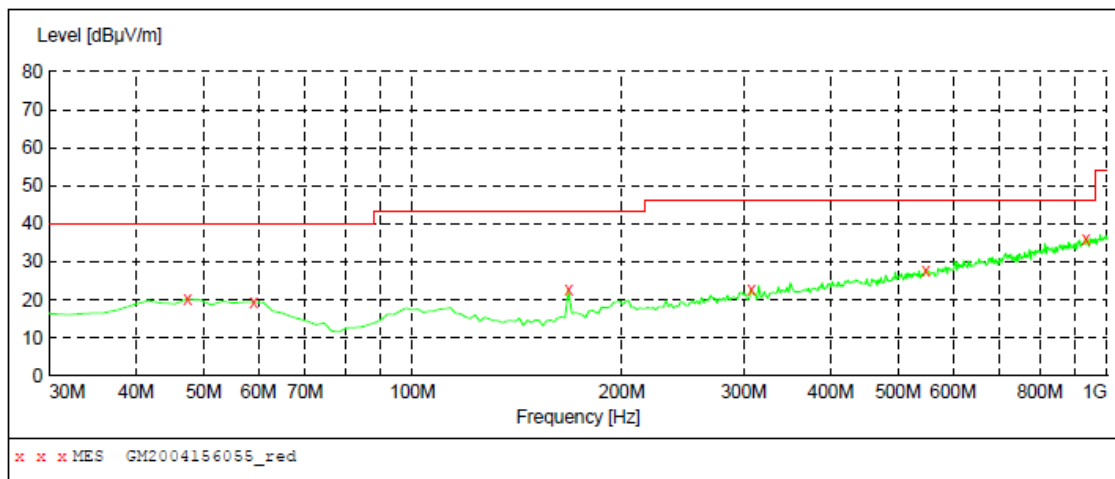

MEASUREMENT RESULT: "GM2004156055_red"

4/15/2020 6:02PM



Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	20.30	-7.5	40.0	19.7	QP	100.0	114.00	VERTICAL
59.100000	19.40	-8.0	40.0	20.6	QP	100.0	220.00	VERTICAL
167.740000	22.60	-12.1	43.5	20.9	QP	100.0	101.00	VERTICAL
307.420000	22.70	-5.6	46.0	23.3	QP	100.0	0.00	VERTICAL
547.980000	27.80	1.0	46.0	18.2	QP	100.0	198.00	VERTICAL
932.100000	36.20	8.7	46.0	9.8	QP	100.0	89.00	VERTICAL

TEST DATA FOR 1 GHz ~ 25 GHz

Test channel					CH00			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1198.281	35.74	-5.85	29.89	74.00	44.11	Horizontal	PK
2	3217.812	32.74	0.63	33.37	74.00	40.63	Horizontal	PK
3	4804.062	30.69	7.06	37.75	74.00	36.25	Horizontal	PK
4	6803.031	30.71	13.23	43.94	74.00	30.06	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1229.125	34.69	-5.75	28.94	74.00	45.06	Vertical	PK
2	3045.968	33.60	0.08	33.68	74.00	40.32	Vertical	PK
3	4760.000	31.27	6.78	38.05	74.00	35.95	Vertical	PK
4	6942.562	30.46	14.13	44.59	74.00	29.41	Vertical	PK
Test channel					CH39			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1180.656	35.24	-6.04	29.20	74.00	44.80	Horizontal	PK
2	3110.593	33.20	0.38	33.58	74.00	40.42	Horizontal	PK
3	4667.468	31.14	6.18	37.32	74.00	36.68	Horizontal	PK
4	7020.406	30.14	14.22	44.36	74.00	29.64	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1268.781	34.55	-5.65	28.90	74.00	45.10	Vertical	PK
2	3189.906	33.44	0.79	34.23	74.00	39.77	Vertical	PK
3	4830.500	30.94	7.09	38.03	74.00	35.97	Vertical	PK
4	6885.281	30.18	13.97	44.15	74.00	29.85	Vertical	PK
Test channel					CH78			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1195.343	34.11	-5.88	28.23	74.00	45.77	Horizontal	PK
2	3160.531	32.67	0.63	33.30	74.00	40.70	Horizontal	PK
3	4718.875	31.44	6.51	37.95	74.00	36.05	Horizontal	PK
4	7001.312	30.28	14.17	44.45	74.00	29.55	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1	1212.968	34.34	-5.80	28.54	74.00	45.46	Vertical	PK
2	3188.437	33.84	0.78	34.62	74.00	39.38	Vertical	PK
3	4824.625	30.27	7.08	37.35	74.00	36.65	Vertical	PK
4	7187.843	30.56	14.92	45.48	74.00	28.52	Vertical	PK

6. TEST SETUP PHOTOS

Radiated Emission:

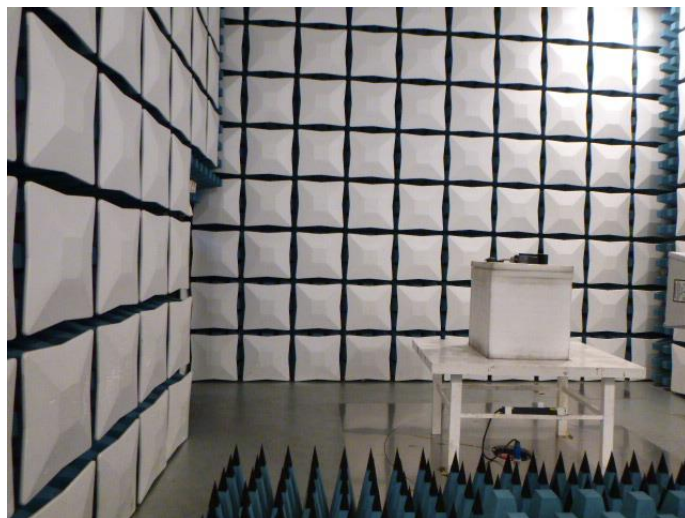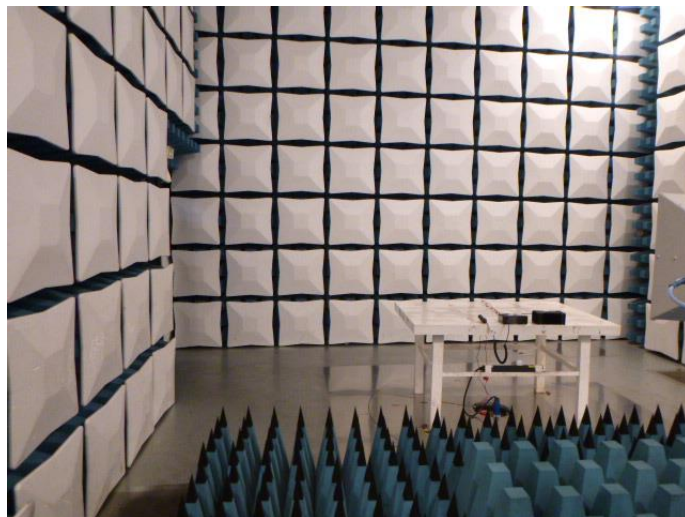



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. : CHTEW20040143.

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2004013801EW	Radio Specification	Bluetooth EDR
Test sample No.	YPHT20040138001	Model No.	EM8100 U5
Start test date	2020/4/16	Finish date	2020/4/16
Temperature	25°C	Humidity	50%
Test Engineer	Jinyue.Yan	Auditor	<i>William.wang</i>

Appendix clause	Test item	Result
A	Peak Output Power	PASS
B	20 dB Bandwidth	PASS
C	99% Occupied Bandwidth	PASS
D	Carrier Frequencies Separation	PASS
E	Hopping Channel Number	PASS
F	Dwell Time	PASS
G	Duty Cycle Correction Factor (DCCF)	PASS
H	Band edge and Spurious Emissions(coducted)	PASS


Appendix A: Peak Output Power

Modulation type	Channel	Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.38	3.27	≤ 30.00	Pass
	39	6.95	5.83		
	78	5.91	4.89		
π/4DQPSK	00	2.52	1.40	≤ 21.00	Pass
	39	5.89	5.16		
	78	5.24	4.73		
8DPSK	00	2.80	1.12	≤ 21.00	Pass
	39	6.08	5.09		
	78	5.38	4.66		


Modulation Type:		GFSK
CH00	<p>CF 2.402 GHz 691 pts Span 5.0 MHz</p> <p>Date: 16/4PR/2020 10:52:01</p>	
CH39	<p>CF 2.441 GHz 691 pts Span 5.0 MHz</p> <p>Date: 16/4PR/2020 10:55:53</p>	
CH78	<p>CF 2.48 GHz 691 pts Span 5.0 MHz</p> <p>Date: 16/4PR/2020 10:57:54</p>	

Modulation Type: $\pi/4$ DQPSK


CH00

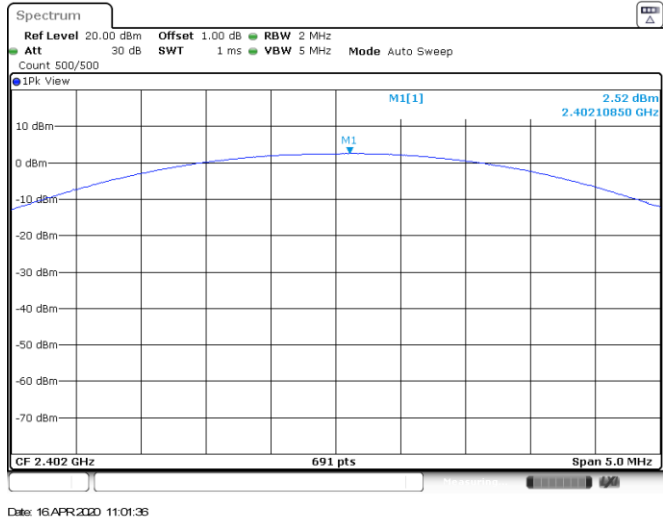

CH39

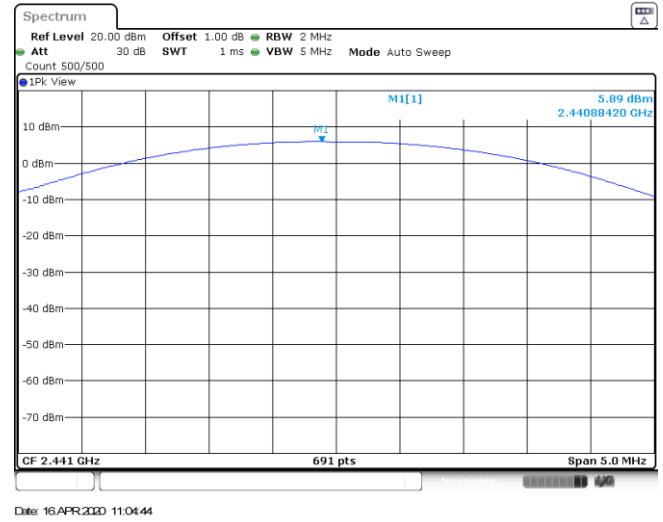


CH78

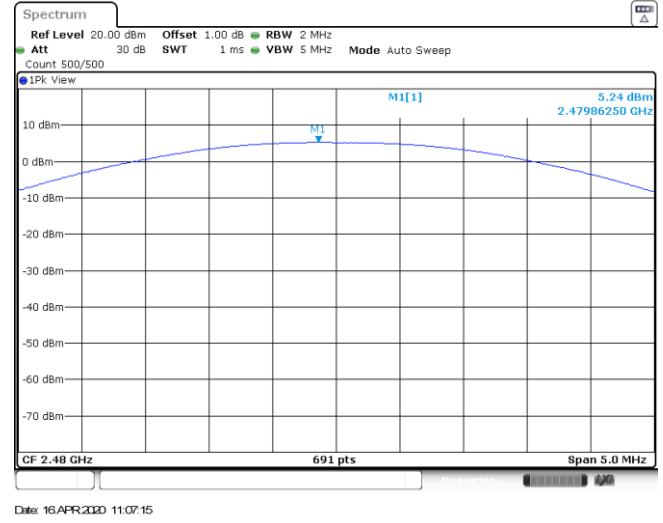


Modulation Type: 8DPSK


CH00

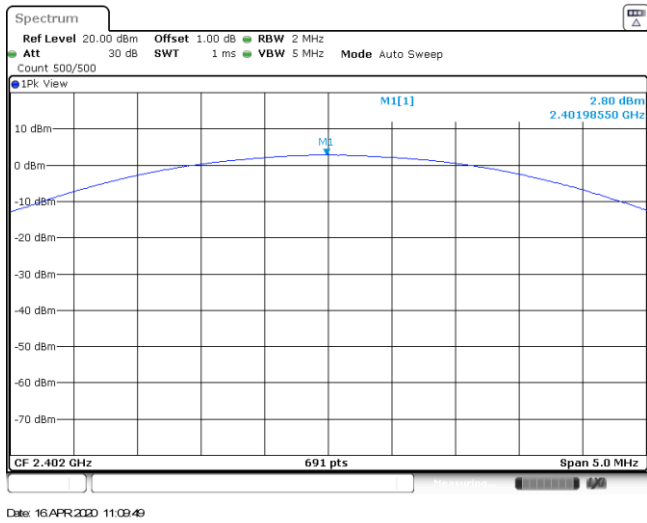

CH39

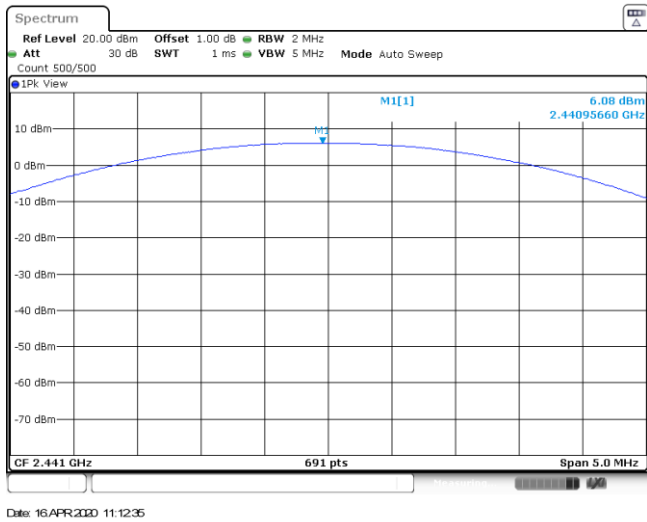

CH78

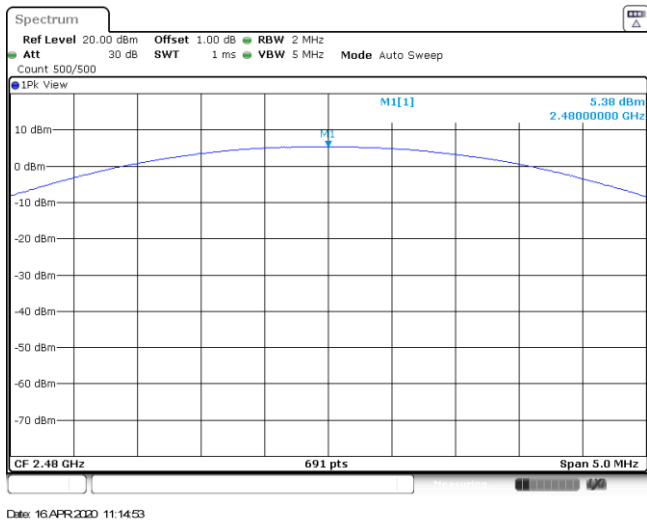


Appendix B : 20 dB Bandwidth


Modulation type	Channel	20 dB Bandwidth (kHz)	Limit (kHz)	Result
GFSK	00	920.00	-	Pass
	39	917.50		
	78	920.00		
$\pi/4$ DQPSK	00	1270.00	-	Pass
	39	1245.00		
	78	1247.50		
8DPSK	00	1270.00	-	Pass
	39	1262.50		
	78	1262.50		

Modulation Type: GFSK


CH00

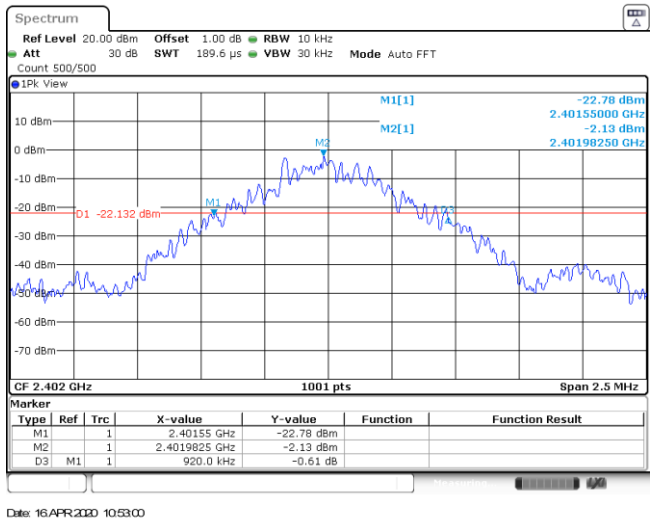

CH39

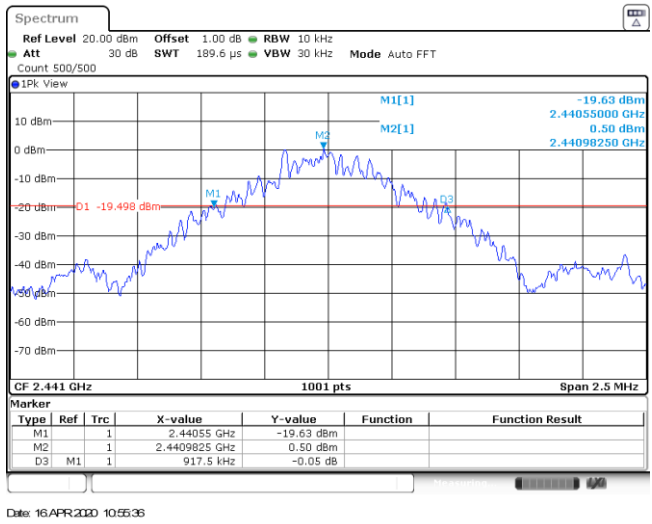


CH78

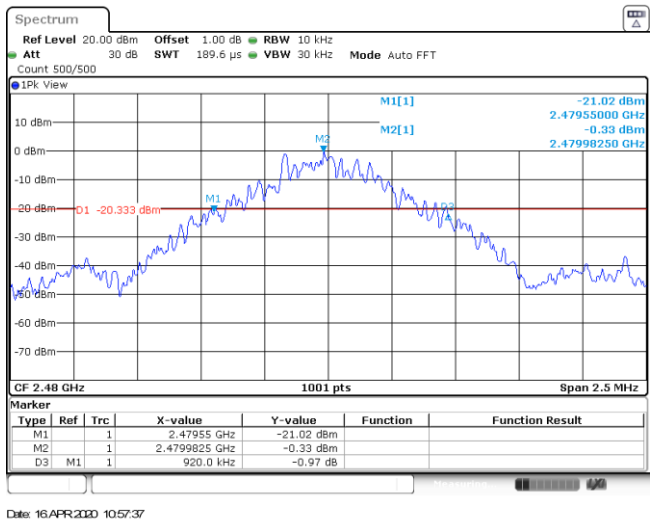


Modulation Type: $\pi/4$ DQPSK


CH00

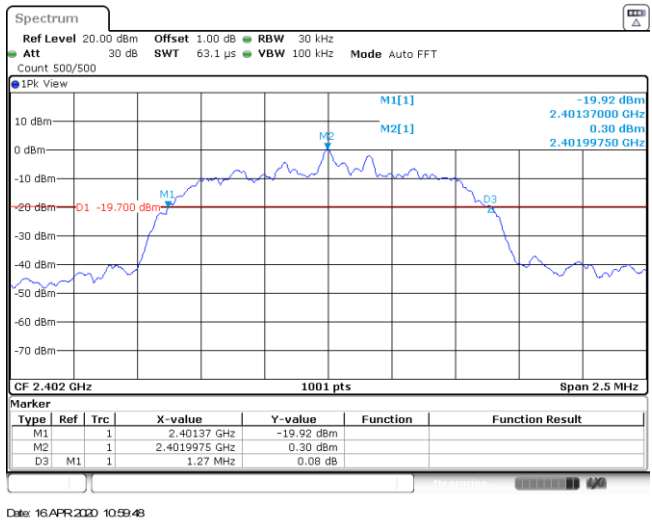

CH39

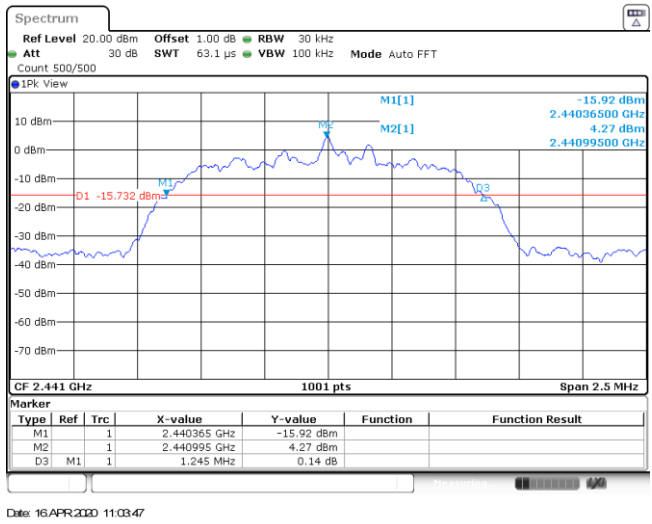


CH78

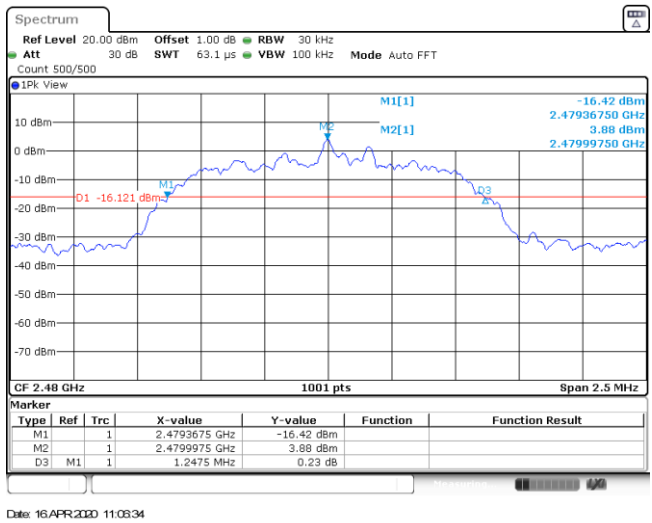


Modulation Type: 8DPSK


CH00

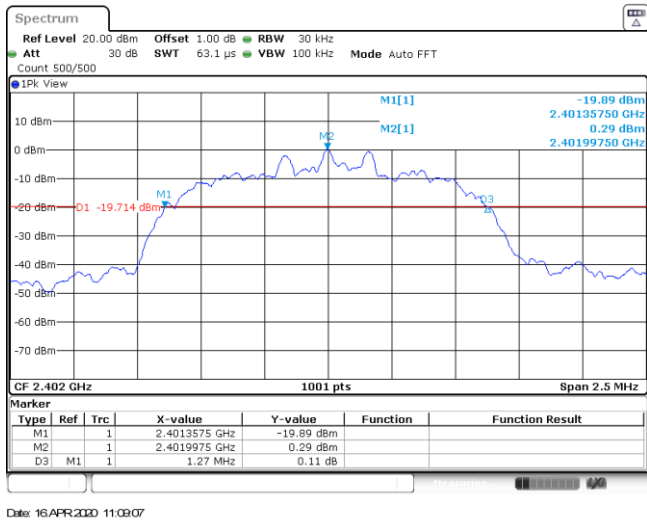

CH39

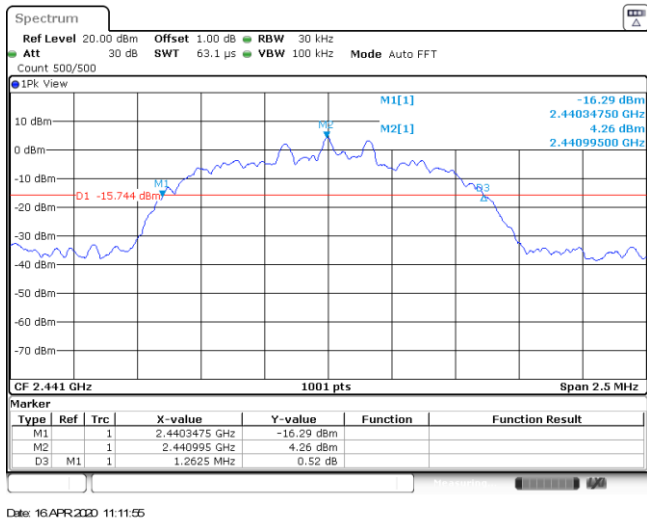

CH78

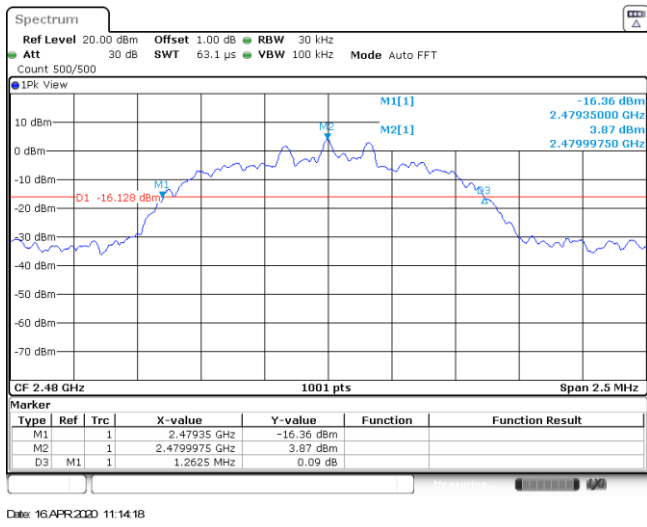

Appendix C: 99% Occupied Bandwidth

Modulation type	Channel	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.85	-	Pass
	39	0.85		
	78	0.84		
$\pi/4$ DQPSK	00	1.17	-	Pass
	39	1.18		
	78	1.19		
8DPSK	00	1.16	-	Pass
	39	1.17		
	78	1.19		

Modulation Type:		GFSK
CH00		
CH39		
CH78		

Modulation Type: $\pi/4$ DQPSK	
CH00	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 0.29 dBm 2.40199750 GHz Occ Bw 1.171328671 MHz CF 2.402 GHz 1001 pts Span 2.5 MHz Date: 16/4PR/2020 10:59:55</p>
CH39	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 4.26 dBm 2.44099500 GHz Occ Bw 1.176323676 MHz CF 2.441 GHz 1001 pts Span 2.5 MHz Date: 16/4PR/2020 11:03:55</p>
CH78	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 3.86 dBm 2.47999750 GHz Occ Bw 1.191308691 MHz CF 2.48 GHz 1001 pts Span 2.5 MHz Date: 16/4PR/2020 11:03:42</p>

Modulation Type: 8DPSK	
CH00	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] 0.28 dBm 2.40199750 GHz 1.156343656 MHz</p> <p>CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <p>Date: 16/4PR/2020 11:09:15</p>
CH39	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] 4.26 dBm 2.44099500 GHz 1.173826174 MHz</p> <p>CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <p>Date: 16/4PR/2020 11:12:03</p>
CH78	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] 3.87 dBm 2.47999500 GHz 1.186313686 MHz</p> <p>CF 2.48 GHz 1001 pts Span 2.5 MHz</p> <p>Date: 16/4PR/2020 11:14:26</p>

Appendix D: Carrier Frequencies Separation

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz) *	Result
GFSK	39	1.00	≥920.00	Pass
π/4DQPSK	39	1.00	≥846.67	Pass
8DPSK	39	1.00	≥846.67	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the appendix B.




π/4DQPSK limit = 2/3 * The maximum 20 dB Bandwidth for π/4DQPSK modulation on the appendix B.

8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the appendix B

<p>GFSK</p>	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] 5.91 dBm 2.44099565 GHz -0.02 dB 1.00435 MHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 16 APR 2020 10:55:21</p>
<p>$\pi/4$DQPSK</p>	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] 4.28 dBm 2.44099565 GHz -0.13 dB 1.00435 MHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 16 APR 2020 11:03:25</p>
<p>8DPSK</p>	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] 4.28 dBm 2.44099565 GHz -0.14 dB 1.00435 MHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 16 APR 2020 11:11:40</p>

Appendix E: Hopping Channel Number

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4DQPSK	79		
8DPSK	79		

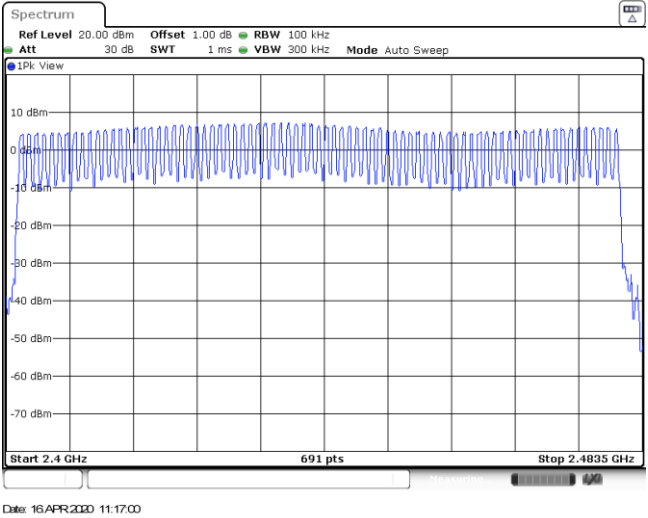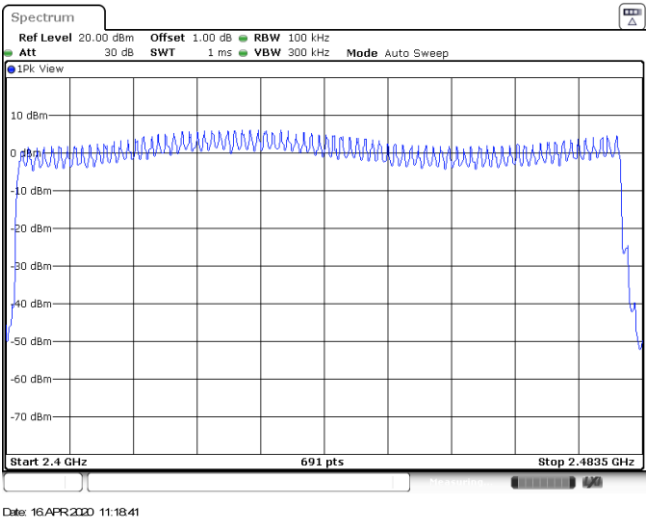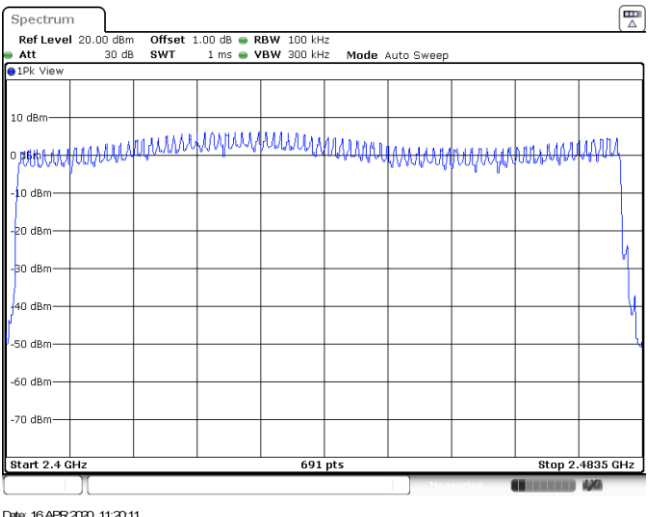
<p>GFSK</p>	
<p>$\pi/4$DQPSK</p>	
<p>8DPSK</p>	

Appendix F: Dwell Time


Modulation type	Packet	Burst Width [ms]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.40	320	0.13	≤ 0.40	Pass
	DH3	1.66	160	0.27		
	DH5	2.90	107	0.31		
π/4DQPSK	2DH1	0.41	320	0.13	≤ 0.40	Pass
	2DH3	1.67	160	0.27		
	2DH5	2.91	107	0.31		
8DPSK	3DH1	0.41	320	0.13	≤ 0.40	Pass
	3DH3	1.66	160	0.27		
	3DH5	2.91	107	0.31		

Modulation Type: GFSK	
DH1 Burst width	<p> Spectrum Ref Level 20.00 dBm RBW 1 MHz Att 30 dB SWT 10 ms VBW 3 MHz SGL TRG:VID 1AP Cirw M1[1] -5.54 dBm D1[1] -3.75 μs 3.04 dB 397.95 μs TRG 1.200 dBm CF 2.441 GHz 8001 pts 1.0 ms/ </p> <p>Date: 16 APR 2020 11:22:02</p>
DH1 Burst number	<p> Spectrum Ref Level 20.00 dBm RBW 500 kHz Att 30 dB SWT 31.6 s VBW 3 MHz SGL TRG:VID 1AP Cirw TRG 1.200 dBm CF 2.441 GHz 30001 pts 3.16 s/ </p> <p>Date: 16 APR 2020 11:22:36</p>
DH3 Burst width	<p> Spectrum Ref Level 20.00 dBm RBW 1 MHz Att 30 dB SWT 10 ms VBW 3 MHz SGL TRG:VID 1AP Cirw M1[1] -30.25 dBm D1[1] -5.00 μs 0.48 dB 1.66007 ms TRG 1.200 dBm CF 2.441 GHz 8001 pts 1.0 ms/ </p> <p>Date: 16 APR 2020 11:23:20</p>


DH3
Burst number

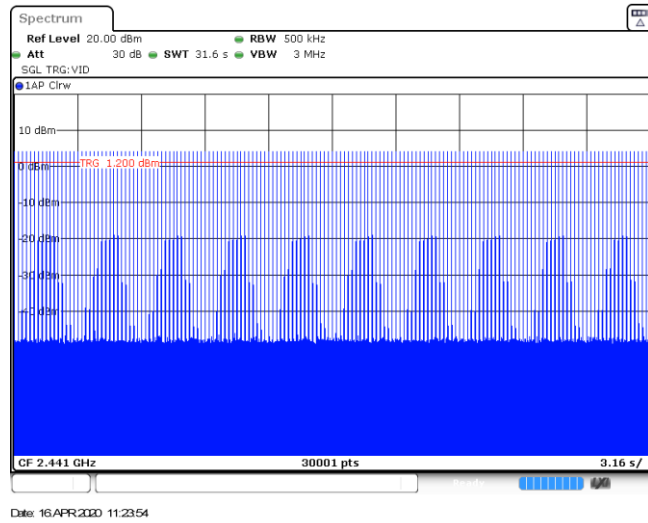

DH5
Burst width

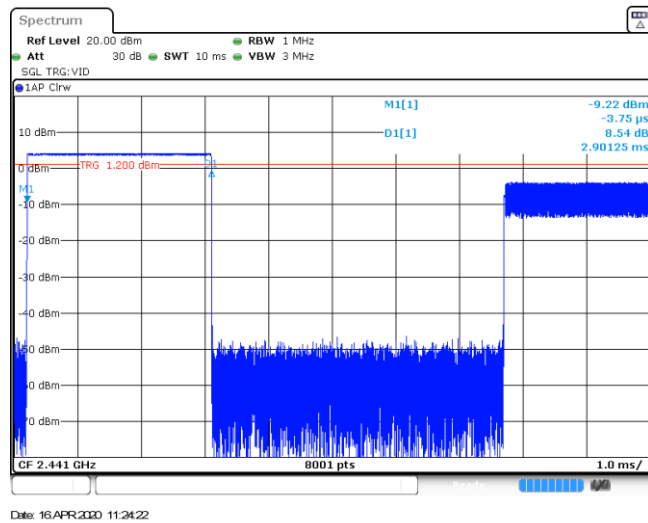


DH5
Burst number

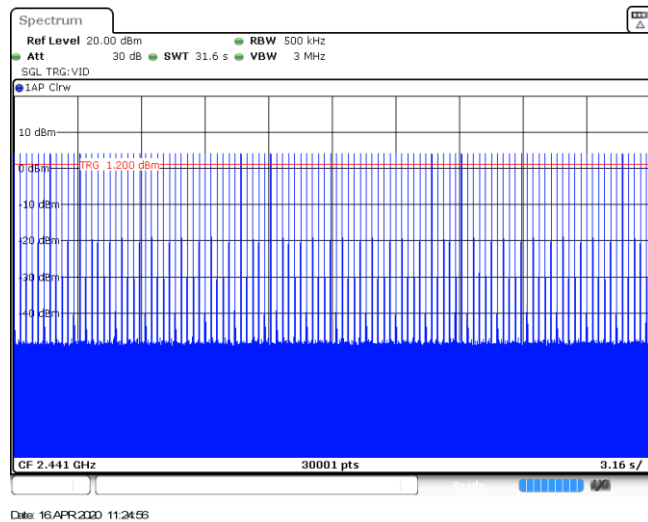


Modulation Type: $\pi/4$ DQPSK	
2DH1 Burst width	
2DH1 Burst number	
2DH3 Burst width	


2DH3
Burst number

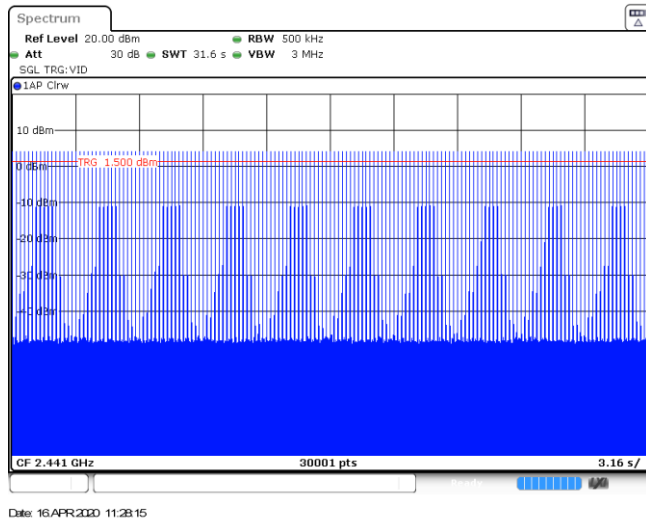

2DH5
Burst width

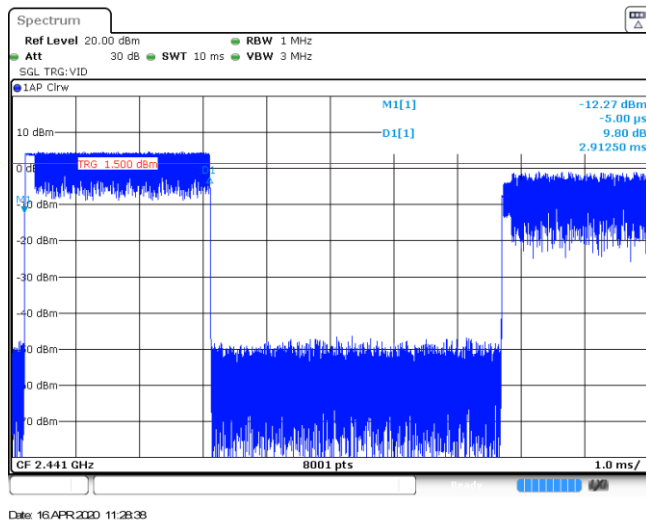


2DH5
Burst number

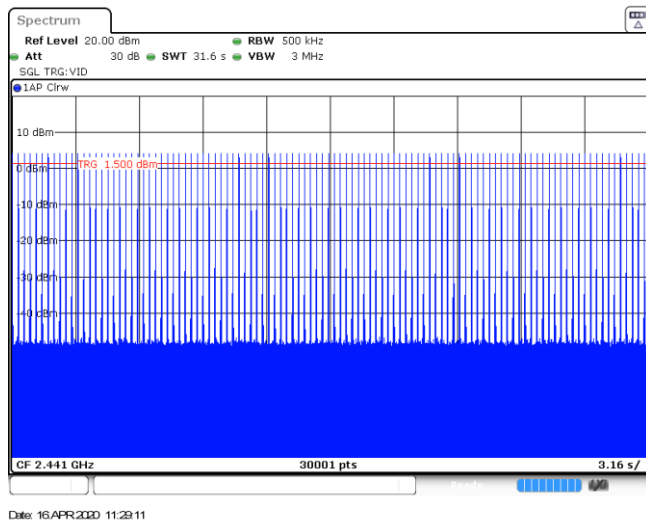


Modulation Type: 8DPSK


3DH1
Burst width

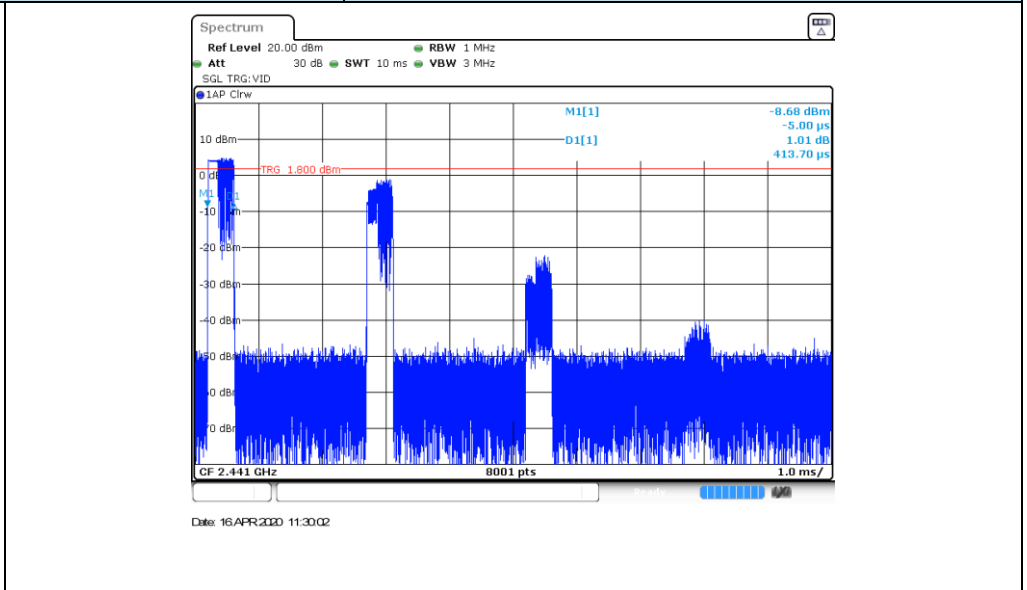

3DH1
Burst number

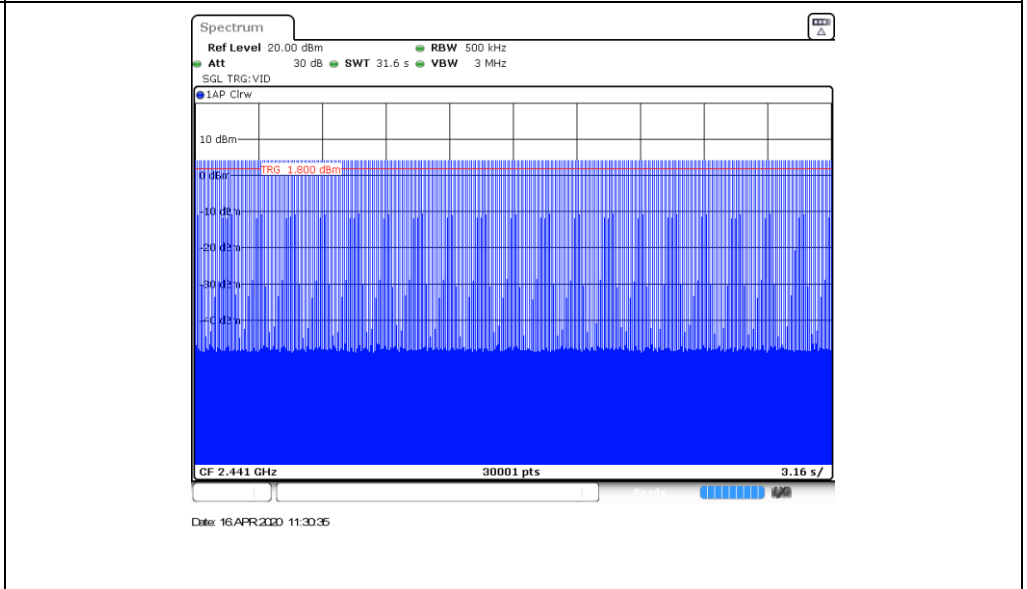

3DH3
Burst width


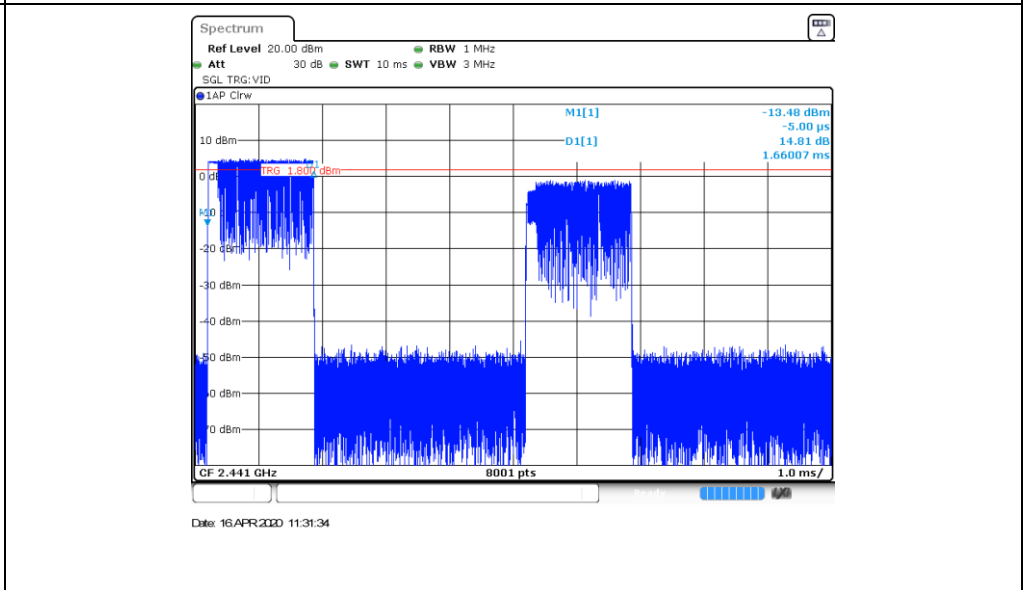


<p>3DH3 Burst number</p>	<p>Spectrum Ref Level 20.00 dBm Att 30 dB RBW 500 kHz SGL TRG:VID IAP Cirw TRG 1.800 dBm CF 2.441 GHz 30001 pts 3.16 s/ Date: 16/04/2020 11:32:09</p>
<p>3DH5 Burst width</p>	<p>Spectrum Ref Level 20.00 dBm Att 30 dB RBW 1 MHz SGL TRG:VID IAP Cirw TRG 1.800 dBm M1[1] -11.64 dBm D1[1] -5.00 μs 8.76 dB 2.91375 ms CF 2.441 GHz 8001 pts 1.0 ms/ Date: 16/04/2020 11:32:39</p>
<p>3DH5 Burst number</p>	<p>Spectrum Ref Level 20.00 dBm Att 30 dB RBW 500 kHz SGL TRG:VID IAP Cirw TRG 1.800 dBm CF 2.441 GHz 30001 pts 3.16 s/ Date: 16/04/2020 11:33:13</p>

Appendix G: Duty Cycle Correction Factor (DCCF)

DCCF Calculate Formula					
DCCF=20 * Log(duty cycle) = 20 * Log($T_{on\ time} / T_{period}$)					
Modulation type	Test Frequency (MHz)	$T_{on\ time}$ for single burst [ms]	T_{period} [ms]	Burst Quantity	DCCF [dB]
GFSK	2441	0.40	100	5	-33.98
$\pi/4$ DQPSK	2441	2.90	100	3	-21.21
8DPSK	2441	2.90	100	3	-21.21

GFSK

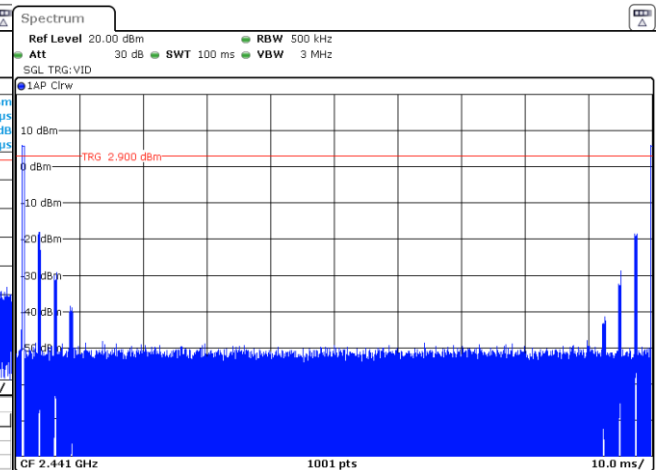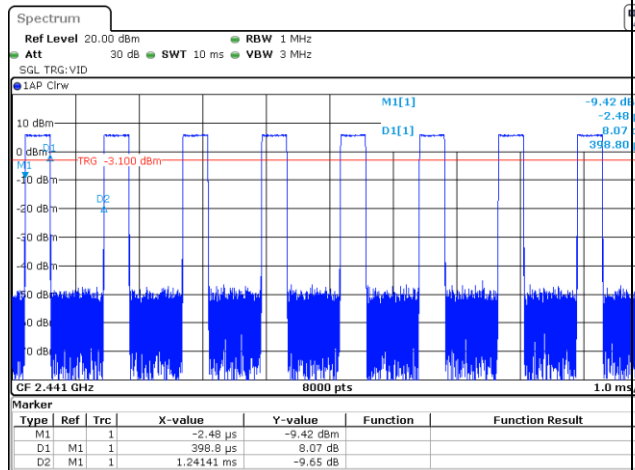



Date: 16 APR 2020 10:58:07

Date: 16 APR 2020 10:58:18

T_{on} time for single burst

Burst Quantity

$\pi/4$ DQPSK

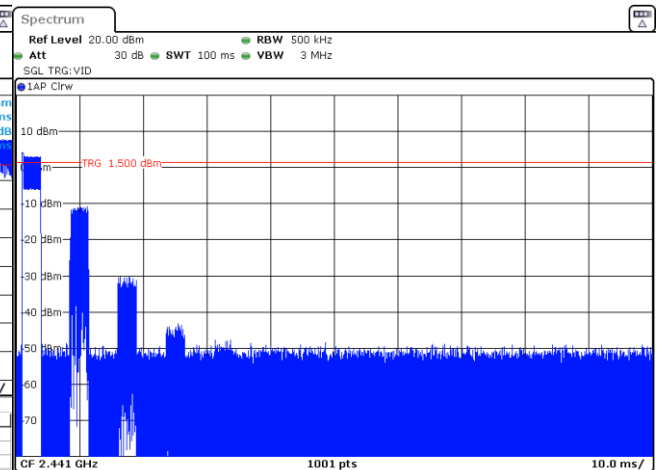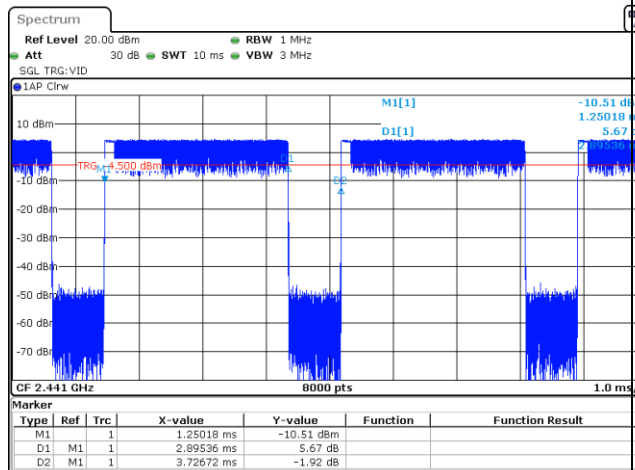



Date: 16 APR 2020 11:05:09

Date: 16 APR 2020 11:05:22

T_{on} time for single burst

Burst Quantity

8DPSK

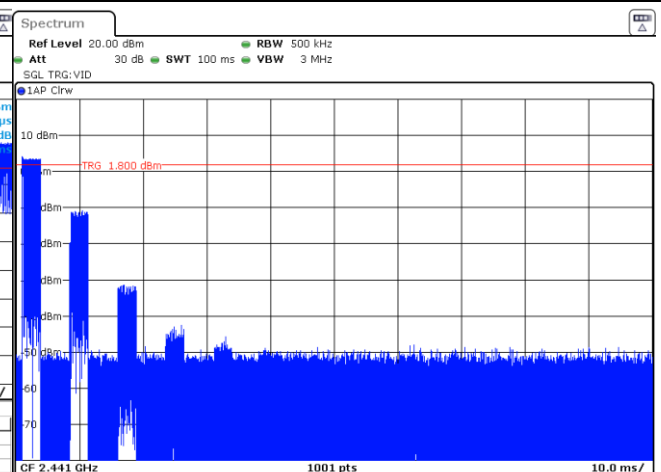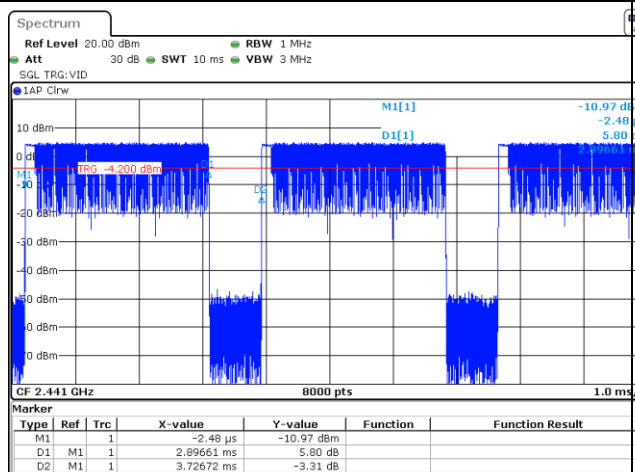




Date: 16 APR 2020 11:12:48

Date: 16 APR 2020 11:13:01


T_{on} time for single burst

Burst Quantity




Appendix H: Band edge and Spurious Emissions (conducted)

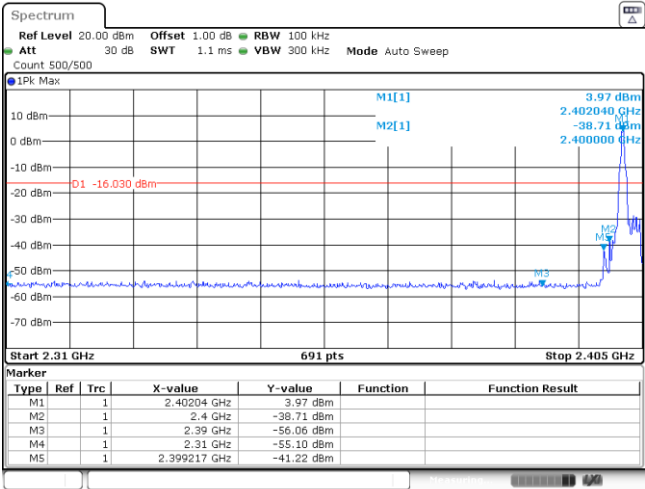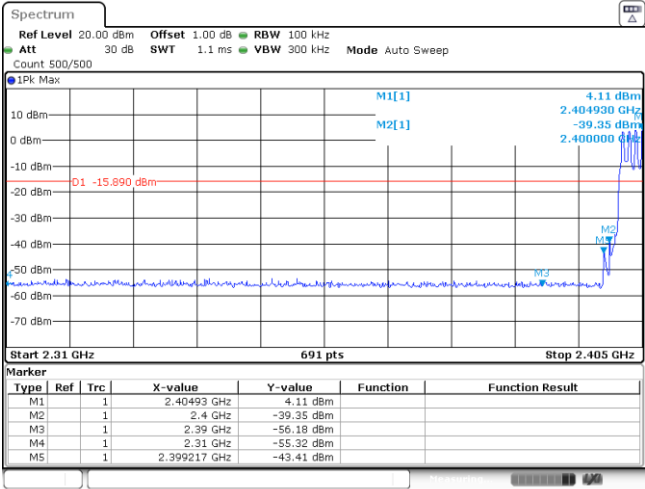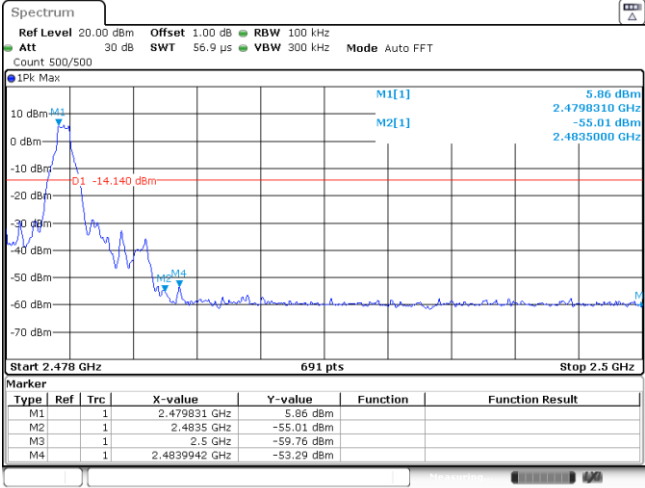Test Item:	Band edge	Modulation type:	GFSK																																										
<p>CH00 No hopping mode</p>	 <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40204 GHz</td> <td>9.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4 GHz</td> <td>-38.71 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td></td> <td>1</td> <td>2.39 GHz</td> <td>-56.06 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td></td> <td>1</td> <td>2.31 GHz</td> <td>-55.10 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td></td> <td>1</td> <td>2.399217 GHz</td> <td>-41.22 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 10:53:13</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40204 GHz	9.97 dBm			M2		1	2.4 GHz	-38.71 dBm			M3		1	2.39 GHz	-56.06 dBm			M4		1	2.31 GHz	-55.10 dBm			M5		1	2.399217 GHz	-41.22 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1		1	2.40204 GHz	9.97 dBm																																									
M2		1	2.4 GHz	-38.71 dBm																																									
M3		1	2.39 GHz	-56.06 dBm																																									
M4		1	2.31 GHz	-55.10 dBm																																									
M5		1	2.399217 GHz	-41.22 dBm																																									
<p>CH00 Hopping mode</p>	 <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40493 GHz</td> <td>4.11 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4 GHz</td> <td>-39.35 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td></td> <td>1</td> <td>2.39 GHz</td> <td>-56.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td></td> <td>1</td> <td>2.31 GHz</td> <td>-55.32 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td></td> <td>1</td> <td>2.399217 GHz</td> <td>-43.41 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 11:17:14</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40493 GHz	4.11 dBm			M2		1	2.4 GHz	-39.35 dBm			M3		1	2.39 GHz	-56.18 dBm			M4		1	2.31 GHz	-55.32 dBm			M5		1	2.399217 GHz	-43.41 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1		1	2.40493 GHz	4.11 dBm																																									
M2		1	2.4 GHz	-39.35 dBm																																									
M3		1	2.39 GHz	-56.18 dBm																																									
M4		1	2.31 GHz	-55.32 dBm																																									
M5		1	2.399217 GHz	-43.41 dBm																																									
<p>CH78 No hopping mode</p>	 <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.479831 GHz</td> <td>5.86 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4835 GHz</td> <td>-55.01 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td></td> <td>1</td> <td>2.5 GHz</td> <td>-59.76 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td></td> <td>1</td> <td>2.4839942 GHz</td> <td>-53.29 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 10:58:08</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479831 GHz	5.86 dBm			M2		1	2.4835 GHz	-55.01 dBm			M3		1	2.5 GHz	-59.76 dBm			M4		1	2.4839942 GHz	-53.29 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1		1	2.479831 GHz	5.86 dBm																																									
M2		1	2.4835 GHz	-55.01 dBm																																									
M3		1	2.5 GHz	-59.76 dBm																																									
M4		1	2.4839942 GHz	-53.29 dBm																																									


CH78
Hopping mode

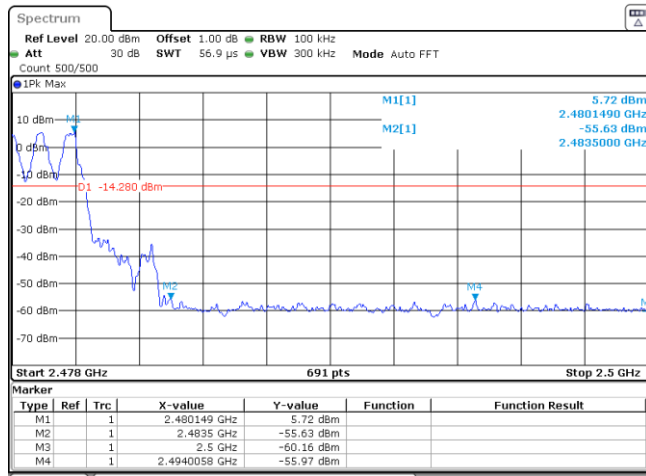




Date: 16.APR.2020 11:17:26

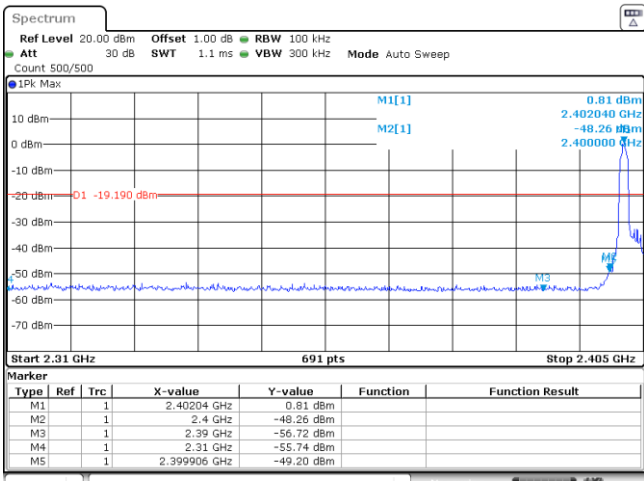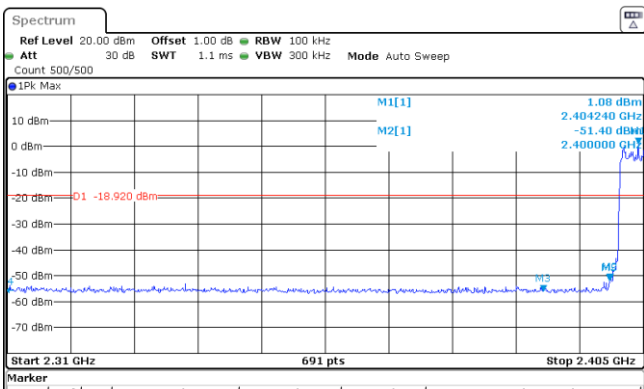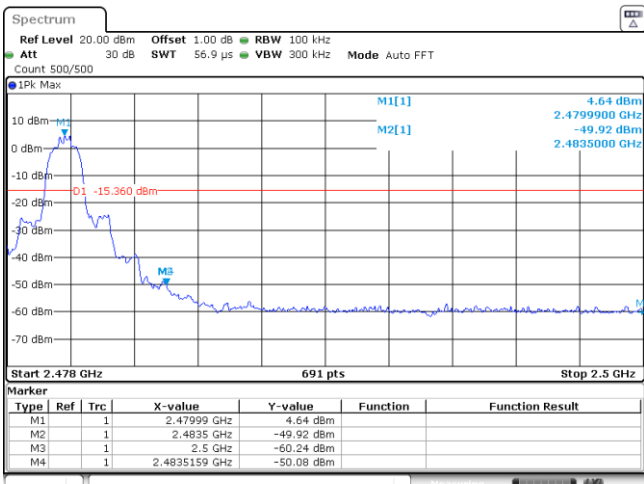Test Item:	Band edge	Modulation type:	π/4DQPSK																																																
<p>CH00 No hopping mode</p>	 <table border="1" data-bbox="686 616 1332 728"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.40204 GHz</td> <td>0.81 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4 GHz</td> <td>-48.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.39 GHz</td> <td>-56.72 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.31 GHz</td> <td>-55.74 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td></td> <td>2.399906 GHz</td> <td>-49.20 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16/4/2020 11:01:49</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.40204 GHz	0.81 dBm			M2	1			2.4 GHz	-48.26 dBm			M3	1			2.39 GHz	-56.72 dBm			M4	1			2.31 GHz	-55.74 dBm			M5	1			2.399906 GHz	-49.20 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.40204 GHz	0.81 dBm																																														
M2	1			2.4 GHz	-48.26 dBm																																														
M3	1			2.39 GHz	-56.72 dBm																																														
M4	1			2.31 GHz	-55.74 dBm																																														
M5	1			2.399906 GHz	-49.20 dBm																																														
<p>CH00 Hopping mode</p>	 <table border="1" data-bbox="686 1160 1332 1272"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.40424 GHz</td> <td>1.08 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4 GHz</td> <td>-51.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.39 GHz</td> <td>-55.95 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.31 GHz</td> <td>-55.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td></td> <td>2.399906 GHz</td> <td>-51.84 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16/4/2020 11:18:55</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.40424 GHz	1.08 dBm			M2	1			2.4 GHz	-51.40 dBm			M3	1			2.39 GHz	-55.95 dBm			M4	1			2.31 GHz	-55.55 dBm			M5	1			2.399906 GHz	-51.84 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.40424 GHz	1.08 dBm																																														
M2	1			2.4 GHz	-51.40 dBm																																														
M3	1			2.39 GHz	-55.95 dBm																																														
M4	1			2.31 GHz	-55.55 dBm																																														
M5	1			2.399906 GHz	-51.84 dBm																																														
<p>CH78 No hopping mode</p>	 <table border="1" data-bbox="686 1713 1332 1825"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.47999 GHz</td> <td>4.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4835 GHz</td> <td>-49.92 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.5 GHz</td> <td>-60.24 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.4835159 GHz</td> <td>-50.08 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16/4/2020 11:07:29</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.47999 GHz	4.64 dBm			M2	1			2.4835 GHz	-49.92 dBm			M3	1			2.5 GHz	-60.24 dBm			M4	1			2.4835159 GHz	-50.08 dBm										
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.47999 GHz	4.64 dBm																																														
M2	1			2.4835 GHz	-49.92 dBm																																														
M3	1			2.5 GHz	-60.24 dBm																																														
M4	1			2.4835159 GHz	-50.08 dBm																																														


CH78
Hopping mode

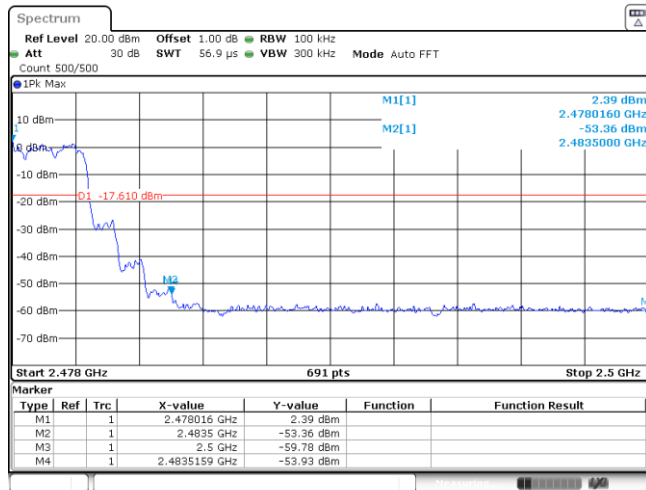




Date: 16.APR.2020 11:19:09

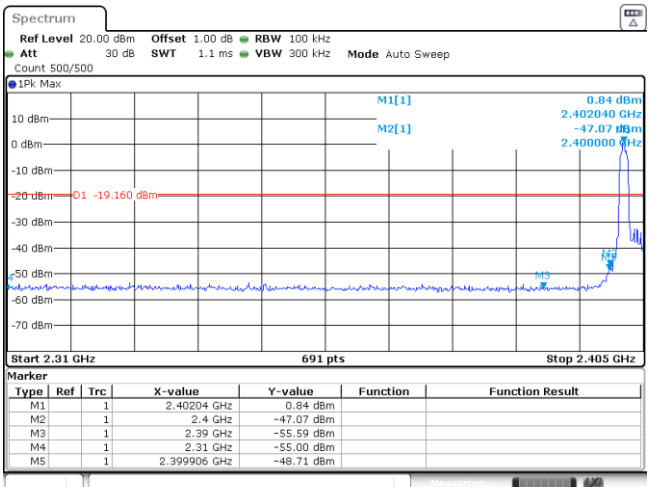
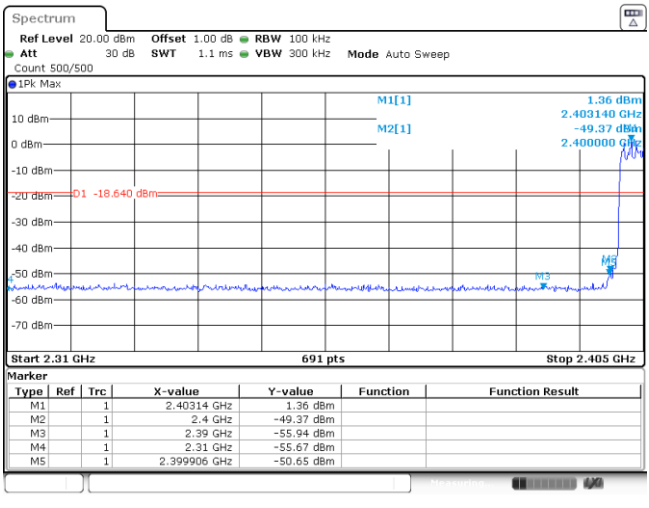
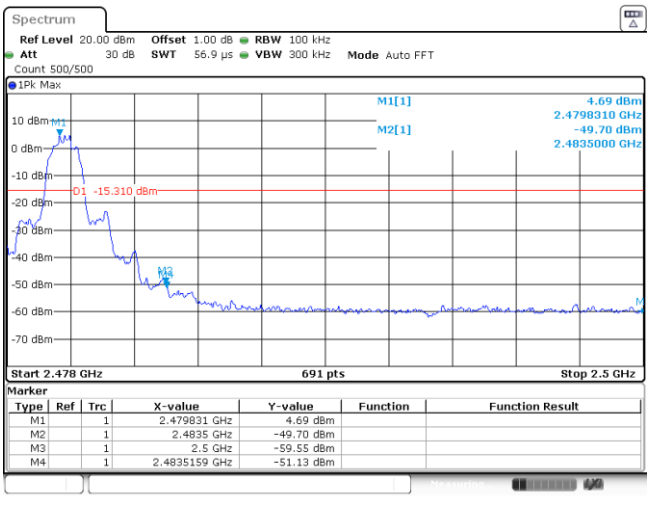
Test Item:	Band edge	Modulation type:	8DPSK																																										
<p>CH00 No hopping mode</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 500/500</p> <p>1Pk Max</p> <p>10 dBm M1[1] 0.84 dBm 2.40204 GHz 0 dBm M2[1] -47.07 dBm 2.400000 GHz -10 dBm -20 dBm -19.160 dBm -30 dBm -40 dBm -50 dBm M3 -60 dBm -70 dBm M4</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40204 GHz</td> <td>0.84 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-47.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-55.00 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399906 GHz</td> <td>-48.71 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 11:10:03</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40204 GHz	0.84 dBm			M2	1		2.4 GHz	-47.07 dBm			M3	1		2.39 GHz	-55.59 dBm			M4	1		2.31 GHz	-55.00 dBm			M5	1		2.399906 GHz	-48.71 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40204 GHz	0.84 dBm																																									
M2	1		2.4 GHz	-47.07 dBm																																									
M3	1		2.39 GHz	-55.59 dBm																																									
M4	1		2.31 GHz	-55.00 dBm																																									
M5	1		2.399906 GHz	-48.71 dBm																																									
<p>CH00 Hopping mode</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 500/500</p> <p>1Pk Max</p> <p>10 dBm M1[1] 1.36 dBm 2.403140 GHz 0 dBm M2[1] -49.37 dBm 2.400000 GHz -10 dBm -20 dBm -18.640 dBm -30 dBm -40 dBm -50 dBm M3 -60 dBm -70 dBm M4</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40314 GHz</td> <td>1.36 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-49.37 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-55.67 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399906 GHz</td> <td>-50.65 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 11:20:25</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40314 GHz	1.36 dBm			M2	1		2.4 GHz	-49.37 dBm			M3	1		2.39 GHz	-55.94 dBm			M4	1		2.31 GHz	-55.67 dBm			M5	1		2.399906 GHz	-50.65 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40314 GHz	1.36 dBm																																									
M2	1		2.4 GHz	-49.37 dBm																																									
M3	1		2.39 GHz	-55.94 dBm																																									
M4	1		2.31 GHz	-55.67 dBm																																									
M5	1		2.399906 GHz	-50.65 dBm																																									
<p>CH78 No hopping mode</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 56.9 µs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk Max</p> <p>10 dBm M1[1] 4.69 dBm 2.4798310 GHz 0 dBm M2[1] -49.70 dBm 2.4835000 GHz -10 dBm -20 dBm -15.310 dBm -30 dBm -40 dBm M3 -50 dBm -60 dBm -70 dBm M4</p> <p>Start 2.478 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.479831 GHz</td> <td>4.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-49.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-59.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4835159 GHz</td> <td>-51.13 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 16 APR 2020 11:15:07</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479831 GHz	4.69 dBm			M2	1		2.4835 GHz	-49.70 dBm			M3	1		2.5 GHz	-59.55 dBm			M4	1		2.4835159 GHz	-51.13 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479831 GHz	4.69 dBm																																									
M2	1		2.4835 GHz	-49.70 dBm																																									
M3	1		2.5 GHz	-59.55 dBm																																									
M4	1		2.4835159 GHz	-51.13 dBm																																									

CH78
Hoppig mode



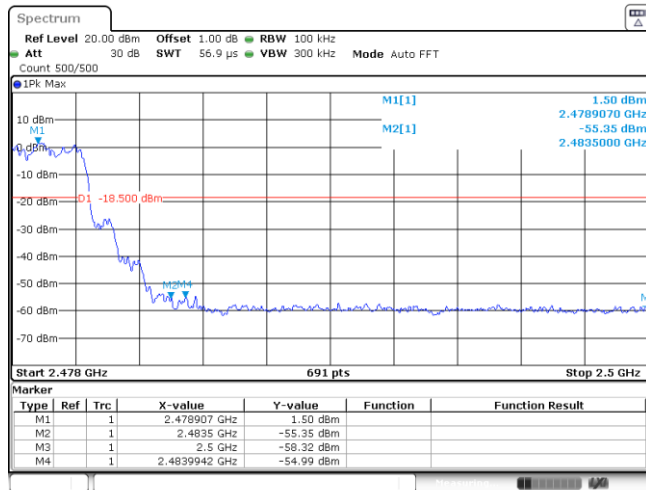


Date: 16.APR.2020 11:20:39

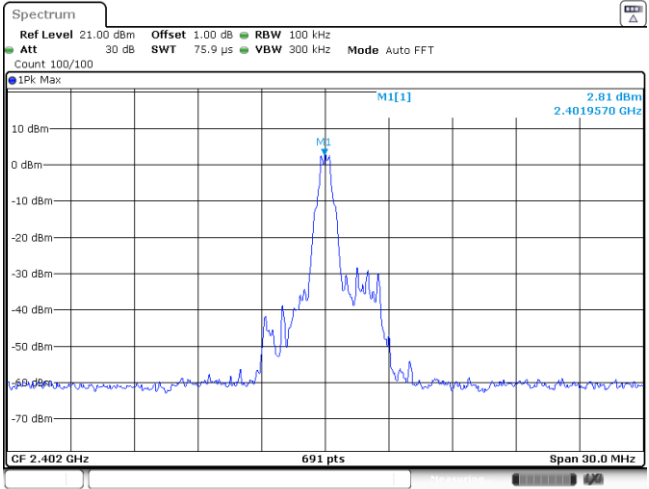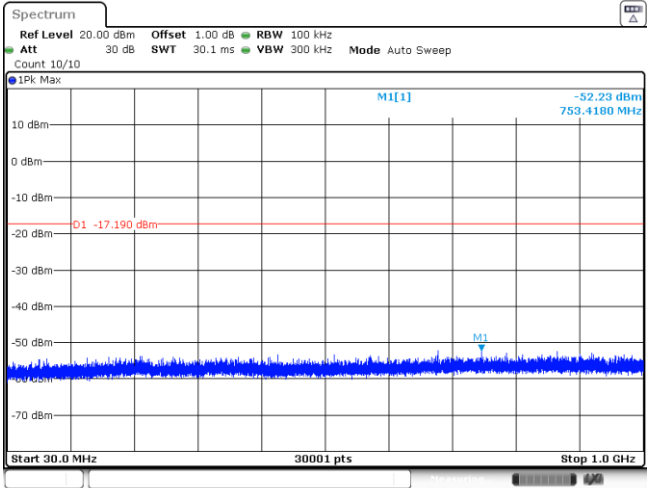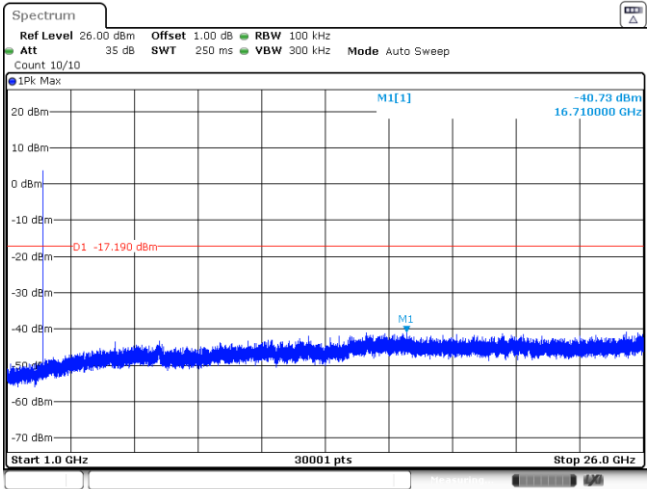
Test Item:	Spurious Emission	Modulation type:	GFSK
<p>CH00 Reference level</p>	 <p>Date: 16 APR 2020 10:53:20</p>		
<p>CH00 30MHz~1000MHz</p>	 <p>Date: 16 APR 2020 10:53:36</p>		
<p>CH00 1GHz~26GHz</p>	 <p>Date: 16 APR 2020 10:53:52</p>		
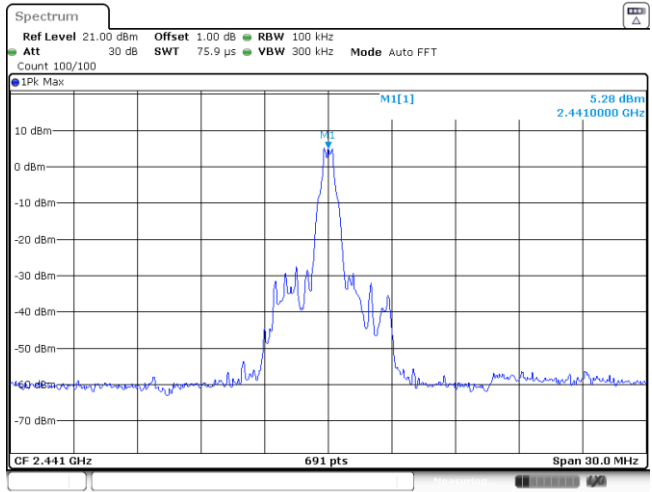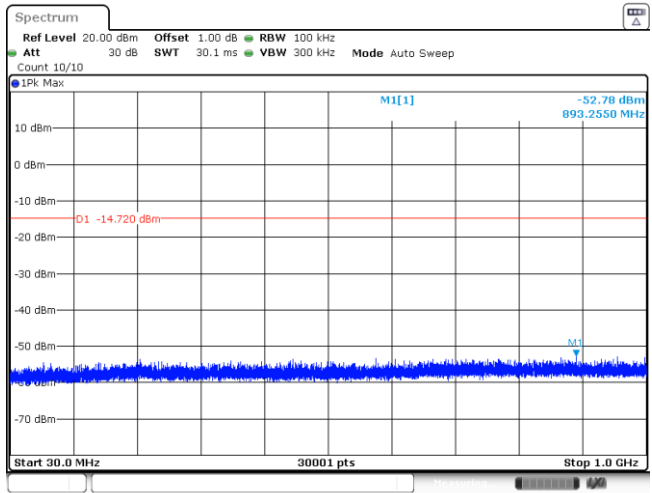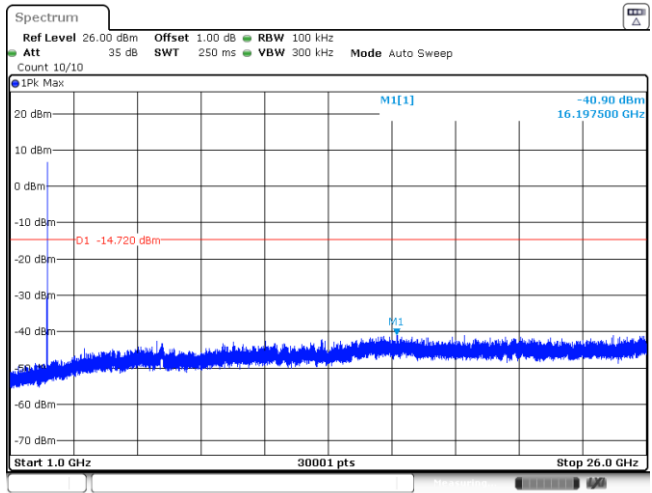
<p>CH39 Reference level</p>	 <p>Spectrum Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] 5.28 dBm 2.4410000 GHz CF 2.441 GHz 691 pts Span 30.0 MHz Date: 16 APR 2020 10:58:37</p>
<p>CH39 30MHz~1000MHz</p>	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -52.78 dBm 893.2550 MHz D1 -14.720 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 16 APR 2020 10:58:52</p>
<p>CH39 1GHz~26GHz</p>	 <p>Spectrum Ref Level 26.00 dBm Offset 1.00 dB RBW 100 kHz Att 35 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -40.90 dBm 16.197500 GHz D1 -14.720 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 16 APR 2020 10:57:08</p>


<p>CH78 Reference level</p>	<p>Spectrum</p> <p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] 4.28 dBm 2.4798260 GHz</p> <p>CF 2.48 GHz 691 pts Span 30.0 MHz</p> <p>Date: 16.APR.2020 10:58:14</p>
<p>CH78 30MHz~1000MHz</p>	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -52.69 dBm 775.7920 MHz</p> <p>D1 -15.720 dBm</p> <p>Start 30.0 MHz 30001 pts Stop 1.0 GHz</p> <p>Date: 16.APR.2020 10:58:30</p>
<p>CH78 1GHz~26GHz</p>	<p>Spectrum</p> <p>Ref Level 26.00 dBm Offset 1.00 dB RBW 100 kHz Att 35 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -40.31 dBm 25.888333 GHz</p> <p>D1 -15.720 dBm</p> <p>Start 1.0 GHz 30001 pts Stop 26.0 GHz</p> <p>Date: 16.APR.2020 10:58:46</p>

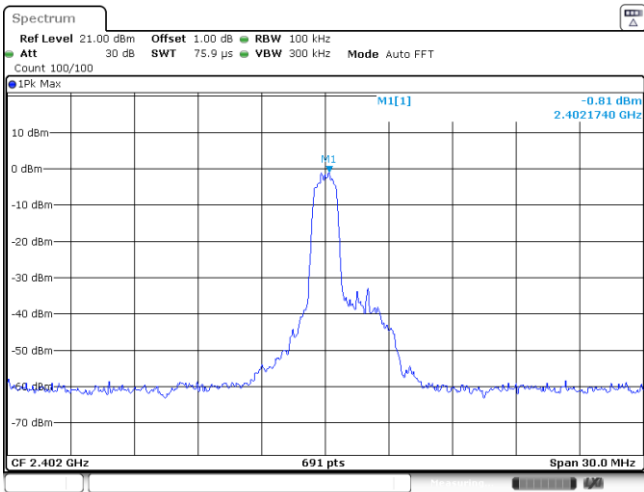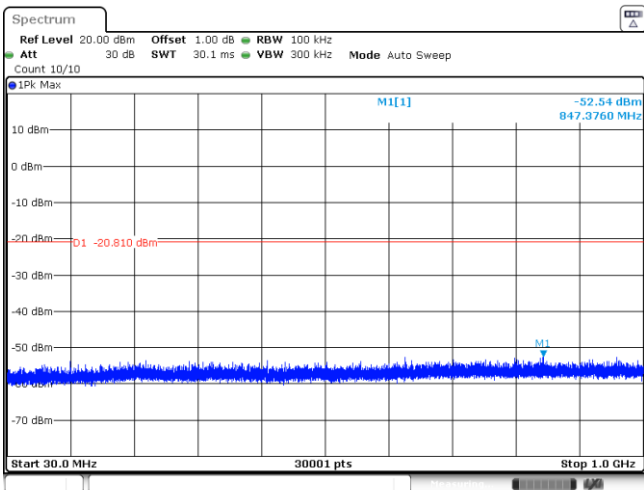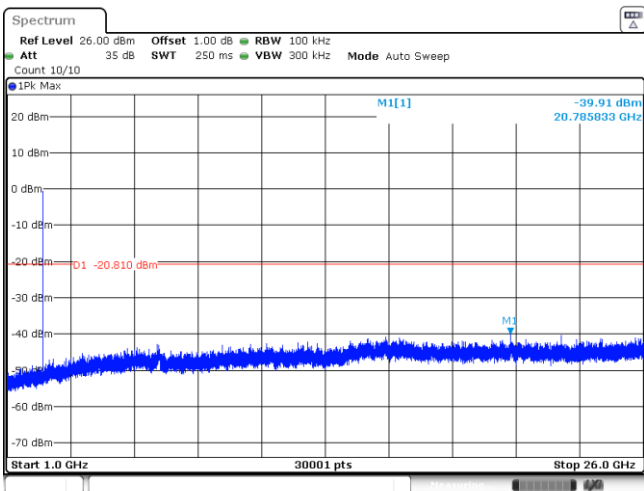Test Item:	Spurious Emission	Modulation type:	π/4DQPSK
<p>CH00 Reference level</p>	 <p>1Pk Max: -0.81 dBm @ 2.4021740 GHz</p> <p>CF 2.402 GHz, 691 pts, Span 30.0 MHz</p> <p>Date: 16/04/2020 11:01:55</p>		
<p>CH00 30MHz~1000MHz</p>	 <p>1Pk Max: -52.54 dBm @ 847.3760 MHz</p> <p>Start 30.0 MHz, 30001 pts, Stop 1.0 GHz</p> <p>Date: 16/04/2020 11:02:12</p>		
<p>CH00 1GHz~26GHz</p>	 <p>1Pk Max: -39.91 dBm @ 20.785833 GHz</p> <p>Start 1.0 GHz, 30001 pts, Stop 26.0 GHz</p> <p>Date: 16/04/2020 11:02:28</p>		


CH39
Reference level

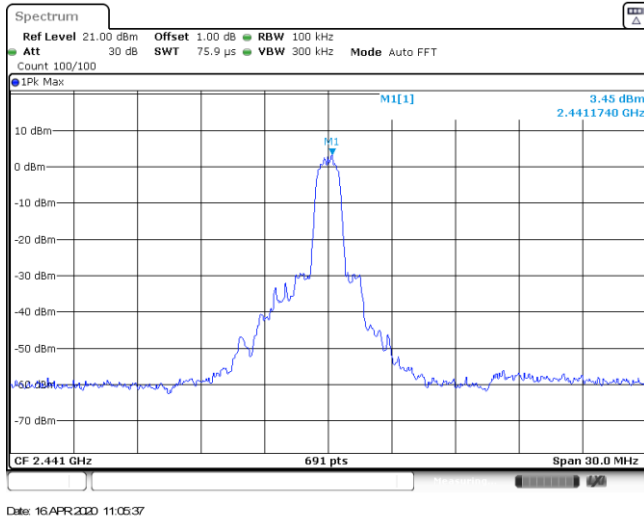

CH39
30MHz~1000MHz

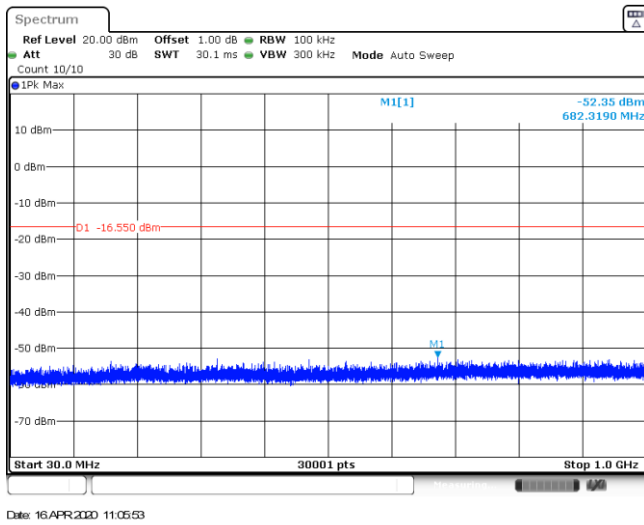


CH39
1GHz~26GHz

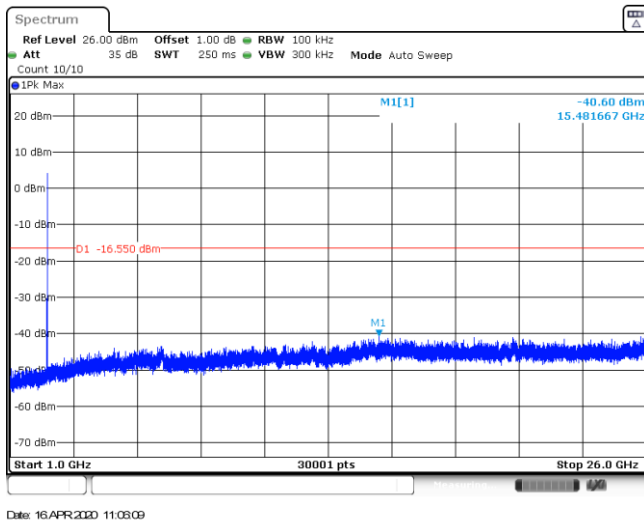

<p>CH78 Reference level</p>	<p>Spectrum</p> <p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] 2.63 dBm 2.4801740 GHz</p> <p>CF 2.48 GHz 691 pts Span 30.0 MHz</p> <p>Date: 16.APR.2020 11:07:36</p>
<p>CH78 30MHz~1000MHz</p>	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -52.92 dBm 754.8410 MHz</p> <p>D1 -17.370 dBm</p> <p>Start 30.0 MHz 30001 pts Stop 1.0 GHz</p> <p>Date: 16.APR.2020 11:07:51</p>
<p>CH78 1GHz~26GHz</p>	<p>Spectrum</p> <p>Ref Level 26.00 dBm Offset 1.00 dB RBW 100 kHz Att 35 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -40.61 dBm 20.165833 GHz</p> <p>D1 -17.370 dBm</p> <p>Start 1.0 GHz 30001 pts Stop 26.0 GHz</p> <p>Date: 16.APR.2020 11:08:07</p>


Test Item:	Spurious Emission	Modulation type:	8DPSK
<p>CH00 Reference level</p>			
<p>CH00 30MHz~1000MHz</p>			
<p>CH00 1GHz~26GHz</p>			

CH39
Reference level

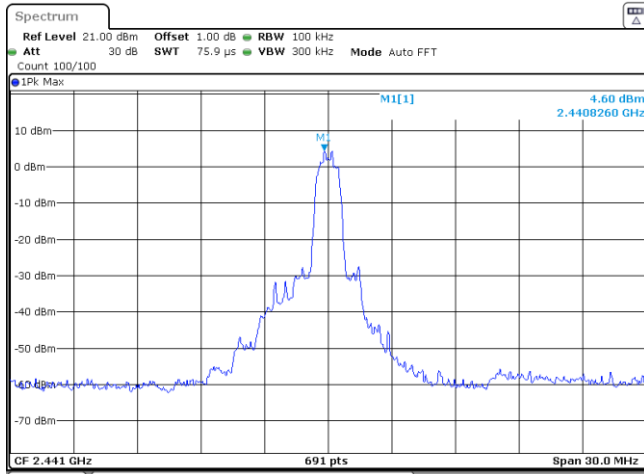


Date: 16.APR.2020 11:13:17

CH39
30MHz~1000MHz

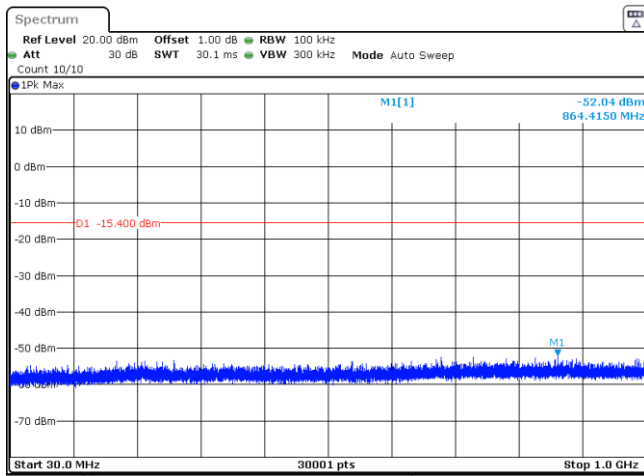

Date: 16.APR.2020 11:13:33

CH39
1GHz~26GHz

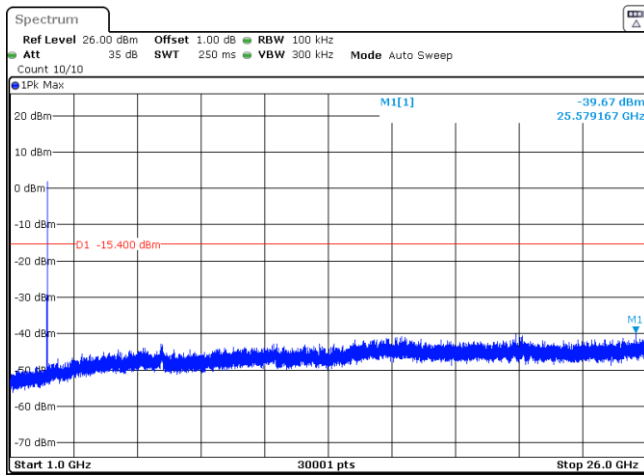

Date: 16.APR.2020 11:13:49

<p>CH78 Reference level</p>	<p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] 3.65 dBm 2.4798260 GHz CF 2.48 GHz 691 pts Span 30.0 MHz Date: 16.APR.2020 11:15:13</p>
<p>CH78 30MHz~1000MHz</p>	<p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -53.13 dBm 695.8990 MHz D1 -16.350 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 16.APR.2020 11:15:29</p>
<p>CH78 1GHz~26GHz</p>	<p>Ref Level 26.00 dBm Offset 1.00 dB RBW 100 kHz Att 35 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -40.85 dBm 18.794167 GHz D1 -16.350 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 16.APR.2020 11:15:45</p>

-----End of Report-----