



FCC PART 22 and 90

TEST REPORT

For

**Shenzhen Excera Technology Co., Ltd.**

3rd Floor, Jiada R&D Building, No.5 Songpingshan Road, Hi-Tech Park North, Nanshan District, Shenzhen

**FCC ID: 2AE6CEP3620VHF**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Digital Portable Radio
<b>Test Engineer:</b> Rocky Kang	<i>Rocky Kang</i>
<b>Report Number:</b> RSZ160505009-00B	
<b>Report Date:</b> 2016-05-25	
<b>Reviewed By:</b> Bell Hu RF Engineer	<i>Bell Hu</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION</b> .....	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
<b>SUMMARY OF TEST RESULTS</b> .....	<b>8</b>
<b>FCC §1.1307(b) &amp; §2.1093 - RF EXPOSURE</b> .....	<b>9</b>
APPLICABLE STANDARD.....	9
<b>FCC §2.1046 &amp; § 22.727&amp; §90.205 - RF OUTPUT POWER</b> .....	<b>10</b>
APPLICABLE STANDARD.....	10
TEST PROCEDURE.....	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST DATA.....	10
<b>FCC §2.1047 &amp; §90.207 - MODULATION CHARACTERISTIC</b> .....	<b>12</b>
APPLICABLE STANDARD.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE.....	12
TEST DATA.....	12
<b>FCC §2.1049 &amp; §22.357 &amp; § 22.731§90.209 &amp; §90.210 – OCCUPIED BANDWIDTH &amp; EMISSION MASK</b> ...18	<b>18</b>
APPLICABLE STANDARD.....	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST PROCEDURE.....	18
TEST DATA.....	19
<b>FCC §2.1051 &amp; §22.861 &amp; §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS</b> .....	<b>28</b>
APPLICABLE STANDARD.....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE.....	28
TEST DATA.....	28
<b>FCC §2.1053 &amp; §22.861 &amp; §90.210 - RADIATED SPURIOUS EMISSIONS</b> .....	<b>31</b>
APPLICABLE STANDARD.....	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST PROCEDURE.....	31
TEST DATA.....	32

**FCC §2.1055 & § 22.355 & §90.213 - FREQUENCY STABILITY .....33**  
    APPLICABLE STANDARD .....33  
    TEST EQUIPMENT LIST AND DETAILS.....33  
    TEST PROCEDURE .....33  
    TEST DATA .....33

**FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....35**  
    APPLICABLE STANDARD .....35  
    TEST EQUIPMENT LIST AND DETAILS.....35  
    TEST PROCEDURE .....35  
    TEST DATA .....36

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Shenzhen Excera Technology Co., Ltd.*'s product, model number: *EP3620 VHF (FCC ID: 2AE6CEP3620VHF)* or the "EUT" in this report was a *Digital Portable Radio*, which was measured approximately: 128 mm (L) x 61 mm (W) x 37 mm (H), rated input voltage: DC 7.4V rechargeable Li-ion battery or DC 12.0 V from adapter.

#### Adapter Information:

Model: SAW06F-120-0500UD

Input: AC 100-240V, 50/60 Hz, 0.25A

Output: DC 12V, 500mA

**Note:** The series product, model EP3120 VHF and model EP3620 VHF, they are electrically identical and the differences between them are the model number and screen. Model EP3620 VHF was selected for fully testing, which was explained in the attached product similarity declaration letter.

*\* All measurement and test data in this report was gathered from production sample serial number: 1602152 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-05-05.*

### Objective

This test report is prepared on behalf of *Shenzhen Excera Technology Co., Ltd.* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

No related submittal.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2014.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz.and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

## **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

**SYSTEM TEST CONFIGURATION**

**Description of Test Configuration**

The system was configured for testing in a test mode which has been done in the factory.

**EUT Exercise Software**

No exercise software was used.

**Special Accessories**

No special accessory was used.

**Equipment Modifications**

No modification was made to the EUT tested.


**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
/	/	/	/

**External I/O Cable**

Cable Description	Length (m)	From Port	To
/	/	/	/

**Block Diagram of Test Setup**

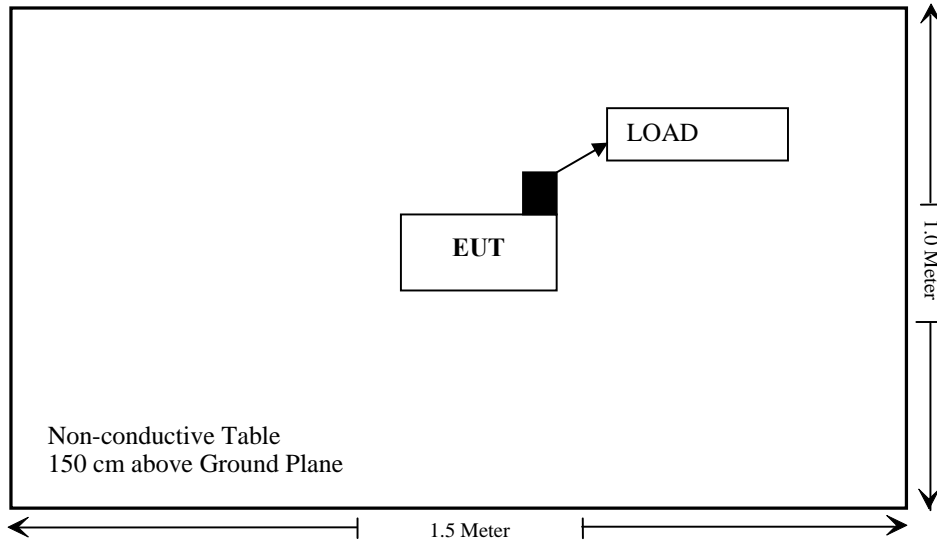

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§1.1307(b), §2.1093	RF Exposure	Compliance
§2.1046; § 22.727; §90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance



---

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

**Result:** Compliance.

Please refer to SAR Report Number: RSZ160505009-20A.

**FCC §2.1046 & § 22.727 & §90.205 - RF OUTPUT POWER****Applicable Standard**

FCC §2.1046, § 22.727 and §90.205

**Test Procedure**

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
HP Agilent	RF Communication test set	8920A	3325U00859	2015-06-03	2016-06-02
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2016-05-16.*

*Test Mode: Transmitting*

**Test Result:** Compliance. Please refer to following table.

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output (dBm)	Output Power(W)	Note		
Analog	12.5	136.025	High	37.59	5.74	For federal		
			Low	30.22	1.05			
		155.025	High	36.87	4.86	For Part 90		
			Low	29.96	0.99			
		158.55	High	37.32	5.40	For Part 22&90		
			Low	30.67	1.17			
		161.025	High	37.33	5.41	For Part 22&90		
			Low	30.75	1.19			
		173.97	High	36.82	4.81	For federal		
			Low	30.26	1.06			
		Digital	12.5	136.025	High	37.64	5.94	For federal
					Low	30.38	1.09	
155.025	High			36.88	4.88	For Part 90		
	Low			30.02	1.00			
158.55	High			37.31	5.38	For Part 22&90		
	Low			30.63	1.16			
161.025	High			37.34	5.42	For Part 22&90		
	Low			30.75	1.19			
173.97	High			36.99	5.00	For federal		
	Low			30.23	1.05			

Note: The high rated power is 5.0W.  
The low rated power is 1.0W.

## FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

### Applicable Standard

FCC§2.1047 and §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communication Test Set	8920A	3438A05201	2015-06-14	2016-06-13
LEADER	MILLIVOLTMETER	LMV-181A	6041126	2015-07-02	2016-07-01
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

Test Method: TIA/EIA-603 2.2.3

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Rocky Kang on 2016-05-14.*


*Test Mode: Transmitting*

**Result:** Compliance.

**Analog Modulation:****MODULATION LIMITING**

Carrier Frequency: 155.025 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	1.885	0.093	1.864	0.085	2.500
400	1.954	0.113	1.935	0.104	2.500
500	1.955	0.123	1.946	0.117	2.500
600	1.974	0.132	1.962	0.126	2.500
700	2.029	0.159	2.013	0.142	2.500
800	2.046	0.176	2.041	0.165	2.500
900	2.073	0.195	2.045	0.173	2.500
1000	2.046	0.195	2.025	0.186	2.500
1200	1.968	0.225	1.942	0.212	2.500
1400	2.025	0.241	2.018	0.234	2.500
1600	2.075	0.250	2.055	0.243	2.500
1800	2.093	0.267	2.081	0.251	2.500
2000	2.129	0.275	2.066	0.264	2.500
2100	2.154	0.281	2.138	0.273	2.500
2200	2.117	0.282	2.105	0.271	2.500
2300	2.132	0.305	2.115	0.293	2.500
2400	2.183	0.301	2.174	0.292	2.500
2500	2.225	0.305	2.173	0.295	2.500
2600	2.107	0.308	2.091	0.292	2.500
2700	2.046	0.301	2.031	0.295	2.500
2800	2.093	0.301	2.062	0.292	2.500
2900	2.085	0.304	2.048	0.283	2.500
3000	2.054	0.281	1.926	0.274	2.500

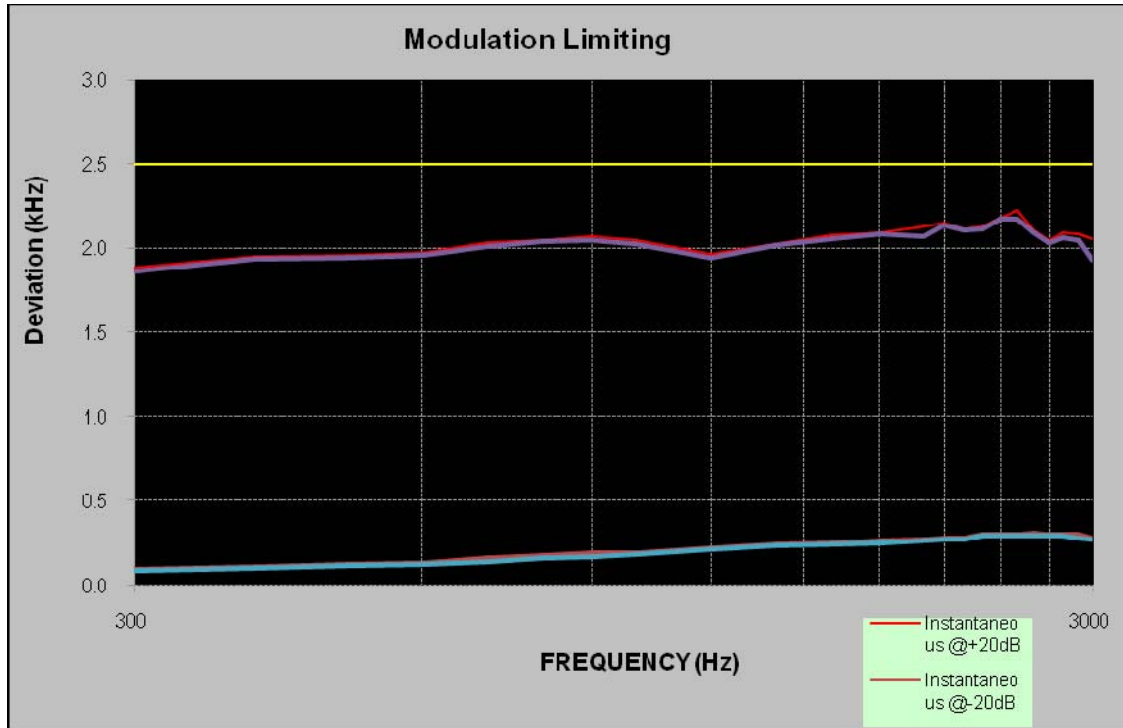

**Audio Frequency Response**

Carrier Frequency: 155.025 MHz, Channel Separation=12.5 kHz

<b>Audio Frequency (Hz)</b>	<b>Response Attenuation (dB)</b>
400	-7.79
500	-5.55
600	-3.72
700	-2.00
800	-1.15
900	-0.32
1000	0.00
1200	1.92
1400	2.87
1600	3.44
1800	4.04
2000	4.45
2100	4.82
2200	5.04
2300	5.29
2400	5.52
2500	5.59
2600	5.65
2700	5.58
2800	5.64
2900	5.35
3000	4.93

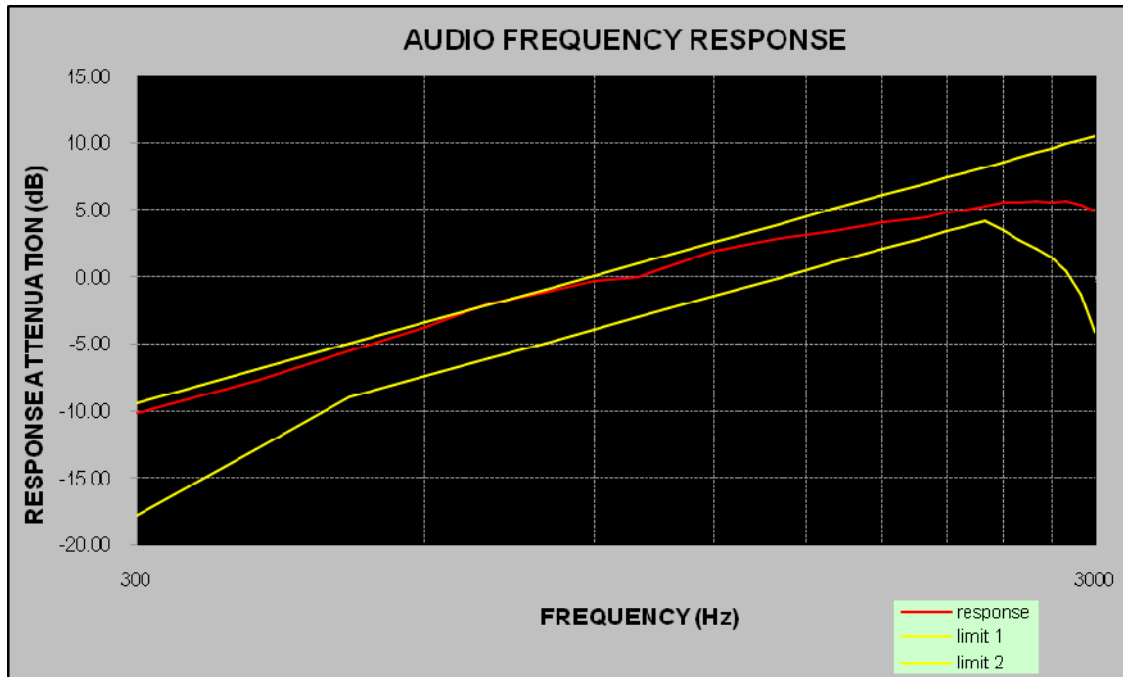




Audio frequency lows pass filter response

Carrier Frequency: 155.025 MHz, Channel Separation=12.5 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-35.6	0.0
4.0	-46.2	-12.5
5.0	-61.9	-22.2
6.0	-66.3	-30.1
7.0	-72.4	-36.8
8.0	-77.9	-42.6
9.0	-78.1	-47.7
10.0	-82.5	-52.3
12.0	-78.5	-60.2
14.0	-79.4	-66.9
16.0	-77.5	-72.7
18.0	-83.7	-77.8
20.0	-86.5	-82.5

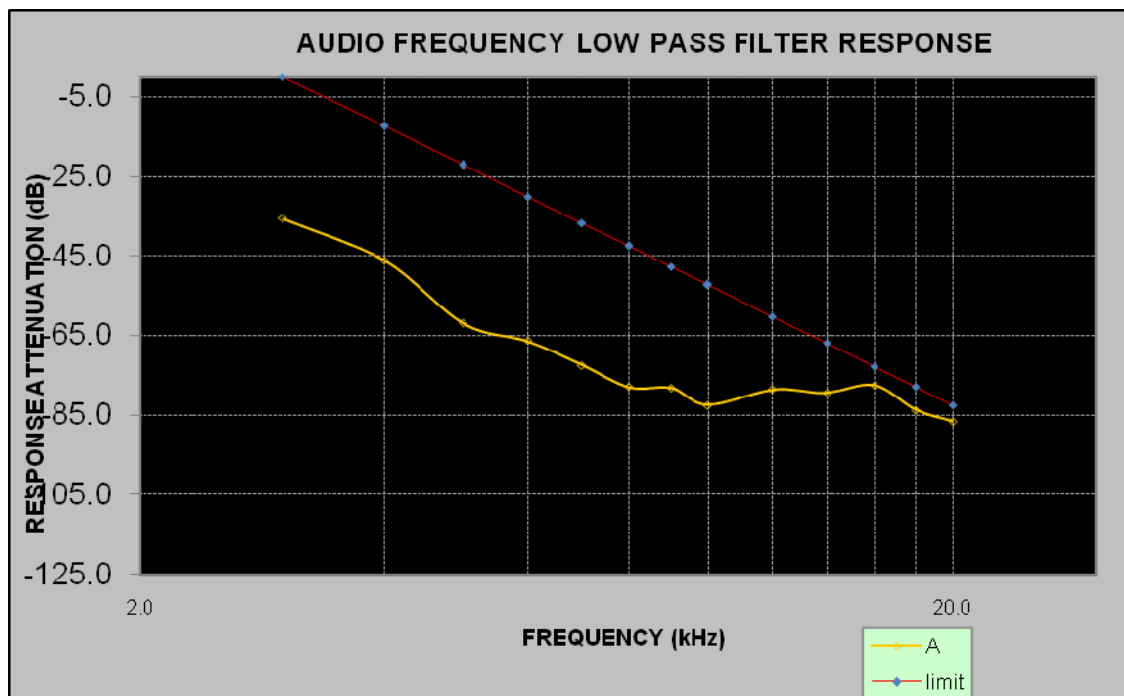

## FCC §2.1049 & §22.357 & § 22.731 §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

### Applicable Standard

FCC §2.1049, §22.357, § 22.73, §90.209 and §90.210

Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ( $f_d - 2.88$  kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz at least: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
HP	RF Communication Test Set	8920A	3325U00859	2015-06-03	2016-06-03
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band  $\pm 50$  kHz from the carrier frequency.

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	26~27 °C
<b>Relative Humidity:</b>	56~57 %
<b>ATM Pressure:</b>	100.0~101.0 kPa

*The testing was performed by Rocky Kang from 2016-05-14 to 2016-05-19.*


Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	12.5	155.025	High	9.82	10.32	For Part 90
	12.5		Low	9.82	10.32	
	12.5	158.55	High	9.82	10.32	For Part 22&90
	12.5		Low	9.82	10.32	
	12.5	161.025	High	9.82	10.32	For Part 22&90
	12.5		Low	9.82	10.32	
Digital	12.5	155.025	High	7.82	10.32	For Part 90
	12.5		Low	7.31	9.52	
	12.5	158.55	High	7.72	9.92	For Part 22&90
	12.5		Low	7.52	9.41	
	12.5	161.025	High	7.62	9.82	For Part 22&90
	12.5		Low	7.72	9.52	

**Analog Modulation:**


**Frequency 155.025 MHz:99% Occupied & 26 dB Bandwidth, High Power**

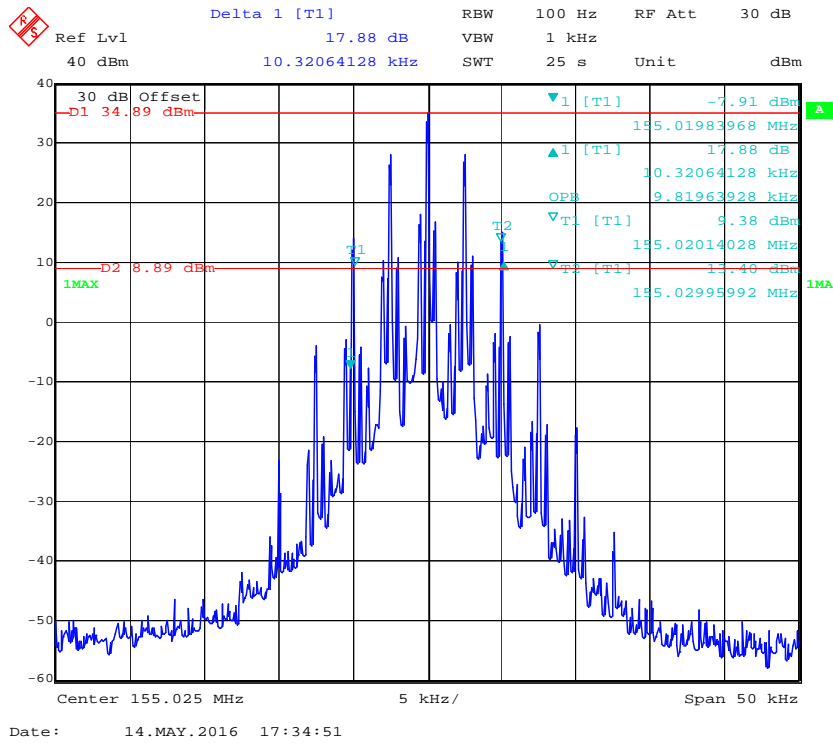


**Frequency 155.025 MHz:99% Occupied & 26 dB Bandwidth,Low Power**

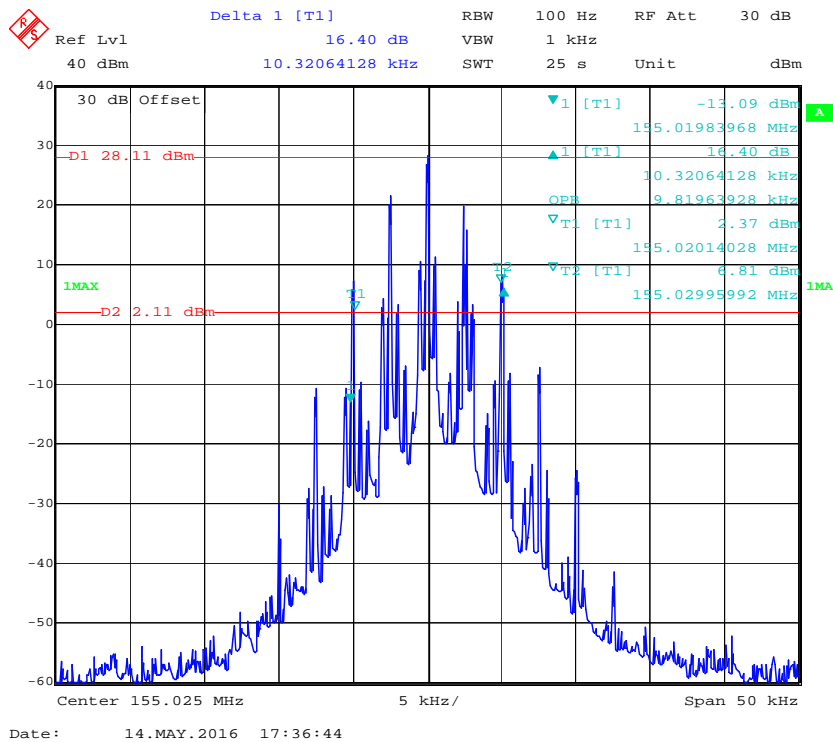


### Frequency 155.025 MHz: Emission Mask, High Power

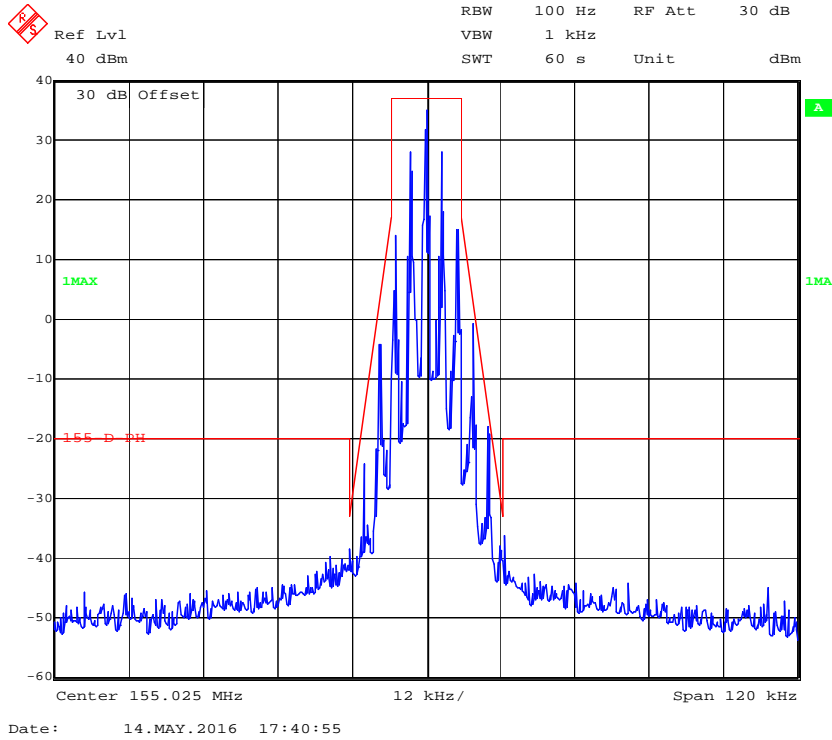


### Frequency 155.025 MHz: Emission Mask, Low Power

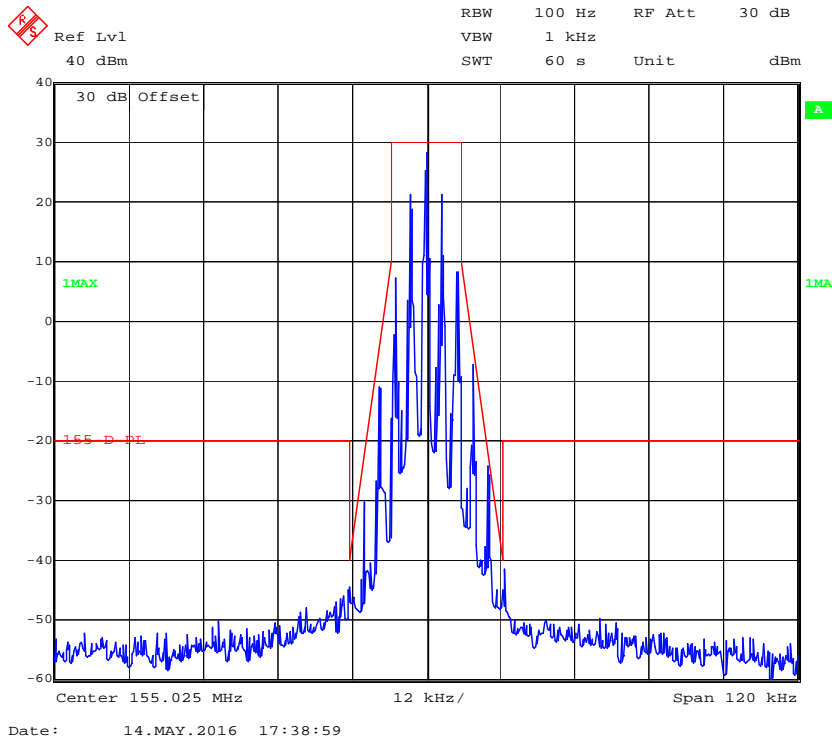


**Frequency 158.55 MHz:99% Occupied & 26 dB Bandwidth, High Power**

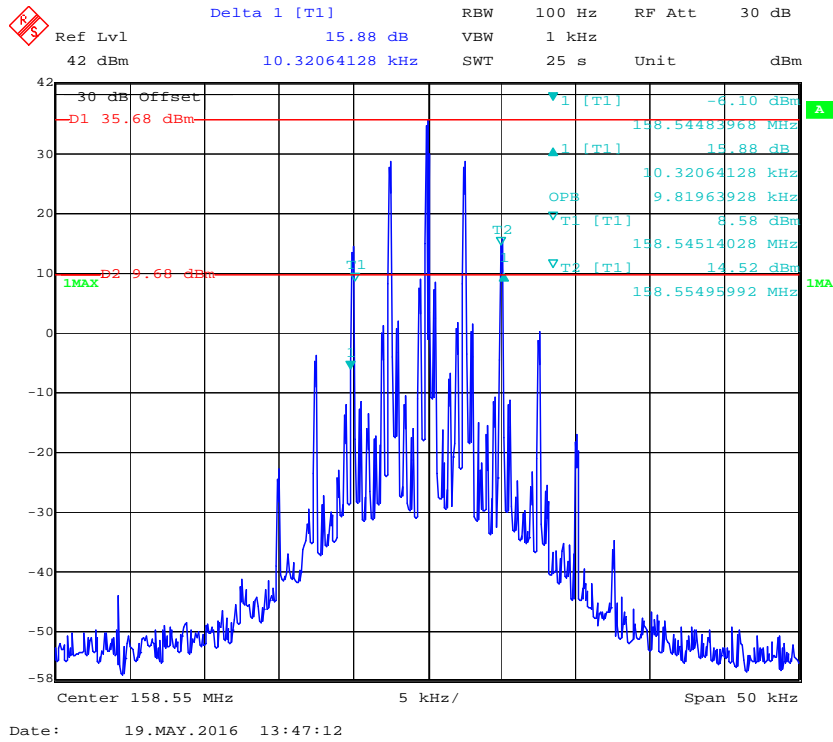


**Frequency 158.55 MHz:99% Occupied & 26 dB Bandwidth, Low Power**

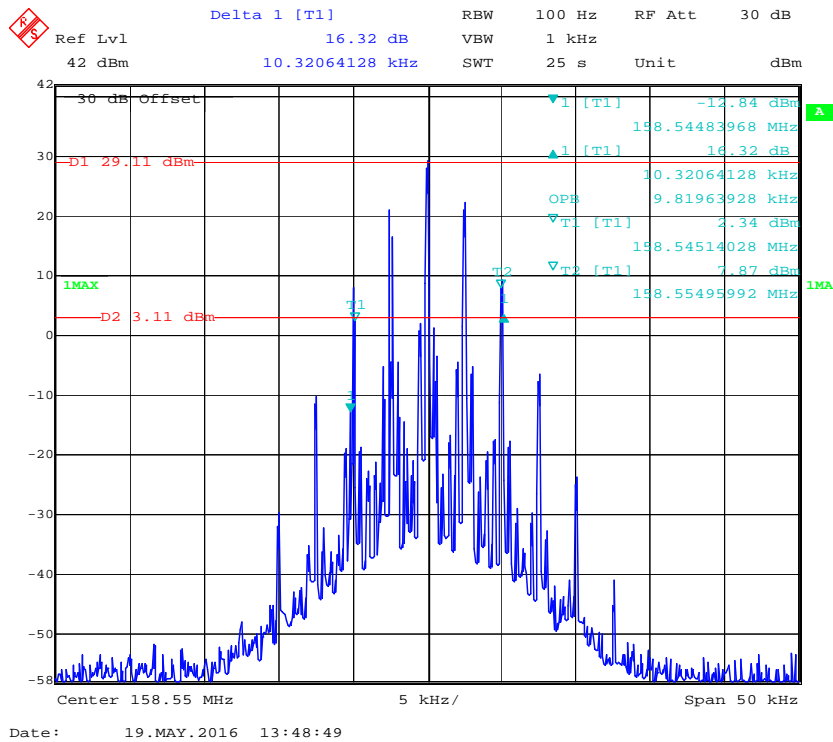

**Frequency 161.025 MHz:99% Occupied & 26 dB Bandwidth, High Power**

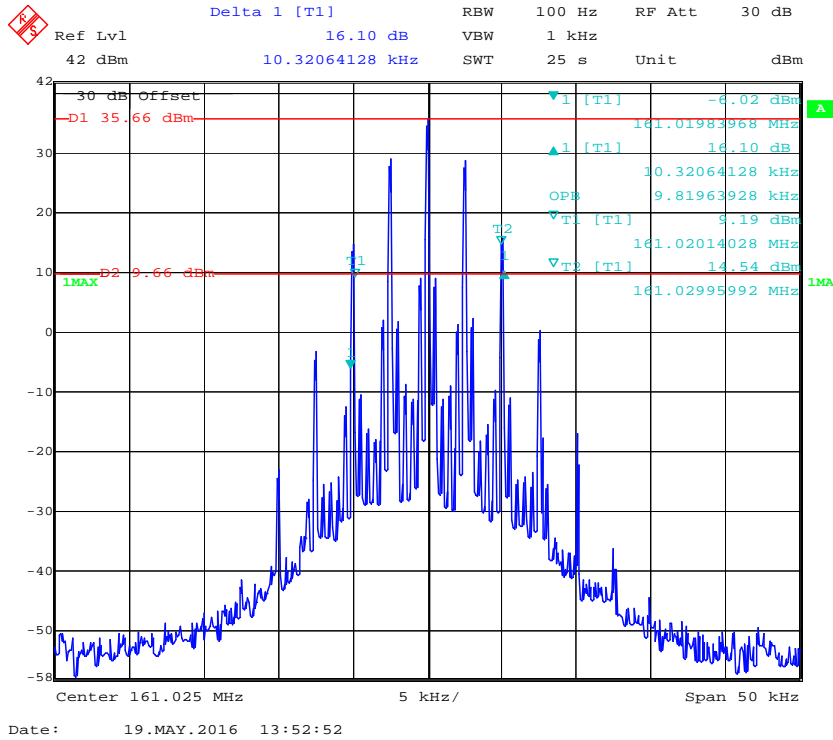


**Frequency 161.025 MHz:99% Occupied & 26 dB Bandwidth, Low Power**

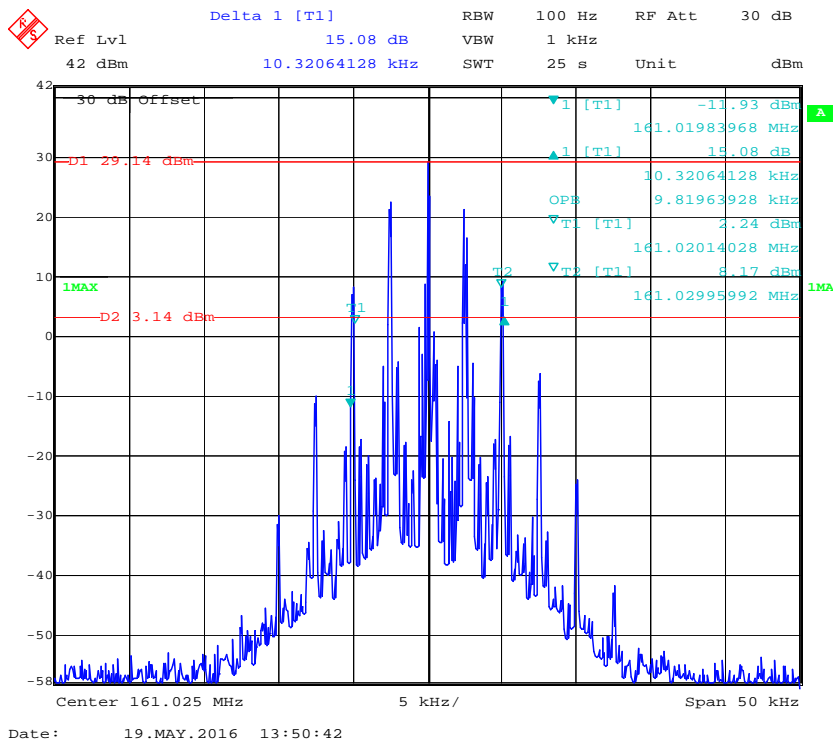


**Digital Modulation:**

**Frequency 155.025 MHz:99% Occupied & 26 dB Bandwidth, High Power**

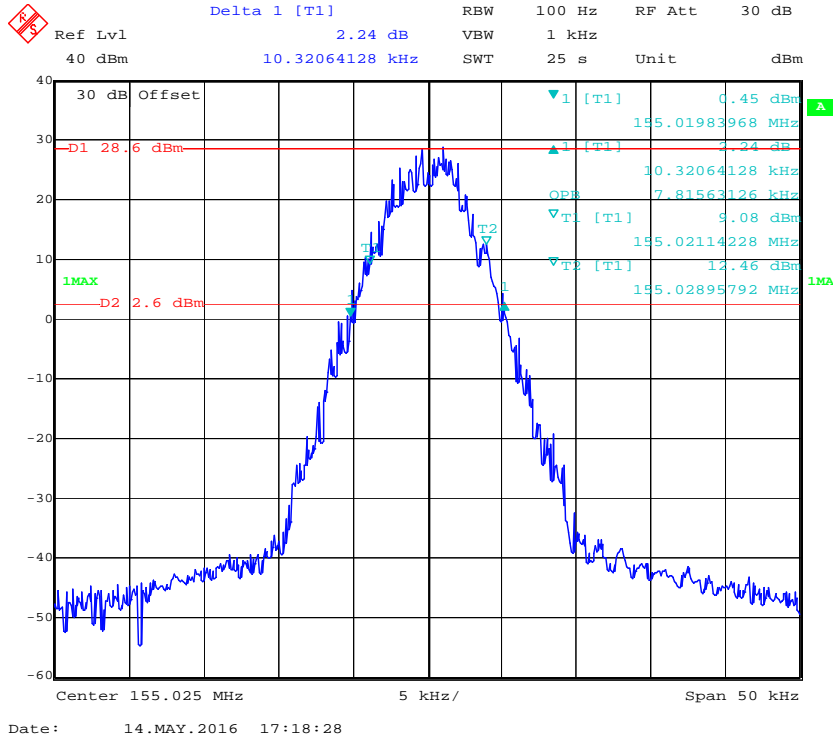


**Frequency 155.025 MHz:99% Occupied & 26 dB Bandwidth with Low Power**

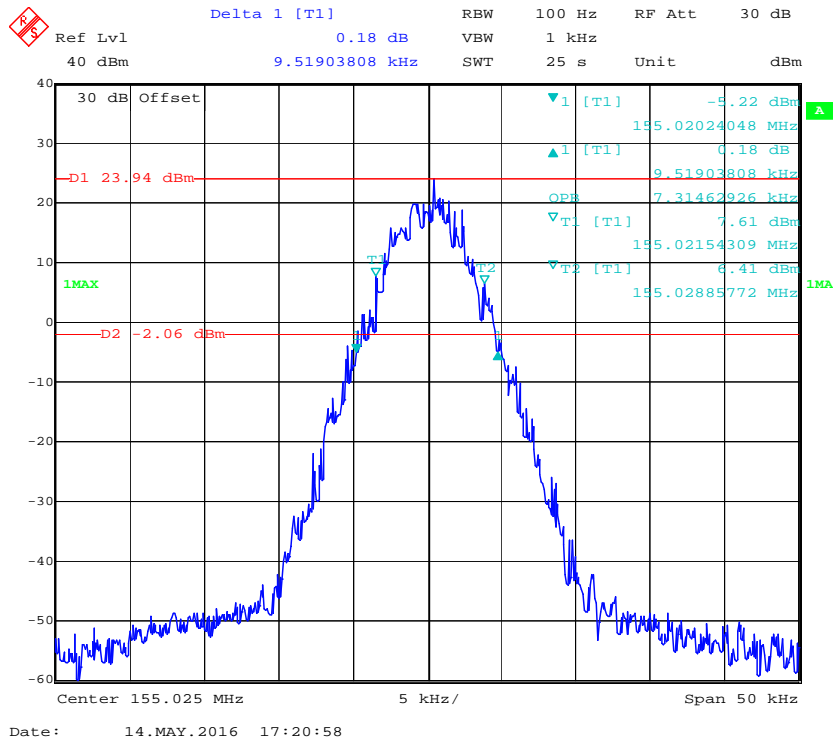





**Frequency 155.025 MHz: Emission Mask, High Power**

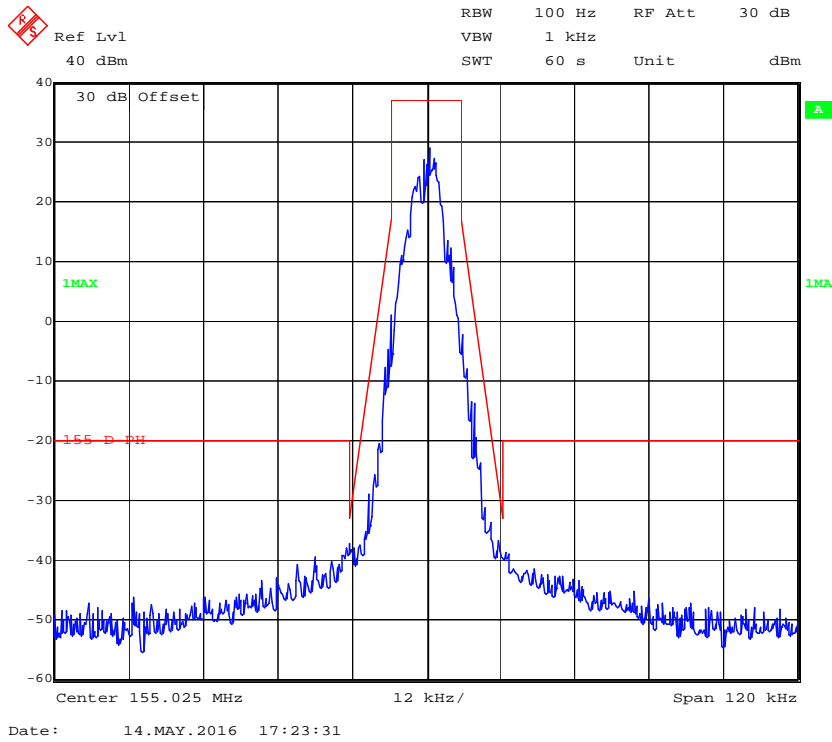


**Frequency 155.025 MHz: Emission Mask, Low Power**

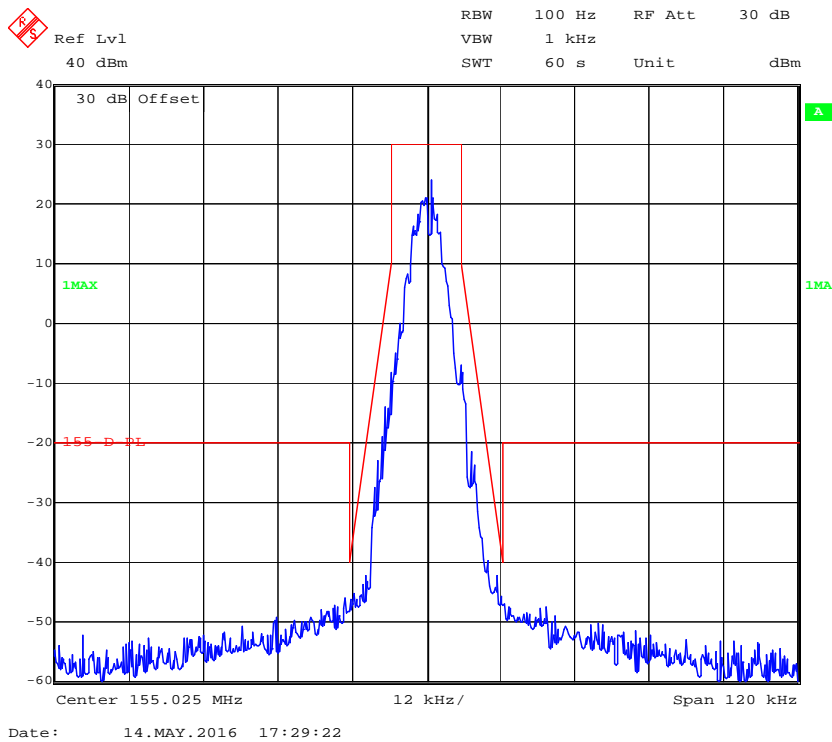


**Frequency 158.55 MHz:99% Occupied & 26 dB Bandwidth, High Power**

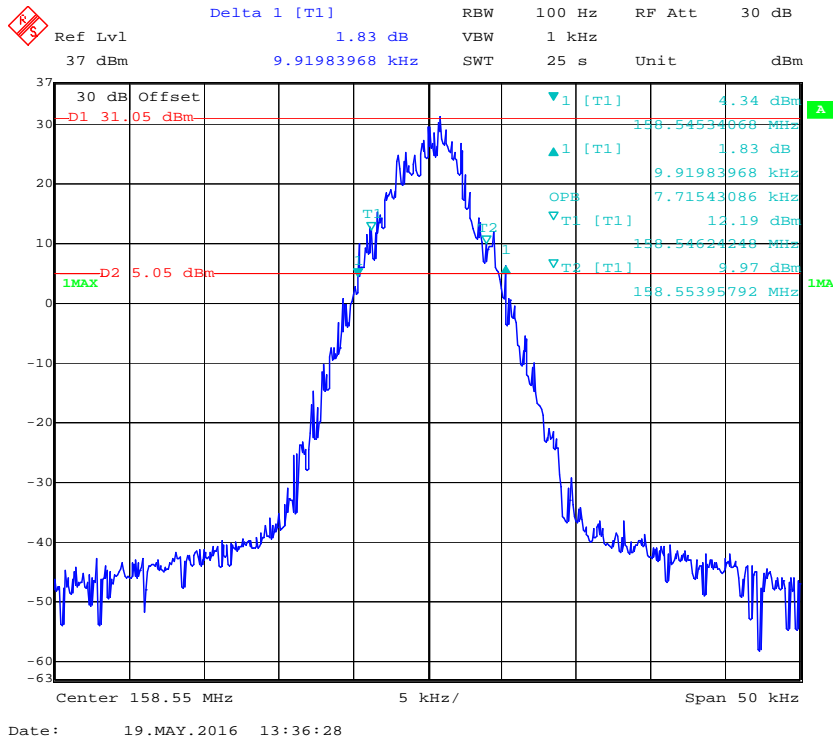


**Frequency 158.55 MHz:99% Occupied & 26 dB Bandwidth, Low Power**

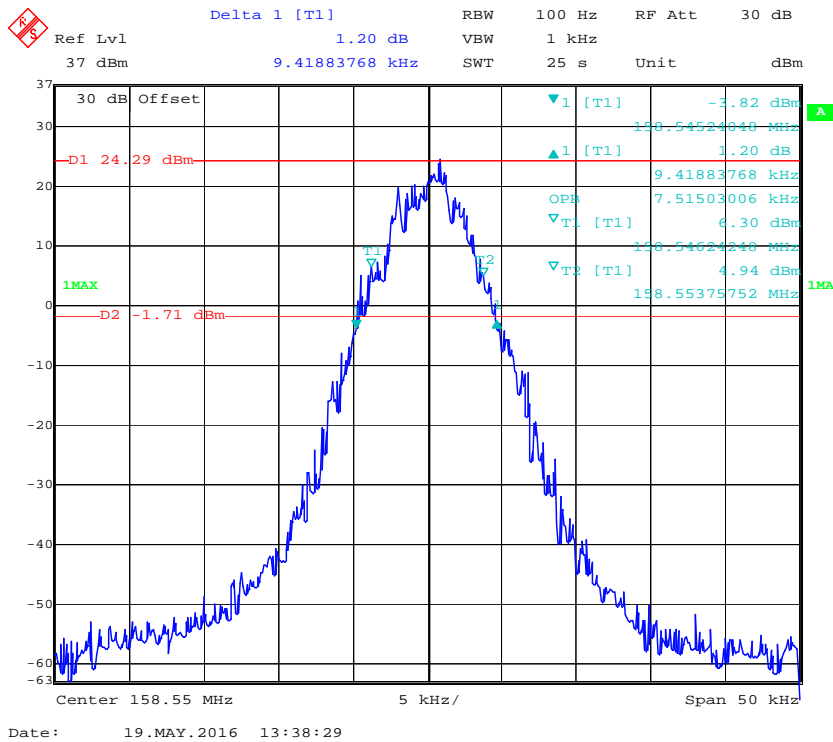

**Frequency 161.025 MHz:99% Occupied & 26 dB Bandwidth, High Power**

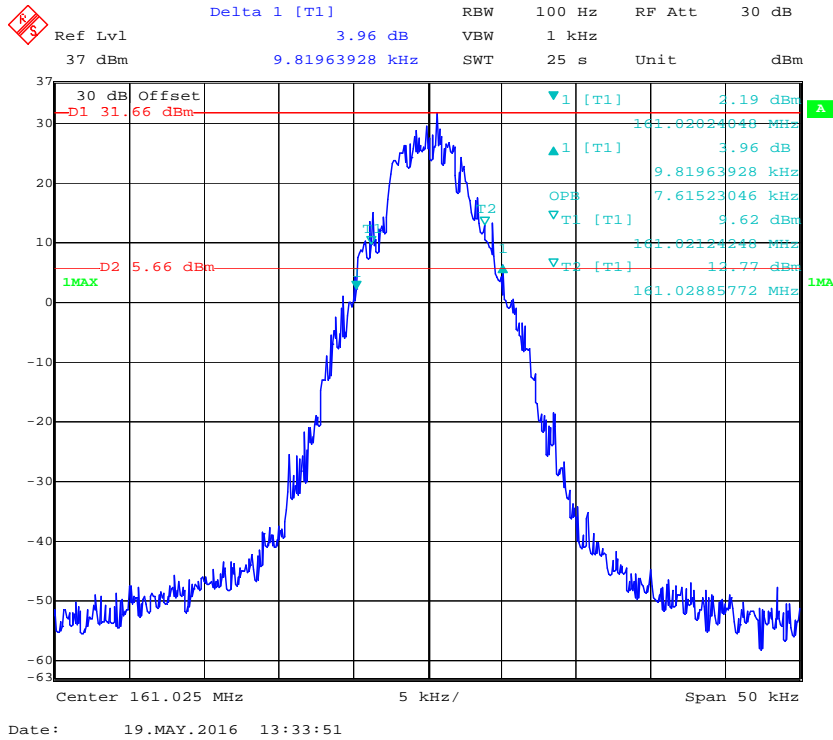

**Frequency 161.025 MHz:99% Occupied & 26 dB Bandwidth, Low Power**

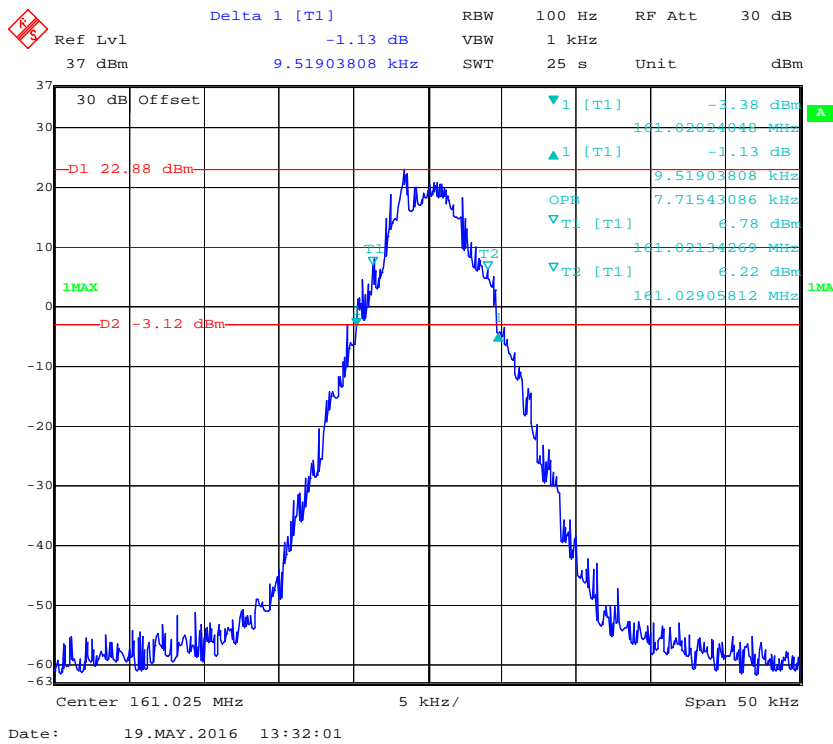

## FCC §2.1051 & §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least  $7.27 (f_d - 2.88 \text{ kHz})$  dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


*The testing was performed by Rocky Kang on 2016-05-10.*

*Test Mode: Transmitting, please refer to the following plots.*




Digital Modulation:

30MHz - 1 GHz, 155.025MHz

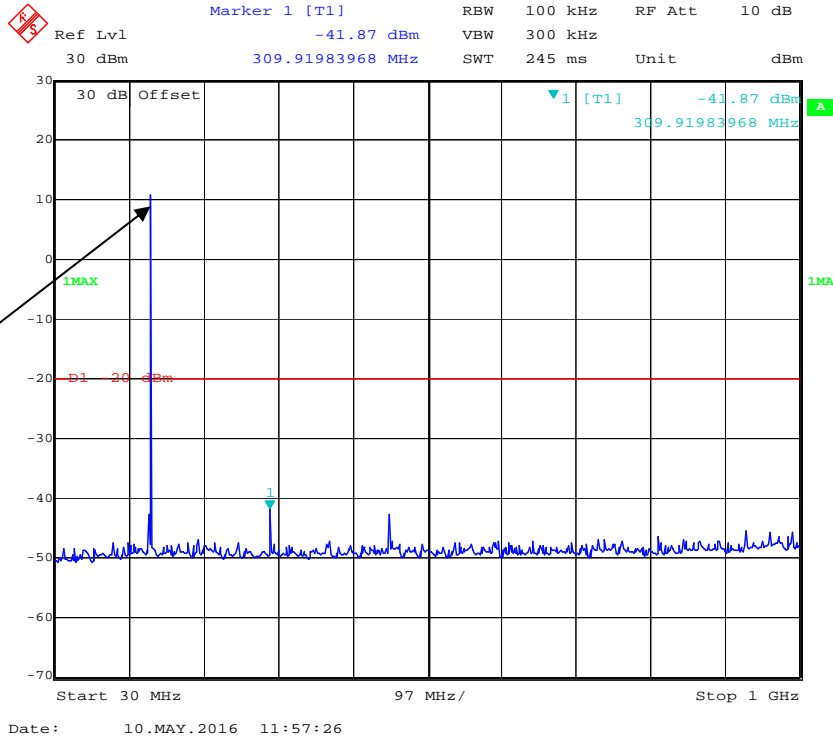

Fund. test with notch filter

1 GHz - 2 GHz, 155.025MHz

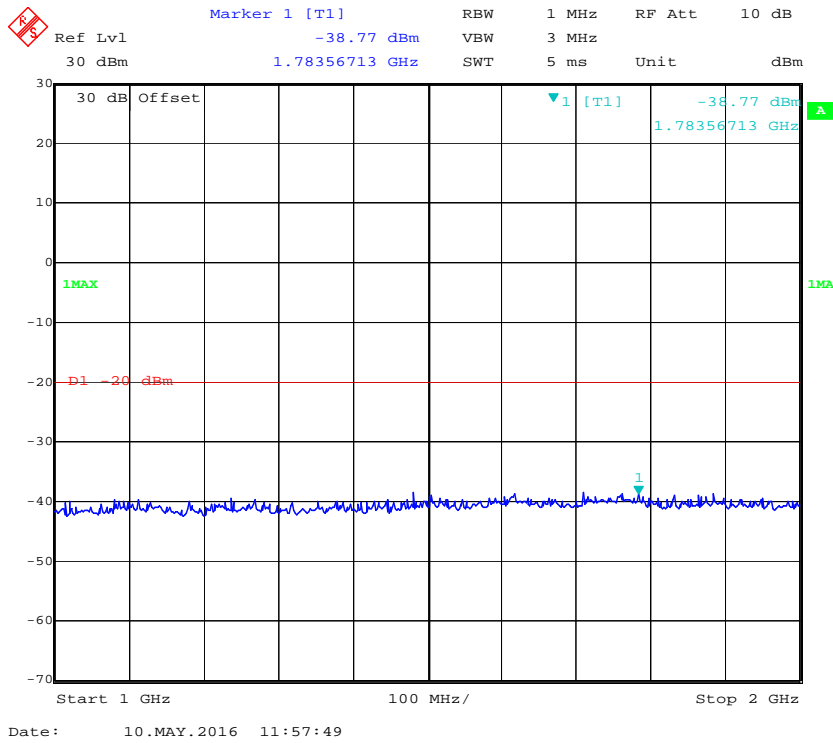

## FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §2.1053, §22.861 and §90.210

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
HP	Amplifier	HP8447E	1937A01046	2016-05-06	2017-05-06
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
HP	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
Mini	Amplifier	ZVA-183-S+	5969001149	2016-04-23	2017-04-22
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	1	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	2	2015-06-15	2016-06-15
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log<sub>10</sub> (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Rocky Kang on 2016-05-12

Pre-scan with both EP3120 VHF and EP3620 VHF, the worst case was listed as below:

Test Mode: Transmitting

**30MHz - 5GHz:**

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 155.025MHz										
310.05	31.02	56	2.2	H	-66.0	0.36	0	-66.36	-20	46.36
310.05	40.15	32	2.0	V	-56.8	0.36	0	-57.16	-20	37.16
1085.18	42.35	3	2.5	H	-58.6	1.50	6.10	-54.00	-20	34.00
1085.18	41.63	242	1.1	V	-60.8	1.50	6.10	-56.20	-20	36.20
Digital Modulation 155.025MHz										
310.05	31.99	328	1.3	H	-65.0	0.36	0	-65.36	-20	45.36
310.05	39.89	112	1.4	V	-57.1	0.36	0	-57.46	-20	37.46
1085.18	42.51	157	1.7	H	-58.5	1.50	6.10	-53.90	-20	33.90
1085.18	44.37	7	1.7	V	-58.1	1.50	6.10	-53.50	-20	33.50

**Note:**

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level



**FCC §2.1055 & § 22.355 & §90.213 - FREQUENCY STABILITY****Applicable Standard**

FCC §2.1055, § 22.355 and §90.213

**Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Hewlett-Packard	Frequency Counter	5343A	2232A00827	2016-05-09	2019-05-08
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-10-31
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2016-05-12.*

*Test Mode: Transmitting*

**For Analog Modulation**

Reference Frequency: 155.025MHz, Limit: 5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Measured Frequency error (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.4	155.024985	-0.097
40	7.4	155.024987	-0.084
30	7.4	155.024987	-0.084
20	7.4	155.024985	-0.097
10	7.4	155.024984	-0.103
0	7.4	155.024986	-0.090
-10	7.4	155.024986	-0.090
-20	7.4	155.024988	-0.077
-30	7.4	155.024989	-0.071
Frequency Stability versus Input Voltage			
20	6.3	155.024988	-0.077

**For Digital Modulation**

Reference Frequency: 155.025 MHz, Limit: ±5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.4	155.024977	-0.148
40	7.4	155.024985	-0.097
30	7.4	155.024978	-0.142
20	7.4	155.024982	-0.116
10	7.4	155.024978	-0.142
0	7.4	155.024984	-0.103
-10	7.4	155.024983	-0.110
-20	7.4	155.024986	-0.090
-30	7.4	155.024978	-0.142
Frequency Stability versus Input Voltage			
20	6.3	155.024981	-0.123

## FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

### Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

### Test Equipment List and Details


Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
HP	RF Communication Test Set	8920A	3325U00859	2015-06-03	2016-06-02
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
JFW	30dB Attenuator	50FH-030-100 RF	170006716507	2015-06-12	2016-06-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as  $P_0$ .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to  $P_0$ . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .

k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period  $t_3$ .

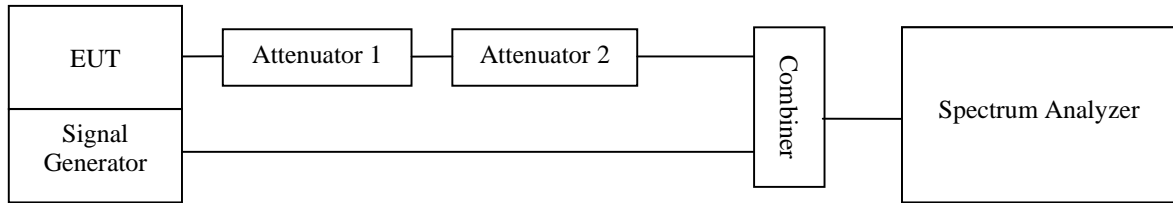

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Rocky Kang on 2016-05-14.*

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5 (t1)	<+/-12.5 kHz	Pass
	20(t2)	<+/-6.25 kHz	
	5 (t3)	<+/-12.5 kHz	


Please refer to the following plots.

### Channel Spacing 12.5 kHz

### Turn on

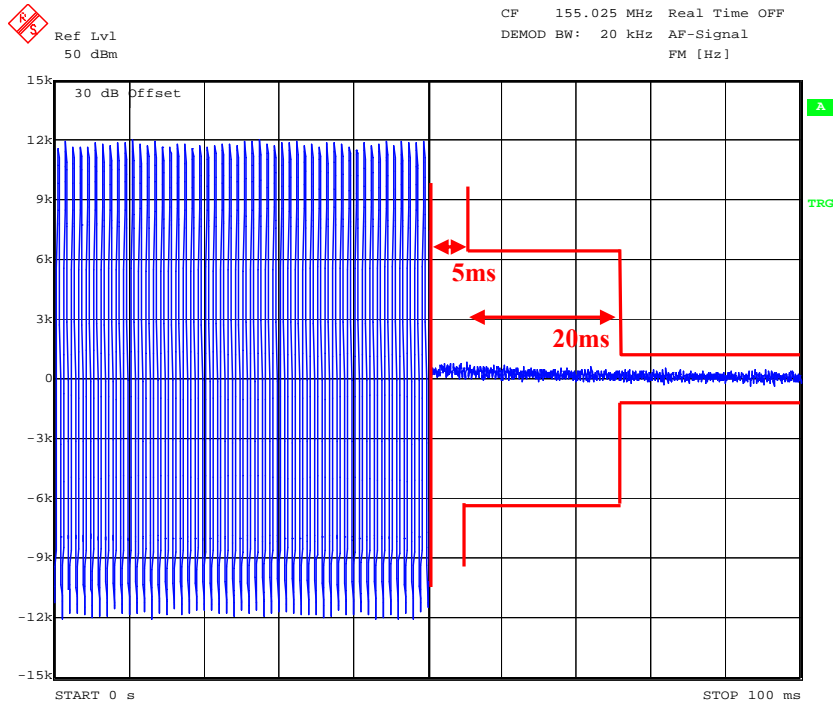

### Turn off

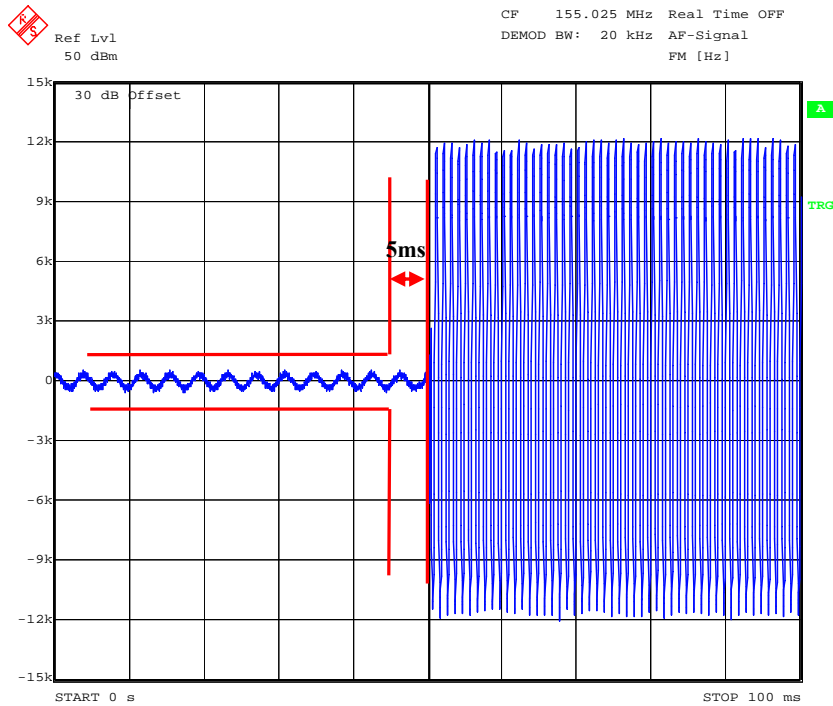

\*\*\*\*\* END OF REPORT \*\*\*\*\*