

FCC TEST REPORT

For

Jin Hao Electronic Science & Tech Co. Ltd

2.1 Bluetooth Speaker

Model No.: SBT2005, BT-SP802A

Prepared For : Jin Hao Electronic Science & Tech Co. Ltd
Address : Goldyip Science And Technology Park, Goldyip Road Xiabian Village,
Liaobu, Dongguan City, 523000, China


Prepared For : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217040076W
Date of Test : Apr. 28~Jun. 15, 2017
Date of Report : Jun. 16, 2017

Contents

| | |
|---|----|
| 1. General Information..... | 5 |
| 1.1. Client Information..... | 5 |
| 1.2. Description of Device (EUT)..... | 5 |
| 1.3. Auxiliary Equipment Used During Test..... | 5 |
| 1.4. Description of Test Modes..... | 6 |
| 1.5. List of channels..... | 7 |
| 1.6. Description Of Test Setup..... | 8 |
| 1.7. Test Equipment List..... | 9 |
| 1.8. Measurement Uncertainty..... | 9 |
| 1.9. Description of Test Facility..... | 10 |
| 2. Summary of Test Results..... | 11 |
| 3. Conducted Emission Test..... | 12 |
| 3.1. Test Standard and Limit..... | 12 |
| 3.2. Test Setup..... | 12 |
| 3.3. Test Procedure..... | 12 |
| 3.4. Test Data..... | 12 |
| 4. Radiation Spurious Emission and Band Edge..... | 15 |
| 4.1. Test Standard and Limit..... | 15 |
| 4.2. Test Setup..... | 15 |
| 4.3. Test Procedure..... | 16 |
| 4.4. Test Data..... | 17 |
| 5. Maximum Peak Output Power Test..... | 24 |
| 5.1. Test Standard and Limit..... | 24 |
| 5.2. Test Setup..... | 24 |
| 5.3. Test Procedure..... | 24 |
| 5.4. Test Data..... | 24 |
| 6. 20DB Occupy Bandwidth Test..... | 28 |
| 6.1. Test Standard..... | 28 |
| 6.2. Test Setup..... | 28 |
| 6.3. Test Procedure..... | 28 |
| 6.4. Test Data..... | 28 |
| 7. Carrier Frequency Separation Test..... | 32 |
| 7.1. Test Standard and Limit..... | 32 |
| 7.2. Test Setup..... | 32 |
| 7.3. Test Procedure..... | 32 |
| 7.4. Test Data..... | 32 |
| 8. Number of Hopping Channel Test..... | 36 |
| 8.1. Test Standard and Limit..... | 36 |
| 8.2. Test Setup..... | 36 |
| 8.3. Test Procedure..... | 36 |
| 8.4. Test Data..... | 36 |
| 9. Dwell Time Test..... | 38 |

| | |
|--|----|
| 9.1. Test Standard and Limit..... | 38 |
| 9.2. Test Setup..... | 38 |
| 9.3. Test Procedure..... | 38 |
| 9.4. Test Data..... | 38 |
| 10. 100kHz Bandwidth of Frequency Band Edge Requirement..... | 42 |
| 10.1. Test Standard and Limit..... | 42 |
| 10.2. Test Setup..... | 42 |
| 10.3. Test Procedure..... | 42 |
| 10.4. Test Data..... | 42 |
| 11. Antenna Requirement..... | 46 |
| 11.1. Test Standard and Requirement..... | 46 |
| 11.2. Antenna Connected Construction..... | 46 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH..... | 47 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH..... | 49 |
| APPENDIX III -- INTERNAL PHOTOGRAPH..... | 53 |

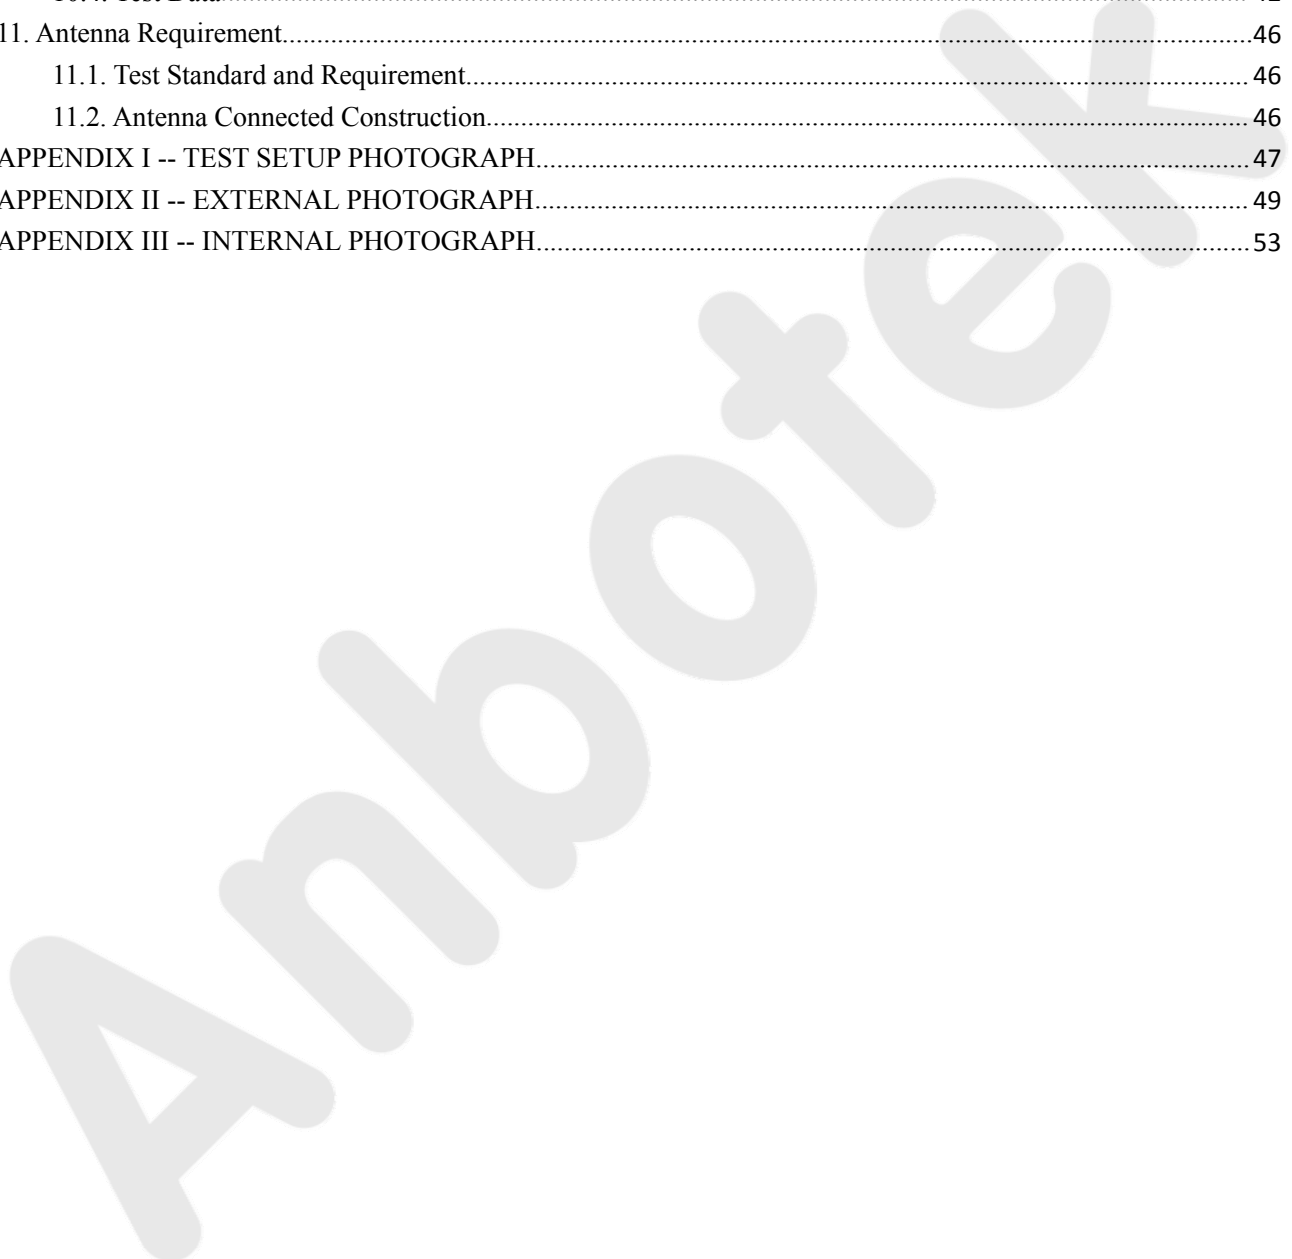

TEST REPORT

Applicant : Jin Hao Electronic Science & Tech Co. Ltd
Manufacturer : Jin Hao Electronic Science & Tech Co. Ltd
Product Name : 2.1 Bluetooth Speaker
Model No. : SBT2005, BT-SP802A
Trade Mark : SHARPER IMAGE
Rating(s) : AC 120V, 60Hz, 15W

Test Standard(s) : FCC Part15 Subpart C 2016, Section 15.247

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Apr. 28~Jun. 15, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Amy Ding

(Project Manager / Amy Ding)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

| | | |
|--------------|---|--|
| Applicant | : | Jin Hao Electronic Science & Tech Co. Ltd |
| Address | : | Goldyip Science And Technology Park,Goldyip Road Xiabian Village, Liaobu, Dongguan City, 523000, China |
| Manufacturer | : | Jin Hao Electronic Science & Tech Co. Ltd |
| Address | : | Goldyip Science And Technology Park,Goldyip Road Xiabian Village, Liaobu, Dongguan City, 523000, China |

1.2. Description of Device (EUT)

| | | | |
|---|---|---|------------------------------|
| Product Name | : | 2.1 Bluetooth Speaker | |
| Model No. | : | SBT2005, BT-SP802A (Note: All samples are the same except the model number and colour, so we prepare "SBT2005" for test only.) | |
| Trade Mark | : | SHARPER IMAGE | |
| Test Power Supply | : | AC 120V, 60Hz | |
| Product Description | : | Operation Frequency: | 2402MHz~2480MHz |
| | | Transfer Rate: | 1/2/3 Mbits/s |
| | | Number of Channel: | 79 Channels |
| | | Modulation Type: | GFSK, $\pi/4$ -DQPSK, 8-DPSK |
| | | Antenna Type: | PCB Antenna |
| | | Antenna Gain(Peak): | -0.68 dBi |
| Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. | | | |

1.3. Auxiliary Equipment Used During Test

| | |
|-----|--|
| N/A | |
|-----|--|

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|-----------------|
| Mode 1 | CH00 |
| Mode 2 | CH39 |
| Mode 3 | CH78 |
| Mode 4 | Keeping TX mode |

| For Conducted Emission | |
|------------------------|-----------------|
| Final Test Mode | Description |
| Mode 4 | Keeping TX mode |

| For Radiated Emission | |
|-----------------------|-------------|
| Final Test Mode | Description |
| Mode 1 | CH00 |
| Mode 2 | CH39 |
| Mode 3 | CH78 |

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

1.5. List of channels


| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 00 | 2402 | 17 | 2419 | 34 | 2436 | 51 | 2453 | 68 | 2470 |
| 01 | 2403 | 18 | 2420 | 35 | 2437 | 52 | 2454 | 69 | 2471 |
| 02 | 2404 | 19 | 2421 | 36 | 2438 | 53 | 2455 | 70 | 2472 |
| 03 | 2405 | 20 | 2422 | 37 | 2439 | 54 | 2456 | 71 | 2473 |
| 04 | 2406 | 21 | 2423 | 38 | 2440 | 55 | 2457 | 72 | 2474 |
| 05 | 2407 | 22 | 2424 | 39 | 2441 | 56 | 2458 | 73 | 2475 |
| 06 | 2408 | 23 | 2425 | 40 | 2442 | 57 | 2459 | 74 | 2476 |
| 07 | 2409 | 24 | 2426 | 41 | 2443 | 58 | 2460 | 75 | 2477 |
| 08 | 2410 | 25 | 2427 | 42 | 2444 | 59 | 2461 | 76 | 2478 |
| 09 | 2411 | 26 | 2428 | 43 | 2445 | 60 | 2462 | 77 | 2479 |
| 10 | 2412 | 27 | 2429 | 44 | 2446 | 61 | 2463 | 78 | 2480 |
| 11 | 2413 | 28 | 2430 | 45 | 2447 | 62 | 2464 | | |
| 12 | 2414 | 29 | 2431 | 46 | 2448 | 63 | 2465 | | |
| 13 | 2415 | 30 | 2432 | 47 | 2449 | 64 | 2466 | | |
| 14 | 2416 | 31 | 2433 | 48 | 2450 | 65 | 2467 | | |
| 15 | 2417 | 32 | 2434 | 49 | 2451 | 66 | 2468 | | |
| 16 | 2418 | 33 | 2435 | 50 | 2452 | 67 | 2469 | | |

1.6. Description Of Test Setup

CE

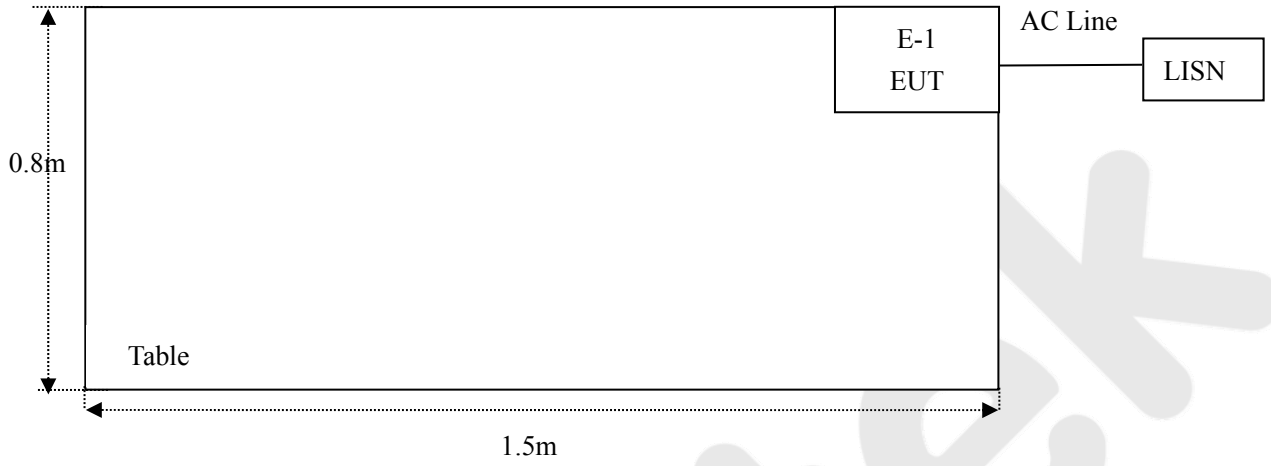

RE

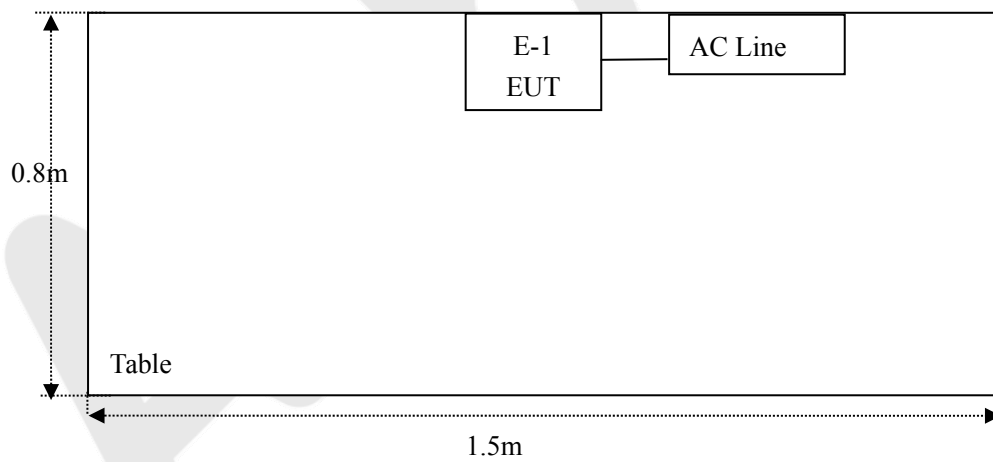

1.7. Test Equipment List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------------------------|-------------------------|---------------|---------------|---------------|---------------|
| 1. | Two-Line V-network | Rohde & Schwarz | ENV216 | 100055 | Jul. 19, 2016 | 1 Year |
| 2. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100627 | Jun. 17, 2016 | 1 Year |
| 3. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Jun. 17, 2016 | 1 Year |
| 4. | Spectrum Analysis | Agilent | E4407B | US39390582 | Jul. 12, 2017 | 1 Year |
| 5 | Preamplifier | Instruments corporation | EMC011830 | 980100 | Jun. 17, 2016 | 1 Year |
| 6. | EMI Test Receiver | Rohde & Schwarz | ESPI | 101604 | Jun. 17, 2016 | 1 Year |
| 7 | Double Ridged Horn Antenna | Instruments corporation | GTH-0118 | 351600 | May 06, 2017 | 1 Year |
| 8 | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | VULB 9163-289 | May 06, 2017 | 1 Year |
| 9 | Loop Antenna | Schwarzbeck | FMZB 1519 | 012 | May 11, 2017 | 1 Year |
| 10. | Pre-amplifier | SONOMA | 310N | 186860 | Jun. 17, 2016 | 1 Year |
| 11 | EMI Test Software EZ-EMC | SHURPLE | N/A | N/A | N/A | N/A |
| 12 | Power Sensor | Agilent | KFSW150502 | 15I00041SN045 | Jun. 17, 2016 | 1 Year |
| 13 | MXA Spectrum Analysis | Agilent | N9020A | MY51170037 | Jun. 17, 2016 | 1 Year |
| 14 | MXG RF Vector Signal Generator | Agilent | N5182A | MY48180656 | Jun. 17, 2016 | 1 Year |
| 15 | Signal Generator | Agilent | E4421B | MY41000743 | Jun. 17, 2016 | 1 Year |
| 16 | DC Power supply | IV | IV-8080 | YQSB0096 | Jun. 17, 2016 | 1 Year |
| 17 | TEMP&HUMI PROGRAMMABLE CHAMBER | Bell Group | BE-THK-150 M8 | SE-0137 | Jun. 17, 2016 | 1 Year |

1.8. Measurement Uncertainty

| | | |
|------------------------|---|--------------------------|
| Radiation Uncertainty | : | Ur = 4.1 dB (Horizontal) |
| | | Ur = 4.3 dB (Vertical) |
| | | |
| Conduction Uncertainty | : | Uc = 3.4dB |

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results


| Standard Section | Test Item | Result |
|---|--------------------------------|--------|
| 15.203/15.247(c) | Antenna Requirement | PASS |
| 15.207 | Conducted Emission | PASS |
| 15.205/15.209 | Spurious Emission | PASS |
| 15.247(b)(1) | Conducted Peak Output Power | PASS |
| 15.247(a)(1) | 20dB Occupied Bandwidth | PASS |
| 15.247(a)(1) | Carrier Frequencies Separation | PASS |
| 15.247(a)(1) | Hopping Channel Number | PASS |
| 15.247(a)(1) | Dwell Time | PASS |
| 15.247(d) | Band Edge | PASS |
| Remark: "N/A" is an abbreviation for Not Applicable. | | |

3. Conducted Emission Test

3.1. Test Standard and Limit

| | | | |
|--|---------------------------|--------------------------------|---------------|
| Test Standard | FCC Part15 Section 15.207 | | |
| Test Limit | Frequency | Maximum RF Line Voltage (dBuV) | |
| | | Quasi-peak Level | Average Level |
| | 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| | 500kHz~5MHz | 56 | 46 |
| | 5MHz~30MHz | 60 | 50 |
| Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency. | | | |

3.2. Test Setup

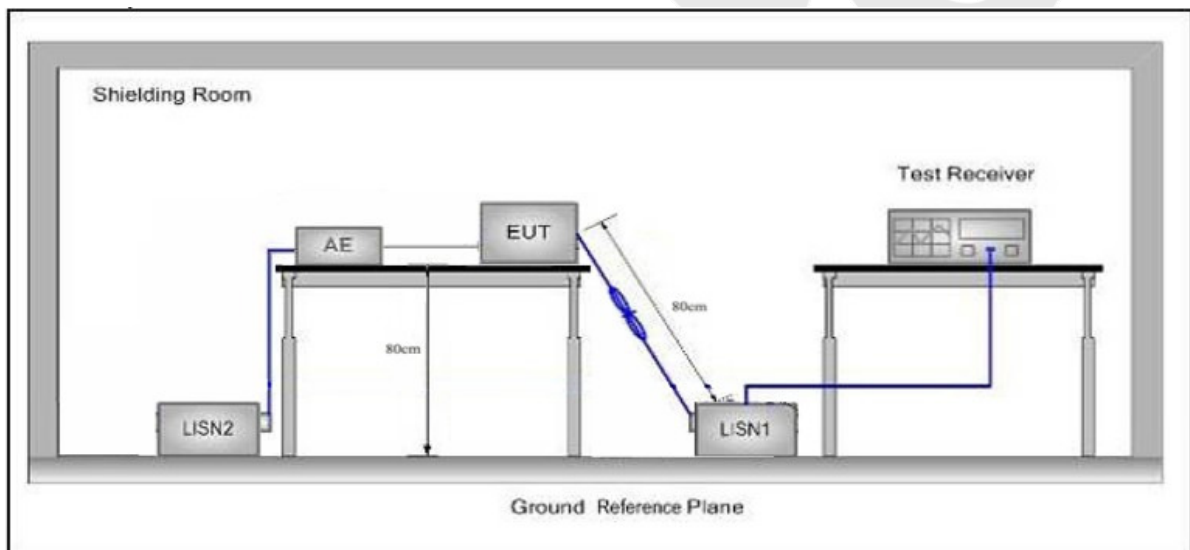

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz
 Comment: Live Line
 Tem.:25°C Hum.:50%

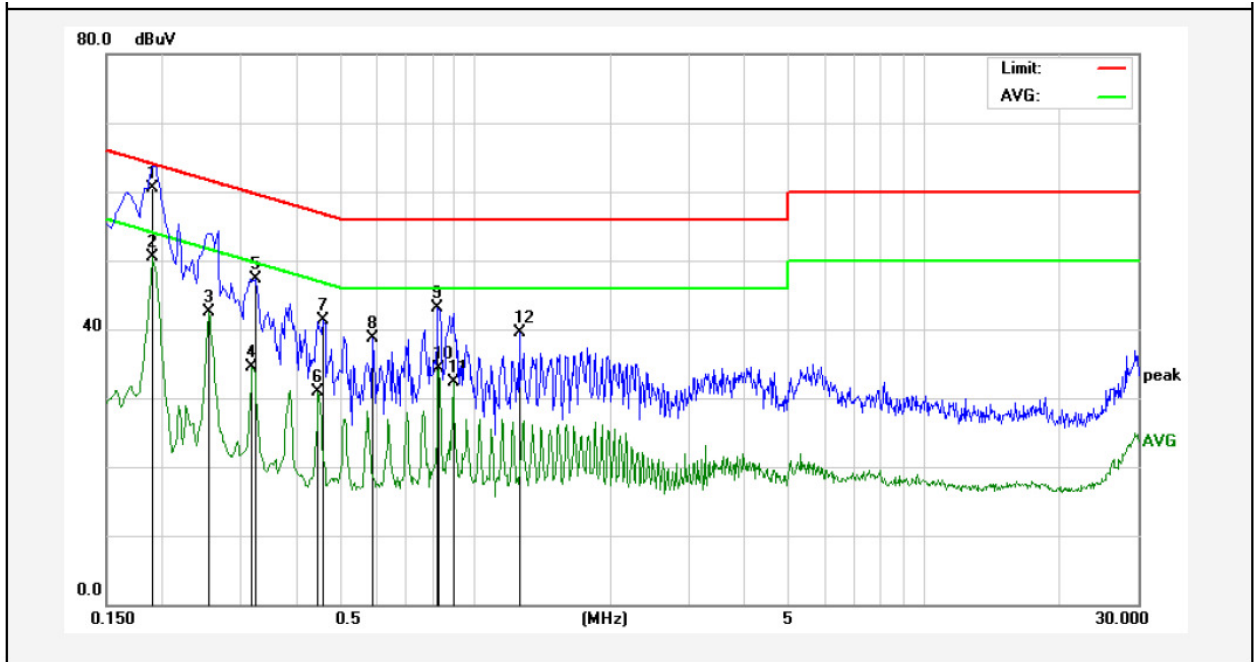

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.1900 | 40.65 | 19.90 | 60.55 | 64.03 | -3.48 | QP | |
| 2 | 0.1900 | 30.63 | 19.90 | 50.53 | 54.03 | -3.50 | AVG | |
| 3 | 0.2540 | 22.52 | 19.89 | 42.41 | 51.62 | -9.21 | AVG | |
| 4 | 0.3180 | 14.56 | 19.90 | 34.46 | 49.76 | -15.30 | AVG | |
| 5 | 0.3220 | 27.34 | 19.90 | 47.24 | 59.65 | -12.41 | QP | |
| 6 | 0.4460 | 10.94 | 19.96 | 30.90 | 46.95 | -16.05 | AVG | |
| 7 | 0.4580 | 21.34 | 19.96 | 41.30 | 56.73 | -15.43 | QP | |
| 8 | 0.5899 | 18.62 | 20.01 | 38.63 | 56.00 | -17.37 | QP | |
| 9 | 0.8260 | 23.04 | 20.07 | 43.11 | 56.00 | -12.89 | QP | |
| 10 | 0.8300 | 14.18 | 20.07 | 34.25 | 46.00 | -11.75 | AVG | |
| 11 | 0.8900 | 12.18 | 20.09 | 32.27 | 46.00 | -13.73 | AVG | |
| 12 | 1.2540 | 19.28 | 20.13 | 39.41 | 56.00 | -16.59 | QP | |

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz
 Comment: Neutral Line
 Tem.:25°C Hum.:50%

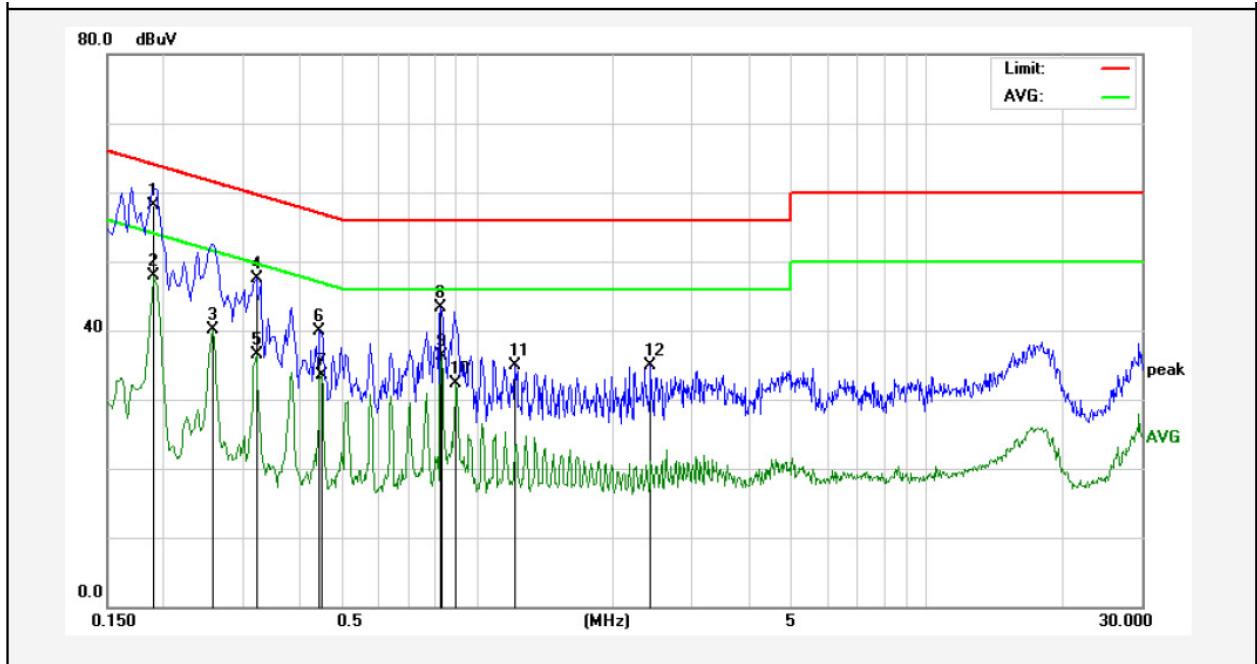

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.1900 | 38.19 | 19.90 | 58.09 | 64.03 | -5.94 | QP | |
| 2 | 0.1900 | 28.02 | 19.90 | 47.92 | 54.03 | -6.11 | AVG | |
| 3 | 0.2580 | 20.17 | 19.89 | 40.06 | 51.49 | -11.43 | AVG | |
| 4 | 0.3220 | 27.65 | 19.90 | 47.55 | 59.65 | -12.10 | QP | |
| 5 | 0.3220 | 16.65 | 19.90 | 36.55 | 49.65 | -13.10 | AVG | |
| 6 | 0.4460 | 19.94 | 19.96 | 39.90 | 56.95 | -17.05 | QP | |
| 7 | 0.4500 | 13.54 | 19.96 | 33.50 | 46.87 | -13.37 | AVG | |
| 8 | 0.8300 | 23.14 | 20.07 | 43.21 | 56.00 | -12.79 | QP | |
| 9 | 0.8340 | 16.15 | 20.08 | 36.23 | 46.00 | -9.77 | AVG | |
| 10 | 0.8980 | 12.29 | 20.09 | 32.38 | 46.00 | -13.62 | AVG | |
| 11 | 1.2140 | 14.71 | 20.12 | 34.83 | 56.00 | -21.17 | QP | |
| 12 | 2.4219 | 14.79 | 20.15 | 34.94 | 56.00 | -21.06 | QP | |

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209 and 15.205 | | | | |
|---------------|--|----------------------------------|----------------|------------|--------------------------|
| Test Limit | Frequency (MHz) | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) |
| | 0.009MHz~0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz~88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz~216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz~960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz~1000MHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1000MHz | 500 | 54.0 | Average | 3 |
| - | | 74.0 | Peak | 3 | |

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

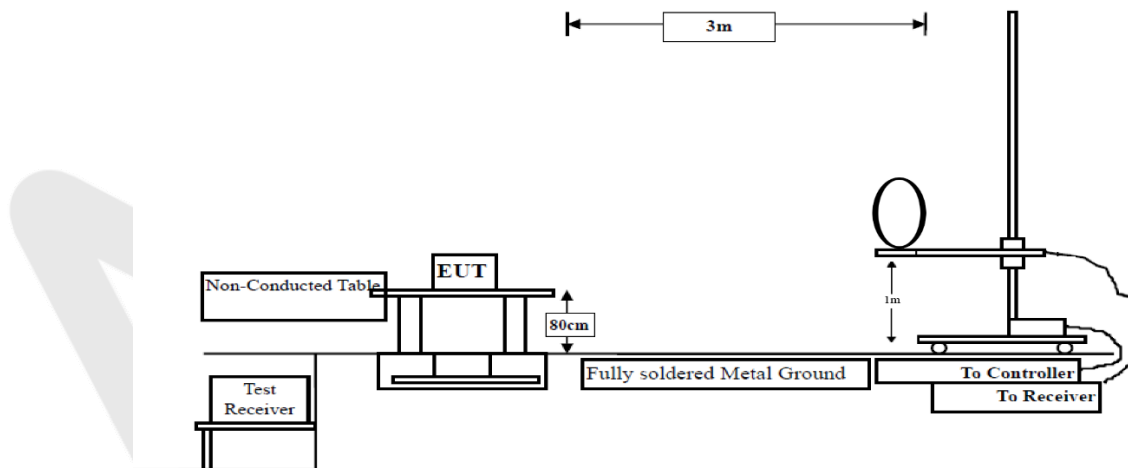


Figure 1. Below 30MHz

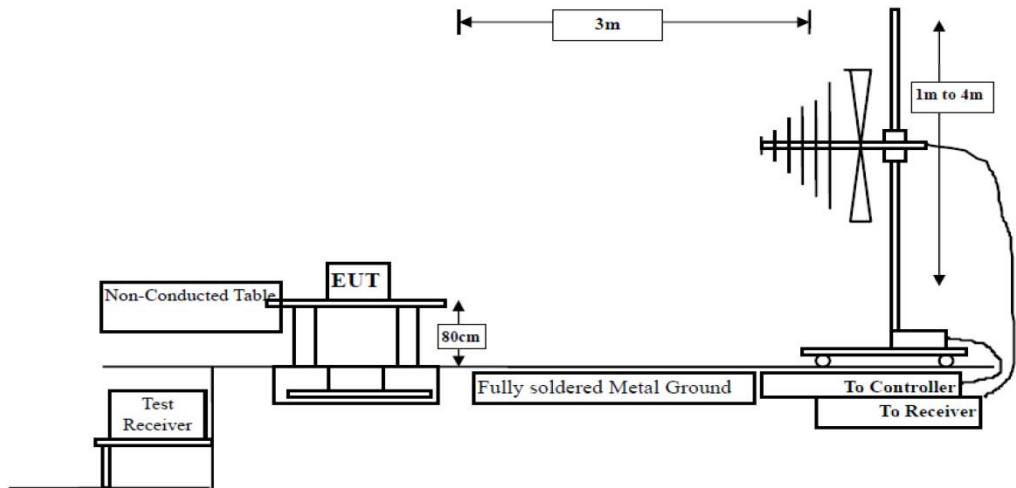


Figure 2. 30MHz to 1GHz

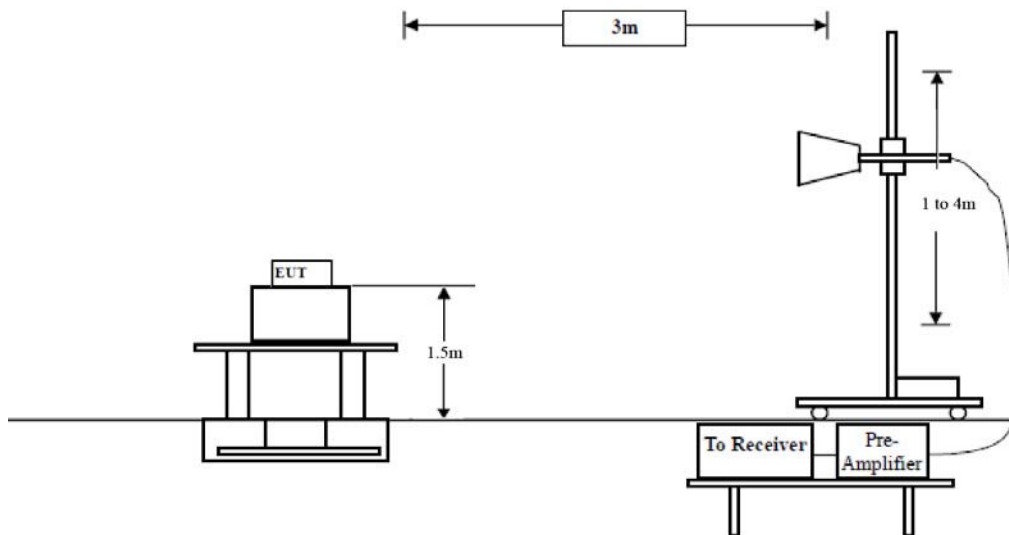


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz,Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS


During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation which is worse case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Anbotek

Test Results (30~1000MHz)


Job No.: 0217040076W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: AC 120V, 60Hz
 Test Mode: TX Mode Polarization: Horizontal

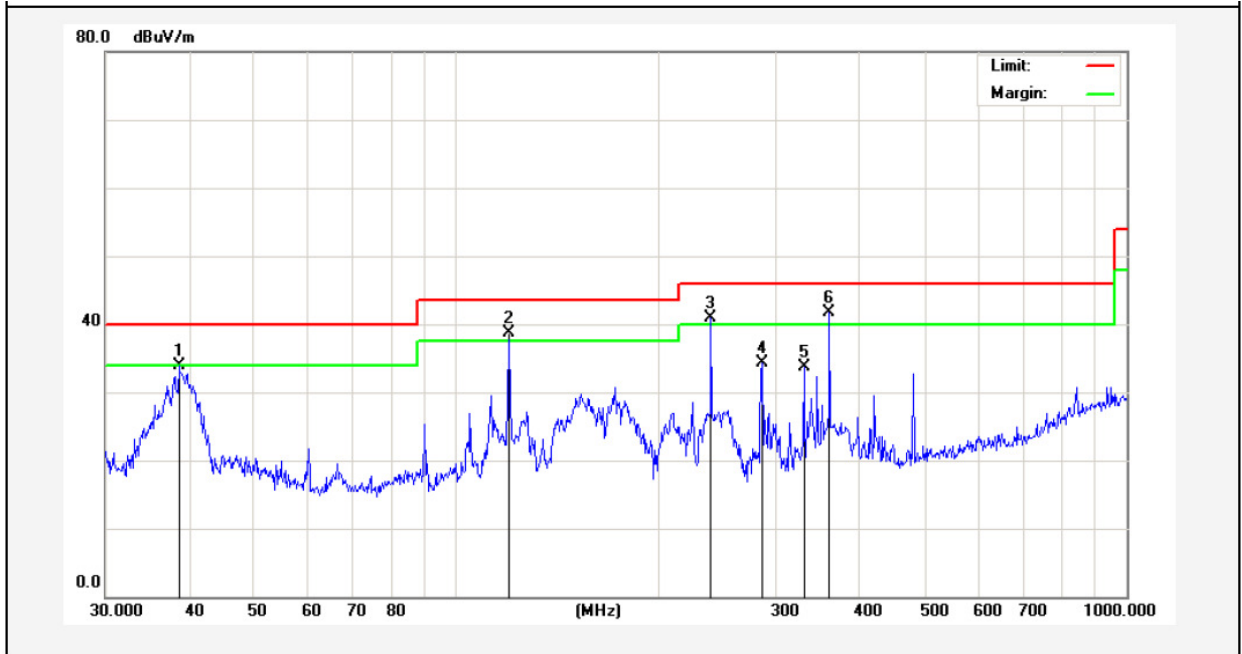

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1 | 38.6160 | 45.27 | -11.45 | 33.82 | 40.00 | -6.18 | peak | | | |
| 2 | 119.8555 | 60.02 | -21.32 | 38.70 | 43.50 | -4.80 | QP | 100 | 0 | |
| 3 | 239.9874 | 59.05 | -18.09 | 40.96 | 46.00 | -5.04 | QP | 100 | 0 | |
| 4 | 285.9778 | 52.42 | -18.06 | 34.36 | 46.00 | -11.64 | peak | | | |
| 5 | 330.1949 | 48.48 | -14.77 | 33.71 | 46.00 | -12.29 | peak | | | |
| 6 | 360.4476 | 55.28 | -13.65 | 41.63 | 46.00 | -4.37 | QP | 100 | 0 | |

Test Results (30~1000MHz)

Job No.: 0217040076W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: AC 120V, 60Hz
 Test Mode: TX Mode Polarization: Vertical

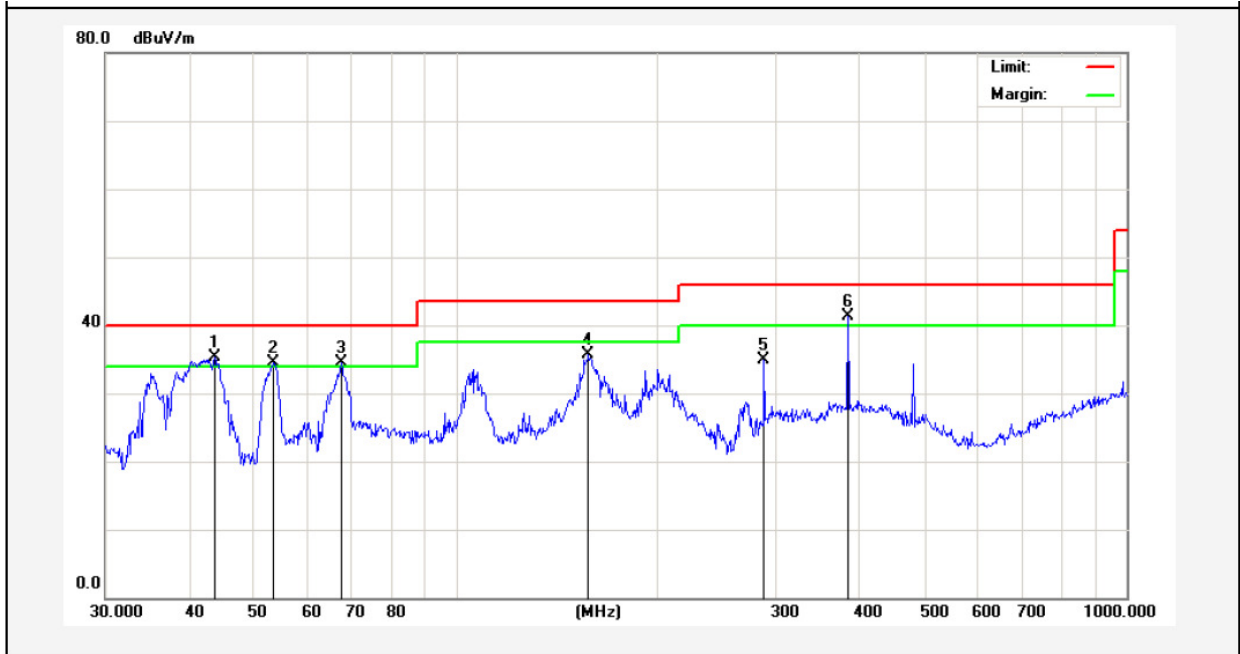

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1 | 43.6584 | 47.16 | -11.80 | 35.36 | 40.00 | -4.64 | QP | 100 | 0 | |
| 2 | 53.5052 | 49.41 | -14.82 | 34.59 | 40.00 | -5.41 | QP | 100 | 0 | |
| 3 | 67.4381 | 53.10 | -18.51 | 34.59 | 40.00 | -5.41 | QP | 300 | 360 | |
| 4 | 157.5587 | 53.63 | -17.98 | 35.65 | 43.50 | -7.85 | peak | | | |
| 5 | 287.9904 | 49.89 | -15.01 | 34.88 | 46.00 | -11.12 | peak | | | |
| 6 | 383.9318 | 53.57 | -12.19 | 41.38 | 46.00 | -4.62 | QP | 100 | 360 | |

Test Results (Above 1000MHz)

| Test Mode: GFSK | | | | | Test channel: Lowest | | | |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------------|----------------|-----------------|------|
| Peak Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4804.00 | 39.43 | 34.04 | 6.58 | 34.09 | 45.96 | 74.00 | -28.04 | V |
| 7206.00 | 33.24 | 37.11 | 7.73 | 34.50 | 43.58 | 74.00 | -30.42 | V |
| 9608.00 | 32.73 | 39.31 | 9.23 | 34.79 | 46.48 | 74.00 | -27.52 | V |
| 12010.00 | * | | | | | 74.00 | | V |
| 14412.00 | * | | | | | 74.00 | | V |
| 4804.00 | 44.15 | 34.04 | 6.58 | 34.09 | 50.68 | 74.00 | -23.32 | H |
| 7206.00 | 35.19 | 37.11 | 7.73 | 34.50 | 45.53 | 74.00 | -28.47 | H |
| 9608.00 | 32.35 | 39.31 | 9.23 | 34.79 | 46.10 | 74.00 | -27.90 | H |
| 12010.00 | * | | | | | 74.00 | | H |
| 14412.00 | * | | | | | 74.00 | | H |
| Average Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4804.00 | 27.85 | 34.04 | 6.58 | 34.09 | 34.38 | 54.00 | -19.62 | V |
| 7206.00 | 21.69 | 37.11 | 7.73 | 34.50 | 32.03 | 54.00 | -21.97 | V |
| 9608.00 | 20.63 | 39.31 | 9.23 | 34.79 | 34.38 | 54.00 | -19.62 | V |
| 12010.00 | * | | | | | 54.00 | | V |
| 14412.00 | * | | | | | 54.00 | | V |
| 4804.00 | 32.31 | 34.04 | 6.58 | 34.09 | 38.84 | 54.00 | -15.16 | H |
| 7206.00 | 24.00 | 37.11 | 7.73 | 34.50 | 34.34 | 54.00 | -19.66 | H |
| 9608.00 | 20.54 | 39.31 | 9.23 | 34.79 | 34.29 | 54.00 | -19.71 | H |
| 12010.00 | * | | | | | 54.00 | | H |
| 14412.00 | * | | | | | 54.00 | | H |

Test Results (Above 1000MHz)

| Test Mode: GFSK | | | | | Test channel: Middle | | | |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------------|----------------|-----------------|------|
| Peak Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4882.00 | 37.97 | 34.38 | 6.69 | 34.09 | 44.95 | 74.00 | -29.05 | V |
| 7323.00 | 32.27 | 37.22 | 7.78 | 34.53 | 42.74 | 74.00 | -31.26 | V |
| 9764.00 | 31.86 | 39.46 | 9.35 | 34.80 | 45.87 | 74.00 | -28.13 | V |
| 12205.00 | * | | | | | 74.00 | | V |
| 14646.00 | * | | | | | 74.00 | | V |
| 4882.00 | 42.39 | 34.38 | 6.69 | 34.09 | 49.37 | 74.00 | -24.63 | H |
| 7323.00 | 34.08 | 37.22 | 7.78 | 34.53 | 44.55 | 74.00 | -29.45 | H |
| 9764.00 | 31.35 | 39.46 | 9.35 | 34.80 | 45.36 | 74.00 | -28.64 | H |
| 12205.00 | * | | | | | 74.00 | | H |
| 14646.00 | * | | | | | 74.00 | | H |
| Average Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4882.00 | 26.67 | 34.38 | 6.69 | 34.09 | 33.65 | 54.00 | -20.35 | V |
| 7323.00 | 20.89 | 37.22 | 7.78 | 34.53 | 31.36 | 54.00 | -22.64 | V |
| 9764.00 | 19.93 | 39.46 | 9.35 | 34.80 | 33.94 | 54.00 | -20.06 | V |
| 12205.00 | * | | | | | 54.00 | | V |
| 14646.00 | * | | | | | 54.00 | | V |
| 4882.00 | 30.98 | 34.38 | 6.69 | 34.09 | 37.96 | 54.00 | -16.04 | H |
| 7323.00 | 23.11 | 37.22 | 7.78 | 34.53 | 33.58 | 54.00 | -20.42 | H |
| 9764.00 | 19.71 | 39.46 | 9.35 | 34.80 | 33.72 | 54.00 | -20.28 | H |
| 12205.00 | * | | | | | 54.00 | | H |
| 14646.00 | * | | | | | 54.00 | | H |

Test Results (Above 1000MHz)

| Test Mode: GFSK | | | | | Test channel: Highest | | | |
|-----------------|-------------------|-----------------------|-----------------|--------------------|-----------------------|----------------|-----------------|------|
| Peak Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4960.00 | 36.93 | 34.72 | 6.79 | 34.09 | 44.35 | 74.00 | -29.65 | V |
| 7440.00 | 31.58 | 37.34 | 7.82 | 34.57 | 42.17 | 74.00 | -31.83 | V |
| 9920.00 | 31.25 | 39.62 | 9.46 | 34.81 | 45.52 | 74.00 | -28.48 | V |
| 12400.00 | * | | | | | 74.00 | | V |
| 14880.00 | * | | | | | 74.00 | | V |
| 4960.00 | 41.14 | 34.72 | 6.79 | 34.09 | 48.56 | 74.00 | -25.44 | H |
| 7440.00 | 33.31 | 37.34 | 7.82 | 34.57 | 43.90 | 74.00 | -30.10 | H |
| 9920.00 | 30.64 | 39.62 | 9.46 | 34.81 | 44.91 | 74.00 | -29.09 | H |
| 12400.00 | * | | | | | 74.00 | | H |
| 14880.00 | * | | | | | 74.00 | | H |
| Average Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 4960.00 | 25.89 | 34.72 | 6.79 | 34.09 | 33.31 | 54.00 | -20.69 | V |
| 7440.00 | 20.36 | 37.34 | 7.82 | 34.57 | 30.95 | 54.00 | -23.05 | V |
| 9920.00 | 19.46 | 39.62 | 9.46 | 34.81 | 33.73 | 54.00 | -20.27 | V |
| 12400.00 | * | | | | | 54.00 | | V |
| 14880.00 | * | | | | | 54.00 | | V |
| 4960.00 | 30.09 | 34.72 | 6.79 | 34.09 | 37.51 | 54.00 | -16.49 | H |
| 7440.00 | 22.52 | 37.34 | 7.82 | 34.57 | 33.11 | 54.00 | -20.89 | H |
| 9920.00 | 19.16 | 39.62 | 9.46 | 34.81 | 33.43 | 54.00 | -20.57 | H |
| 12400.00 | * | | | | | 54.00 | | H |
| 14880.00 | * | | | | | 54.00 | | H |

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is worse case, the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

Radiated Band Edge:

| Test Mode: GFSK | | | | | Test channel: Lowest | | | |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------------|----------------|-----------------|------|
| Peak Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 2390.00 | 44.60 | 29.15 | 3.41 | 34.01 | 43.15 | 74.00 | -30.85 | H |
| 2400.00 | 61.63 | 29.16 | 3.43 | 34.01 | 60.21 | 74.00 | -13.79 | H |
| 2390.00 | 45.31 | 29.15 | 3.41 | 34.01 | 43.86 | 74.00 | -30.14 | V |
| 2400.00 | 63.85 | 29.16 | 3.43 | 34.01 | 62.43 | 74.00 | -11.57 | V |
| Average Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 2390.00 | 34.76 | 29.15 | 3.41 | 34.01 | 33.31 | 54.00 | -20.69 | H |
| 2400.00 | 43.10 | 29.16 | 3.43 | 34.01 | 41.68 | 54.00 | -12.32 | H |
| 2390.00 | 34.82 | 29.15 | 3.41 | 34.01 | 33.37 | 54.00 | -20.63 | V |
| 2400.00 | 42.91 | 29.16 | 3.43 | 34.01 | 41.49 | 54.00 | -12.51 | V |

| Test Mode: GFSK | | | | | Test channel: Highest | | | |
|-----------------|-------------------|-----------------------|-----------------|--------------------|-----------------------|----------------|-----------------|------|
| Peak Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 2483.50 | 46.90 | 29.28 | 3.53 | 34.03 | 45.68 | 74.00 | -28.32 | H |
| 2500.00 | 45.75 | 29.30 | 3.56 | 34.03 | 44.58 | 74.00 | -29.42 | H |
| 2483.50 | 48.03 | 29.28 | 3.53 | 34.03 | 46.81 | 74.00 | -27.19 | V |
| 2500.00 | 46.91 | 29.30 | 3.56 | 34.03 | 45.74 | 74.00 | -28.26 | V |
| Average Value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. |
| 2483.50 | 37.60 | 29.28 | 3.53 | 34.03 | 36.38 | 54.00 | -17.62 | H |
| 2500.00 | 35.36 | 29.30 | 3.56 | 34.03 | 34.19 | 54.00 | -19.81 | H |
| 2483.50 | 38.96 | 29.28 | 3.53 | 34.03 | 37.74 | 54.00 | -16.26 | V |
| 2500.00 | 35.43 | 29.30 | 3.56 | 34.03 | 34.26 | 54.00 | -19.74 | V |

Remark:


1. During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is worse case, the report only record this mode.
2. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (b)(3) |
| Test Limit | 1W or 125 mW |

5.2. Test Setup



5.3. Test Procedure


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
- Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data


| | | | |
|--------------|--------------------------|-------------|--------------------|
| Test Item | : Max. peak output power | Test Mode | : CH Low ~ CH High |
| Test Voltage | : AC 120V, 60Hz | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

| Channel Frequency (MHz) | Peak Power output (dBm) | Limit (dBm) | Results | Modulation |
|-------------------------|-------------------------|-------------|---------|------------|
| 2402 | 0.925 | 30 | PASS | BDR |
| 2441 | 1.474 | 30 | PASS | BDR |
| 2480 | 2.174 | 30 | PASS | BDR |
| 2402 | 0.357 | 20.96 | PASS | EDR |
| 2441 | 0.836 | 20.96 | PASS | EDR |
| 2480 | 1.501 | 20.96 | PASS | EDR |


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

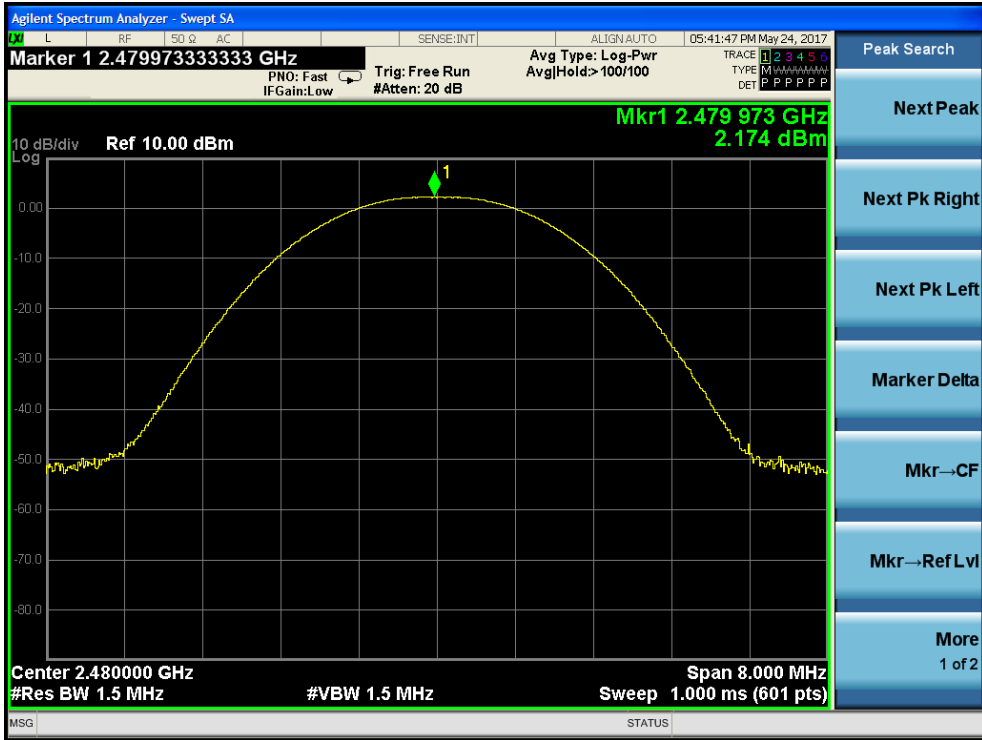


Test Mode: BDR---High

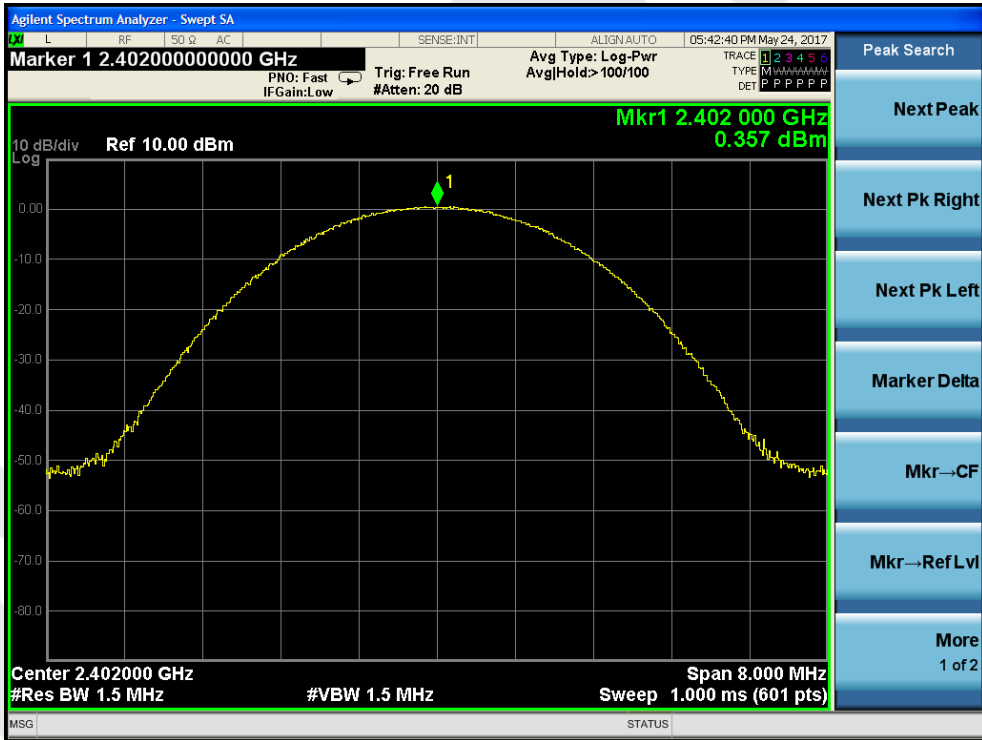

Test Mode: EDR---Low

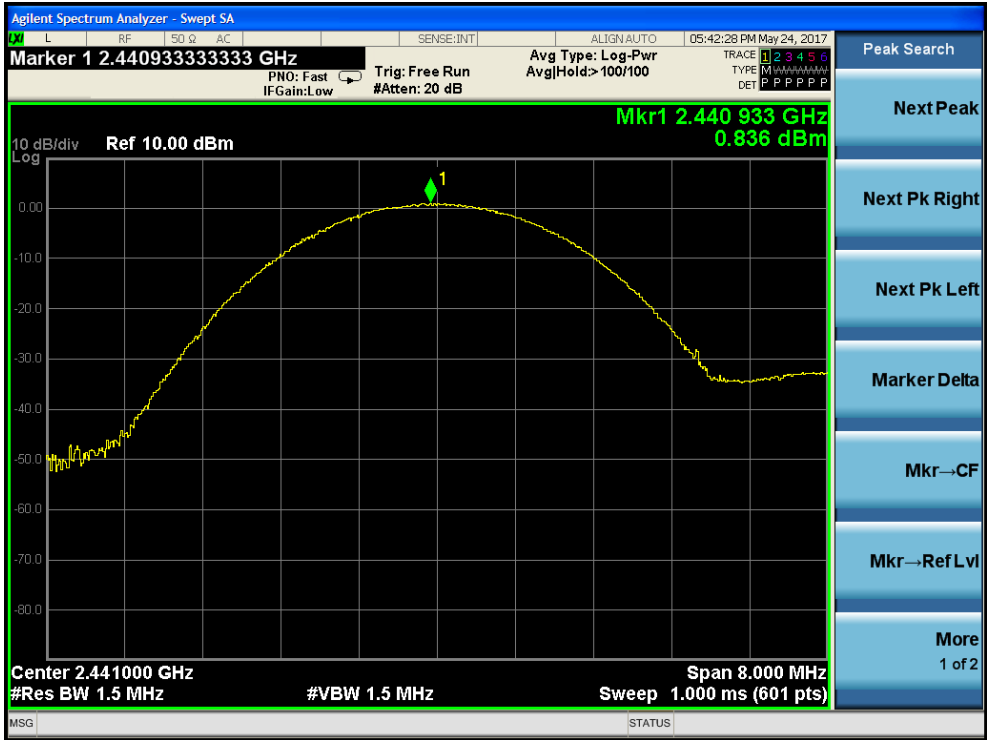

Test Mode: EDR---Middle

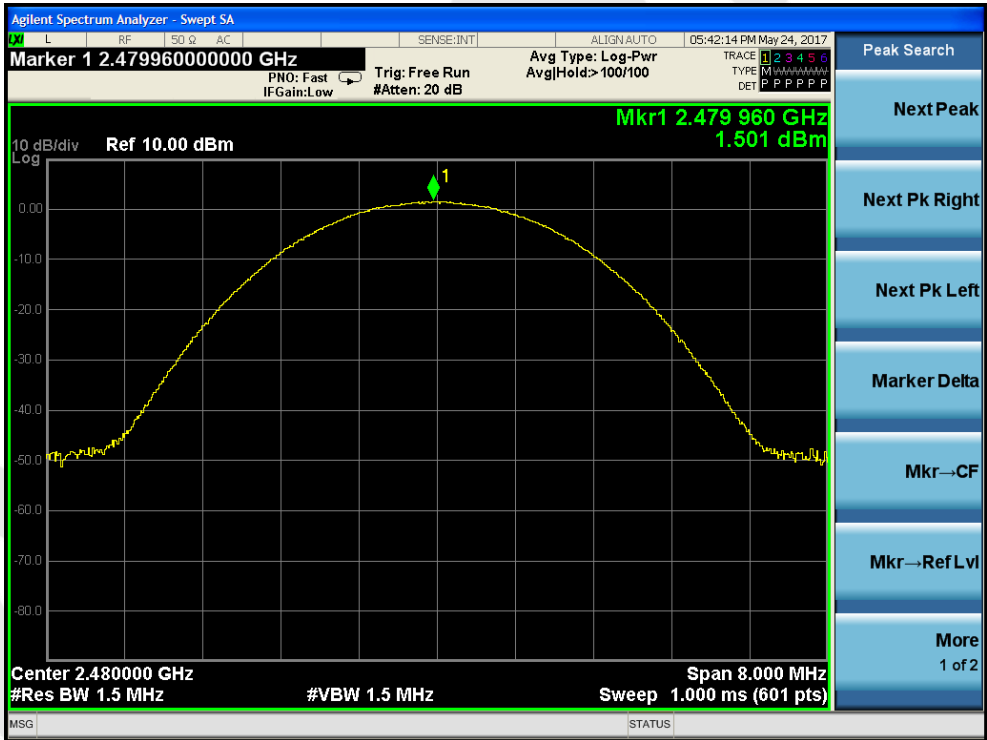


Test Mode: EDR---High

6. 20DB Occupy Bandwidth Test

6.1. Test Standard

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1) |
|---------------|------------------------------------|

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data


| | | | |
|--------------|-----------------|-------------|--------------------|
| Test Item | : 20dB BW | Test Mode | : CH Low ~ CH High |
| Test Voltage | : AC 120V, 60Hz | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

| Channel | Frequency(MHz) | 20dB Down BW(kHz) | Modulation Mode |
|---------|----------------|-------------------|-----------------|
| Low | 2402 | 900.6 | BDR |
| Middle | 2441 | 931.1 | BDR |
| High | 2480 | 929.4 | BDR |
| Low | 2402 | 1265.0 | EDR |
| Middle | 2441 | 1265.0 | EDR |
| High | 2480 | 1263.0 | EDR |


Remark: The EDR was tested on (π /4DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

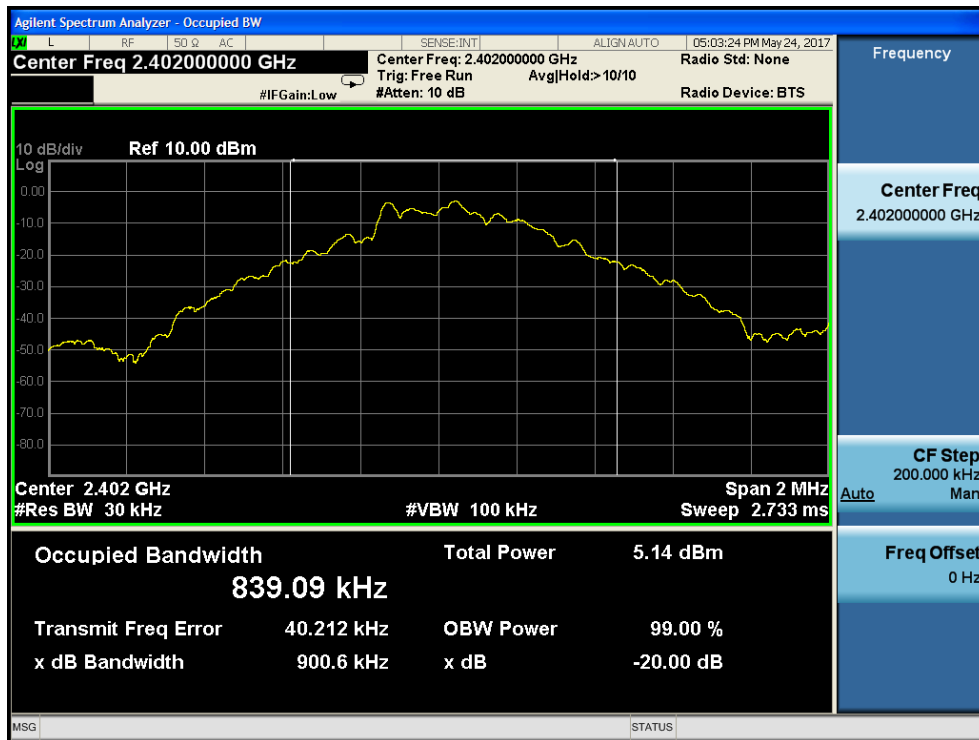


Test Mode: BDR---Low

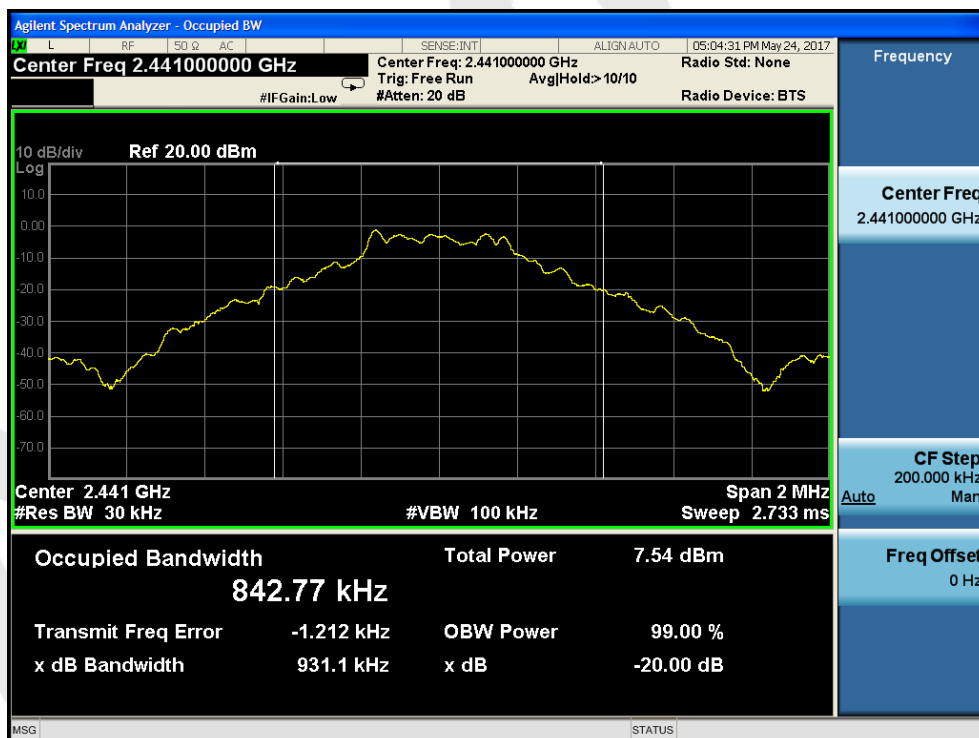


Test Mode: BDR---Middle

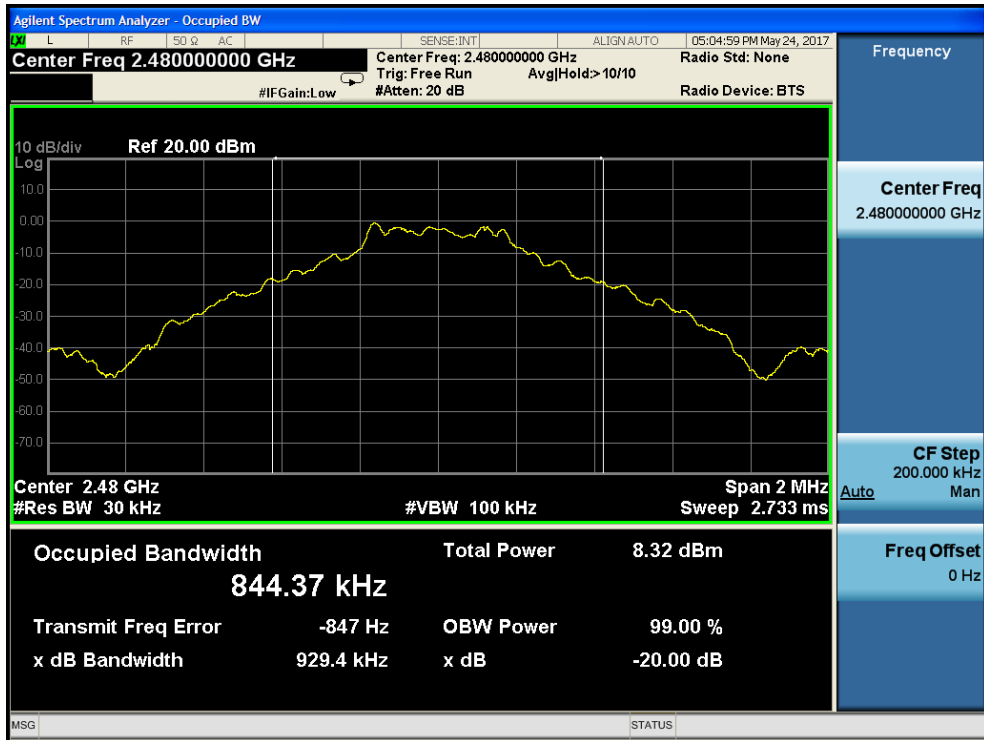


Test Mode: BDR---High

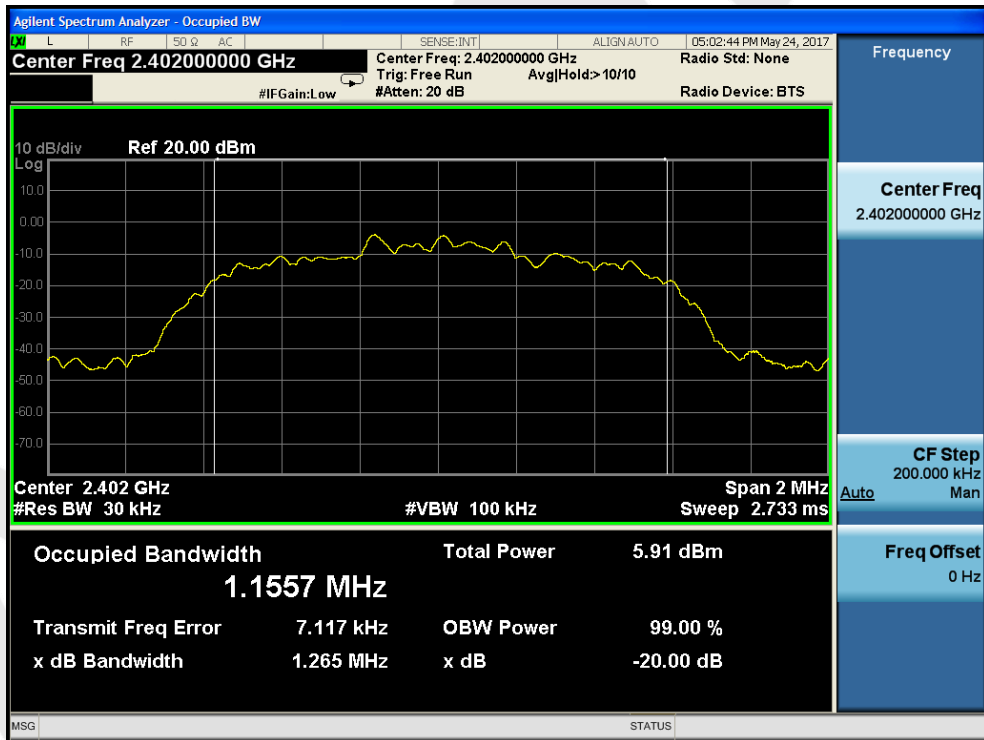

Test Mode: EDR---Low

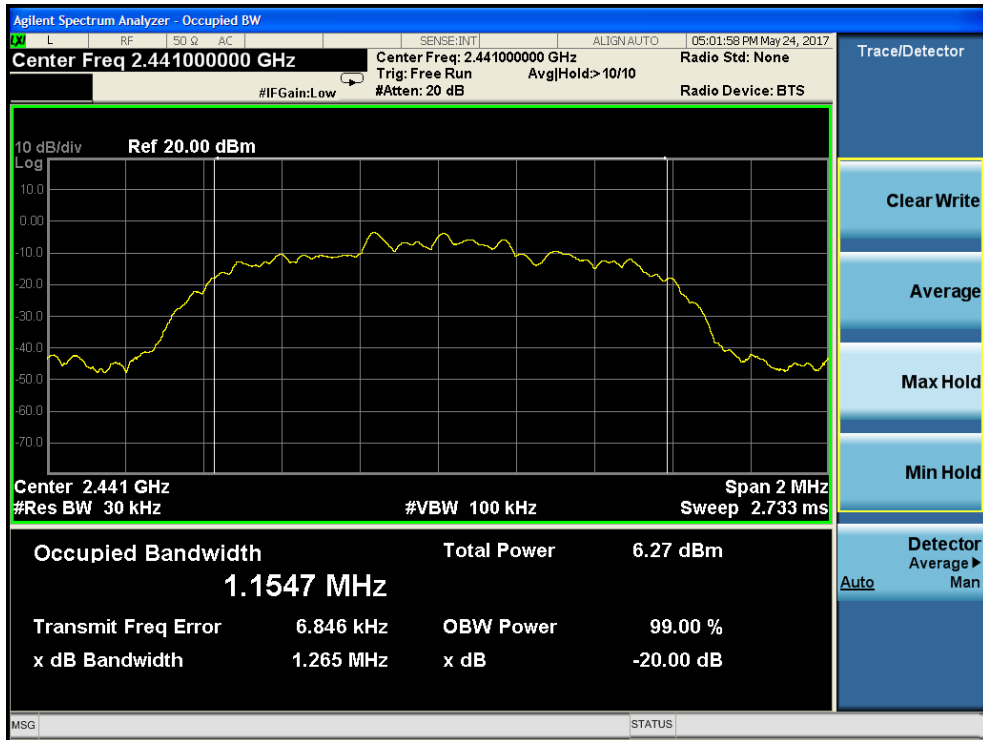

Test Mode: EDR---Middle

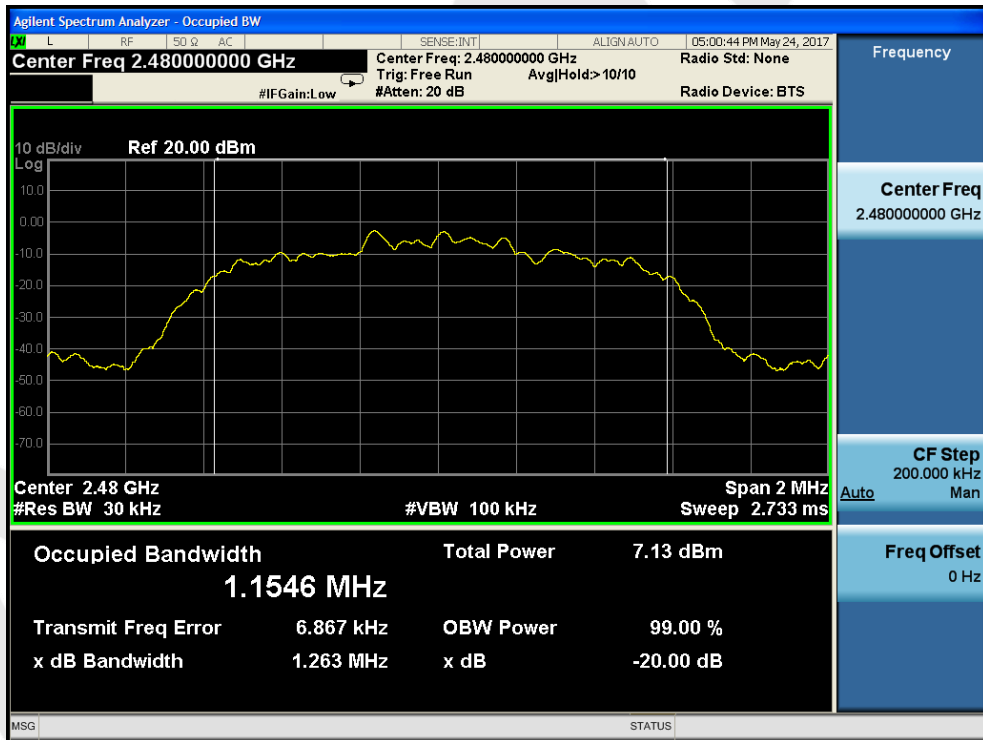


Test Mode: EDR---High

7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

| | |
|---------------|--|
| Test Standard | FCC Part15 C Section 15.247 (a)(1) |
| Test Limit | >25KHz or >two-thirds of the 20 dB bandwidth |

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

| | | | |
|--------------|------------------------|-------------|--------------------|
| Test Item | : Frequency Separation | Test Mode | : CH Low ~ CH High |
| Test Voltage | : AC 120V, 60Hz | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

| Channel | Frequency (MHz) | Separation Read Value (kHz) | Limit (kHz) | Modulation Mode |
|---------|-----------------|-----------------------------|-------------|-----------------|
| Low | 2402 | 1000 | 900.6 | BDR |
| Middle | 2441 | 1000 | 931.1 | BDR |
| High | 2480 | 1000 | 929.4 | BDR |
| Low | 2402 | 1000 | 843.3 | EDR |
| Middle | 2441 | 1000 | 843.3 | EDR |
| High | 2480 | 1000 | 842.0 | EDR |

Remark:

1. The limit of mode (EDR) is 2/3 of 20dB BW;
2. The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.



Test Mode: BDR---Low



Test Mode: BDR---Middle



Test Mode: BDR---High



Test Mode: EDR---Low



Test Mode: EDR---Middle




Test Mode: EDR---High

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1) |
| Test Limit | >15 channels |

8.2. Test Setup



8.3. Test Procedure


The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


8.4. Test Data

| | | | |
|--------------|-------------------------------|-------------|--------------------|
| Test Item | : Number of Hopping Frequency | Test Mode | : CH Low ~ CH High |
| Test Voltage | : AC 120V, 60Hz | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

| Hopping Channel Frequency Range | Quantity of Hopping Channel | Quantity of Hopping Channel |
|---------------------------------|-----------------------------|-----------------------------|
| 2402-2480MHz | 79 | > 15 |

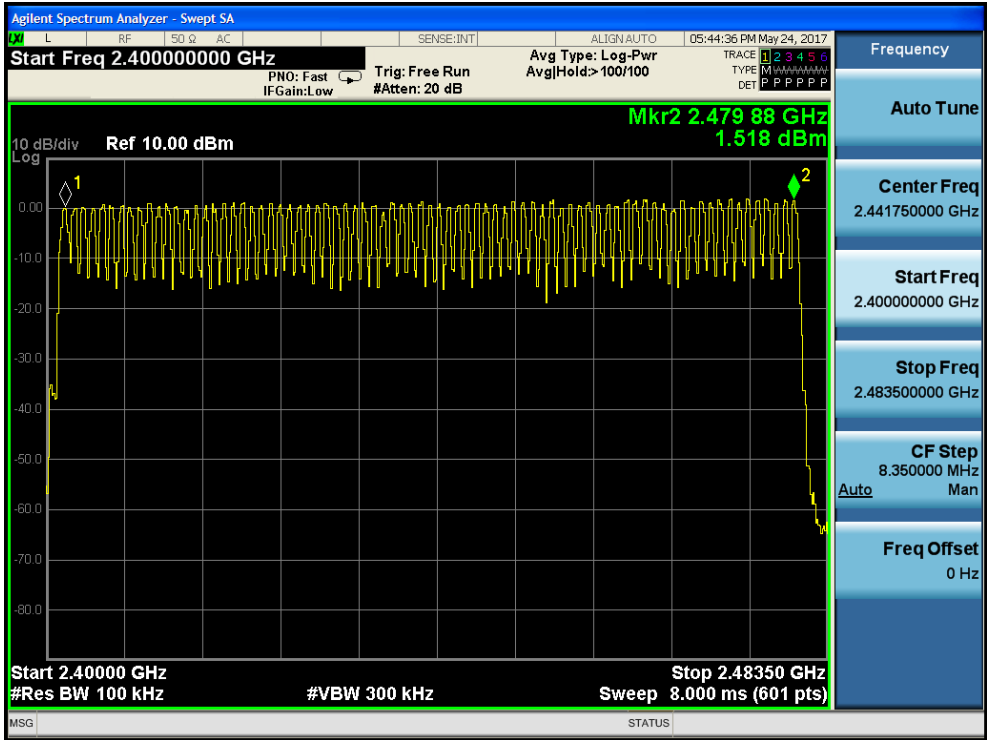

BDR Mode

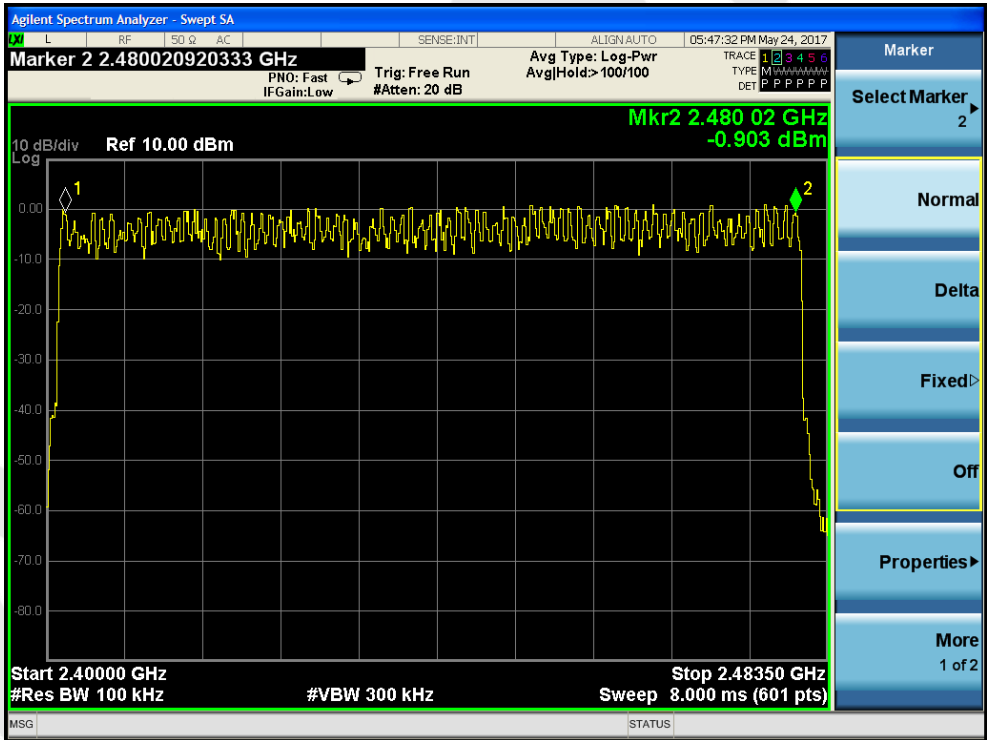


EDR Mode

9. Dwell Time Test

9.1. Test Standard and Limit

| | |
|---------------|------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1) |
| Test Limit | 0.4 sec |

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


9.4. Test Data

Test Item : Time of Occupancy
 Test Voltage : AC 120V, 60Hz
 Test Result : PASS


Test Mode : CH Low ~ CH High
 Temperature : 24°C
 Humidity : 55%RH

| Package Type | Pulse width (ms) | Time slot length(ms) | Dwell time (ms) | Limit (s) | Modulation |
|--------------|------------------|-------------------------------------|-----------------|-----------|------------|
| DH1 | 0.368 | time slot length *1600/2 /79 * 31.6 | 117.76 | 0.4 | BDR |
| DH3 | 1.620 | time slot length *1600/4 /79 * 31.6 | 259.20 | 0.4 | BDR |
| DH5 | 2.867 | time slot length *1600/6 /79 * 31.6 | 305.81 | 0.4 | BDR |
| 3DH1 | 0.375 | time slot length *1600/2 /79 * 31.6 | 120.00 | 0.4 | EDR |
| 3DH3 | 1.620 | time slot length *1600/4 /79 * 31.6 | 259.20 | 0.4 | EDR |
| 3DH5 | 2.873 | time slot length *1600/6 /79 * 31.6 | 306.45 | 0.4 | EDR |


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

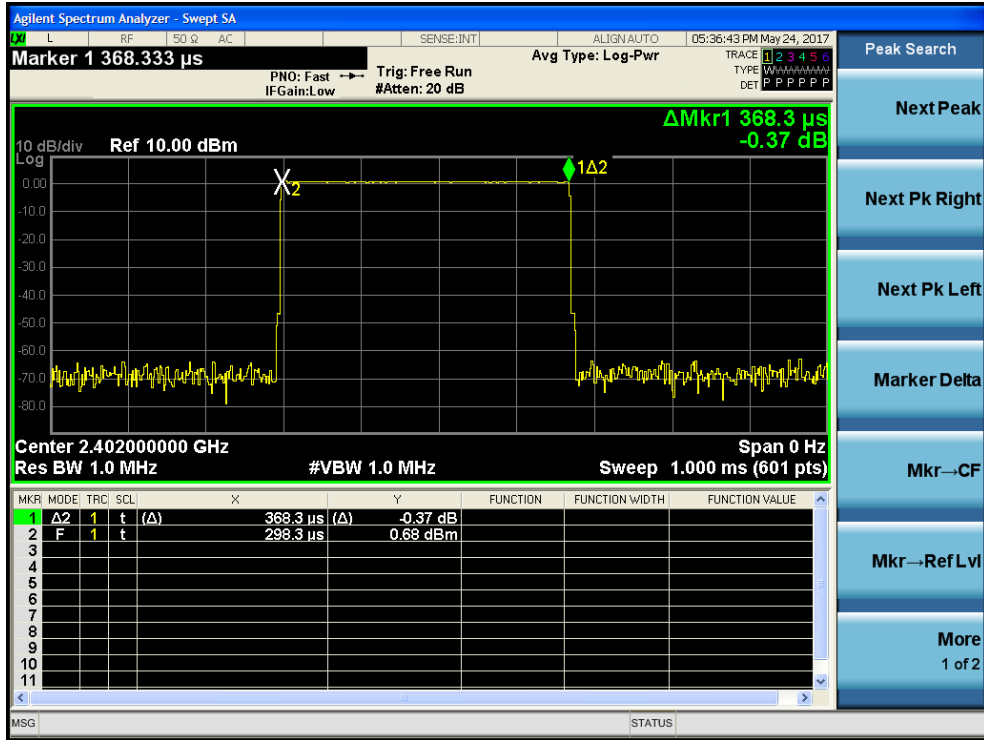


Test Mode: BDR---DH1

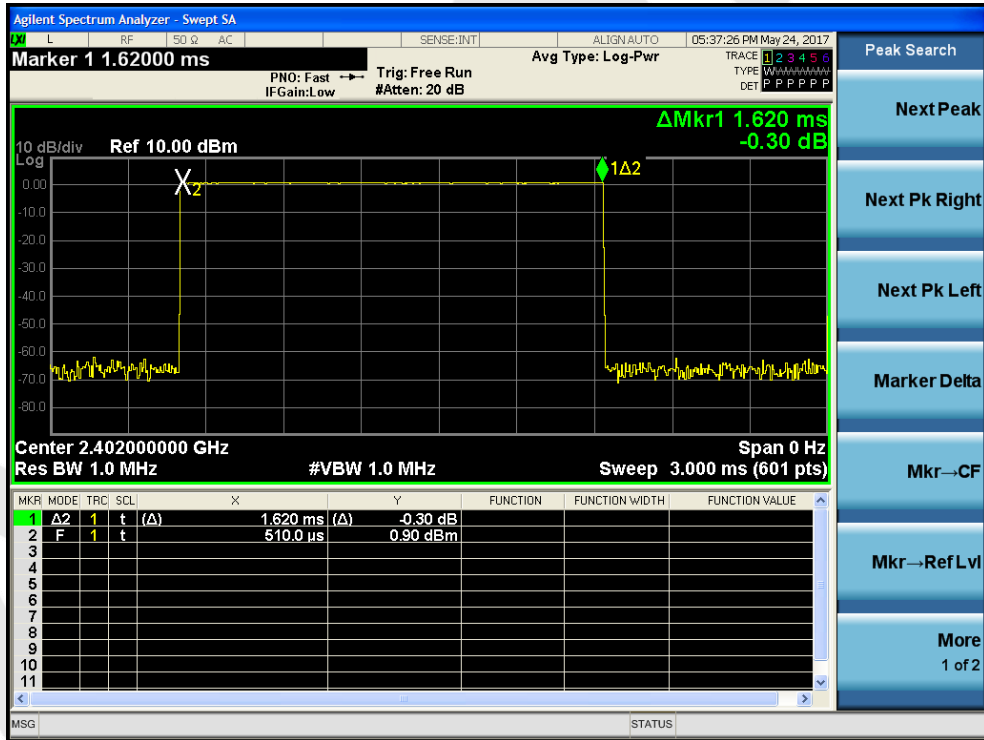


Test Mode: BDR---DH3

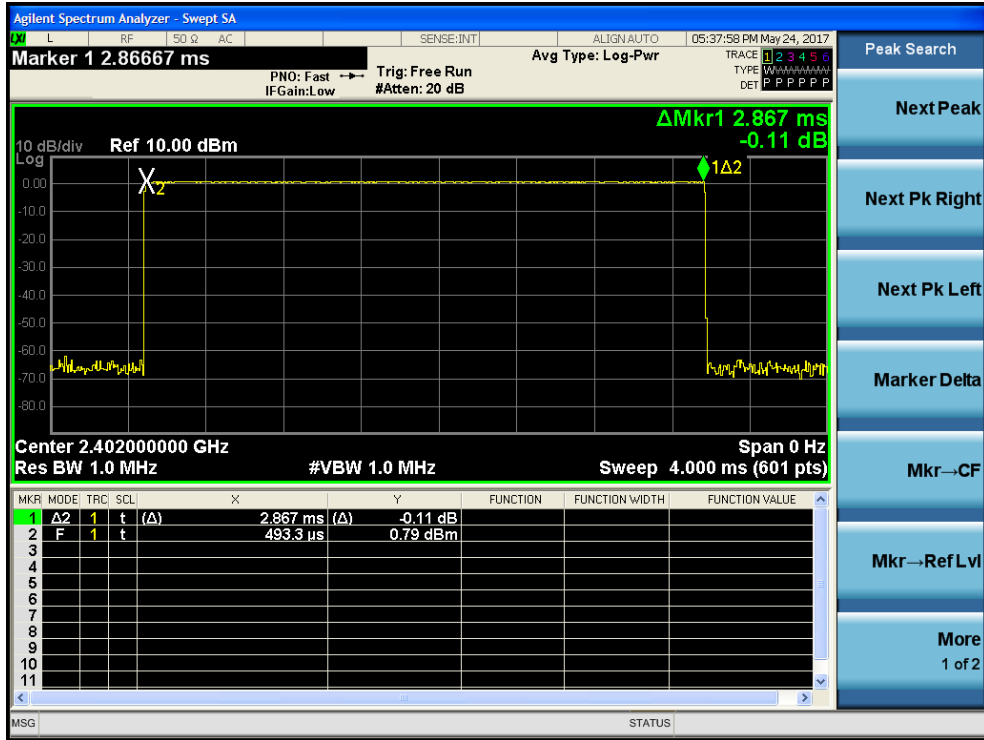


Test Mode: BDR—DH5

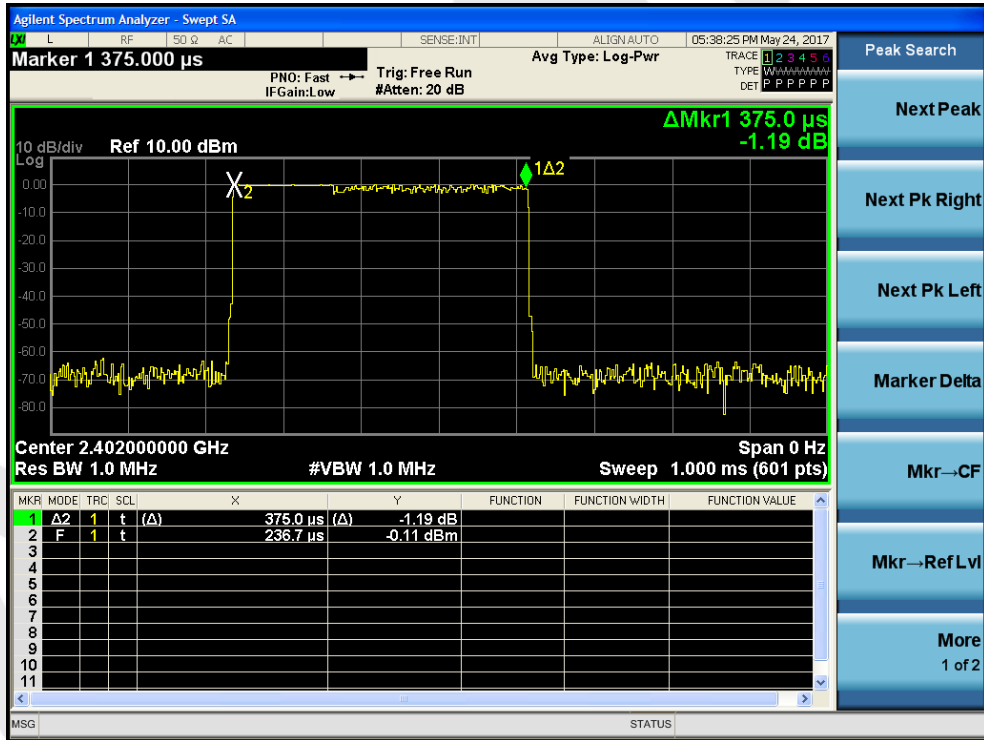

Test Mode: EDR---3DH1

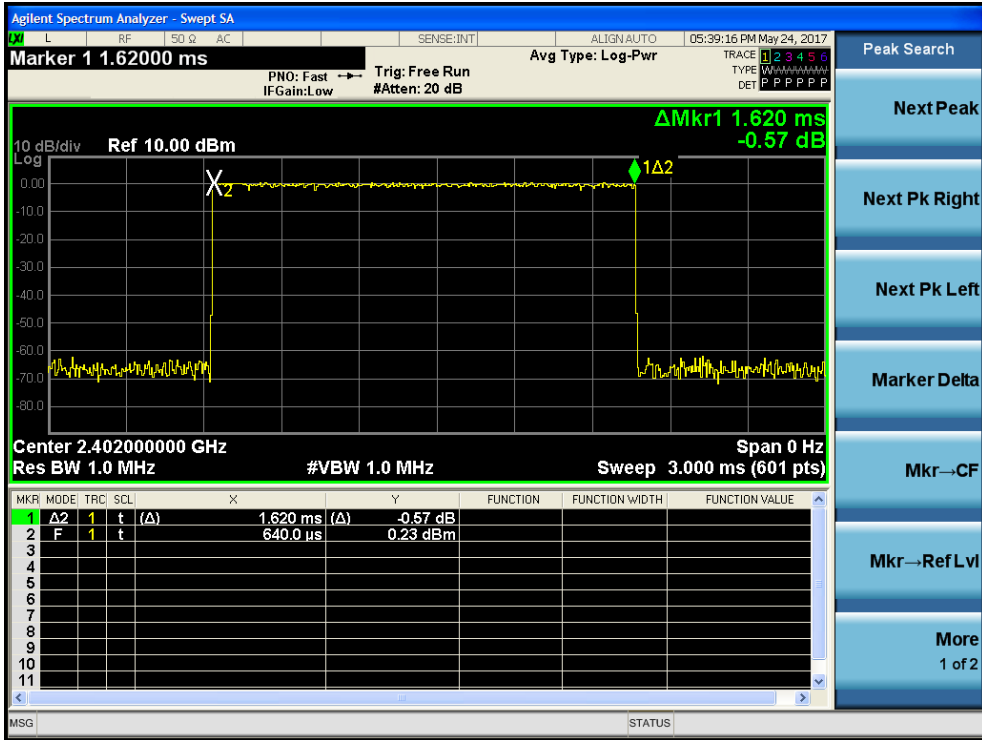

Test Mode: EDR---3DH3

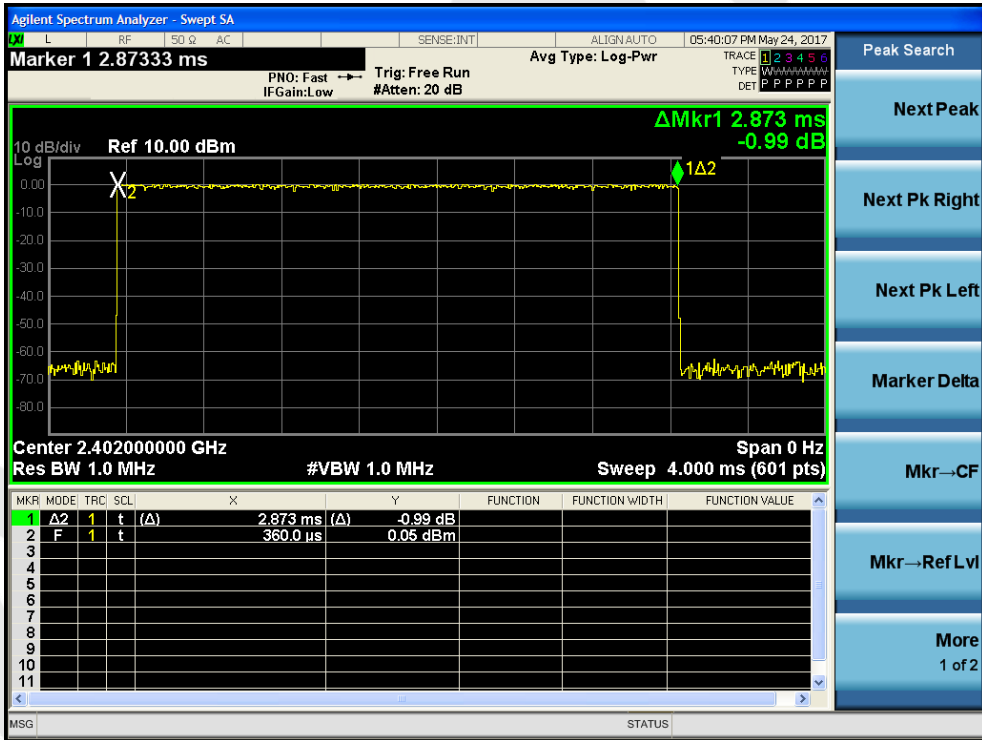


Test Mode: EDR—3DH5

10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

| | |
|---------------|--|
| Test Standard | FCC Part15 C Section 15.247 (d) |
| Test Limit | in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a). |

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data


| | | | |
|--------------|-----------------|-------------|--------------------|
| Test Item | : Band edge | Test Mode | : CH Low ~ CH High |
| Test Voltage | : AC 120V, 60Hz | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.

For Hopping Mode

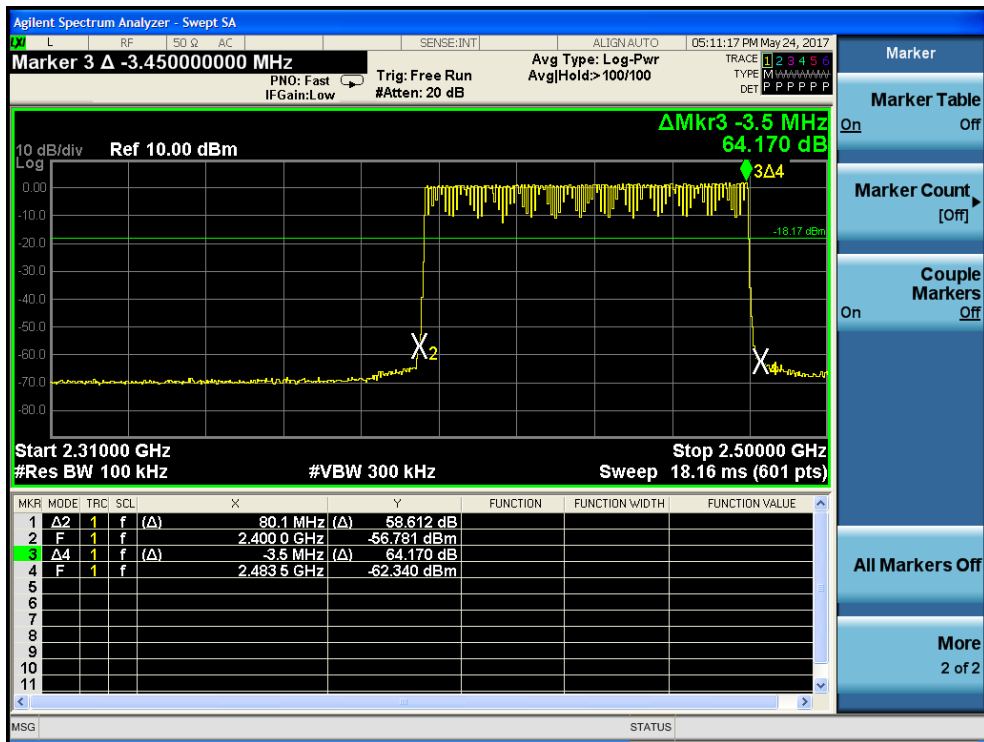


BDR mode

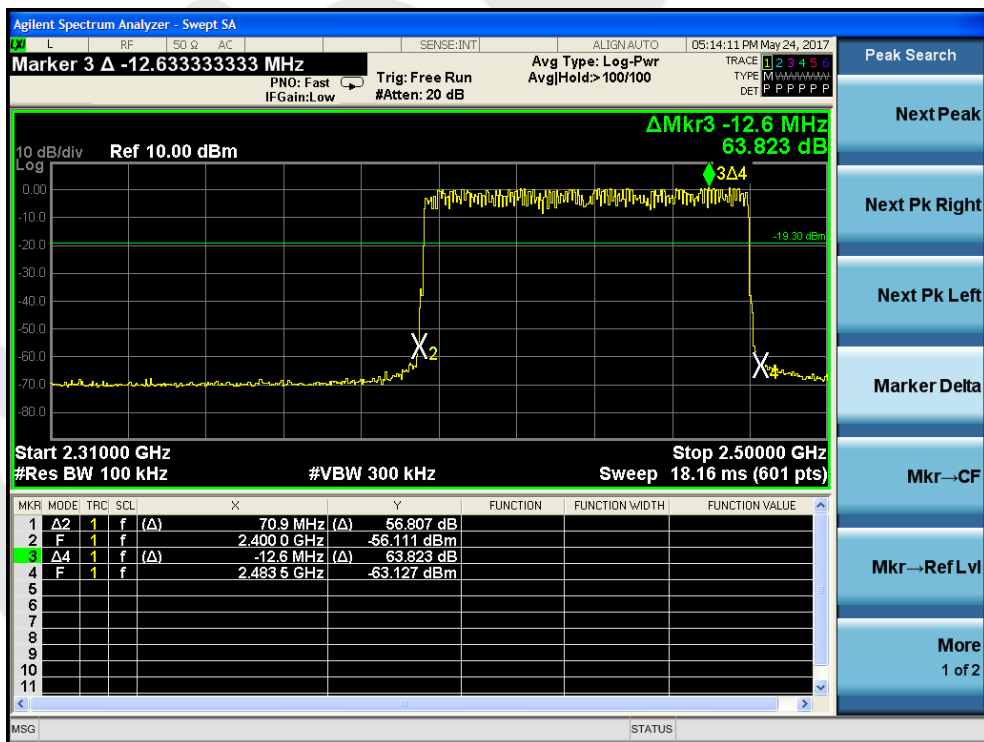


EDR mode

For Non-Hopping Mode

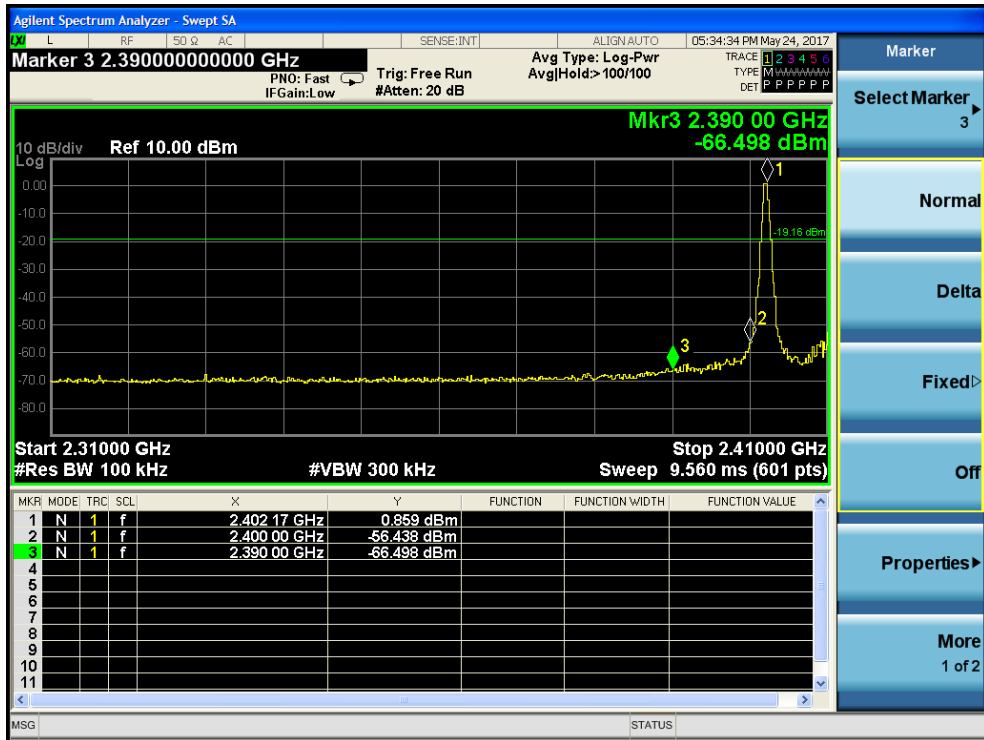


BDR mode -- Lowest

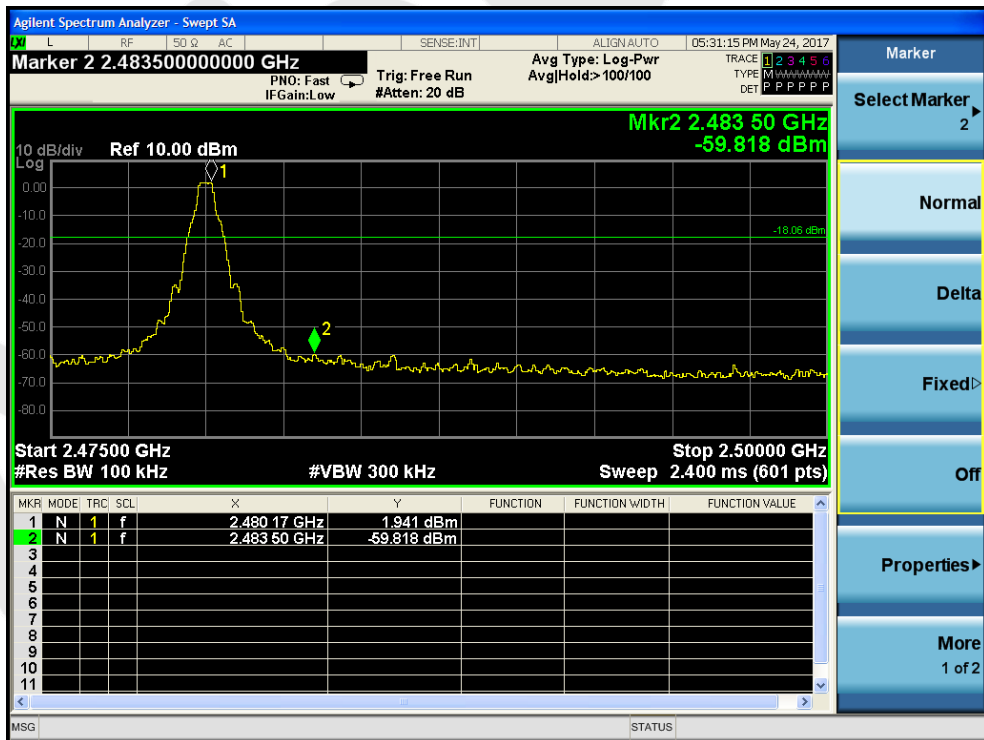


BDR mode -- Highest

For Non-Hopping Mode

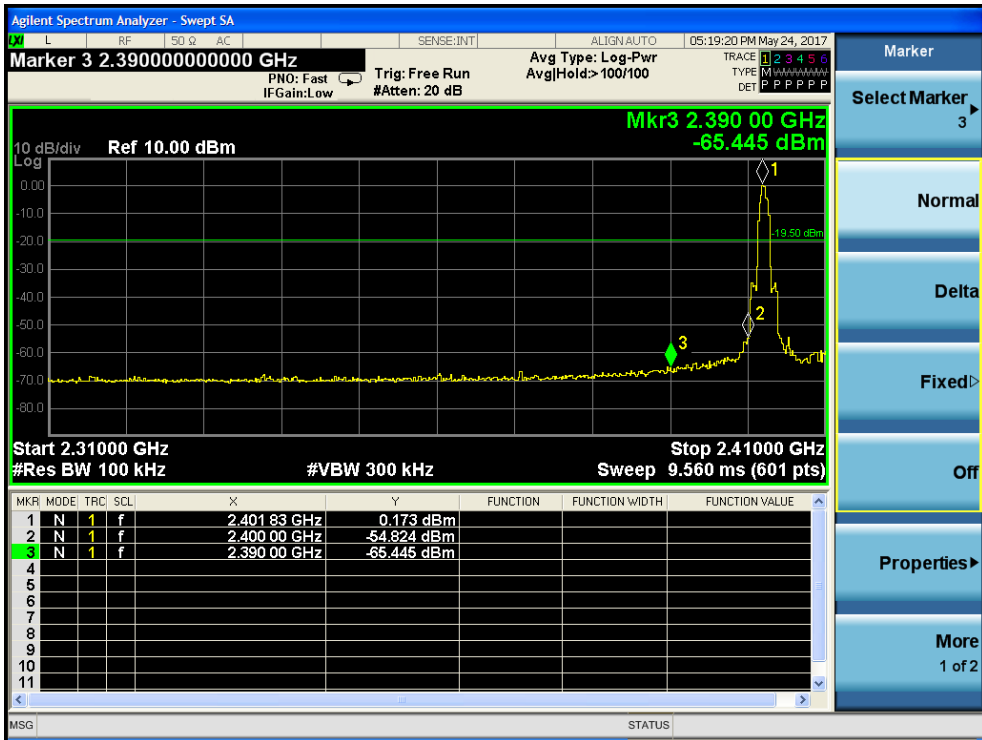

EDR mode -- Lowest

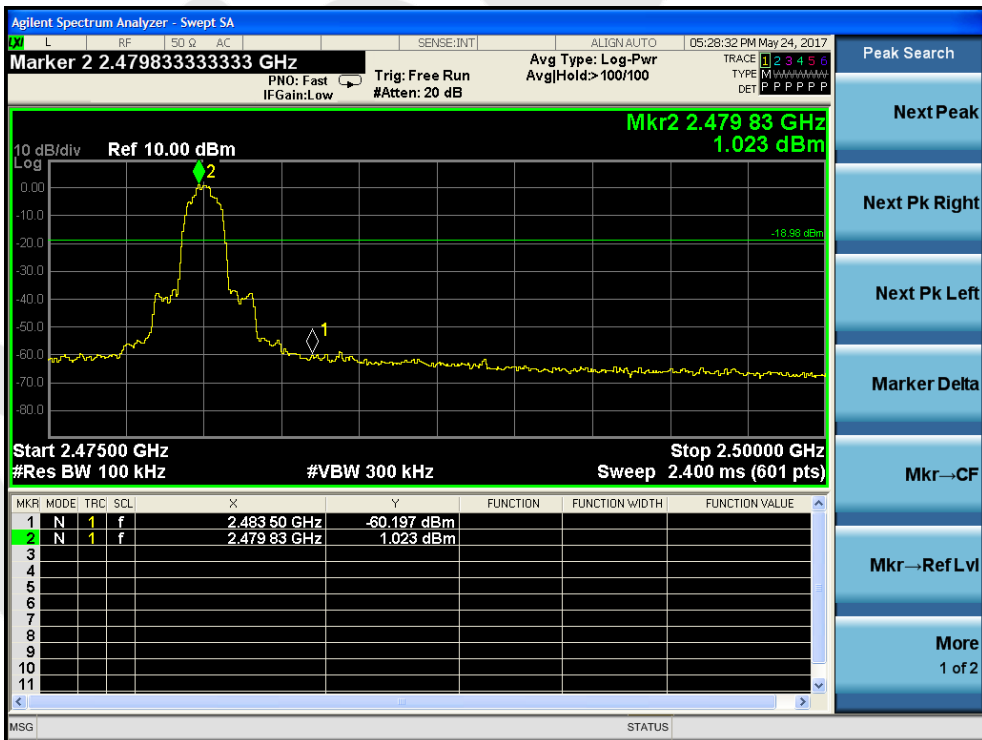

EDR mode -- Highest


11. Antenna Requirement

11.1. Test Standard and Requirement

| | |
|---------------|---|
| Test Standard | FCC Part15 Section 15.203 /247(c) |
| Requirement | <p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> |

11.2. Antenna Connected Construction

The bluetooth antenna is PCB antenna which permanently attached, and the best case gain of the antenna is -0.68dBi. It complies with the standard requirement.

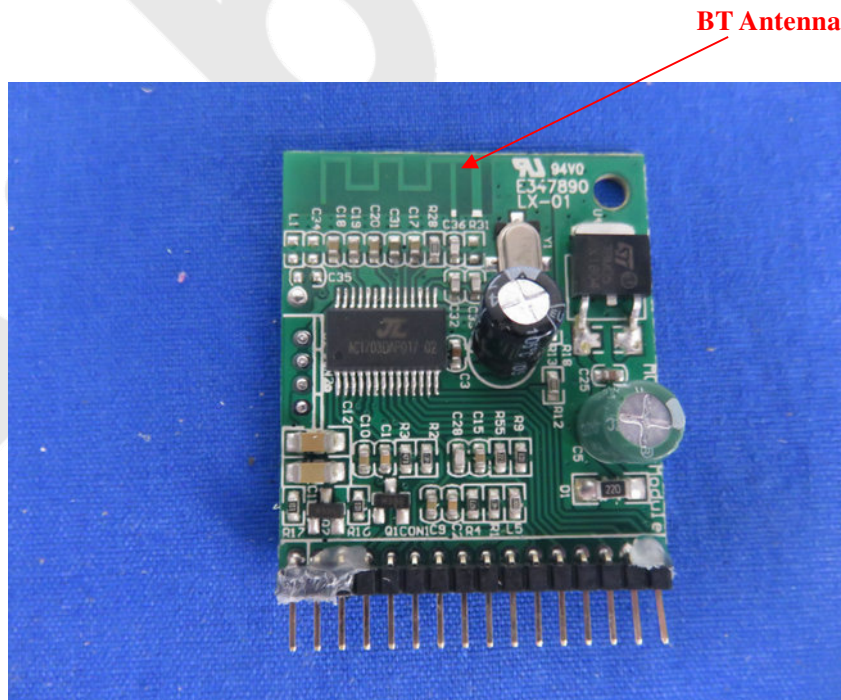

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



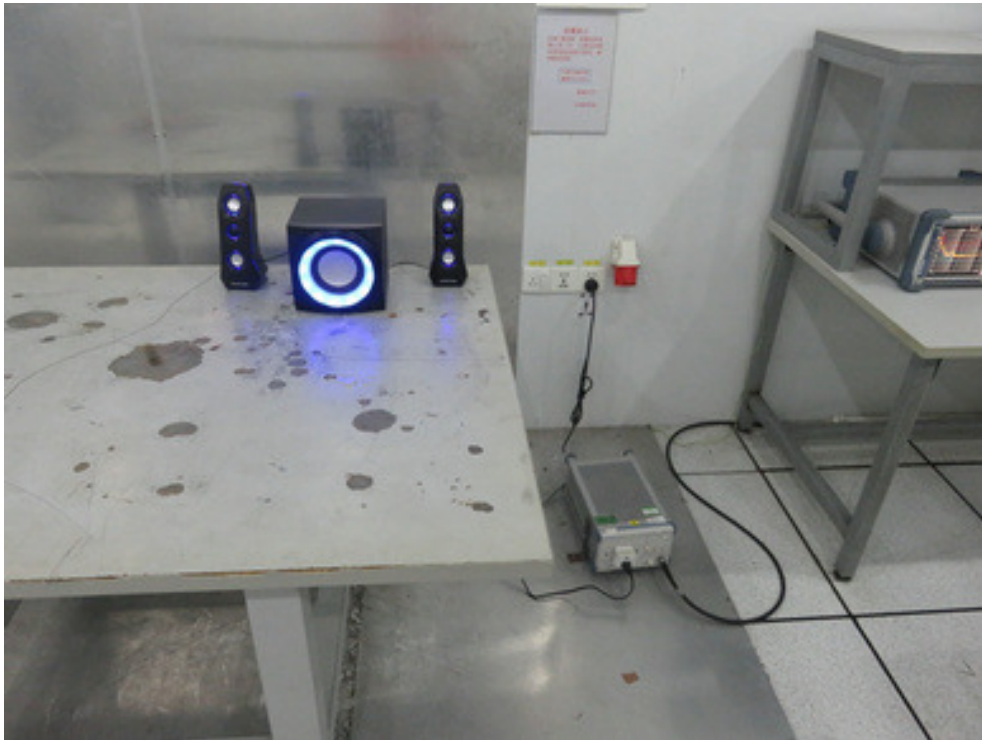



Photo of Radiation Emission Test

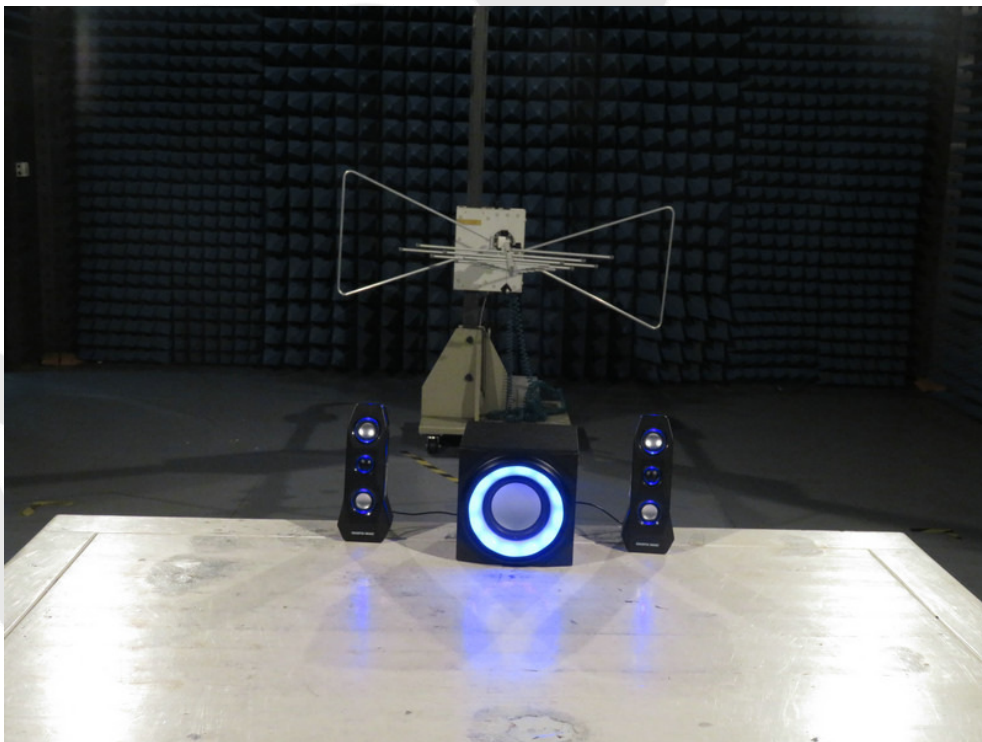


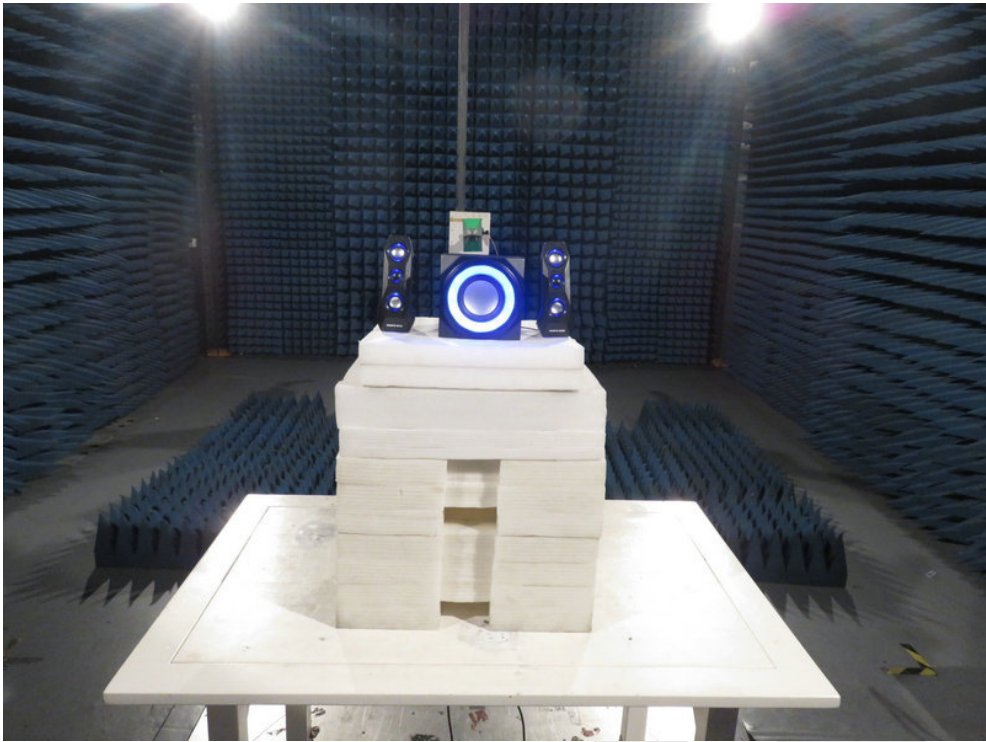



Anbotek

APPENDIX II -- EXTERNAL PHOTOGRAPH

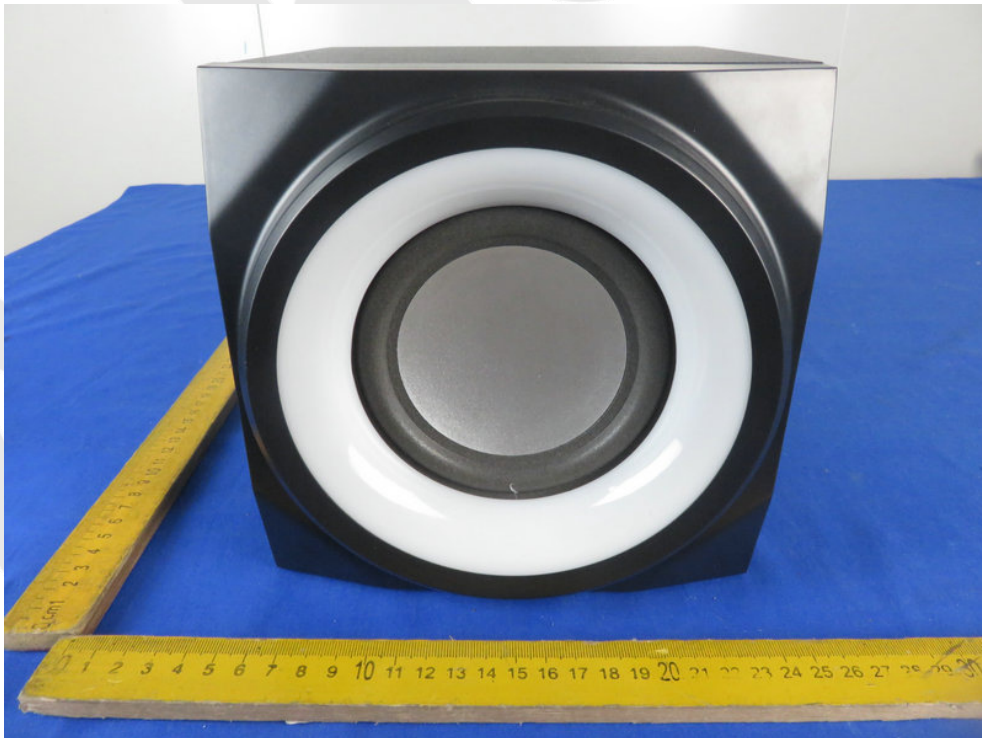

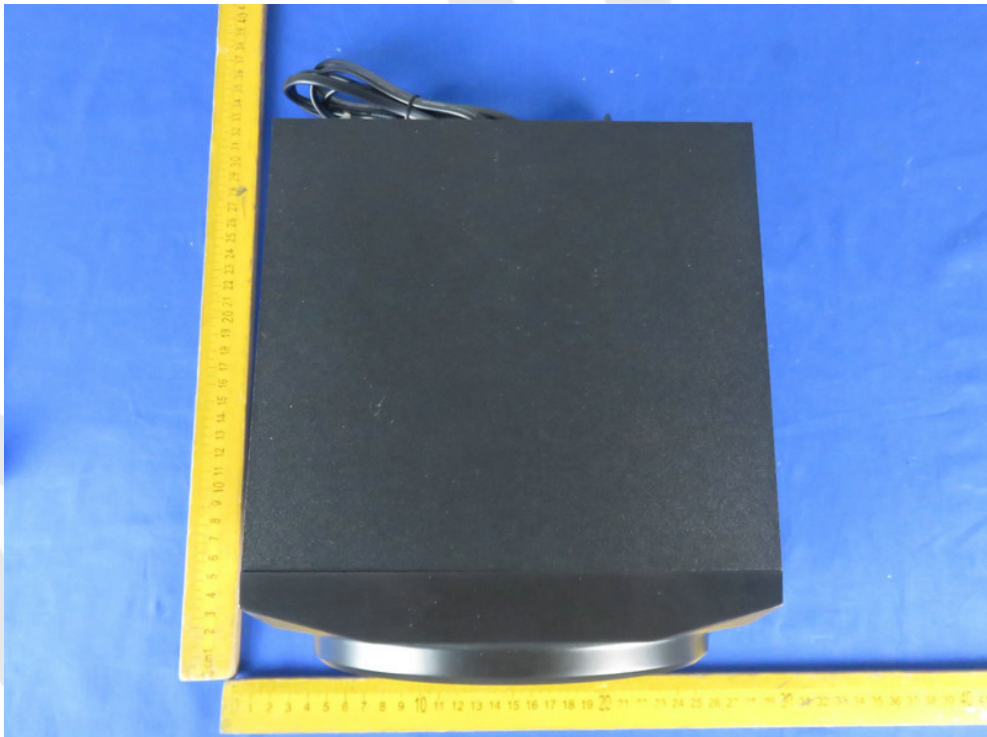



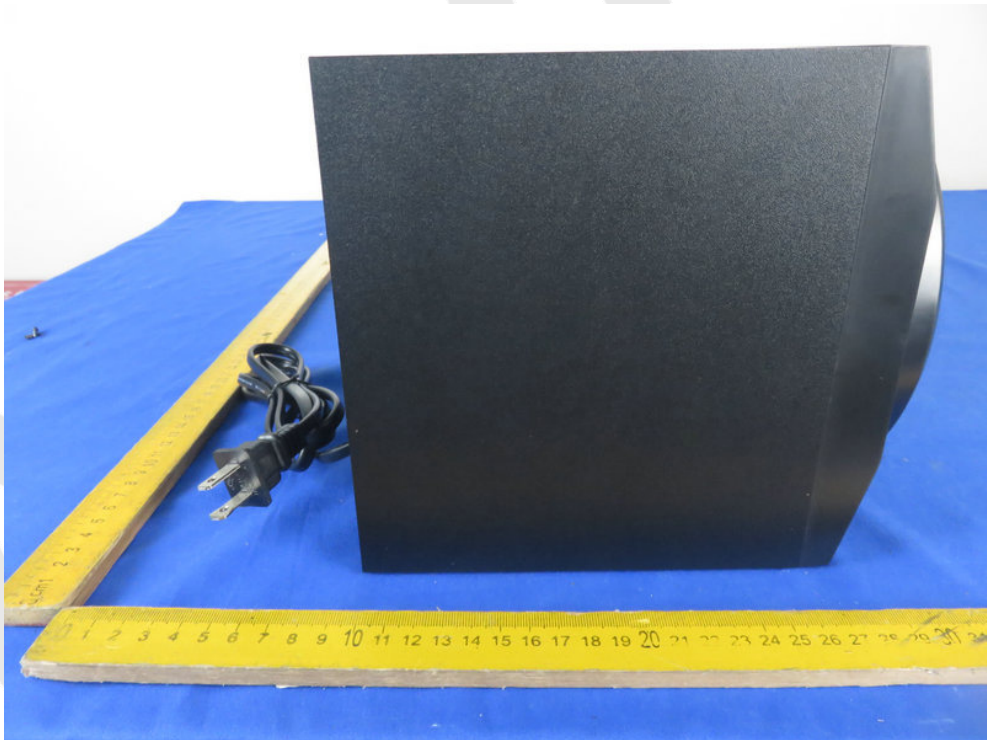



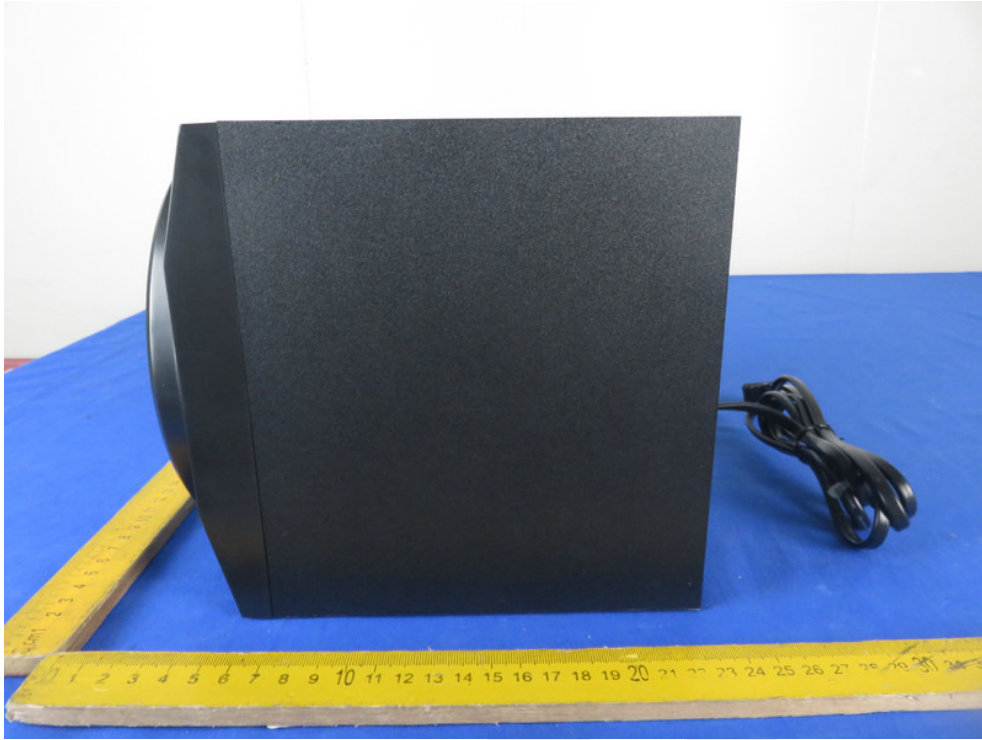



Anbotek

APPENDIX III -- INTERNAL PHOTOGRAPH

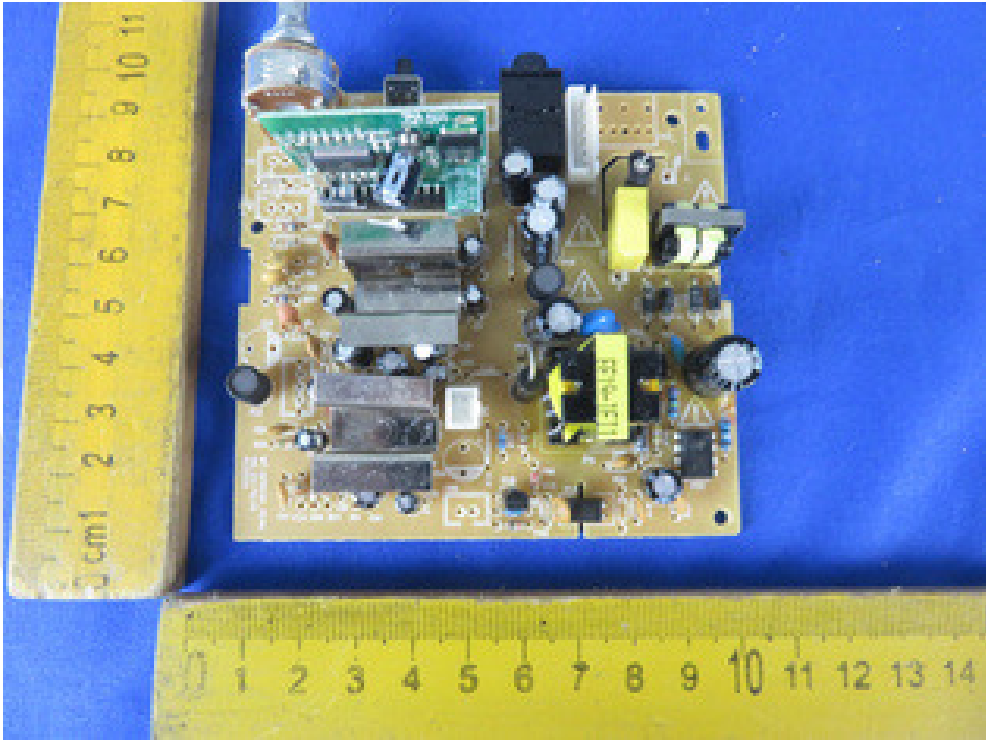

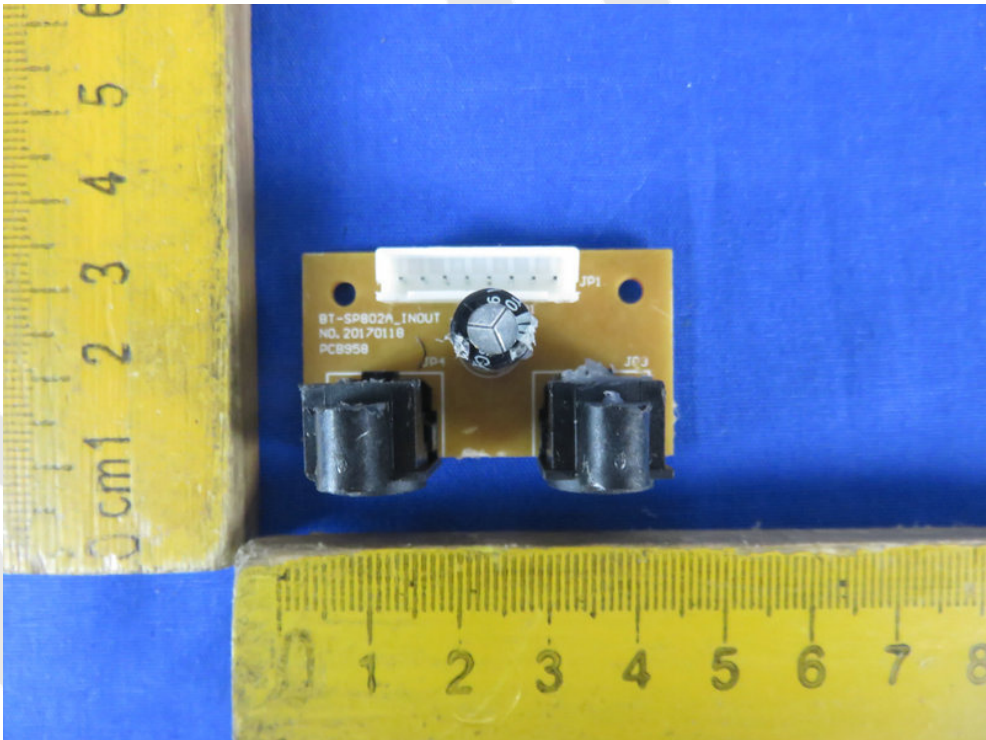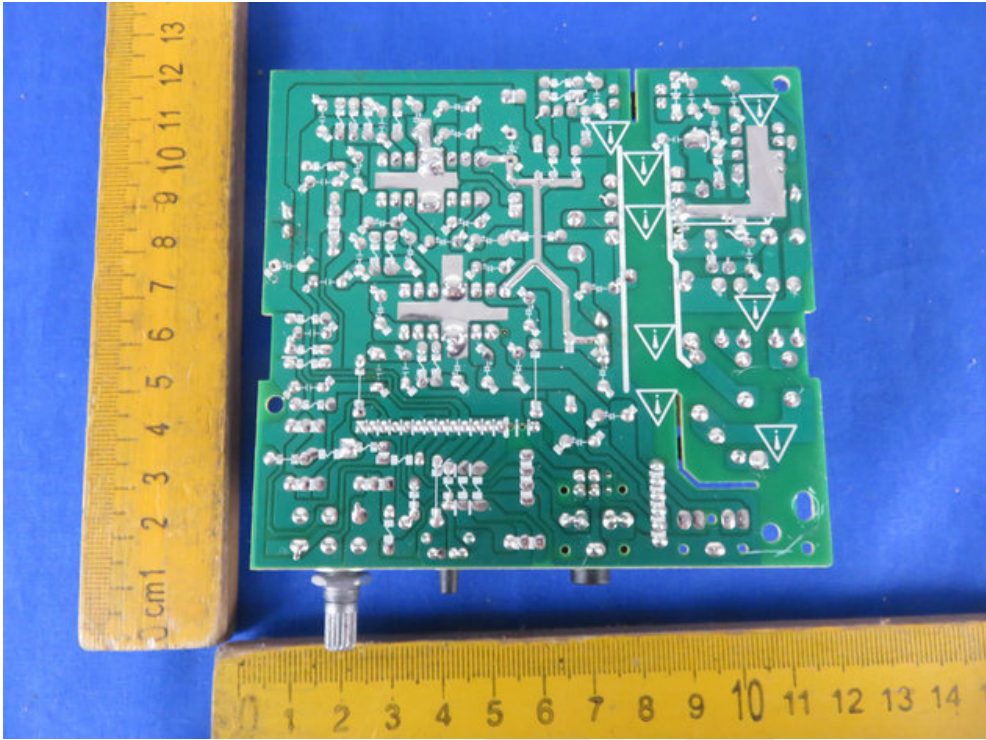

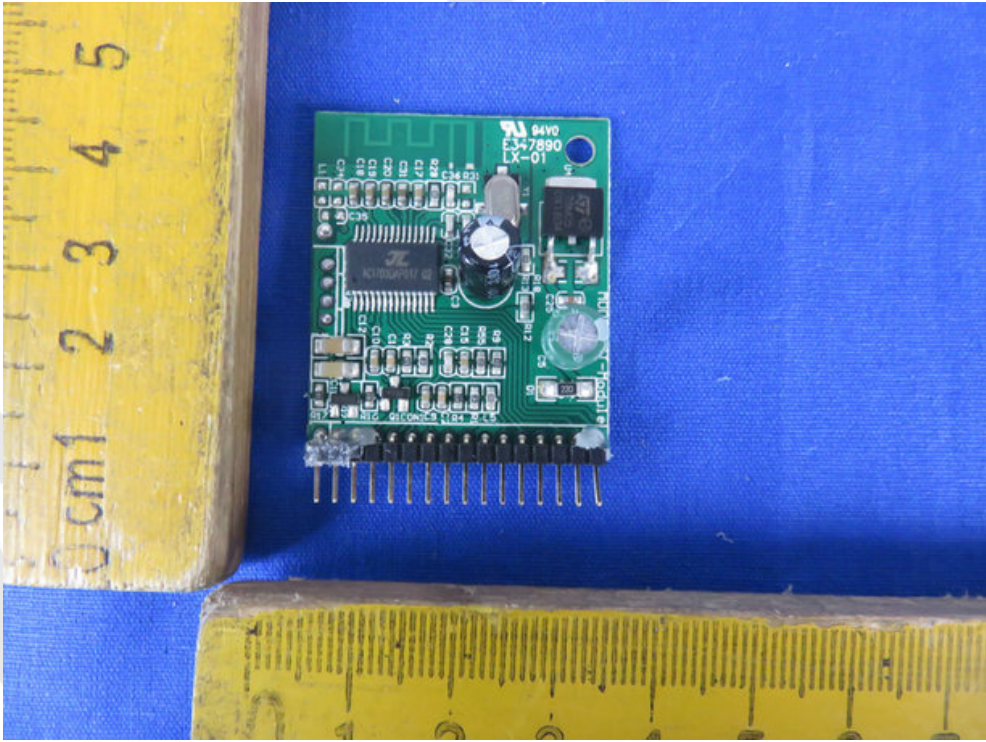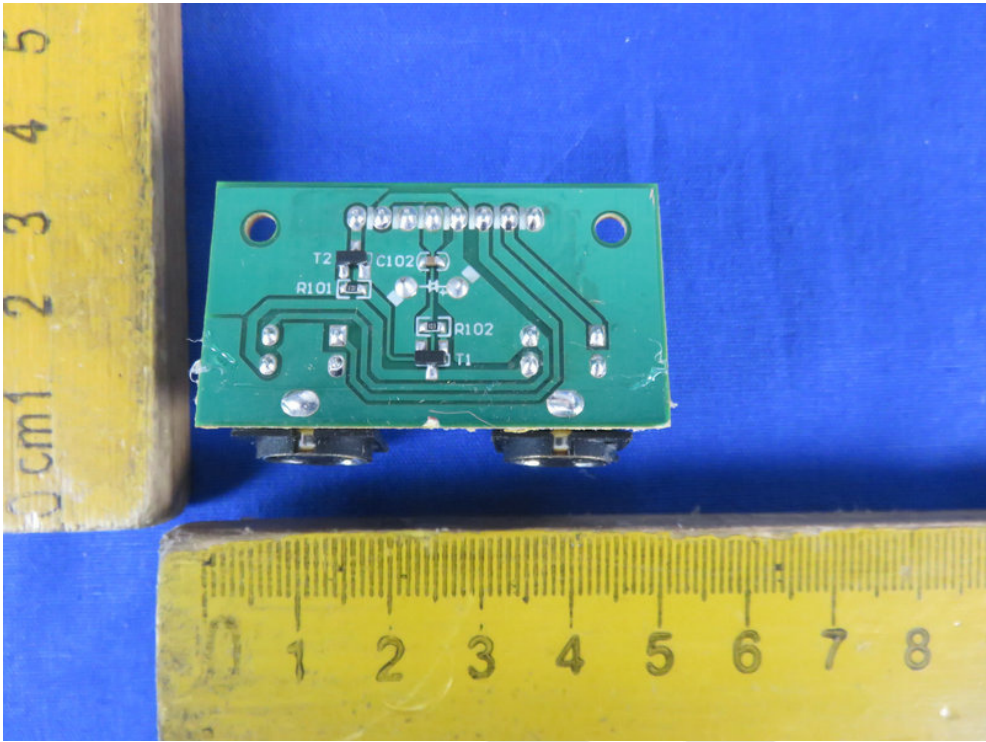

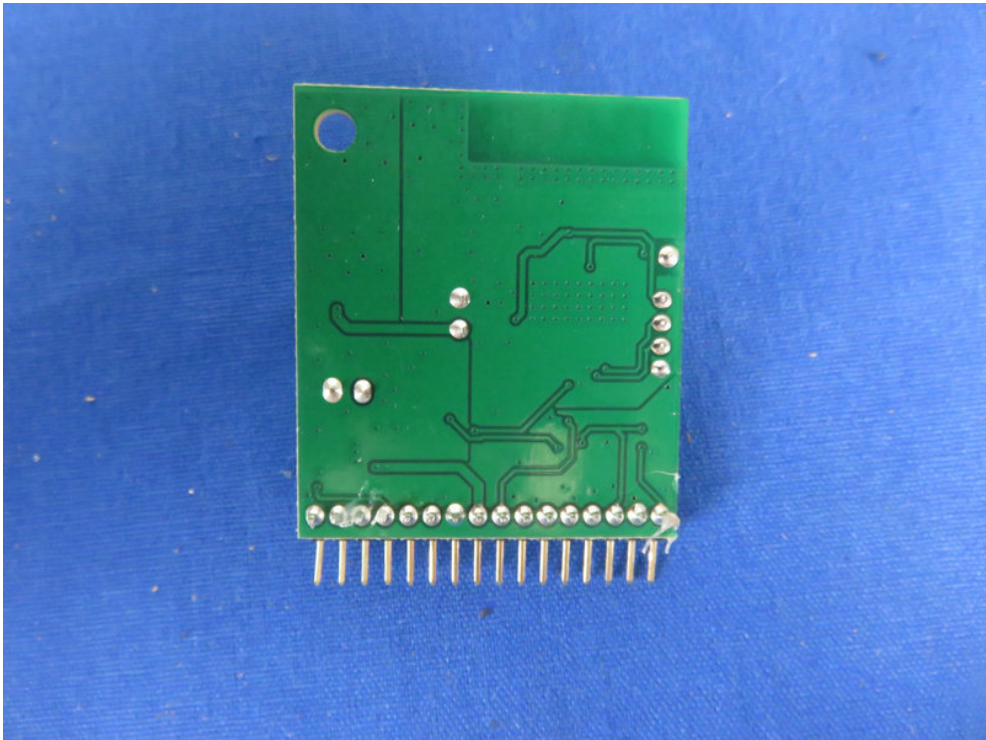

Anbotek