

# FCC Part 15B

## Measurement and Test Report

For

**Giant Star Mobile Technology Co., Ltd**

**Room 23C1, Block B, ZhongYin Building, FuZhong one Road, Futian  
District, ShenZhen, China**

**FCC ID: 2AE7F-S5**

<b>Test Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>Janus one</u>
<b>Tested Model:</b>	<u>s5</u>
<b>Report No.:</b>	<u>STR15068101I-3</u>
<b>Tested Date:</b>	<u>2015-06-10 to 2015-06-29</u>
<b>Issued Date:</b>	<u>2015-06-29</u>
<b>Tested By:</b>	<u>Lebron Wang / Engineer</u>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	<p><b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>7</b>
3.1 MEASUREMENT UNCERTAINTY .....	7
3.2 TEST EQUIPMENT LIST AND DETAILS .....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS .....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>11</b>
4.1 MEASUREMENT UNCERTAINTY .....	11
4.2 TEST EQUIPMENT LIST AND DETAILS .....	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP .....	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS .....	12
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	12

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Giant Star Mobile Technology Co., Ltd  
Address of applicant: Room 23C1, Block B, ZhongYin Building, FuZhong one  
Road, Futian District, ShenZhen, China  
Manufacturer: Giant Star Mobile Technology Co., Ltd  
Address of manufacturer: Room 23C1, Block B, ZhongYin Building, FuZhong one  
Road, Futian District, ShenZhen, China

<b>General Description of EUT</b>	
Product Name:	Janus one
Trade Name:	GTstar
Model No.:	s5
Adding Model(s):	/
<i>The EUT is dual band GSM850/PCS1900 Janus one. The Janus one is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped for GSM850 and GSM1900 and Bluetooth. For more information see the following datasheet</i>	
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Rated Voltage:	DC 3.7V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	/
Lowest Internal Frequency:	26MHz
Highest Internal Frequency:	260MHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the Giant Star Mobile Technology Co., Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

- **CNAS Registration No.: L1659**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. Some measurement facilities used to collect the measurement data are located at Building 28/29, Shigudong, Xili Industrial Area, Xili Street, Nanshan District, Shenzhen, Guangdong, China

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging	Connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
USB Cable	0.8	Shielded	Without Core

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone Cable	1.2	Unshielded	Without Core

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

#### 3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-05-28	2016-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-05-28	2016-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-05-28	2016-05-27

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

*Note: Base on the calibrated result, for the impedance characteristic and insertion loss, the effect shall be ignored from the placed multiple outlet power strip between the device and LISN.*

#### 3.4 Basic Test Setup Block Diagram

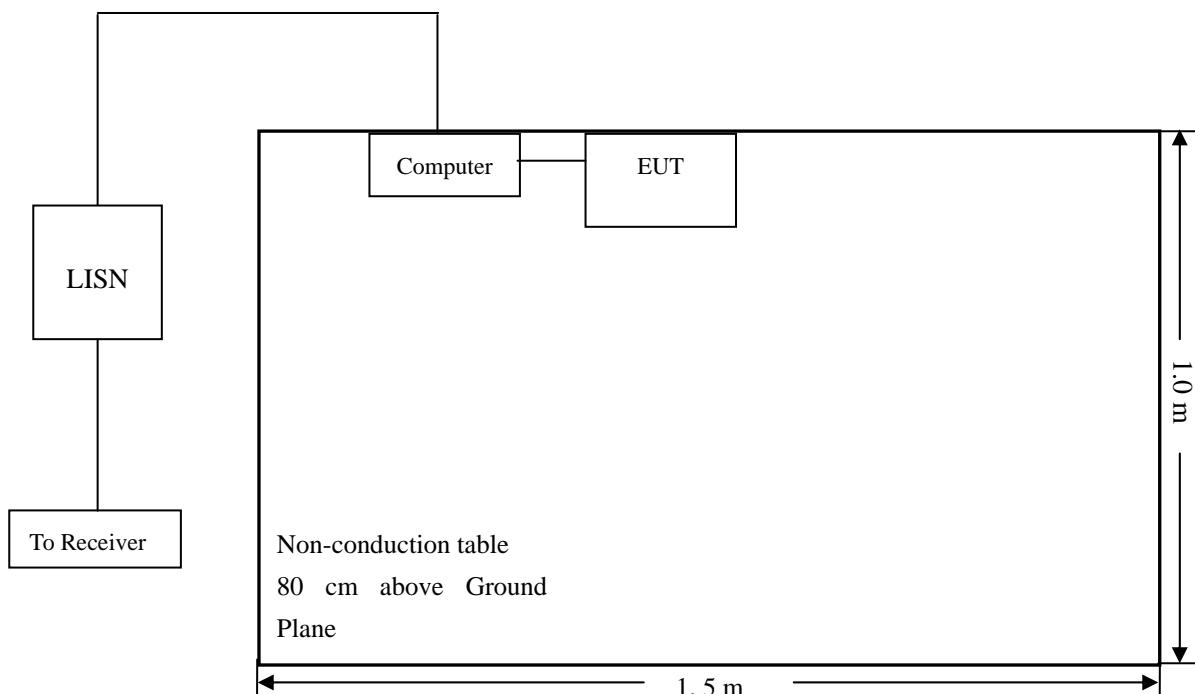

### 3.5 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


**-1.99 dB at 0.5060 MHz in the Line, QP detector, 0.15-30MHz**

### 3.7 Conducted Emissions Test Data

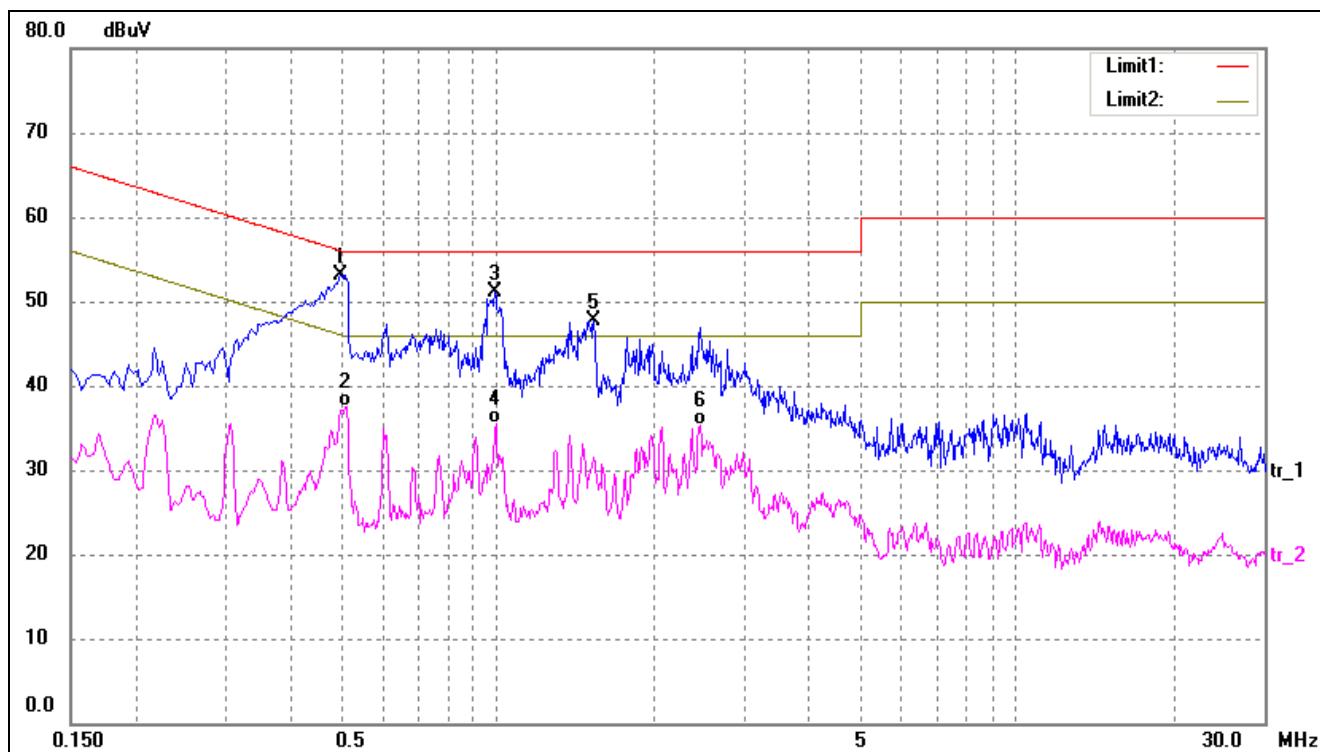**Plot of Conducted Emissions Test Data**EUT: *Janus one*Tested Model: *s5*Operating Condition: *TM1*Comment: *AC 120V/60Hz, USB DC 5V*Test Specification: *Neutral*

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4980	43.67	9.50	53.17	56.03	-2.86	QP
2	0.5100	27.95	9.51	37.46	46.00	-8.54	AVG
3	0.9860	41.11	9.99	51.10	56.00	-4.90	QP
4	0.9900	25.42	9.99	35.41	46.00	-10.59	AVG
5	1.5340	37.77	10.00	47.77	56.00	-8.23	QP
6	2.4500	25.33	10.00	35.33	46.00	-10.67	AVG

Test Specification: Line

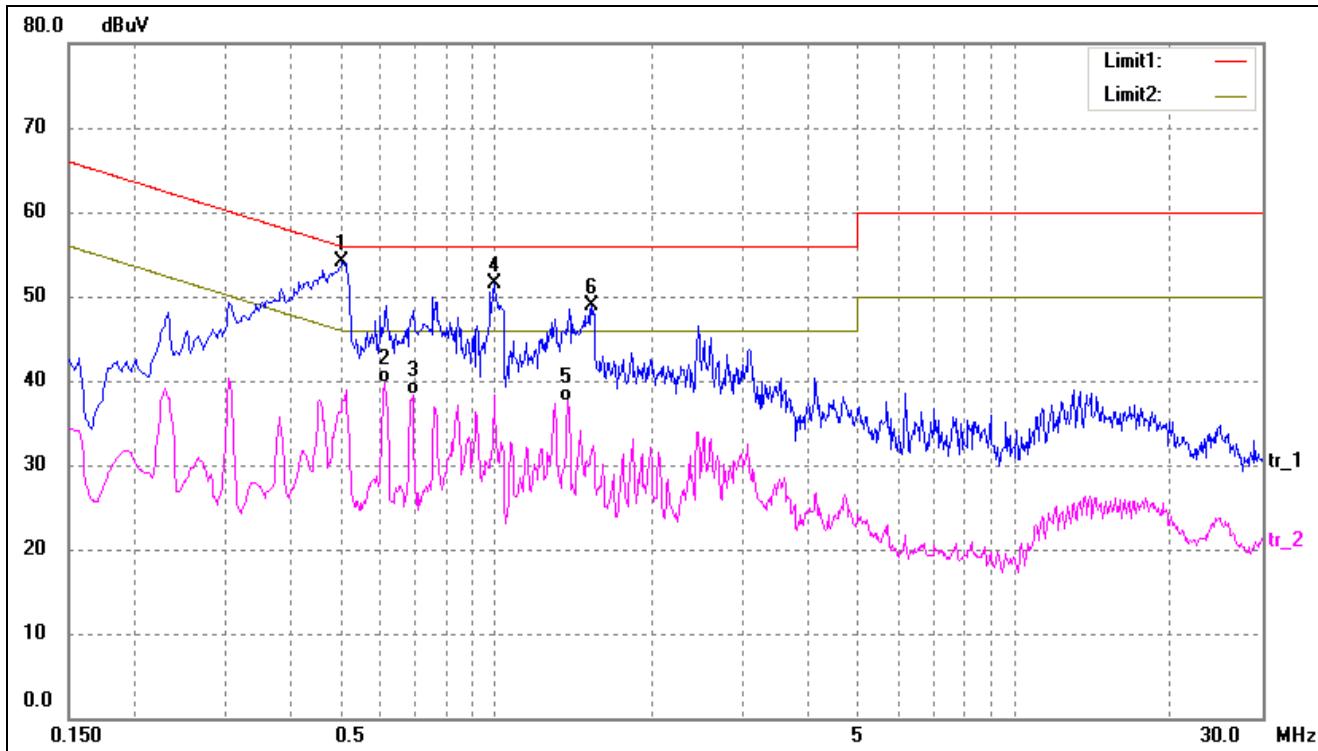

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5060	44.50	9.51	54.01	56.00	-1.99	QP
2	0.6100	30.16	9.61	39.77	46.00	-6.23	AVG
3	0.6900	28.56	9.69	38.25	46.00	-7.75	AVG
4	0.9940	41.53	9.99	51.52	56.00	-4.48	QP
5	1.3780	27.60	10.00	37.60	46.00	-8.40	AVG
6	1.5300	38.90	10.00	48.90	56.00	-7.10	QP

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2015-05-28	2016-05-27

### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

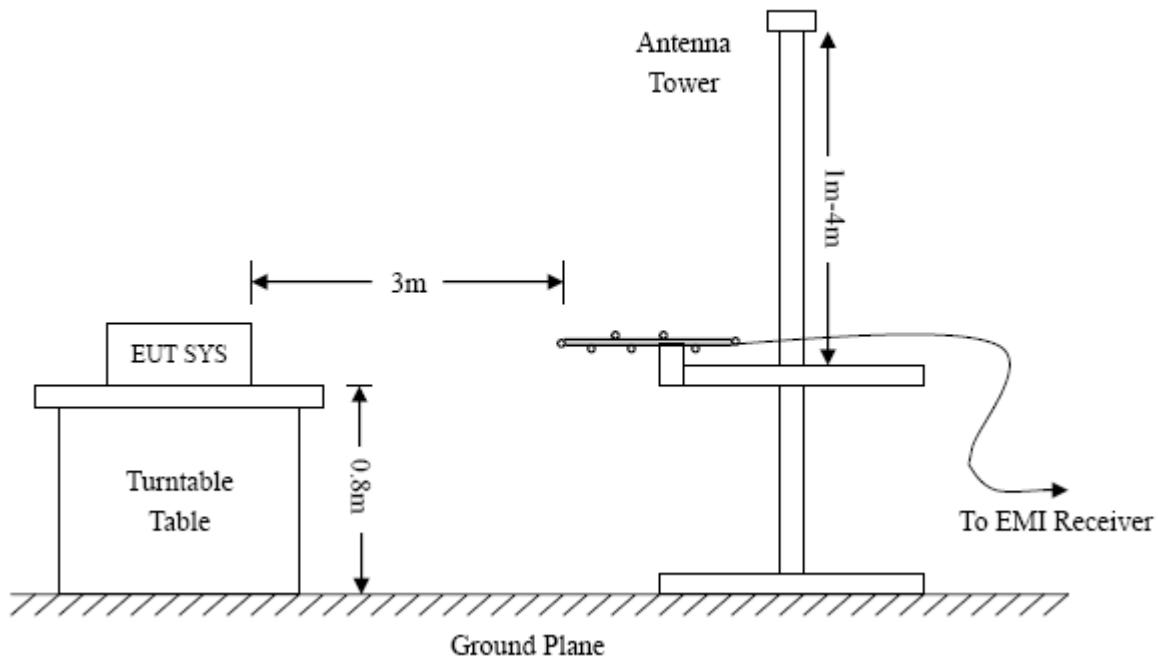

#### 4.4 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


#### 4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-8.57 dB at 774.1584 MHz in the Vertical polarization, 9 kHz to 6 GHz, 3Meters**


**Plot of Radiated Emissions Test Data**

EUT: *Janus one*  
 Tested Model: *s5*  
 Operating Condition: *TM1*  
 Comment: *AC 120V/60Hz, USB DC 5V*  
 Test Specification: *Horizontal*

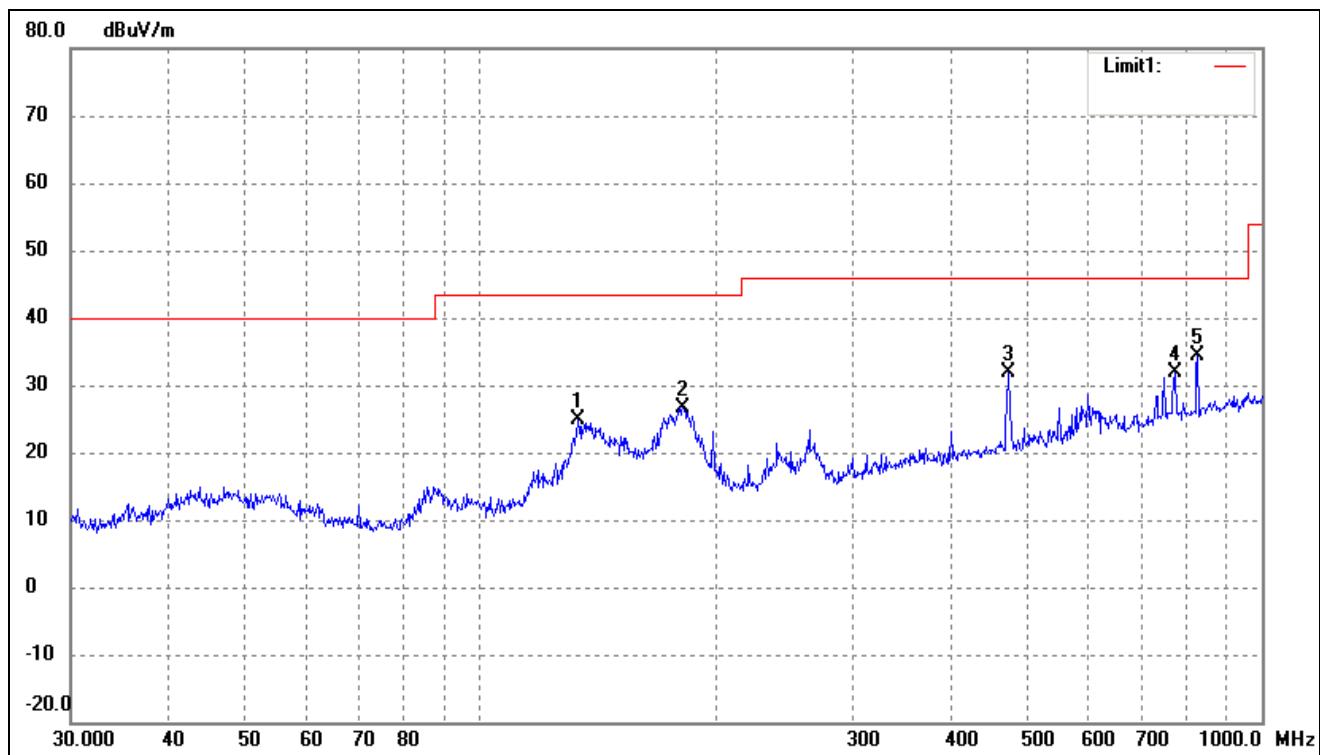

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	133.6188	35.58	-10.79	24.79	43.50	-18.71	108	150	QP
2	181.9202	35.85	-9.10	26.75	43.50	-16.75	130	100	QP
3	473.8347	33.03	-1.16	31.87	46.00	-14.13	229	150	QP
4	774.1584	27.79	4.09	31.88	46.00	-14.12	168	100	QP
5	827.4934	29.70	4.56	34.26	46.00	-11.74	178	150	QP

Test Specification: Vertical

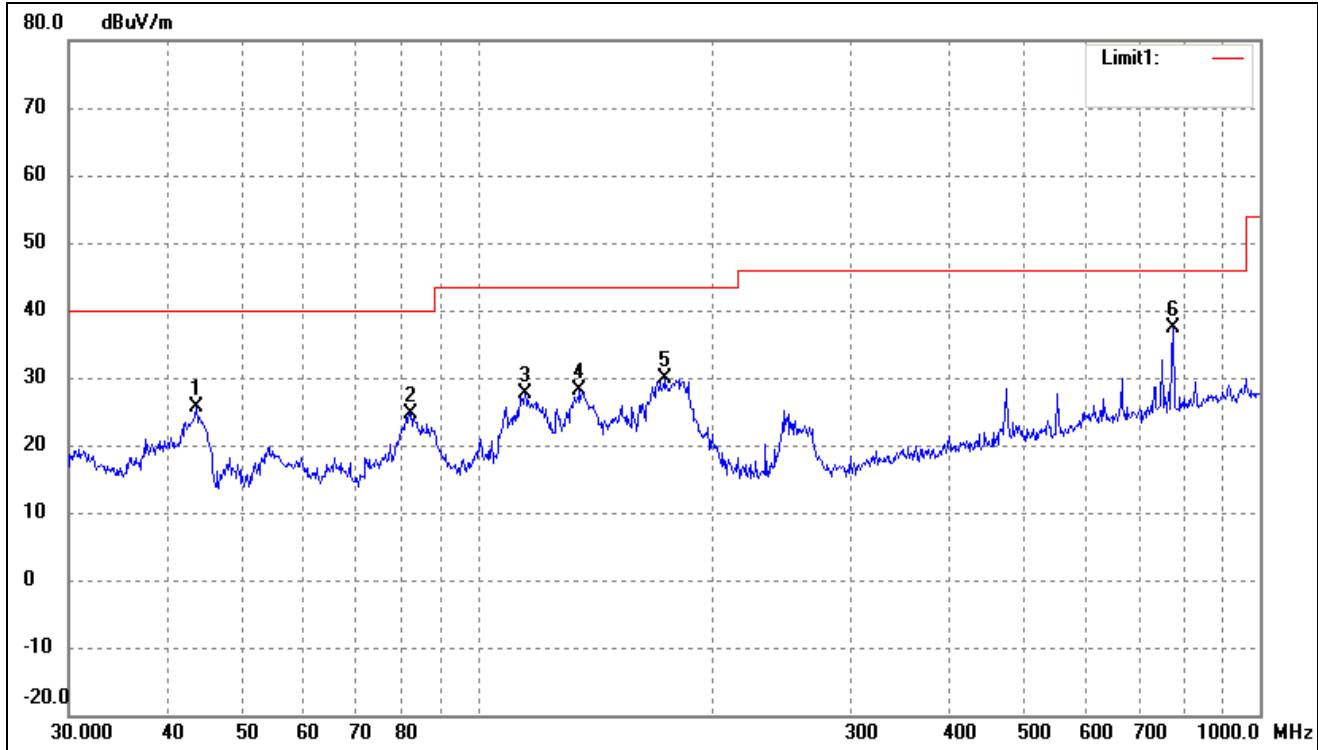

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	43.6585	34.86	-9.30	25.56	40.00	-14.44	251	100	QP
2	82.0706	36.82	-12.21	24.61	40.00	-15.39	308	100	QP
3	114.9169	38.13	-10.53	27.60	43.50	-15.90	120	100	QP
4	135.0319	39.05	-10.81	28.24	43.50	-15.26	359	100	QP
5	173.2051	39.80	-9.82	29.98	43.50	-13.52	168	100	QP
6	774.1584	33.34	4.09	37.43	46.00	-8.57	178	100	QP

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

\*\*\*\*\* END OF REPORT \*\*\*\*\*