

## FCC TEST REPORT

### No. 151101149SHA-001

Applicant : Yanzi Networks AB  
Isafjordgatan 32C, 16440 Kista Sweden

Manufacturer : Shanghai Pinyuan Info. Co., Ltd.  
1007 No.9, No.970 Dalian Road, Shanghai 200082,  
China

Product Name : Cyclops

Type/Model : MDW1-0201

**TEST RESULT : PASS**

#### SUMMARY


The equipment complies with the requirements according to the following standard(s) or specification:

**47CFR Part 15 (2014):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: Jan 28,2016

Prepared by:



Jesse Xu (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



## Description of Test Facility

Name: Intertek Testing Service Limited Shanghai  
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.  
China

FCC Registration Number: 236597  
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing  
Tel: 86 21 61278271  
Fax: 86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>1 GENERAL INFORMATION</b> .....	<b>4</b>
1.1 Description of Client.....	4
1.2 Identification of the EUT .....	4
1.3 Technical Specification.....	5
<b>2 TEST SPECIFICATIONS</b> .....	<b>6</b>
2.1 Standards or specification .....	6
2.2 Mode of operation during the test.....	6
2.3 Test software list .....	6
2.4 Test peripherals list .....	6
2.5 Instrument list .....	7
2.6 Test Summary .....	8
<b>3 RADIATED EMISSION</b> .....	<b>9</b>
3.1 Test limit .....	9
3.2 Test Configuration .....	9
3.3 Test procedure and test setup .....	10
3.4 Test protocol .....	11
<b>4 ASSIGNED BANDWIDTH (20DB BANDWIDTH)</b> .....	<b>14</b>
4.1 Limit.....	14
4.2 Test Configuration .....	14
4.3 Test procedure and test setup.....	14
4.4 Test protocol .....	15

## 1 GENERAL INFORMATION

### 1.1 Description of Client

Applicant : Yanzi Networks AB  
Isafjordgatan 32C, 16440 Kista Sweden

Name of contact : Stefan Sandhagen

Tel : +46 8 559 21 440

Fax : -

Email : stefan@yanzi.se

Manufacturer : Shanghai Pinyuan Info. Co., Ltd.

1007 No.9, No.970 Dalian Road, Shanghai 200082,  
China

### 1.2 Identification of the EUT

Product Name : Cyclops

Type/model : MDW1-0201

FCC ID : 2AE7LMDW1-0201

### 1.3 Technical Specification

Operation Frequency : 2400-2483.5MHz  
Band

Type of Modulation : O-QPSK

EUT Modes of Modulation : IEEE 802.15.4

Description of EUT : Here is one model.  
We tested the 2405CH , 2440CH and 2480CH and listed the worst data in this report.

Antenna Designation : Omnidirectional internal antenna, 0.5dBi peak gain

Rating : Battery 3V

Category of EUT : Class B

EUT type :  Table top  
 Floor standing

Software applied : Used ubuntu linux system and run the gateway test procedure. Set the radio output gain:0

Sample received date : Nov 11, 2015

Date of test : Nov 18, 2015 ~Jan 06, 2016

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2014)  
ANSI C63.10 (2013)

### 2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded. Compare with the test results that Z axis is the worst case.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz
2	IoT Dongle	Yanzi	USB 5Vdc

## 2.5 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2015-10-21	2016-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2015-10-20	2016-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2016-1-9	2017-1-8
A.M.N.	ENV 216	R&S	EC 3393	2015-8-9	2016-8-8
A.M.N.	ENV 216	R&S	EC 3394	2015-8-9	2016-8-8
A.M.N.	ENV4200	R&S	EC3558	2015-8-9	2016-8-8
Ultra-broadband antenna	HL 562	R&S	EC 3046-1	2015-5-16	2016-5-14
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2015-4-28	2017-4-27
Horn antenna	HF 906	R&S	EC 3049	2015-4-28	2017-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2015-4-12	2016-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2015-5-12	2016-5-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2015-1-8	2016-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2015-04-12	2016-04-11

## 2.6 Test Summary

**This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	Pass

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



### 3 Radiated emission

**Test result:** Pass


#### 3.1 Test limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall outside allocated band (2400-2483.5MHz), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

#### 3.2 Test Configuration

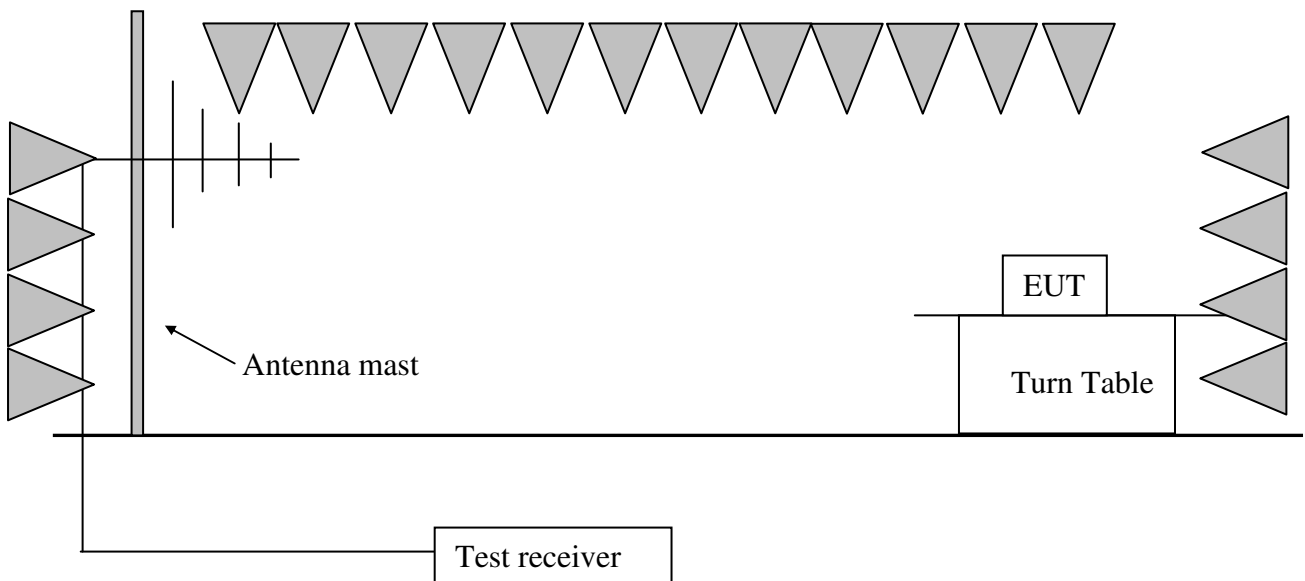

### 3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:


RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);  
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);  
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)  
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);  
RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

### 3.4 Test protocol


Temperature : 23 °C  
Relative Humidity : 56 %

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

30MHz~1GHz, Horizontal

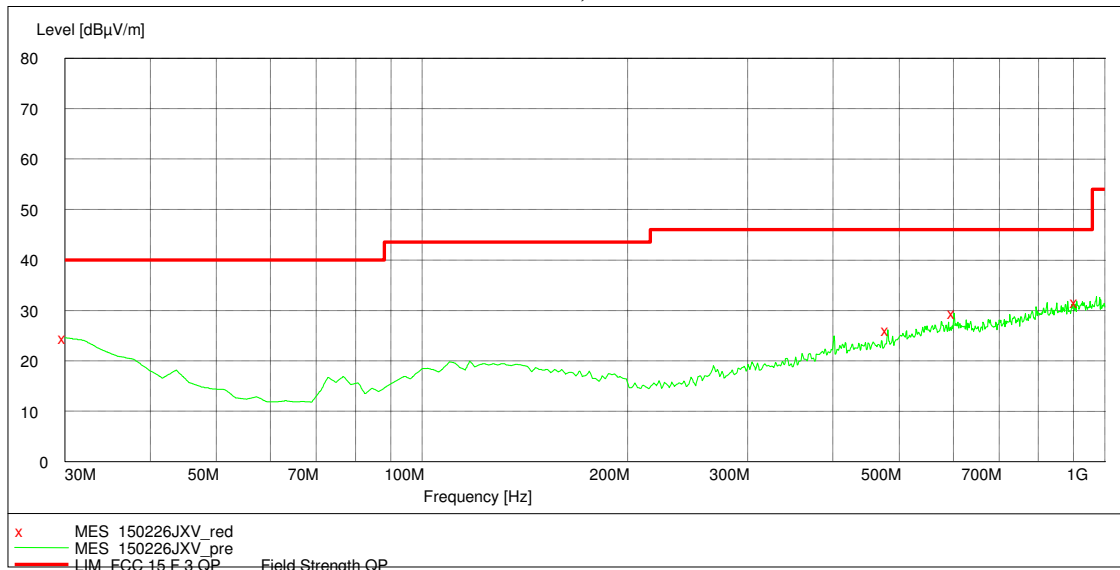

30MHz~1GHz, Vertical

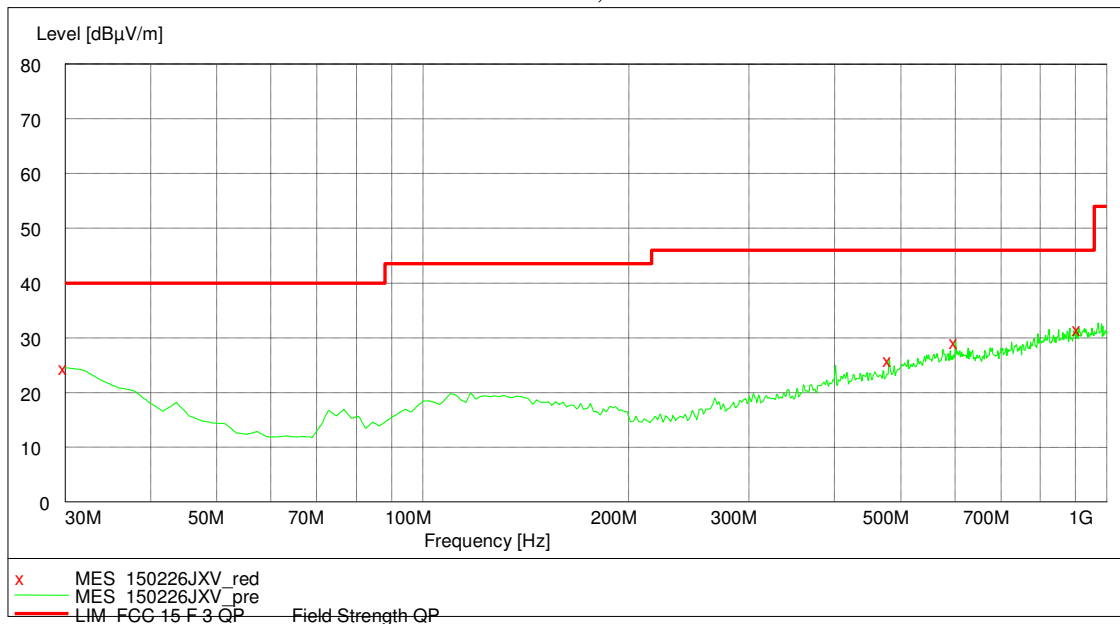

**Test data at 30MHz~1GHz:**

Polarization	Frequency (MHz)	Measured level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
H	30.0	25.0	40.0	15.0	PK
	133.0	25.7	43.5	17.8	PK
	401.3	30.6	46.0	15.4	PK
	669.5	30.0	46.0	16.0	PK
	893.1	35.4	46.0	10.6	PK
V	30.0	25.3	40.0	14.7	PK
	43.6	20.8	40.0	19.2	PK
	133.0	26.3	43.5	17.2	PK
	222.4	29.2	46.0	16.8	PK
	311.9	26.7	46.0	19.3	PK
	490.7	32.3	46.0	13.7	PK
	580.1	35.9	46.0	10.1	PK
	937.8	34.0	46.0	12.0	PK

Note: The worst test result (30MHz to 1GHz) of channel L (2402MHz) chosen to list in the report as representative.

**Test result above 1GHz:**

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.20	30.70	92.00	94.00	2.00	PK
	H	2389.00	30.30	36.50	54.00	17.50	PK
	H	2400.00	30.30	58.45	74.00	15.55	PK
	H	2400.00	30.30	52.22	54.00	1.78	AV
	H	4804.00	-1.50	44.30	54.00	9.70	PK
	V	2405.20	30.70	82.30	94.00	11.70	PK
	V	4804.00	-1.50	40.02	54.00	13.98	PK
M	H	2440.00	30.70	89.50	94.00	4.50	PK
	H	4880.00	-1.10	43.37	54.00	10.63	PK
	V	2440.00	30.70	86.00	94.00	8.00	PK
	V	4880.00	-1.10	41.05	54.00	12.95	PK
H	H	2480.00	30.70	91.45	94.00	2.55	PK
	H	2483.50	30.80	42.20	54.00	11.80	PK
	H	4960.00	-0.80	40.60	54.00	15.40	PK
	V	2480.00	30.70	87.45	94.00	6.55	PK
	V	2485.05	29.45	38.19	54.00	15.81	PK
	V	4960.00	-0.80	40.38	54.00	13.62	PK

**Remark:**

1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed);
2. Corrected Reading = Original Receiver Reading + Correct Factor;
3. Margin = Limit – Corrected Reading;
4. If the PK Corrected reading is lower than AV limit, the AV test can be elided;

**Example:**

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplicifier = 32.00dB, Original Receiver Reading = 10dBuV,  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m,  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m,  
 Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m,  
 Then Margin = 54 - 10.20 = 43.80dBuV/m.


## 4 Assigned bandwidth (20dB bandwidth)

Test result: Pass

### 4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

### 4.2 Test Configuration

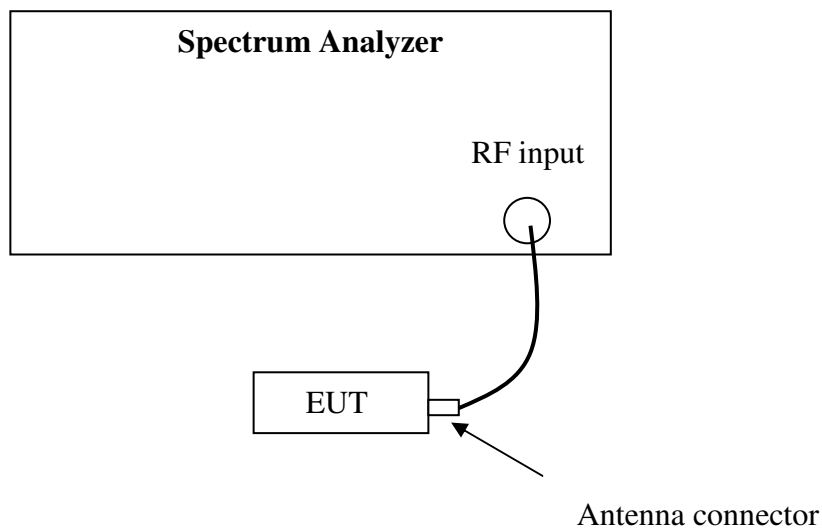

### 4.3 Test procedure and test setup

The 20dB Bandwidth per FCC § 15.215(c) is measured using the Spectrum Analyzer. Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW > RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel).

#### 4.4 Test protocol

Temperature : 24 °C  
 Relative Humidity : 56 %

20dB bandwidth (MHz)	permitted band (MHz)	Result
2403.64 ~ 2481.19	2400 ~ 2483.5	Pass

