



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR202008EC25AFXD
Product LTE Module
Brand Quectel
Model EC25-AFXD; EC25-AFXD MINIPCIE
Report No. R2203A0238-R1
Issue Date April 11, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2021)/ FCC CFR 47 Part 22H (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test.....	5
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	10
5.1. RF Power Output.....	10
5.2. Effective Radiated Power	14
5.3. Occupied Bandwidth	17
5.4. Band Edge Compliance.....	24
5.5. Peak-to-Average Power Ratio (PAPR)	31
5.6. Frequency Stability	33
5.7. Spurious Emissions at Antenna Terminals	37
5.8. Radiates Spurious Emission	43
6. Main Test Instruments	46
ANNEX A: The EUT Appearance	47
ANNEX B: Test Setup Photos	48
ANNEX C: Product Change Description 1	49
ANNEX D: Product Change Description 2	50

Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: (Original) June 29, 2018~ July 16, 2018 and July 30, 2018~ July 31, 2018 and August 3, 2019~ August 13, 2019 (Variant) March 19, 2022 ~ March 29, 2022 Date of Sample Received: (Variant) March 18, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

EC25-AFXD; EC25-AFXD MINIPCIE (Report No.: R2203A0238-R1) is a variant model of EC25-AFXD; EC25-AFXD MINIPCIE (Report No.: R2007A0434-R1). Test values duplicated from Original for variant. This report adds information and tests related to HSPA+. The detailed product change description please refers to the ANNEX D.

EC25-AFXD; EC25-AFXD MINIPCIE (Report No.: R2007A0434-R1) is a variant model of EC25-AFX; EC25-AFX MINIPCIE (Report No.: R1907A0408-R1V1). Only Radiated Spurious Emissions of the worst band are verified for EC25-AFXD; EC25-AFXD MINIPCIE . The data did not get worse so it was not recorded in this report. The detailed product change description please refers to the ANNEX C.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

General Information

EUT Description			
Model	EC25-AFXD; EC25-AFXD MINIPCIE		
IMEI	863010031218428		
Hardware Version	R1.0		
Software Version	EC25AFXDGAR07A01M1G		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	4dBi		
Test Mode(s)	WCDMA Band V; LTE Band 5;		
Test Modulation	(WCDMA)QPSK 16QAM; (LTE)QPSK 16QAM;		
HSDPA UE Category	24		
HSUPA UE Category	6		
LTE Category	4		
Maximum E.R.P.	WCDMA Band V:	23.22dBm	
	LTE Band 5:	22.71dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



Accessory equipment	
Evaluation Board	RF Cable
RS232-to-USB Cable	Antenna: Dipole Antenna
Headset	DC 5V Adaptor

EC25-AFX and EC25-AFX MINIPCIE are all LTE modules. They support the same frequency bands, use the same chipset and share the same software & hardware design. The main difference is on the carrier board.

EC25-AFX MINIPCIE makes up of EC25-AFX module and PCIe transferred board.

The transferred board switches EC25-AFX module to follow PCI Express Mini Card 1.2 standard connector protocol. No any other internal changes in EC25-AFX module.

Two models are identical in interior structure and components, and just connector interface is different for the marketing requirement.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2021)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2021)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	WCDMA Band V
RF power output	RMC HSDPA/HSUPA DC-HSDPA/HSPA+
Effective Radiated Power	RMC
Occupied Bandwidth	RMC
Band Edge Compliance	RMC
Peak-to-Average Power Ratio	RMC
Frequency Stability	RMC
Spurious Emissions at Antenna Terminals	RMC
Radiates Spurious Emission	RMC



Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	○	○	○	○	○	○	○	○	○	○	○	○
Effective Isotropic Radiated power	○	○	○	○	○	○	○	○	○	○	○	○
Occupied Bandwidth	○	○	○	○	○	○	-	-	○	○	○	○
Band Edge Compliance	○	○	○	○	○	○	○	-	○	○	-	○
Peak-to-Average Power Ratio	○	○	○	○	○	○	-	-	○	○	○	○
Frequency Stability	○	○	○	○	○	○	-	-	○	○	-	○
Spurious Emissions at Antenna Terminals	○	○	○	○	○	-	○	○	○	○	○	○
Radiates Spurious Emission	○	-	○	○	○	-	○	-	-	○	○	○
Note	1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

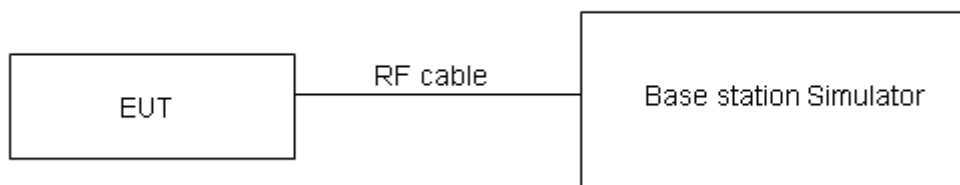

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

EC25-AFX

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC		23.01	23.00	22.99
HSDPA	Sub - Test 1	22.14	22.18	22.16
	Sub - Test 2	22.20	22.21	22.15
	Sub - Test 3	21.64	21.60	21.66
	Sub - Test 4	21.61	21.59	21.65
HSUPA	Sub - Test 1	21.39	21.38	21.37
	Sub - Test 2	19.38	19.37	19.36
	Sub - Test 3	20.36	20.36	20.35
	Sub - Test 4	19.35	19.35	19.34
	Sub - Test 5	22.12	22.14	22.13
DC-HSDPA	Sub - Test 1	22.35	22.36	22.33
	Sub - Test 2	22.34	22.35	22.32
	Sub - Test 3	21.92	21.84	21.83
	Sub - Test 4	21.91	21.83	21.82
HSPA+	16QAM	21.17	21.01	21.16



LTE Band 5 Conducted Power(dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	22.98	23.11	23.15	1	0	23.05	23.13	23.24
	1	2	23.07	23.44	23.25	1	7	22.94	23.46	23.15
	1	5	23.09	23.19	23.17	1	14	23.18	23.13	23.15
	3	0	23	23.31	23.15	8	0	22.08	22.17	22.13
	3	1	23.01	23.26	22.94	8	3	21.98	22.15	22.04
	3	3	23.14	23.05	23.22	8	7	22.06	22.06	22.06
	6	0	22.11	22.13	22.14	15	0	22.06	22.14	22.08
16QAM	1	0	22	21.77	21.82	1	0	21.84	21.65	21.78
	1	2	21.69	21.74	21.69	1	7	21.79	21.91	21.87
	1	5	21.88	21.72	21.65	1	14	21.91	21.73	21.68
	3	0	22.07	22.31	22.06	8	0	20.95	21.28	21.15
	3	1	22	22.08	21.92	8	3	20.93	21.07	20.87
	3	3	22.2	22.22	21.86	8	7	21.17	21.27	20.88
	6	0	20.91	23.03	20.86	15	0	20.98	23.06	20.98
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	22.95	23.01	23.32	1	0	23.13	23.16	23.32
	1	12	23.01	23.52	23.25	1	24	23.09	23.61	23.35
	1	24	23.16	23.18	23.23	1	49	23.2	23.23	23.28
	12	0	22.14	22.26	22.06	25	0	22.17	22.31	22.23
	12	6	21.91	22.29	21.98	25	12	22.07	22.33	22.14
	12	13	22.12	22.14	22.08	25	25	22.18	22.22	22.22
	25	0	21.96	22.15	22.19	50	0	22.16	22.27	22.21
16QAM	1	0	21.94	21.71	21.75	1	0	22.01	21.85	21.94
	1	12	21.8	21.77	21.86	1	24	21.85	21.94	21.88
	1	24	21.89	21.76	21.76	1	49	21.92	21.82	21.83
	12	0	21.03	21.29	21.12	25	0	21.13	21.37	21.21
	12	6	21.03	21.01	20.98	25	12	21.08	21.2	21.07
	12	13	21.23	21.17	20.93	25	25	21.27	21.28	21.01
	25	0	20.81	23.07	20.99	50	0	21	23.14	21.02

**EC25-AFX MINIPCIE**

LTE Band 5				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20450/829	20525/836.5	20600/844
10MHz	QPSK	1	0	23.96	23.89	23.92
		1	25	23.95	23.98	24.19
		1	49	23.90	23.90	23.51
		25	0	22.98	23.02	22.98
		25	13	22.97	22.92	23.10
		25	25	23.05	23.00	23.03
		50	0	23.03	22.93	22.99

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


$$EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.

$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

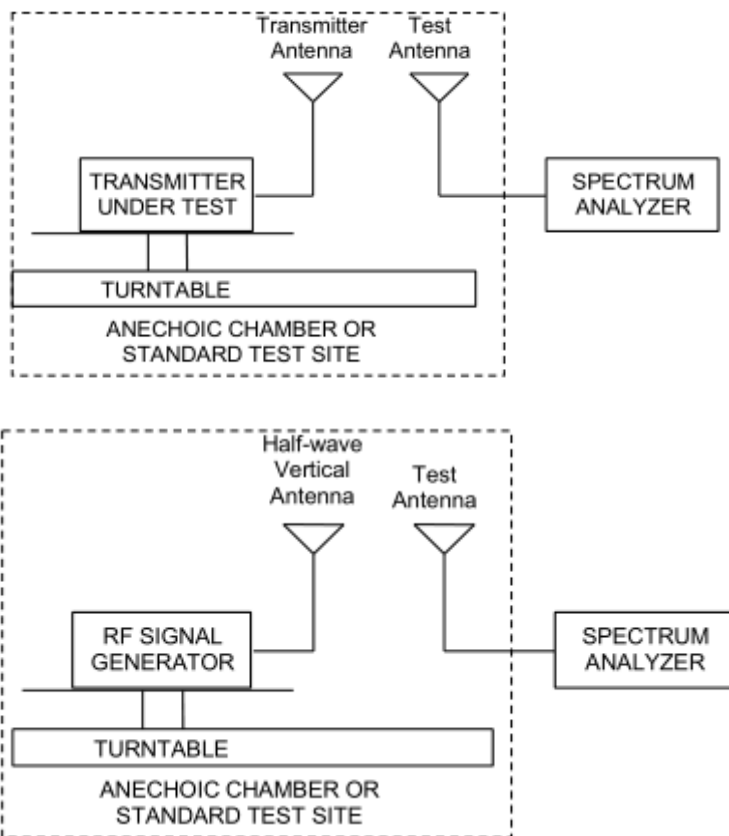

Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
WCDMA Band V	Low	826.4	Horizontal	23.16	38.45	Pass
	Mid	836.6	Horizontal	23.18	38.45	Pass
	High	846.6	Horizontal	23.22	38.45	Pass

LTE Band 5						
bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	22.31	38.45	Pass
	Mid	836.5	Horizontal	22.20	38.45	Pass
	High	848.3	Horizontal	22.52	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	22.33	38.45	Pass
	Mid	836.5	Horizontal	22.36	38.45	Pass
	High	847.5	Horizontal	22.58	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	22.24	38.45	Pass
	Mid	836.5	Horizontal	22.33	38.45	Pass
	High	846.5	Horizontal	22.70	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	22.23	38.45	Pass
	Mid	836.5	Horizontal	22.32	38.45	Pass
	High	844	Horizontal	22.71	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	21.88	38.45	Pass
	Mid	836.5	Horizontal	21.74	38.45	Pass
	High	848.3	Horizontal	21.97	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	21.80	38.45	Pass
	Mid	836.5	Horizontal	21.91	38.45	Pass
	High	847.5	Horizontal	21.98	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	21.69	38.45	Pass
	Mid	836.5	Horizontal	21.76	38.45	Pass
	High	846.5	Horizontal	22.16	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	21.72	38.45	Pass
	Mid	836.5	Horizontal	21.77	38.45	Pass
	High	844	Horizontal	22.10	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,


RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 5 (1.4MHz),

RBW is set to 100kHz, VBW is set to 300kHz for LTE Band 5 (3MHz/5MHz),

RBW is set to 300kHz, VBW is set to 1MHz for LTE Band 5 (10MHz),

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

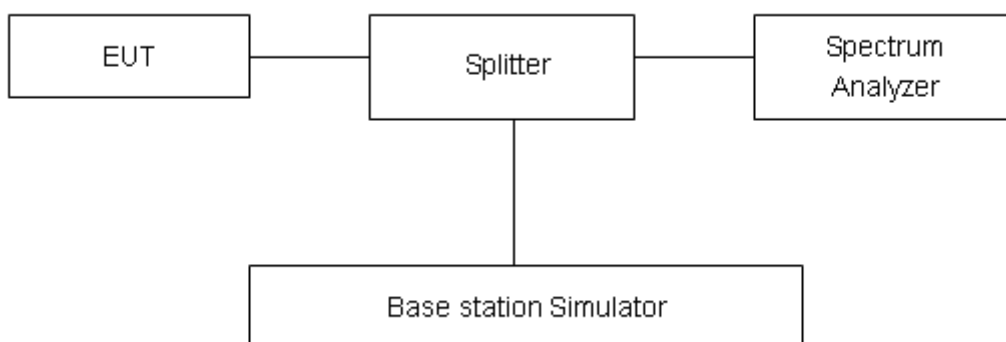

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty




The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.










Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
WCDMA Band V (RMC)	4132	826.4	4.1507	4.730
	4183	836.6	4.1473	4.722
	4233	846.6	4.1216	4.712

LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.1005	1.298
			20525	836.5	1.1002	1.293
			20643	848.3	1.1003	1.295
		3	20415	825.5	2.7072	3.018
			20525	836.5	2.7084	3.010
			20635	847.5	2.7089	3.012
		5	20425	826.5	4.5176	5.017
			20525	836.5	4.5101	5.023
			20625	846.5	4.5116	5.013
		10	20450	829	8.9812	8.910
			20525	836.5	8.9635	9.905
			20600	844	8.9888	9.951
	16QAM	1.4	20407	824.7	1.0966	1.304
			20525	836.5	1.0969	1.304
			20643	848.3	1.0966	1.297
		3	20415	825.5	2.6967	2.984
			20525	836.5	2.969	2.982
			20635	847.5	2.7061	3.002
		5	20425	826.5	4.4922	4.965
			20525	836.5	4.4909	4.953
			20625	846.5	4.4929	4.971
		10	20450	829	8.9799	9.909
			20525	836.5	8.9569	9.895
			20600	844	8.9516	9.874

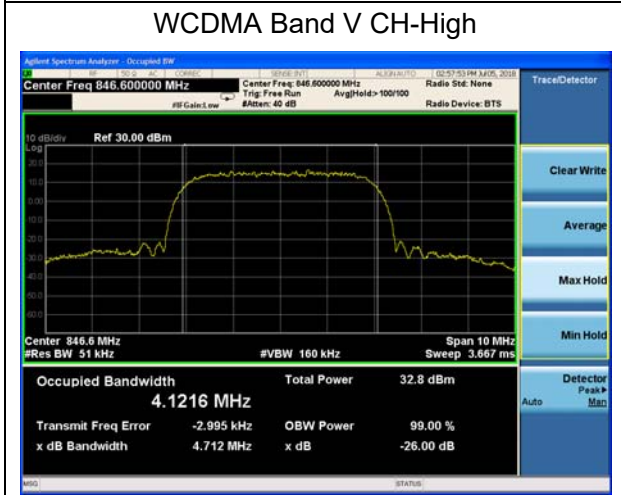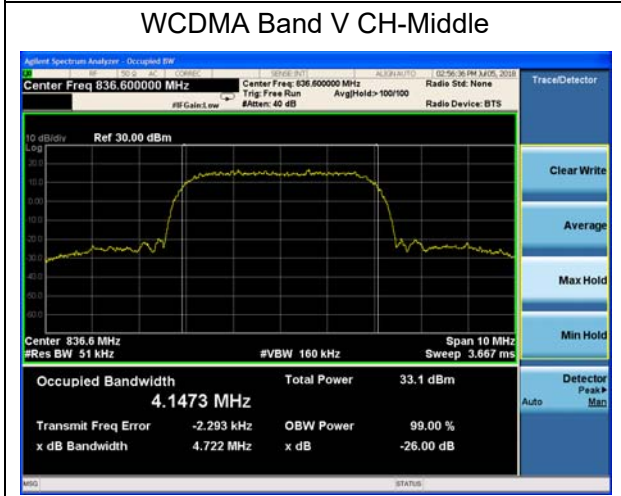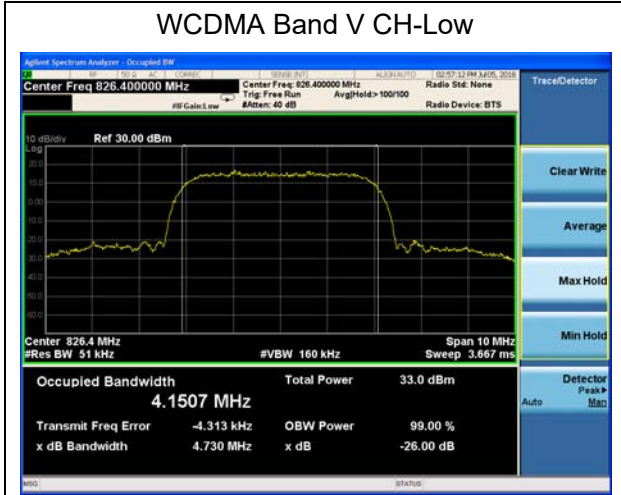

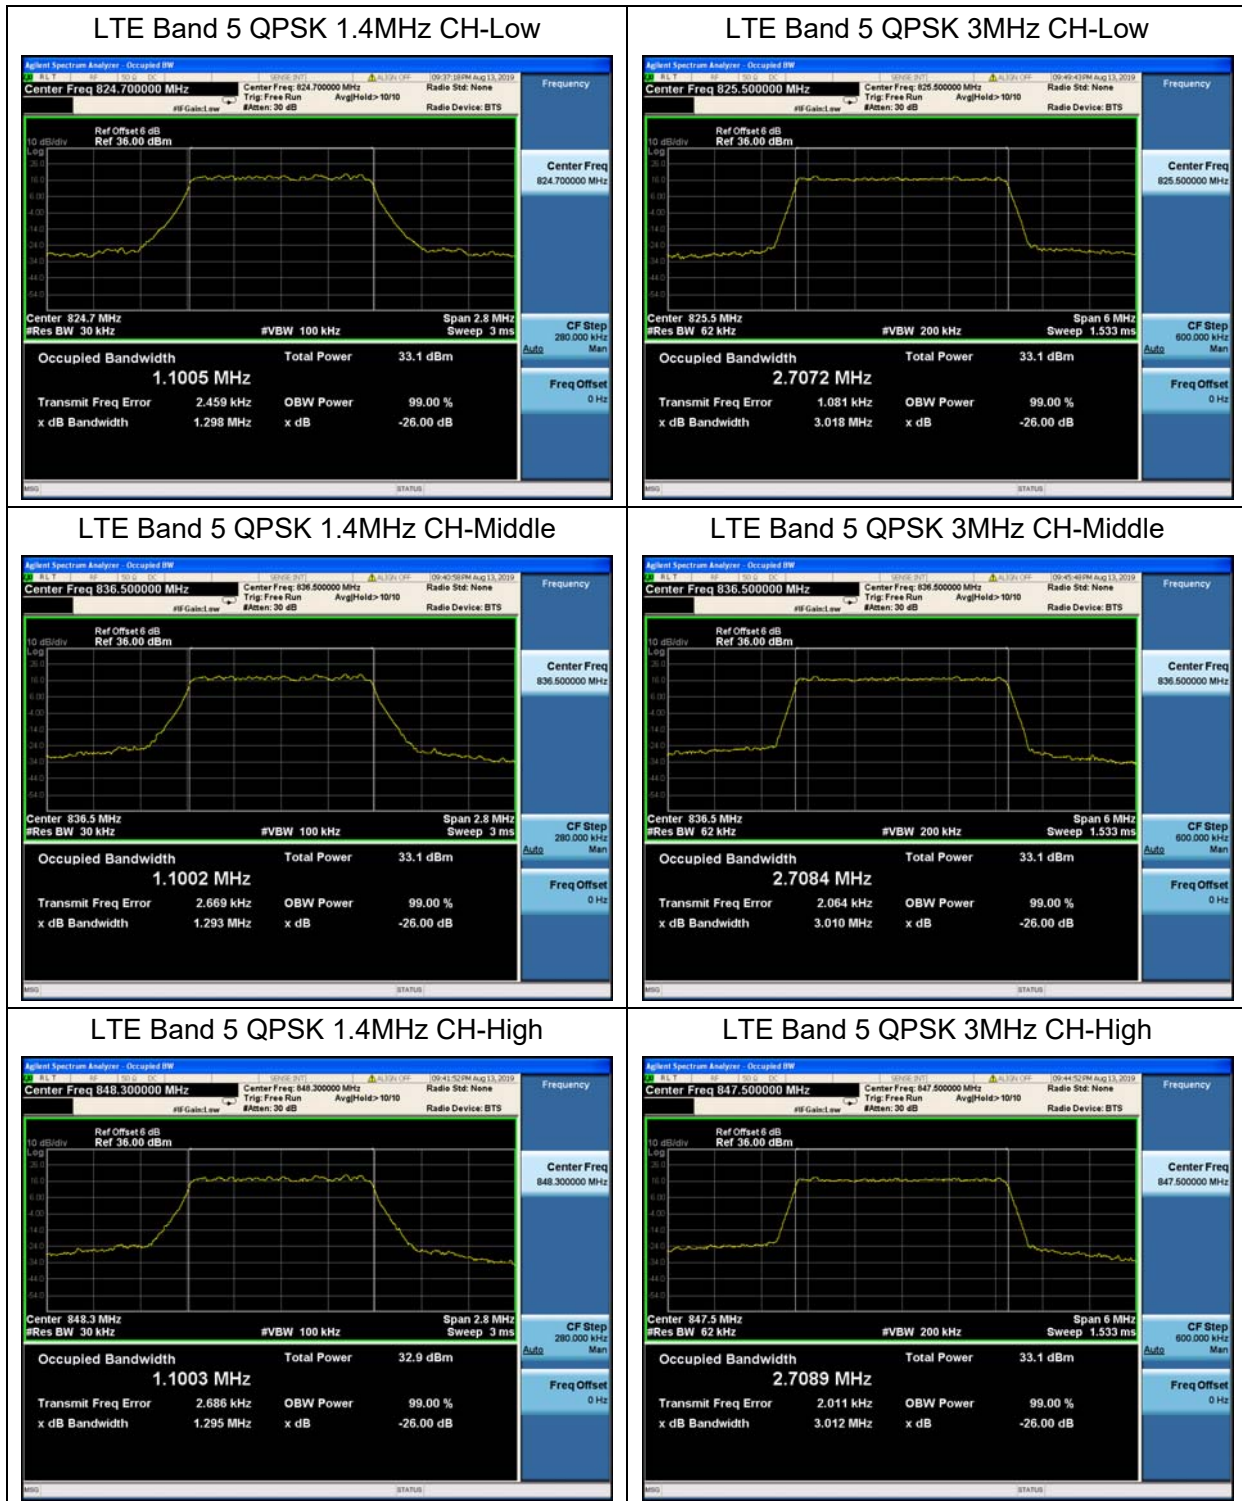

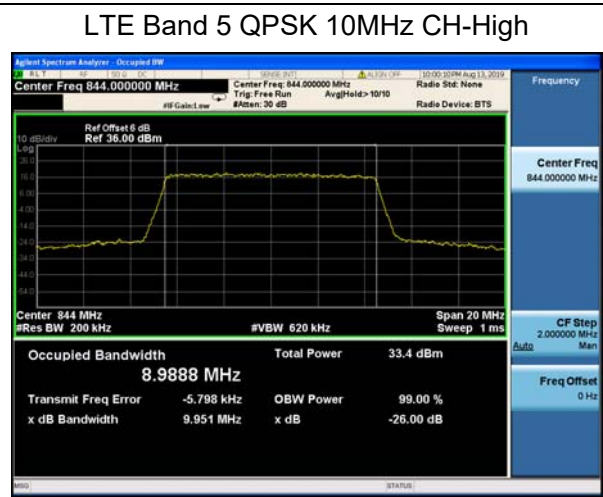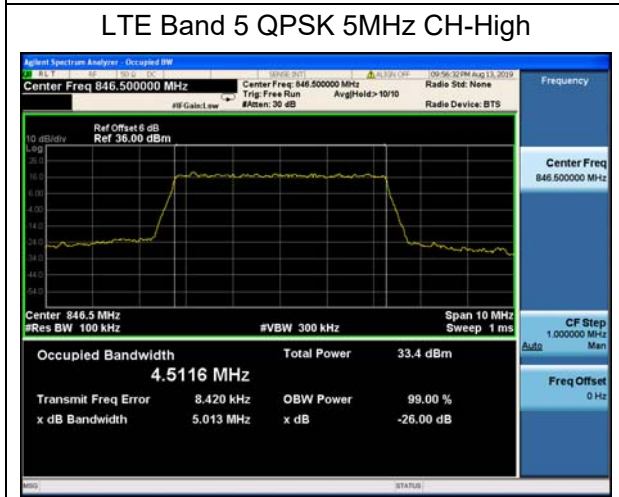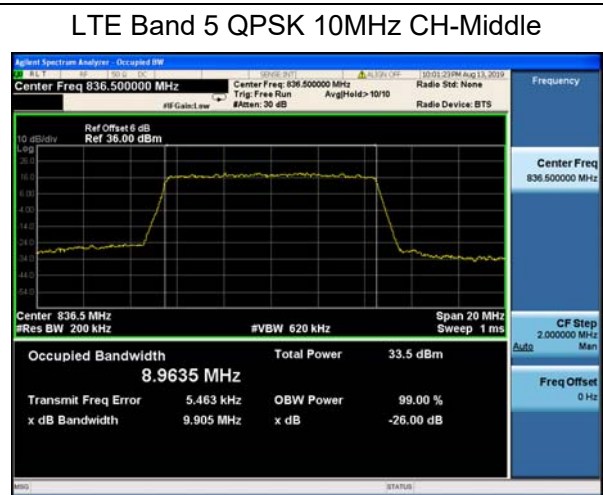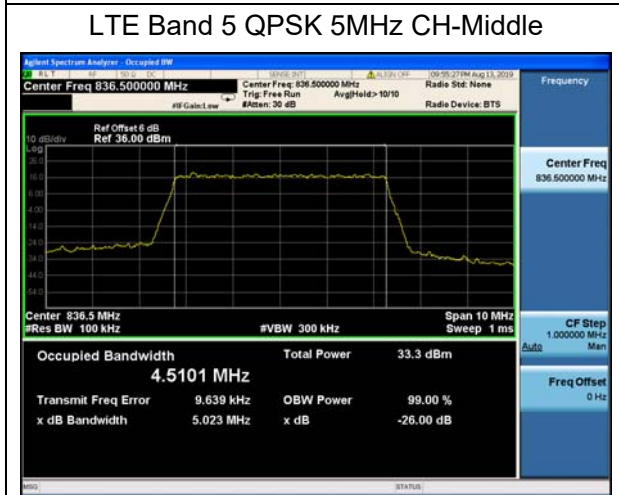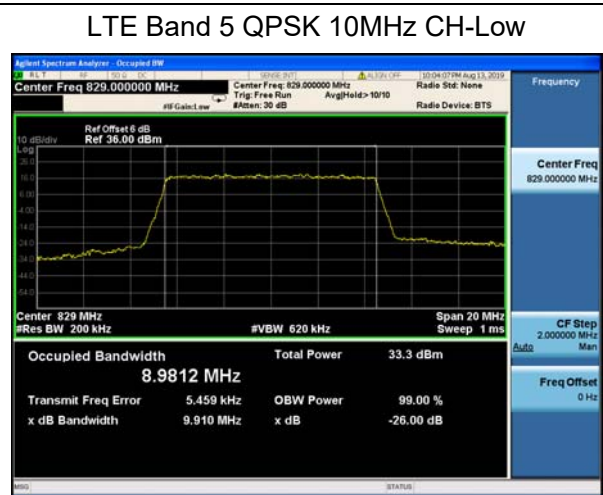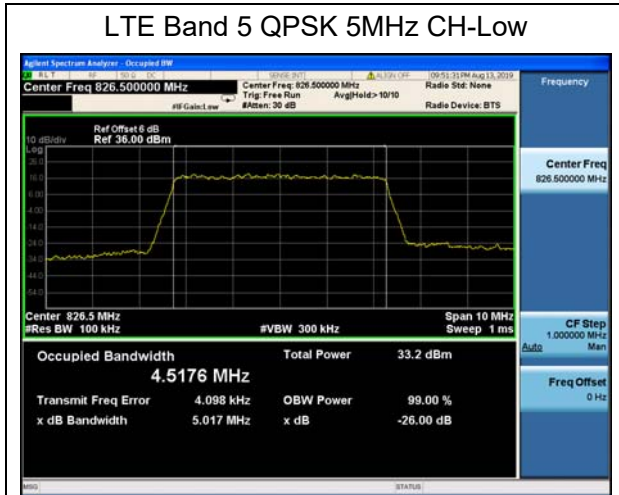



LTE Band 5 16QAM 1.4MHz CH-Low




LTE Band 5 16QAM 3MHz CH-Low



LTE Band 5 16QAM 1.4MHz CH-Middle



LTE Band 5 16QAM 3MHz CH-Middle






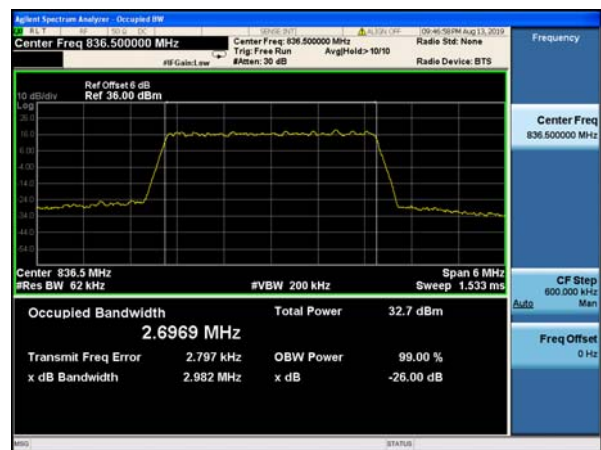


LTE Band 5 16QAM 1.4MHz CH-High



LTE Band 5 16QAM 3MHz CH-High



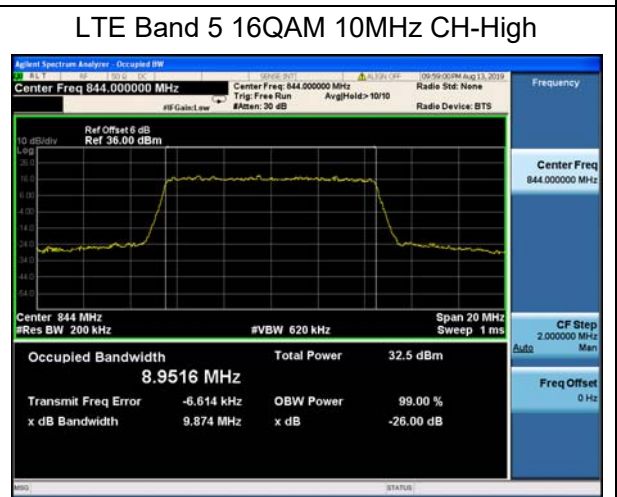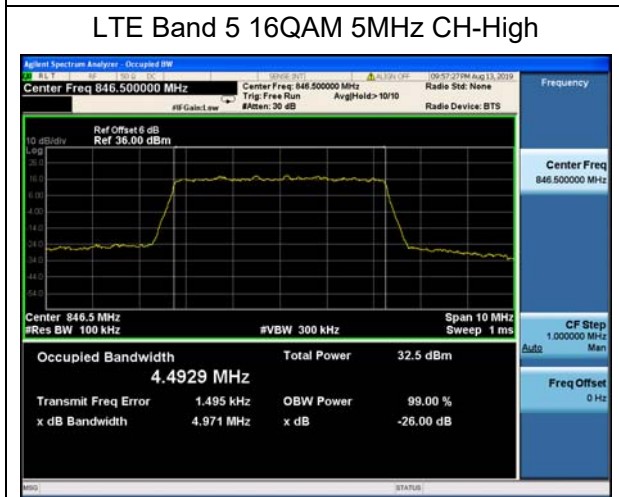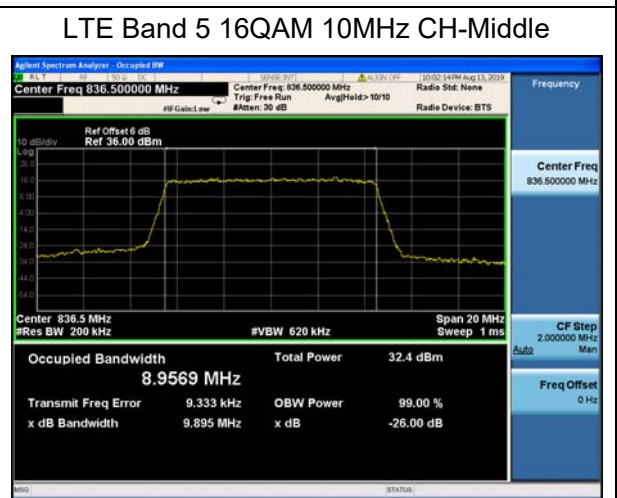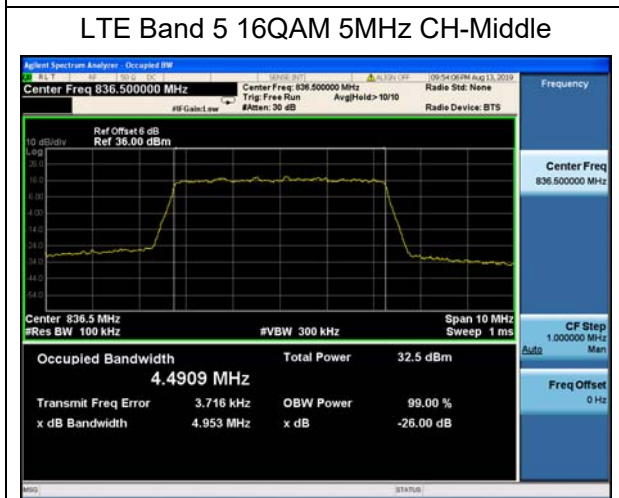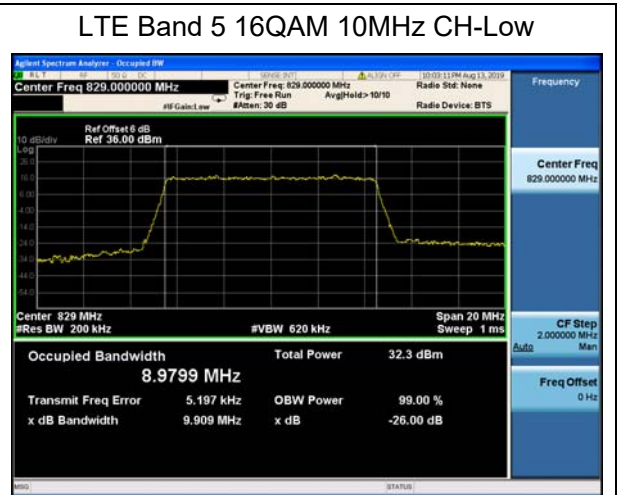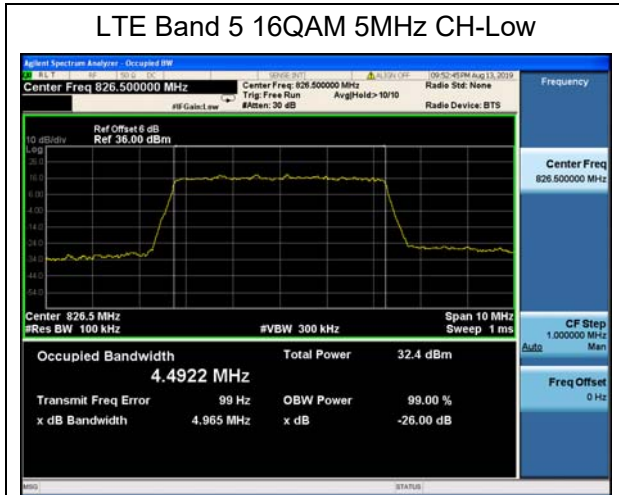

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V, RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 5 (1.4MHz), RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 5 (3MHz), RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (5MHz), RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (10MHz), Spectrum analyzer plots are included on the following pages.

Test Setup

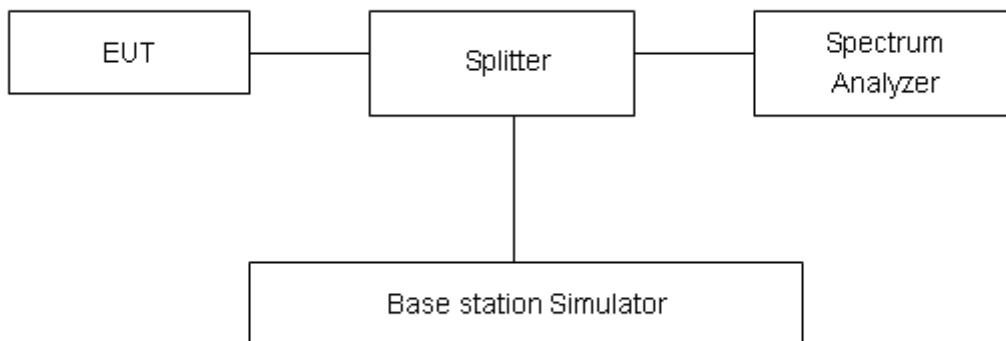

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:


WCDMA Band V CH-Low




WCDMA Band V CH-High



LTE Band 5 QPSK 1.4MHz CH-Low 1RB

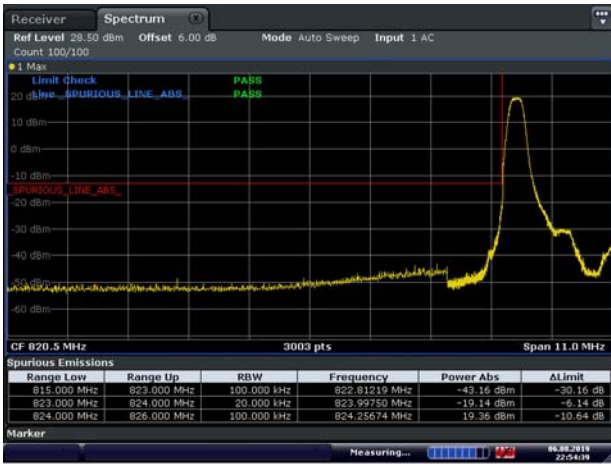

LTE Band 5 QPSK 1.4MHz CH-High 1RB

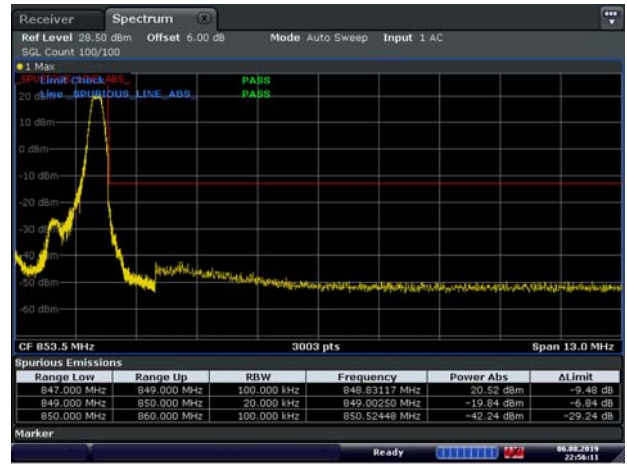

LTE Band 5 QPSK 1.4MHz CH-Low 100%RB




LTE Band 5 QPSK 1.4MHz CH-High 100%RB






LTE Band 5 QPSK 3MHz CH-Low 1RB

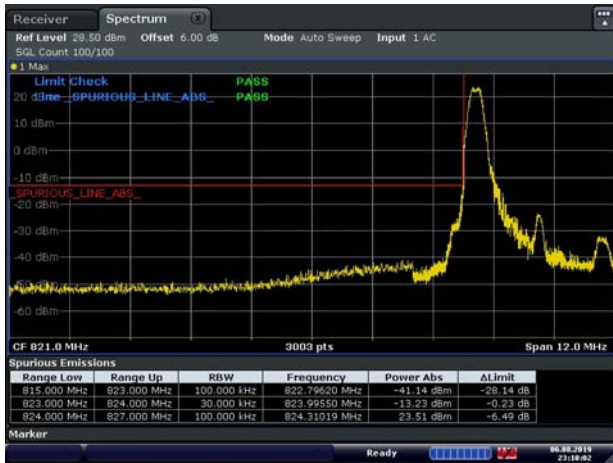


Date: 6.AUG.2019 23:10:03

LTE Band 5 QPSK 3MHz CH-High 1RB

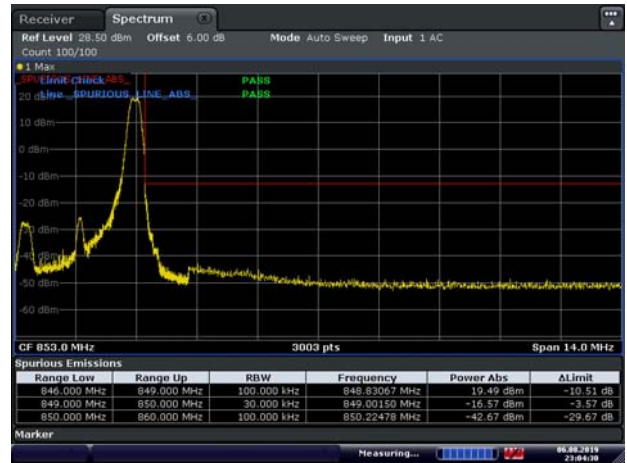

Date: 6.AUG.2019 23:04:31

LTE Band 5 QPSK 3MHz CH-Low 100%RB

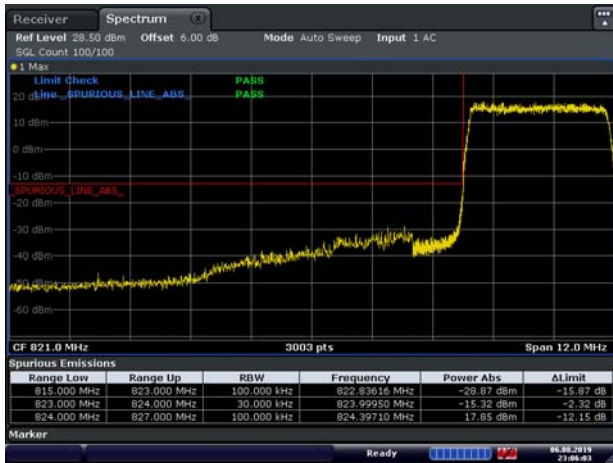


Date: 6.AUG.2019 23:06:03

LTE Band 5 QPSK 3MHz CH-High 100%RB




Date: 6.AUG.2019 22:59:50

LTE Band 5 QPSK 5MHz CH-Low 1RB

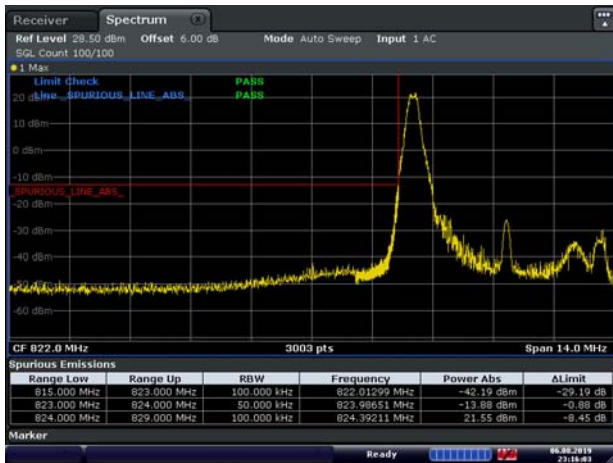


Date: 6.AUG.2019 23:16:02

LTE Band 5 QPSK 5MHz CH-High 1RB

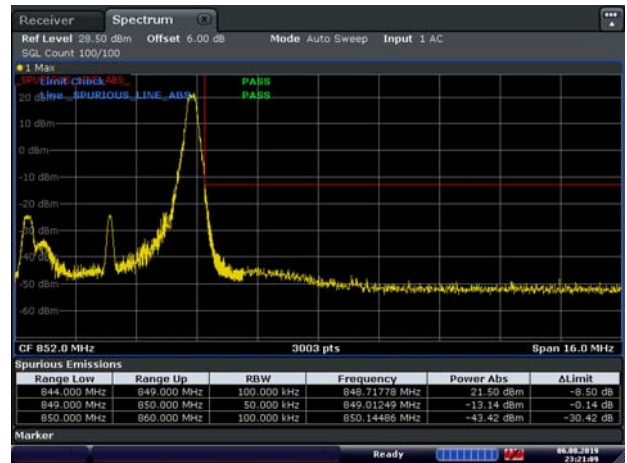

Date: 6.AUG.2019 23:21:09

LTE Band 5 QPSK 5MHz CH-Low 100%RB

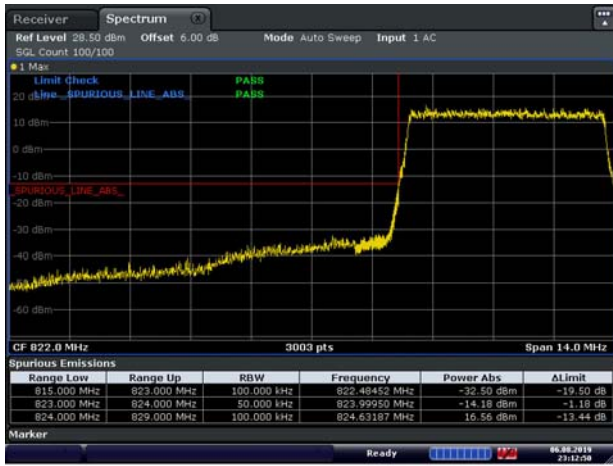


Date: 6.AUG.2019 23:12:51

LTE Band 5 QPSK 5MHz CH-High 100%RB




Date: 6.AUG.2019 23:17:26

LTE Band 5 QPSK 10MHz CH-Low 1RB

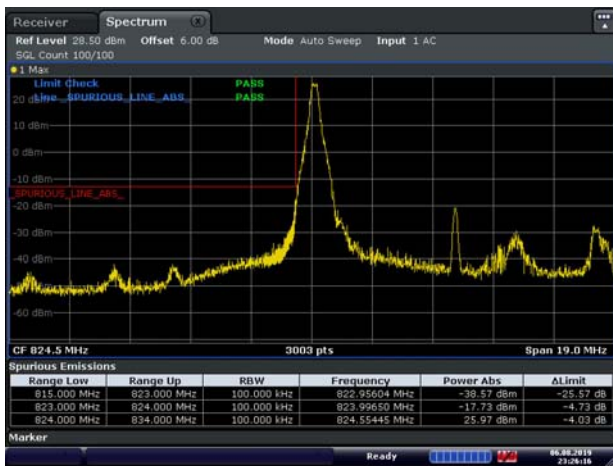


Date: 6.AUG.2019 23:26:16

LTE Band 5 QPSK 10MHz CH-High 1RB

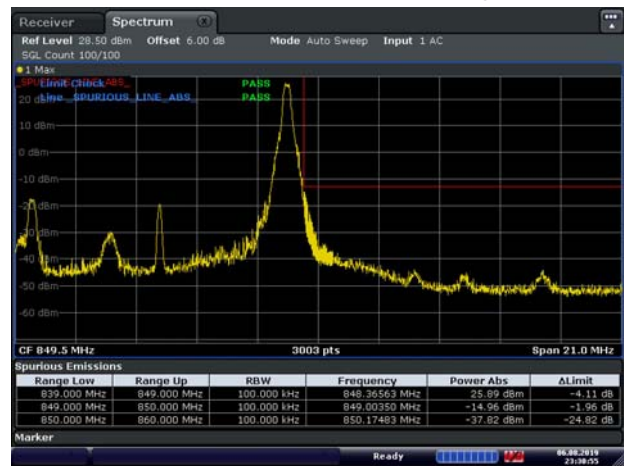

Date: 6.AUG.2019 23:30:36

LTE Band 5 QPSK 10MHz CH-Low 100%RB

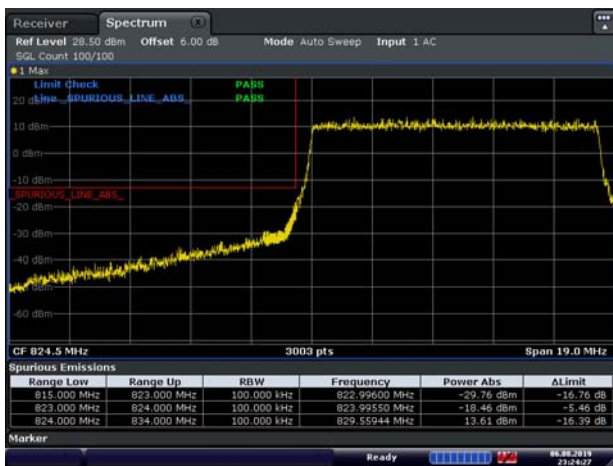

Date: 6.AUG.2019 23:24:28


LTE Band 5 QPSK 10MHz CH-High 100%RB



Date: 6.AUG.2019 23:28:58




LTE Band 5 16QAM 1.4MHz CH-Low 1RB

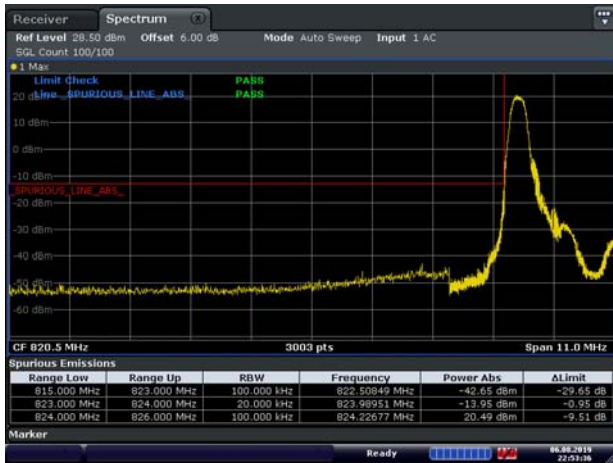

Date: 6.AUG.2019 22:53:36

LTE Band 5 16QAM 1.4MHz CH-High 1RB

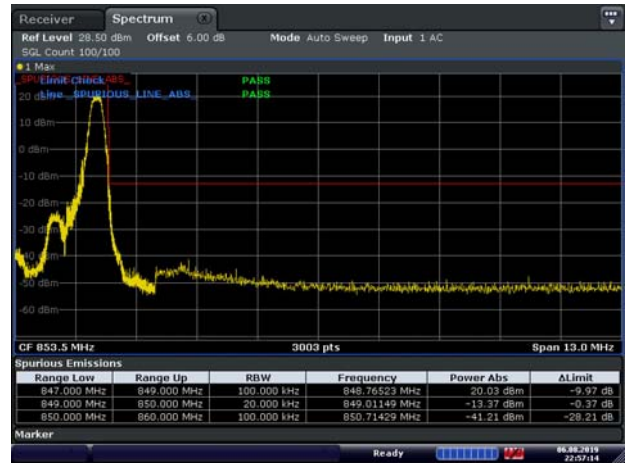

Date: 6.AUG.2019 22:57:15

LTE Band 5 16QAM 1.4MHz CH-Low 100%RB




Date: 6.AUG.2019 22:51:41

LTE Band 5 16QAM 1.4MHz CH-High 100%RB




Date: 6.AUG.2019 22:57:52

LTE Band 5 16QAM 3MHz CH-Low 1RB

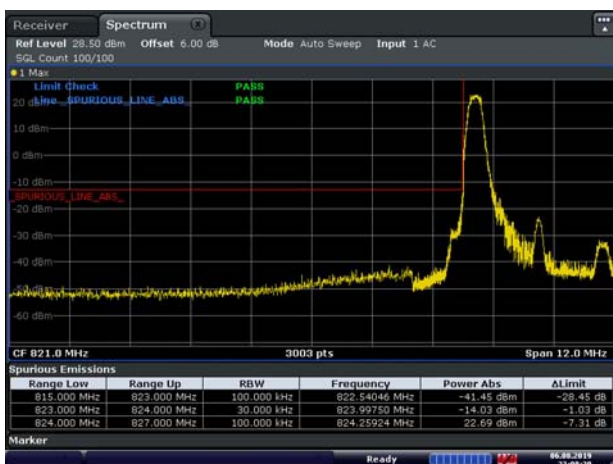

Date: 6.AUG.2019 23:08:29


LTE Band 5 16QAM 3MHz CH-High 1RB

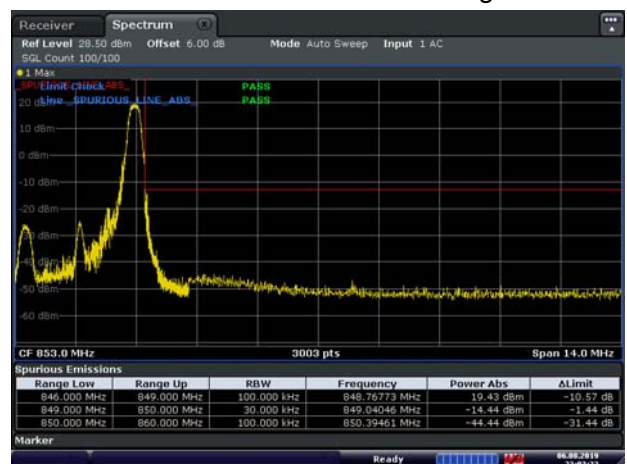

Date: 6.AUG.2019 23:03:22



LTE Band 5 16QAM 3MHz CH-Low 100%RB

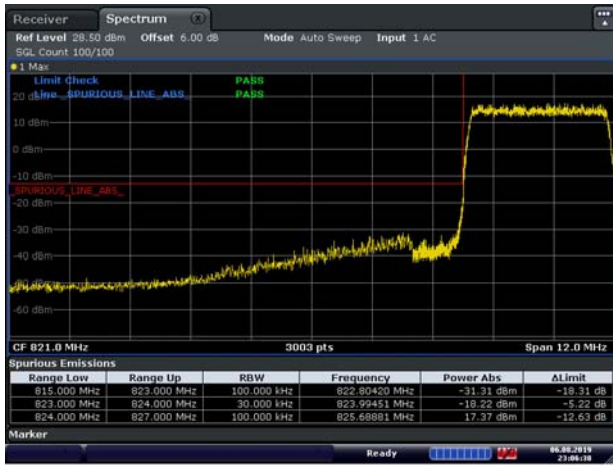


Date: 6.AUG.2019 23:06:39

LTE Band 5 16QAM 3MHz CH-High 100%RB




Date: 6.AUG.2019 23:01:47

LTE Band 5 16QAM 5MHz CH-Low 1RB

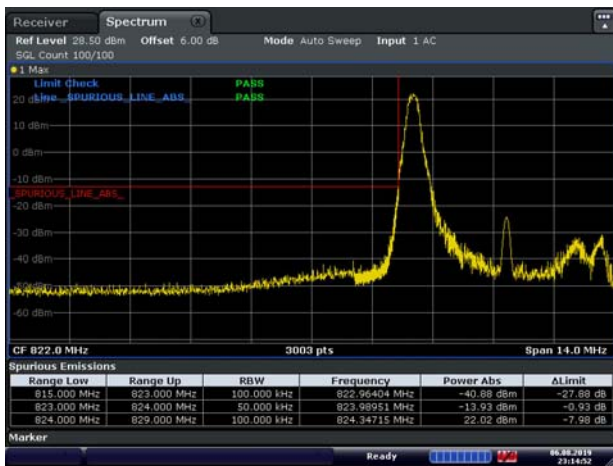


Date: 6.AUG.2019 23:14:53

LTE Band 5 16QAM 5MHz CH-High 1RB

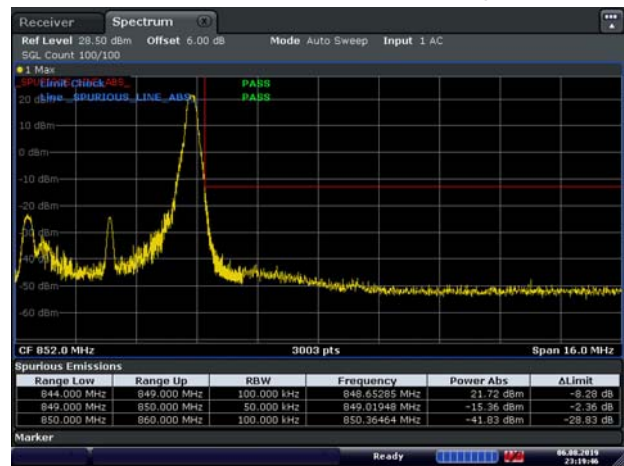

Date: 6.AUG.2019 23:19:45

LTE Band 5 16QAM 5MHz CH-Low 100%RB

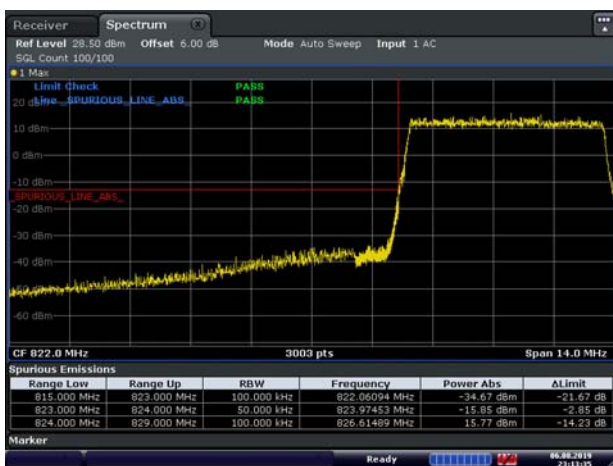

Date: 6.AUG.2019 23:13:35

LTE Band 5 16QAM 5MHz CH-High 100%RB



Date: 6.AUG.2019 23:18:26




LTE Band 5 16QAM 10MHz CH-Low 1RB




Date: 6.AUG.2019 23:27:25

LTE Band 5 16QAM 10MHz CH-High 1RB

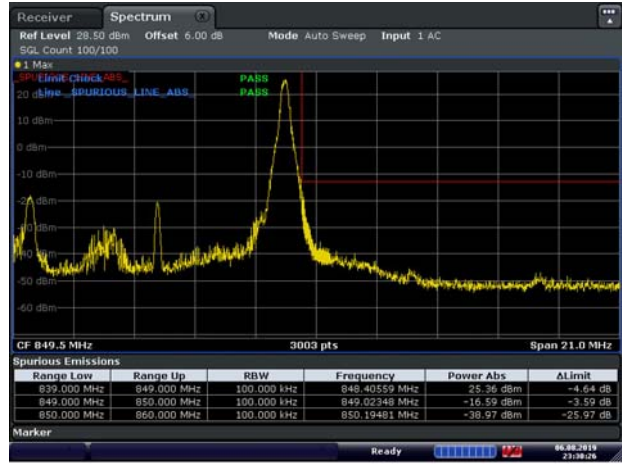

Date: 6.AUG.2019 23:30:27

LTE Band 5 16QAM 10MHz CH-Low 100%RB

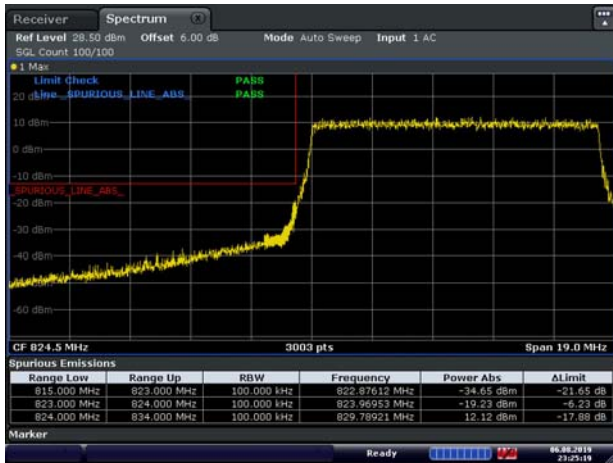

Date: 6.AUG.2019 23:25:20

LTE Band 5 16QAM 10MHz CH-High 100%RB



Date: 6.AUG.2019 23:29:47

5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

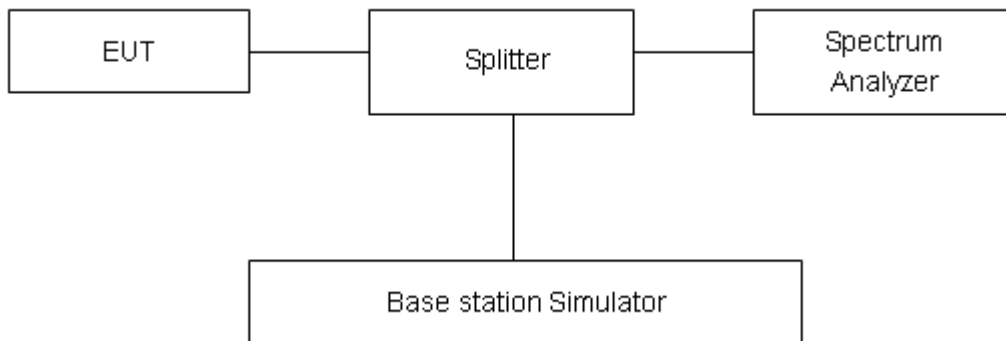

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
WCDMA Band V (RMC)	4132	826.4	25.96	23.21	2.75	≤13	PASS
	4183	836.6	25.99	23.19	2.80	≤13	PASS
	4233	846.6	26.08	23.19	2.89	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	26.70	21.19	5.51	≤13	PASS
		20525	836.5	27.05	21.60	5.45	≤13	PASS
		20643	848.3	26.41	21.28	5.13	≤13	PASS
	3	20415	825.5	27.12	21.50	5.62	≤13	PASS
		20525	836.5	26.85	21.49	5.36	≤13	PASS
		20635	847.5	26.13	21.20	4.93	≤13	PASS
	5	20425	826.5	26.18	20.93	5.25	≤13	PASS
		20525	836.5	26.73	21.48	5.25	≤13	PASS
		20625	846.5	25.91	21.07	4.84	≤13	PASS
	10	20450	829	34.01	28.97	5.04	≤13	PASS
		20525	836.5	33.80	28.87	4.93	≤13	PASS
		20600	844	33.58	28.65	4.93	≤13	PASS
16QAM	1.4	20407	824.7	27.28	21.08	6.20	≤13	PASS
		20525	836.5	27.41	21.21	6.20	≤13	PASS
		20643	848.3	27.16	21.39	5.77	≤13	PASS
	3	20415	825.5	27.92	21.63	6.29	≤13	PASS
		20525	836.5	27.37	21.28	6.09	≤13	PASS
		20635	847.5	27.29	21.52	5.77	≤13	PASS
	5	20425	826.5	27.35	21.18	6.17	≤13	PASS
		20525	836.5	27.46	21.32	6.14	≤13	PASS
		20625	846.5	26.26	20.64	5.62	≤13	PASS
	10	20450	829	34.88	28.97	5.91	≤13	PASS
		20525	836.5	34.71	28.85	5.86	≤13	PASS
		20600	844	34.47	28.67	5.80	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

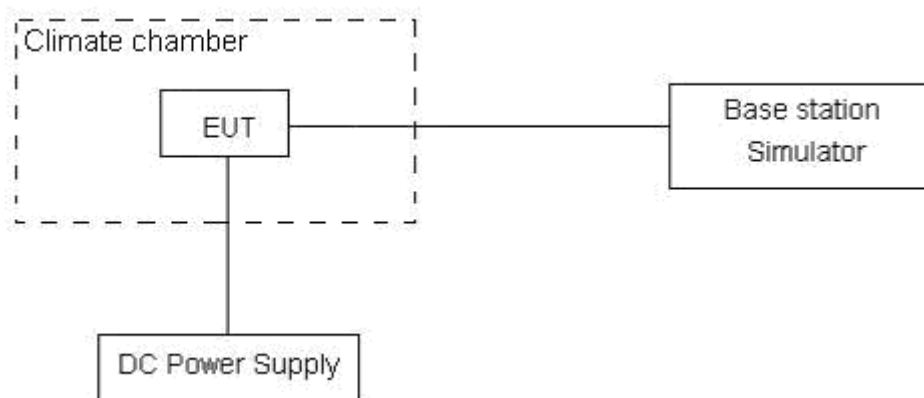



Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.



Test Result

WCDMA Band 5					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0321	848.9679	2.33	0.00279
Extreme (85°C)		824.0289	848.9690	4.62	0.00552
Extreme (80°C)		824.0328	848.9651	4.31	0.00515
Extreme (70°C)		824.0309	848.9672	2.23	0.00267
Extreme (60°C)		824.0323	848.9656	2.63	0.00314
Extreme (50°C)		824.0317	848.9662	1.27	0.00152
Extreme (40°C)		824.0304	848.9675	0.63	0.00075
Extreme (30°C)		824.0297	848.9682	2.56	0.00306
Extreme (20°C)		824.0318	848.9661	1.74	0.00208
Extreme (10C)		824.0306	848.9673	-0.19	-0.00023
Extreme (0°C)		824.0319	848.9662	-0.56	-0.00067
Extreme (-10°C)		824.0324	848.9655	1.39	0.00166
Extreme (-20°C)		824.0313	848.9666	2.35	0.00281
Extreme (-30°C)		824.0283	848.9699	3.43	0.00410
Extreme (-40°C)		824.0268	848.9711	-1.26	-0.00151
25°C	LV	824.0316	848.9663	0.13	0.00016
	HV	824.0313	848.9669	3.26	0.00390

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 5 / 10MHz / Full RB							
QPSK	20525 / 836.5	VL	TN	16	0.0191	± 2.5	Pass
		VN		-6	-0.0072	± 2.5	Pass
		VH		12	0.0143	± 2.5	Pass
		VN	50	8	0.0096	± 2.5	Pass
			40	20	0.0239	± 2.5	Pass
			30	-15	-0.0179	± 2.5	Pass
			20	-13	-0.0155	± 2.5	Pass
			10	19	0.0227	± 2.5	Pass
			0	-17	-0.0203	± 2.5	Pass
			-10	-11	-0.0132	± 2.5	Pass



			-20	-13	-0.0155	± 2.5	Pass
			-30	5	0.0060	± 2.5	Pass
16QAM	20525 / 836.5	VL	TN	24	0.0287	± 2.5	Pass
		VN		36	0.0430	± 2.5	Pass
		VH		18	0.0215	± 2.5	Pass
		VN	50	-19	-0.0227	± 2.5	Pass
			40	23	0.0275	± 2.5	Pass
			30	15	0.0179	± 2.5	Pass
			20	8	0.0096	± 2.5	Pass
			10	-11	-0.0132	± 2.5	Pass
			0	17	0.0203	± 2.5	Pass
			-10	12	0.0143	± 2.5	Pass
			-20	27	0.0323	± 2.5	Pass
-30	-23	-0.0275	± 2.5	Pass			

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

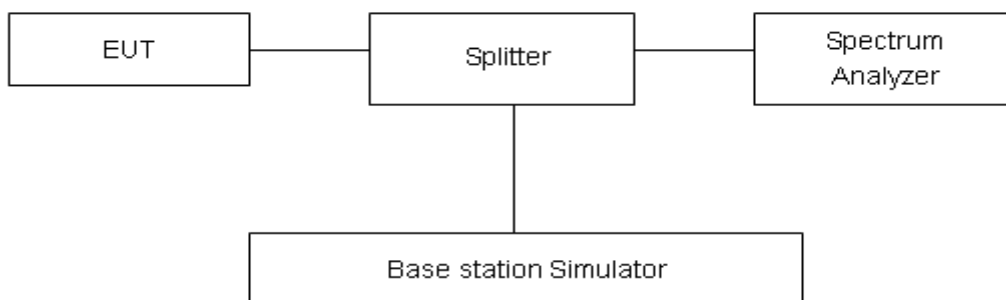

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

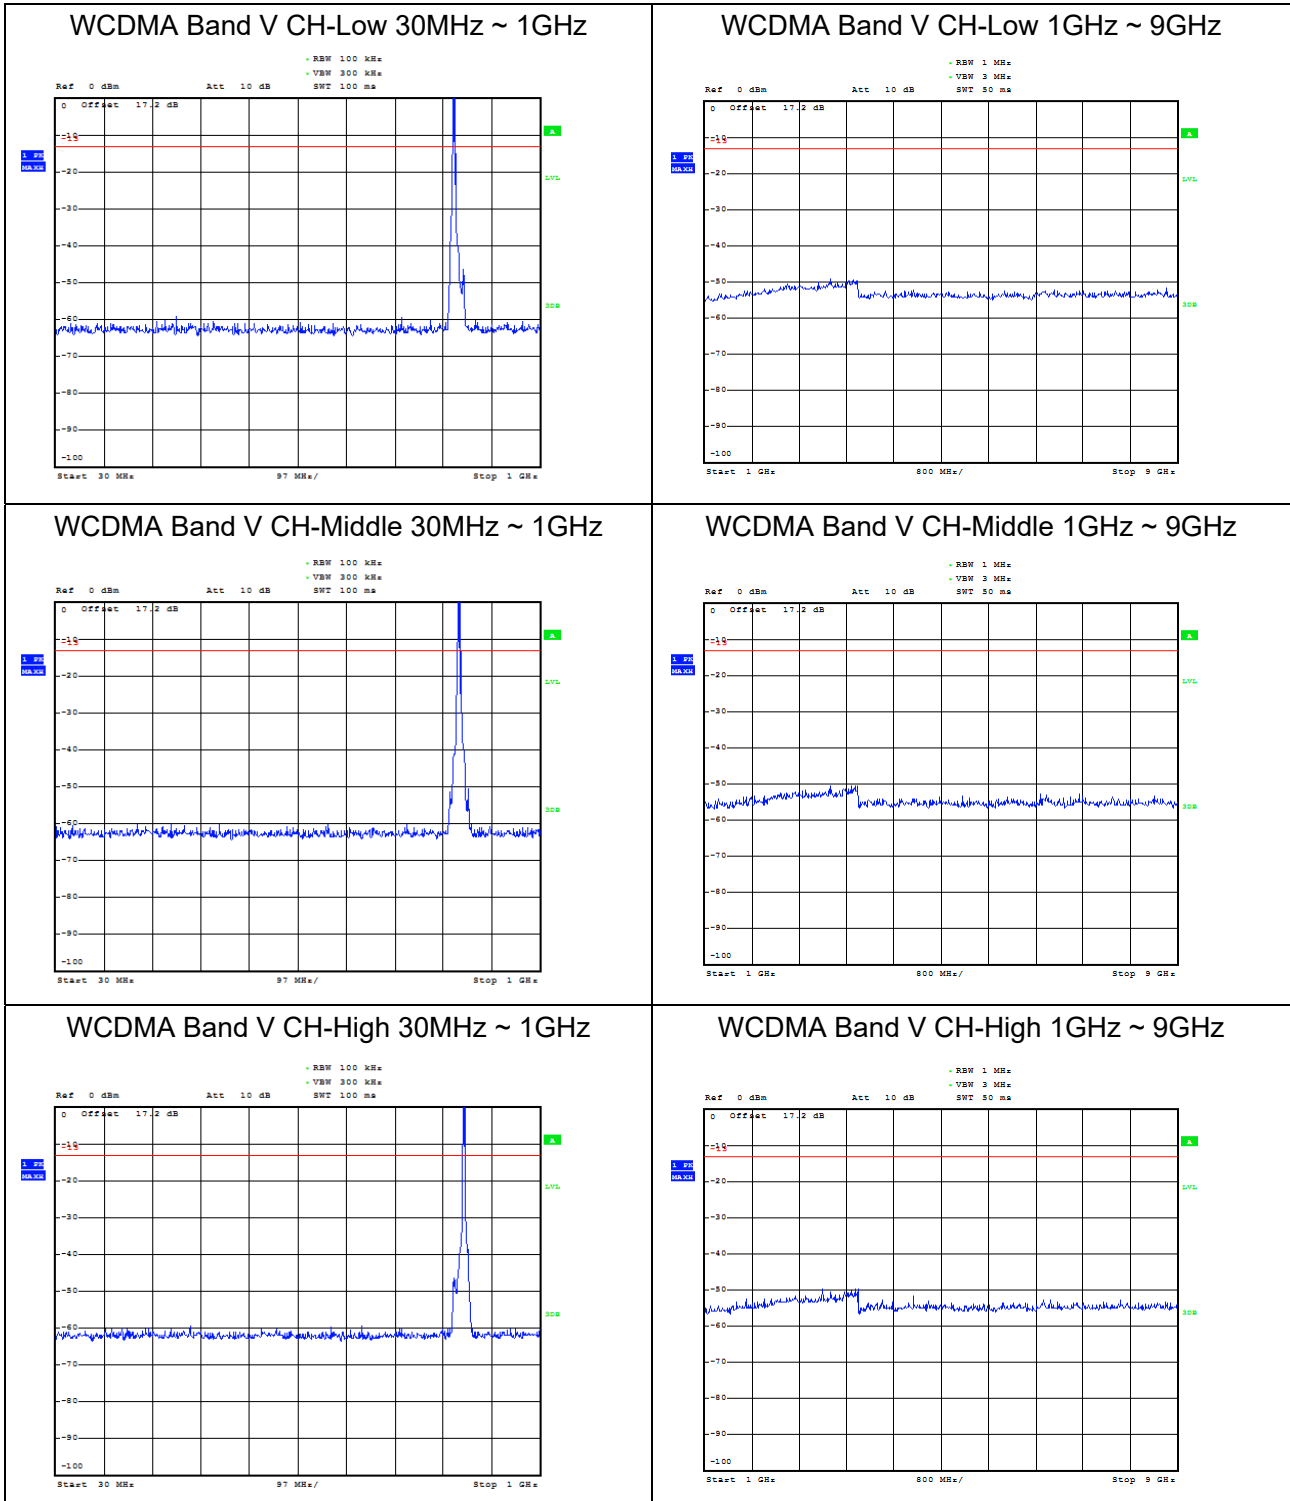





LTE Band 5 1.4MHz CH-Low 30MHz~1GHz

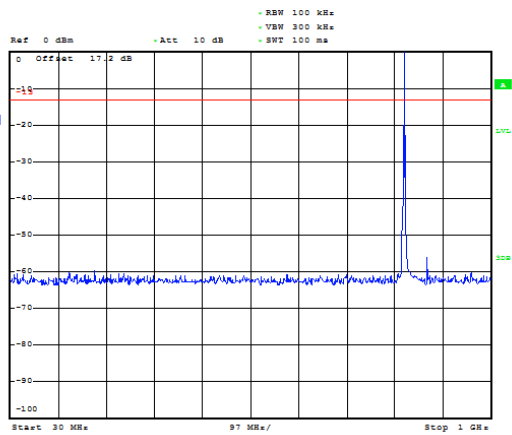


LTE Band 5 1.4MHz CH-Low 1GHz~9GHz

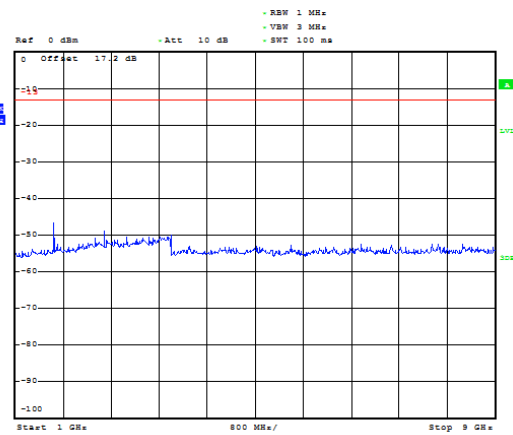


LTE Band 5 1.4MHz CH-Middle 30MHz~1GHz

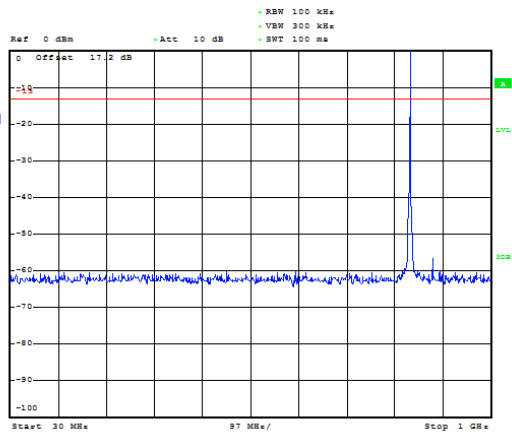


LTE Band 5 1.4MHz CH-Middle 1GHz~9GHz

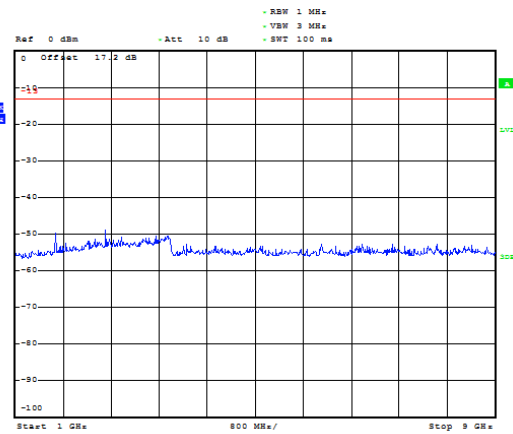

LTE Band 5 1.4MHz CH-High 30MHz~1GHz

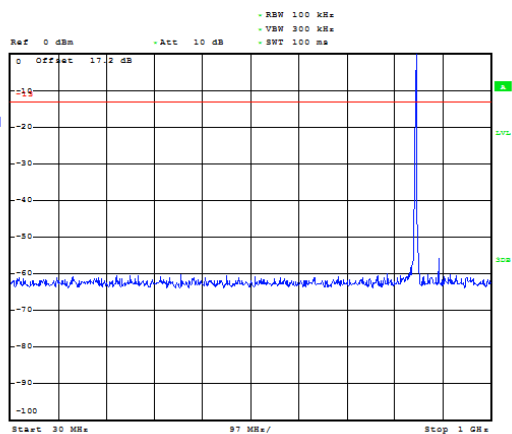


LTE Band 5 1.4MHz CH-High 1GHz~9GHz

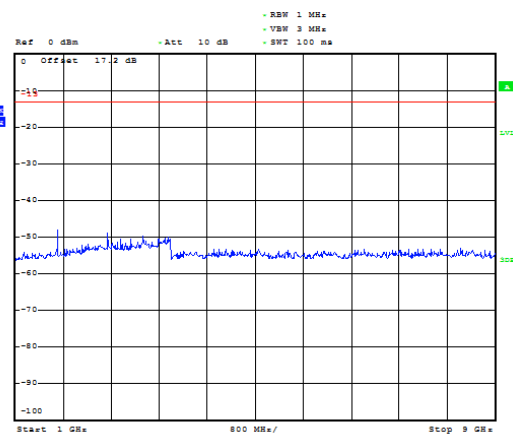





LTE Band 5 3MHz CH-Low 30MHz~1GHz

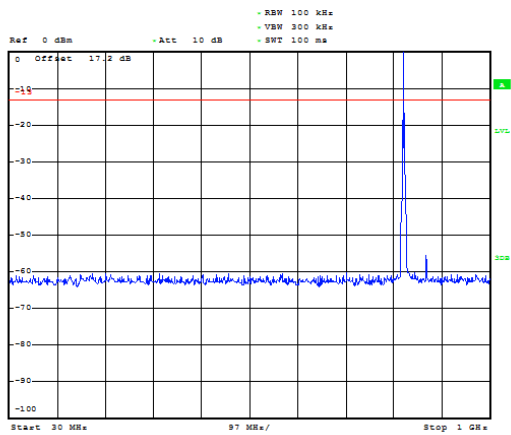


LTE Band 5 3MHz CH-Low 1GHz~9GHz

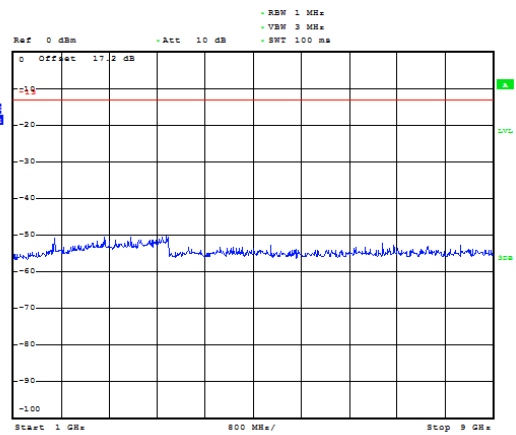


LTE Band 5 3MHz CH-Middle 30MHz~1GHz

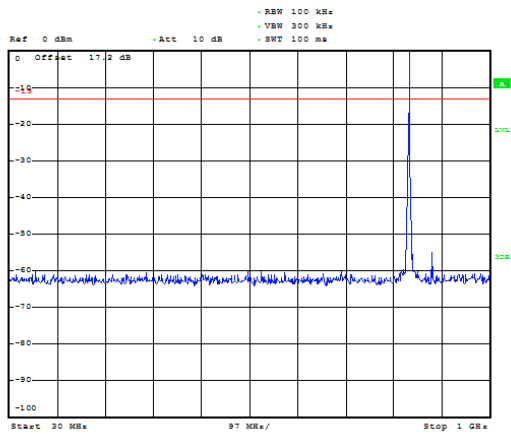


LTE Band 5 3MHz CH-Middle 1GHz~9GHz

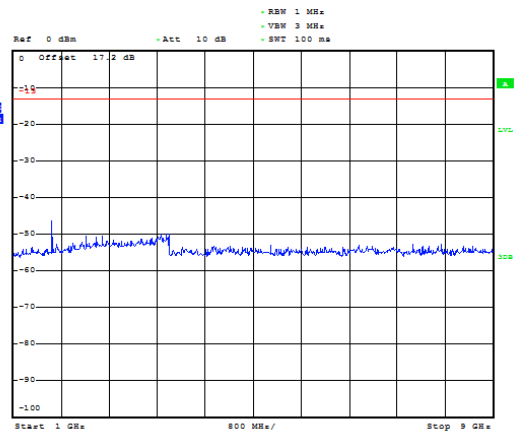

LTE Band 5 3MHz CH-High 30MHz~1GHz

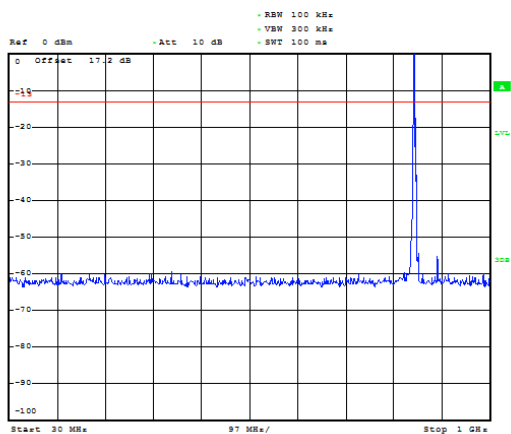


LTE Band 5 3MHz CH-High 1GHz~9GHz

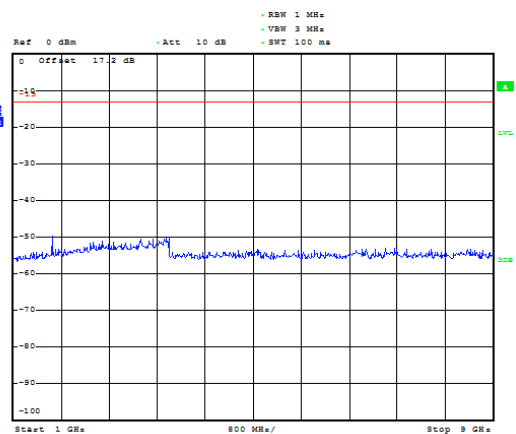





LTE Band 5 5MHz CH-Low 30MHz~1GHz

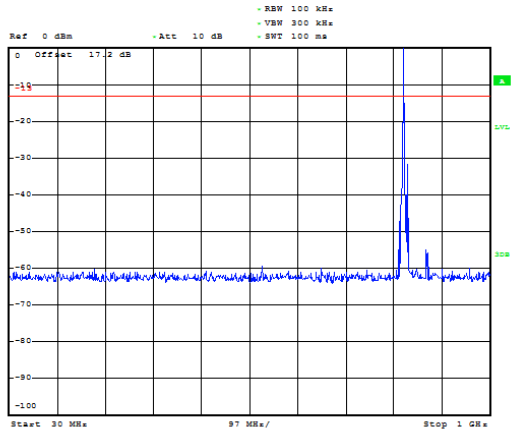


LTE Band 5 5MHz CH-Low 1GHz~9GHz

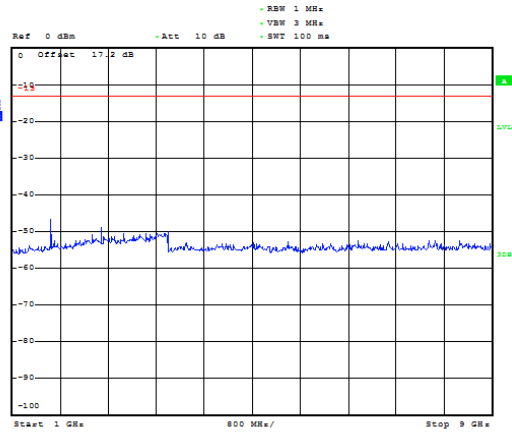


LTE Band 5 5MHz CH-Middle 30MHz~1GHz

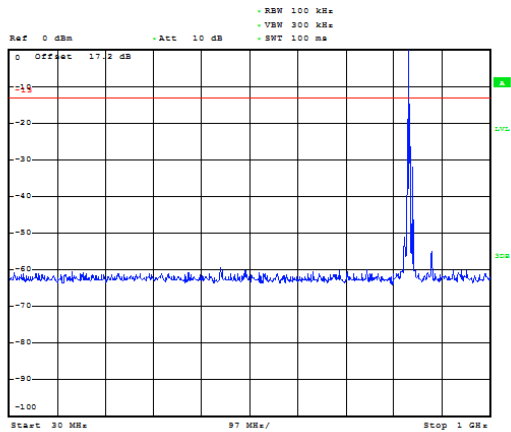


LTE Band 5 5MHz CH-Middle 1GHz~9GHz

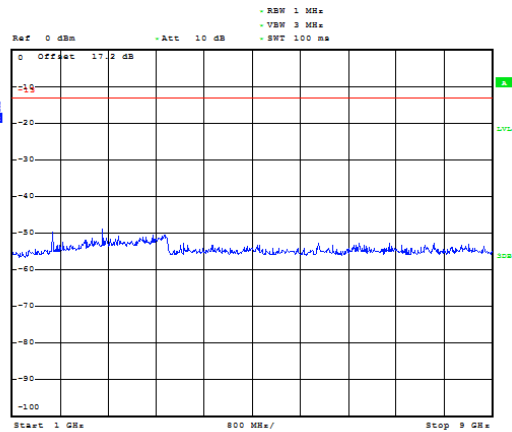

LTE Band 5 5MHz CH-High 30MHz~1GHz

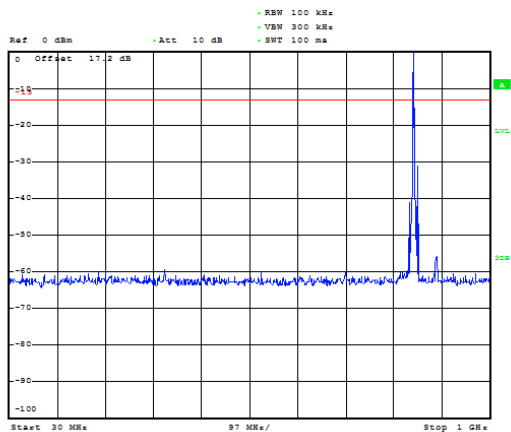


LTE Band 5 5MHz CH-High 1GHz~9GHz

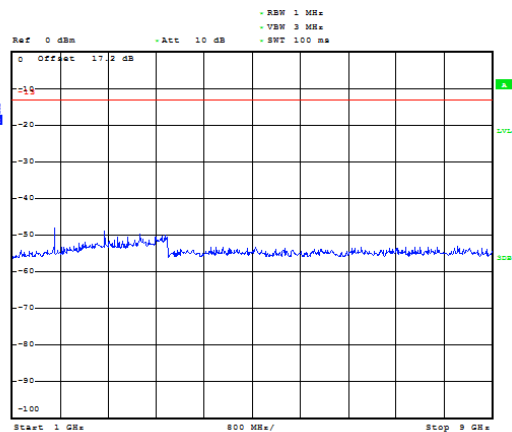





LTE Band 5 10MHz CH-Low 30MHz~1GHz

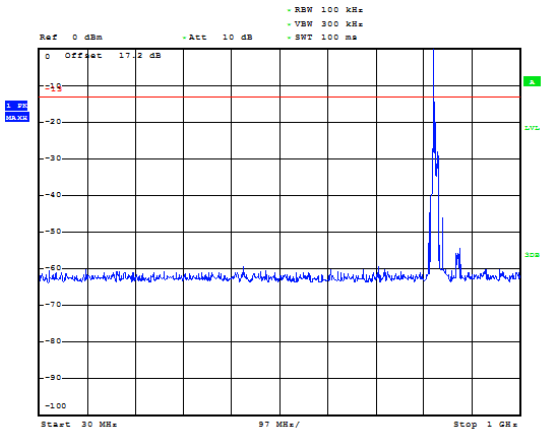


LTE Band 5 10MHz CH-Low 1GHz~9GHz

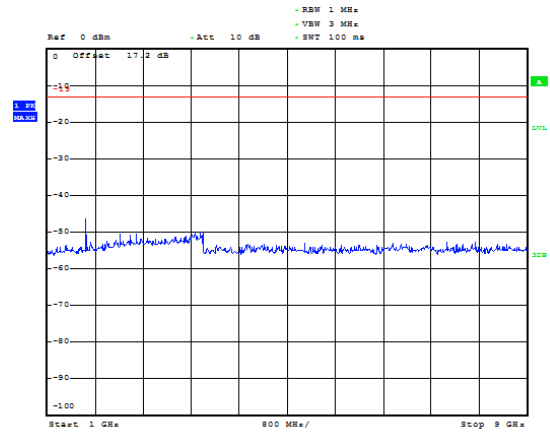


LTE Band 5 10MHz CH-Middle 30MHz~1GHz

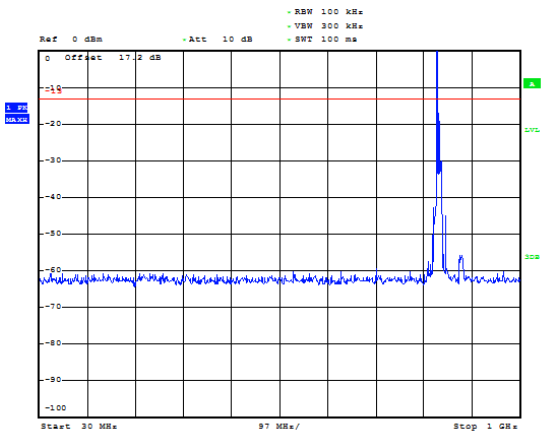


LTE Band 5 10MHz CH-Middle 1GHz~9GHz

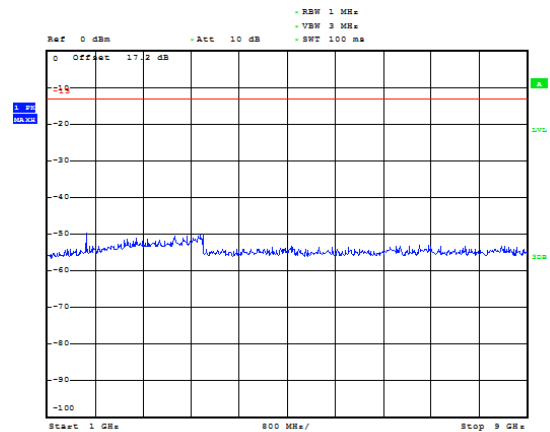

LTE Band 5 10MHz CH-High 30MHz~1GHz

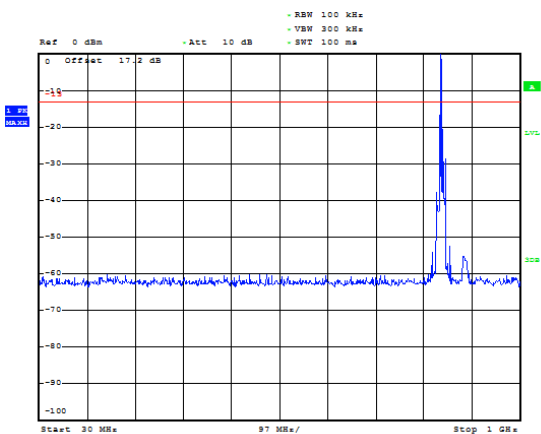

LTE Band 5 10MHz CH-High 1GHz~9GHz

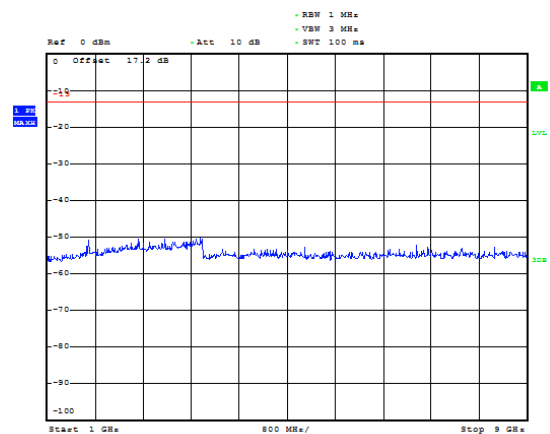

5.8. Radiates Spurious Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~1GHz

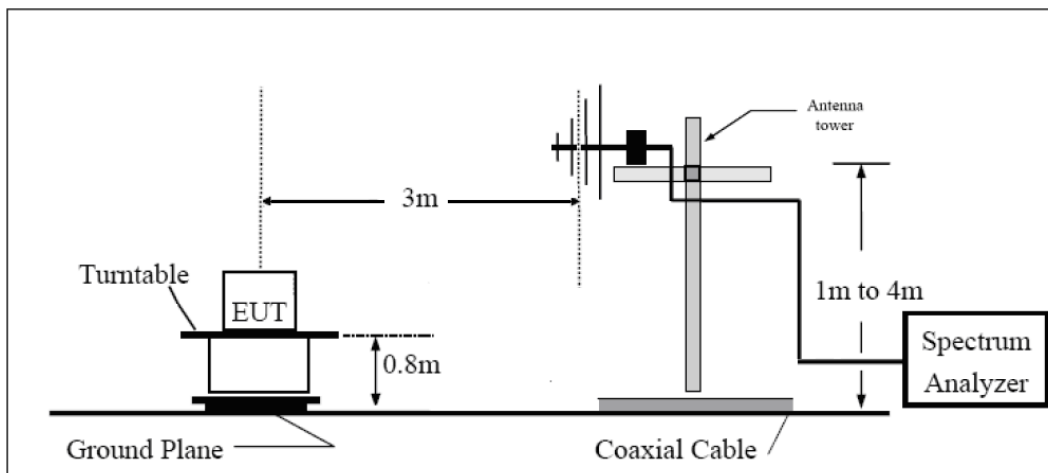

Above 1GHz

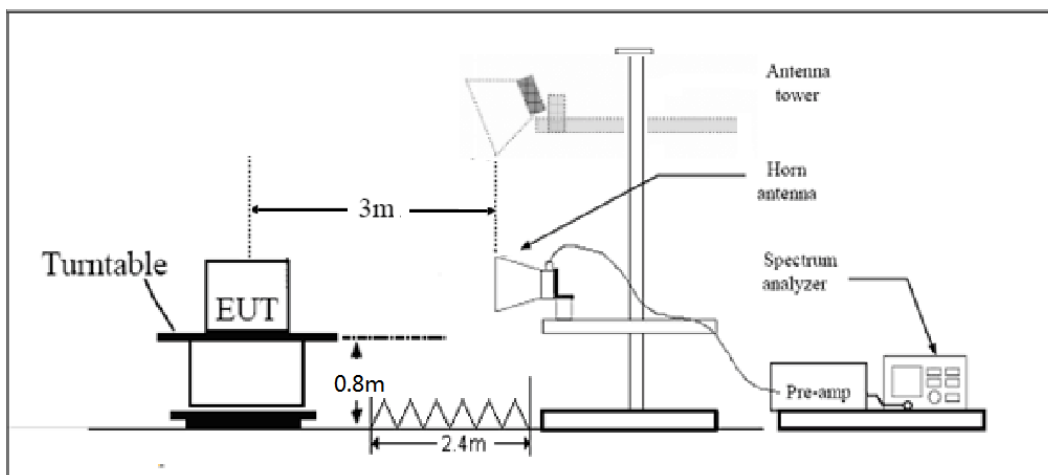

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-58.50	2	10.75	Horizontal	-51.90	-13.00	38.90	315
3	2509.8	-61.89	2.51	11.05	Horizontal	-55.50	-13.00	42.50	90
4	3346.4	-61.50	4.2	11.15	Horizontal	-56.70	-13.00	43.70	90
5	4183.0	-60.08	5.2	11.15	Horizontal	-56.28	-13.00	43.28	135
6	5019.6	-58.37	5.5	11.95	Horizontal	-54.07	-13.00	41.07	45
7	5856.2	-60.05	5.7	13.55	Horizontal	-54.35	-13.00	41.35	90
8	6692.8	-58.12	6.3	13.75	Horizontal	-52.82	-13.00	39.82	0
9	7529.4	-54.50	6.8	13.85	Horizontal	-49.60	-13.00	36.60	315
10	8366.0	-55.14	6.9	14.25	Horizontal	-49.94	-13.00	36.94	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-53.70	2.00	10.75	Horizontal	-47.10	-13.00	34.10	135
3	2509.5	-53.09	2.51	11.05	Horizontal	-46.70	-13.00	33.70	45
4	3466.2	-58.43	4.20	11.15	Horizontal	-53.63	-13.00	40.63	0
5	4215.9	-60.60	5.20	11.15	Horizontal	-56.80	-13.00	43.80	45
6	5165.6	-55.82	5.50	11.95	Horizontal	-51.52	-13.00	38.52	270
7	5815.3	-60.64	5.70	13.55	Horizontal	-54.94	-13.00	41.94	315
8	6765.0	-57.63	6.30	13.75	Horizontal	-52.33	-13.00	39.33	90
9	7614.7	-53.45	6.80	13.85	Horizontal	-48.55	-13.00	35.55	45
10	8464.4	-56.08	6.90	14.25	Horizontal	-50.88	-13.00	37.88	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Date of Testing: (Original) June 29, 2018~ July 16, 2018 and July 30, 2018~ July 31, 2018 and August 3, 2019~ August 13, 2019

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-09-13
Software	R&S	EMC32	9.26.0	/	/

Date of Testing: (Variant) March 19, 2022 ~ March 29, 2022

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Communication Tester	Anritsu	MT8821C	6201538758	2021-05-15	2022-05-14

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.

ANNEX C: Product Change Description 1

Quectel Wireless Solutions Co., Ltd.

Statement

We, Quectel Wireless Solutions Co., Ltd, declare the following models as series application.

Name: LTE Module

Parent Model: EC25-AFX

Variant Model: EC25-AFXD, EC25-AFXD MINIPCIE

EC25-AFX, EC25-AFXD and EC25-AFXD MINIPCIE are all LTE modules. They use the same chipset, support same bands and share the same software & hardware design. The only difference is EC25-AFXD and EC25-AFXD MINIPCIE are data only modules which is configured by firmware based on EC25-AFX.


Following details are the difference of these modules.

Module	Frequency bands	Capability
EC25-AFX EC25-AFX MINIPCIE	FDD: B2/B4/B5/B12/B13/B14/B66/B71 WCDMA: B2/B4/B5	Cat.4 Data&Voice
EC25-AFXD EC25-AFXD MINIPCIE	FDD: B2/B4/B5/B12/B13/B14/B66/B71 WCDMA: B2/B4/B5	Cat.4 Data Only

Meanwhile, EC25-AFXD MINIPCIE makes up of EC25-AFXD module and PCIe carrier board. The carrier board switches EC25-AFXD module to follow PCI Express Mini Card 1.2 standard connector protocol. No any other internal changes in EC25-AFXD module. We hereby state that two models are identical in interior structure and components, and just connector interface is different for the marketing requirement.

Your assistance on this matter is highly appreciated.

Sincerely,

Name: Jean Hu 

Title: Certification Section



ANNEX D: Product Change Description 2

The Product Change Description are submitted separately.