

FCC RADIO TEST REPORT

FCC ID:2AEB5M691

Product: Tablet PC
Trade Name: AOC
Model Number: M691
Serial Model: N/A
Report No.: ISOT15031101R4

Prepared for

AOC

8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511, Taiwan

Prepared by

Shenzhen ISOTek Standards Technical Services Co.,Ltd.

13/F, HuaFengRui Building, XinHu Rd., XiXiang, Bao'an District, Shenzhen, China

Tel.: +86-755- 23087378 Fax.: +86-755-23087278

[Http://www.ISOTek.com.cn](http://www.ISOTek.com.cn)

TEST RESULT CERTIFICATION

Applicant's name: AOC

Address: 8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511,
Taiwan

Manufacture's Name: AOC

Address: 8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511,
Taiwan

Product name.....: Tablet PC

Model and/or type reference ...: M691

Serial Model: N/A

Standards.....: FCC Part 22H and 24E: 01 Oct. 2014

Test procedure: ANSI C63.4-2009, TIA/EIA 603D : 2004

This device described above has been tested by Shenzhen ISOTek, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen ISOTek, this document may be altered or revised by Shenzhen ISOTek, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date (s) of performance of tests 03 Mar. 2015 ~14 Mar. 2015

Date of Issue 14 Mar. 2015

Test Result **Pass**

Compiled by:

Lisa Huang

Lisa Huang/ Project Engineer

Approved by:

Richard Chen

Richard Chen/ Manager

TABLE OF CONTENTS

1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 MEASUREMENT INSTRUMENTS.....	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 GENERAL TECHNICAL REQUIREMENTS	8
2.4 CONFIGURATION OF EUT SYSTEM.....	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. OUTPUT POWER.....	11
5.1 Conducted Output Power.....	11
5.2 Radiated Output Power.....	16
6. SPURIOUS EMISSION.....	20
6.1 CONDUCTED SPURIOUS EMISSION.....	20
6.2 Radiated Spurious Emission	22
7. FREQUENCY STABILITY	28
7.1 MEASUREMENT METHOD	28
7.2 PROVISIONS APPLICABLE.....	28
7.3 MEASUREMENT RESULT	29

8. BANDWIDTH	32
8.1 APPLICABLE STANDARD	32
8.2 Test Procedure	32
8.3 MEASUREMENT RESULT	32
9. BAND EDGE	34
9.1 Applicable Standard	34
9.2 Test Procedure	34
9.3 MEASUREMENT RESULT	34
10. PEAK-TO-AVERAGE RATIO	35
10.1 MEASURING INSTRUMENTS	35
10.2 TEST PROCEDURES	35
10.3 TEST SETUP	35
10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO	36
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	37
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	50
EMISSION BANDWIDTH (-26DBC)	50
APPENDIX III	58
TEST PLOTS FOR BAND EDGES	58

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Tablet PC
Model Name	M691
Serial Model	N/A
Model Difference	N/A
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V
Antenna:	FPCB Antenna
Modulation Type:	GSM/GPRS/EDGE: GMSK; EDGE:MCS 1~MCS 4; RMC/AMR: QPSK;HSDPA/HSUPA: QPSK; HSUPA Rel 6, Cat 6; RMC/AMR 12.2Kbps Rel 99;HSDPA Rel 7, Cat 14
Antenna gain:	1.0 dBi
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter
Battery parameter:	DC 3.7V/2800mAh
Adapter Input:	100-240V~,50/60Hz,0.4A
Adapter Output:	5.0V $\overline{\text{---}}$, 1.5A
GPRS Class	Multi-Class12 4 timeslots are used for GPRS
Extreme Vol. Limits:	DC3.5 V to 4.2 V (Nominal DC3.7 V)
Extreme Temp. Tolerance	-10°C to +50°C
Software version :	Android 4.2.2
Hardware version :	MOLY.WR8.W1315.MD.WG.MP.V35.P2
SIM CARD	The Phone has dual SIM Card sockets but only one of the dual SIM Card can be transmitting when the two SIM Cards are inserting the phone together. Anyone of the SIM Card socket was tested
** Note: The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2AEB5M691** filing to comply with the FCC Part 22H&24E .

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 D and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

SUBSTITUTION METHOD

- 1.GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
2. The table was rotated 360 degrees to determine the position of the highest radiated power.
3. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
4. Taking the record of maximum ERP/EIRP.
5. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
6. The conducted power at the terminal of the dipole antenna is measured.
7. Repeat step 1 to step 3 to get the maximum ERP/EIRP of the substitution antenna

1.4 TEST FACILITY

All the tests were performed at:

Shenzhen Huance Wei Testing Lab at 10th Floor West Logistics Information Center Build,
Shenzhen, China

Shenzhen Huance Wei Testing Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration **369037** , Nov 07, 2016.

1.5 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4446A	US44300451	2014.07.06	2015.07.05	1 year
2	EMI Test Receiver	R&S	ESCI	101165	2014.07.06	2015.07.05	1 year
3	Communication Tester	r&s	CMU200	A0304247	2014.07.06	2015.07.05	1 year
4	Loop Antenna	ARA	PLA-1030/B	1029	2014.07.06	2015.07.05	1 year
5	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168 - 438	2014.07.06	2015.07.05	1 year
6	Horn Antenna	Schwarzbeck	BBHA 9170	9170-182	2014.07.06	2015.07.05	1 year
7	SIGNAL GENERATOR	AGILENT	E4438C	0878743	2014.07.06	2015.07.05	1 year
8	Substitution Antenna	EMCO	3142C	SD8434	2014.07.06	2015.07.05	1 year
9	Substitution Antenna	EM	EM-AH-10180	78242	2014.07.06	2015.07.05	1 year
10	Amplifier	Schwarzbeck	BBV9743	9743 - 019	2014.07.06	2015.07.05	1 year

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Tablet PC	M691	FCC ID: 2AEB5M691	EUT

*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
3	Frequency Stability		2.1055 /24.235	Pass
4	Occupied Bandwidth		2.1049 (h)(i)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
6	Band Edge		22.917(b) / 24.238 (b)	Pass

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS850, GSM/GPRS1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test.

the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band II) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT

GSM 850:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
GSM850	824.2	32.64
	836.6	32.45
	848.8	32.47
GPRS850 (1 Slot)	824.2	32.75
	836.6	32.48
	848.8	32.44
GPRS850 (2 Slot)	824.2	31.91
	836.6	31.73
	848.8	31.63
GPRS850 (3 Slot)	824.2	30.23
	836.6	29.95
	848.8	29.83
GPRS850 (4 Slot)	824.2	29.13
	836.6	28.82
	848.8	28.58

PCS 1900:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
GSM1900	1850.2	29.63
	1880	29.39
	1909.8	29.29
GPRS1900 (1 Slot)	1850.2	29.64
	1880	29.43
	1909.8	29.42
GPRS1900 (2 Slot)	1850.2	28.89
	1880	28.74
	1909.8	28.69
GPRS1900 (3 Slot)	1850.2	27.18
	1880	27.16
	1909.8	27.22
GPRS1900 (4 Slot)	1850.2	26.15
	1880	26.14
	1909.8	26.32

EDGE 850:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
EGPRS850 (1 Slot)	824.2	32.34
	836.6	32.72
	848.8	32.44
EGPRS850 (2 Slot)	824.2	31.89
	836.6	31.70
	848.8	31.61
EGPRS850 (3 Slot)	824.2	30.21
	836.6	29.92
	848.8	29.81
EGPRS850 (4 Slot)	824.2	29.34
	836.6	28.79
	848.8	28.55

EDGE 1900:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
EGPRS1900 (1 Slot)	1850.2	29.63
	1880	29.39
	1909.8	29.29
EGPRS1900 (2 Slot)	1850.2	28.85
	1880	28.71
	1909.8	28.66
EGPRS1900 (3 Slot)	1850.2	27.15
	1880	27.13
	1909.8	27.18
EGPRS1900 (4 Slot)	1850.2	26.11
	1880	26.09
	1909.8	26.28

UMTS BAND II

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
WCDMA 1900 RMC	1852.4	22.88
	1880	22.83
	1907.6	22.04
WCDMA 1900 AMR	1852.4	22.58
	1880	22.47
	1907.6	21.63
HSDPA Subtest 1	1852.4	21.92
	1880	21.85
	1907.6	21.53
HSDPA Subtest 2	1852.4	21.85
	1880	21.61
	1907.6	21.61
HSDPA Subtest 3	1852.4	21.47
	1880	21.58
	1907.6	21.53
HSDPA Subtest 4	1852.4	21.52
	1880	21.59
	1907.6	21.85
HSPA Subtest 1	1852.4	21.56
	1880	21.59
	1907.6	22.08
HSPA Subtest 2	1852.4	21.41
	1880	21.77
	1907.6	21.49
HSPA Subtest 3	1852.4	21.78
	1880	21.68
	1907.6	21.58
HSPA Subtest 4	1852.4	21.47
	1880	21.77
	1907.6	21.49
HSPA Subtest 5	1852.4	21.37
	1880	21.49
	1907.6	21.72

UMTS BAND V

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
WCDMA 850 RMC	826.4	22.88
	835	22.65
	846.6	22.86
WCDMA 850 AMR	826.4	22.61
	835	22.64
	846.6	22.54
HSDPA Subtest 1	826.4	21.71
	835	21.72
	846.6	22.02
HSDPA Subtest 2	826.4	21.72
	835	21.88
	846.6	21.77
HSDPA Subtest 3	826.4	21.84
	835	21.9
	846.6	21.66
HSDPA Subtest 4	826.4	21.71
	835	21.94
	846.6	22.36
HSUPA Subtest 1	826.4	21.84
	835	21.82
	846.6	21.45
HSUPA Subtest 2	826.4	21.75
	835	21.97
	846.6	20.72
HSUPA Subtest 3	826.4	21.64
	835	22.02
	846.6	21.81
HSUPA Subtest 4	826.4	21.91
	835	21.72
	846.6	22.08
HSUPA Subtest 5	826.4	22.04
	835	22.11
	846.6	21.85

Note: This EUT has dual SIM Card sockets (GSM/WCDMA), through Pre-scan, find the WCDMA Card sockets is the worse case, Only the worst case mode is recorded in the report.

5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603D-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	≤ 38.45 dBm (7W)
PCS 1900	≤ 33 dBm (2W)
UMTS BAND II/V	≤ 38.45 dBm (7W)

5.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	30.15	Horizontal	Pass
	824.2	28.98	Vertical	Pass
	836.6	30.35	Horizontal	Pass
	836.6	28.05	Vertical	Pass
	848.8	30.83	Horizontal	Pass
	848.8	30.14	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS1900	1850.2	28.77	Horizontal	Pass
	1850.2	27.64	Vertical	Pass
	1880	29.29	Horizontal	Pass
	1880	27.49	Vertical	Pass
	1909.8	29.42	Horizontal	Pass
	1909.8	28.46	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	28.56	Horizontal	Pass
	824.2	29.49	Vertical	Pass
	836.6	29.58	Horizontal	Pass
	836.6	29.12	Vertical	Pass
	848.8	29.65	Horizontal	Pass
	848.8	28.78	Vertical	Pass

Radiated Power (E.I.R.P) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	27.57	Horizontal	Pass
	1850.2	27.83	Vertical	Pass
	1880	27.96	Horizontal	Pass
	1880	27.55	Vertical	Pass
	1909.8	27.69	Horizontal	Pass
	1909.8	27.64	Vertical	Pass

Radiated Power (ERP) for EDGE 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EDGE 850	824.2	26.91	Horizontal	Pass
	824.2	27.40	Vertical	Pass
	836.6	27.25	Horizontal	Pass
	836.6	27.20	Vertical	Pass
	848.8	27.23	Horizontal	Pass
	848.8	27.00	Vertical	Pass

Radiated Power (E.I.R.P) for EDGE 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EDGE 1900	1850.2	26.61	Horizontal	Pass
	1850.2	26.23	Vertical	Pass
	1880	26.20	Horizontal	Pass
	1880	26.73	Vertical	Pass
	1909.8	25.72	Horizontal	Pass
	1909.8	25.63	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1852.4	23.28	Horizontal	Pass
	1852.4	22.95	Vertical	Pass
	1880	22.36	Horizontal	Pass
	1880	23.24	Vertical	Pass
	1907.6	23.15	Horizontal	Pass
	1907.6	22.83	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.4	21.49	Horizontal	Pass
	826.4	22.66	Vertical	Pass
	836.6	23.03	Horizontal	Pass
	836.6	21.75	Vertical	Pass
	846.6	21.45	Horizontal	Pass
	846.6	22.89	Vertical	Pass

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band II and band v.

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS/ GPRS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

- Note:** 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.
2. As no emission found in standby or receive mode, no recording in this report.


6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603D-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band. Only shown the worst data.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

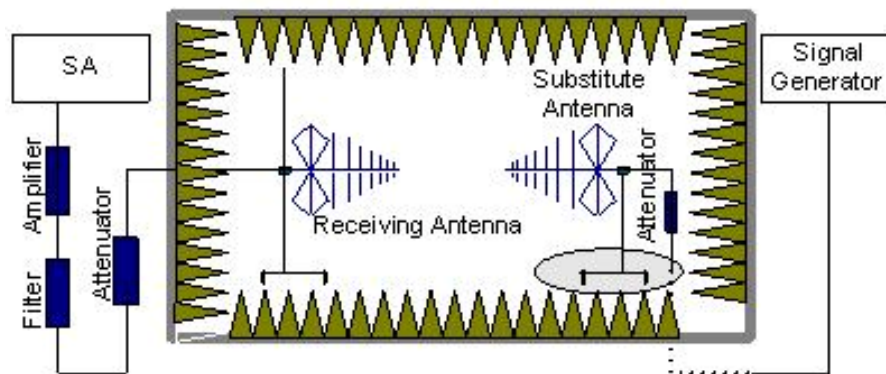

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

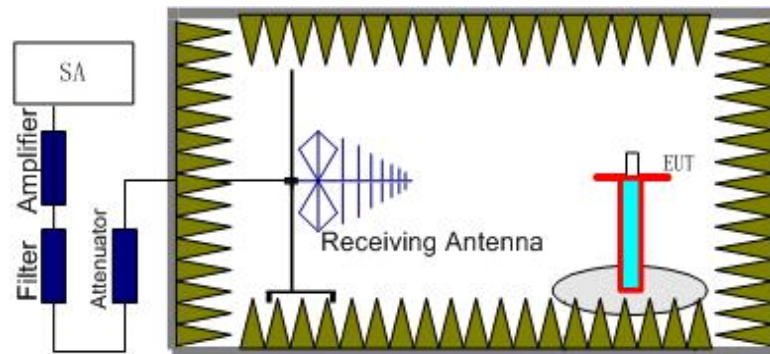

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 835.0MHz, 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

6.2.3 MEASUREMENT RESULT

GSM 850:

Test Results for Channel 128/824.2 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1648.4	-22.3	7.8	-14.5	-13	Vertical
1648.4	-32.83	7.8	-25.03	-13	Horizontal
2472.6	-26.33	11	-15.33	-13	Vertical
2472.6	-32.54	11	-21.54	-13	Horizontal
3296.8	-31.27	12.3	-18.97	-13	Horizontal
3296.8	-34.64	12.3	-22.34	-13	Vertical
Test Results for Channel 190/836.6 MHz					
1673.2	-30.53	8	-22.53	-13	Vertical
1673.2	-34.95	8	-26.95	-13	Horizontal
2509.8	-30.84	11.2	-19.64	-13	Vertical
2509.8	-33.17	11.2	-21.97	-13	Horizontal
3346.4	-32.93	12.6	-20.33	-13	Horizontal
3346.4	-31.64	12.6	-19.04	-13	Vertical
Test Results for Channel 251/848.8 MHz					
1697.6	-28.36	7.8	-20.56	-13	Vertical
1697.6	-32.83	7.8	-25.03	-13	Horizontal
2546.4	-32.33	11	-21.33	-13	Vertical
2546.4	-32.54	11	-21.54	-13	Horizontal
3395.2	-31.27	12.3	-18.97	-13	Horizontal
3395.2	-34.64	12.3	-22.34	-13	Vertical

PCS 1900:

Test Results for Channel 512/1850.2MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.4	-35.41	13.42	-21.99	-13	Horizontal
3700.4	-36.34	13.42	-22.92	-13	Vertical
5550.6	-36.19	17.12	-19.07	-13	Vertical
5550.6	-39.74	17.12	-22.62	-13	Horizontal
7400.8	-38.08	19.26	-18.82	-13	Horizontal
7400.8	-39.53	19.26	-20.27	-13	Vertical
Test Results for Channel 661/1880.0MHz					
3760	-32.17	13.76	-18.41	-13	Horizontal
3760	-35.35	13.76	-21.59	-13	Vertical
5640	-38.15	17.56	-20.59	-13	Vertical
5640	-42.18	17.56	-24.62	-13	Horizontal
7520	-41.91	19.6	-22.31	-13	Horizontal
7520	-42.46	19.6	-22.86	-13	Vertical
Test Results for Channel 810/1909.8MHz					
3819.6	-33.86	13.87	-19.99	-13	Horizontal
3819.6	-34.83	13.87	-20.96	-13	Vertical
5729.4	-38.21	17.66	-20.55	-13	Vertical
5729.4	-36.38	17.66	-18.72	-13	Horizontal
7639.2	-37.51	19.75	-17.76	-13	Horizontal
7639.2	-38.12	19.75	-18.37	-13	Vertical

UMTS band II:

Test Results for Channel 9262/1852.4MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.8	-33.33	13.87	-19.46	-13	Horizontal
3700.8	-34.22	13.87	-20.35	-13	Vertical
5551.2	-38.33	17.66	-20.67	-13	Vertical
5551.2	-37.33	17.66	-19.67	-13	Horizontal
Test Results for Channel 9400/1880MHz					
3760	-33.21	13.76	-19.45	-13	Horizontal
3760	-32.83	13.76	-19.07	-13	Vertical
5640	-38.35	17.56	-20.79	-13	Vertical
5640	-38.51	17.56	-20.95	-13	Horizontal
Test Results for Channel 9538/1907.6MHz					
3819.2	-34.33	13.42	-20.91	-13	Horizontal
3819.2	-32.54	13.42	-19.12	-13	Vertical
5728.8	-36.33	17.12	-19.21	-13	Vertical
5728.8	-39.05	17.12	-21.93	-13	Horizontal

UMTS band V:

Test Results for Channel 4132/826.4MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1652.8	-29.74	8.1	-21.64	-13	Vertical
1652.8	-28.29	8.1	-20.19	-13	Horizontal
2479.2	-31.21	11.69	-19.52	-13	Horizontal
2479.2	-36.42	11.69	-24.73	-13	Vertical
3305.6	-35.36	12.92	-22.44	-13	Horizontal
3305.6	-41.31	12.92	-28.39	-13	Vertical
Test Results for Channel 4183/836.6MHz					
1672.8	-32.53	8	-24.53	-13	Vertical
1672.8	-29.23	8	-21.23	-13	Horizontal
2509.2	-29.53	11.2	-18.33	-13	Horizontal
2509.2	-30.42	11.2	-19.22	-13	Vertical
3345.6	-35.23	12.6	-22.63	-13	Horizontal
3345.6	-32.18	12.6	-19.58	-13	Vertical
Test Results for Channel 4233/846.6MHz					
1673.2	-28.49	8	-20.49	-13	Vertical
1673.2	-34.69	8	-26.69	-13	Horizontal
2509.8	-30.33	11.2	-19.13	-13	Horizontal
2509.8	-38.32	11.2	-27.12	-13	Vertical
3346.4	-31.64	12.6	-19.04	-13	Horizontal
3346.4	-38.21	12.6	-25.61	-13	Vertical

Note: Below 30MHZ no Spurious found.

7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	19	0.023
3.7	20	0.024
4.2	21	0.025

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	42	0.050
0	46	0.055
10	35	0.042
20	24	0.029
30	28	0.033
40	36	0.043
50	40	0.048

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GSM 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	25	0.013
3.7	31	0.016
4.2	32	0.017

Frequency Error Against Temperature for GSM 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	37	0.020
0	23	0.012
10	26	0.014
20	32	0.017
30	35	0.019
40	41	0.022
50	47	0.025

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	27	0.014
3.7	23	0.012
4.2	33	0.018

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	45	0.024
0	36	0.019
10	28	0.015
20	25	0.013
30	35	0.019
40	37	0.020
50	42	0.022

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	24	0.029
3.7	22	0.026
4.2	25	0.030

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	34	0.041
0	33	0.039
10	28	0.033
20	32	0.038
30	27	0.032
40	35	0.042
50	43	0.051

Note: The EUT doesn't work below -10°C


8. BANDWIDTH

8.1 APPLICABLE STANDARD

FCC §2.1049, §22.917, §22.905 and §24.238.

8.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.
3. Details according with KDB 971168 section 4.1 & 4.2.

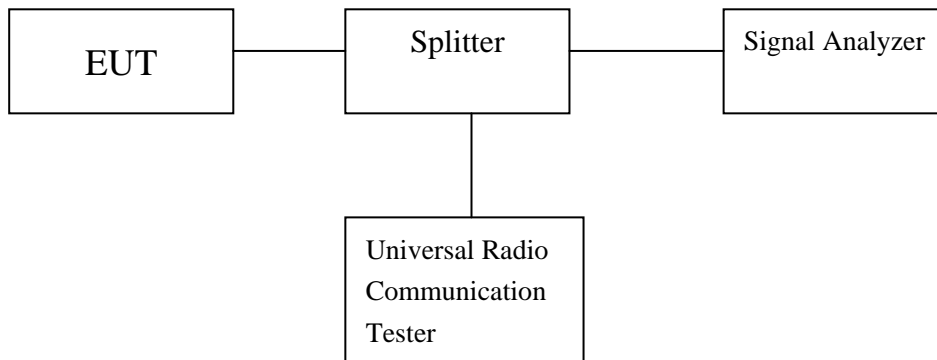

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	249.975
Middle Channel	836.6	248.754
High Channel	848.8	246.527

Occupied Bandwidth (99%) for GSM1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	240.753
Middle Channel	1880.0	246.764
High Channel	1909.8	248.611

Occupied Bandwidth (99%) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.164
Middle Channel	1880.0	4.164
High Channel	1907.6	4.165

Occupied Bandwidth (99%) for UMTS band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.190
Middle Channel	836.4	4.173
High Channel	846.6	4.176

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	322.118
Middle Channel	836.6	317.744
High Channel	848.8	320.466

Emission Bandwidth (-26dBc) for GSM1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	318.753
Middle Channel	1880.0	316.821
High Channel	1909.8	318.573

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.719
Middle Channel	1880.0	4.697
High Channel	1907.6	4.717

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.730
Middle Channel	836.4	4.734
High Channel	846.6	4.719

9. BAND EDGE


9.1 Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. Details according with KDB 971168 section 6.0.

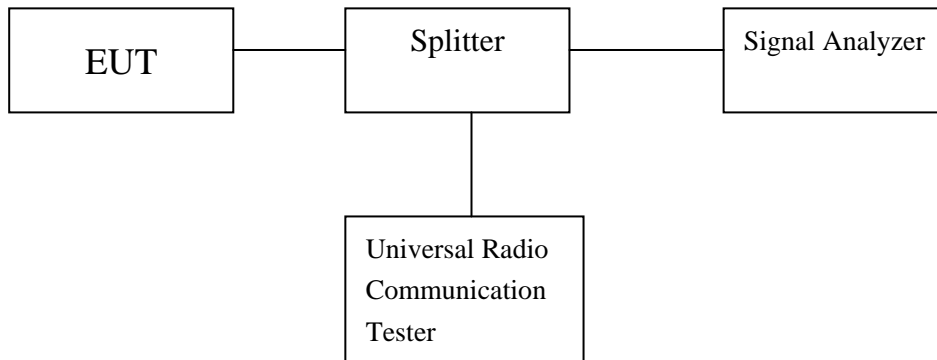

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges

10. Peak-to-Average Ratio

DESCRIPTION OF THE PAR MEASUREMENT

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


10.1 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

10.2 TEST PROCEDURES

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

10.3 TEST SETUP

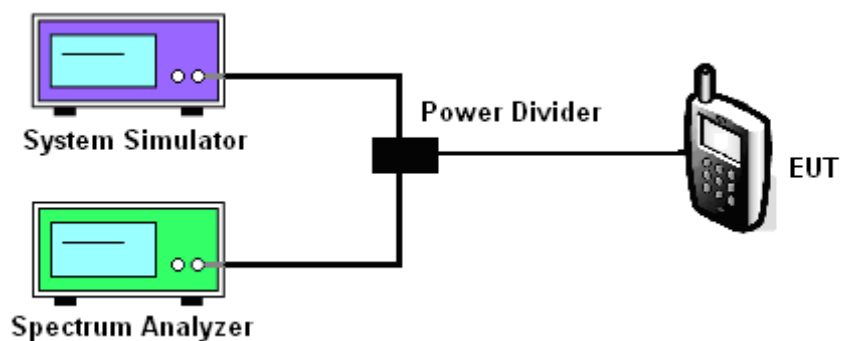


10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO


Cellular Band						
Modes	GSM850(GSM)			GSM1900(GSM)		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.03	0.01	0.01	0.03	0.02	0.03
Cellular Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	3.50	3.32	3.41	3.21	3.37	3.29

APPENDIX I
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION


CONDUCTED EMISSION IN GSM 850 BAND
 Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

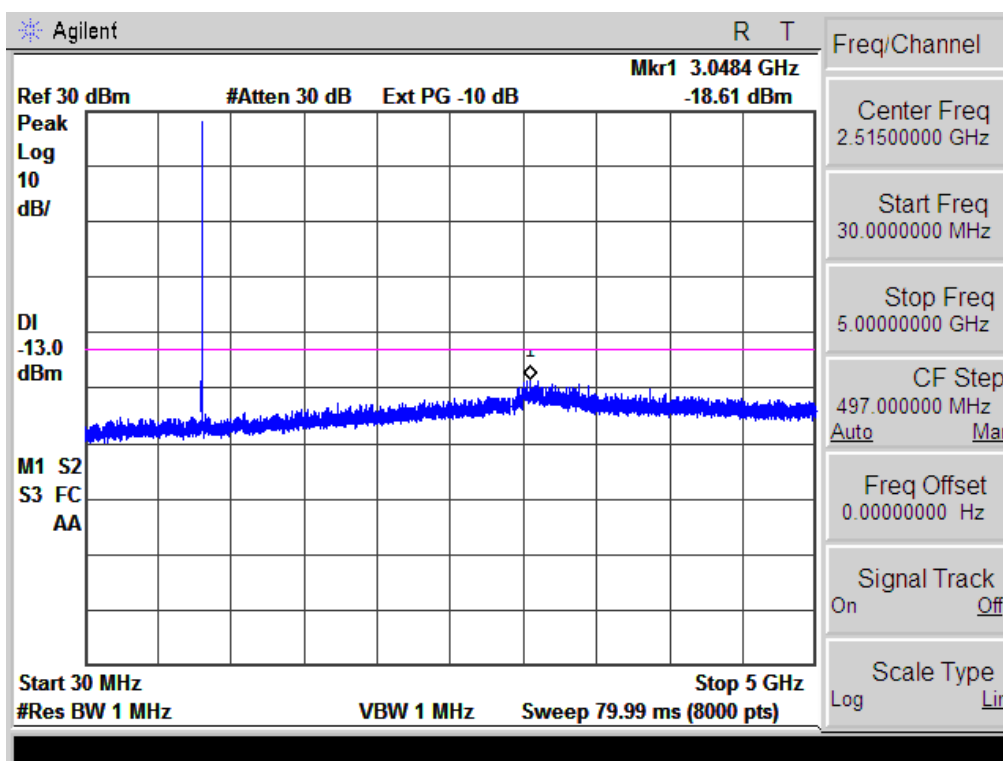


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

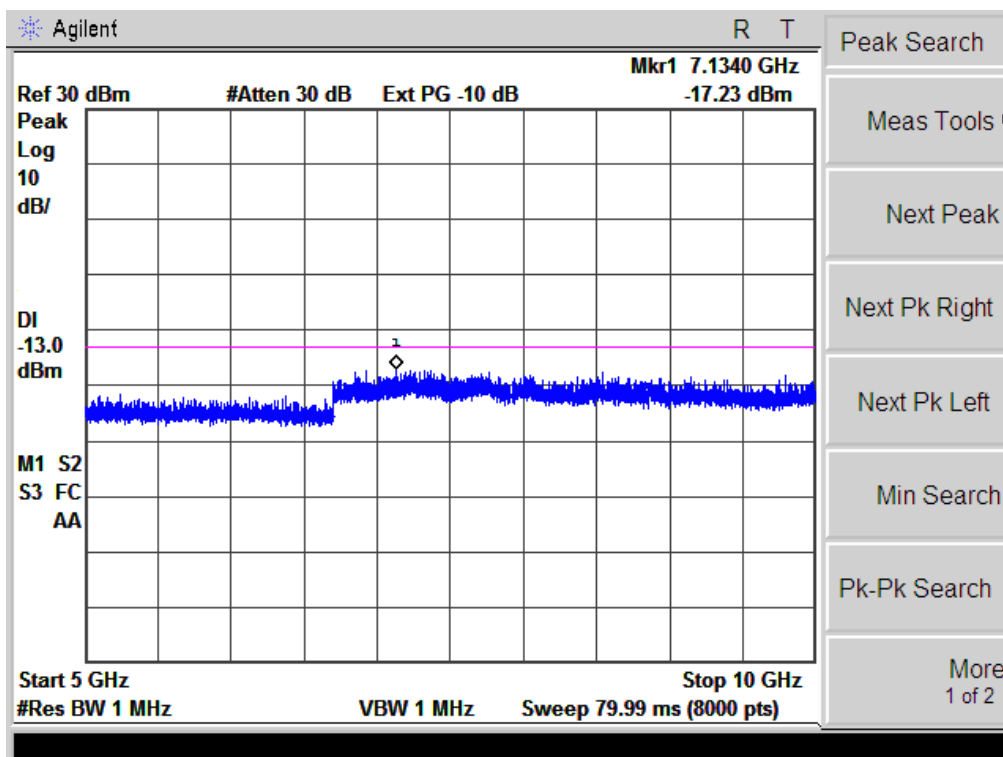


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

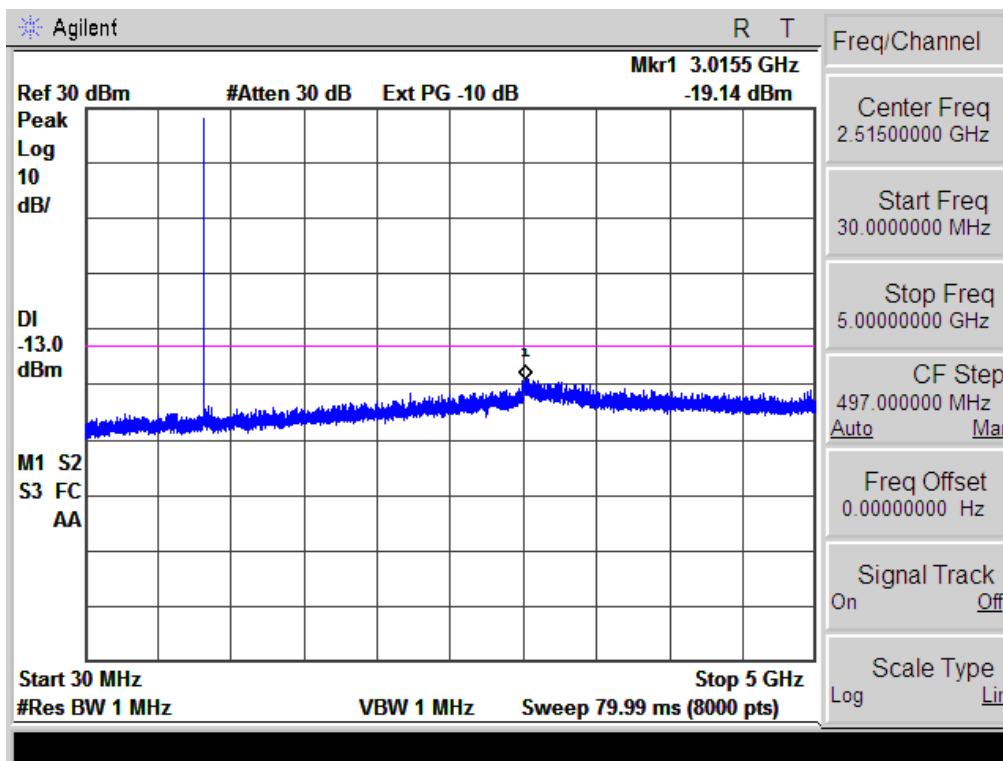


Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

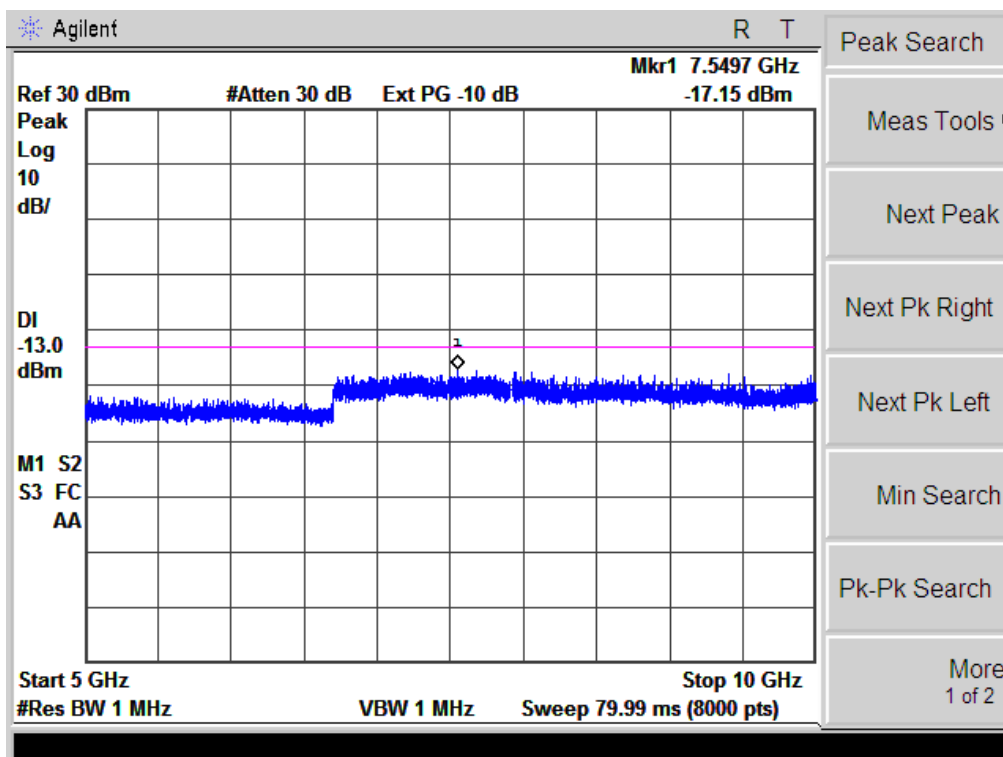


Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

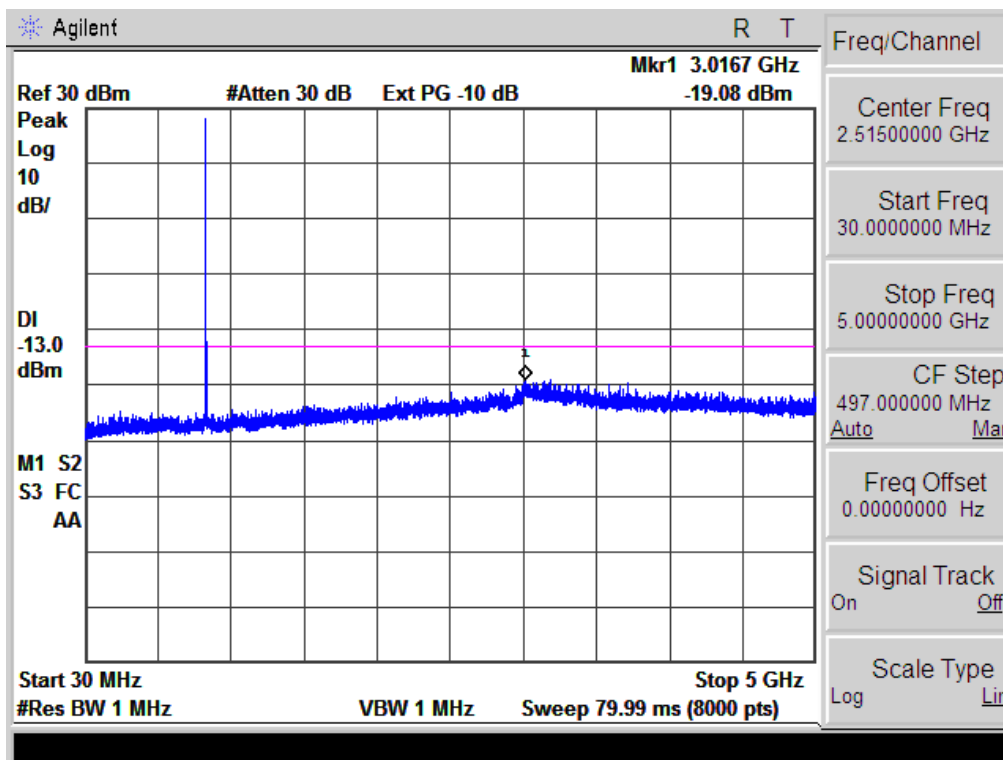


Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

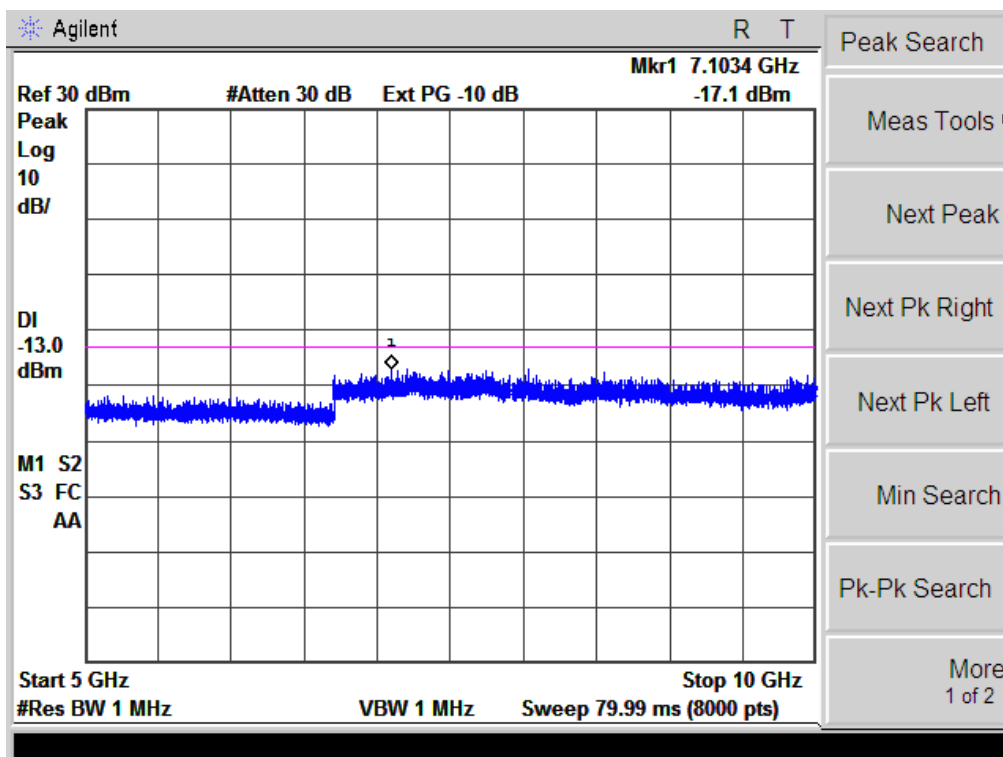


CONDUCTED EMISSION IN GSM1900 BAND
 Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

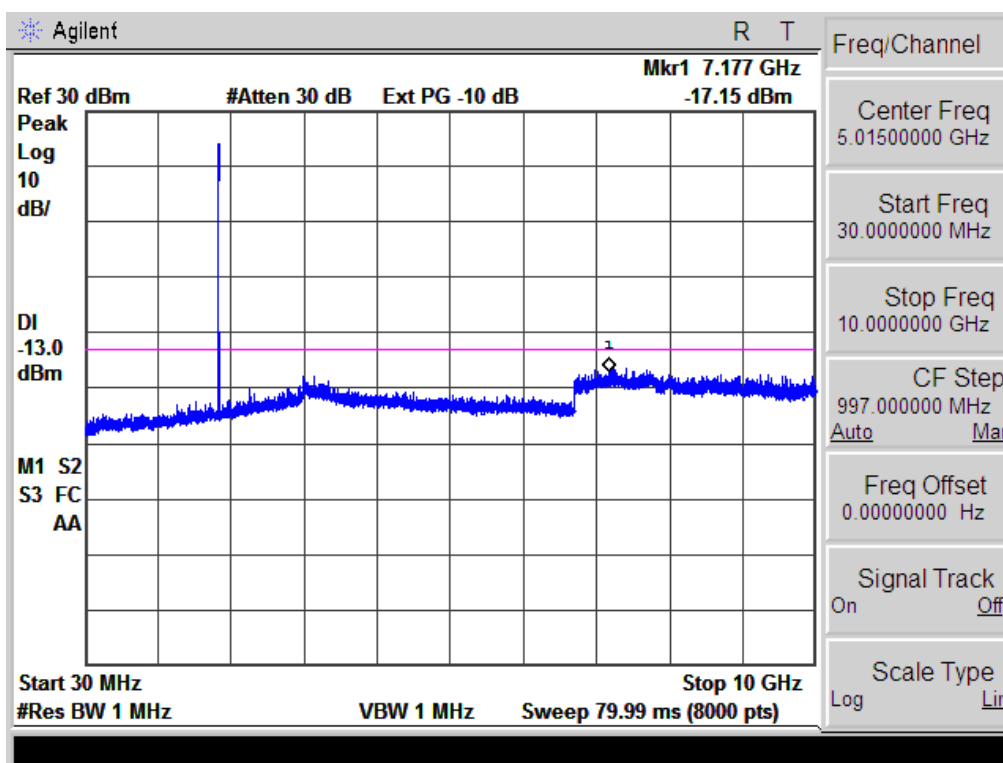


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

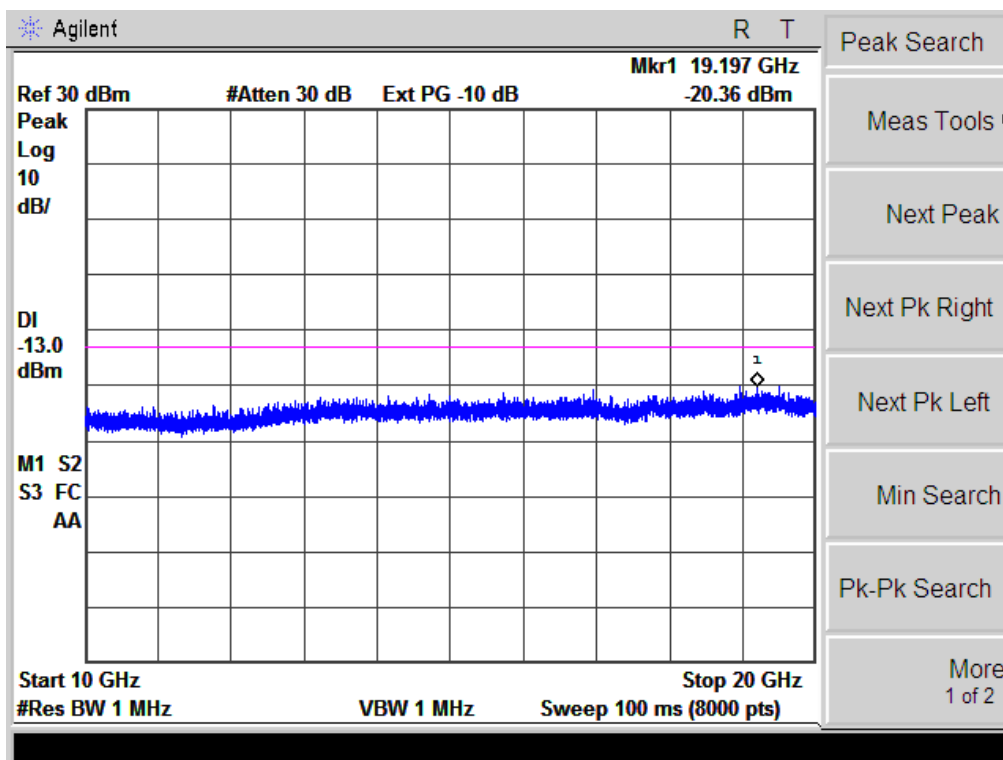


Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

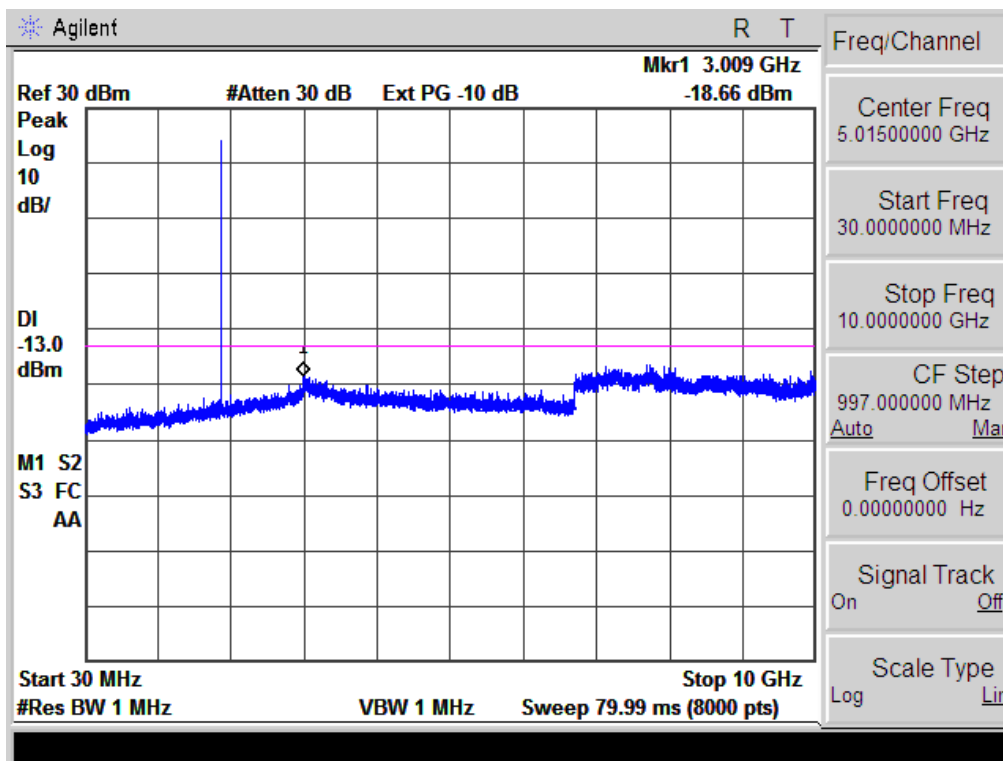


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

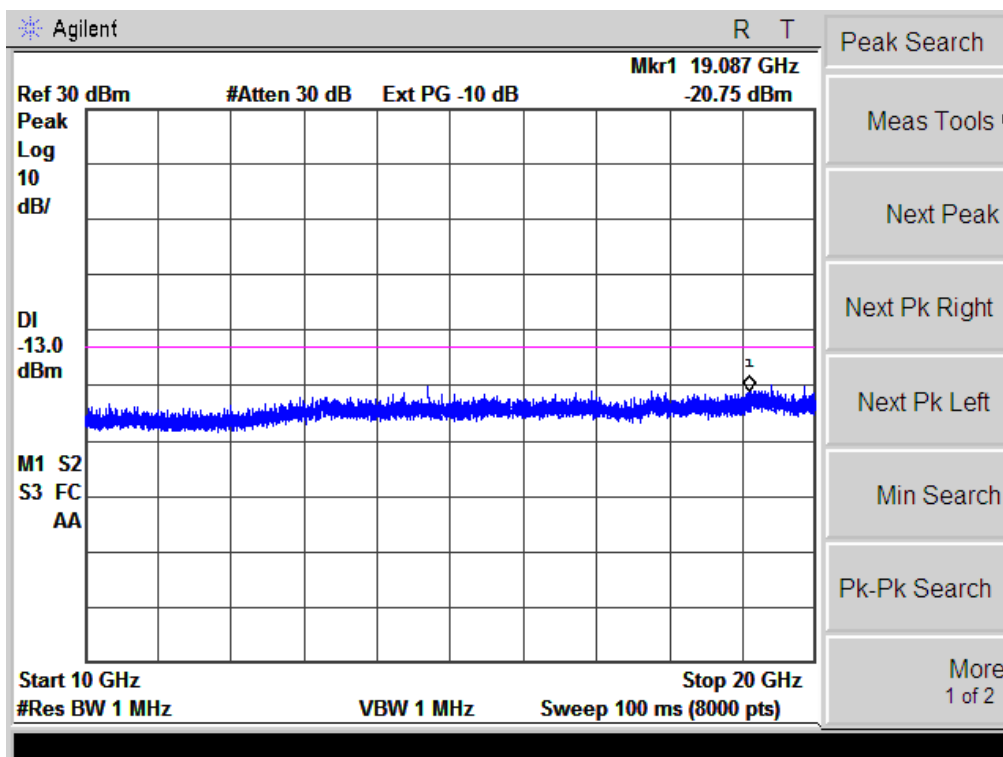


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

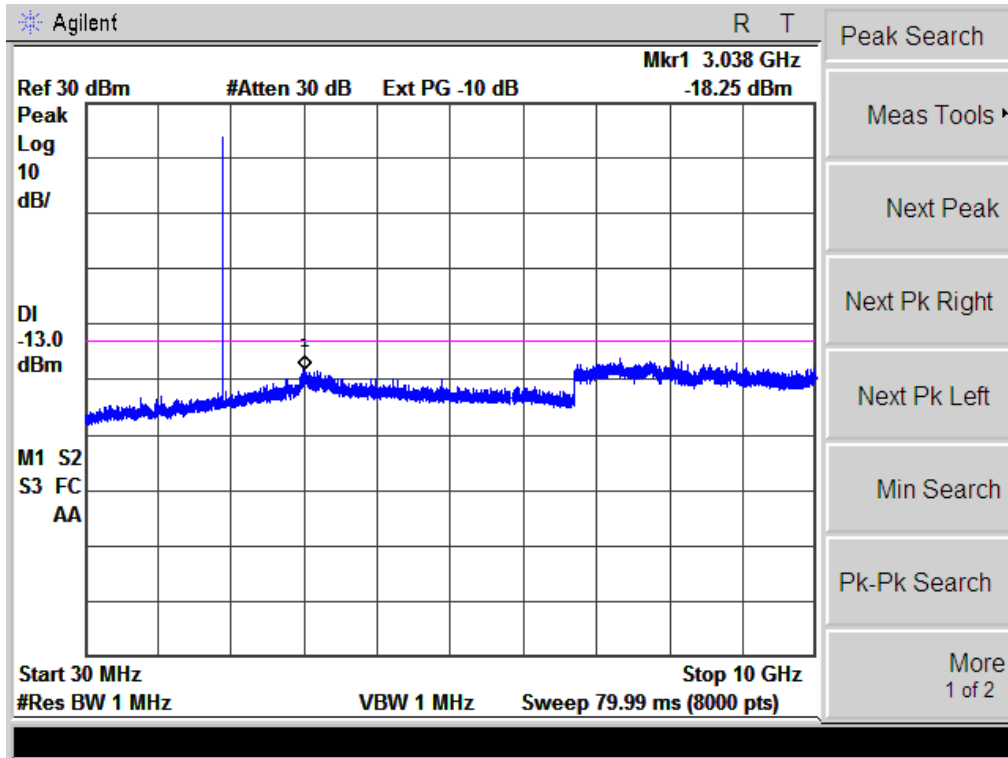


Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

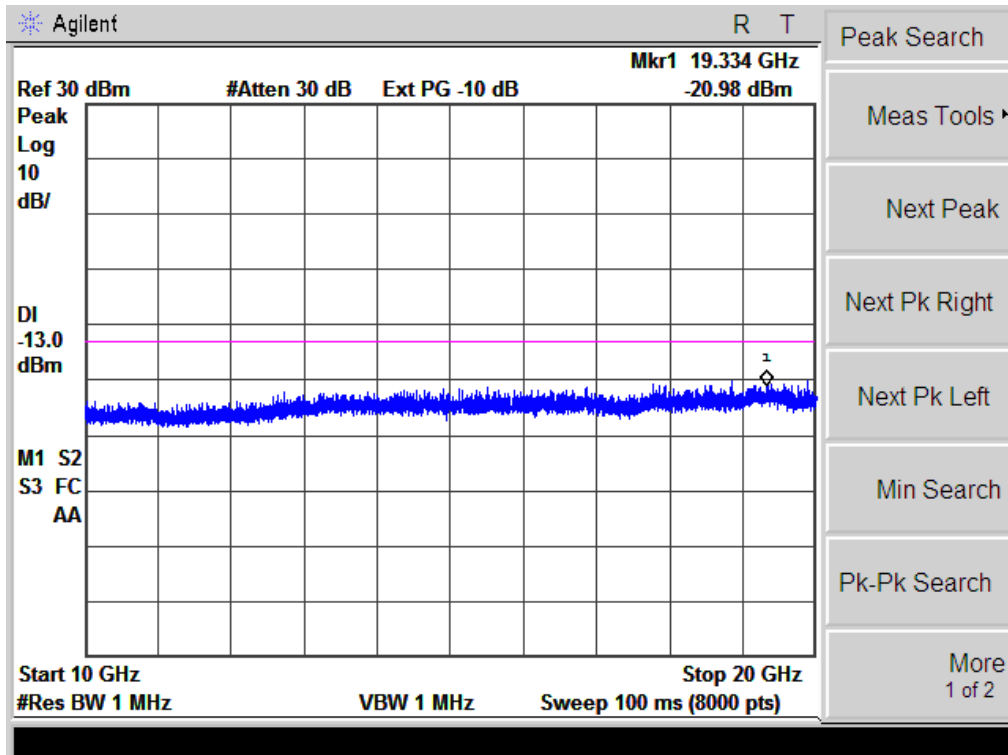


CONDUCTED EMISSION IN UMTS band II
Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz

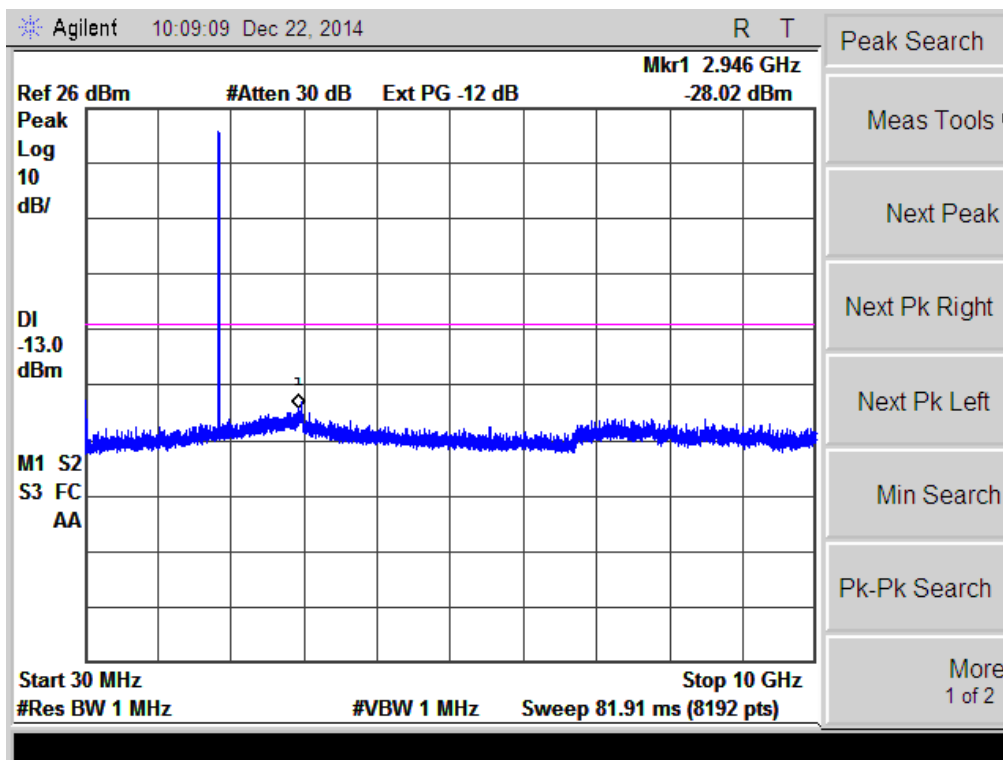


Conducted Emission Transmitting Mode CH 9262 10GHz – 20GHz

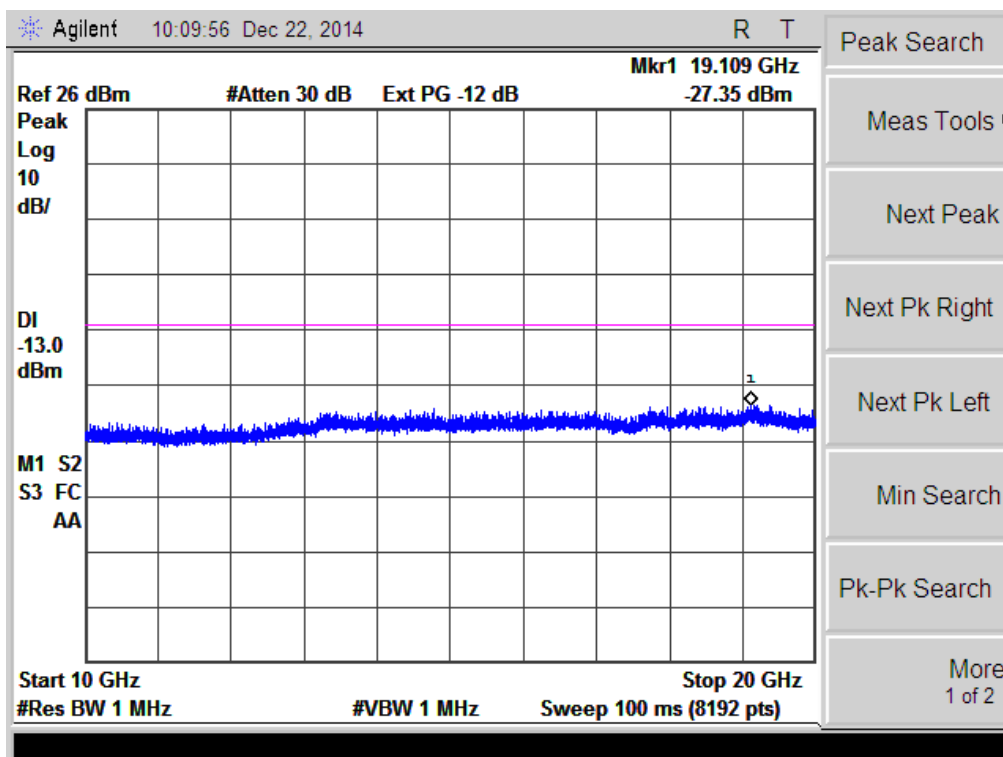


Conducted Emission Transmitting Mode CH 9400 30MHz – 10GHz

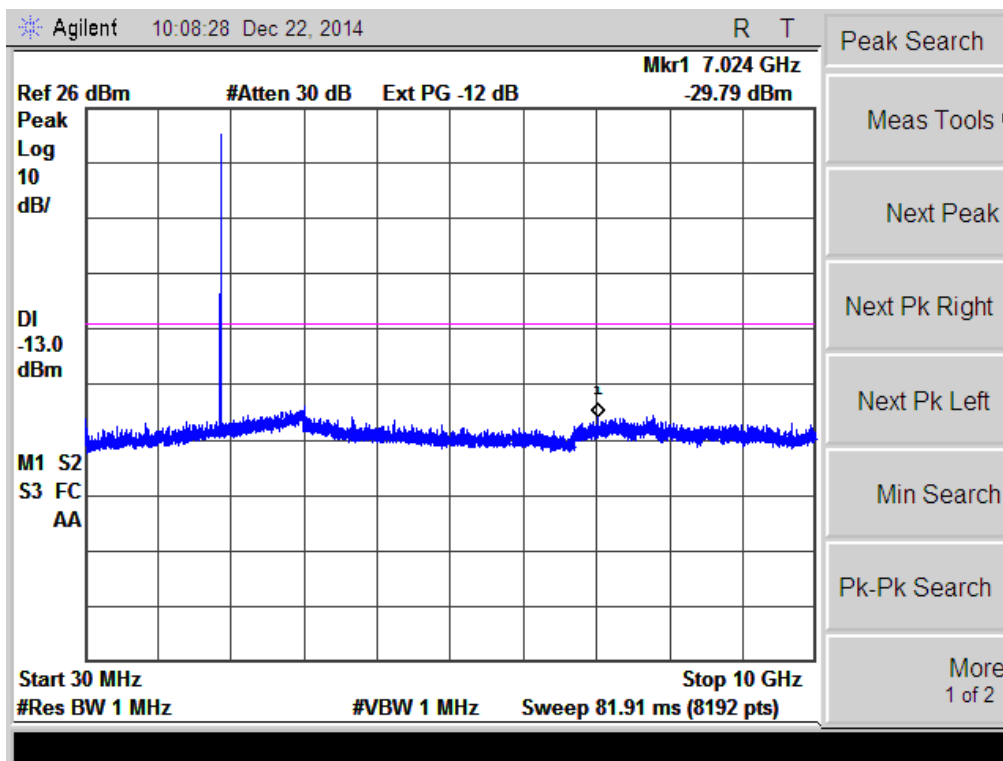


Conducted Emission Transmitting Mode CH 9400 10GHz – 20GHz

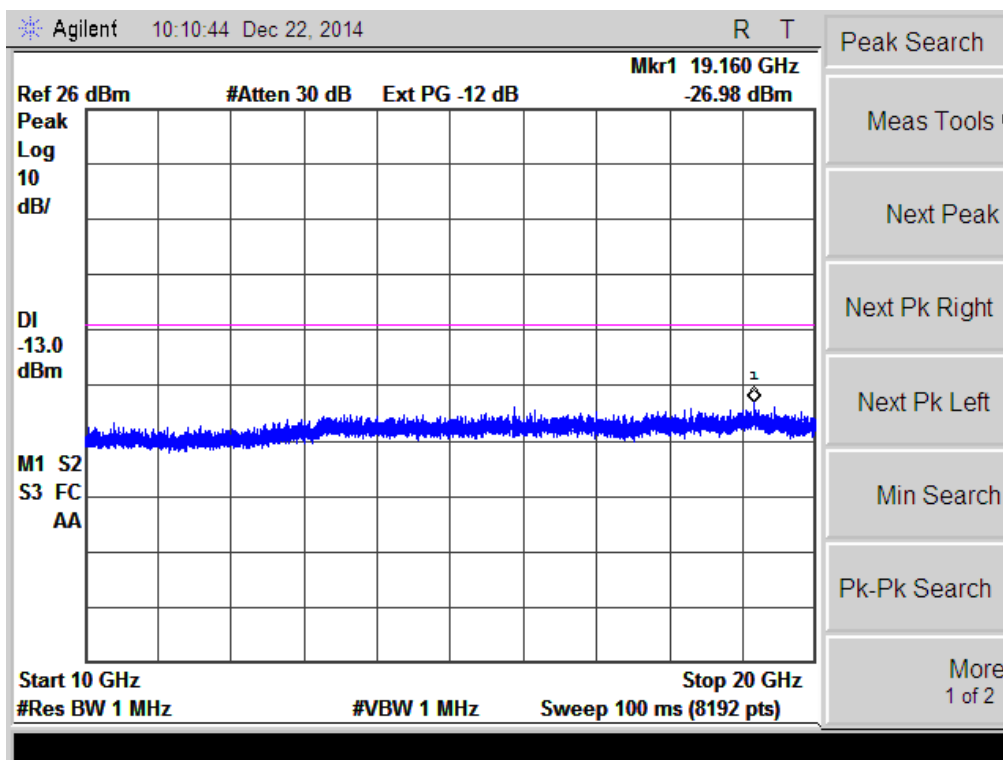


Conducted Emission Transmitting Mode CH 9538 30MHz – 10GHz

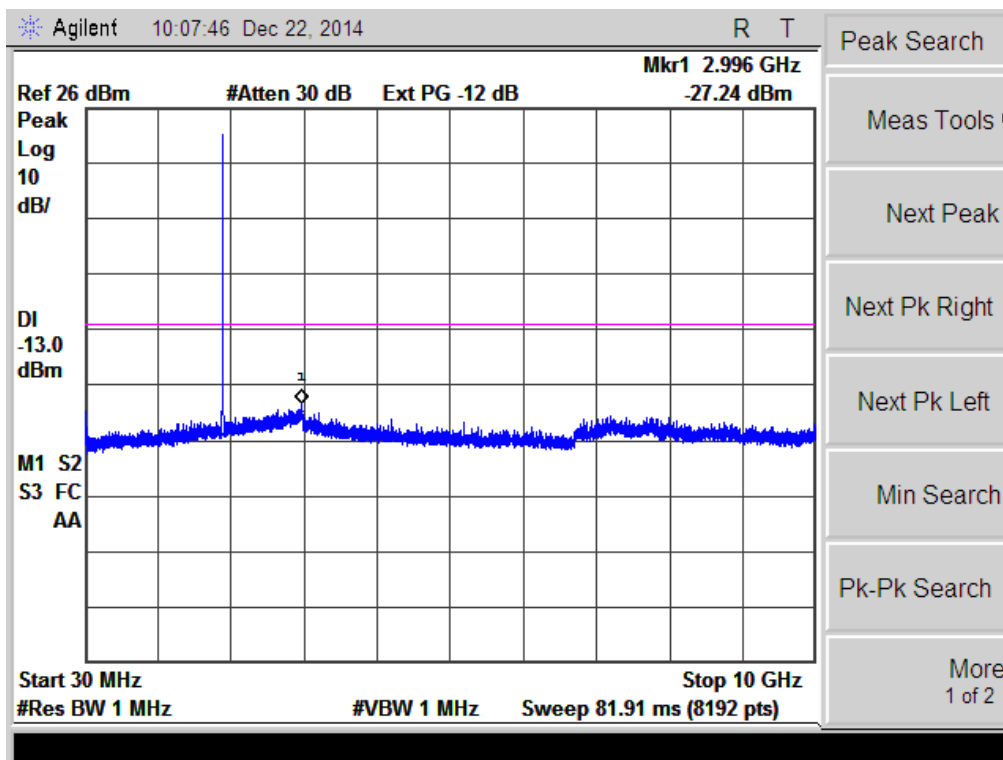


Conducted Emission Transmitting Mode CH 9538 10GHz – 20GHz

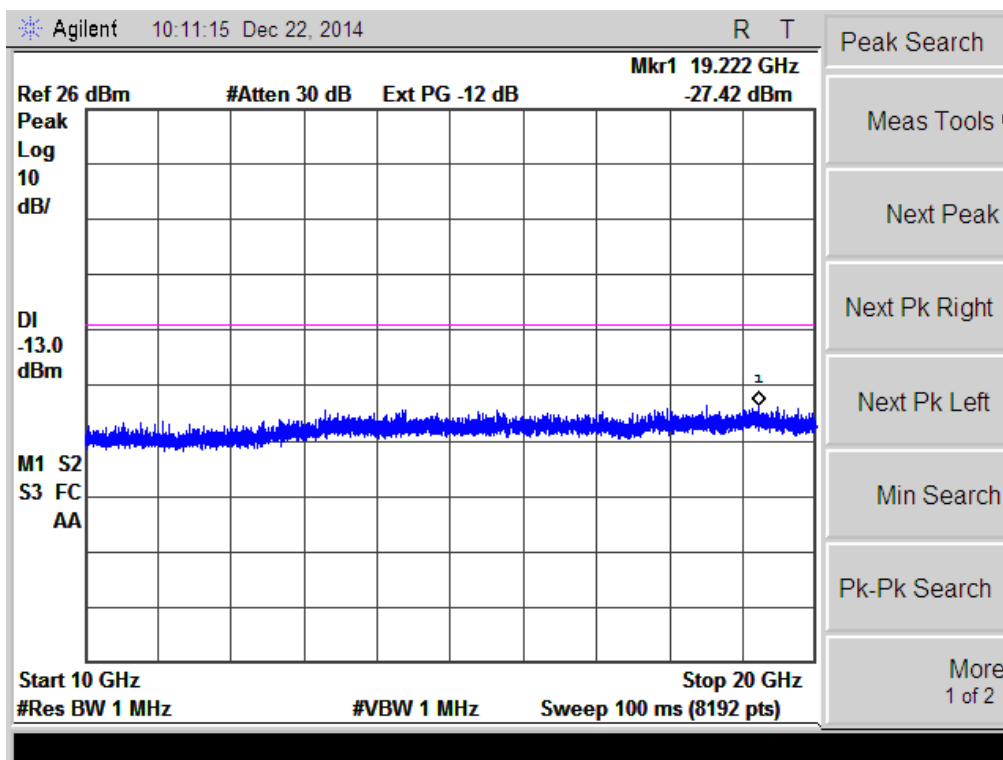


CONDUCTED EMISSION IN UMTS band V
Conducted Emission Transmitting Mode CH 4132 30MHz – 5GHz

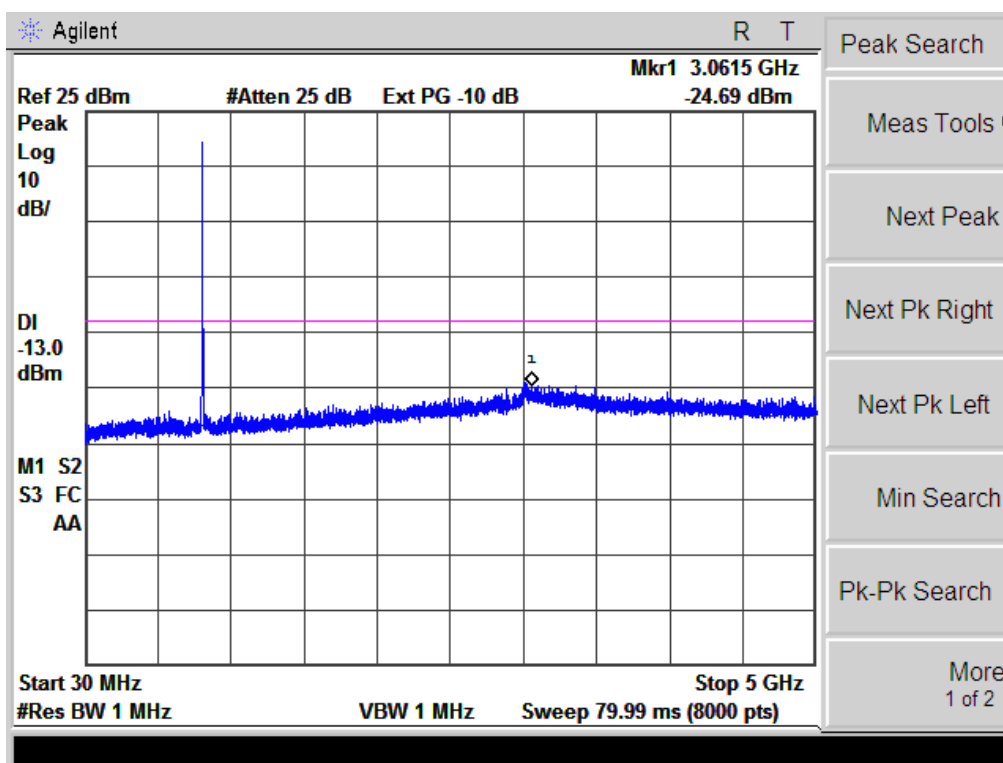


Conducted Emission Transmitting Mode CH 4132 5GHz – 10GHz

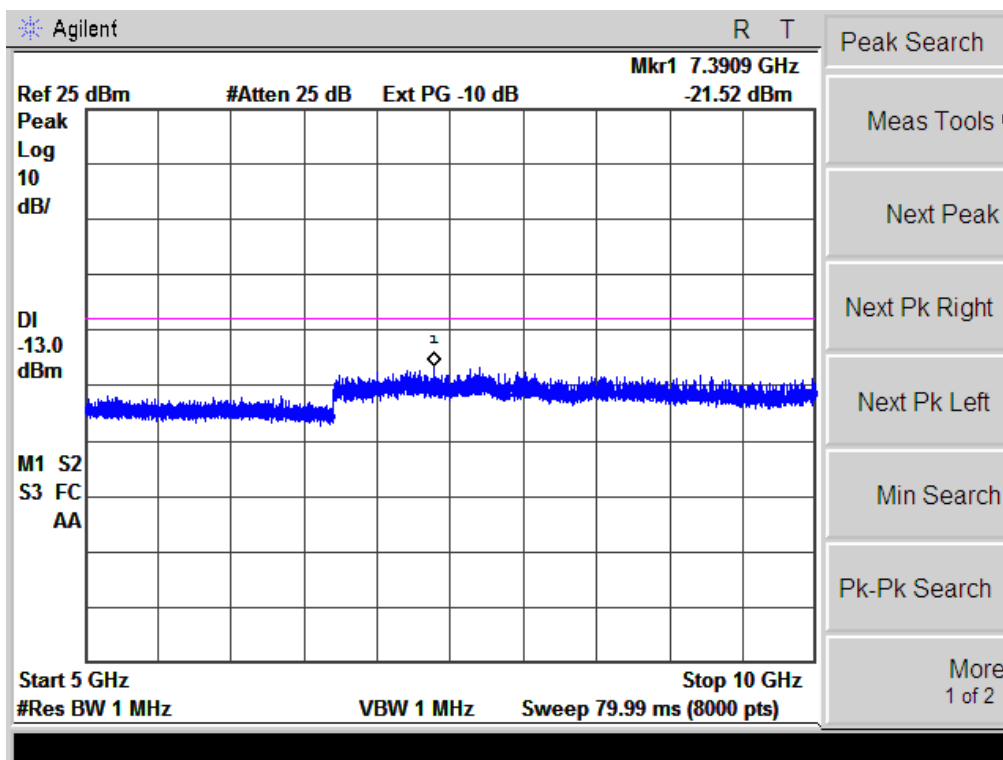


Conducted Emission Transmitting Mode CH 4183 30MHz –5GHz

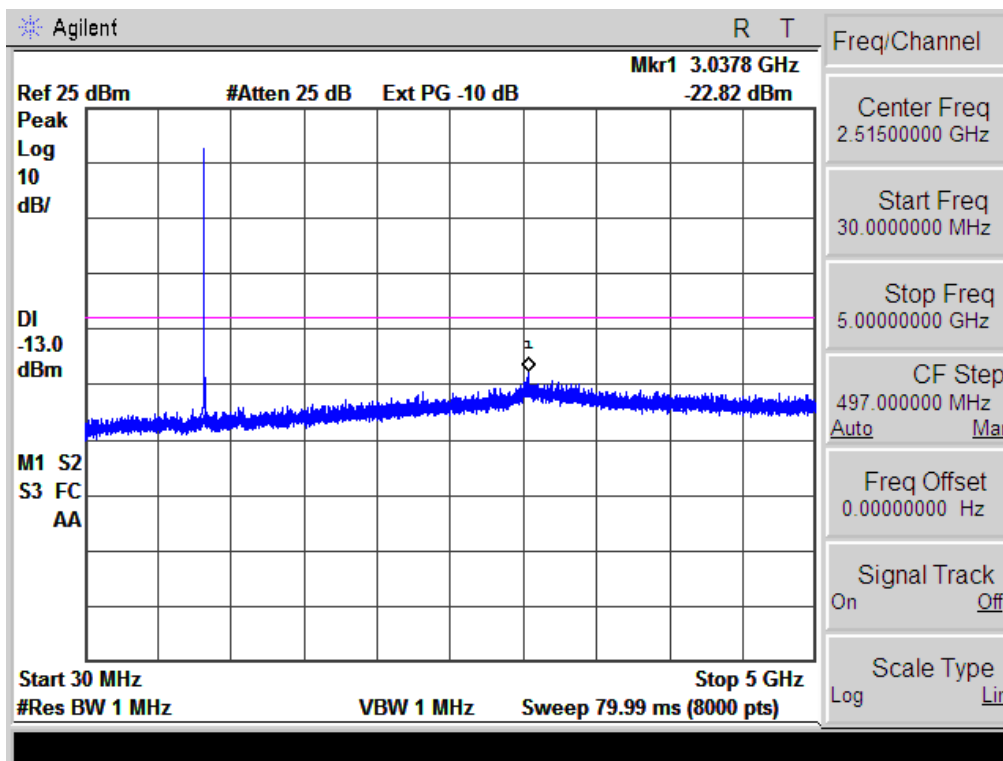


Conducted Emission Transmitting Mode CH 4183 5GHz – 10GHz

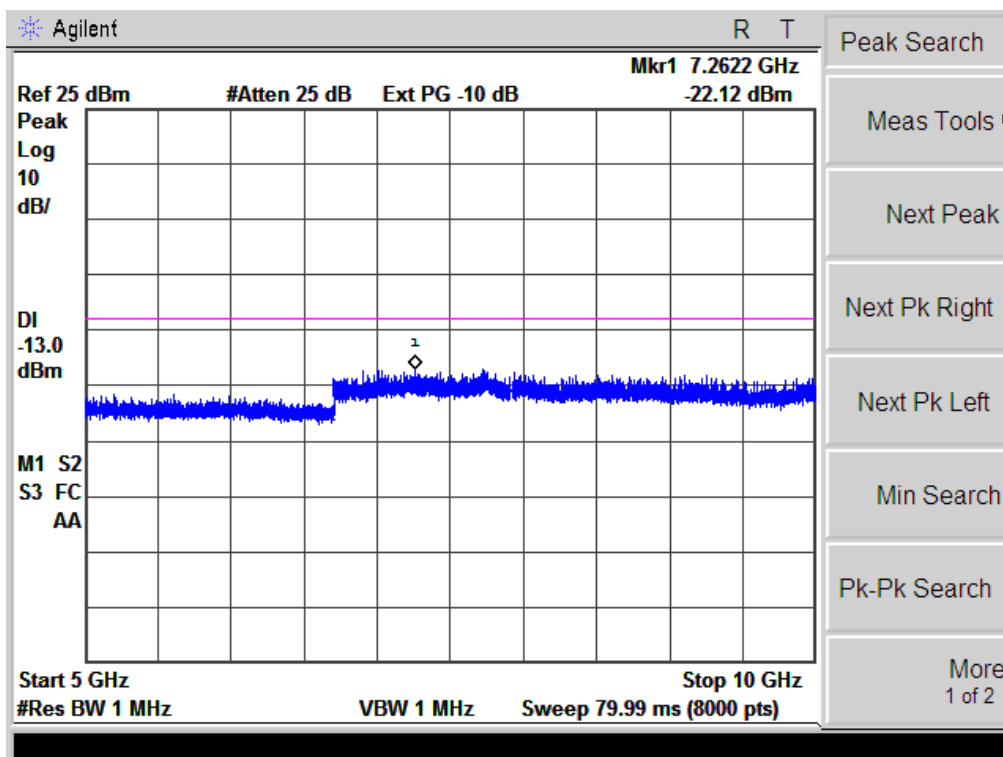

Conducted Emission Transmitting Mode CH 4233 30MHz – 5GHz

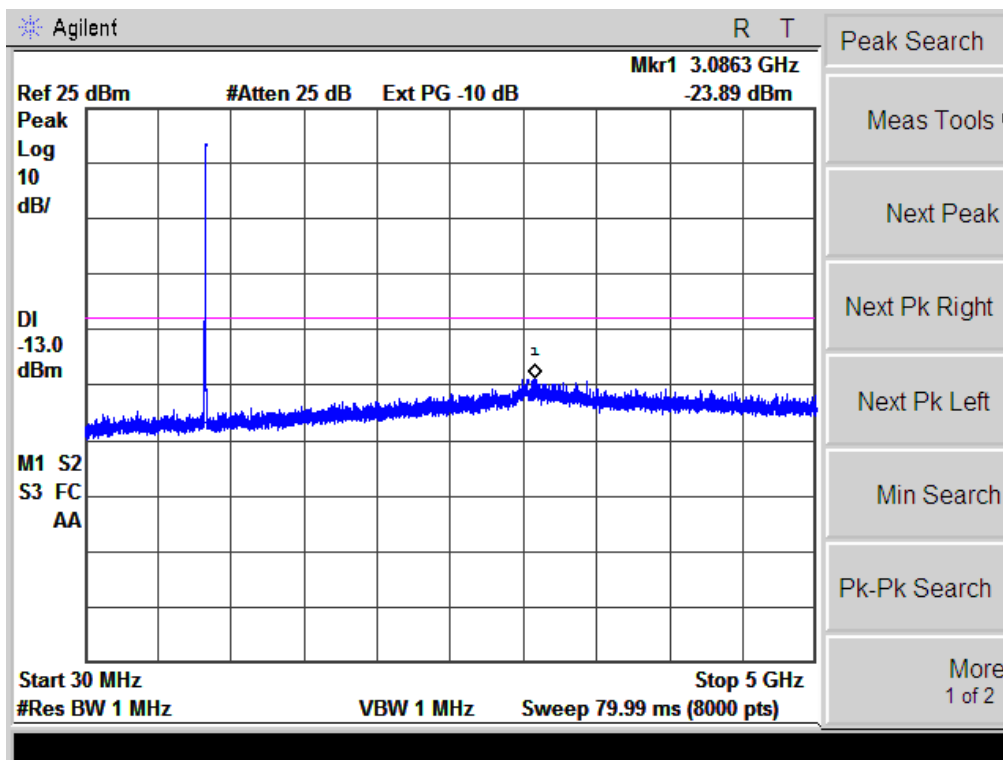


Conducted Emission Transmitting Mode CH 4233 5GHz – 10GHz

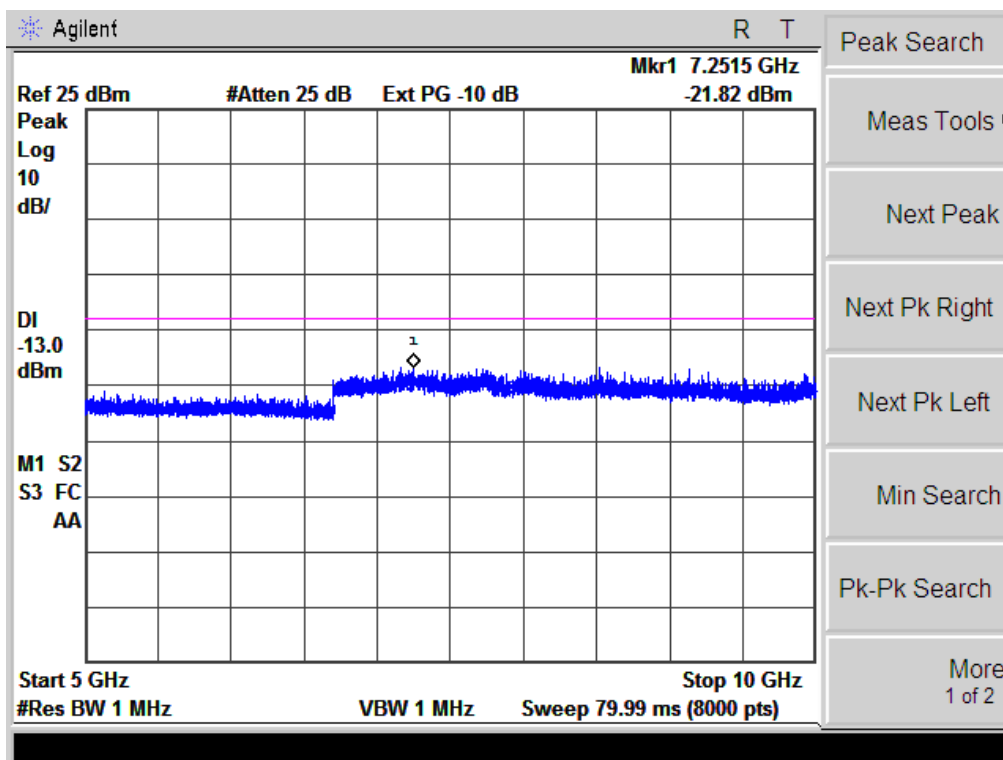


APPENDIX II
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)
EMISSION BANDWIDTH (-26dBC)


Occupied Bandwidth (99%) GSM 850 BAND CH 128

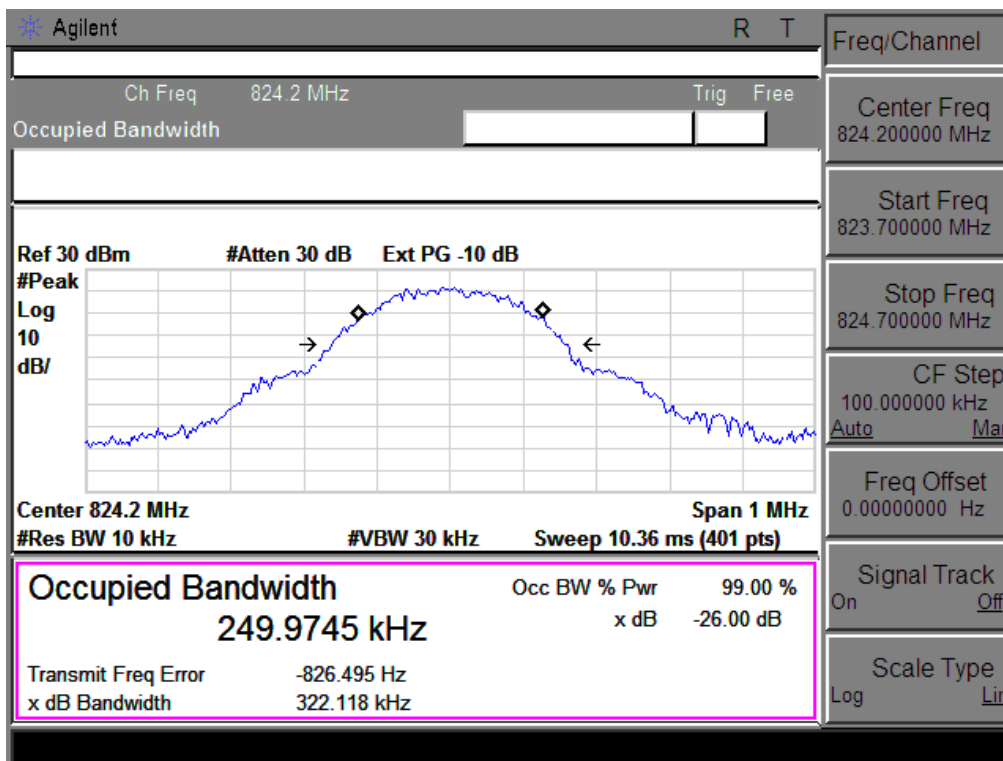


Occupied Bandwidth (99%) GSM 850 BAND CH 190

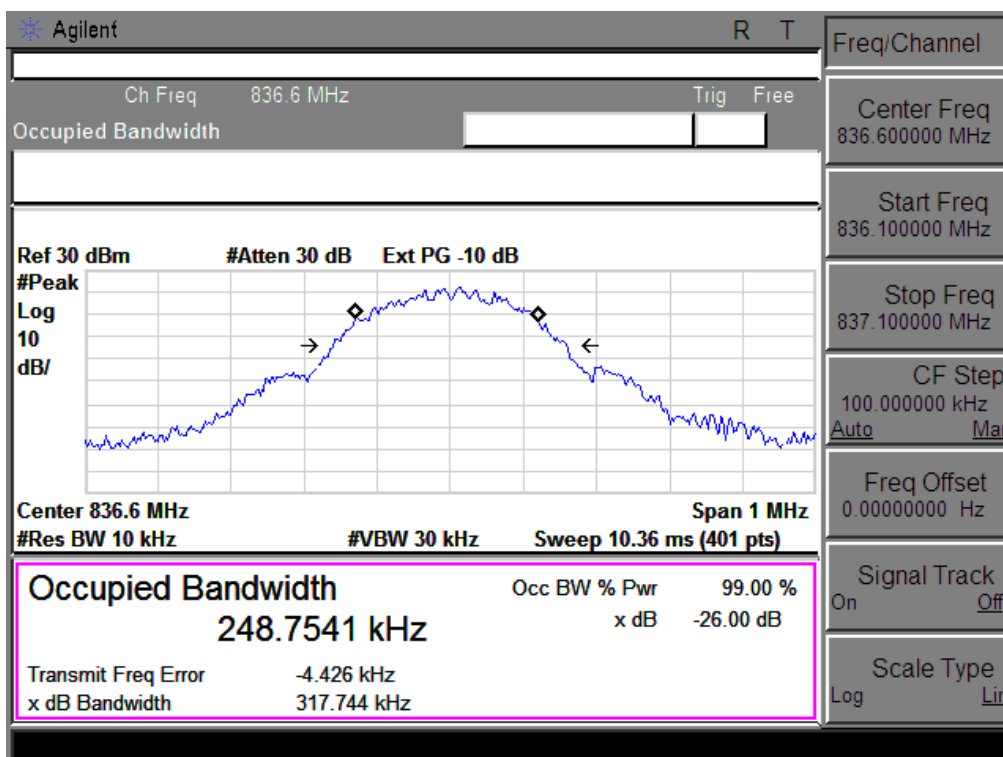


Occupied Bandwidth (99%) GSM 850 BAND CH 251

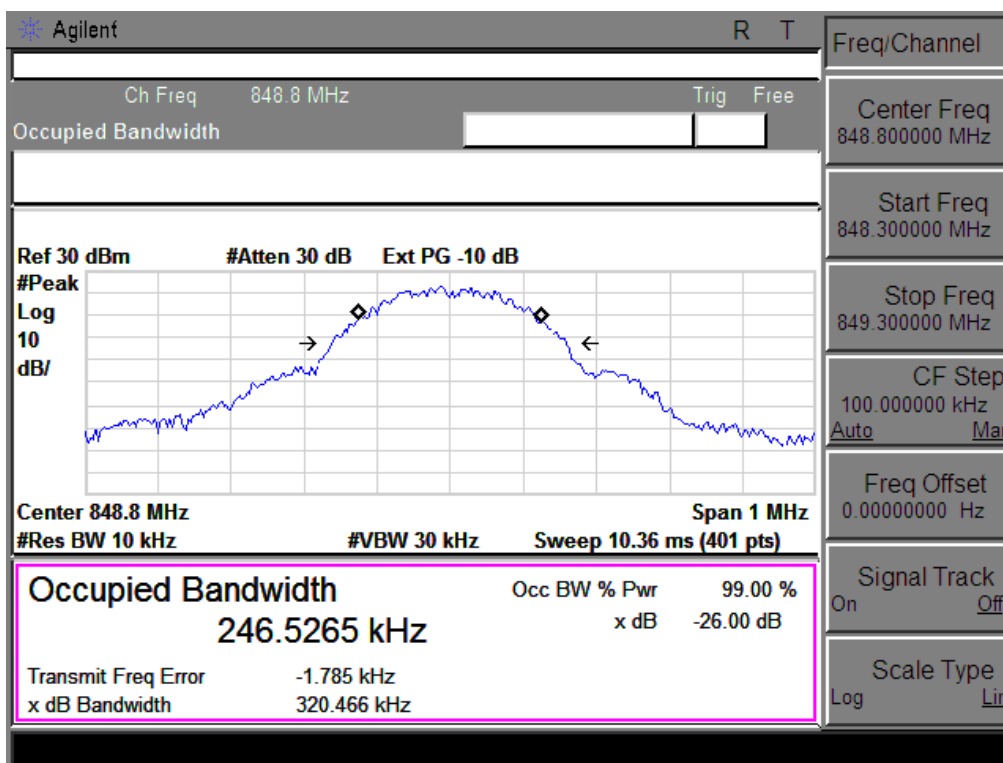


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

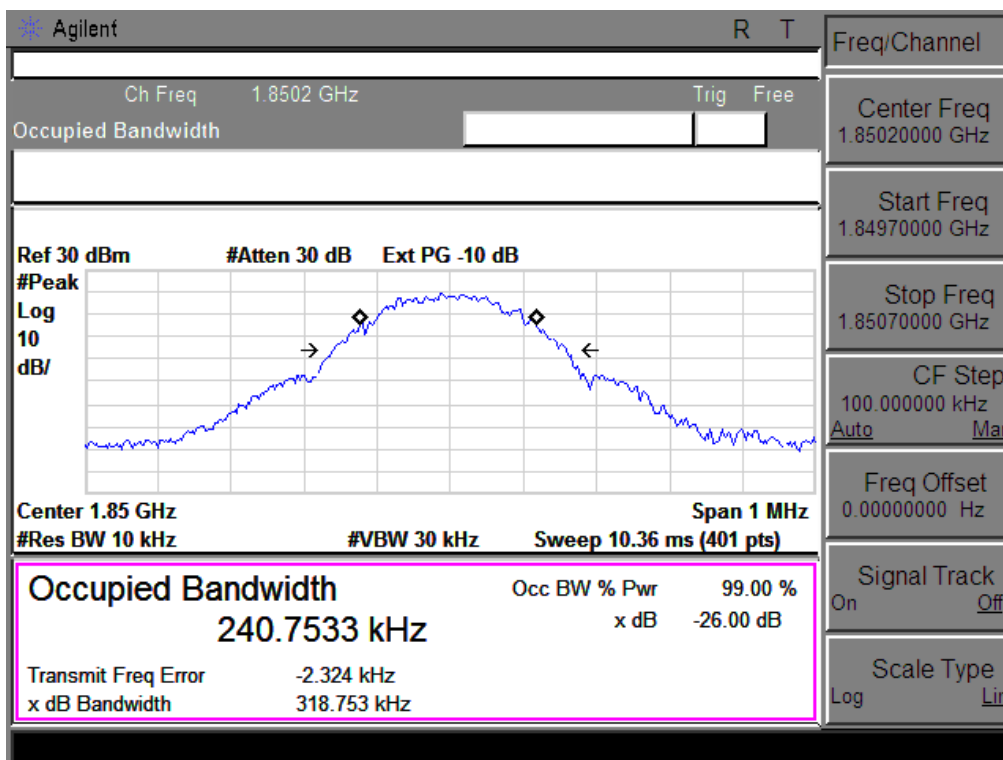


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

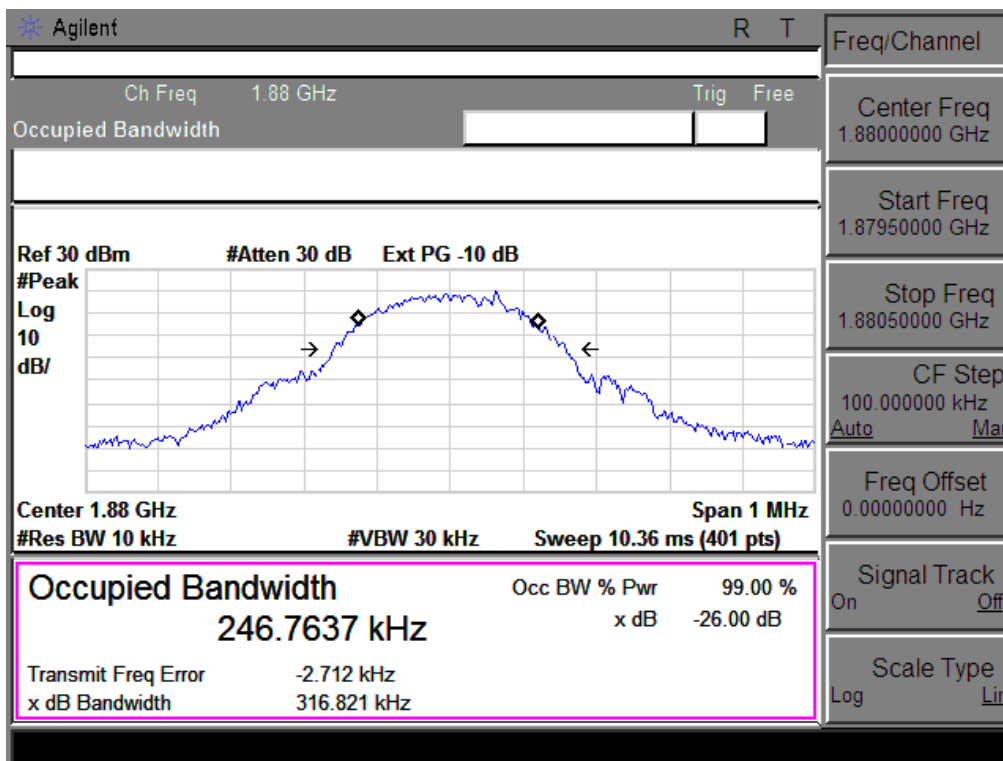


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

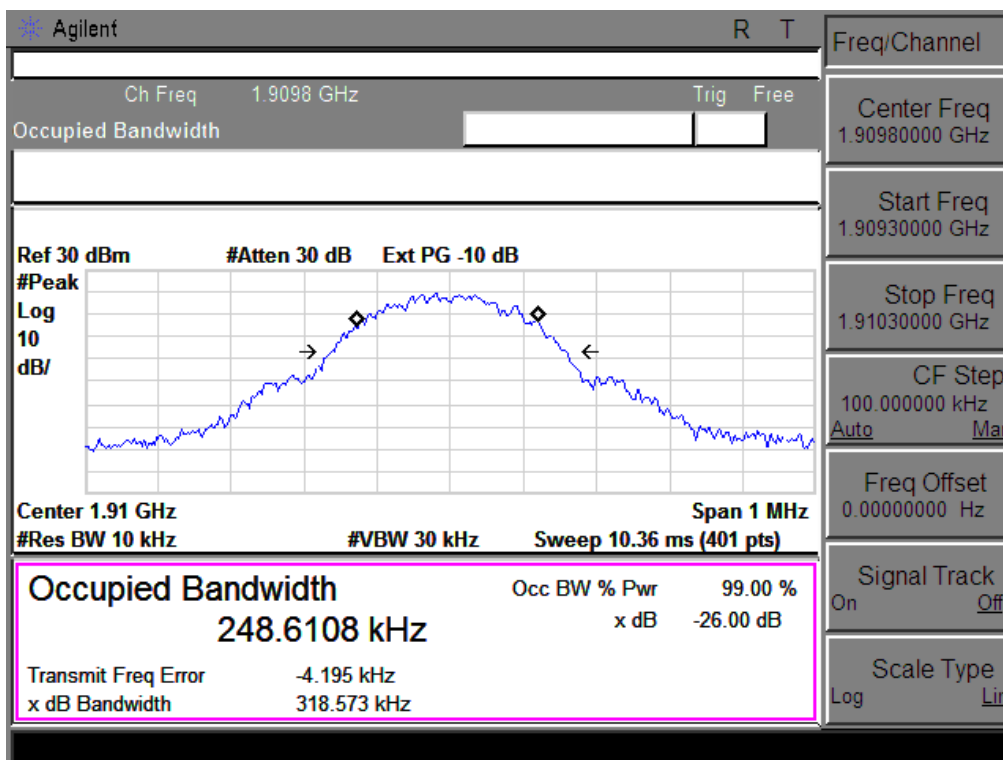


Occupied Bandwidth (99%) UMTS band II CH 9262

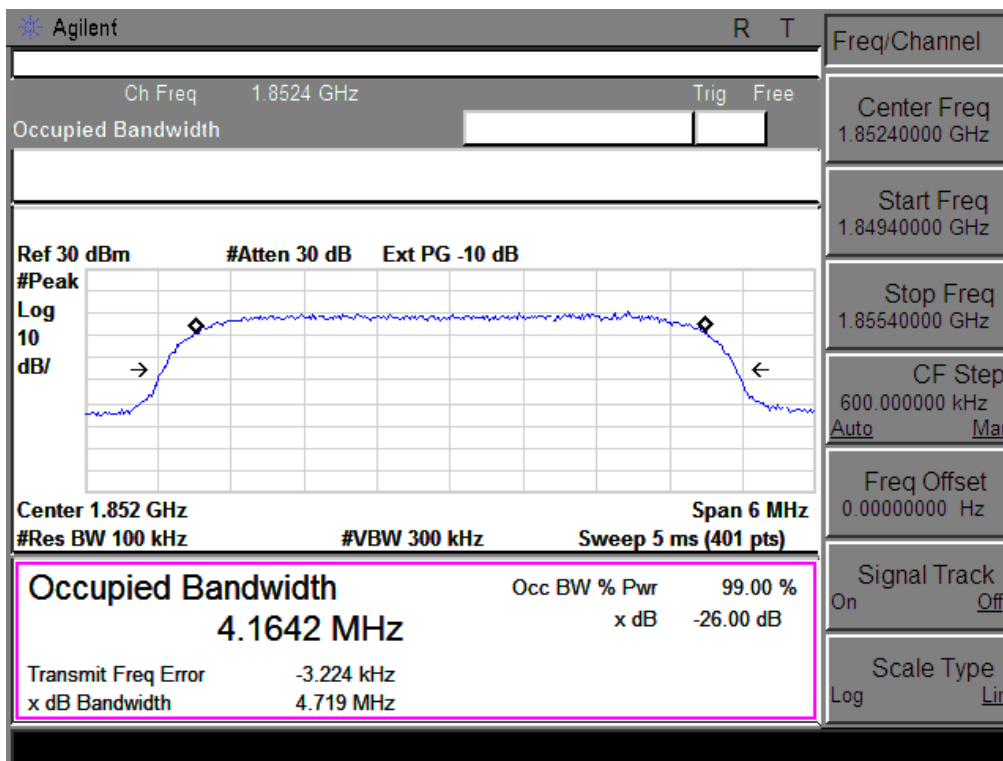


Occupied Bandwidth (99%) UMTS band II CH 9400

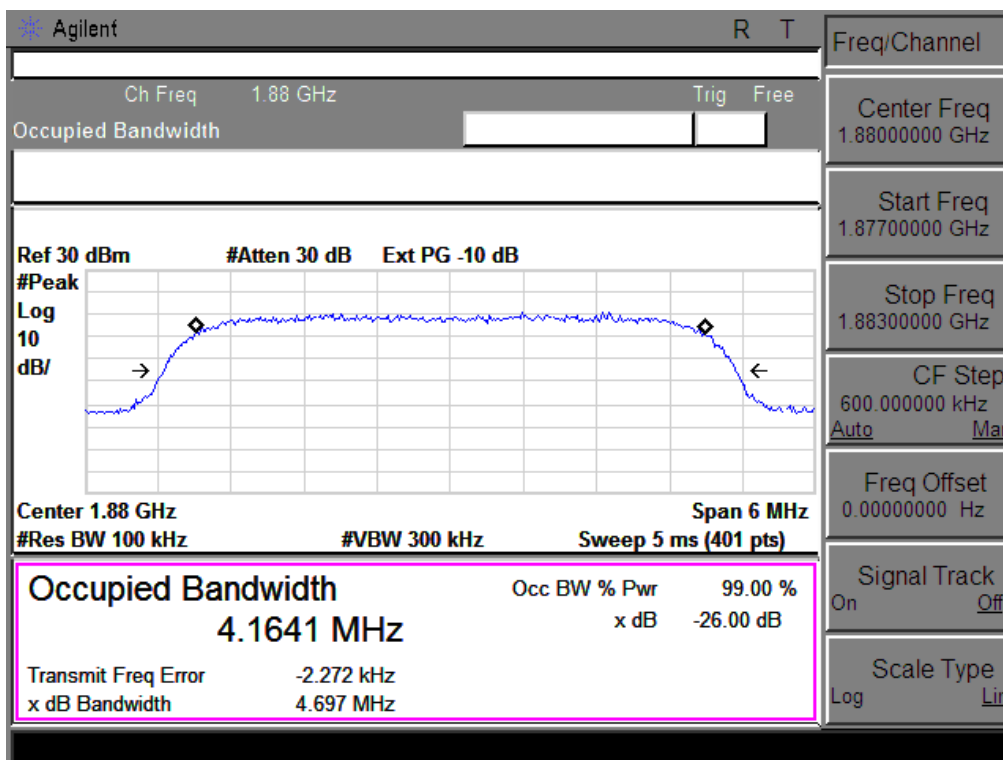


Occupied Bandwidth (99%) UMTS band II CH 9538

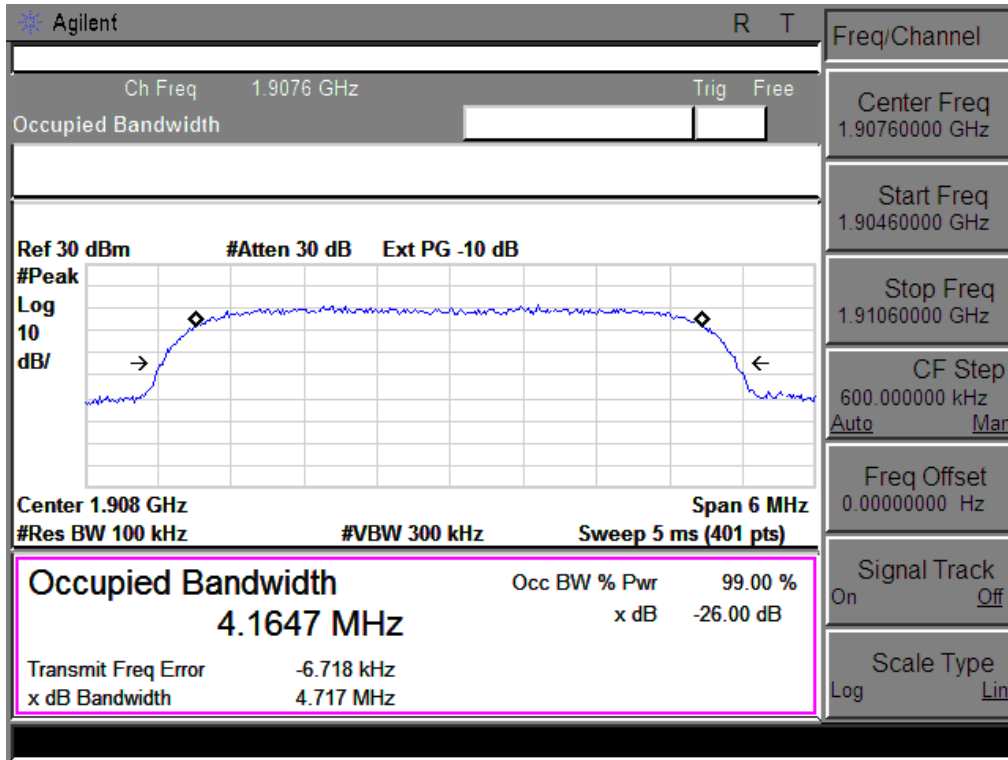


Occupied Bandwidth (99%) UMTS band V CH 4132

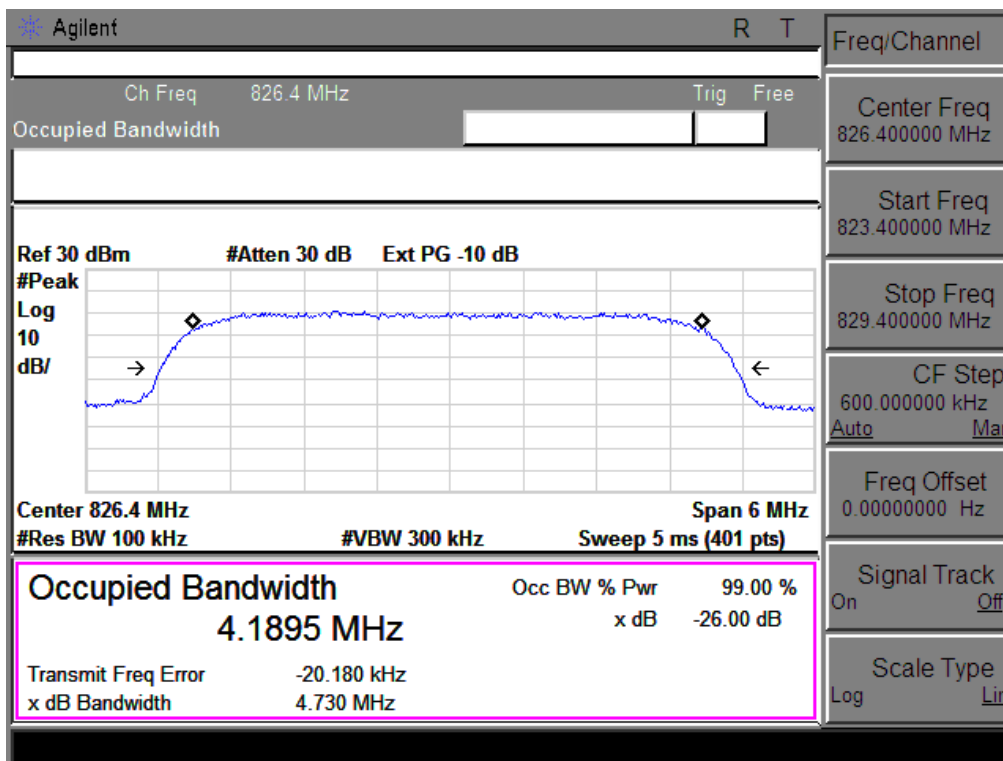

Occupied Bandwidth (99%) UMTS band V CH 4183

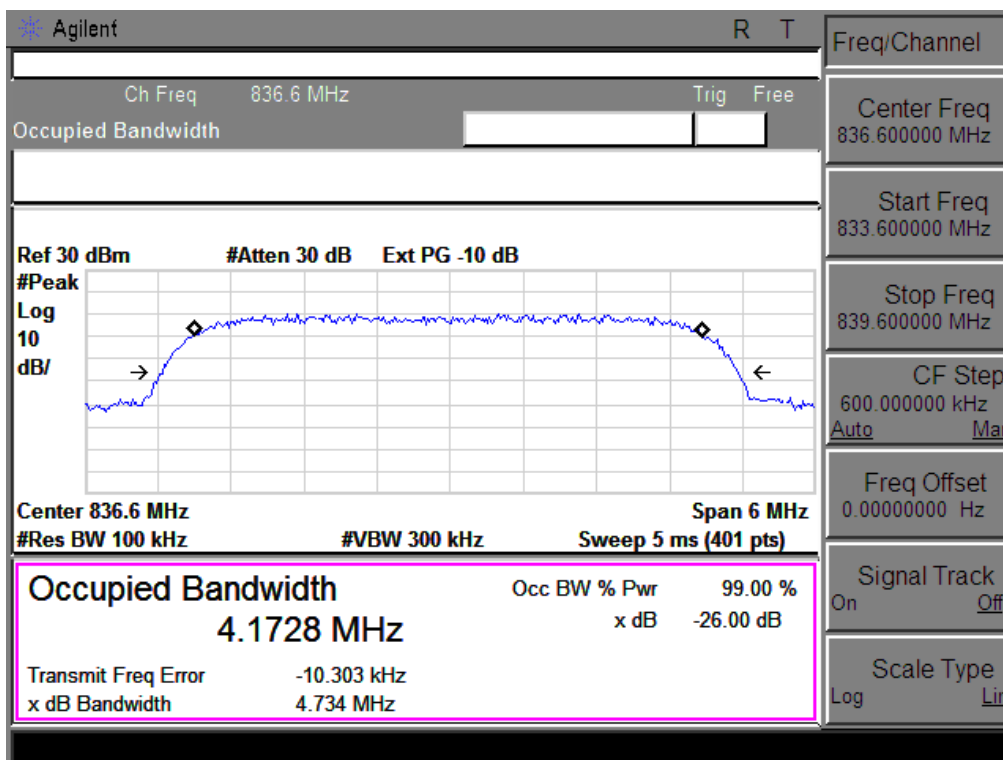


Occupied Bandwidth (99%) UMTS band V CH 4233

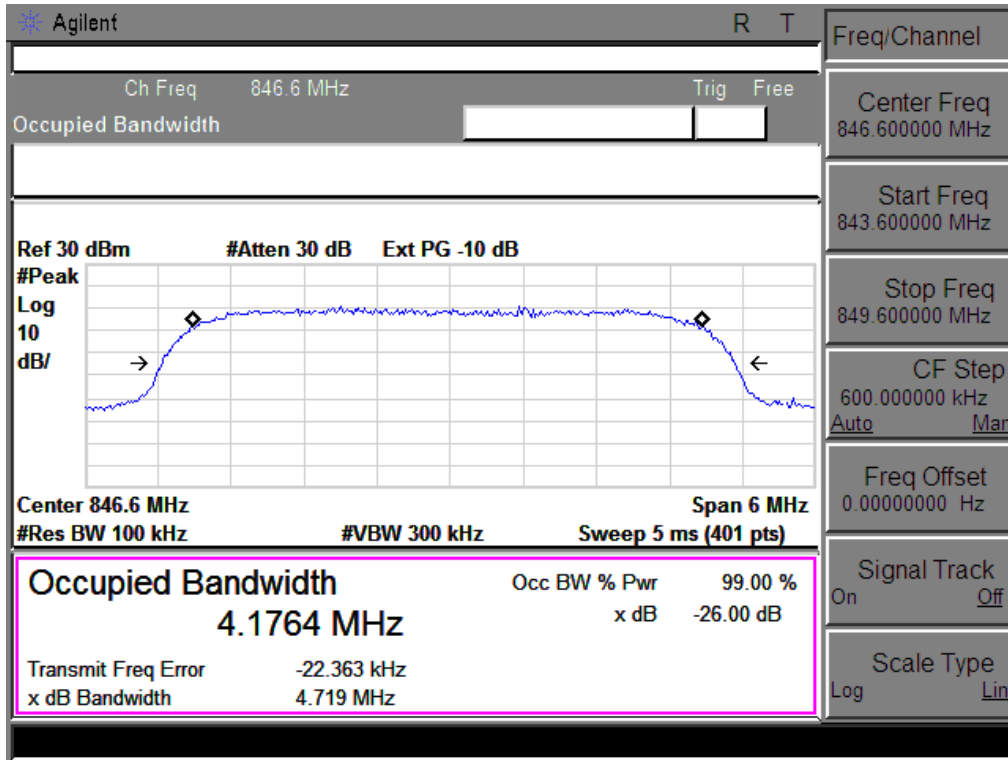


APPENDIX III
TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

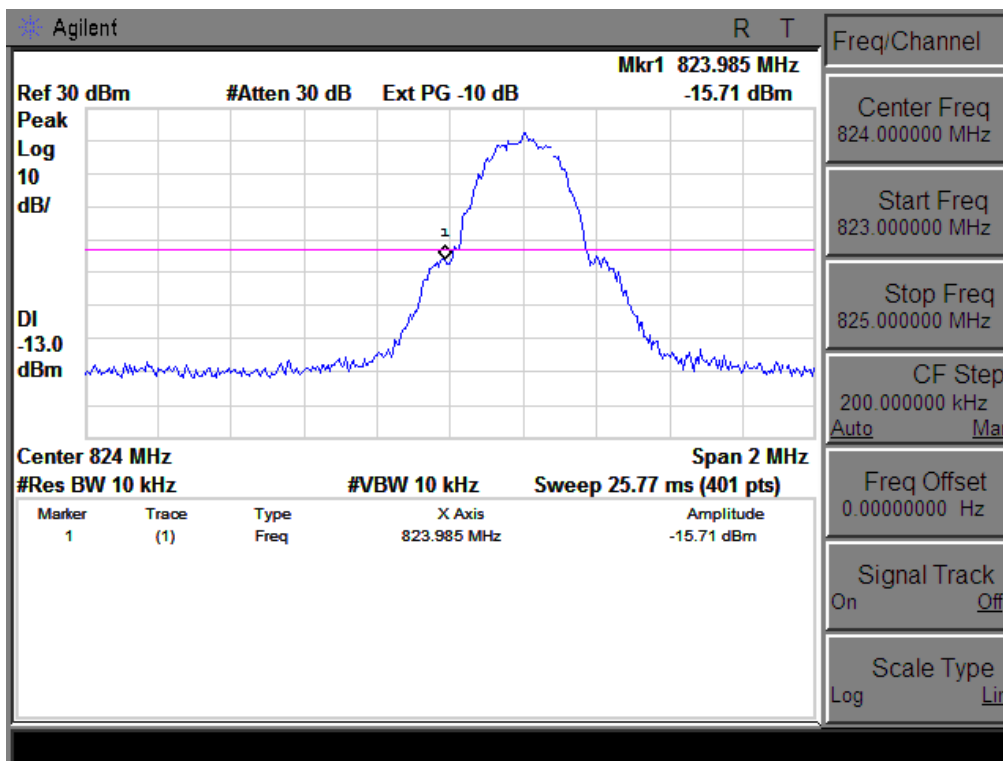


High Band Edge GSM 850 BAND CH 251

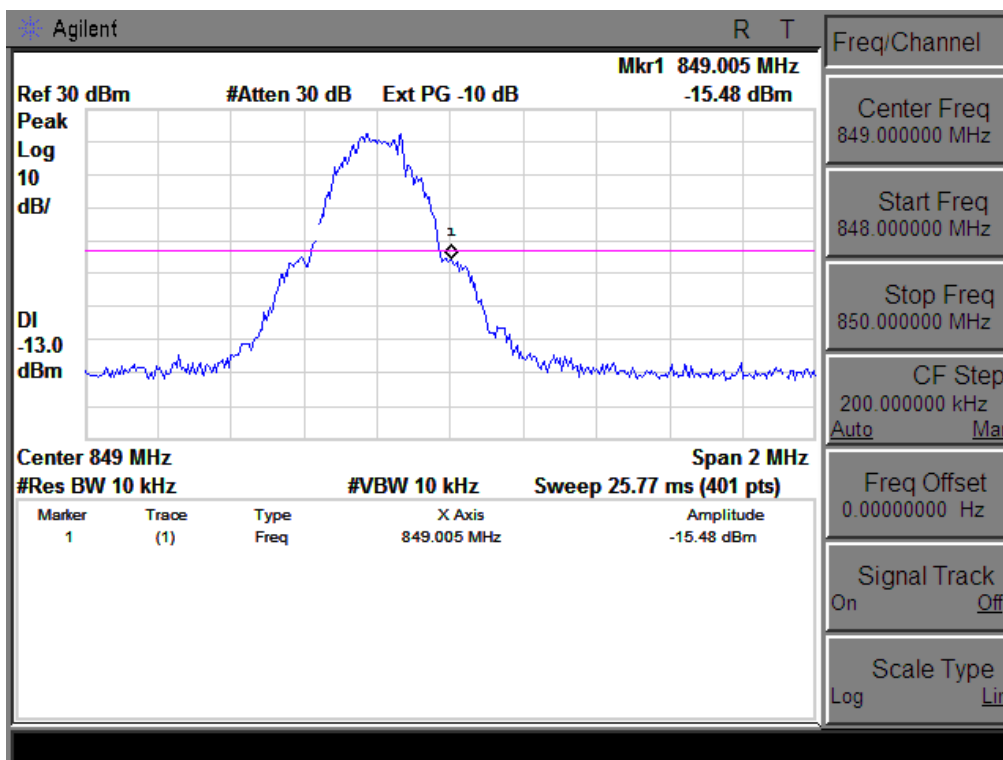


Low Band Edge PCS 1900 BAND CH 512

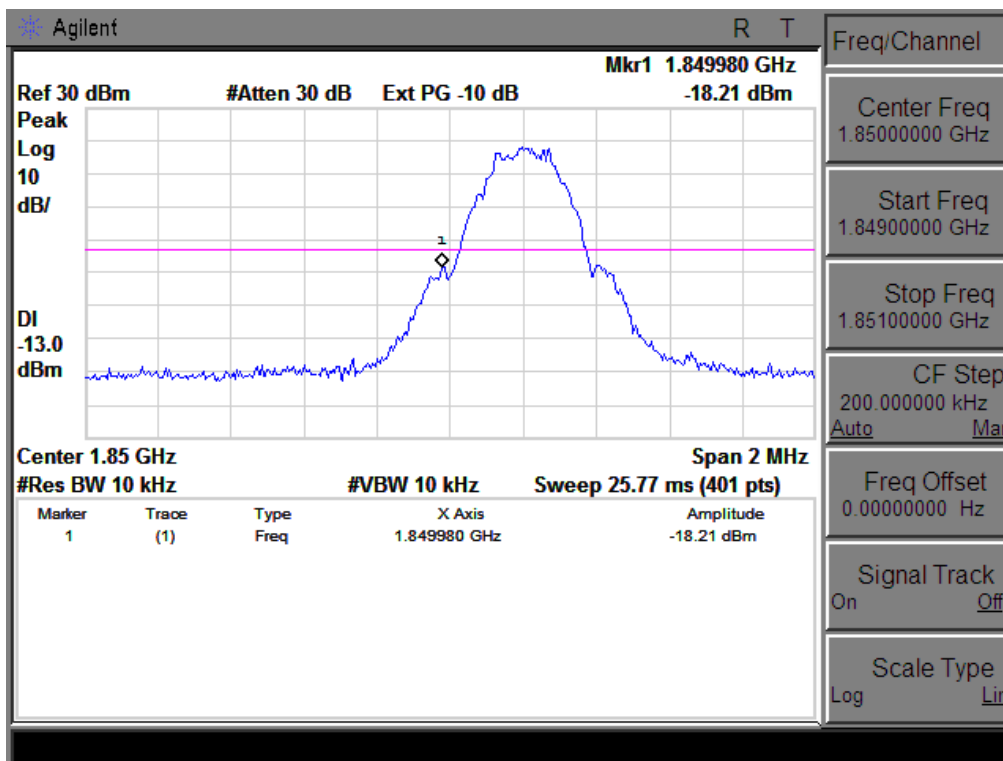


High Band Edge PCS 1900 BAND CH 810

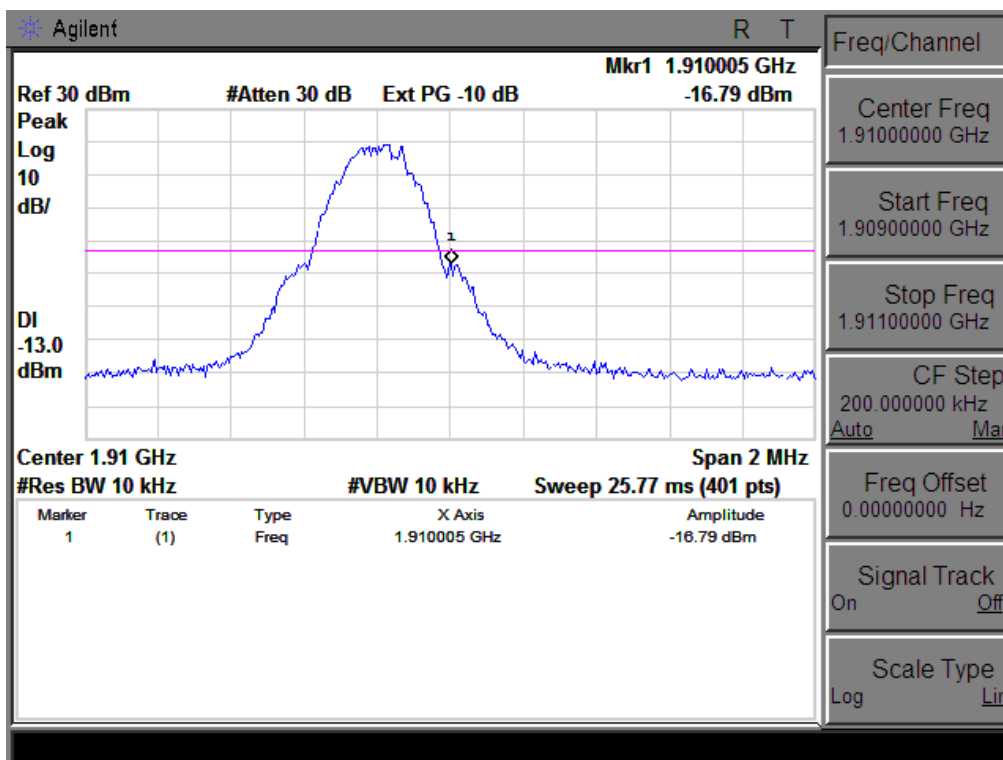


Low Band Edge UMTS BAND II CH 9262

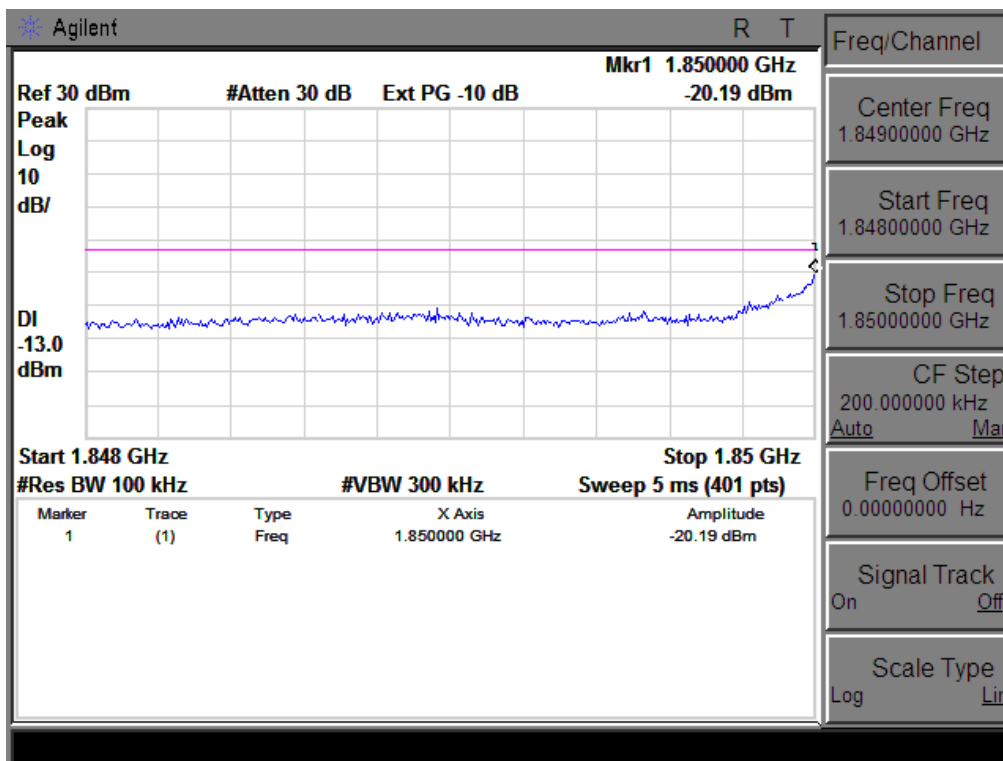


High Band Edge UMTS BAND II CH 9538

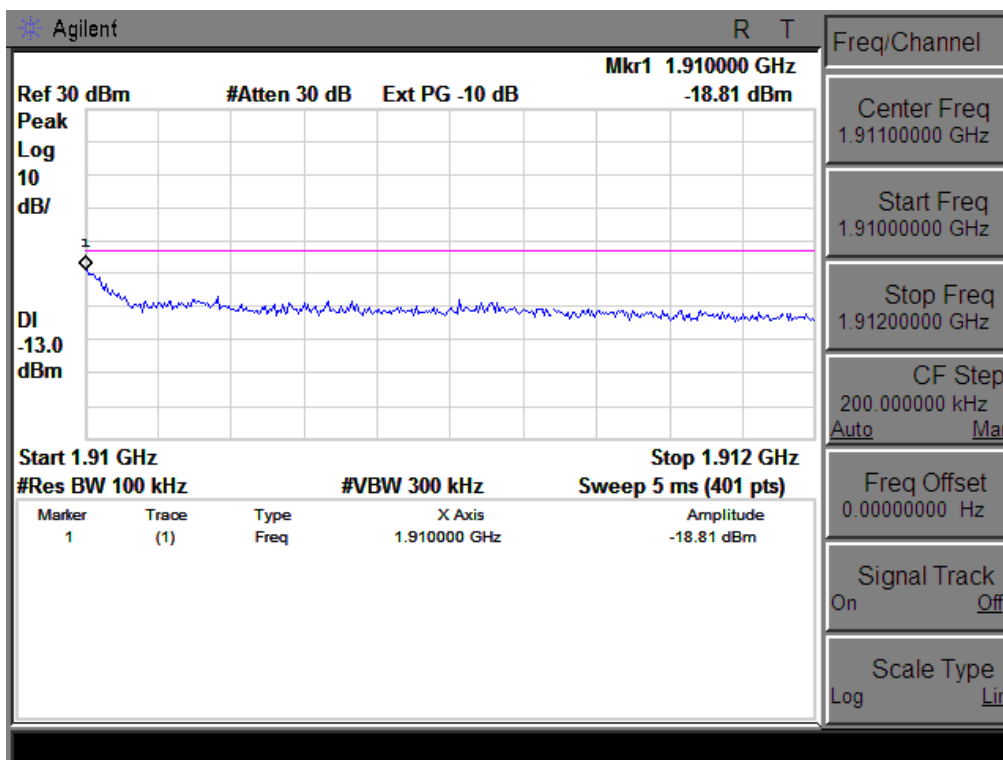

Low Band Edge UMTS BAND V CH 4132

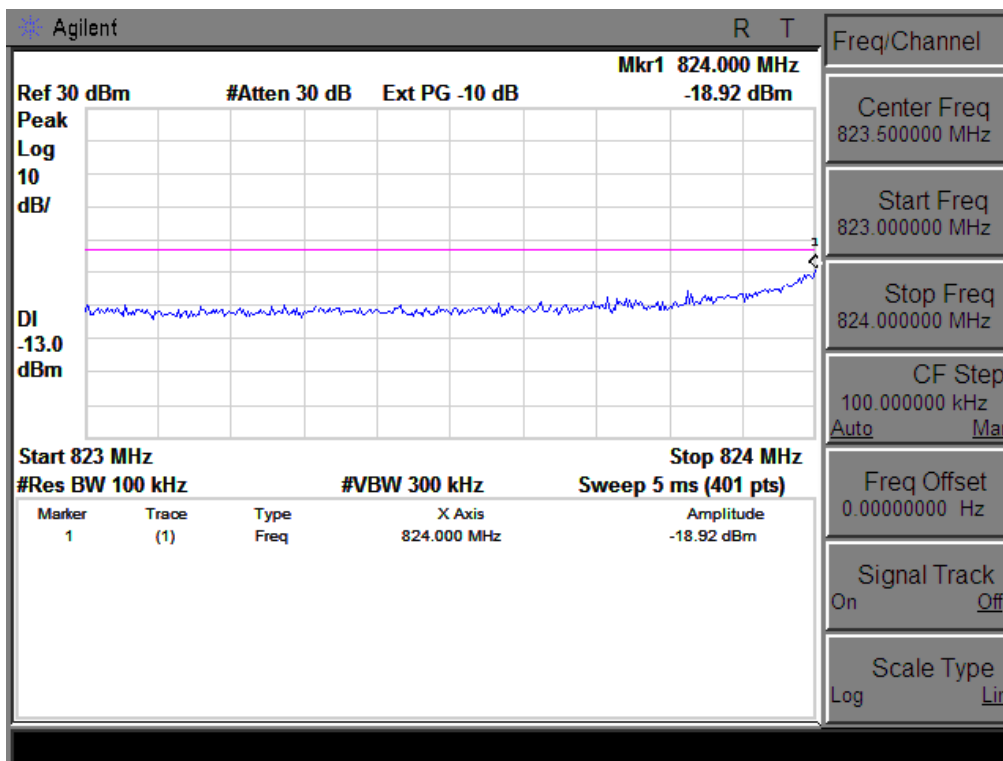

High Band Edge UMTS BAND V CH 4233

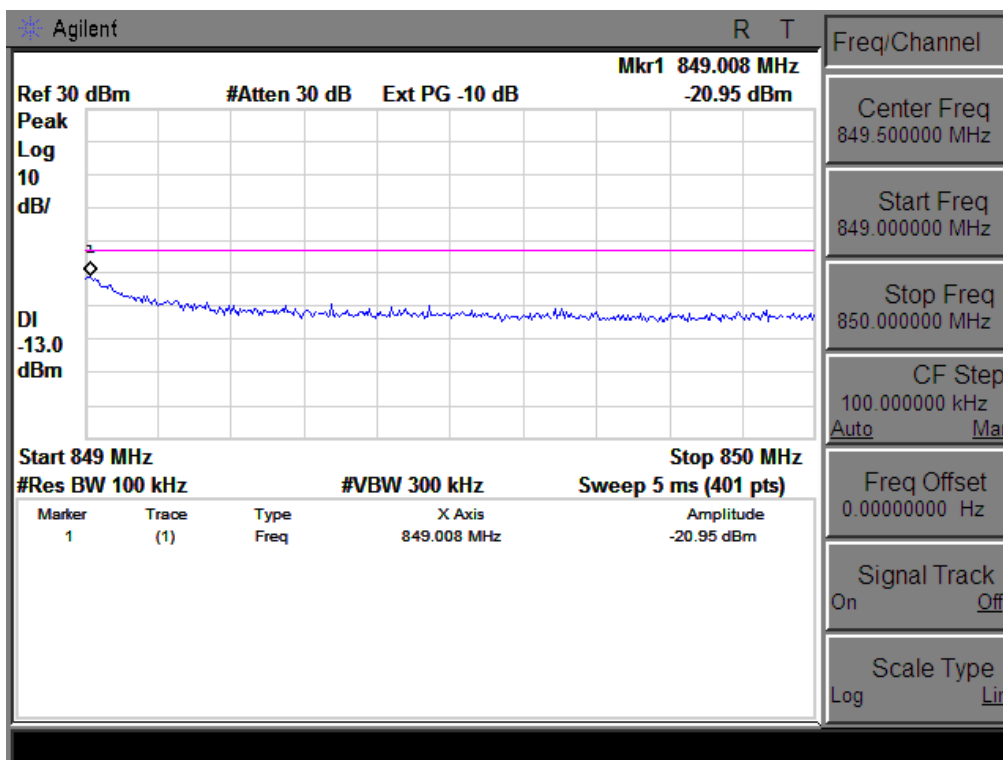

----END OF REPORT----